

PSA

佳邦科技股份有限公司

INPAQ TECHNOLOGY CO., LTD.

禾邦电子（苏州）有限公司

INPAQ TECHNOLOGY(SUZHOU) CO., LTD.

苏州市相城区黄埭镇春秋路5号

No. 5, Chunqiu Road, Huangdai Town, Xiangcheng District, Suzhou City

PSA

PASSIVE SYSTEM ALLIANCE
INPAQ TECHNOLOGY CO., LTD.

Copyright © by Passive System Alliance | All rights reserved.

PASSIVE SYSTEM ALLIANCE

银星智能 RPS11-扫地机器人 Antenna test report

Presented by: Guangmang_Chen

Checked by :Apple_Zhao

Approved by :Kevin_Yang

INPAQ Technology Co., Ltd.

Last updated in Apr.07th, 2025

Contents

- Revised History
- Requirements of Antenna Design and Measurement
- Antenna Placement & Solution
- VSWR Results
- Test Setup for Radiation Pattern Measurement
- 2D 、3D Radiation Pattern Results
- Results Summary (peak gain & efficiency)
- Results Summary (OTA)
- Conclusion

Revision History

Released Date	Version	Record
Apr.07 th ,2025	V0.1	天线测试报告



Requirements of Antenna Design and Measurement

Requirements of Antenna Design

RF Function	Frequency Band	Remark
WIFI	2400-2500MHz	

Requirements of Measurement

Test Item	Specification	Remark
VSWR	N/A	
Efficiency(%)	N/A	
Peak gain	N/A	

Antenna Placement & Solution

external


Internal




WIFI

WIFI

Antenna Placement & Solution

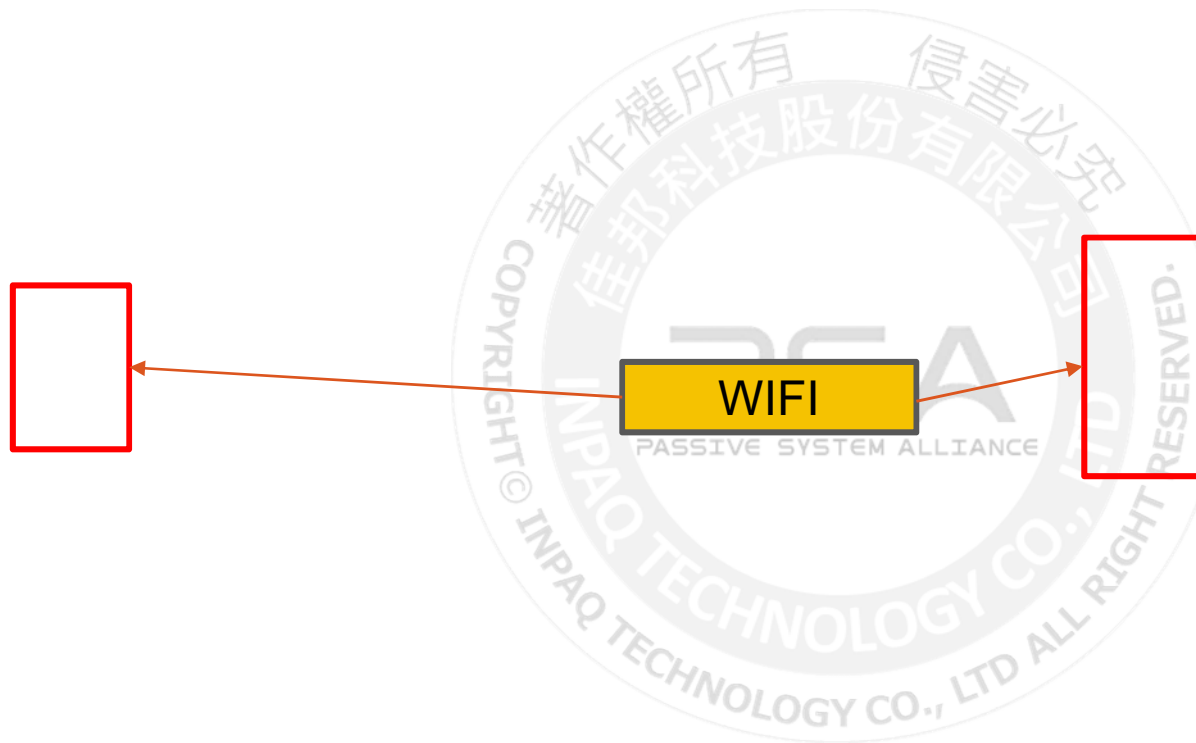

VSWR Results WIFI

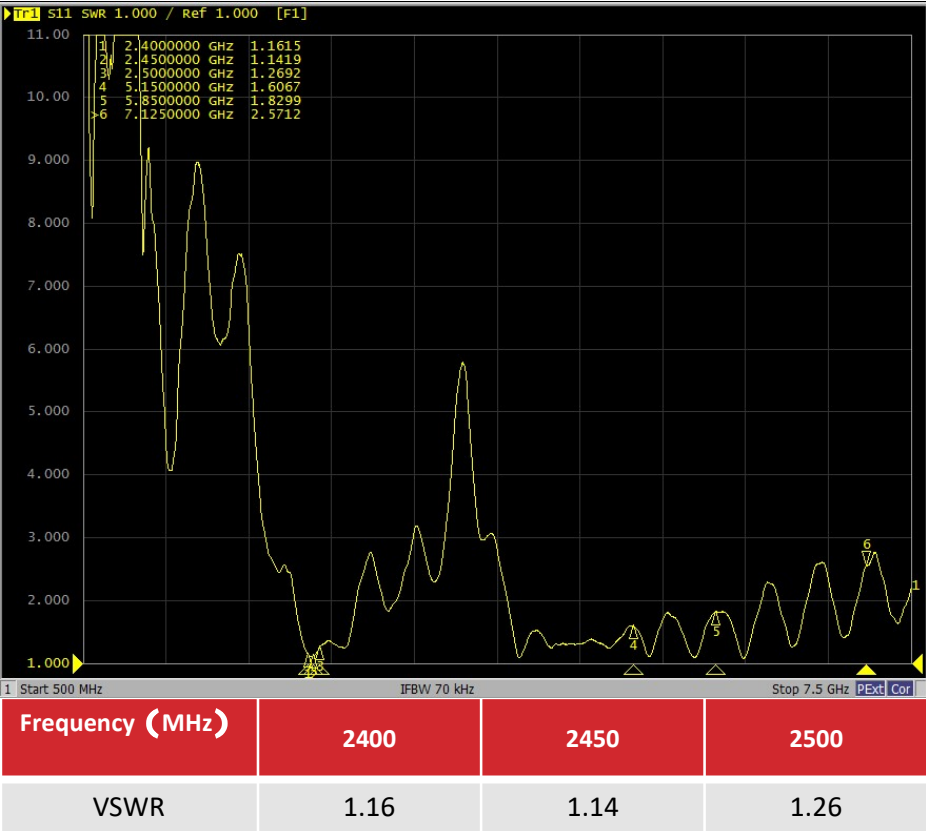

Test Setup for Radiation Pattern Measurement



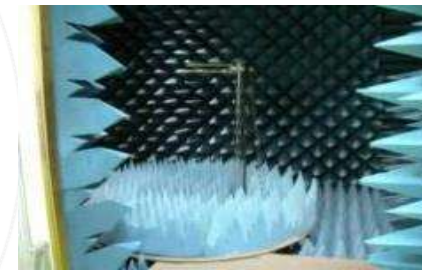



Figure 1: System diagram for test system including compact-size tapered anechoic chamber and optional test instrumentation

QUIPMENT	BRAND	MODULE TYPE
Spectrum	Agilent	E4402B
Signal Generator	Agilent	8960
Switch	Agilent	3499A
Switch	ETS	2090
Network Analyzer	Agilent	N5230A

3D Radiation Pattern Results

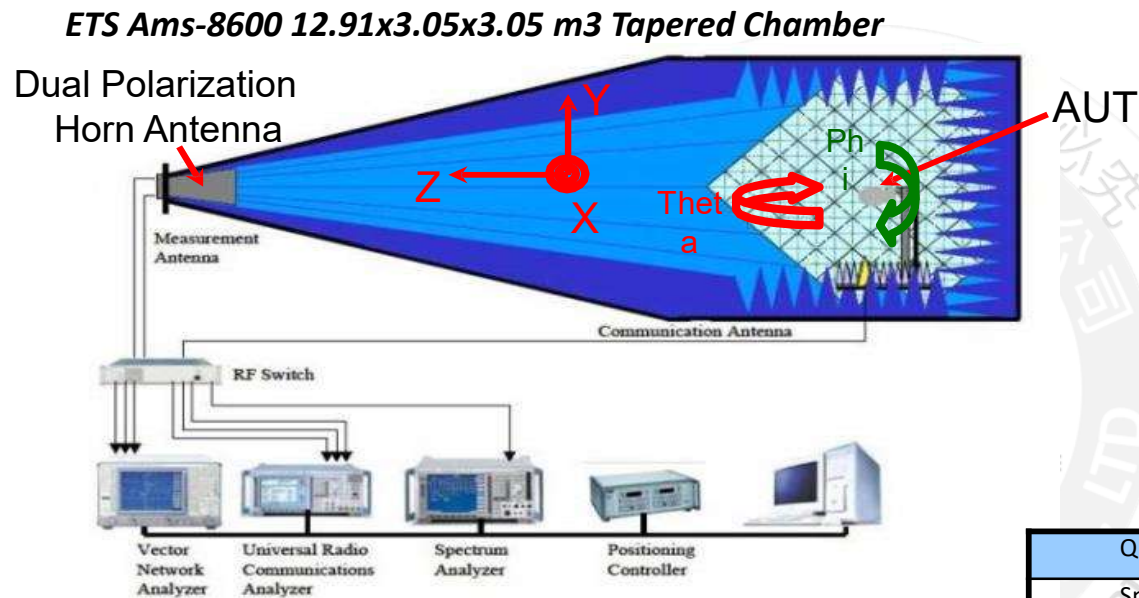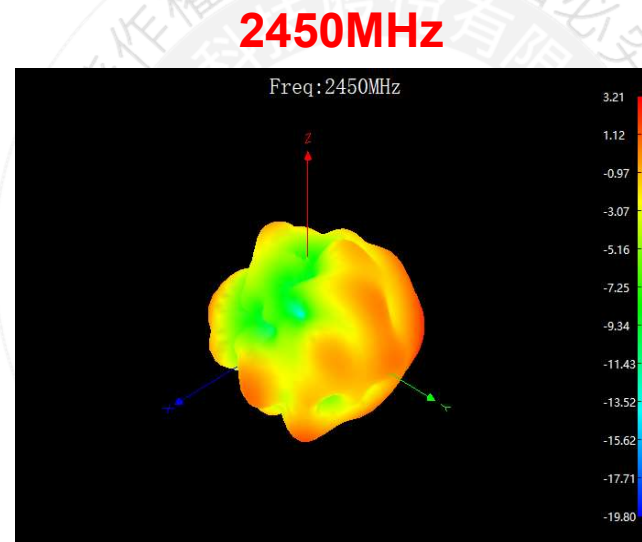


2D Radiation Pattern Results




2450MHz

XZ-E1-plane

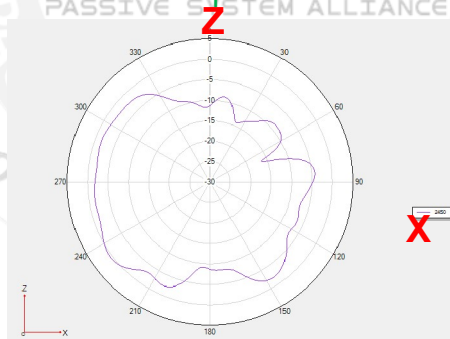


XY-H-plane

X

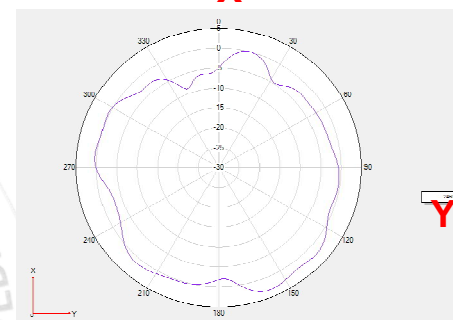

YZ-E2-plane

Z

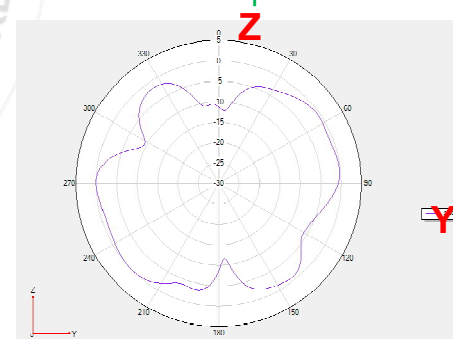

Results Summary-Peak Gain & Efficiency

Frequency (MHz)	Efficiency (dB)	Efficiency (%)	Peak Gain (dBi)
2400	-2.28	59.16	2.67
2410	-2.35	58.21	2.39
2420	-2.25	59.57	2.79
2430	-2.22	59.98	2.63
2440	-2.28	59.16	2.82
2450	-2.19	60.39	3.21
2460	-2.32	58.61	3.31
2470	-2.18	60.53	3.34
2480	-2.34	58.34	3.15
2490	-2.2	60.26	3.18
2500	-2.33	58.48	3.39

OTA

Band	Channel	Frequency	TRP	TIS
WIFI_B (11M/11M)	1	2412	17.28	
	6	2437	15.48	
	11	2462	16.26	-73.95
WIFI_G (6M/54M)	1	2412	13.6	
	6	2437	12.97	
	11	2462	12.51	-67.72
WIFI_N_ISM (6.5M/65M)	1	2412	15.81	
	6	2437	14.16	
	11	2462	13.75	-65.81

Conclusion

1. 以上数据为整机环境下的测试数据；
2. 从以上测试数据看，天线性能可以满足需求。

以上请知悉，感谢！

Thank you

本資料均屬機密，僅供指定之收件人使用，未經寄件人許可不得揭露、複製或散佈本信件。

This message and any attachments are confidential and may be legally privileged. Any unauthorized review, use or distribution by anyone other than the intended recipient is strictly prohibited. If you are not the intended recipient, please immediately notify the sender, completely delete this documents, and destroy all copies. Your cooperation will be highly appreciated.