MEASUREMENT REPORT

FCC PART 15C / RSS-247 WLAN 802.11b/g/n

FCC ID:	2AN2O-TSW06
IC:	23317-TSW06
Applicant:	Beijing Roborock Technology Co., Ltd.
Application Type:	Certification
Product:	Robotic Vacuum Cleaner
Model No.:	roborock S7
HVIN:	roborock S7-FN31
Brand Name:	roborock
FCC Classification:	Digital Transmission System (DTS)
FCC Rule Part(s):	Part 15 Subpart C (Section 15.247)
IC Rule(s):	RSS 247 Issue 2, RSS-GEN Issue 5
Test Procedure(s):	ANSI C63.10-2013
Test Date:	May 10 ~ June 04, 2021

Reviewed By: Sherry Jiang

Sherry Jiang

Approved By: Robin Wu

Robin Wu

ACCREDITED
TESTING LABORATORY
CERTIFICATE #3628.01

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2104RSU072-U4	Rev. 01	Initial Report	06-07-2021	Valid

CONTENTS

Description Page

1. General Information 5

1.1. Applicant 5
1.2. Manufacturer 5
1.3. Testing Facility 5

2. PRODUCT INFORMATION 6

2.1. Equipment Description 6
2.2. Product Specification Subjective to this Report 6
2.3. Working Frequencies for this report 7
2.4. Test Mode 7
2.5. Description of Test Software 7
2.6. Duty Cycle 8
2.7. EMI Suppression Device(s)/Modifications 9
2.8. Test Environment Condition 9
2.9. Description of Test Configuration 9
2.10. Test System Details 9

3. ANTENNA REQUIREMENTS 10

4. TEST EQUIPMENT CALIBRATION DATE 11

5. MEASUREMENT UNCERTAINTY 15

6. TEST RESULT 16

6.1. Summary 16
6.2. Occupied Bandwidth Measurement 17
6.2.1. Test Limit 17
6.2.2. Test Procedure used 17
6.2.3. Test Setting 17
6.2.4. Test Setup 18
6.2.5. Test Result 19
6.3. Output Power Measurement 27
6.3.1. Test Limit 27
6.3.2. Test Procedure Used 27
6.3.3. Test Setting 27
6.3.4. Test Setup 28
6.3.5. Test Result 29
6.4. Power Spectral Density Measurement 31
6.4.1. Test Limit 31

6.4.2. Test Procedure Used 31
6.4.3. Test Setting 31
6.4.4. Test Setup 31
6.4.5. Test Result 32
6.5. Conducted Band Edge and Out-of-Band Emissions 36
6.5.1. Test Limit 36
6.5.2. Test Procedure Used 36
6.5.3. Test Settitng 36
6.5.4. Test Setup 37
6.5.5. Test Result 38
6.6. Radiated Spurious Emission Measurement 45
6.6.1. Test Limit 45
6.6.2. Test Procedure Used 46
6.6.3. Test Setting 46
6.6.4. Test Setup 48
6.6.5. Test Result 49
6.7. Radiated Restricted Band Edge Measurement 60
6.7.1. Test Limit 60
6.7.2. Test Procedure Used 63
6.7.3. Test Setting 63
6.7.4. Test Setup 64
6.7.5. Test Result 65
6.8. AC Conducted Emissions Measurement 89
6.8.1. Test Limit 89
6.8.2. Test Setup 89
6.8.3. Test Result 90

7. CONCLUSION 94

Appendix A - Test Setup Photograph 95

Appendix B - EUT Photograph 96

1. General Information

1.1. Applicant

Beijing Roborock Technology Co., Ltd.

Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza, No. 8 Heiquan Road, Haidian District, Beijing P.R. CHINA

1.2. Manufacturer

Beijing Roborock Technology Co., Ltd.

Floor 6, Suite 6016, 6017, 6018, Building C, Kangjian Baosheng Plaza, No. 8 Heiquan Road, Haidian District, Beijing P.R. CHINA

1.3. Testing Facility

☒	**Test Site – MRT Suzhou Laboratory**	
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China **Laboratory Location (Suzhou - SIP)** 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China	
	Laboratory Accreditations	
	A2LA: 3628.01	CNAS: L10551
	FCC: CN1166	ISED: CN0001
	VCCI: R-20025, G-20034, C-20020, T-20020	
☐	**Test Site – MRT Shenzhen Laboratory**	
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China	
	Laboratory Accreditations	
	A2LA: 3628.02	CNAS: L10551
	FCC: CN1284	ISED: CN0105
☐	**Test Site – MRT Taiwan Laboratory**	
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)	
	Laboratory Accreditations	
	TAF: L3261-190725	
	FCC: 291082, TW3261	ISED: TW3261

2. PRODUCT INFORMATION

2.1. Equipment Description

Product Name	Robotic Vacuum Cleaner
Model No.	roborock S7
Brand Name	roborock
HVIN	roborock S7-FN31
FVIN	N/A
Test Device Label ID	20210506Sample#6
Wi-Fi Specification	802.11b/g/n
Wi-Fi module model No.	3181A-S
Antenna Delivery	1*Tx + 1*Rx
Accessories	
Charging Seat	Model No.: CDZ11RR/ CDZ12RR Rated Power: 28W Rated Input Voltage: 100-240V~50-60Hz Rated Output Voltage: 20V ⎓1.2A
Battery	Model No.: BRR-2P4S-5200S/ BRR-2P4S-5200D Capacitance: 74.88Wh, 5200mAh Rated Voltage: 14.4V

2.2. Product Specification Subjective to this Report

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462 MHz
Channel Number	802.11b/g/n-HT20: 11
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps
Maximum Output Power	802.11b: 24.05 dBm 802.11g: 28.33 dBm 802.11n-HT20: 28.32 dBm
Antenna Type	FPC Antenna
Antenna Gain	3.84dBi

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

2.4. Test Mode

Test Mode	Mode 1: Transmit by 802.11b (1Mbps)
	Mode 2: Transmit by 802.11g (6Mbps)
	Mode 3: Transmit by 802.11n-HT20 (MCS0)

2.5. Description of Test Software

The test utility software used during testing was “adb”.

2.6. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	99.16%
802.11g	98.37%
802.11n-HT20	98.62%

Duty Cycle (T = Transmission Duration)

802.11b

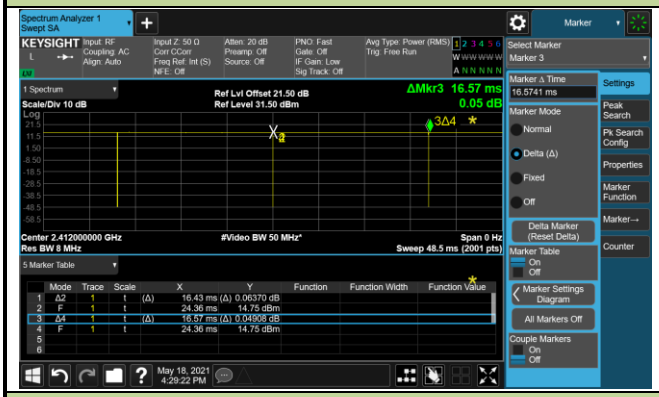

802.11g

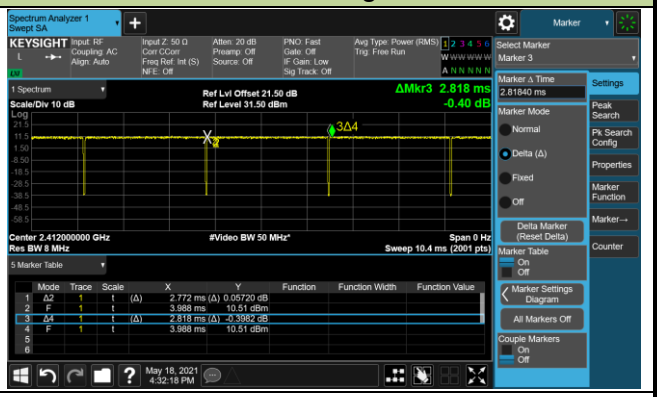

802.11n-HT20

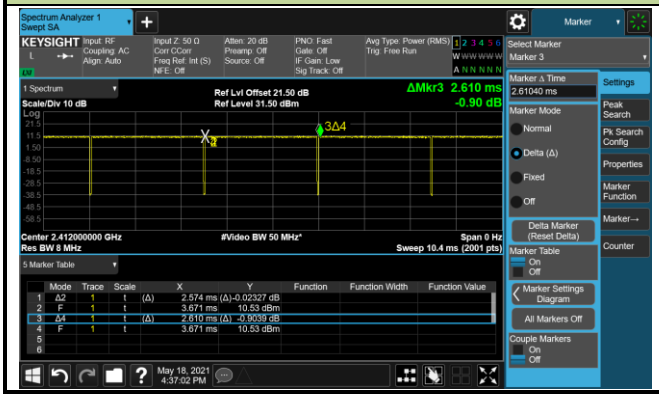

2.7. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.8. Test Environment Condition

Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~75%RH

2.9. Description of Test Configuration

The device was tested per the guidance ANSI C63.10- 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

Connection Diagram

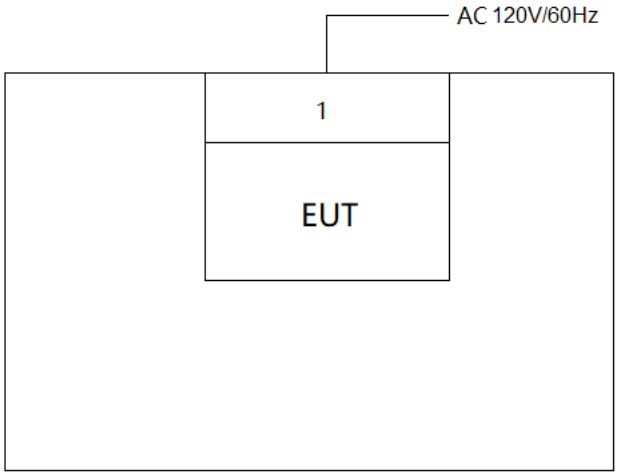

2.10. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product		Manufacturer	Model No.	Serial No.
1	Charging base	roborock	CDZ11RR/ CDZ12RR	N/A

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the device is **permanently attached.**
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission (WZ-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2022/01/12
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission (SIP-SR2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

Radiated Emission (WZ-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/01/04
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Horn Antenna	ETS.LINDGEN	3117	MRTSUE06257	1 year	2021/09/27
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2022/04/29

Radiated Emission (WZ-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/05/25
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Horn Antenna	ETS.LINDGEN	3117	MRTSUE06257	1 year	2021/09/27
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2022/04/29

Radiated Emission (SIP-AC1)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/12
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

Radiated Emission (SIP-AC2)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/12
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/13
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

Radiated Emission (SIP-AC3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2022/01/14
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2022/01/14
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

Conducted Test Equipment (WZ-TR3)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2022/04/13
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/01/07
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/13
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Thermal Hygrometer	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Conducted Test Equipment (SIP-SR5)

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2022/04/13
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2022/02/23
Thermal Hygrometer	testo	622	MRTSUE06629	1 year	2021/11/25

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% (U=2Uc(y)): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	≥ 500kHz	Conducted	Pass	Section 6.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	≤ 1Watt & EIRP ≤ 4Watt		Pass	Section 6.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	≤ 8dBm / 3kHz		Pass	Section 6.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	≥ 20dBc (Peak)		Pass	Section 6.5
15.205 15.209	RSS-247 [5.5]	General Field Strength (Restricted Bands and Radiated Emission)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 6.8

Notes:

1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.

6.2. Occupied Bandwidth Measurement

6.2.1.Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2.Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% bandwidth)

6.2.3.Test Setting

For 6dB bandwidth

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to X = 6. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. VBW ≥ 3 × RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace was allowed to stabilize

6.2.4.Test Setup

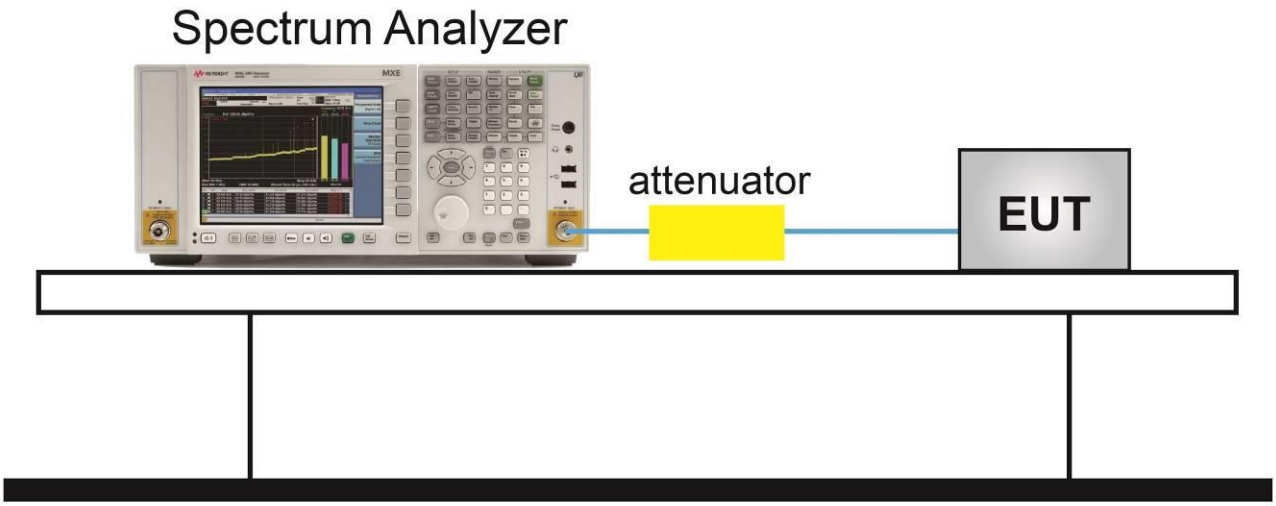

6.2.5.Test Result

Test Site	SIP-SR5	Test Engineer	Ternence Wang
Test Date	2021/05/18		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1Mbps	01	2412	9.10	≥ 0.5	Pass
802.11b	1Mbps	06	2437	9.10	≥ 0.5	Pass
802.11b	1Mbps	11	2462	9.10	≥ 0.5	Pass
802.11g	6Mbps	01	2412	16.38	≥ 0.5	Pass
802.11g	6Mbps	06	2437	16.37	≥ 0.5	Pass
802.11g	6Mbps	11	2462	16.37	≥ 0.5	Pass
802.11n-HT20	MCS0	01	2412	17.62	≥ 0.5	Pass
802.11n-HT20	MCS0	06	2437	17.60	≥ 0.5	Pass
802.11n-HT20	MCS0	11	2462	17.61	≥ 0.5	Pass

802.11b 6dB Bandwidth

Channel 01 (2412MHz)

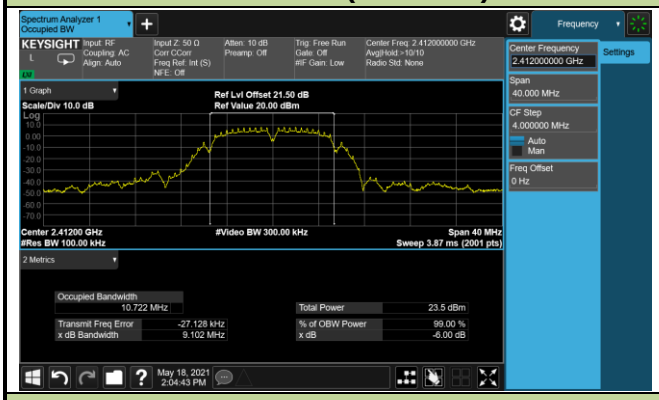

Channel 06 (2437MHz)

Channel 11 (2462MHz)

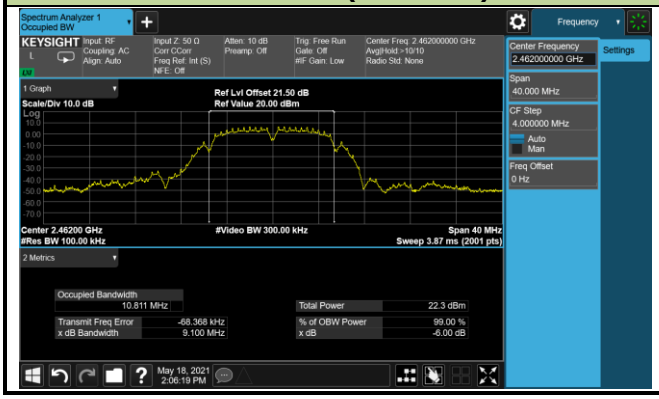

802.11g 6dB Bandwidth

Channel 01 (2412MHz)

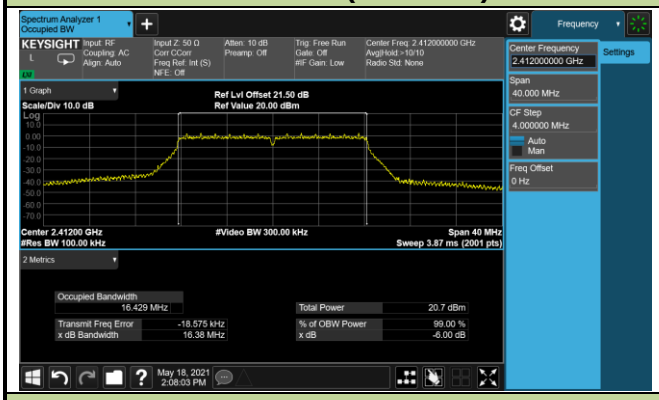

Channel 06 (2437MHz)

Channel 11 (2462MHz)

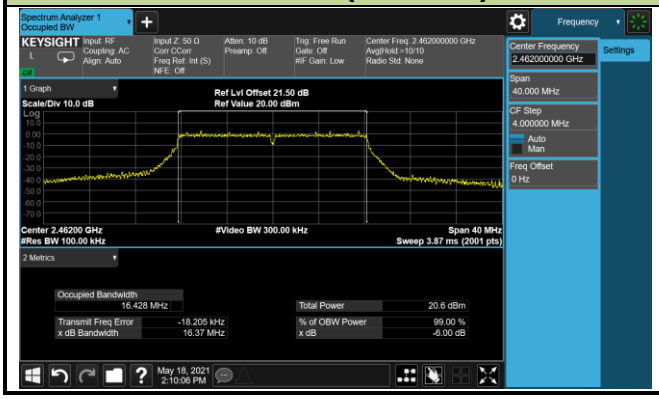

802.11n-HT20 6dB Bandwidth

Channel 01 (2412MHz)

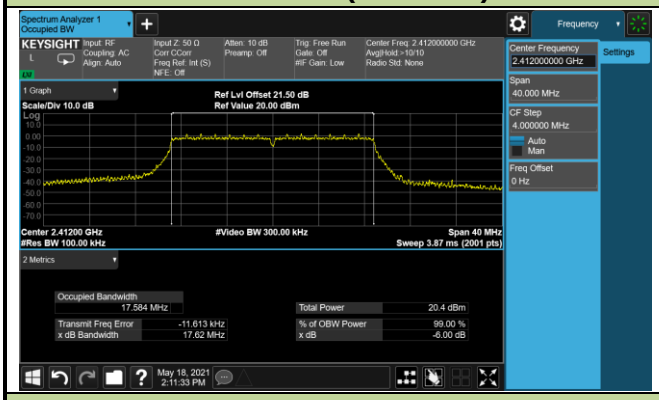

Channel 06 (2437MHz)

Channel 11 (2462MHz)

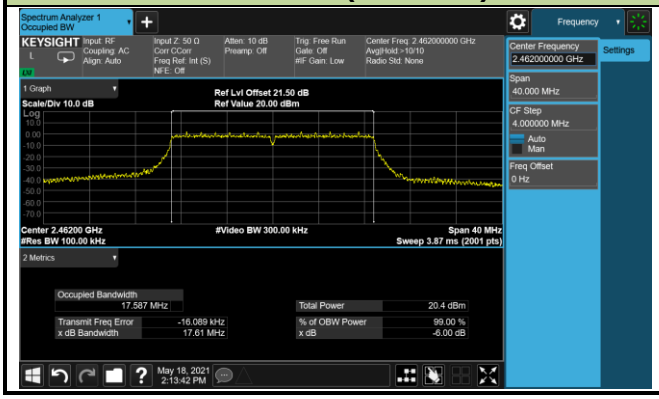

Test Site	SIP-SR5	Test Engineer	Ternence Wang
Test Date	2021/05/23		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)
802.11b	1Mbps	01	2412	11.05
802.11b	1Mbps	06	2437	10.98
802.11b	1Mbps	11	2462	10.97
802.11g	6Mbps	01	2412	16.54
802.11g	6Mbps	06	2437	16.54
802.11g	6Mbps	11	2462	16.54
802.11n-HT20	MCS0	01	2412	17.62
802.11n-HT20	MCS0	06	2437	17.62
802.11n-HT20	MCS0	11	2462	17.63

802.11b 99% Bandwidth

Channel 01 (2412MHz)

Channel 06 (2437MHz)

Channel 11 (2462MHz)

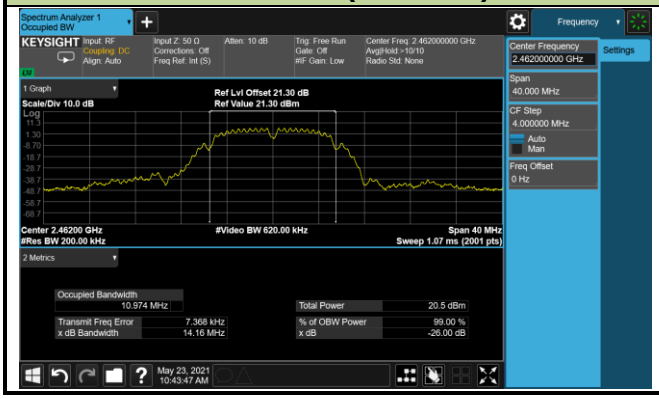

802.11g 99% Bandwidth

Channel 01 (2412MHz)

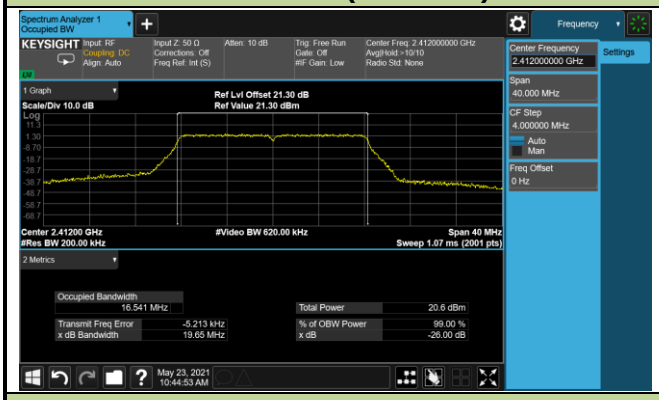

Channel 06 (2437MHz)

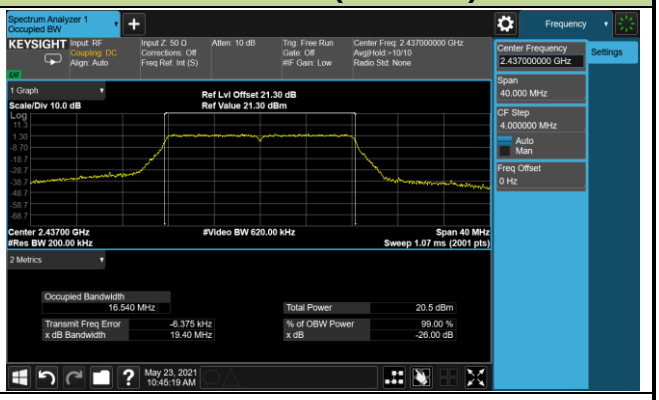

Channel 11 (2462MHz)

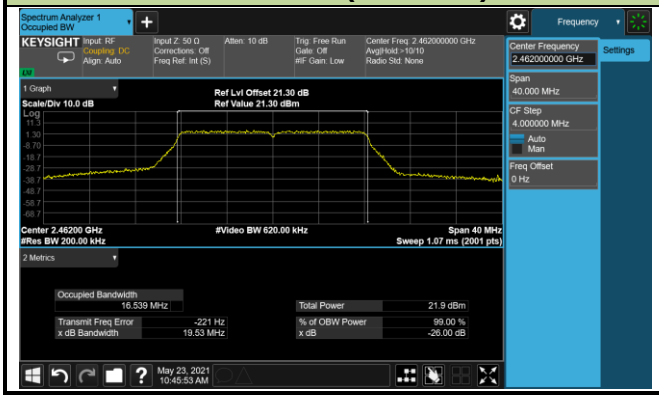

802.11n-HT20 99% Bandwidth

Channel 01 (2412MHz)

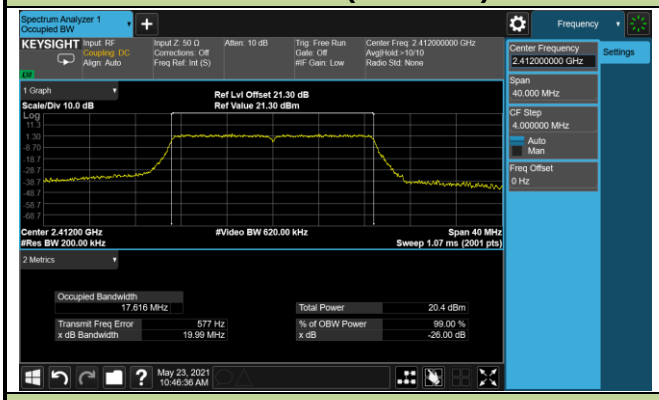

Channel 06 (2437MHz)

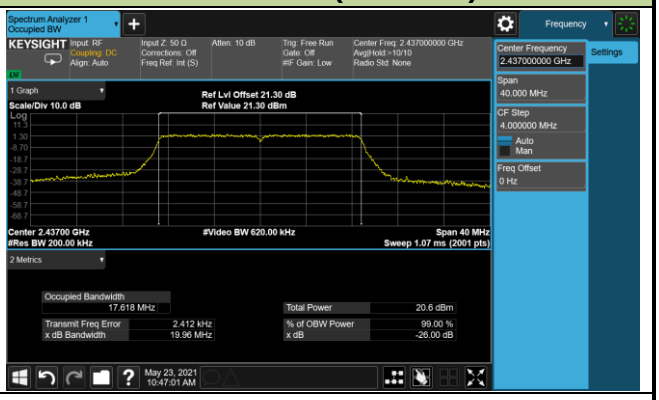

Channel 11 (2462MHz)

6.3. Output Power Measurement

6.3.1.Test Limit

The maximum conducted output power shall not exceed 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

6.3.2.Test Procedure Used

ANSI C63.10-2013 - Section 11.9.1.3

ANSI C63.10-2013 - Section 11.9.2.3.2

6.3.3.Test Setting

Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

6.3.4.Test Setup

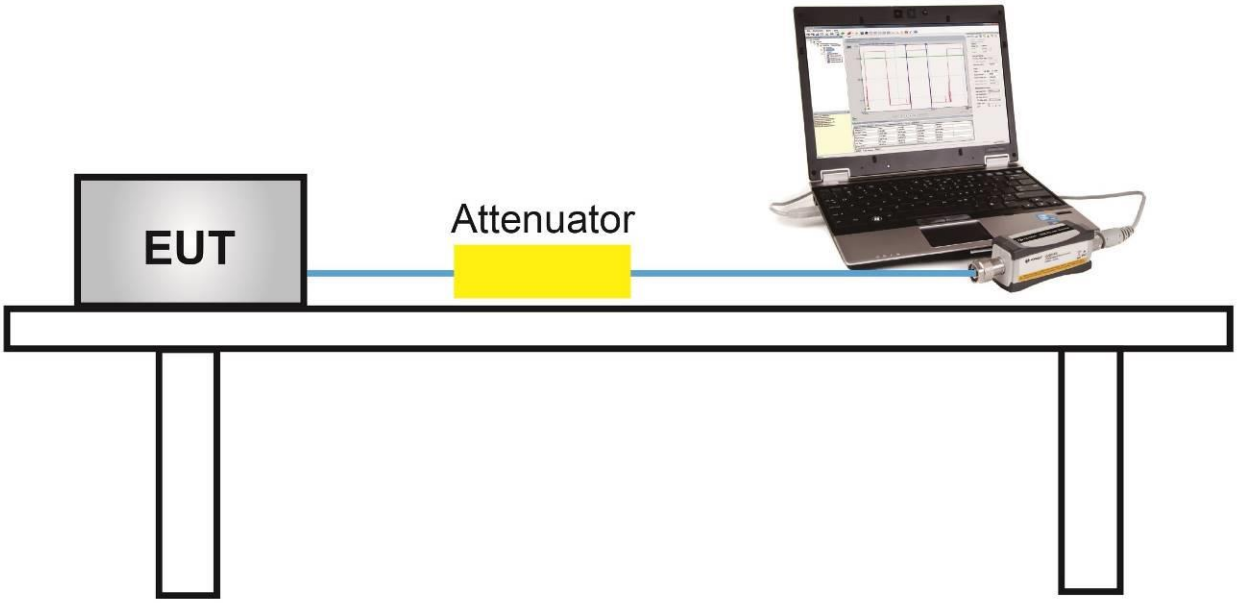

6.3.5.Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	6	2437	1Mbps	16.11
				5.5Mbps	15.98
				11Mbps	15.84
802.11g	20	6	2437	6Mbps	13.61
				24Mbps	13.50
				54Mbps	13.39
802.11n	20	6	2437	MCS0	13.54
				MCS3	13.41
				MCS7	13.30

Test Site	SIP-SR5	Test Engineer	Ternence Wang
Test Date	2021/05/18		

Test Result of Peak Output Power

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
11b	1Mbps	01	2412	20.06	≤ 30.00	23.90	≤36.00	Pass
11b	1Mbps	06	2437	20.21	≤ 30.00	24.05	≤36.00	Pass
11b	1Mbps	11	2462	19.87	≤ 30.00	23.71	≤36.00	Pass
11g	6Mbps	01	2412	23.70	≤ 30.00	27.54	≤36.00	Pass
11g	6Mbps	06	2437	24.03	≤ 30.00	27.87	≤36.00	Pass
11g	6Mbps	11	2462	24.49	≤ 30.00	28.33	≤36.00	Pass
11n-HT20	MCS0	01	2412	23.36	≤ 30.00	27.20	≤36.00	Pass
11n-HT20	MCS0	06	2437	23.15	≤ 30.00	26.99	≤36.00	Pass
11n-HT20	MCS0	11	2462	24.48	≤ 30.00	28.32	≤36.00	Pass

Note: E.I.R.P (dBm) = Peak Power (dBm) + Antenna Gain (dBi), Antenna Gain = 3.84 dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Average Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
11b	1Mbps	01	2412	15.96	≤ 30.00	19.80	≤36.00	Pass
11b	1Mbps	06	2437	16.11	≤ 30.00	19.95	≤36.00	Pass
11b	1Mbps	11	2462	15.39	≤ 30.00	19.23	≤36.00	Pass
11g	6Mbps	01	2412	14.13	≤ 30.00	17.97	≤36.00	Pass
11g	6Mbps	06	2437	13.61	≤ 30.00	17.45	≤36.00	Pass
11g	6Mbps	11	2462	14.65	≤ 30.00	18.49	≤36.00	Pass
11n-HT20	MCS0	01	2412	13.58	≤ 30.00	17.42	≤36.00	Pass
11n-HT20	MCS0	06	2437	13.54	≤ 30.00	17.38	≤36.00	Pass
11n-HT20	MCS0	11	2462	13.85	≤ 30.00	17.69	≤36.00	Pass

Note: E.I.R.P (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = 3.84 dBi.

6.4. Power Spectral Density Measurement

6.4.1.Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.

6.4.2.Test Procedure Used

ANSI C63.10-2013 - Section 11.10.3& 11.10.5

6.4.3.Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span >= 1.5 times the OBW
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.4.4.Test Setup

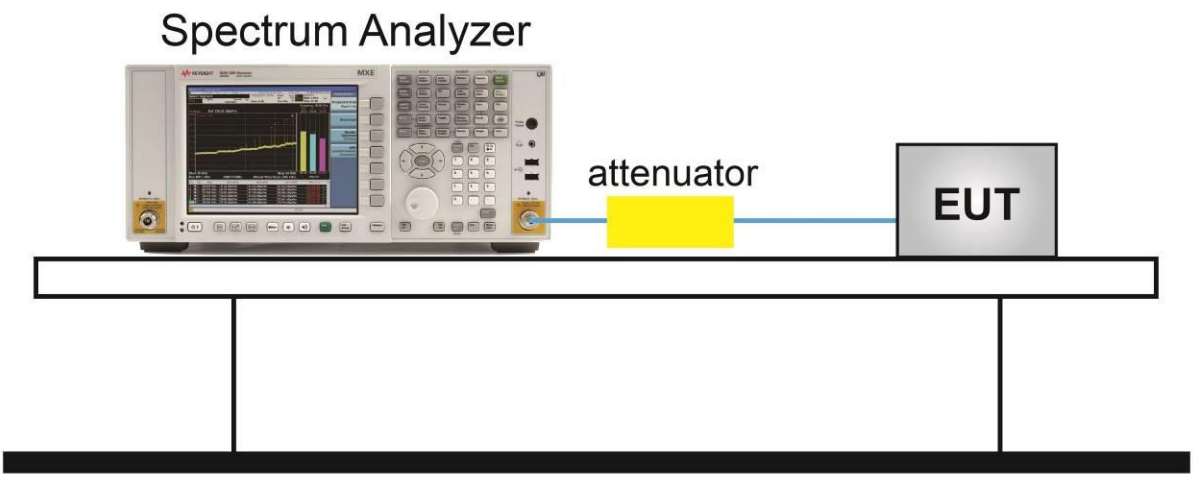

6.4.5.Test Result

Test Site	SIP-SR5	Test Engineer	Ternence Wang
Test Date	2021/05/18		

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	PSD Result (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
11b	1Mbps	01	2412	-6.16	≤ 8.00	Pass
11b	1Mbps	06	2437	-6.57	≤ 8.00	Pass
11b	1Mbps	11	2462	-7.31	≤ 8.00	Pass
11g	6Mbps	01	2412	-9.18	≤ 8.00	Pass
11g	6Mbps	06	2437	-9.79	≤ 8.00	Pass
11g	6Mbps	11	2462	-9.06	≤ 8.00	Pass
11n-HT20	MCS0	01	2412	-9.26	≤ 8.00	Pass
11n-HT20	MCS0	06	2437	-10.50	≤ 8.00	Pass
11n-HT20	MCS0	11	2462	-9.90	≤ 8.00	Pass

802.11b Peak PSD

Channel 01 (2412MHz)

Channel 06 (2437MHz)

Channel 11 (2462MHz)

802.11g - Peak PSD	
Channel 01 (2412MHz)	**Channel 06 (2437MHz)**
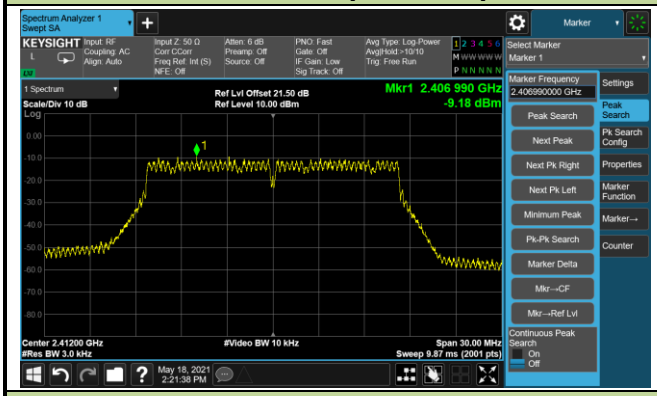	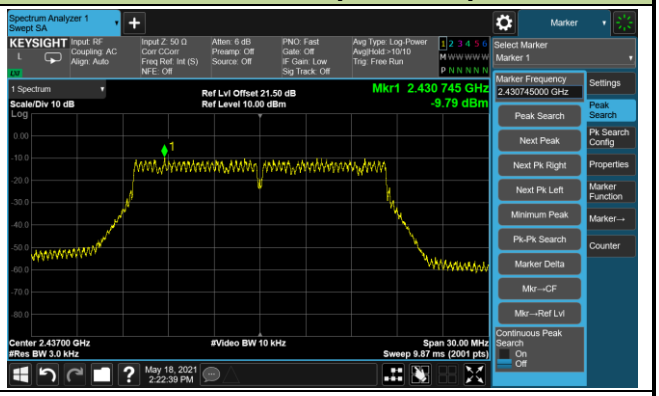
Channel 11 (2462MHz)	
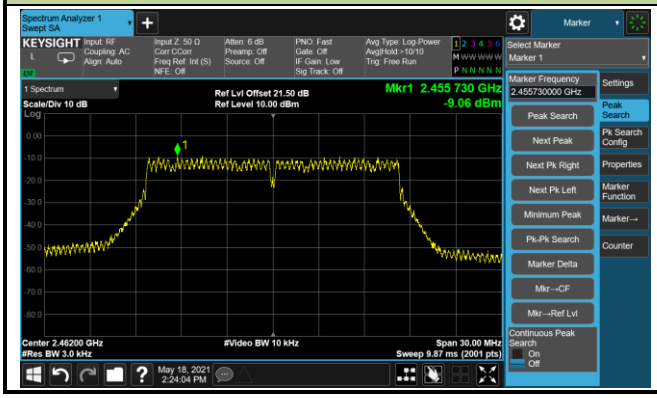	

802.11n-HT20 - Peak PSD

Channel 01 (2412MHz)

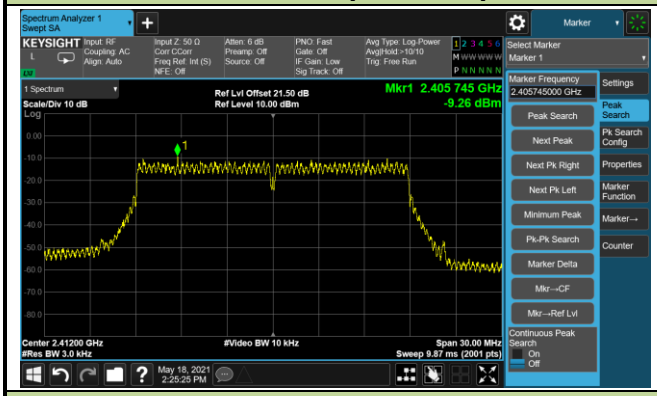

Channel 06 (2437MHz)

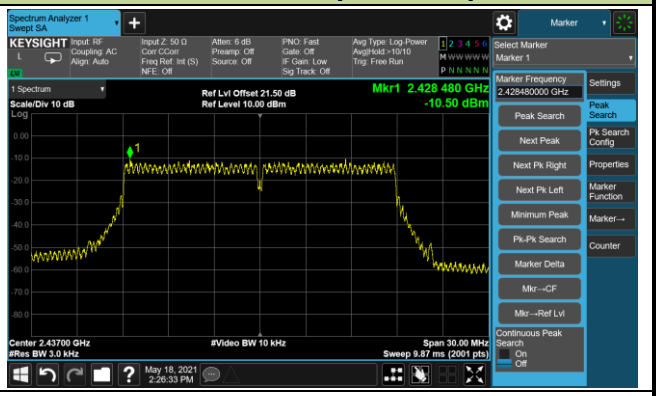

Channel 11 (2462MHz)

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1.Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2.Test Procedure Used

ANSI C63.10-2013 - Section 11.11

6.5.3.Test Settitng

Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW ≥ 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4.Test Setup

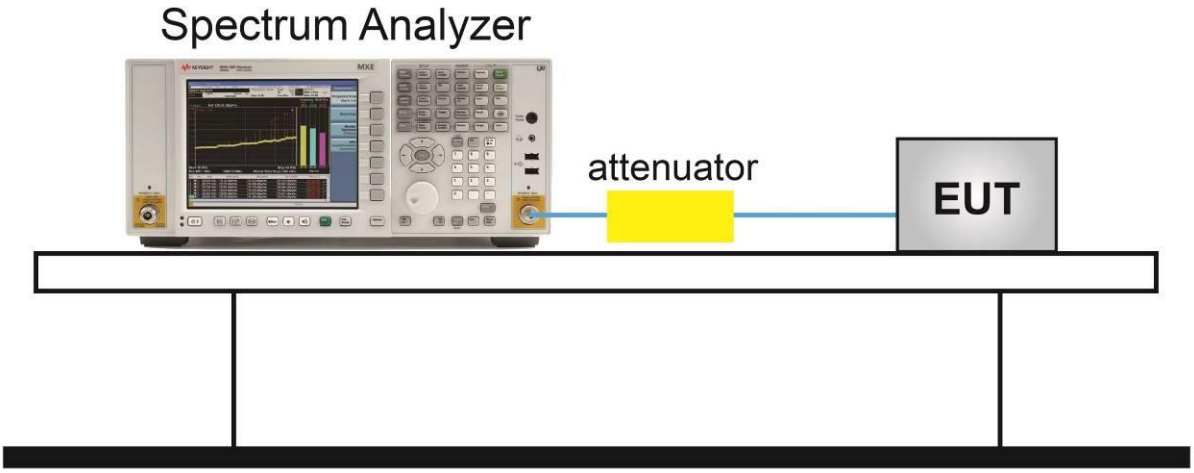

6.5.5.Test Result

Test Site	SIP-SR5	Test Engineer	Ternence Wang
Test Date	2021/05/18		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit	Result
802.11b	1Mbps	01	2412	20dBc	Pass
802.11b	1Mbps	06	2437	20dBc	Pass
802.11b	1Mbps	11	2462	20dBc	Pass
802.11g	6Mbps	01	2412	20dBc	Pass
802.11g	6Mbps	06	2437	20dBc	Pass
802.11g	6Mbps	11	2462	20dBc	Pass
802.11n-HT20	MCS0	01	2412	20dBc	Pass
802.11n-HT20	MCS0	06	2437	20dBc	Pass
802.11n-HT20	MCS0	11	2462	20dBc	Pass

802.11b Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

Low Band Edge

Spurious Emission

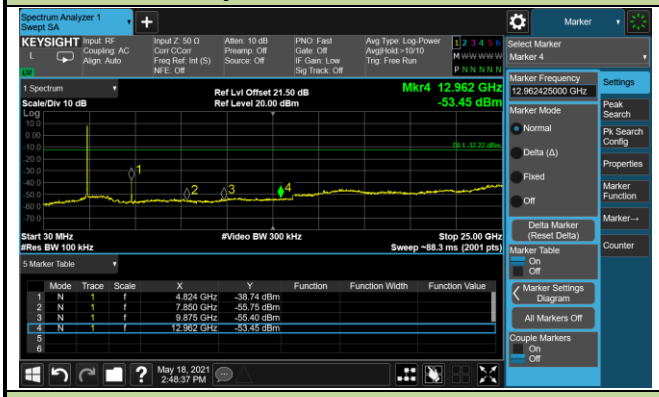

Channel 06 (2437MHz)

100kHz PSD Reference Level

Spurious Emission

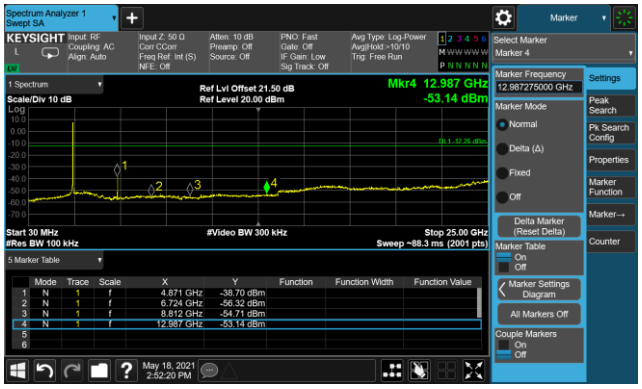

802.11b Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

High Band Edge

Spurious Emission

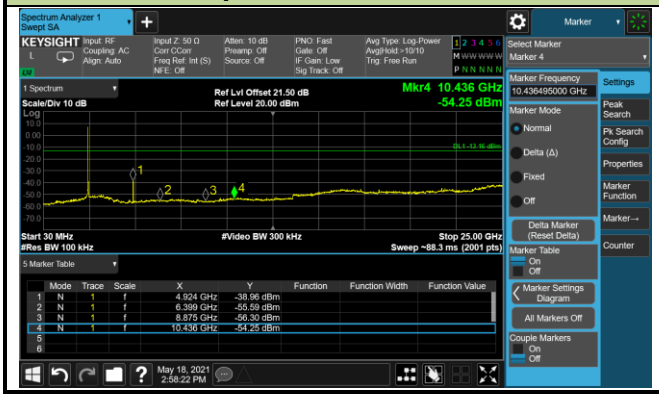

802.11g Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

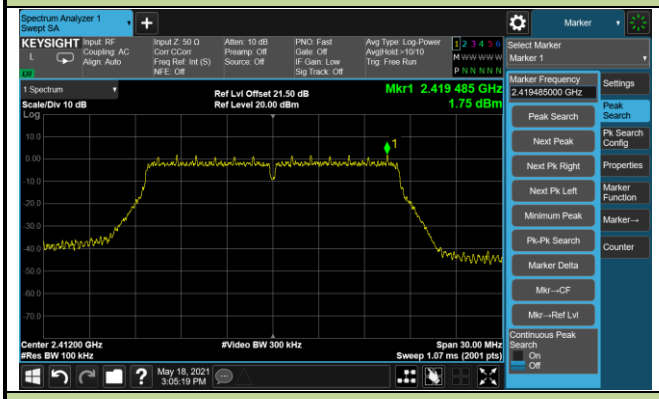

Low Band Edge

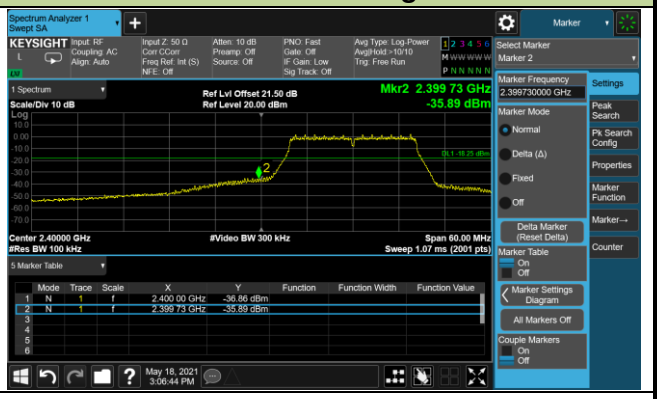

Spurious Emission

Channel 06 (2437MHz)

100kHz PSD Reference Level

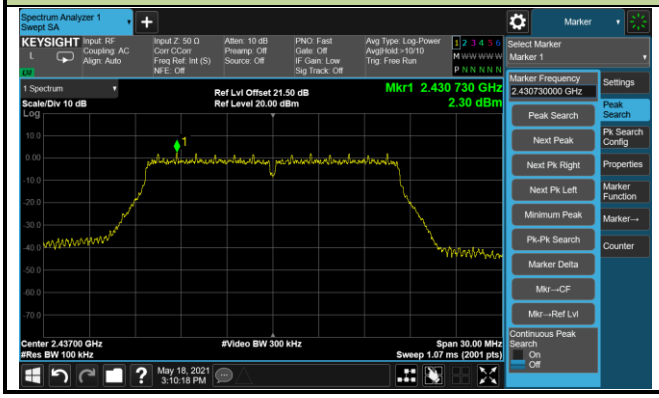

Spurious Emission

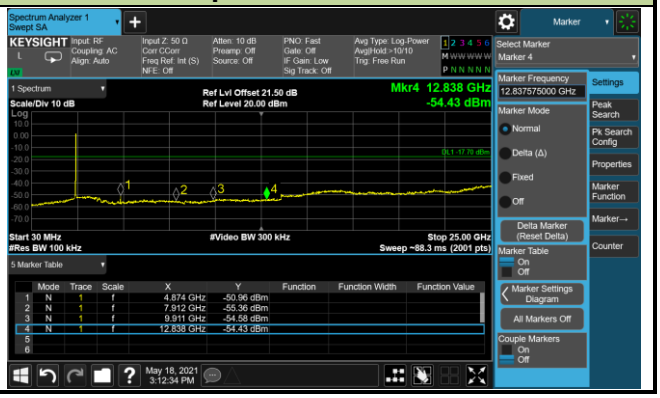

802.11g Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level

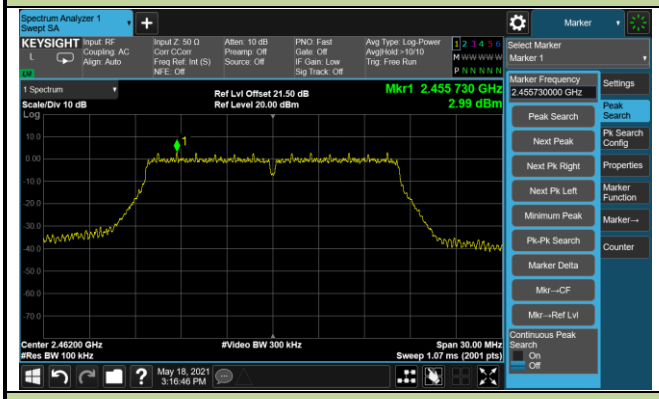

High Band Edge

Spurious Emission

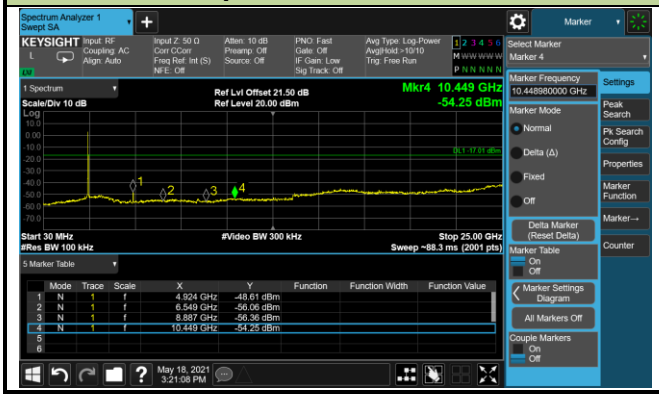

802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)

100kHz PSD Reference Level

Low Band Edge

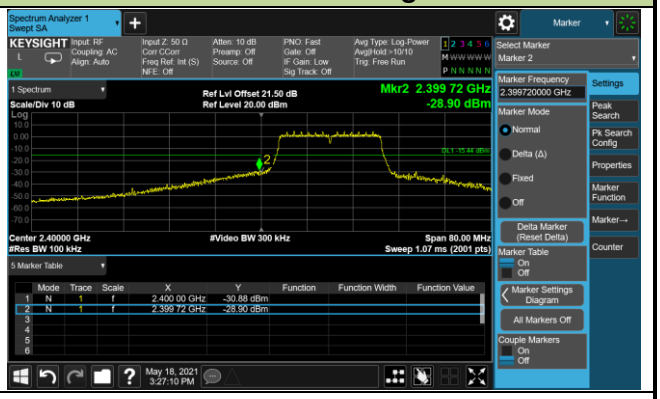

Spurious Emission

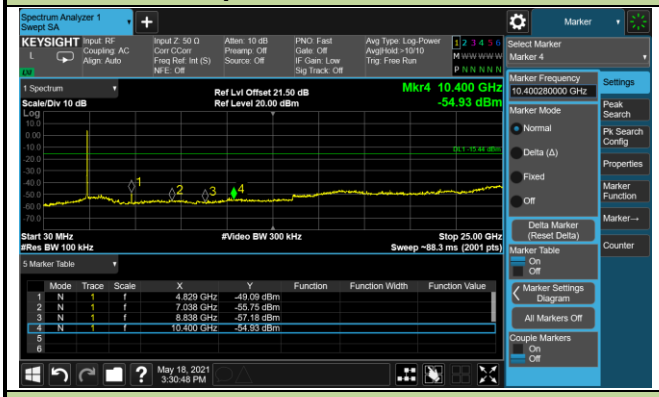

Channel 06 (2437MHz)

100kHz PSD Reference Level

Spurious Emission

802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)

100kHz PSD Reference Level	High Band Edge
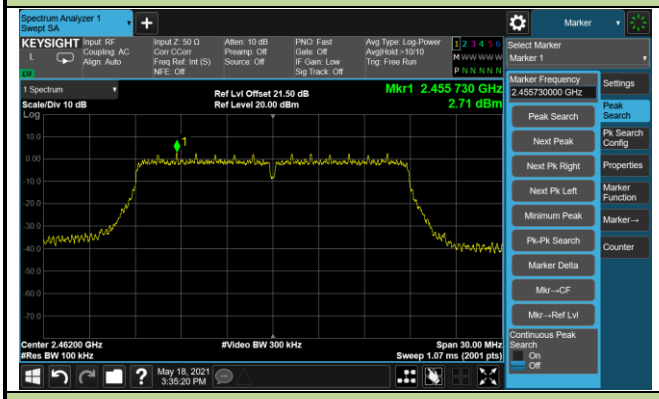	
Spurious Emission	

6.6. Radiated Spurious Emission Measurement

6.6.1.Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in below table. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

RSS Gen 8.9 Transmitter emission limits General field strength limits at frequencies above 30 MHz		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
30 - 38	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3
RSS Gen 8.9 Transmitter emission limits General field strength limits at frequencies below 30 MHz		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
9 – 490 KHz Note 1	6.37/F (F in kHz)	300
490 -1705 kHz	63.7/F (F in kHz)	30
1.705 -30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

6.6.2.Test Procedure Used

ANSI C63.10 - Section 6.3 (General Requirements)

ANSI C63.10 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - Section 6.6 (Standard test method above 1GHz)

6.6.3.Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. Span was set greater than 1MHz

3. RBW = as specified in Table 1

4. Detector = CISPR quasi-peak

5. Sweep time = auto couple

6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW = 3MHz

4. Detector = peak

5. Sweep time = auto couple

6. Trace mode = max hold

7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest

2. RBW = 1MHz

3. VBW; If the EUT is configured to transmit with duty cycle ≥ 98%, set VBW = 10 Hz.

If the EUT duty cycle is < 98%, set VBW ≥ 1/T. T is the minimum transmission duration.

4. Detector = Peak

5. Sweep time = auto

6. Trace mode = max hold

7. Trace was allowed to stabilize

6.6.4.Test Setup

Below 1GHz Test Setup:

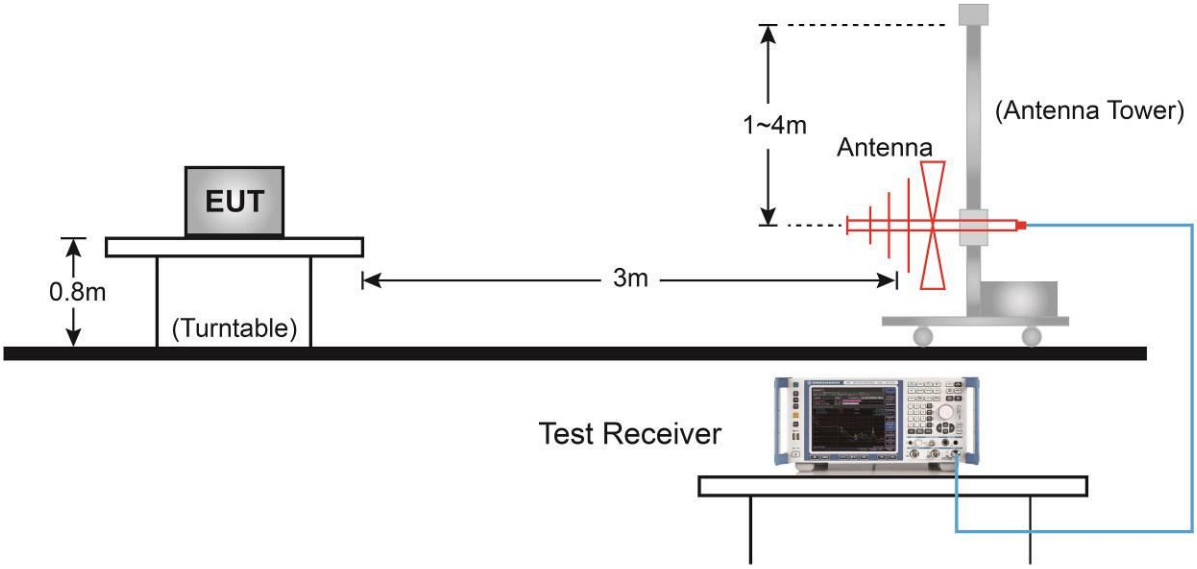
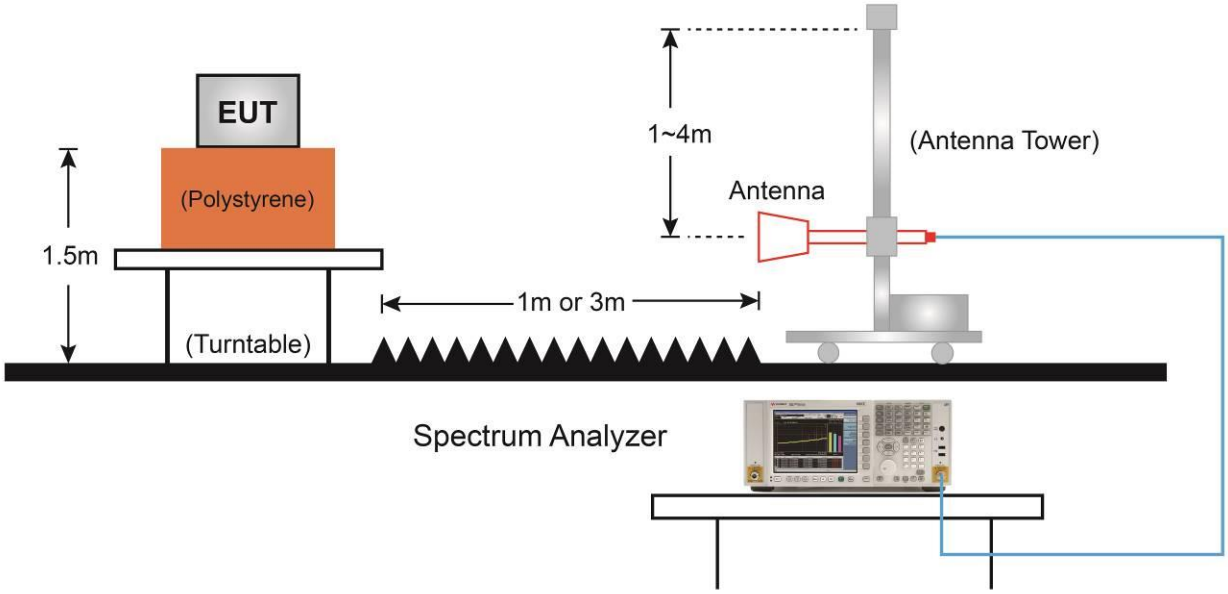
Above 1GHz Test Setup: