



FCC 47 CFR PART 15 SUBPART C
CERTIFICATION TEST REPORT

For

One wheel scooter

MODEL NUMBER: KO1

FCC ID: 2AN2X-KO1

REPORT NUMBER: 4788156723.1-7

ISSUE DATE: December 5, 2017

Prepared for

SI HK LIMITED
12/F INTERNATIONAL COMMERCE CTR I AUSTIN RD WEST KLN HONG KONG

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park,
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Tel: +86 769 33871725
Fax: +86 769 33871725
Website: www.ul.com

Revision History

Rev.	Issue Date	Revisions	Revised By
--	12/5/2017	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6db DTS Bandwidth	FCC 15.247 (a) (2)	Complied
2	Peak Conducted Power	FCC 15.247 (b) (3)	Complied
3	Power Spectral Density	FCC 15.247 (e)	Complied
4	Conducted Band edge And Spurious emission	FCC 15.247 (d)	Complied
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205	Complied
6	Conducted Emission Test For AC Power Port	FCC 15.207	Complied
7	Antenna Requirement	FCC 15.203	Complied

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT.....	9
5.2. MAXIMUM OUTPUT POWER.....	9
5.3. CHANNEL LIST.....	9
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	10
5.7. WORST-CASE CONFIGURATIONS.....	10
5.8. TEST ENVIRONMENT.....	10
5.9. DESCRIPTION OF TEST SETUP.....	11
5.10. MEASURING INSTRUMENT AND SOFTWARE USED.....	12
6. MEASUREMENT METHODS.....	13
7. ANTENNA PORT TEST RESULTS	14
7.1. ON TIME AND DUTY CYCLE	14
7.2. 6 dB DTS BANDWIDTH	15
7.3. PEAK CONDUCTED OUTPUT POWER.....	18
7.4. POWER SPECTRAL DENSITY	21
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	24
8. RADIATED TEST RESULTS	28
8.1. RESTRICTED BANDEDGE	33
8.2. SPURIOUS EMISSIONS (1~18GHz)	37
8.3. SPURIOUS EMISSIONS 18G ~ 26GHz.....	43
8.4. SPURIOUS EMISSIONS 30M ~ 1 GHz.....	45
8.5. SPURIOUS EMISSIONS BELOW 30M.....	47
9. AC POWER LINE CONDUCTED EMISSIONS	51

10. ANTENNA REQUIREMENTS.....54

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: SI HK LIMITED
Address: 12/F INTERNATIONAL COMMERCE CTR I AUSTIN RD WEST
KLN HONG KONG

Manufacturer Information

Company Name: SI HK LIMITED
Address: 12/F INTERNATIONAL COMMERCE CTR I AUSTIN RD WEST
KLN HONG KONG

EUT Description

EUT Name: One wheel scooter
Model: KO1
Brand: **KIWANO**
Sample Status: Normal
Sample ID: 1162122
Sample Received Date: September 15, 2017
Date of Tested: September 16, 2017 ~ November 29, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Tested By:

Checked By:



Kebo Zhang
Engineer

Shawn Wen
Laboratory Leader

Approved By:



Stephen Guo
Laboratory Manager

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB414788 D01 Radiated Test Site v01, ANSI C63.10-2013, 558074 D01 DTS Meas Guidance v04, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

Test Location	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch.
Address	Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
Accreditation Certificate	UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. The Certificate Registration Number is 4102.01. UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The Designation Number is CN1187. UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. EMC Laboratory has been registered and fully described in a report filed with Industry Canada. The Company Number is 21320.

Note: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9kHz-30MHz)	2.20 dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz)
	5.30dB (6GHz-18Gz)
	5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	One wheel scooter		
EUT Description	The device is a One wheel scooter		
	Operation Frequency		2402 MHz ~ 2480 MHz
	Modulation Type		Data Rate
	GFSK		1Mbps
Model	KO1		
Power Supply	SWITCHING POWER SUPPLY	Input	100-240 Vac, 50/60 Hz, 2.5 A
		Output	58.8Vdc, 2A
Bluetooth Version	BT 4.0		

5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)
BLE	2402-2480	0-39[40]	-1.07

5.3. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460		
8	2418	19	2440	30	2462		
9	2420	20	2442	31	2464		
10	2422	21	2444	32	2468		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
GFSK	CH 00, CH 19, CH 39	2402MHz, 2440MHz, 2480MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		SmartRF Studio 7		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 00	CH 19	CH 39
GFSK	1	0	0	0

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2402-2480	PCB Antenna	1.6

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.

5.7. WORST-CASE CONFIGURATIONS

Bluetooth Mode	Modulation Technology	Modulation Type	Data Rate (Mbps)
BLE	DTS	GFSK	1Mbit/s

5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	1025Pa	
Temperature	TN	23 ~ 28°C
Voltage :	VL	N/A
	VN	DC 54.75V/AC 120V 60Hz
	VH	N/A

Note: VL= Lower Extreme Test Voltage
VN= Nominal Voltage, AC 120V from Adapter, DC 54.75V from battery.
VH= Upper Extreme Test Voltage
TN= Normal Temperature

5.9. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
1	CC debugger	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	N/A	N/A	N/A	N/A	N/A


ACCESSORY

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB cable	N/A	N/A	0.2	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a Laptop before the test.

SETUP DIAGRAM FOR TEST

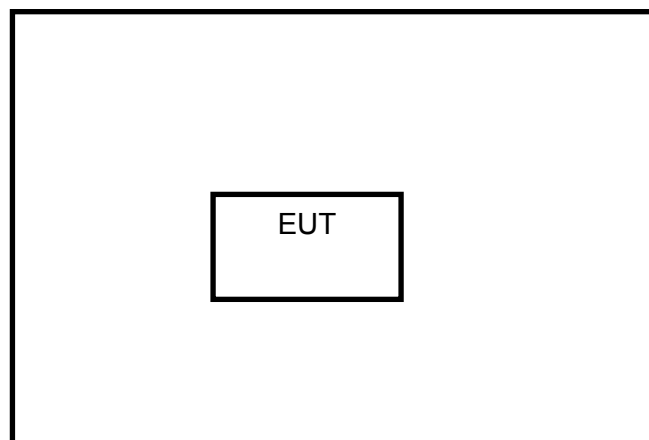

5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	EMI Test Receiver	R&S	ESR3	101961	Dec.20, 2016	Dec.19, 2017
☒	Two-Line V-Network	R&S	ENV216	101983	Dec.20, 2016	Dec.19, 2017
☒	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Feb.10, 2017	Feb.10, 2018
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Conducted disturbance		Farad	EZ-EMC		Ver. UL-3A1
Radiated Emissions						
Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Feb. 24, 2017	Feb. 24, 2018
☒	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019
☒	Preamplifier	HP	8447D	2944A09099	Feb. 13, 2017	Feb. 13, 2018
☒	EMI Measurement Receiver	R&S	ESR26	101377	Dec. 20, 2016	Dec. 20, 2017
☒	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019
☒	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019
☒	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Jan. 14, 2017	Jan. 14, 2018
☒	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec. 20, 2016	Dec. 20, 2017
☒	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 26, 2019
Software						
Used	Description		Manufacturer	Name		Version
☒	Test Software for Radiated disturbance		Farad	EZ-EMC		Ver. UL-3A1
Other instruments						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
☒	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec. 20, 2016	Dec. 20, 2017
☒	Power Meter	Keysight	N9031A	MY55416024	Feb. 13, 2017	Feb. 13, 2018
☒	Power Sensor	Keysight	N9323A	MY55440013	Feb. 13, 2017	Feb. 13, 2018

6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth	KDB 558074 D01 DTS Meas Guidance v04	8.0
2	Peak Output Power	KDB 558074 D01 DTS Meas Guidance v04	9.1.1
3	Power Spectral Density	KDB 558074 D01 DTS Meas Guidance v04	10.2
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 DTS Meas Guidance v04	11.0
5	Out-of-band emissions in restricted bands	KDB 558074 D01 DTS Meas Guidance v04	12.1
6	Band-edge	KDB 558074 D01 DTS Meas Guidance v04	13.3.2
7	Conducted Emission Test For AC Power Port	ANSI C63.10-2013	7.3

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

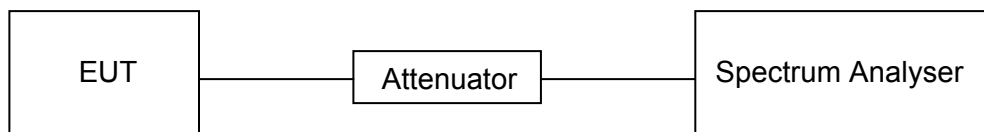


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (KHz)
BLE	100	100	1	100	0	0.01

Note: Duty Cycle Correction Factor=10log(1/x).
Where: x is Duty Cycle(Linear)
Where: T is On Time (transmit duration)

ON TIME AND DUTY CYCLE MID CH

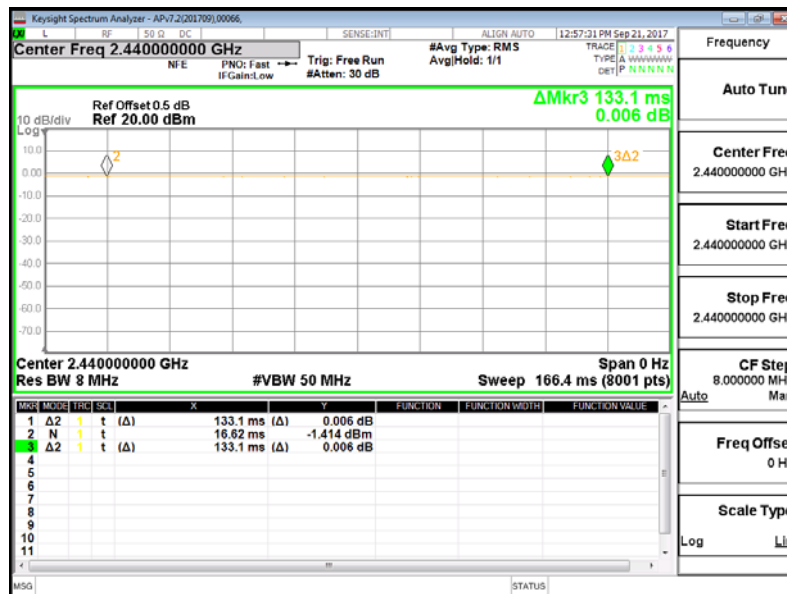

7.2. 6 dB DTS BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(a)(2)	6dB Bandwidth	$\geq 500\text{KHz}$	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple


Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



TEST SETUP

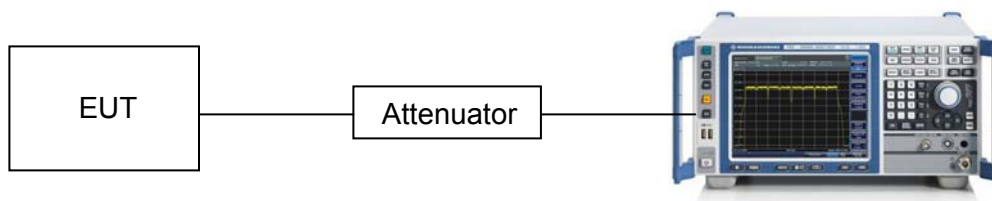

RESULTS

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2402	0.580	500	Pass
Middle	2440	0.652	500	Pass
High	2480	0.636	500	Pass

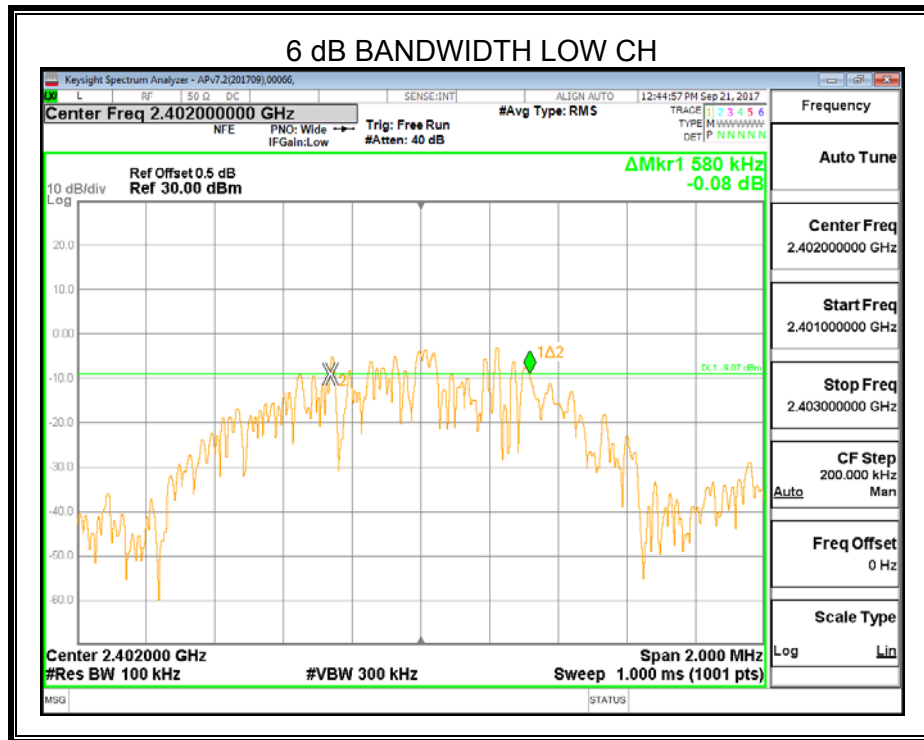

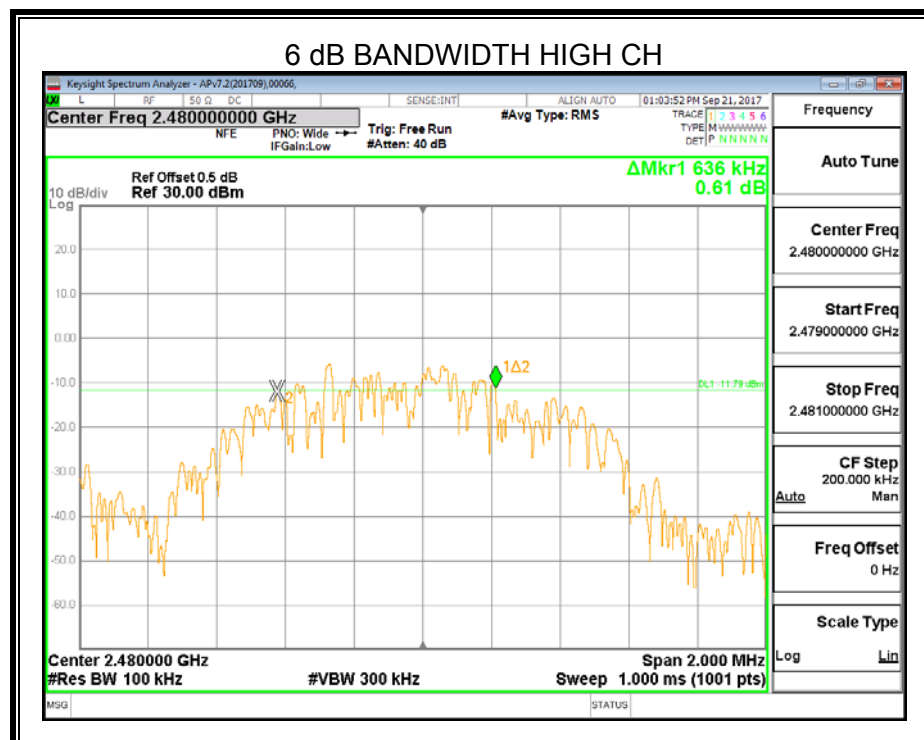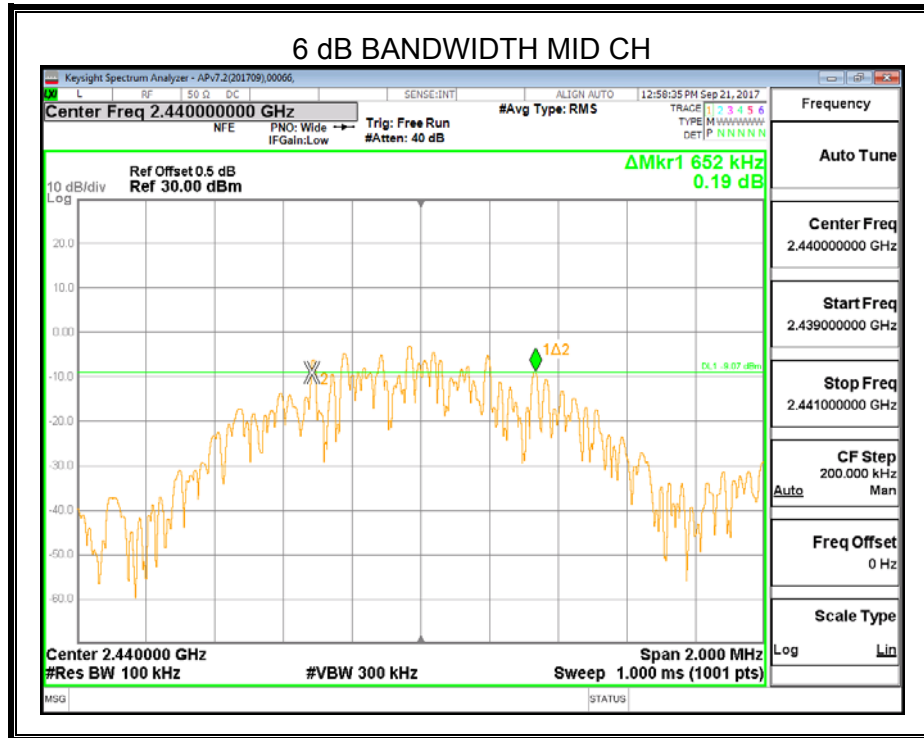

7.3. PEAK CONDUCTED OUTPUT POWER

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$\geq$ DTS bandwidth(e.g. 1 MHz for BLE)
VBW	$\geq 3 \times$ RBW
Span	$3 \times$ RBW
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use peak marker function to determine the peak amplitude level.



TEST SETUP

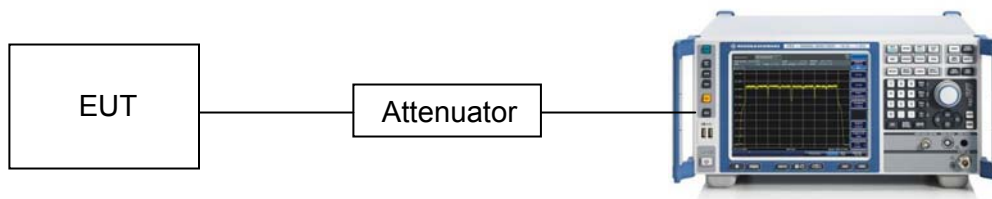

RESULTS

Test Channel	Frequency	Maximum Conducted Output Power(PK)	LIMIT
	(MHz)	(dBm)	dBm
CH00	2402	-1.07	30
CH19	2440	-1.58	30
CH39	2480	-2.19	30

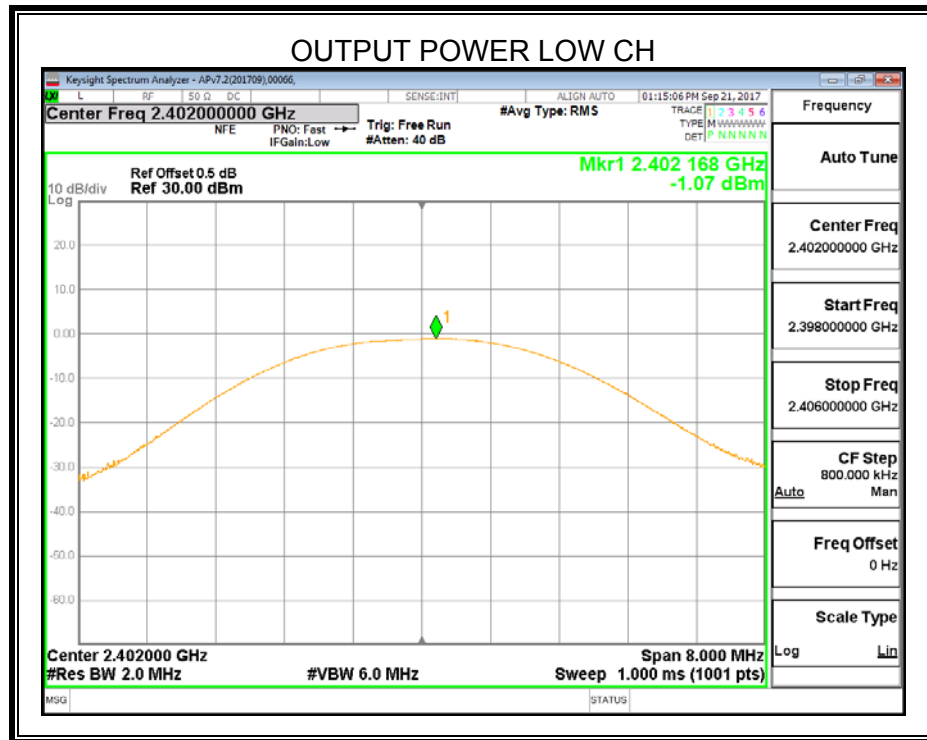

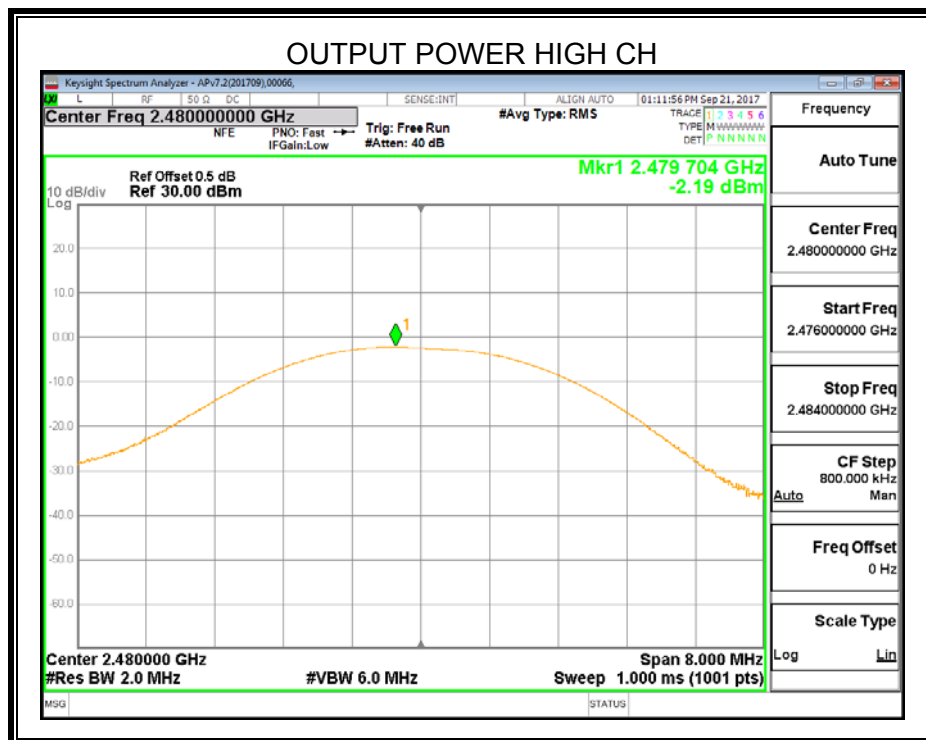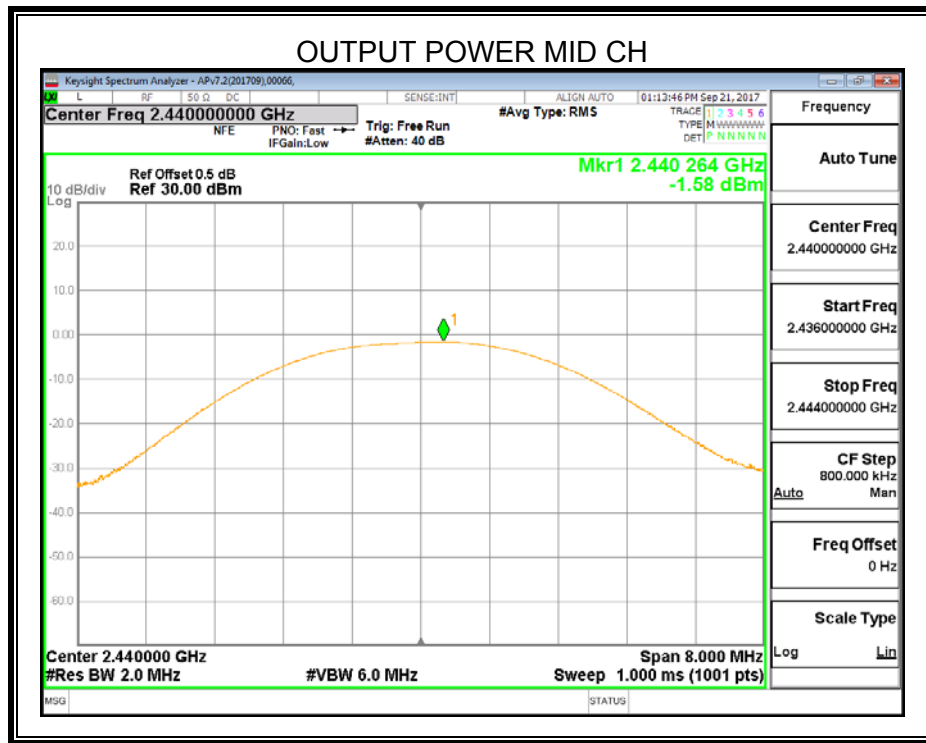

7.4. POWER SPECTRAL DENSITY

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.


If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



TEST SETUP

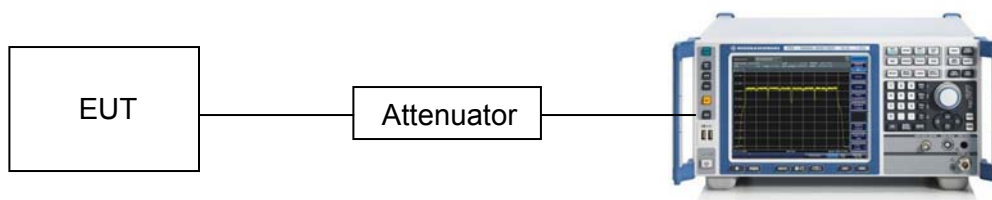

RESULTS

Frequency	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2402 MHz	-17.87	8	PASS
2440 MHz	-17.84	8	PASS
2480 MHz	-16.30	8	PASS

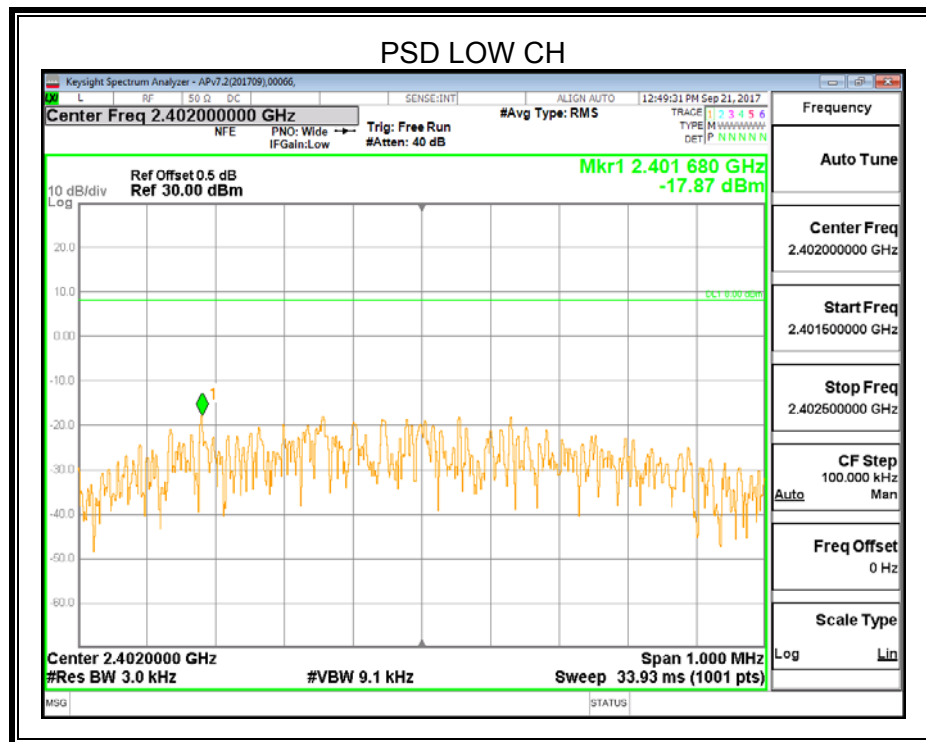

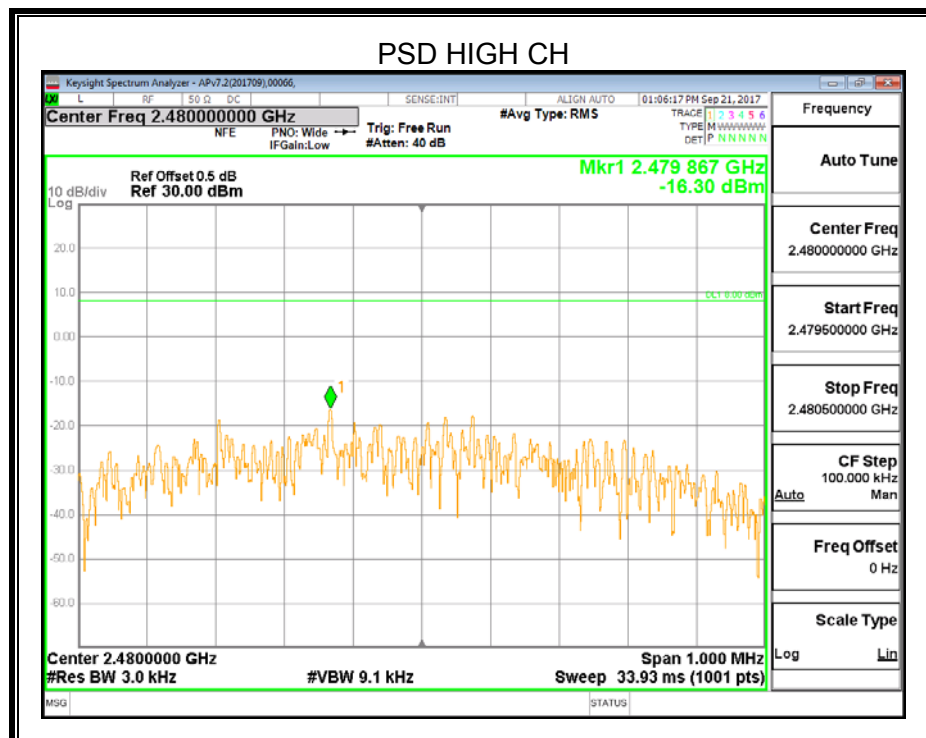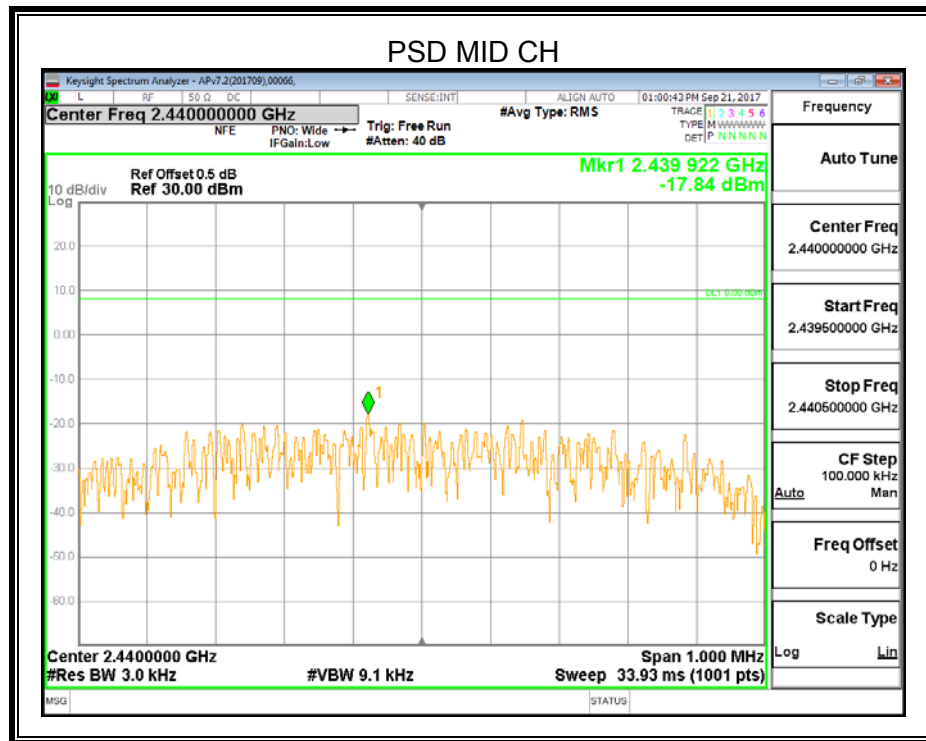

7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

LIMITS

FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.



Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100K
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.



Use the peak marker function to determine the maximum amplitude level.



TEST SETUP

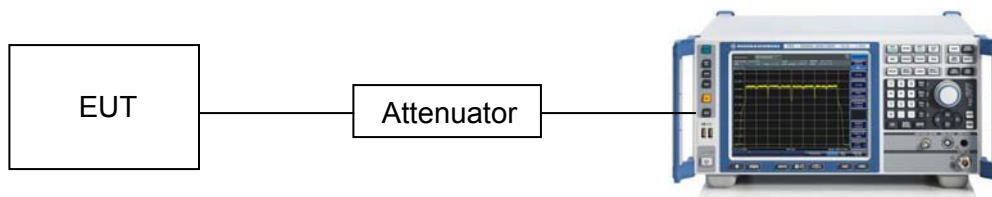

RESULTS

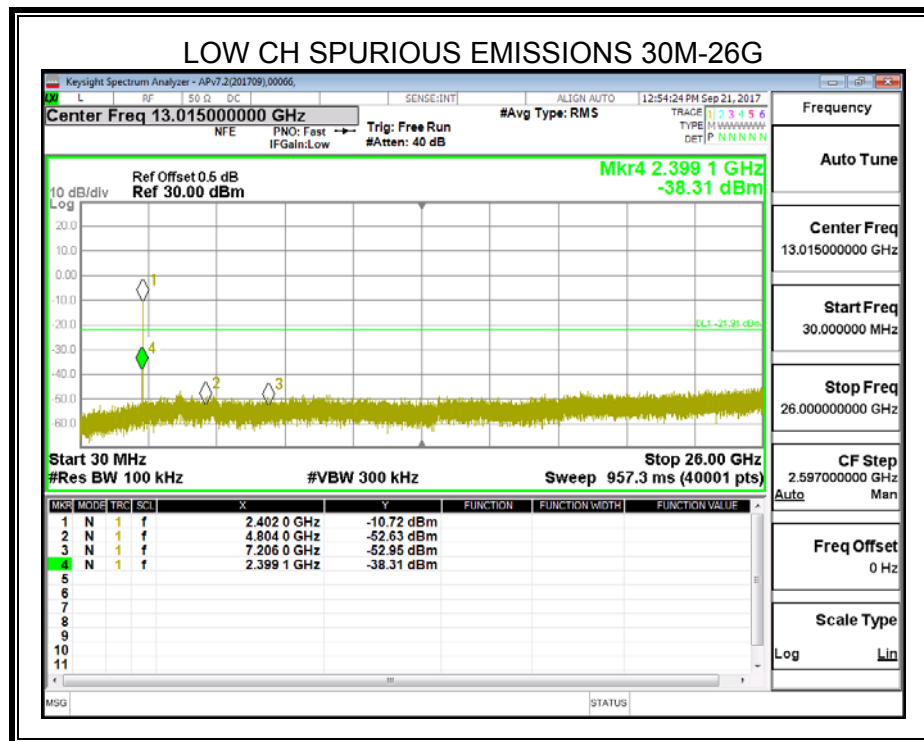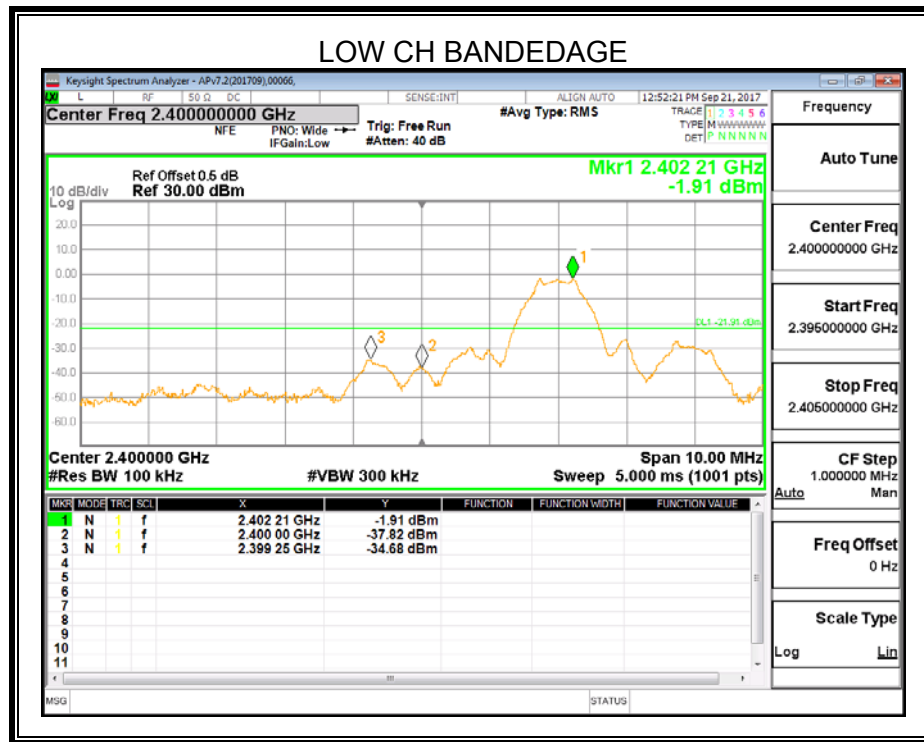

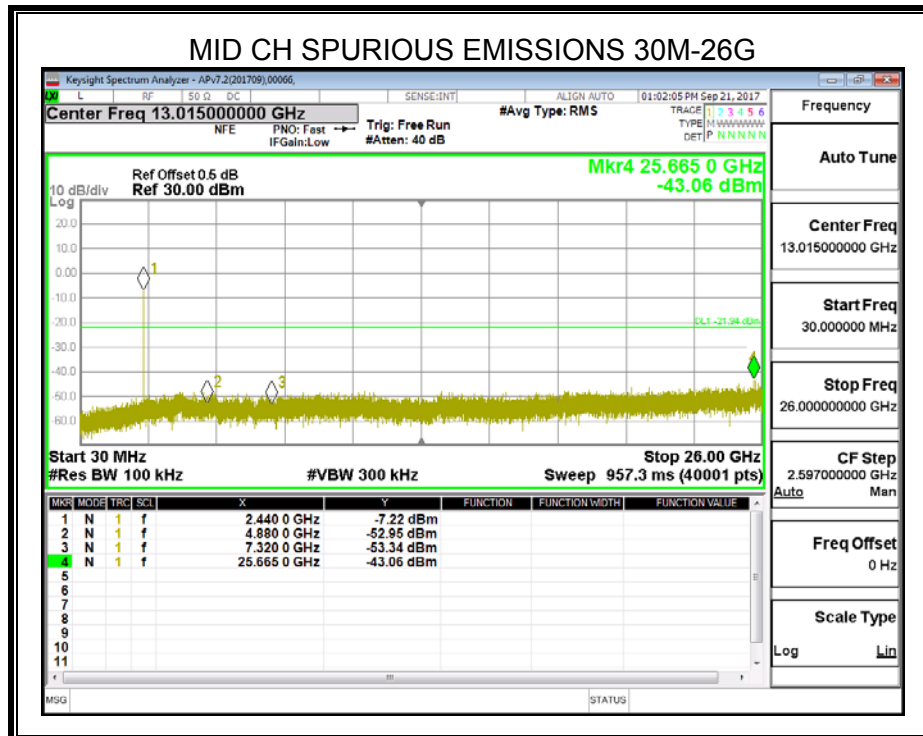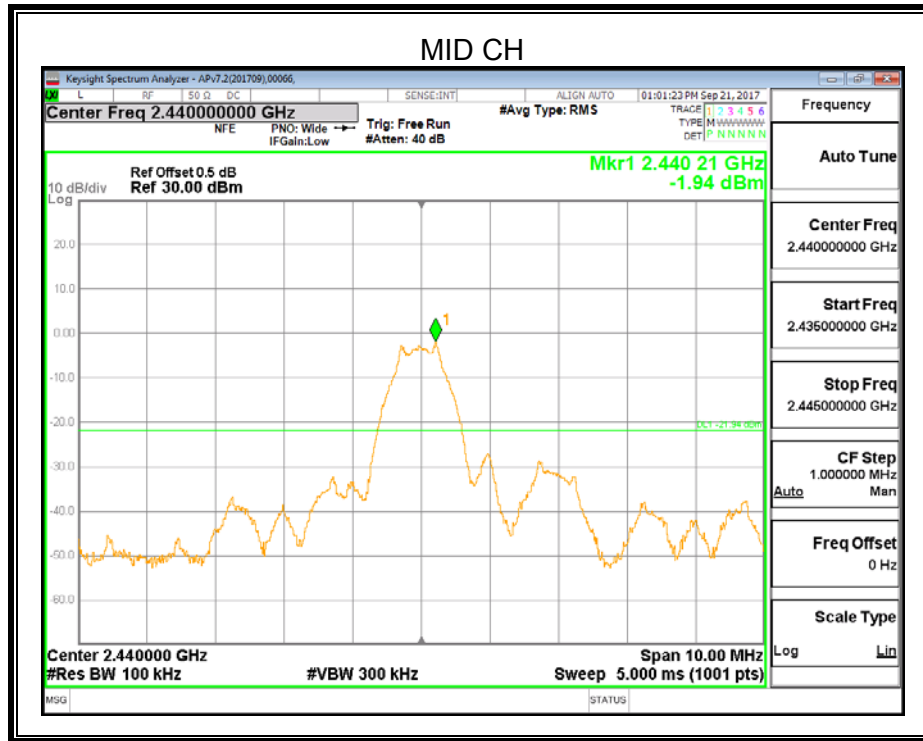

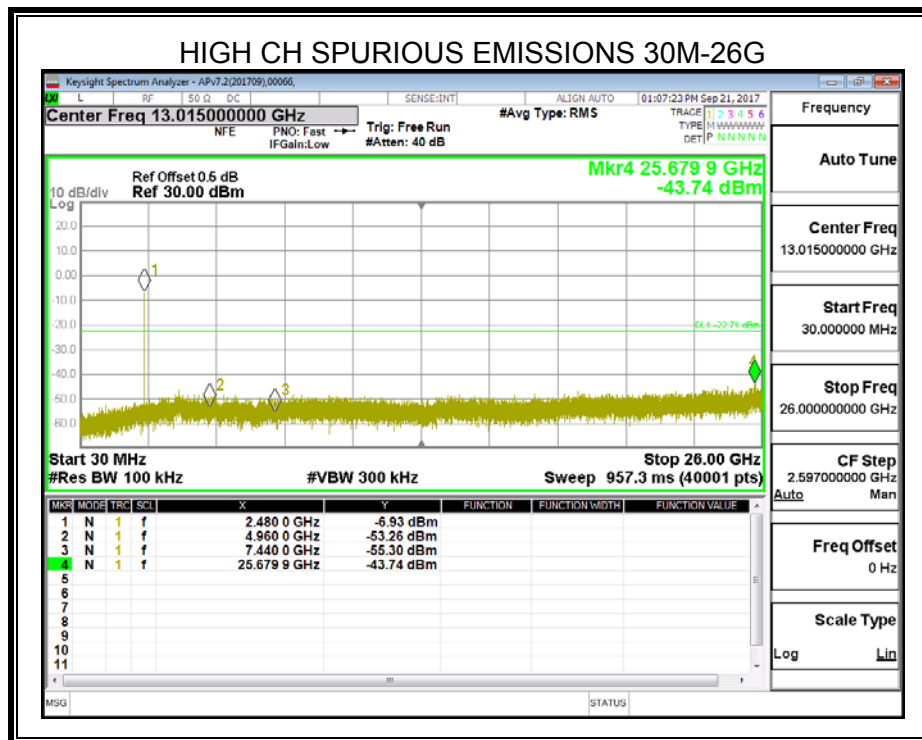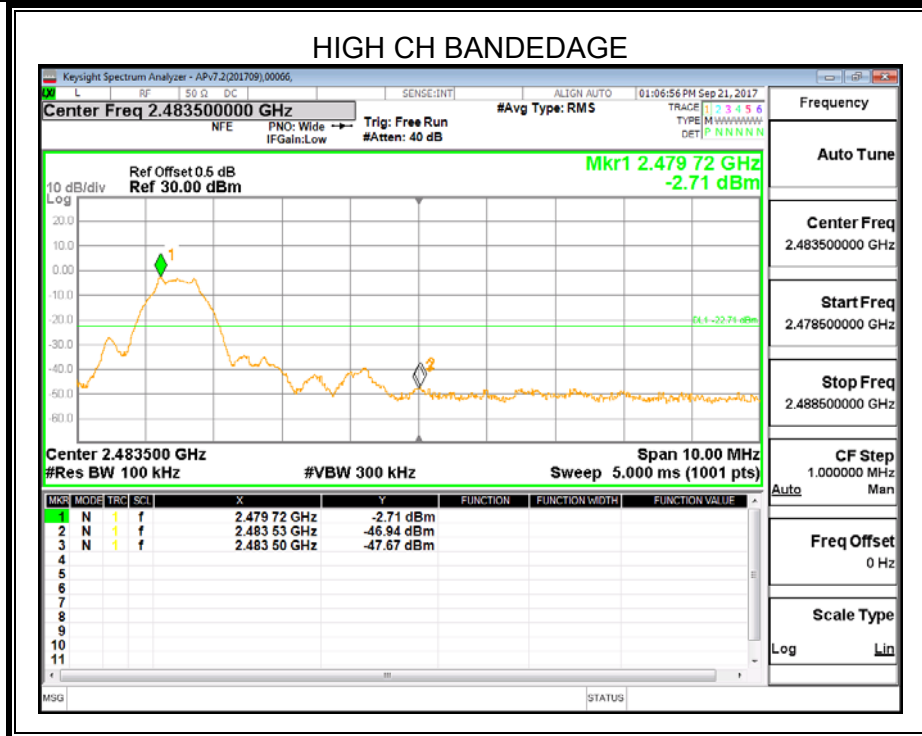

8. RADIATED TEST RESULTS

LIMITS

Please refer to FCC §15.205 and §15.209

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Restricted bands of operation


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

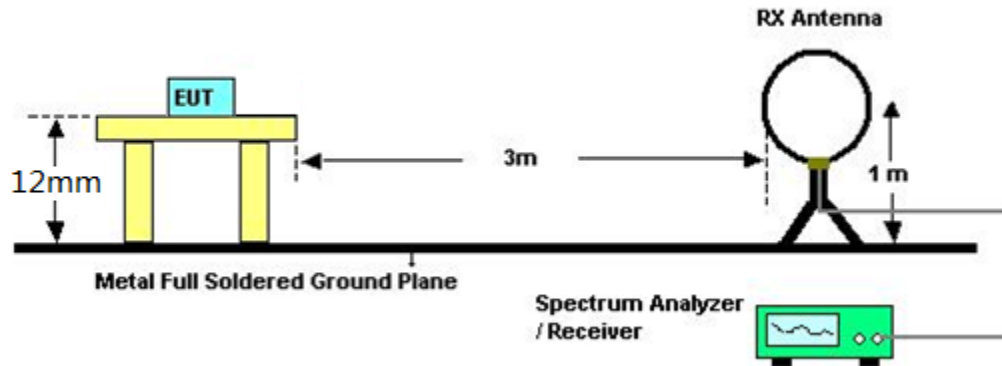


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)


Below 1G and above 30MHz

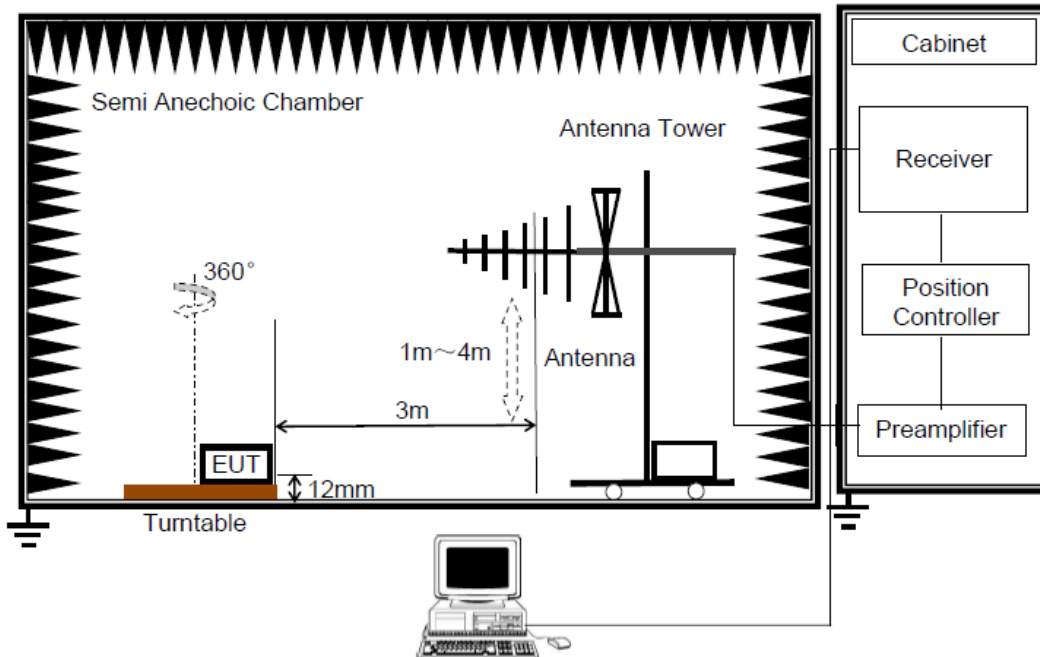

The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

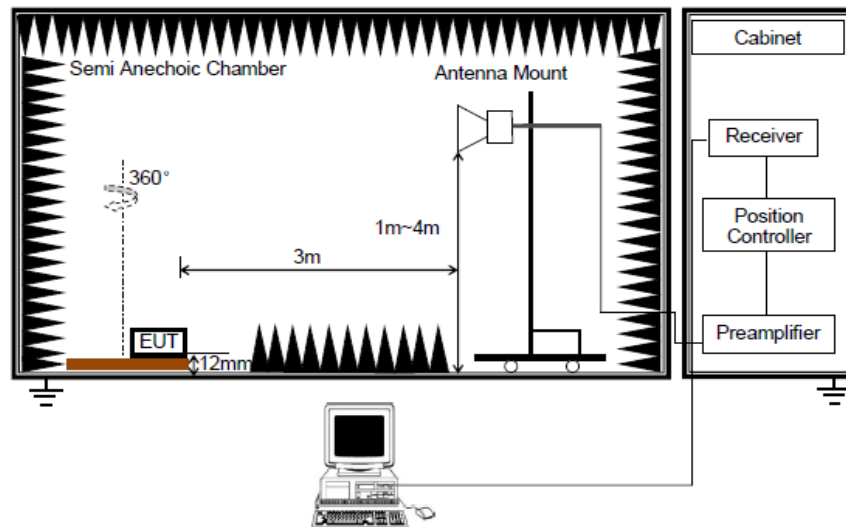


The setting of the spectrum analyser

RBW	1M
VBW	PEAK: 3M AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (1.5 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with $1/T \leq \text{video bandwidth}$ with peak detector for average measurements. For the Duty Cycle and Correction Factor please refer to clause 7.1.ON TIME AND DUTY CYCLE. the EUT is configured to transmit with $D \geq 98\%$, then set $VBW \leq RBW / 100$, but not less than 10 Hz.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

8.1. RESTRICTED BANDEDGE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

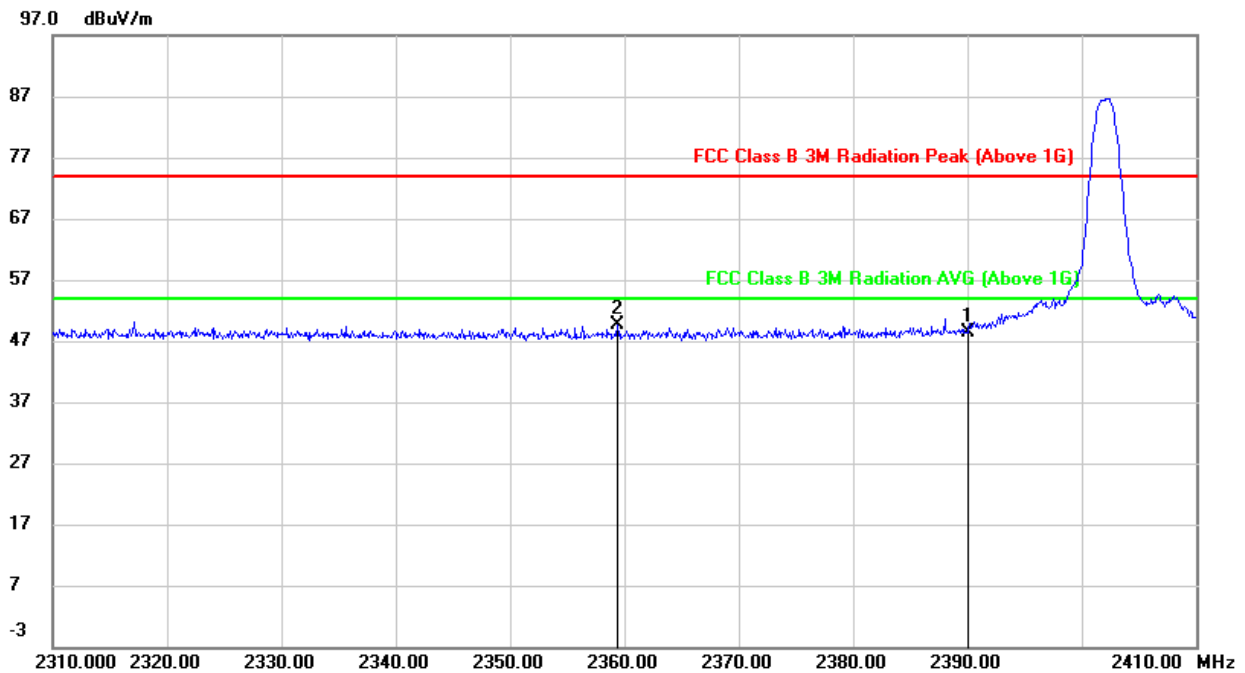

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	15.27	33.14	48.41	54.00	-5.59	peak
2	2359.400	16.30	33.36	49.66	54.00	-4.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

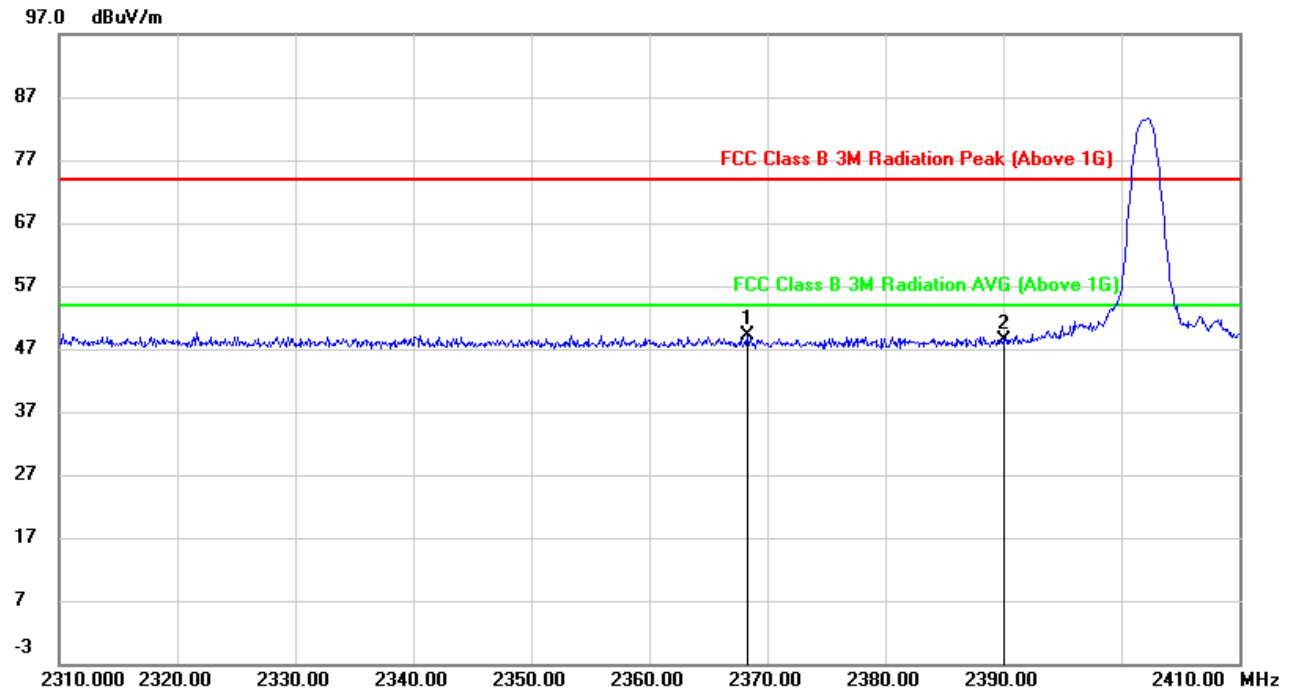

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2368.300	15.79	33.39	49.18	54.00	-4.82	peak
2	2390.000	15.14	33.24	48.38	54.00	-5.62	peak

- Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.


RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

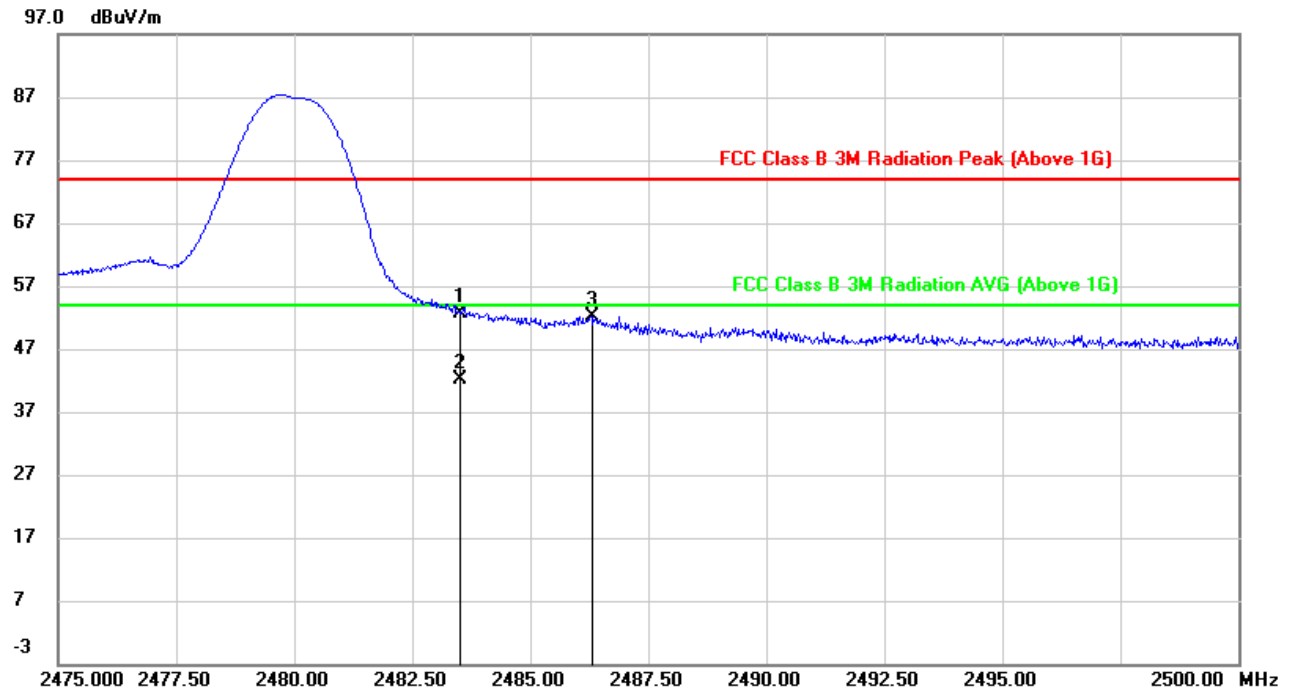

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.85	32.78	52.63	74.00	-21.37	peak
2	2483.500	9.33	32.78	42.11	54.00	-11.89	AVG
3	2486.300	19.36	32.79	52.15	54.00	-1.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

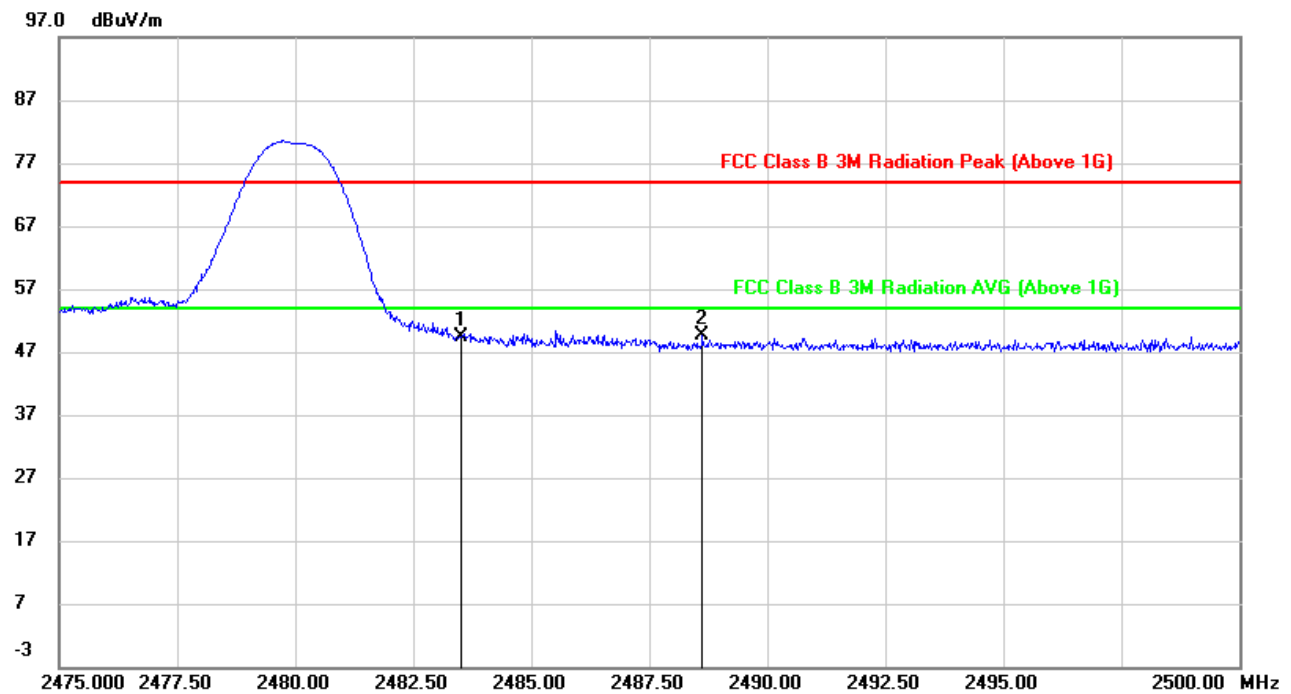


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.50	32.88	49.38	54.00	-4.62	peak
2	2488.625	16.65	32.88	49.53	54.00	-4.47	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

8.2. SPURIOUS EMISSIONS (1~18GHz)


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

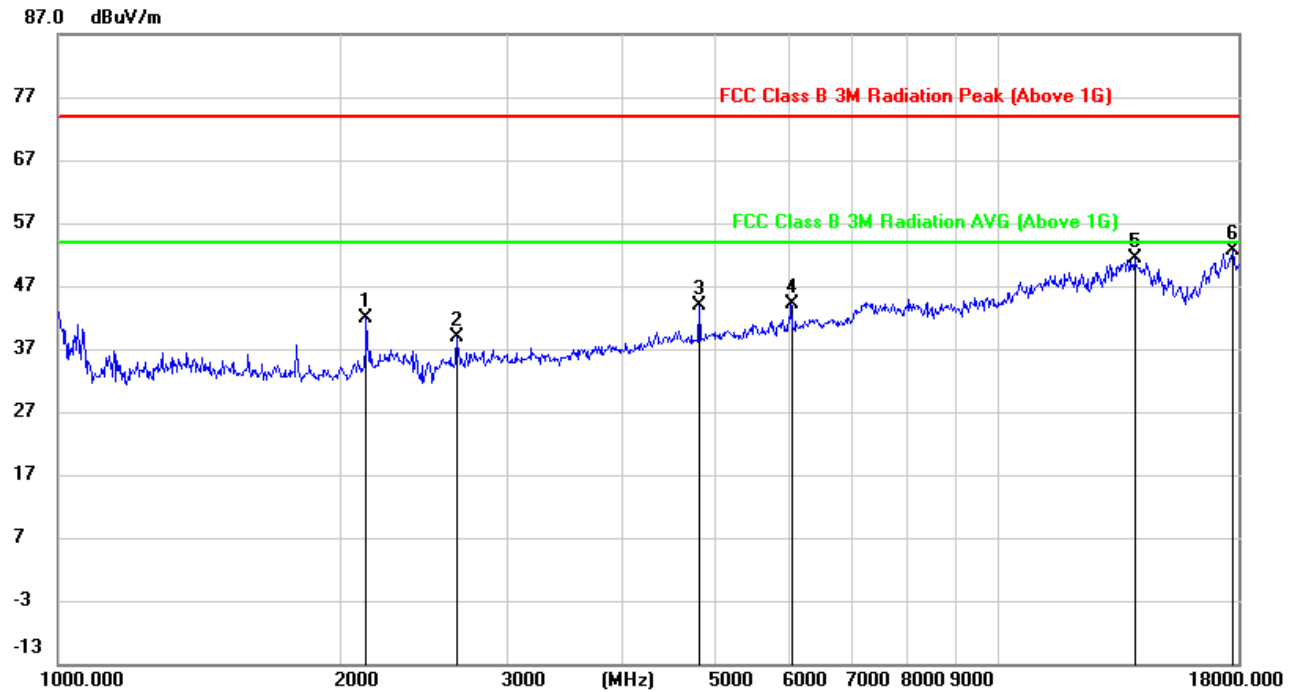

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2132.462	51.65	-9.78	41.87	54.00	-12.13	peak
2	2664.019	47.18	-8.41	38.77	54.00	-15.23	peak
3	4804.110	45.74	-1.76	43.98	54.00	-10.02	peak
4	6036.421	42.06	2.01	44.07	54.00	-19.93	peak
5	13957.529	32.52	18.95	51.47	54.00	-12.53	peak
6	17741.737	27.42	25.16	52.58	54.00	-1.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

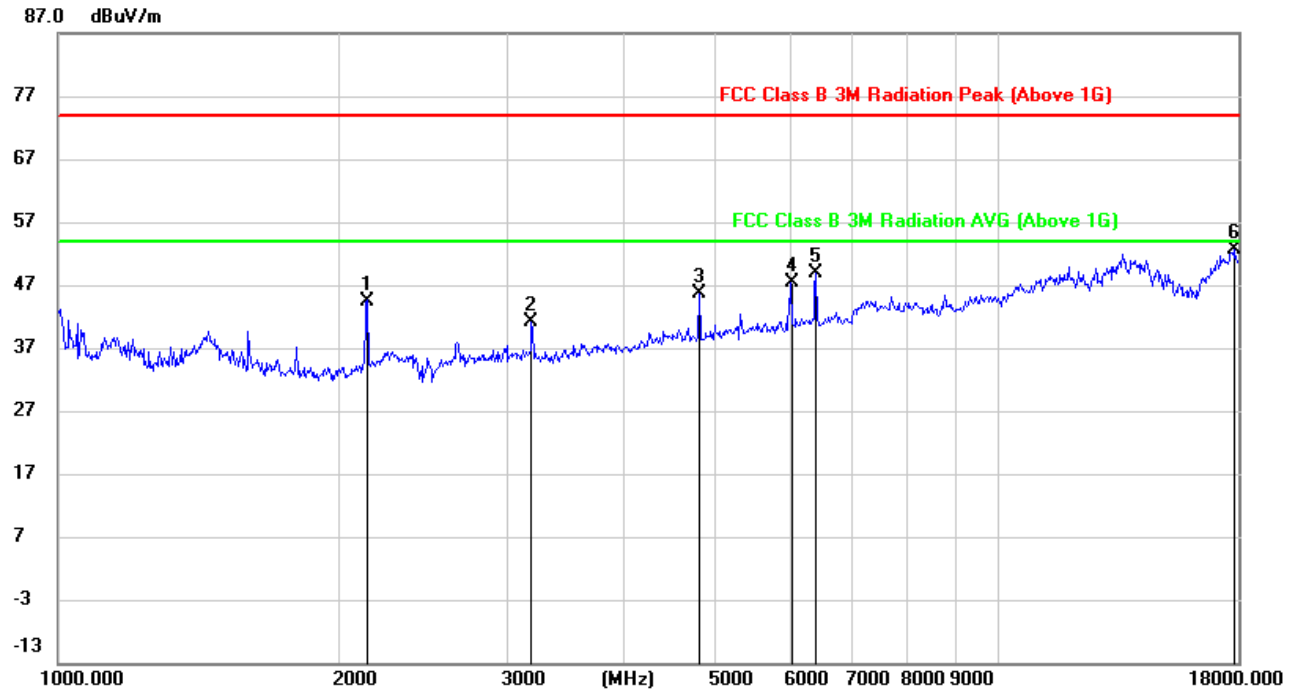

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2138.635	54.31	-9.81	44.50	54.00	-9.50	peak
2	3186.869	47.56	-6.38	41.18	54.00	-12.82	peak
3	4804.110	47.33	-1.67	45.66	54.00	-8.34	peak
4	6036.421	45.39	2.11	47.50	54.00	-6.50	peak
5	6395.654	45.83	3.11	48.94	54.00	-5.06	peak
6	17793.092	26.34	26.19	52.53	54.00	-1.47	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

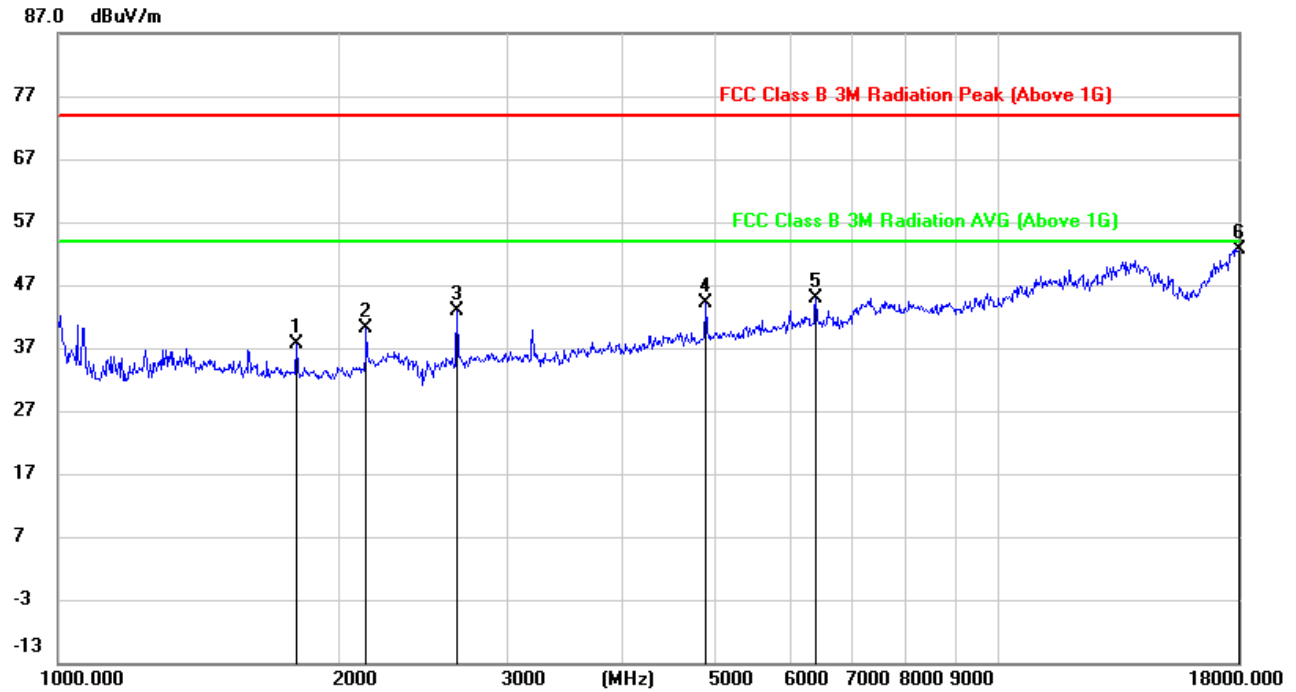

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1792.937	49.49	-11.79	37.70	54.00	-16.30	peak
2	2132.462	49.91	-9.78	40.13	54.00	-13.87	peak
3	2664.019	51.17	-8.41	42.76	54.00	-11.24	peak
4	4888.151	44.86	-0.79	44.07	54.00	-9.93	peak
5	6395.654	41.97	3.02	44.99	54.00	-9.01	peak
6	18000.000	26.04	26.65	52.69	54.00	-1.31	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

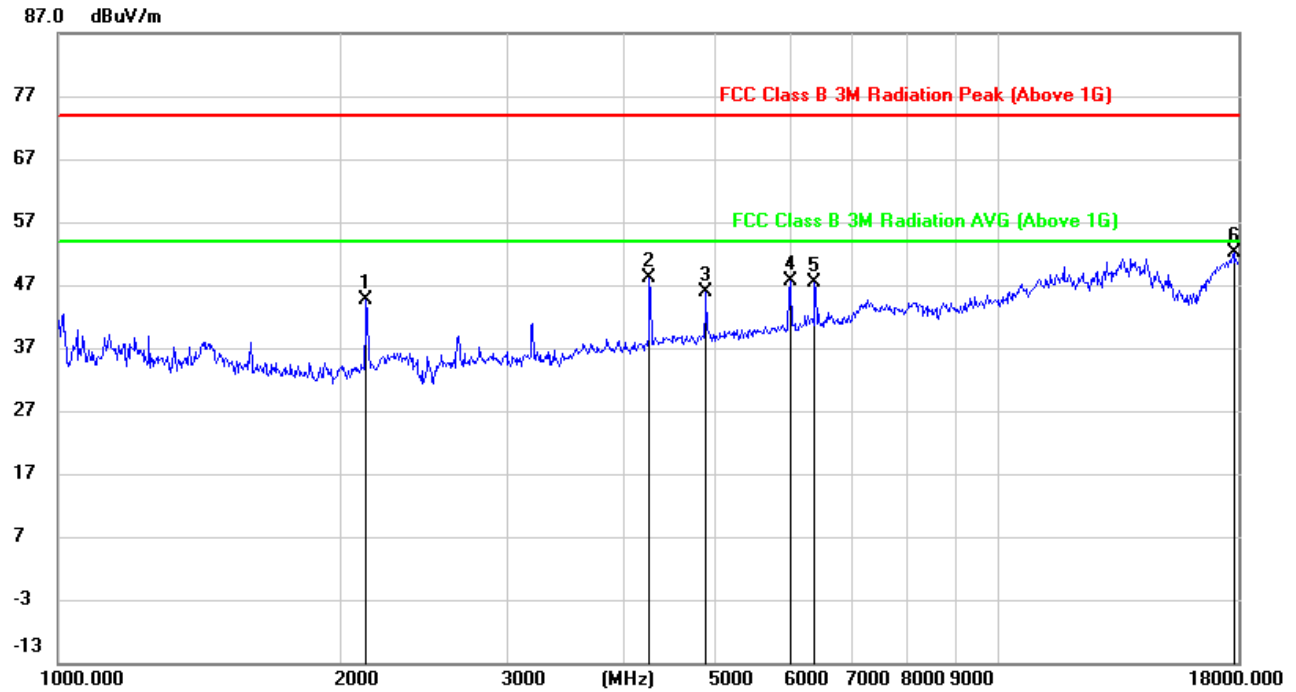

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2132.462	54.61	-9.88	44.73	54.00	-9.27	peak
2	4254.921	51.39	-3.21	48.18	54.00	-5.82	peak
3	4888.151	46.63	-0.86	45.77	54.00	-8.23	peak
4	6001.626	45.44	2.10	47.54	54.00	-6.46	peak
5	6377.195	44.34	3.08	47.42	54.00	-6.58	peak
6	17793.091	25.94	26.19	52.13	54.00	-1.87	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

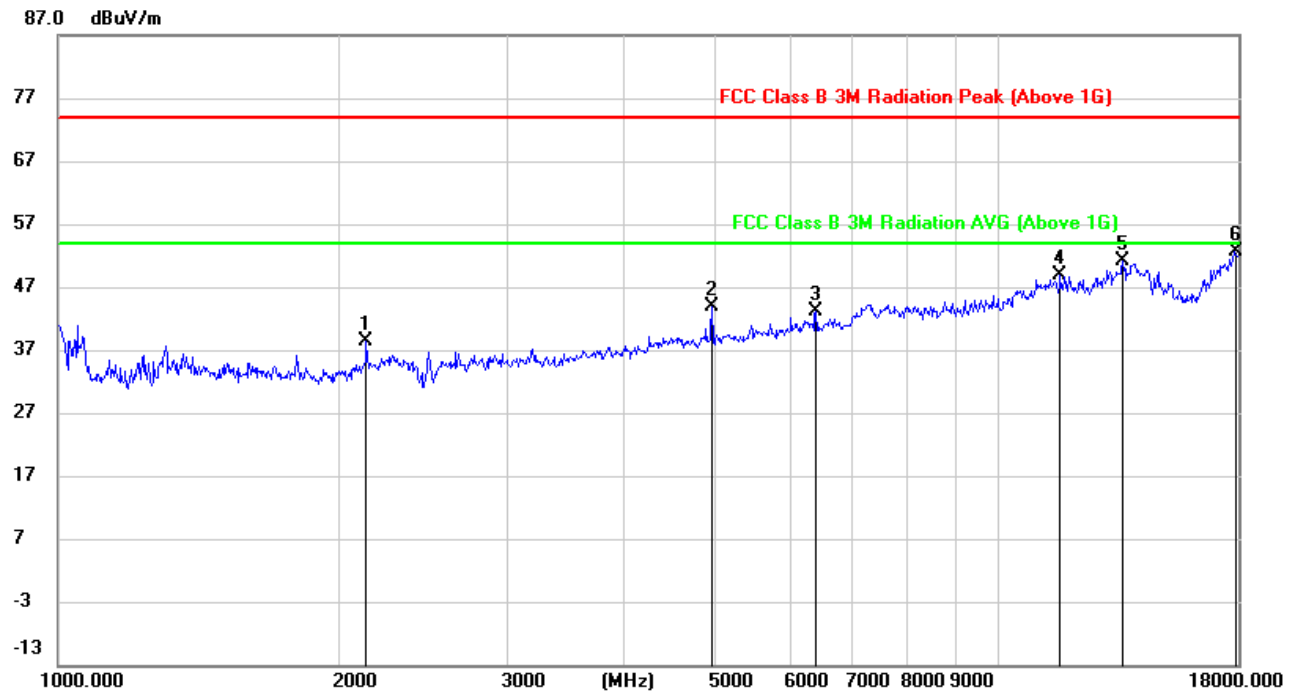

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2132.462	48.11	-9.78	38.33	54.00	-15.67	peak
2	4959.307	44.55	-0.78	43.77	54.00	-10.23	peak
3	6395.654	40.21	3.02	43.23	54.00	-10.77	peak
4	11633.928	34.36	14.41	48.77	54.00	-5.23	peak
5	13559.879	32.18	18.85	51.03	54.00	-2.97	peak
6	17896.247	26.98	25.75	52.73	54.00	-1.27	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

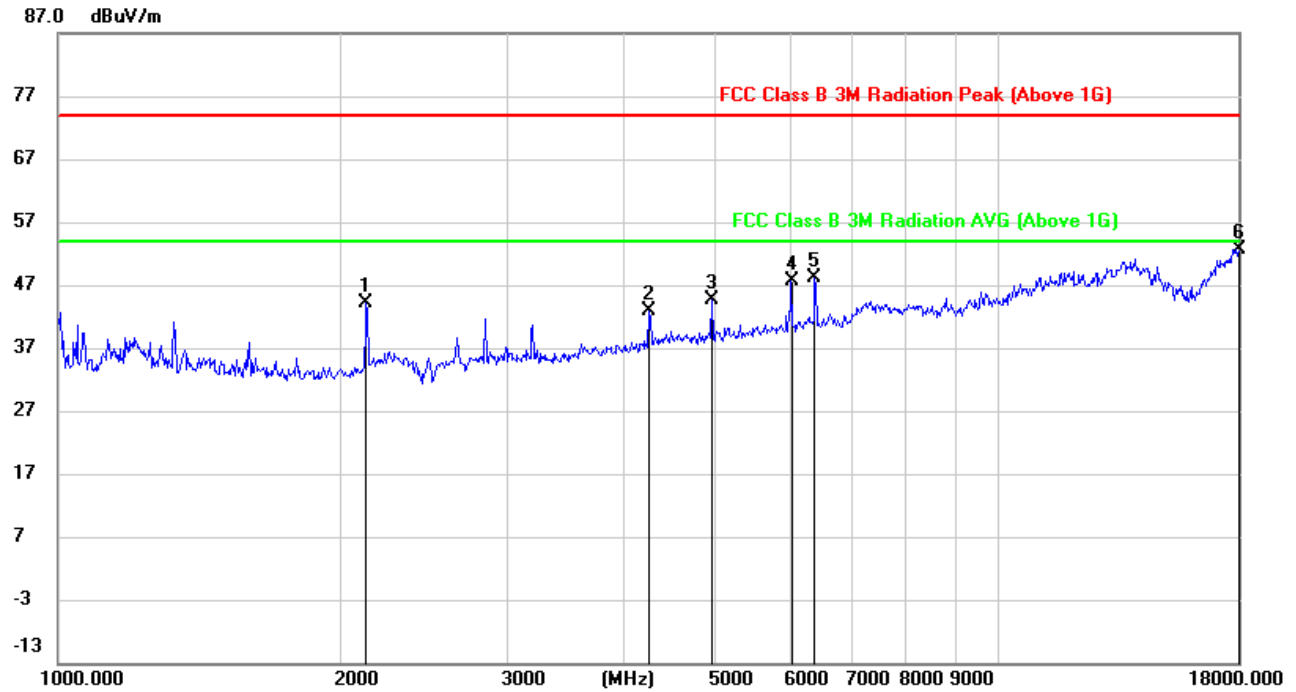


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2132.462	53.90	-9.88	44.02	54.00	-9.98	peak
2	4242.641	46.23	-3.27	42.96	54.00	-11.04	peak
3	4959.307	45.46	-0.76	44.70	54.00	-9.30	peak
4	6036.421	45.56	2.11	47.67	54.00	-6.33	peak
5	6377.195	44.93	3.08	48.01	54.00	-5.99	peak
6	18000.000	26.39	26.25	52.64	54.00	-1.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

8.3. SPURIOUS EMISSIONS 18G ~ 26GHz


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

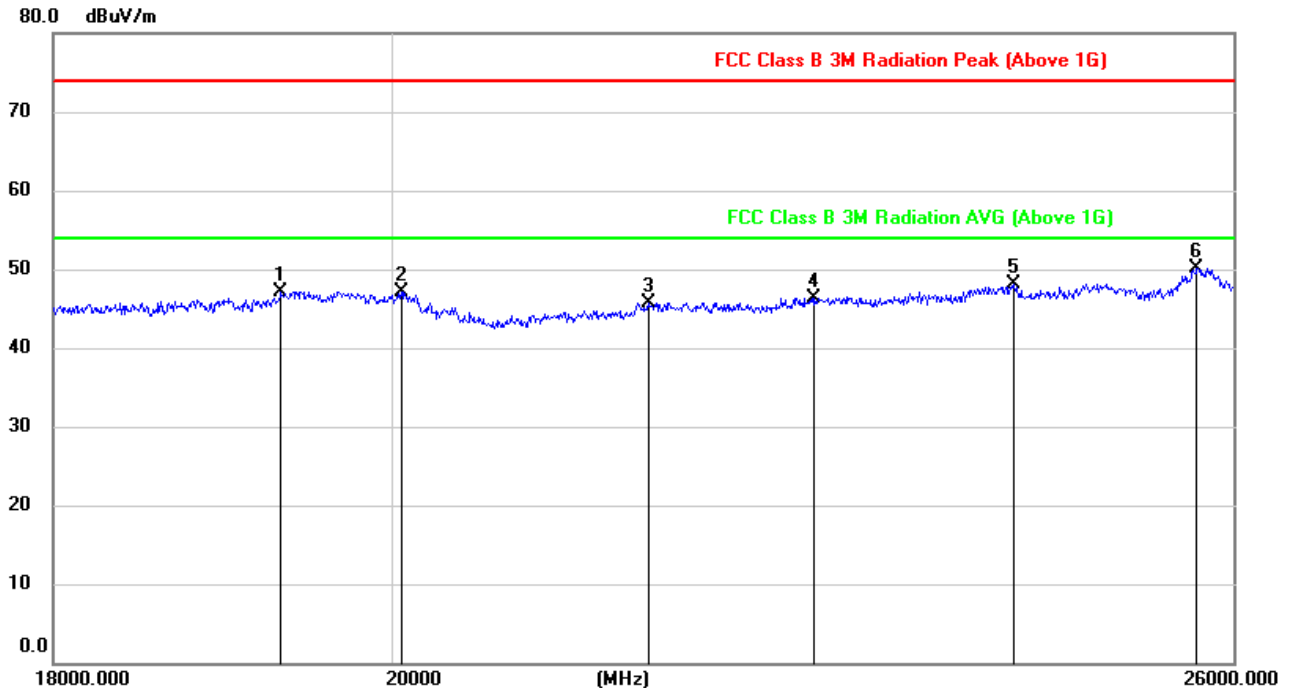

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	19323.899	52.57	-5.56	47.01	54.00	-6.99	peak
2	20062.463	52.64	-5.49	47.15	54.00	-6.85	peak
3	21665.151	50.16	-4.45	45.71	54.00	-8.29	peak
4	22818.104	50.02	-3.63	46.39	54.00	-7.61	peak
5	24281.135	50.82	-2.77	48.05	54.00	-5.95	peak
6	25705.297	50.97	-0.82	50.15	54.00	-3.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. All the modes had been tested, but only the worst data were recorded in the report.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

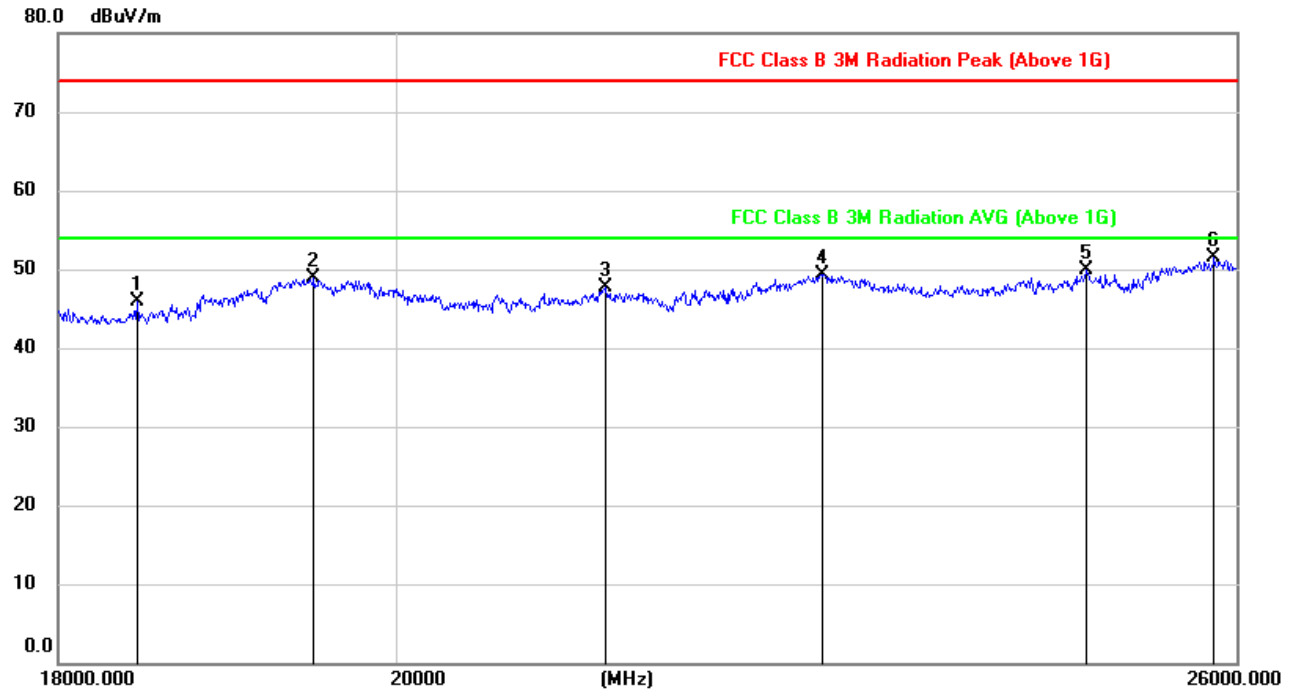


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18448.984	51.27	-5.32	45.95	54.00	-8.05	peak
2	19495.195	54.44	-5.55	48.89	54.00	-5.11	peak
3	21348.811	52.47	-4.74	47.73	54.00	-6.27	peak
4	22843.290	52.97	-3.60	49.37	54.00	-4.63	peak
5	24813.689	52.23	-2.27	49.96	54.00	-4.04	peak
6	25818.977	52.23	-0.74	51.49	54.00	-2.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.
 4. All the modes had been tested, but only the worst data were recorded in the report.

8.4. SPURIOUS EMISSIONS 30M ~ 1 GHz


SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

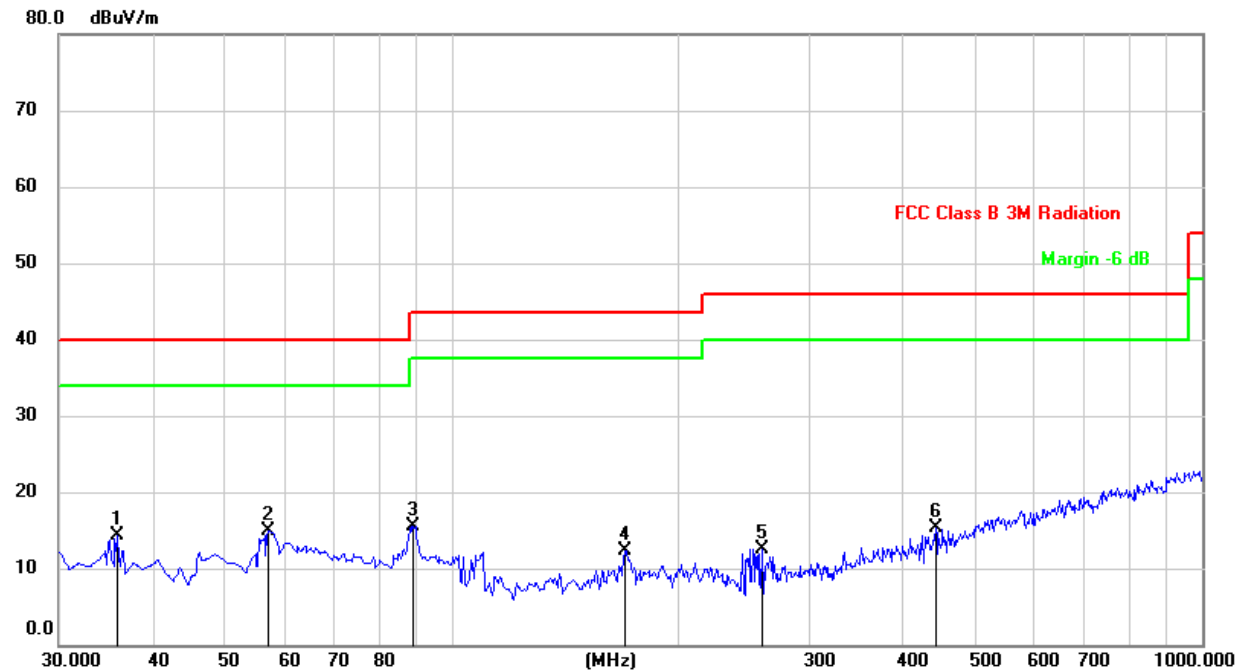

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	35.8746	43.45	-29.17	14.28	40.00	-25.72	QP
2	57.1600	46.06	-31.07	14.99	40.00	-25.01	QP
3	89.1700	48.44	-32.88	15.56	43.50	-27.94	QP
4	170.6500	40.64	-28.36	12.28	43.50	-31.22	QP
5	259.8900	41.09	-28.57	12.52	46.00	-33.48	QP
6	442.2500	39.71	-24.35	15.36	46.00	-30.64	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

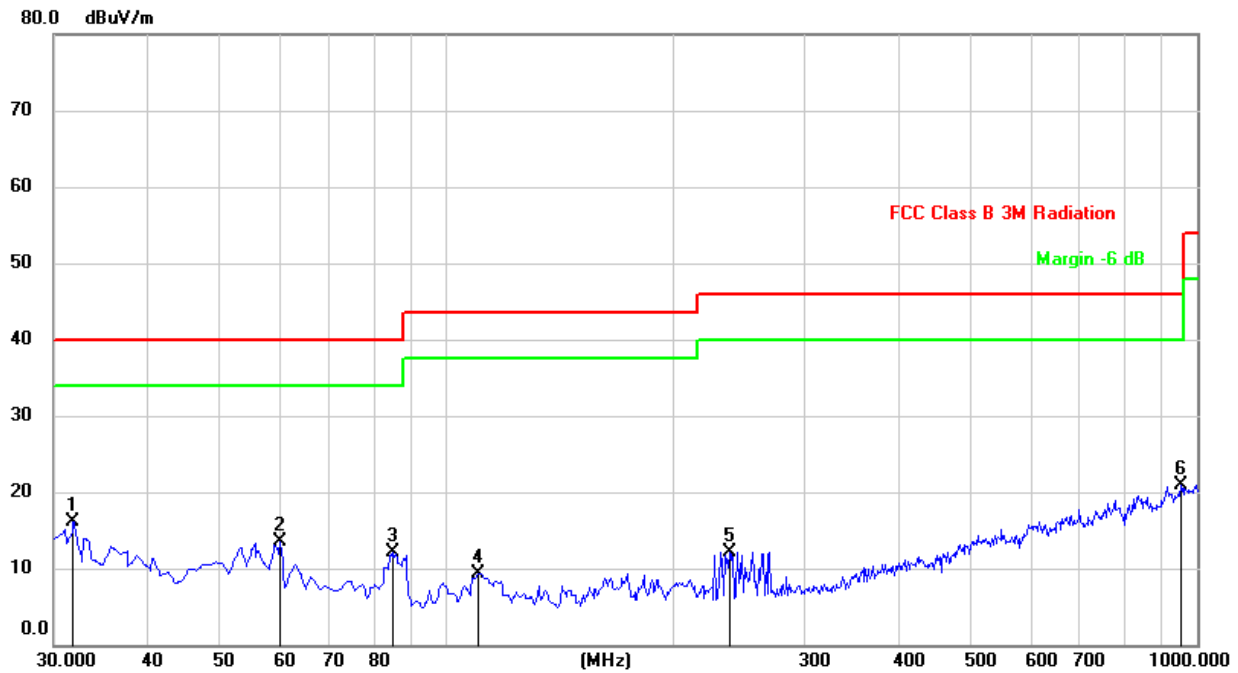


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	45.05	-28.89	16.16	40.00	-23.84	QP
2	60.0700	44.70	-31.11	13.59	40.00	-26.41	QP
3	84.7018	44.89	-32.85	12.04	40.00	-27.96	QP
4	110.5100	40.91	-31.61	9.30	43.50	-34.20	QP
5	238.5500	41.34	-29.22	12.12	46.00	-33.88	QP
6	953.4400	36.40	-15.47	20.93	46.00	-25.07	QP

Note: 1. Result Level = Read Level + Correct Factor.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


8.5. SPURIOUS EMISSIONS BELOW 30M

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

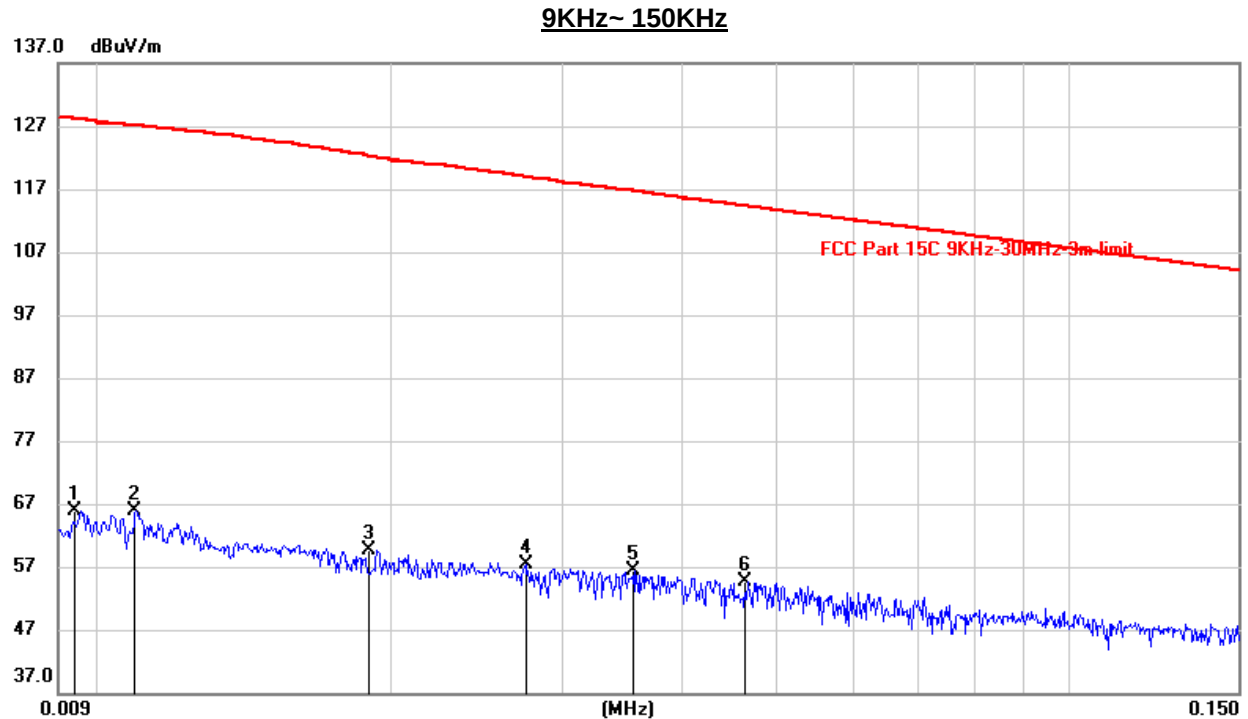

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	45.53	20.26	65.79	128.06	-62.27	peak
2	0.0108	45.74	20.22	65.96	127.12	-61.16	peak
3	0.0189	39.27	20.30	59.57	122.24	-62.67	peak
4	0.0274	37.10	20.31	57.41	118.98	-61.57	peak
5	0.0354	35.97	20.31	56.28	116.71	-60.43	peak
6	0.0463	34.40	20.31	54.71	114.34	-59.63	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

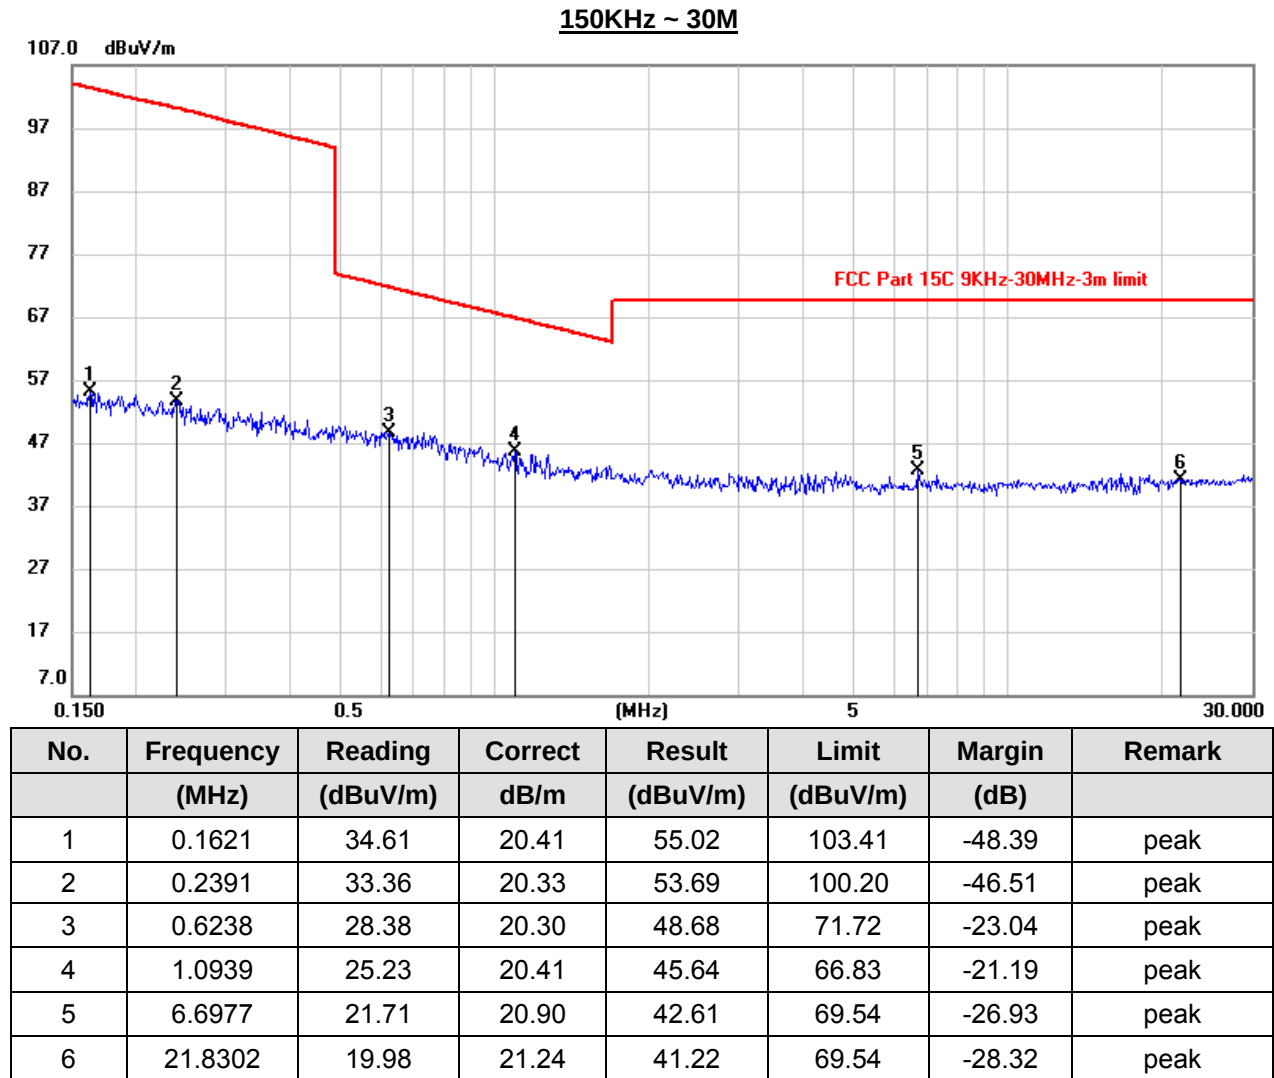

Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

SPURIOUS EMISSIONS (MID CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)


9KHz~ 150KHz

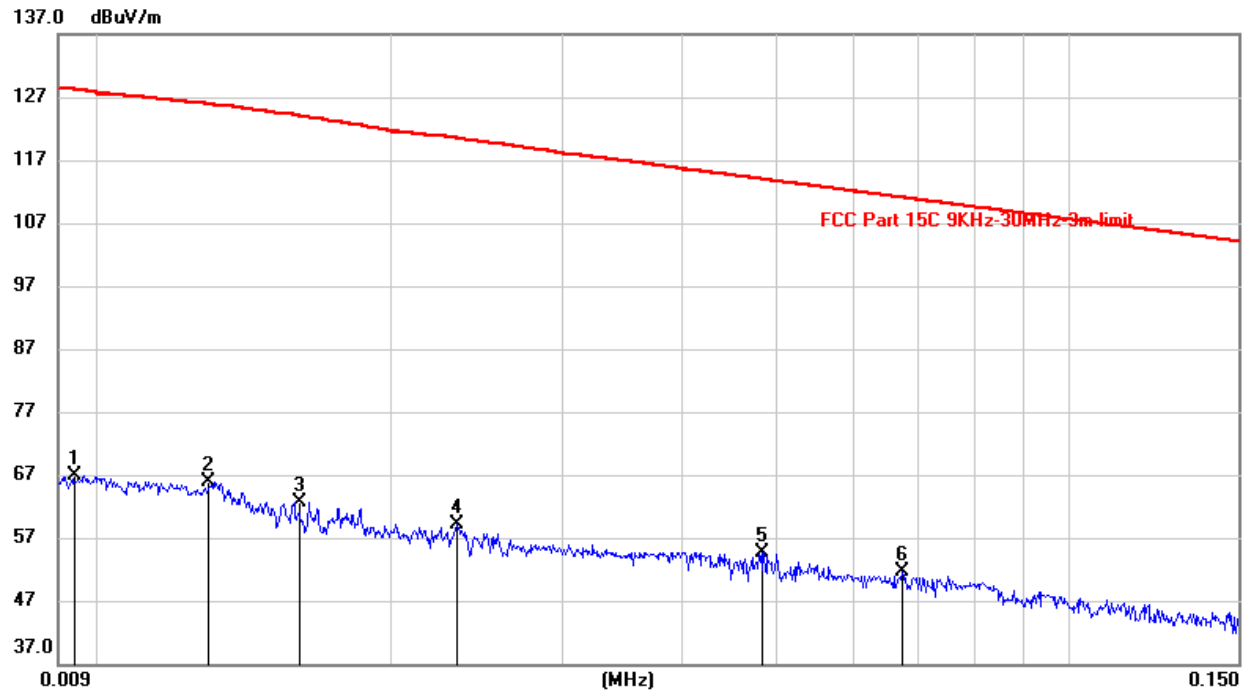

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	46.50	20.26	66.76	128.06	-61.30	peak
2	0.0129	45.70	20.24	65.94	125.85	-59.91	peak
3	0.0160	42.37	20.27	62.64	123.99	-61.35	peak
4	0.0233	38.85	20.31	59.16	120.42	-61.26	peak
5	0.0483	34.40	20.31	54.71	113.95	-59.24	peak
6	0.0674	31.21	20.31	51.52	111.05	-59.53	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

150KHz ~ 30M

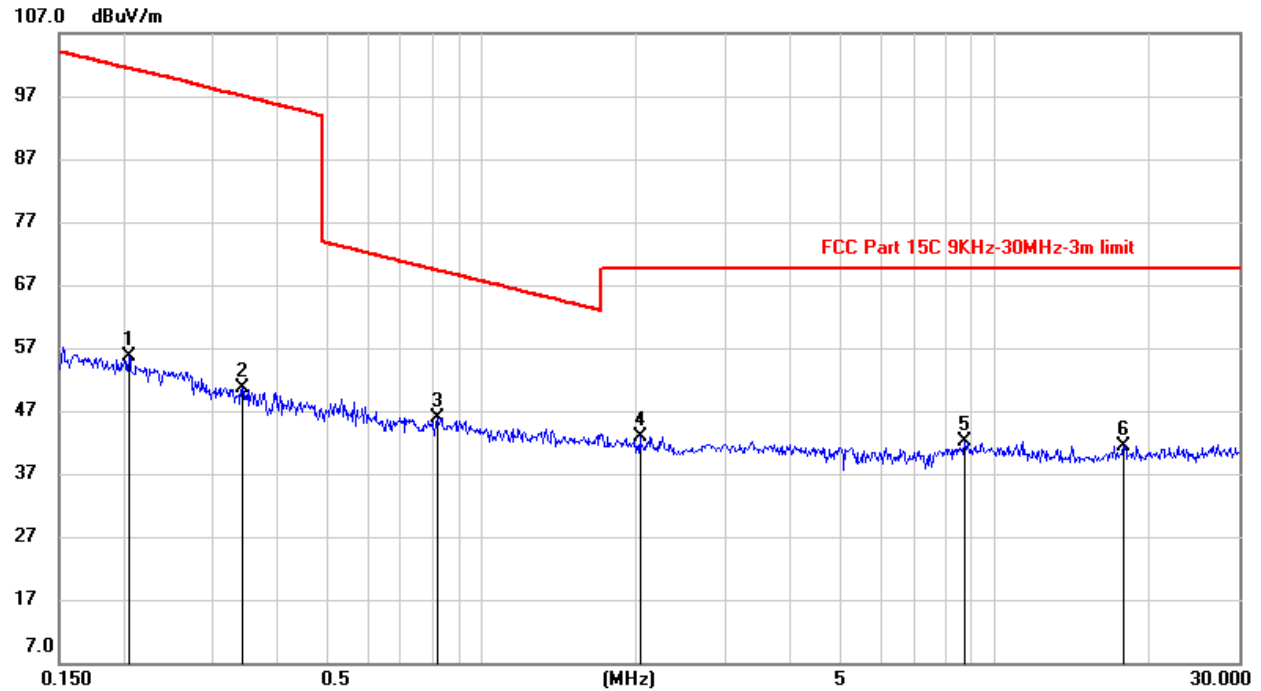

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.2048	35.20	20.36	55.56	101.41	-45.85	peak
2	0.3410	30.45	20.29	50.74	97.03	-46.29	peak
3	0.8215	25.63	20.36	45.99	69.32	-23.33	peak
4	2.0440	22.17	20.74	42.91	69.54	-26.63	peak
5	8.7293	21.02	20.99	42.01	69.54	-27.53	peak
6	17.9435	20.49	20.99	41.48	69.54	-28.06	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.


9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a).

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

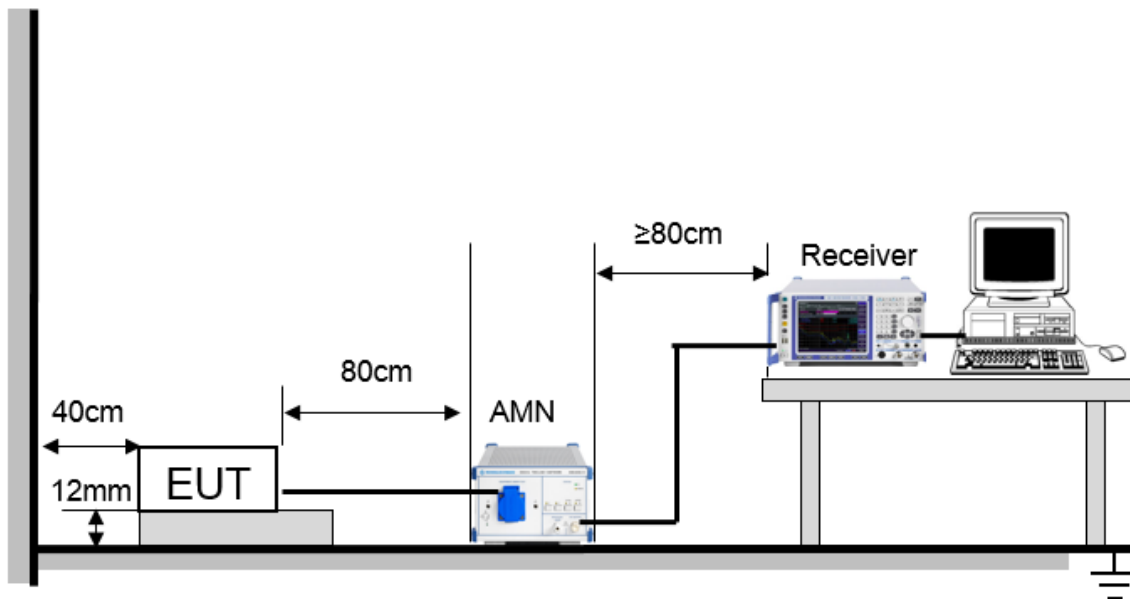


The EUT is put on a table of non-conducting material that is 12mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST RESULTS (MID CHANNEL, WORST-CASE CONFIGURATION)


LINE N RESULTS

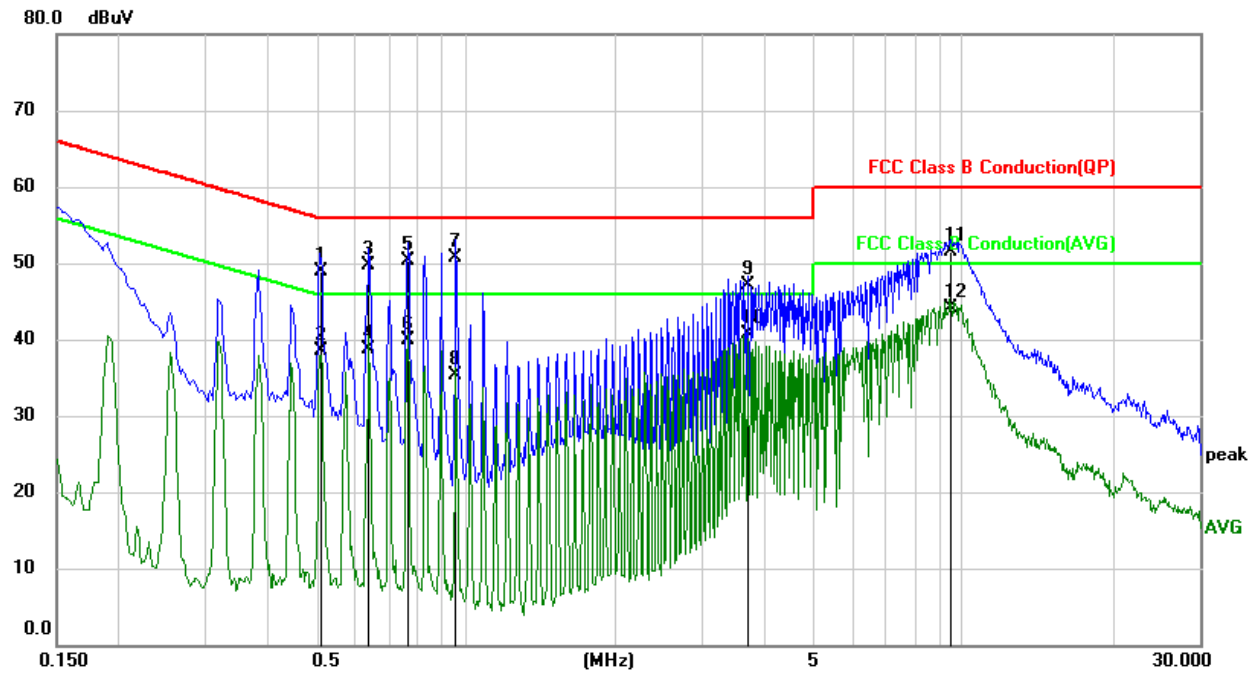

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5101	39.31	9.65	48.96	56.00	-7.04	QP
2	0.5101	28.94	9.65	38.59	46.00	-7.41	AVG
3	0.6390	40.11	9.66	49.77	56.00	-6.23	QP
4	0.6390	29.10	9.66	38.76	46.00	-7.24	AVG
5	0.7665	40.66	9.67	50.33	56.00	-5.67	QP
6	0.7665	30.15	9.67	39.82	46.00	-6.18	AVG
7	0.9588	40.95	9.67	50.62	56.00	-5.38	QP
8	0.9588	25.65	9.67	35.32	46.00	-10.68	AVG
9	3.6969	37.31	9.70	47.01	56.00	-8.99	QP
10	3.6969	30.97	9.70	40.67	46.00	-5.33	AVG
11	9.4953	41.67	9.77	51.44	60.00	-8.56	QP
12	9.4953	34.34	9.77	44.11	50.00	-5.89	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

LINE L RESULTS

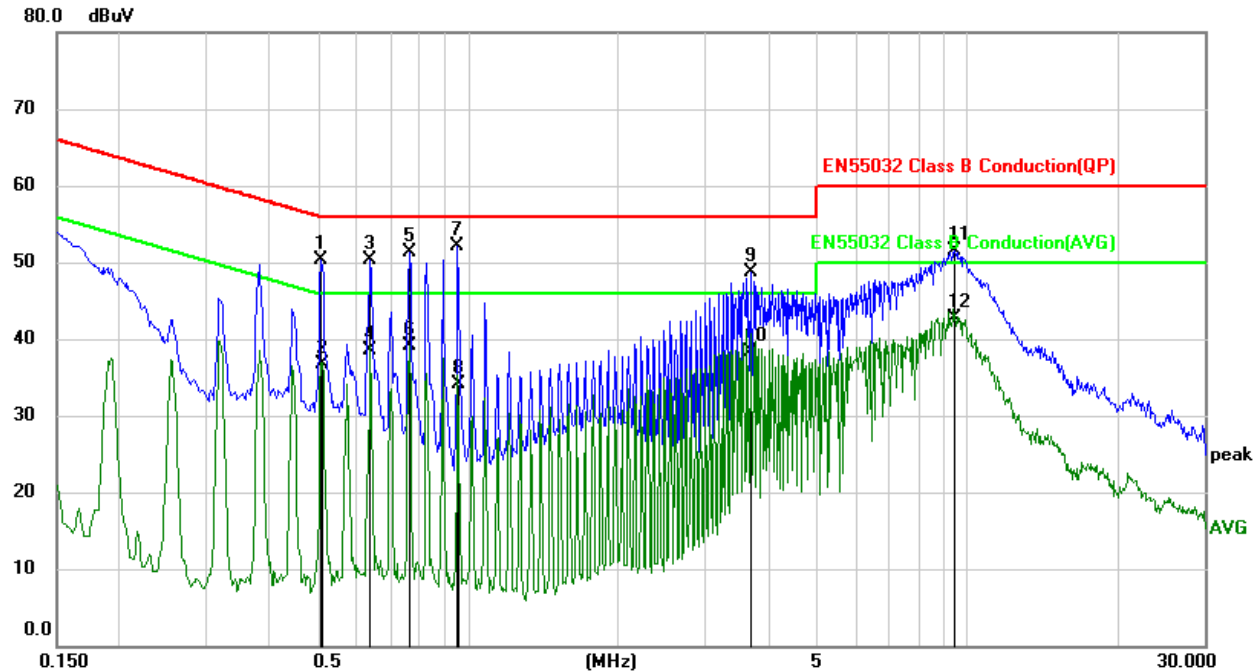

No.	Frequency (MHz)	Reading (dBuV)	Correct dB	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.5074	40.57	9.65	50.22	56.00	-5.78	QP
2	0.5101	27.14	9.65	36.79	46.00	-9.21	AVG
3	0.6372	40.71	9.66	50.37	56.00	-5.63	QP
4	0.6390	28.88	9.66	38.54	46.00	-7.46	AVG
5	0.7630	41.54	9.67	51.21	56.00	-4.79	QP
6	0.7665	29.45	9.67	39.12	46.00	-6.88	AVG
7	0.9531	42.43	9.67	52.10	56.00	-3.90	QP
8	0.9588	24.36	9.67	34.03	46.00	-11.97	AVG
9	3.6806	39.06	9.70	48.76	56.00	-7.24	QP
10	3.6969	28.69	9.70	38.39	46.00	-7.61	AVG
11	9.4514	41.74	9.77	51.51	60.00	-8.49	QP
12	9.4953	33.01	9.77	42.78	50.00	-7.22	AVG

- Note: 1. Result = Reading +Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

Note: All the modulation and channels had been tested, but only the worst data recorded in the report.

10. ANTENNA REQUIREMENTS

Applicable requirements

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector

EUT has a PCB antenna without antenna connector.

Antenna Gain

The antenna gain of EUT is less than 6 dBi.

END OF REPORT

Page 54 of 54