



Appendix B

RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: M5 LLM630 Compute Kit



Trade Mark:

Test Model: LLM630 Compute Kit

Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung



Contents

Page

COVER PAGE

1	Duty Cycle	3
1.1	Test Result	3
1.2	Test Graphs	4
2	Maximum Conducted Output Power	7
2.1	Test Result	7
2.2	Test Graphs	8
3	-6dB Bandwidth	11
3.1	Test Result	11
3.2	Test Graphs	12
4	Maximum Power Spectral Density Level	15
4.1	Test Result	15
4.2	Test Graphs	16
5	Band Edge	19
5.1	Test Result	19
5.2	Test Graphs	20
6	Conducted RF Spurious Emission	24
6.1	Test Result	24
6.2	Test Graphs	25
7	Restrict Band	31
7.1	Test Result	31
7.2	Test Graphs	32





1 Duty Cycle


1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
BLE 1M	2402	97.63	0.1	0.48
BLE 1M	2440	97.63	0.1	0.48
BLE 1M	2480	97.56	0.11	0.48
BLE 2M	2402	95.37	0.21	0.95
BLE 2M	2440	95.4	0.2	0.95
BLE 2M	2480	95.36	0.21	0.94

1.2 Test Graphs

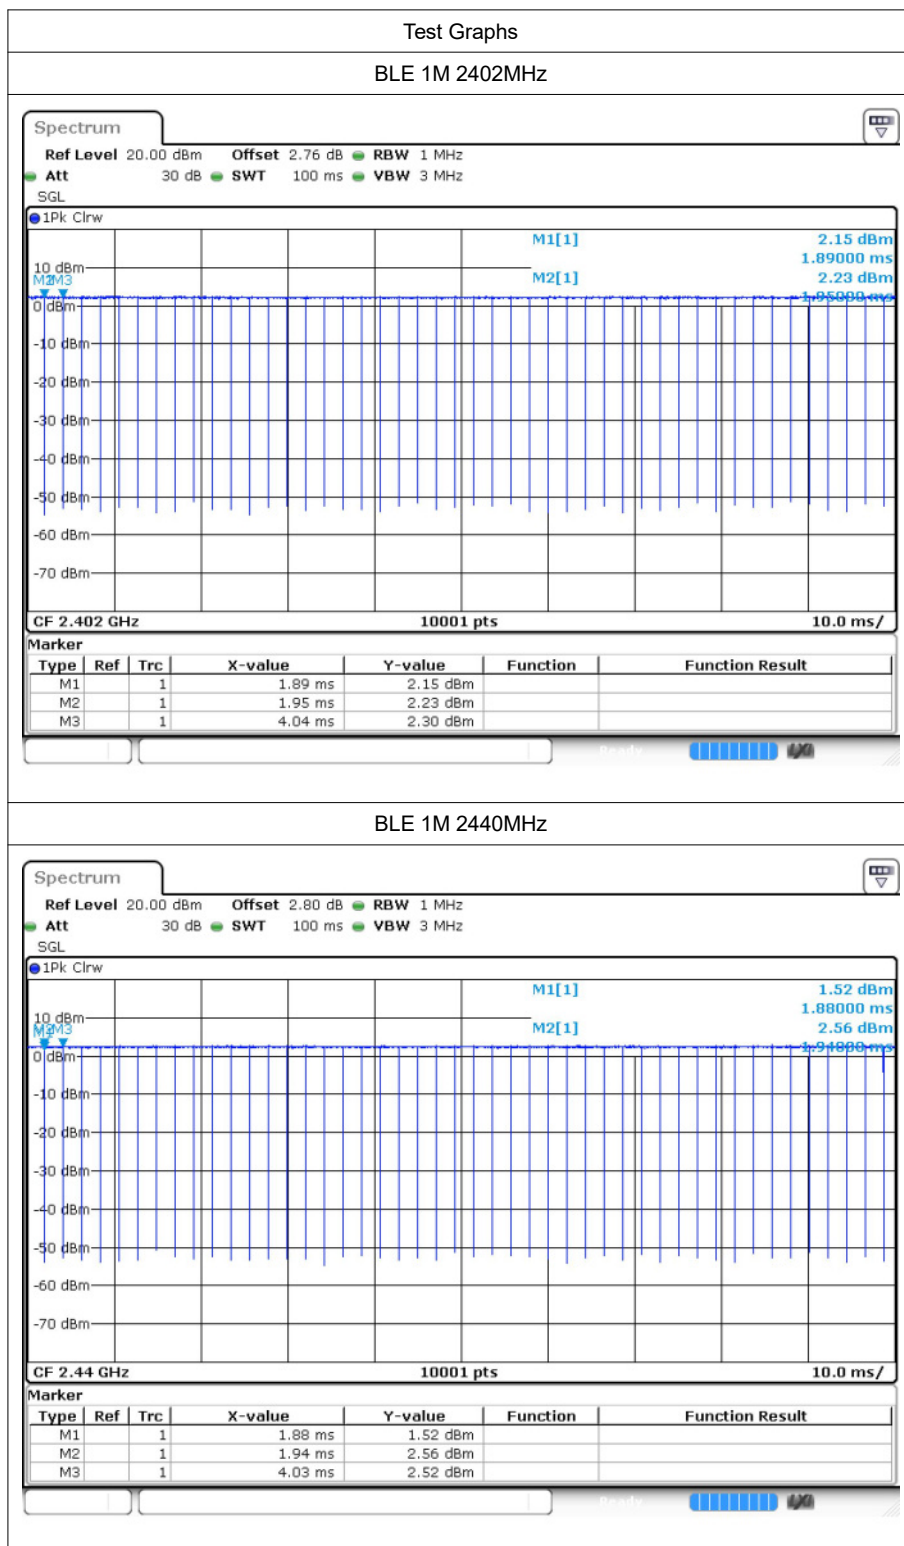

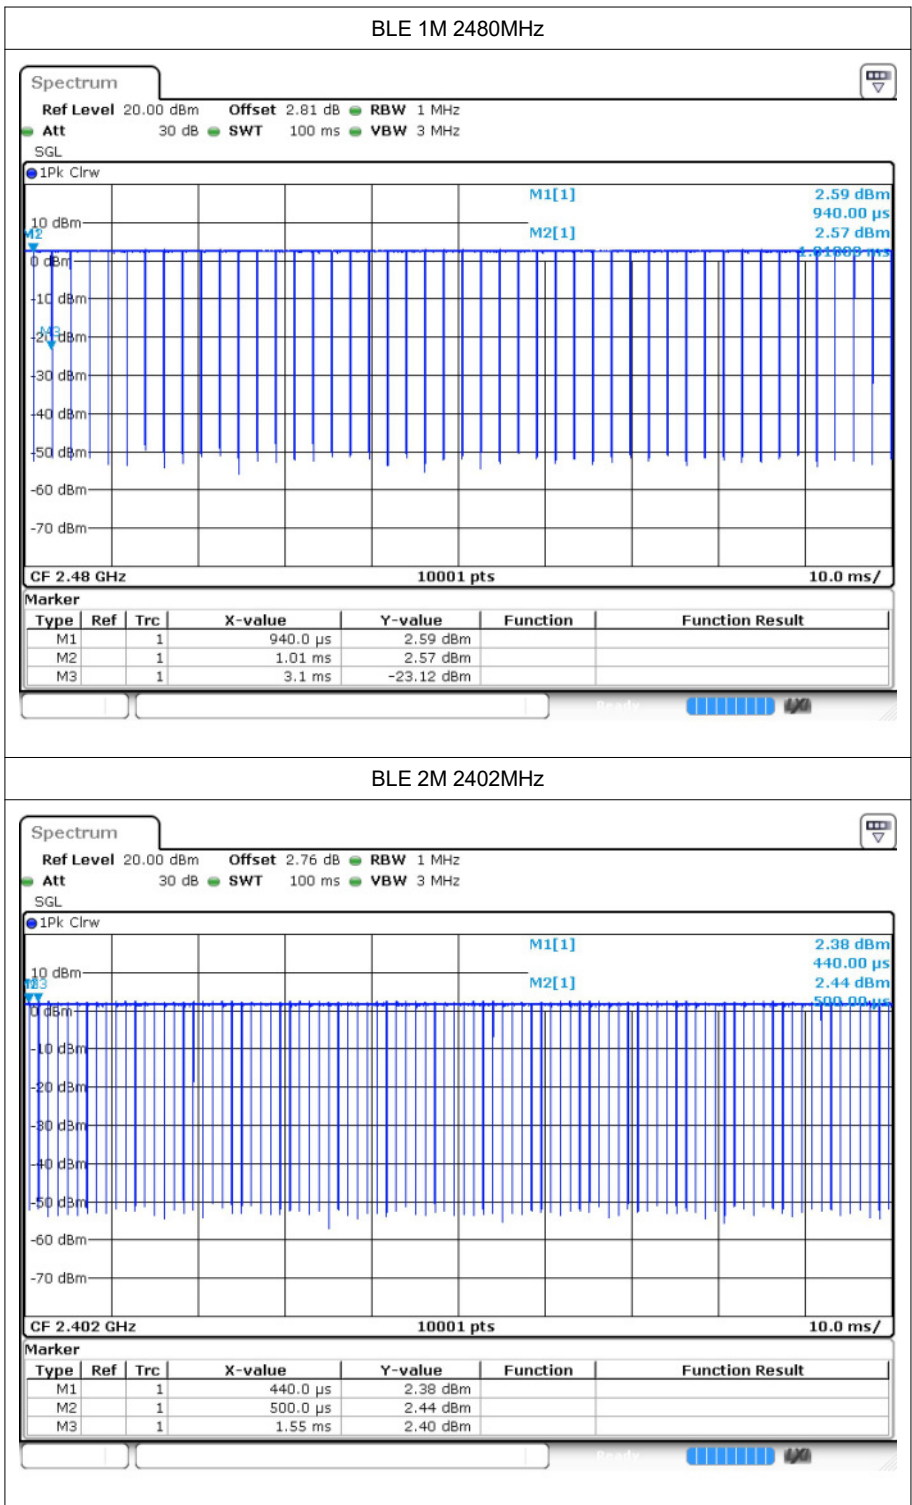

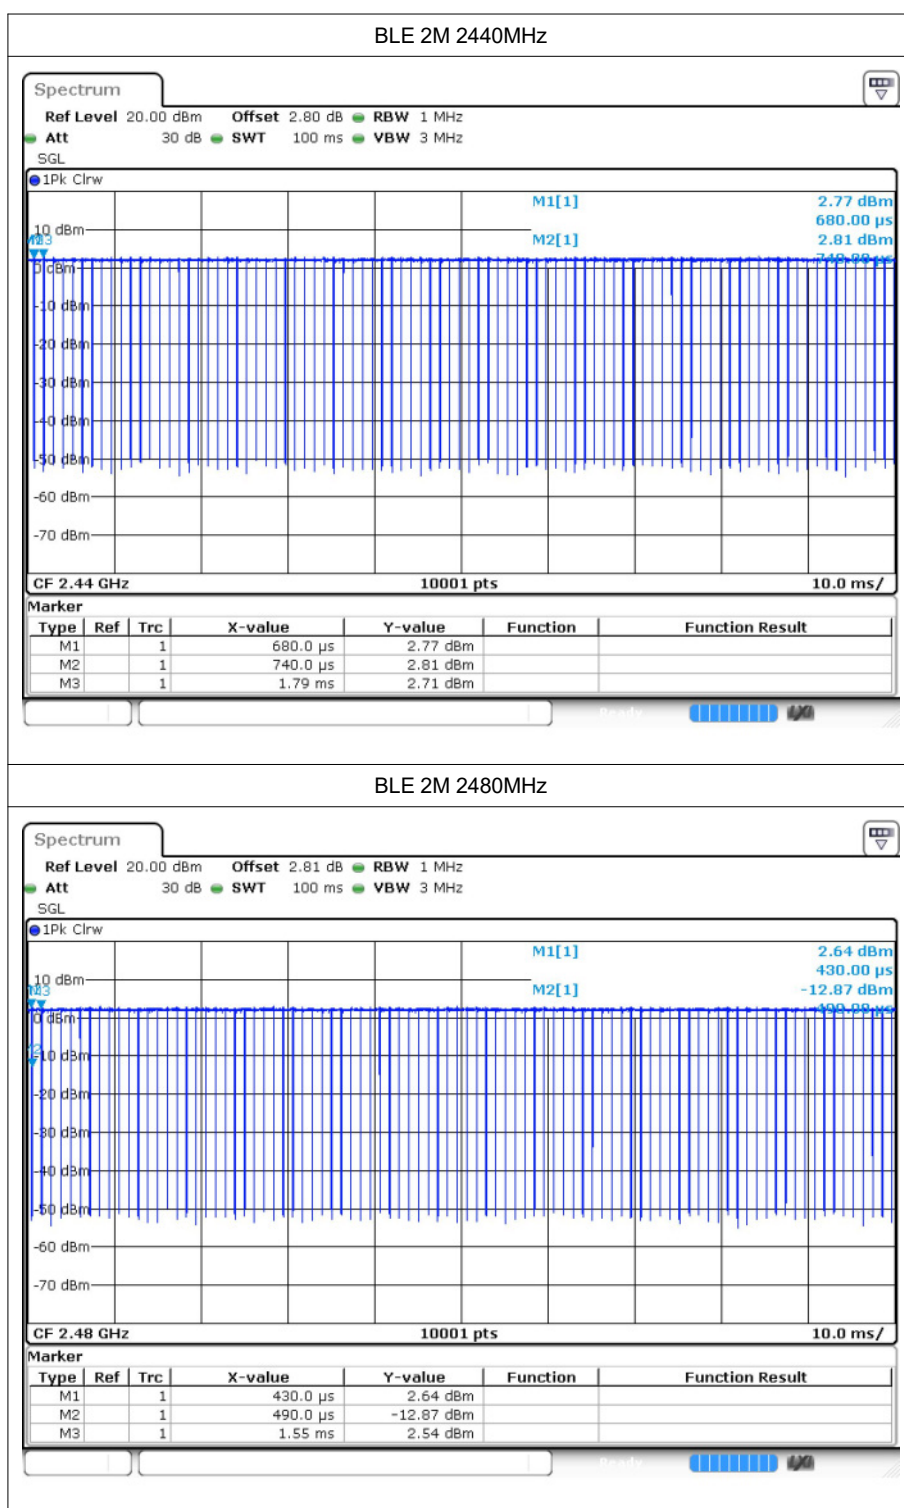





2 Maximum Conducted Output Power


2.1 Test Result

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	2.42	30	Pass
BLE 1M	2440	2.68	30	Pass
BLE 1M	2480	2.69	30	Pass
BLE 2M	2402	2.33	30	Pass
BLE 2M	2440	2.56	30	Pass
BLE 2M	2480	2.63	30	Pass

2.2 Test Graphs

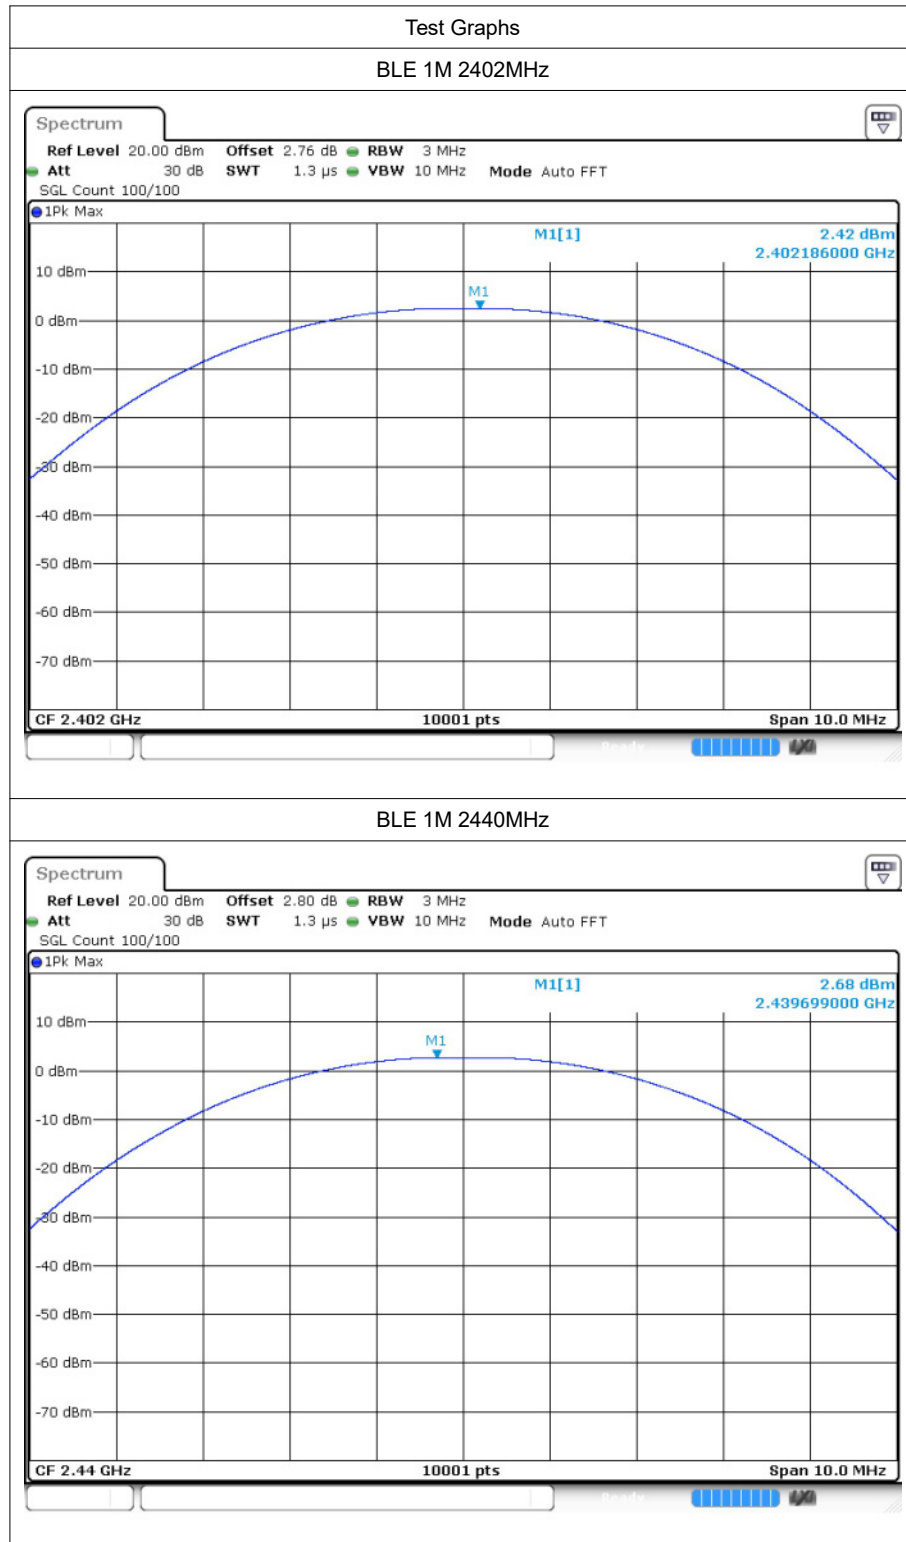

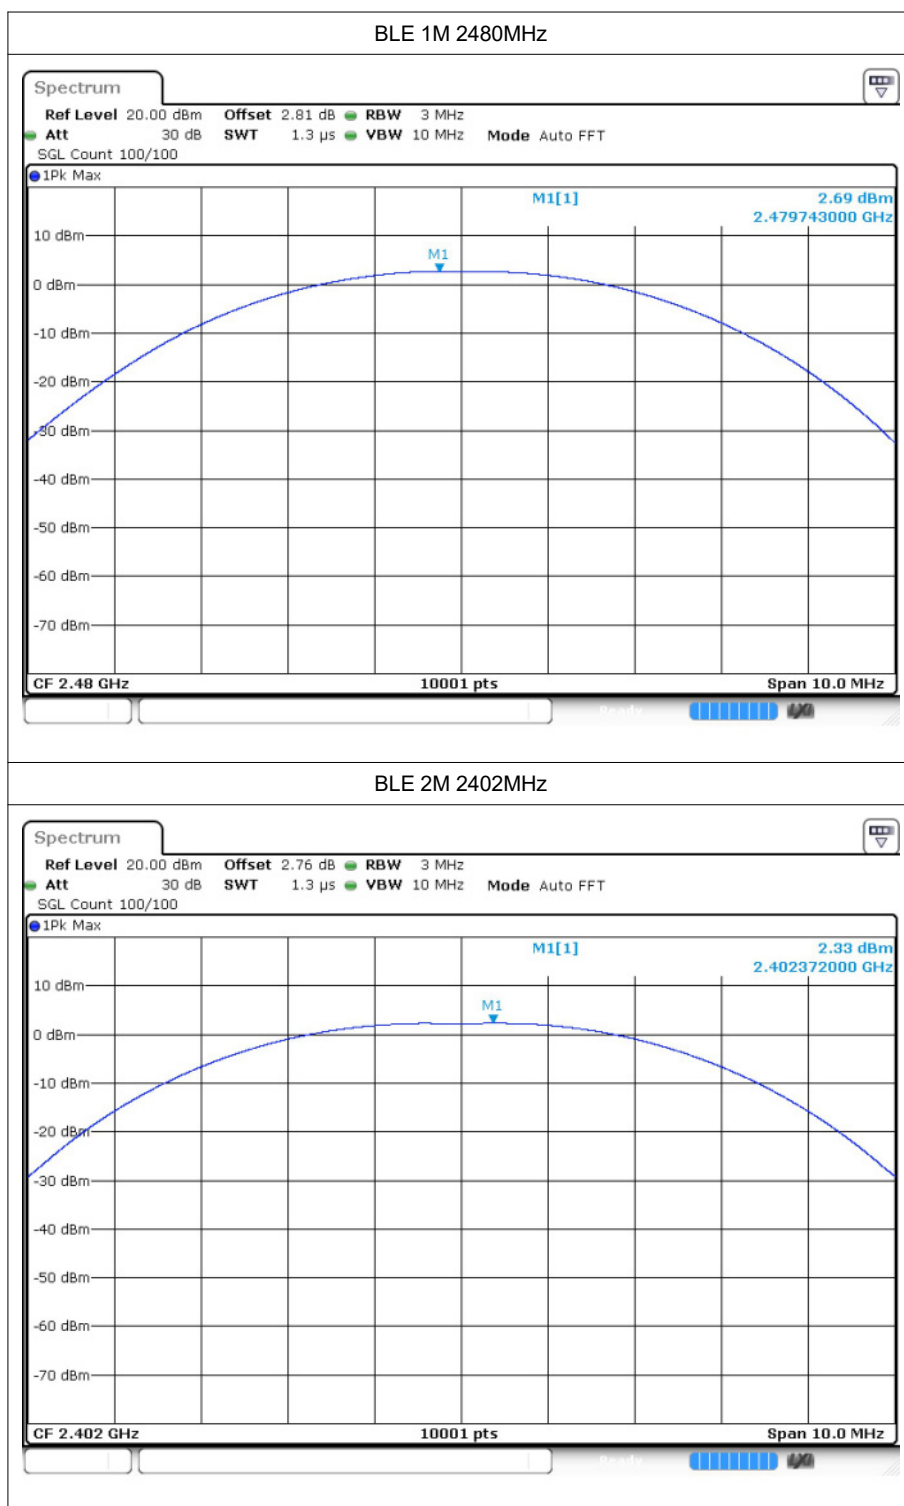

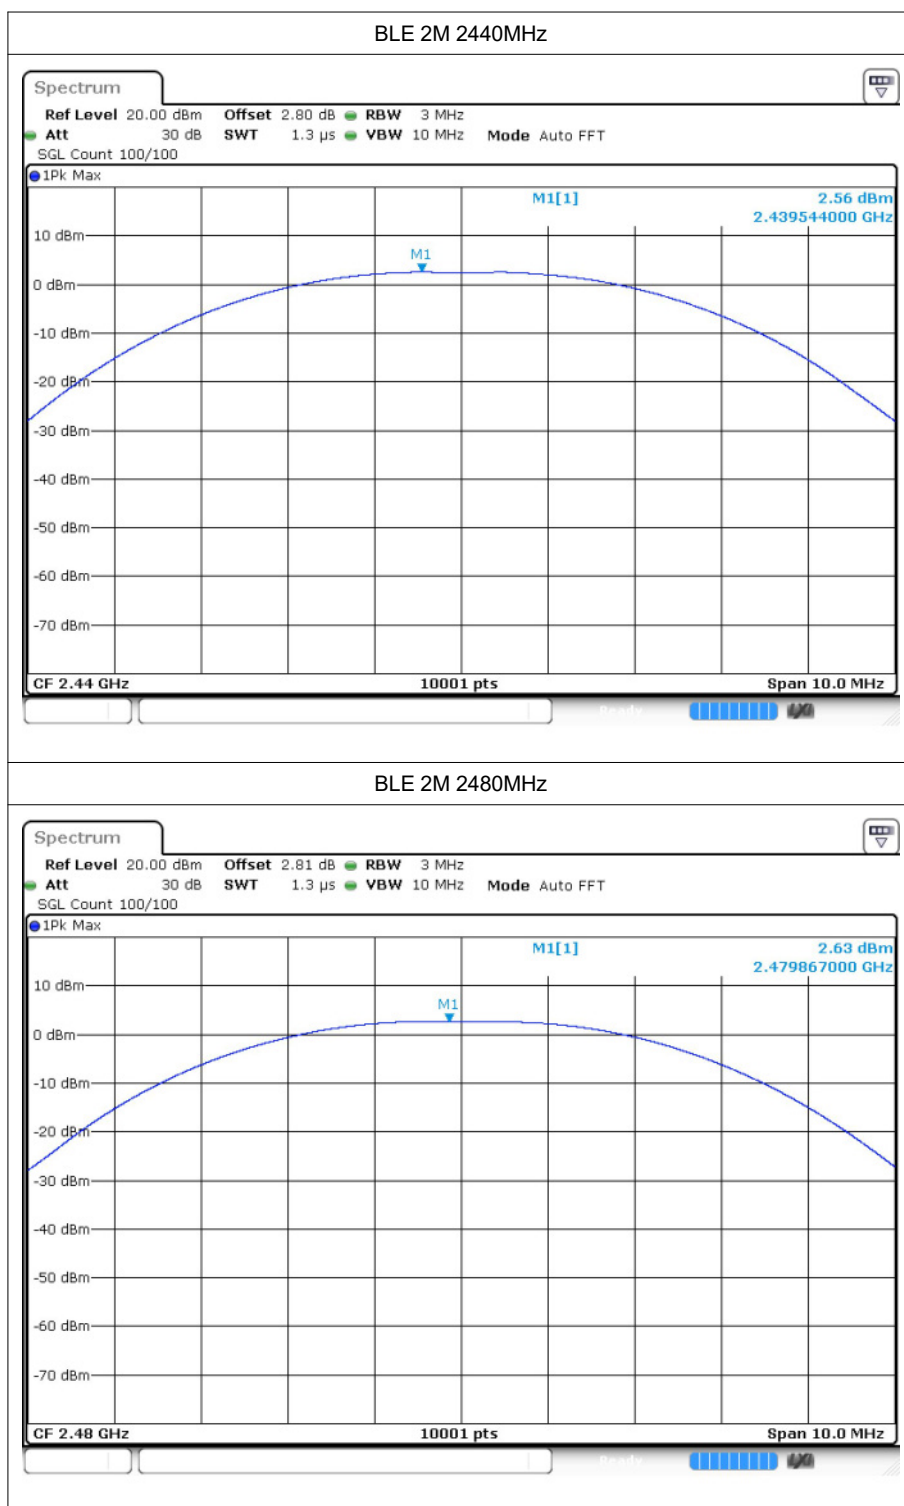





3 -6dB Bandwidth


3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.708	0.5	Pass
BLE 1M	2440	0.671	0.5	Pass
BLE 1M	2480	0.699	0.5	Pass
BLE 2M	2402	1.133	0.5	Pass
BLE 2M	2440	1.007	0.5	Pass
BLE 2M	2480	1.125	0.5	Pass

3.2 Test Graphs

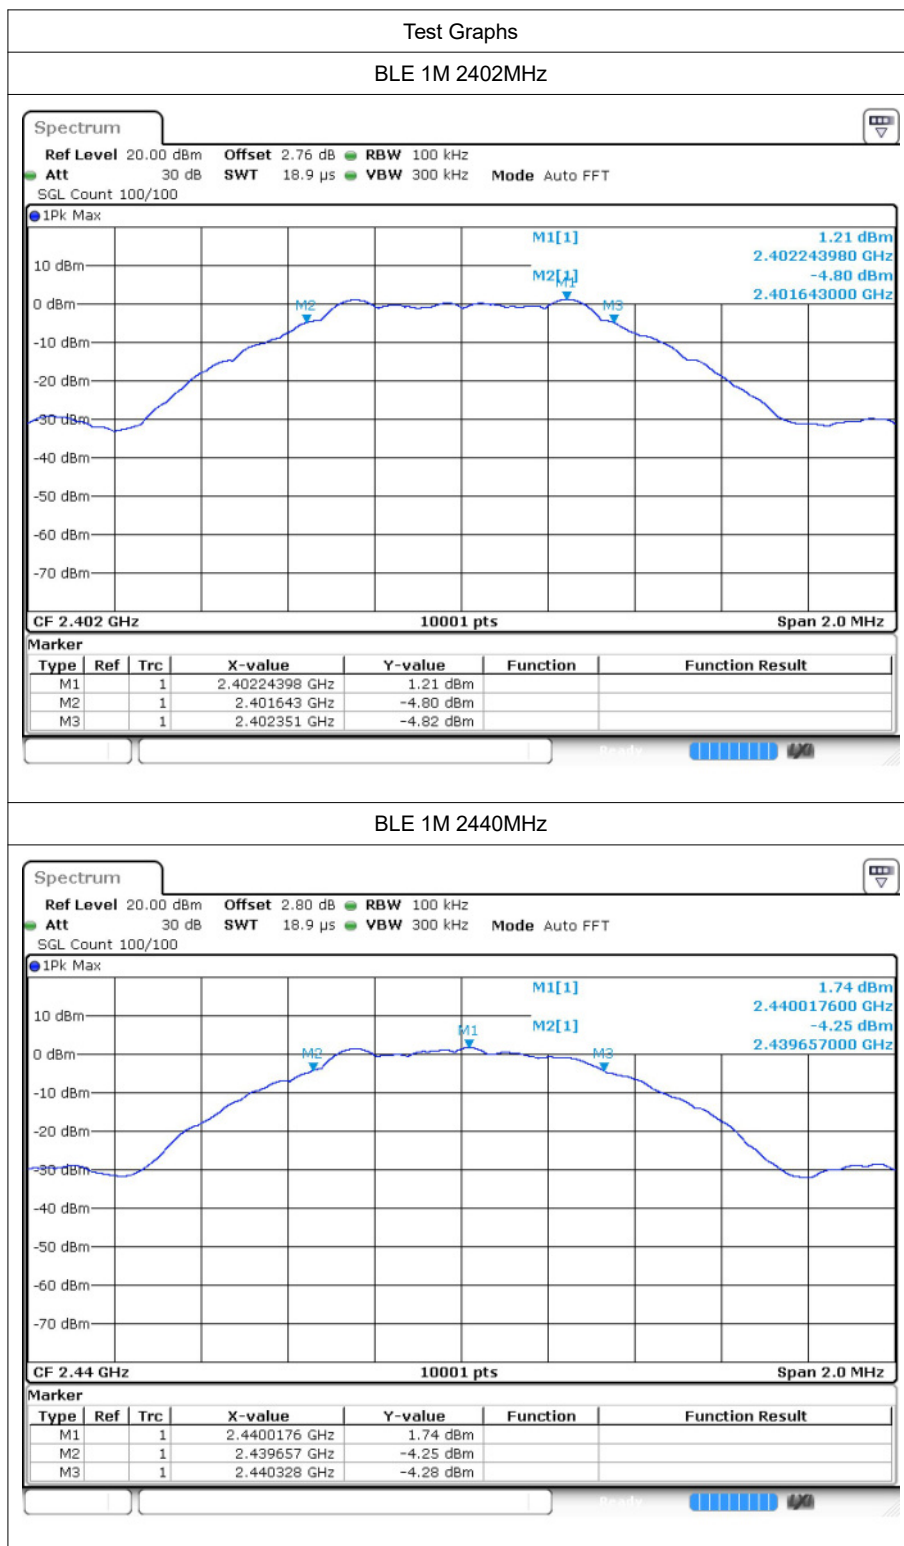

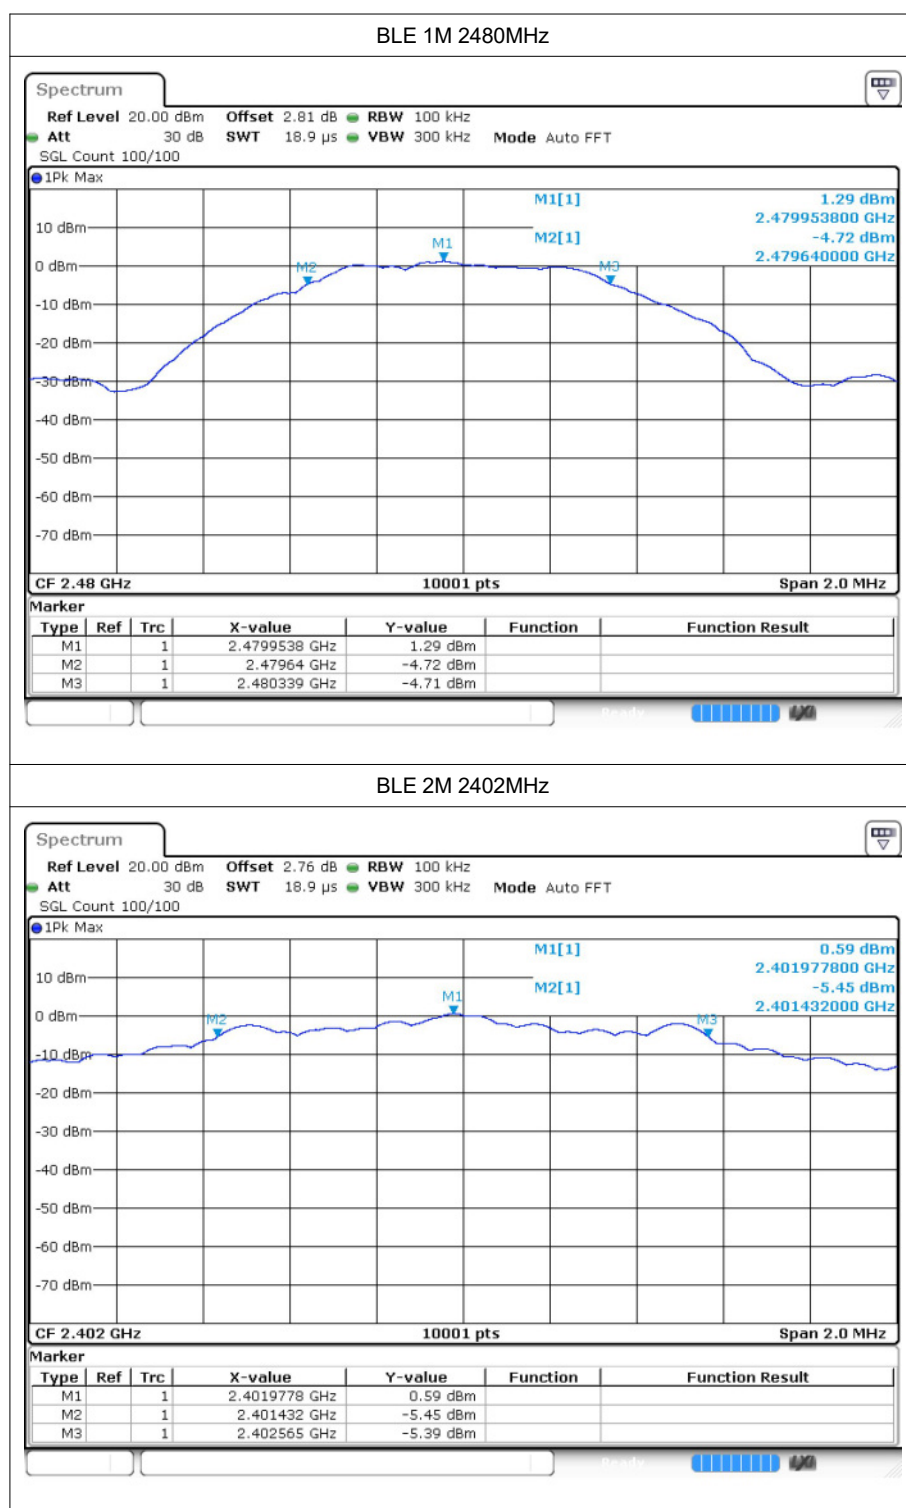

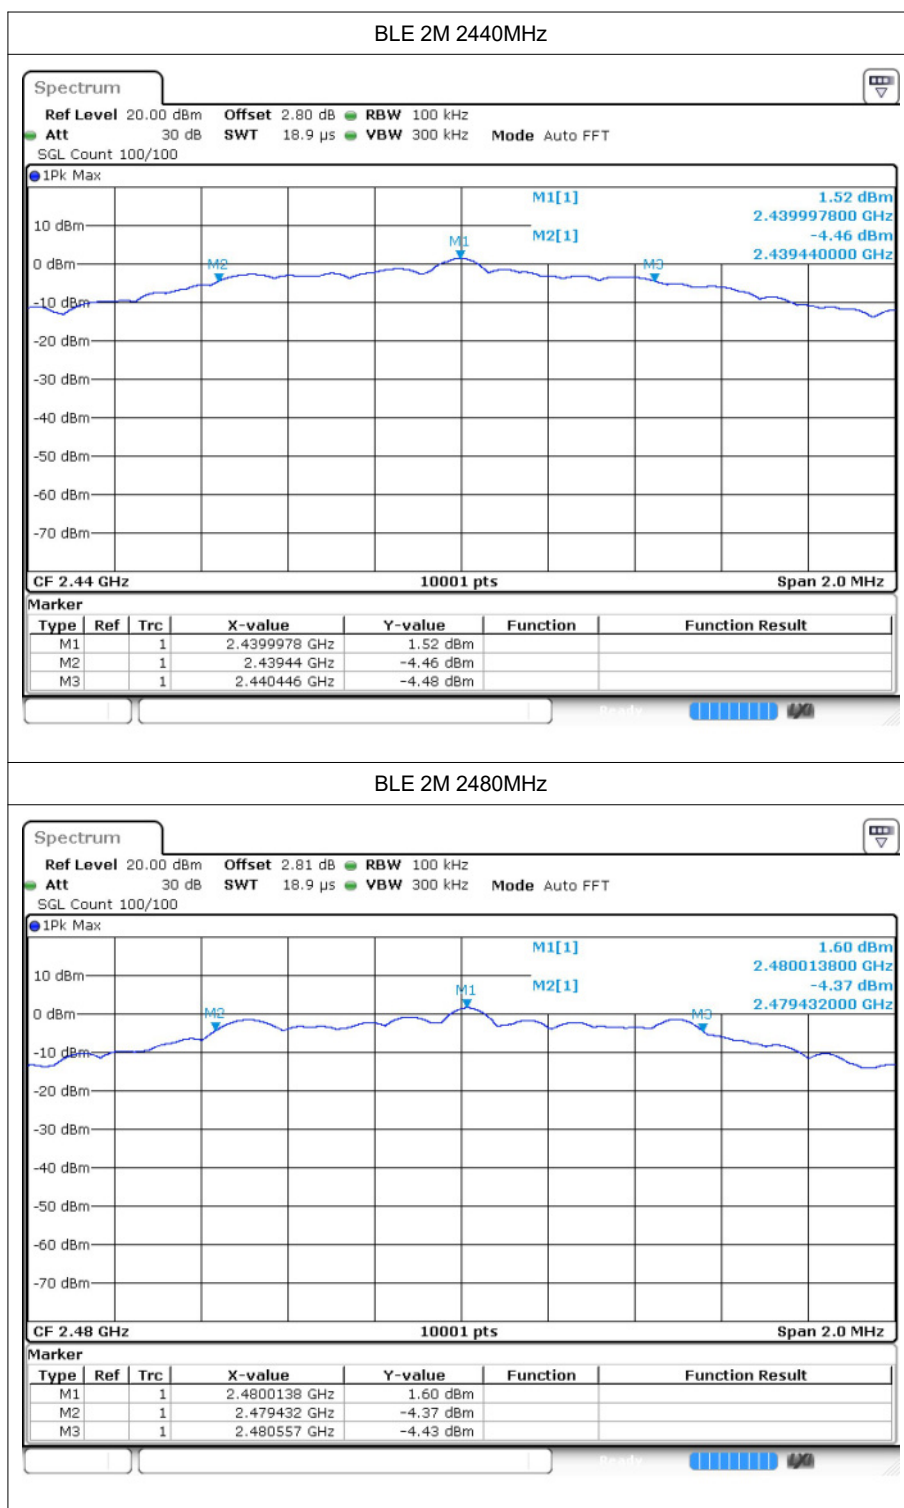



4 Maximum Power Spectral Density Level


4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3-100kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-11.15	≤ 8	Pass
BLE 1M	2440	-10.73	≤ 8	Pass
BLE 1M	2480	-10.83	≤ 8	Pass
BLE 2M	2402	-13.86	≤ 8	Pass
BLE 2M	2440	-13.6	≤ 8	Pass
BLE 2M	2480	-13.44	≤ 8	Pass

4.2 Test Graphs

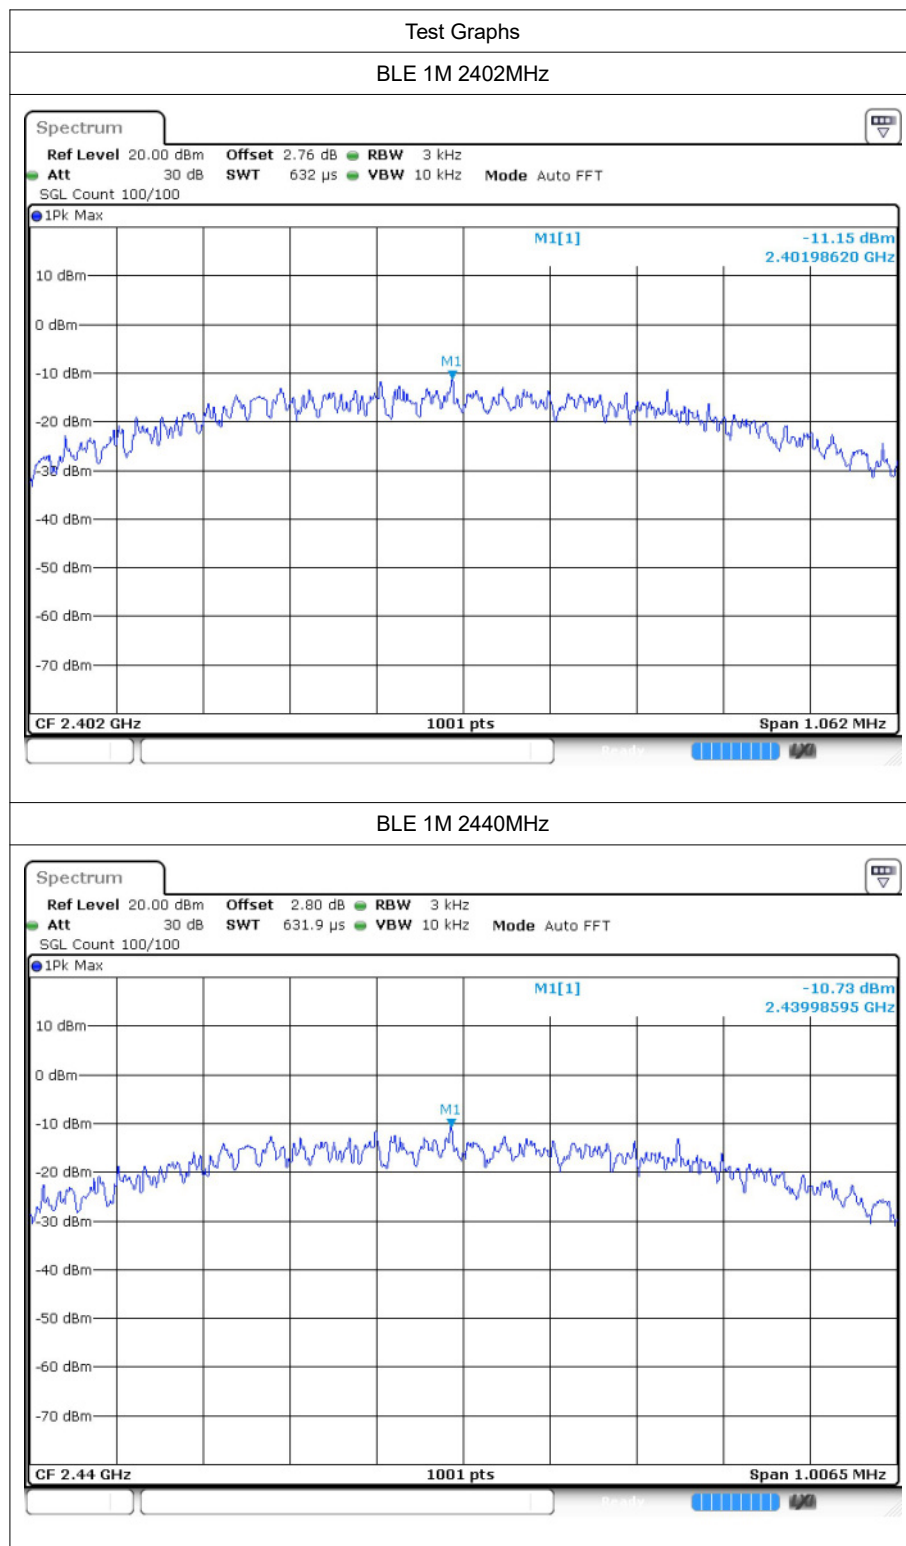

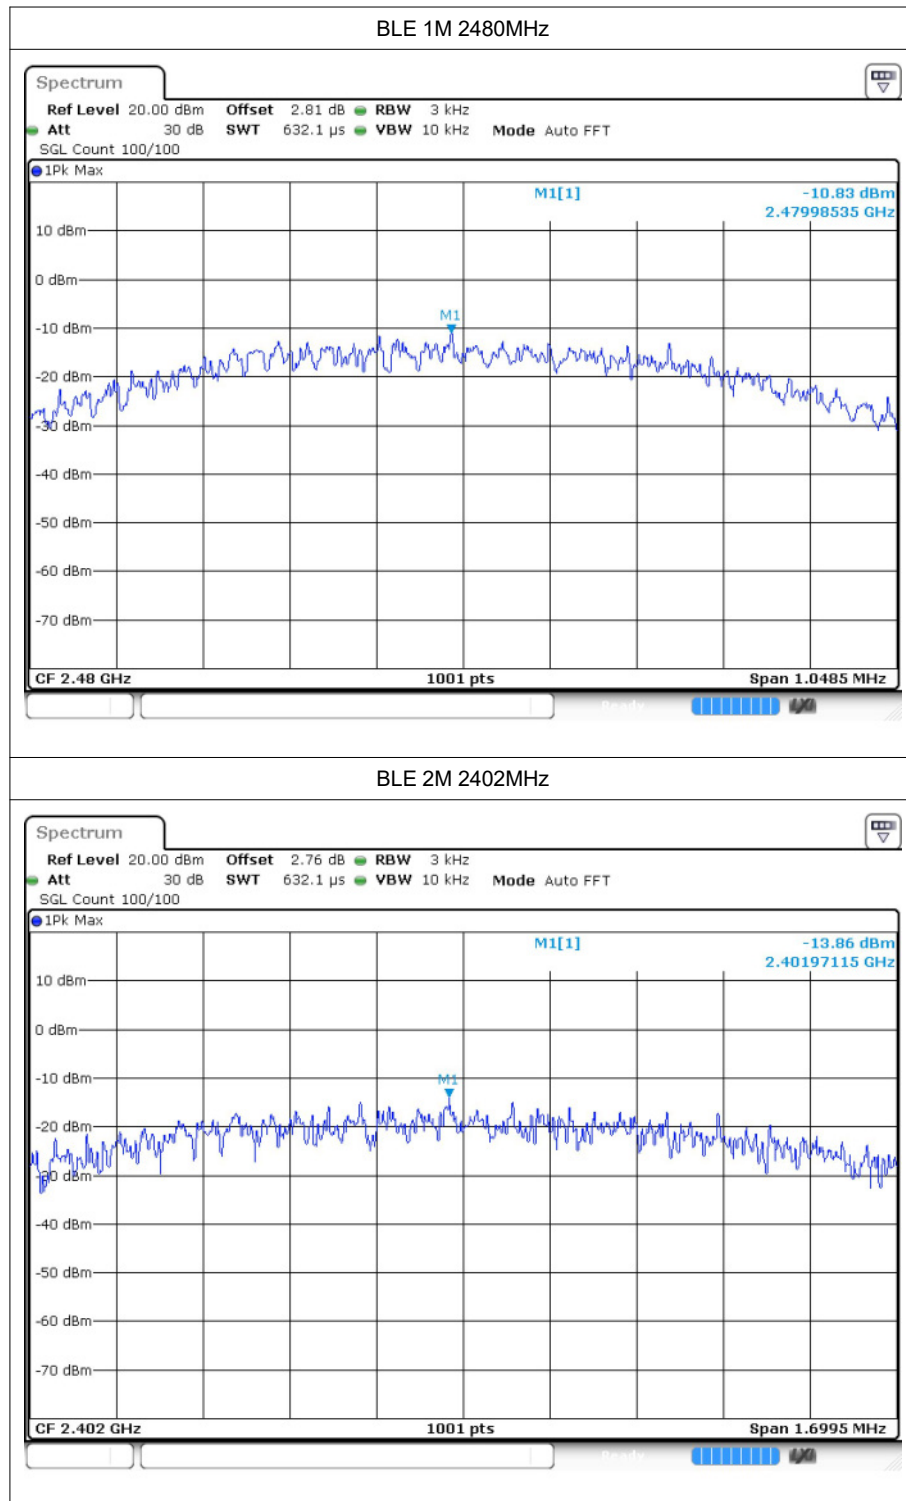

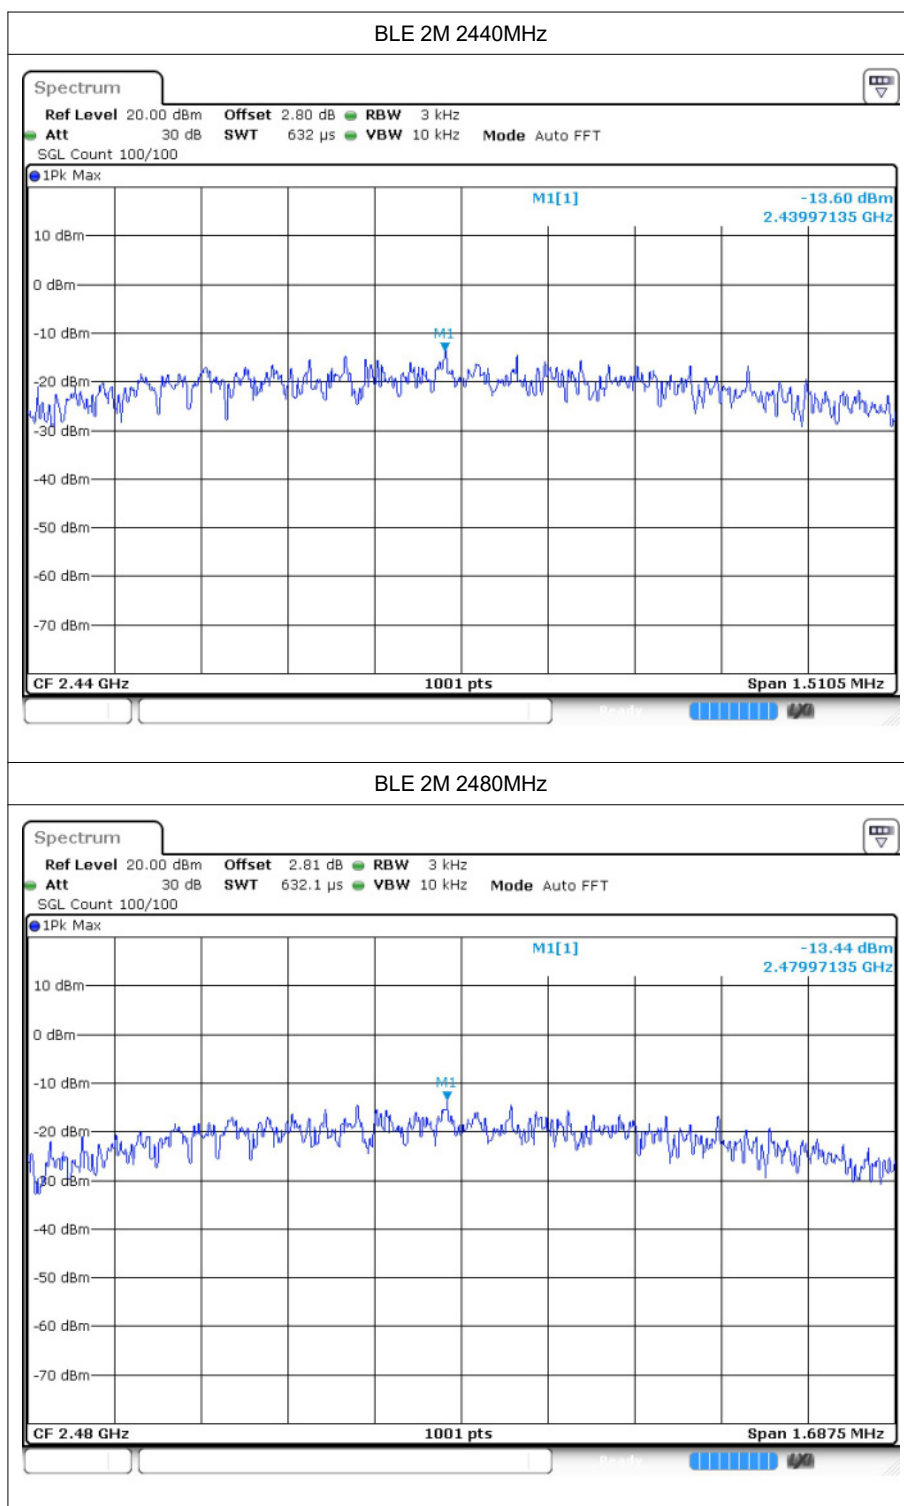





5 Band Edge


5.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-57	-20	Pass
BLE 1M	2480	-55.92	-20	Pass
BLE 2M	2402	-57.02	-20	Pass
BLE 2M	2480	-53.93	-20	Pass

5.2 Test Graphs

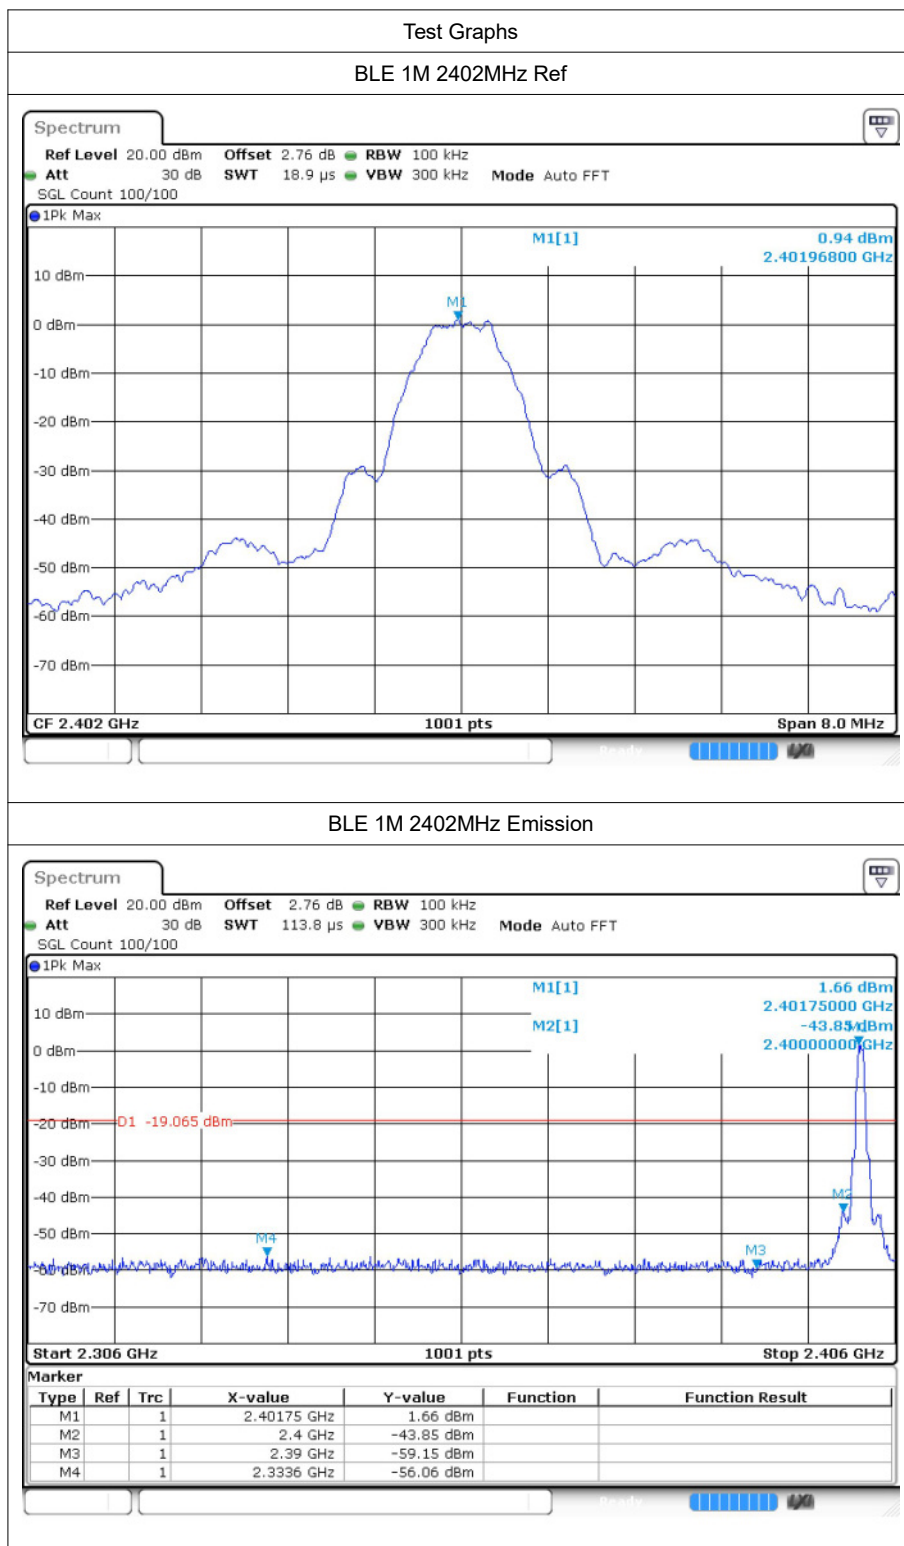

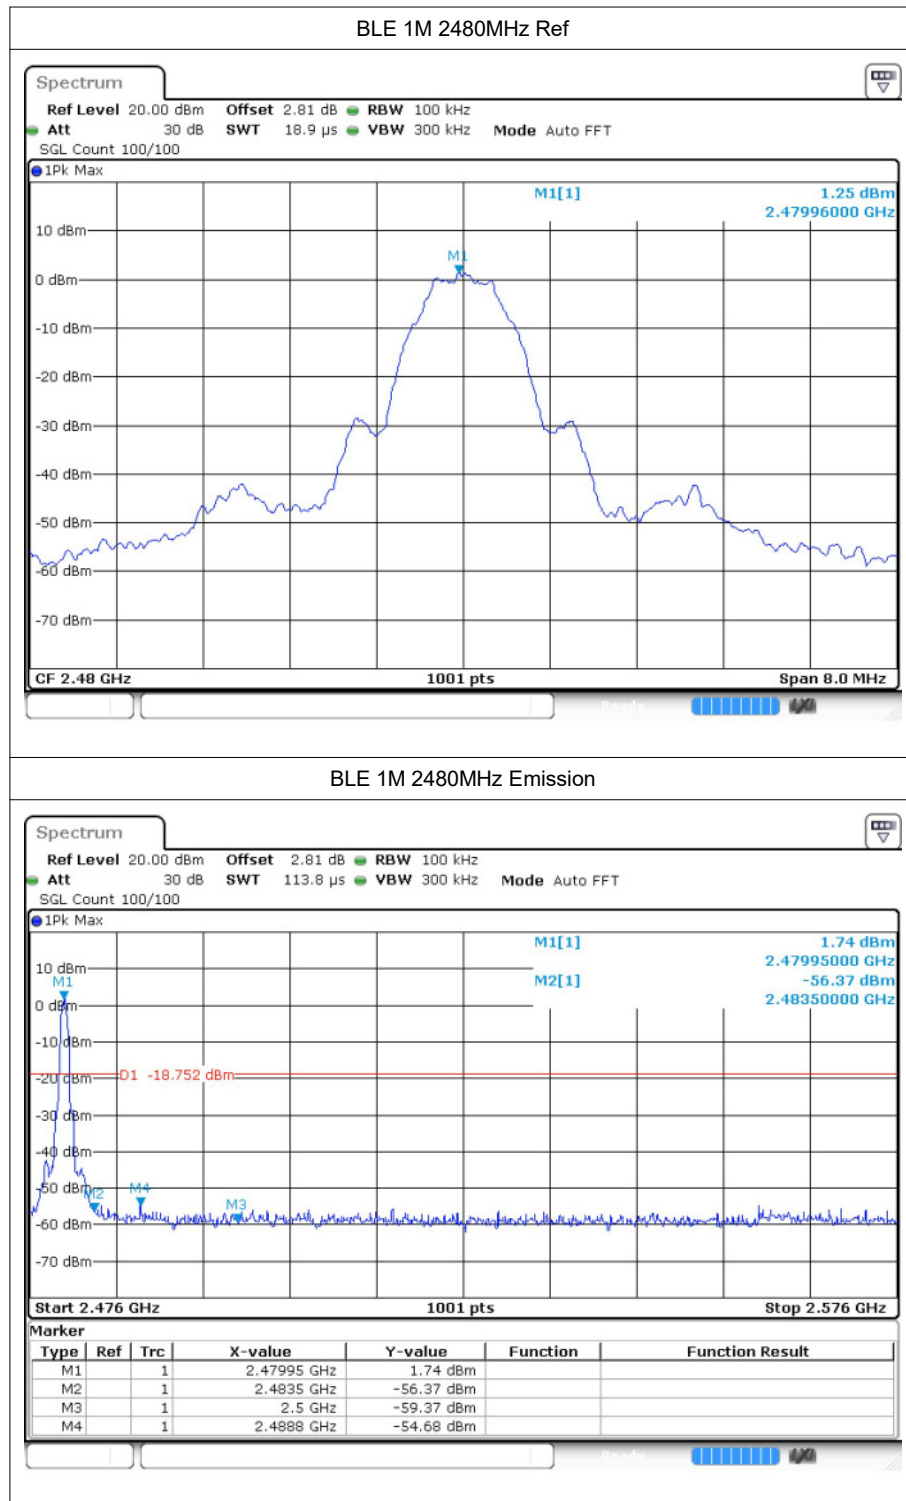

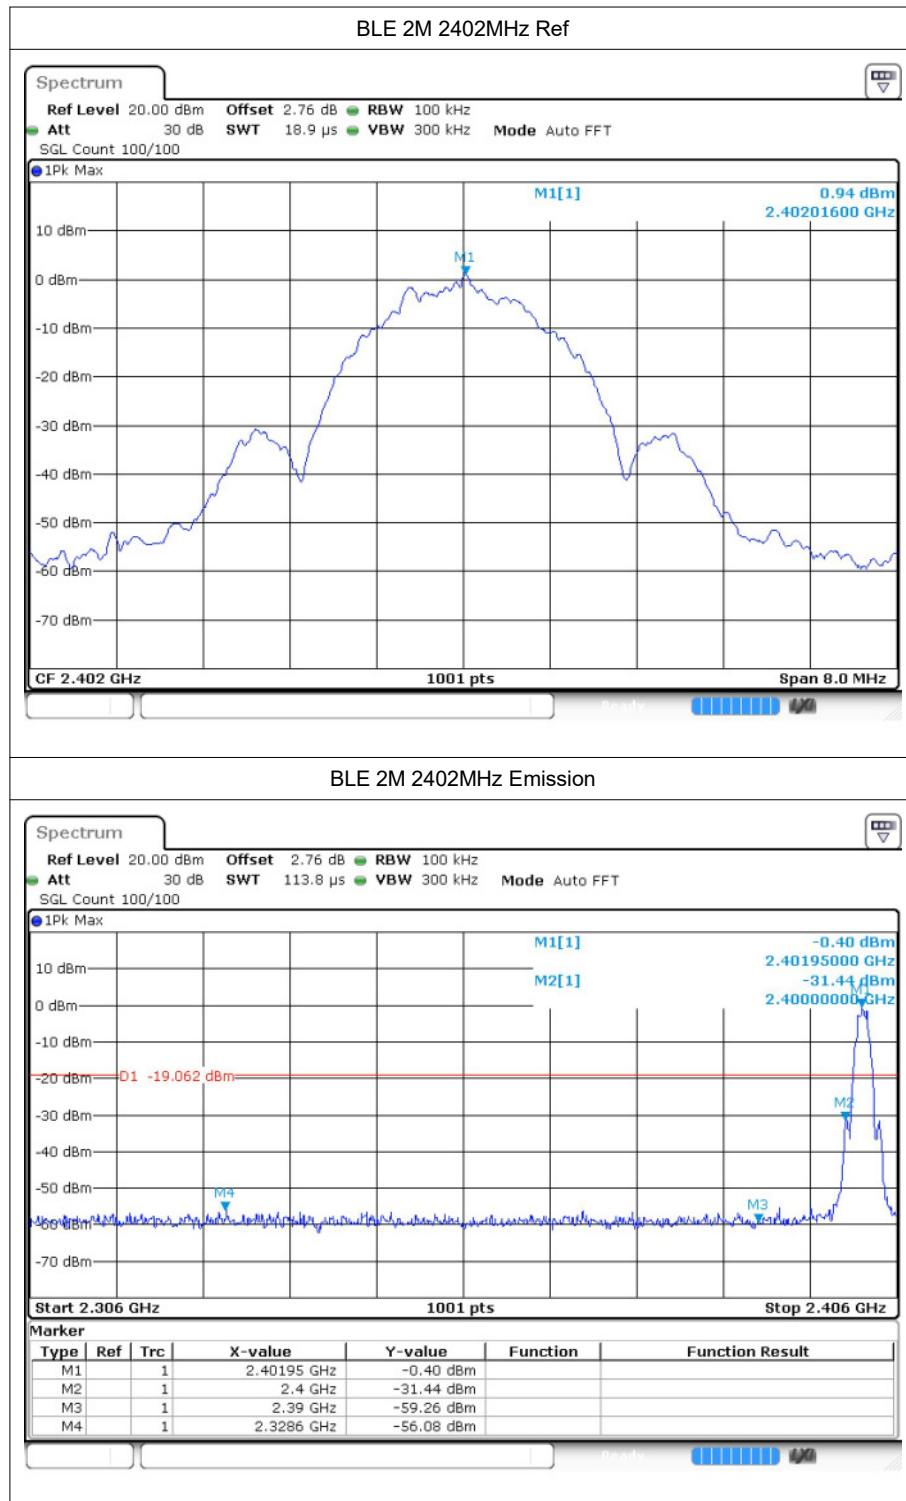

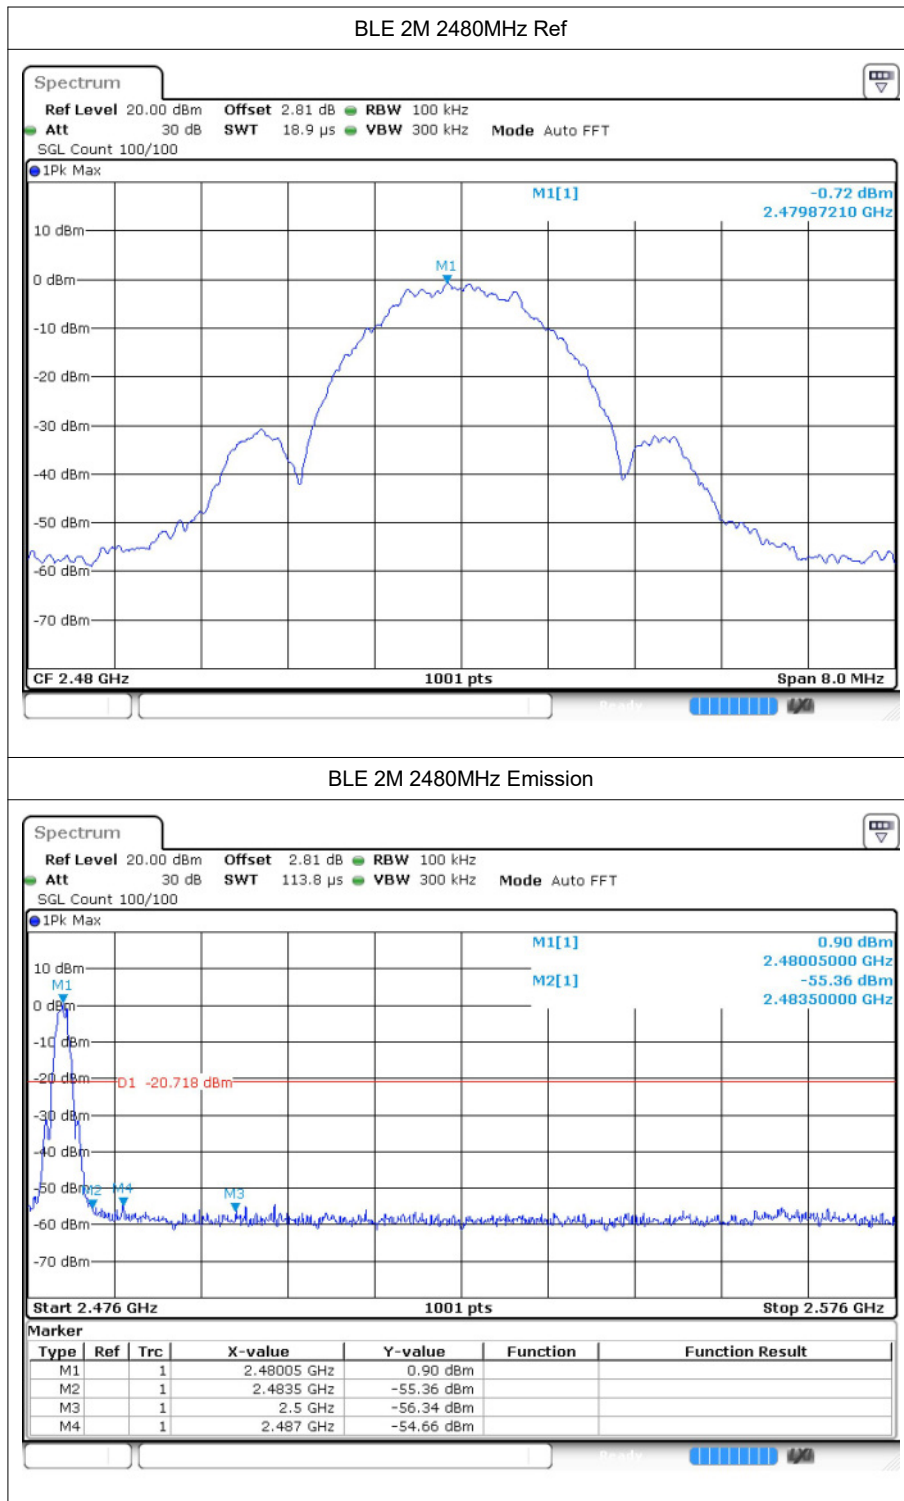





6 Conducted RF Spurious Emission


6.1 Test Result


Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-44.21	-20	Pass
BLE 1M	2440	-42.62	-20	Pass
BLE 1M	2480	-44.16	-20	Pass
BLE 2M	2402	-40.99	-20	Pass
BLE 2M	2440	-44.4	-20	Pass
BLE 2M	2480	-42.29	-20	Pass


6.2 Test Graphs

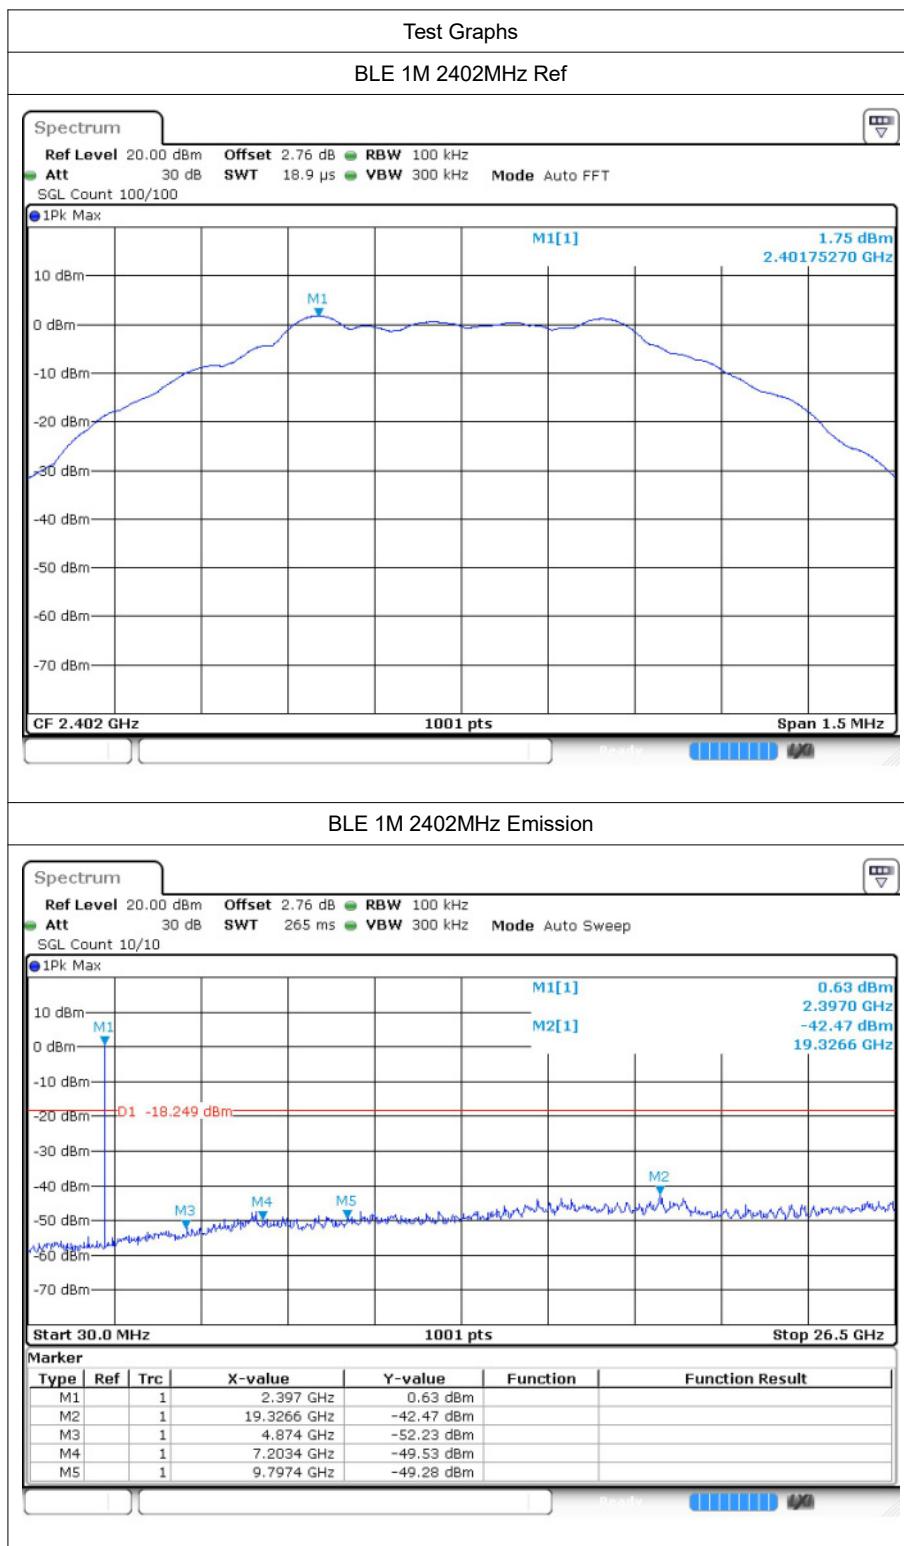


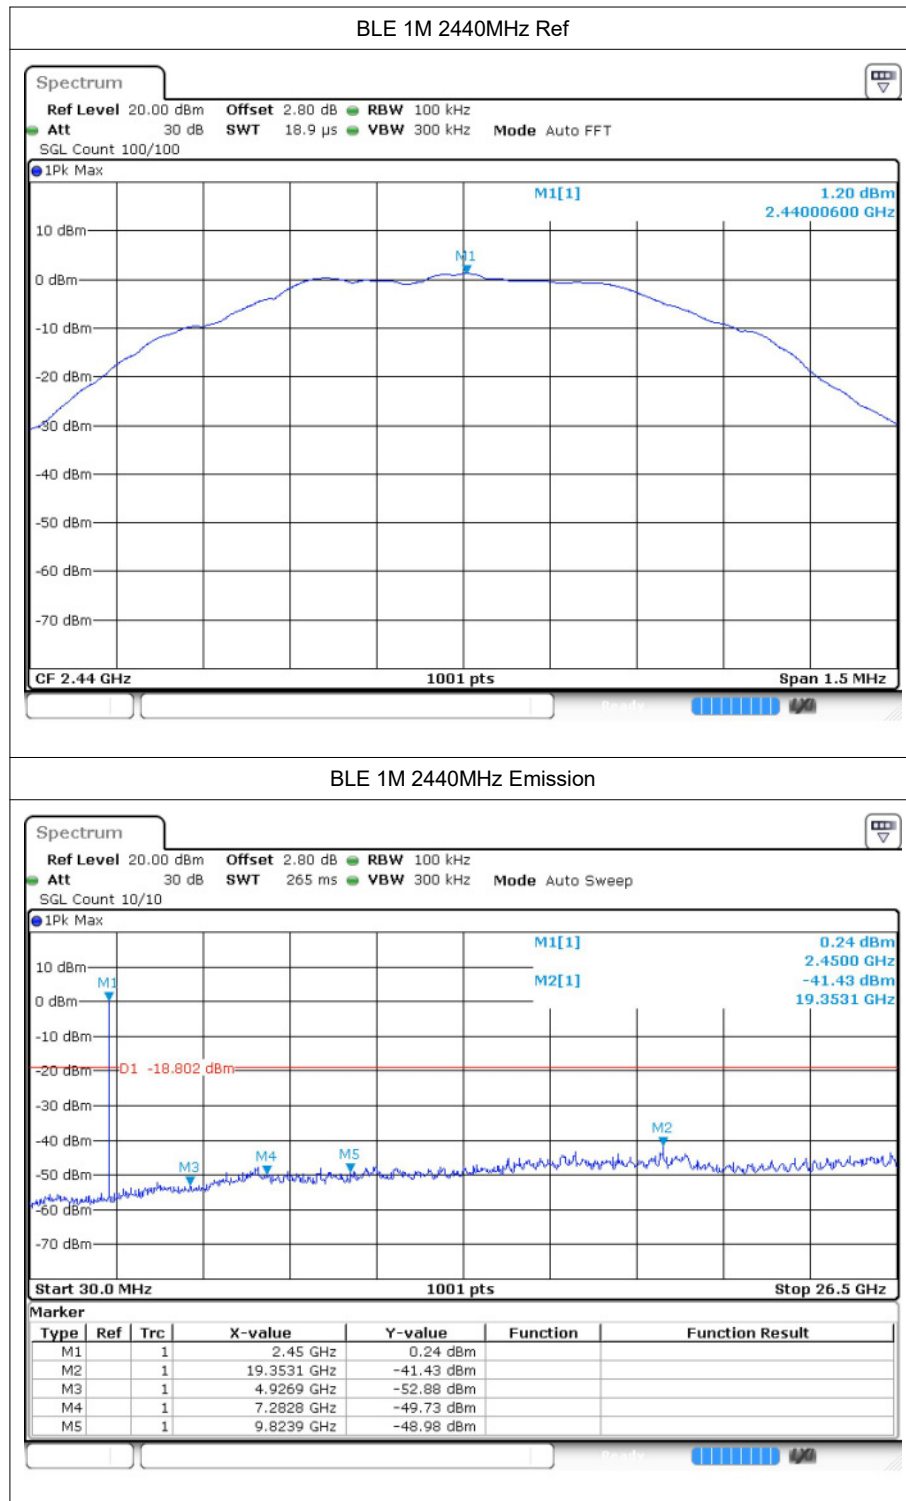

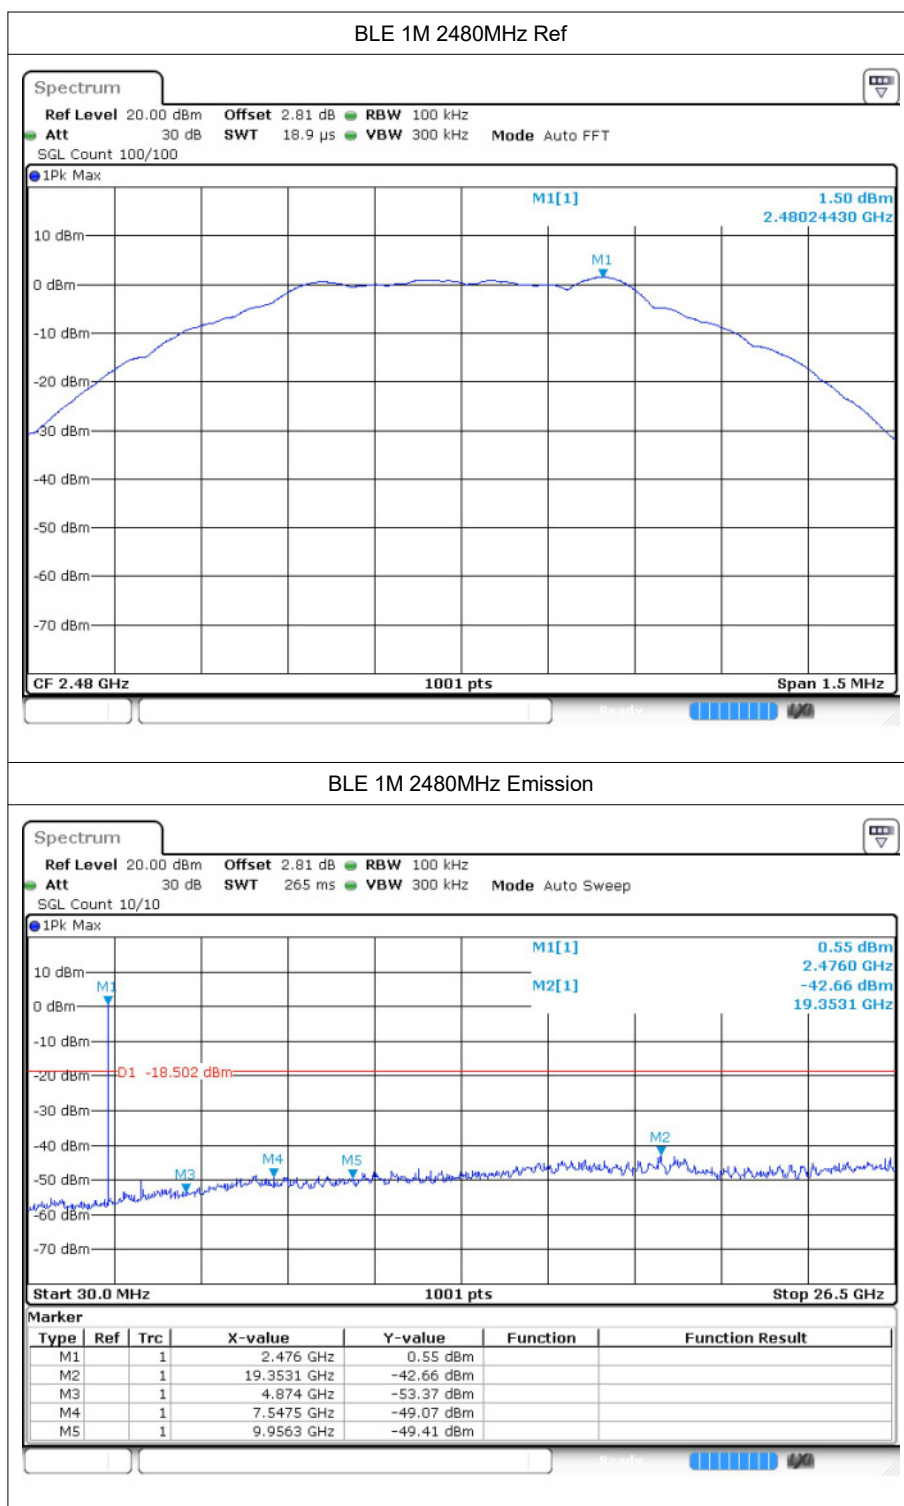

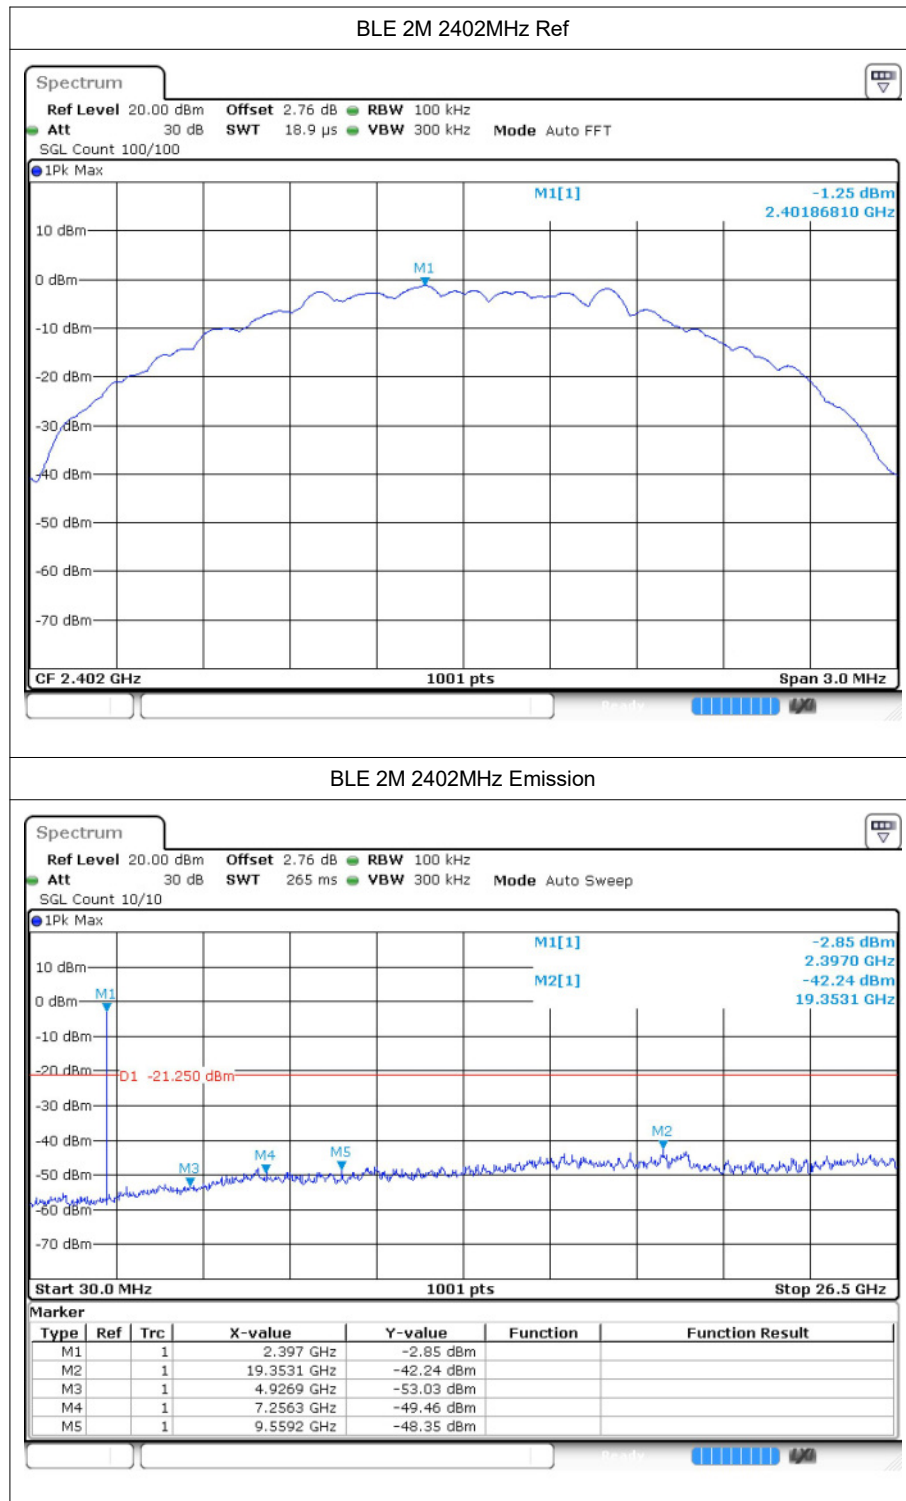

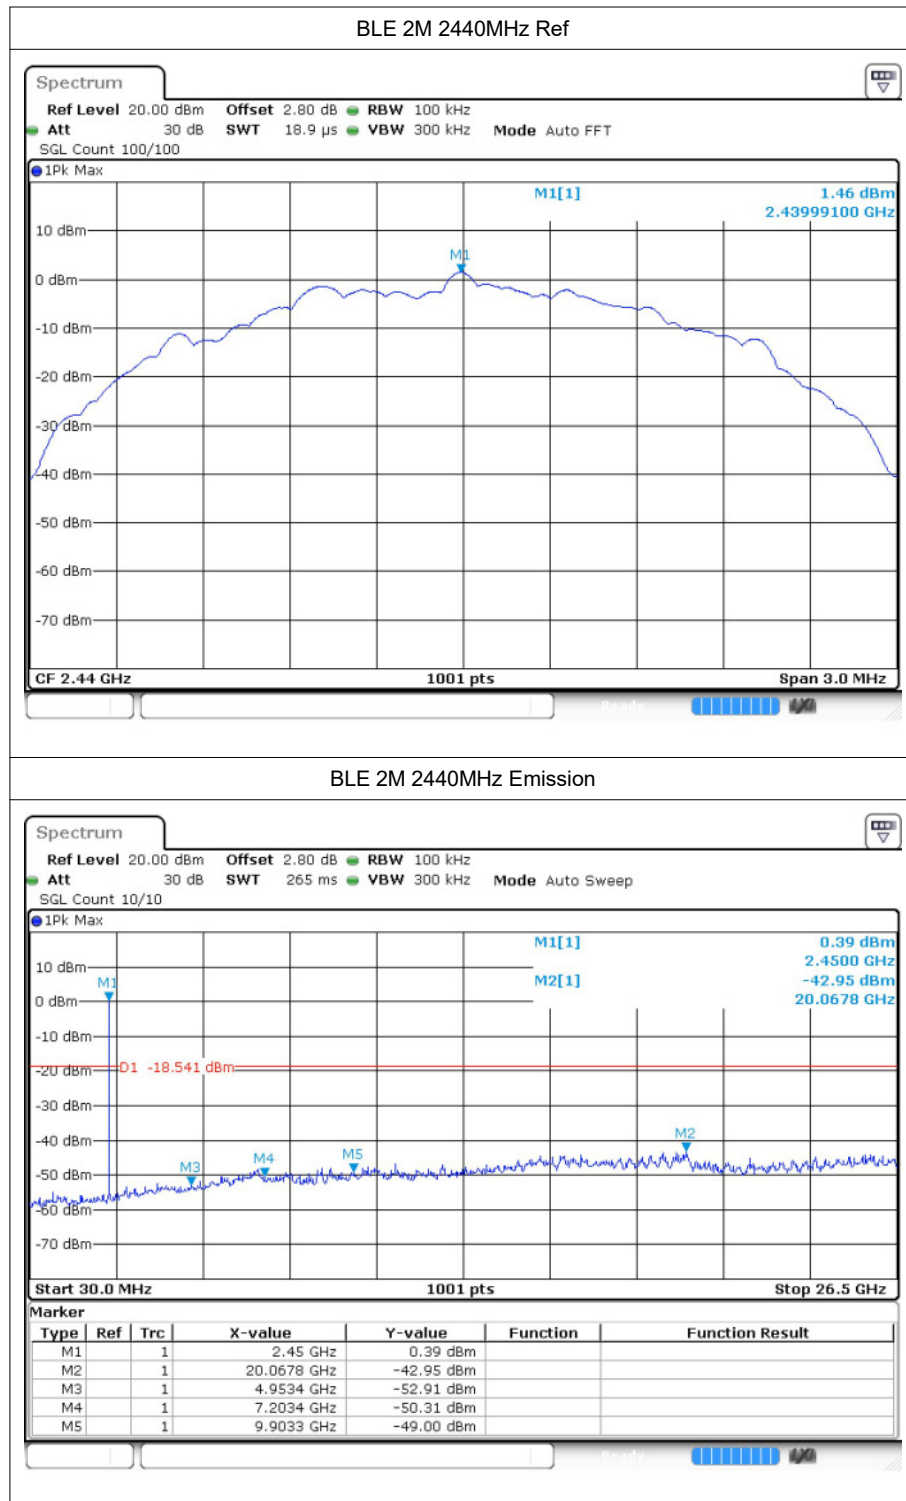

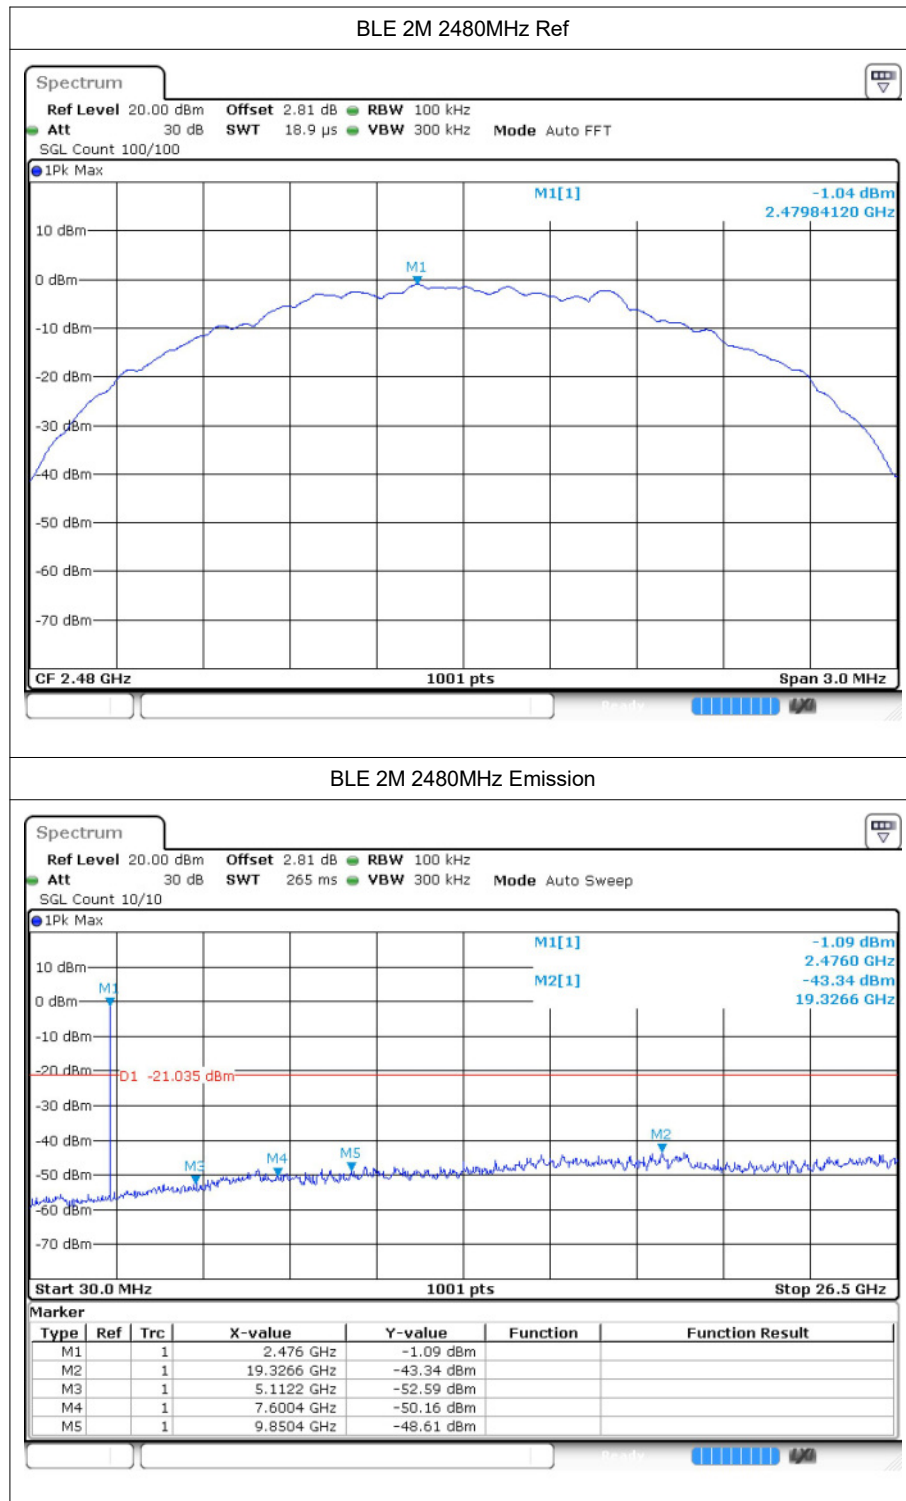





7 Restrict Band


7.1 Test Result


Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-49.4	2.656	-	48.486	Peak	74	Pass
BLE 1M	2402	2310	-55.69	2.656	0.1	42.296	Average	54	Pass
BLE 1M	2402	2344.56	-46.04	2.656	-	51.846	Peak	74	Pass
BLE 1M	2402	2342.16	-54.84	2.656	0.1	43.146	Average	54	Pass
BLE 1M	2402	2390	-49.64	2.656	-	48.246	Peak	74	Pass
BLE 1M	2402	2390	-56.2	2.656	0.1	41.786	Average	54	Pass
BLE 1M	2480	2483.5	-46.49	2.656	-	51.396	Peak	74	Pass
BLE 1M	2480	2483.5	-53.47	2.656	0.11	44.526	Average	54	Pass
BLE 1M	2480	2487.4	-46.41	2.656	-	51.476	Peak	74	Pass
BLE 1M	2480	2483.512	-53.56	2.656	0.11	44.436	Average	54	Pass
BLE 1M	2480	2500	-49.33	2.656	-	48.556	Peak	74	Pass
BLE 1M	2480	2500	-56.23	2.656	0.11	41.766	Average	54	Pass
BLE 2M	2402	2310	-49.52	2.656	-	48.366	Peak	74	Pass
BLE 2M	2402	2310	-55.57	2.656	0.21	42.526	Average	54	Pass
BLE 2M	2402	2339.472	-47.06	2.656	-	50.826	Peak	74	Pass
BLE 2M	2402	2340.048	-54.32	2.656	0.21	43.776	Average	54	Pass
BLE 2M	2402	2390	-49.95	2.656	-	47.936	Peak	74	Pass
BLE 2M	2402	2390	-57.05	2.656	0.21	41.046	Average	54	Pass
BLE 2M	2480	2483.5	-44.19	2.656	-	53.696	Peak	74	Pass
BLE 2M	2480	2483.5	-53.05	2.656	0.21	45.046	Average	54	Pass
BLE 2M	2480	2483.512	-44.24	2.656	-	53.646	Peak	74	Pass
BLE 2M	2480	2483.512	-53.16	2.656	0.21	44.936	Average	54	Pass
BLE 2M	2480	2500	-49.92	2.656	-	47.966	Peak	74	Pass
BLE 2M	2480	2500	-57.04	2.656	0.21	41.056	Average	54	Pass

7.2 Test Graphs

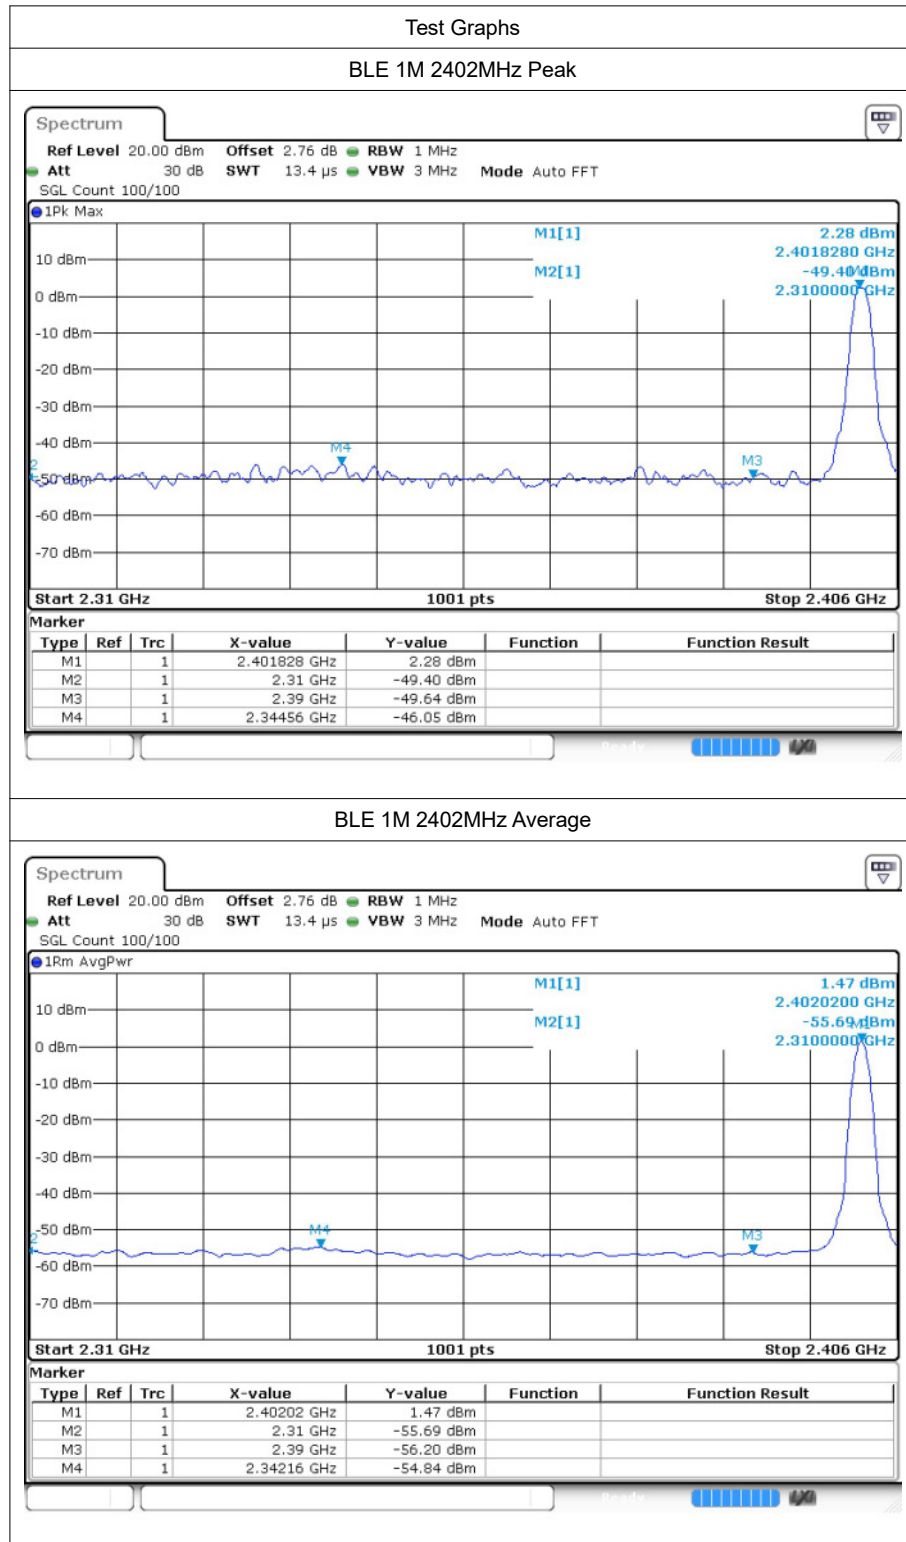

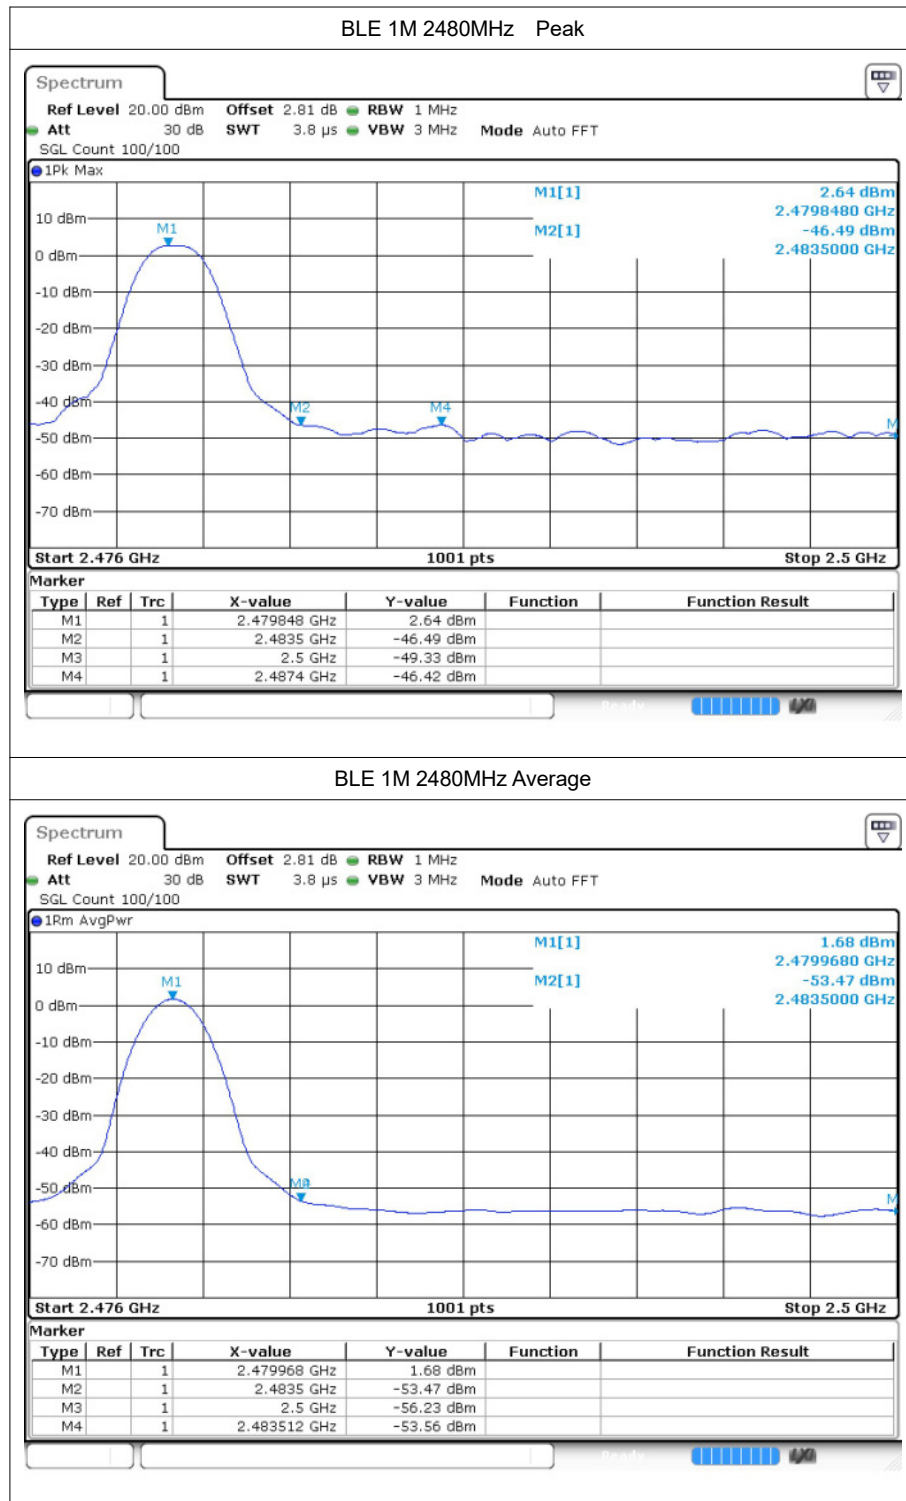

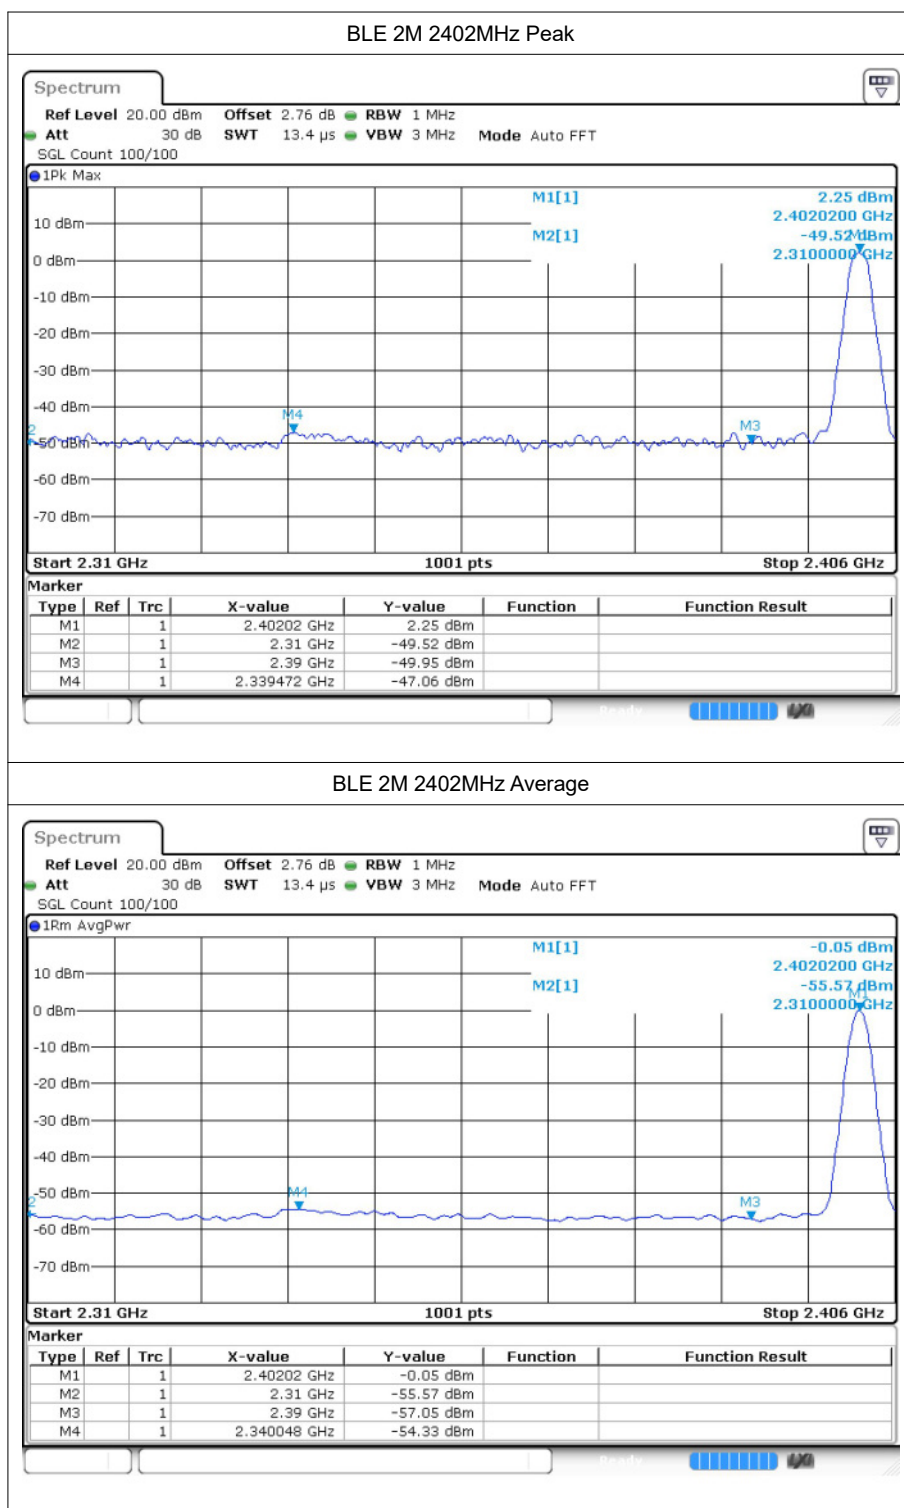

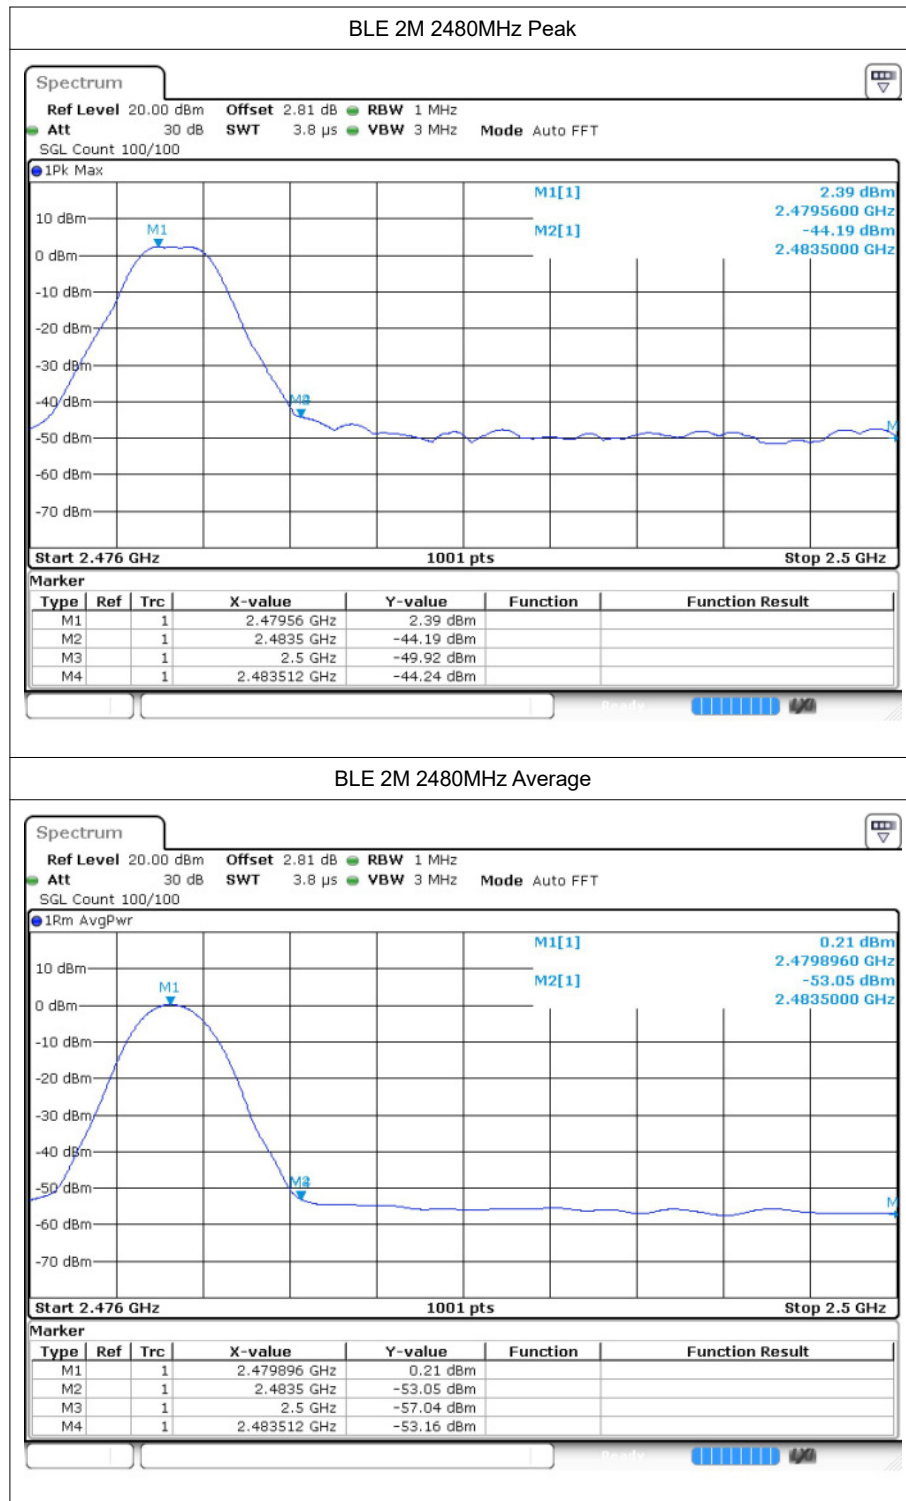

---The End---