ANTENNA PASSIVE TEST REPORT

(On Head)

Applicant:	**Grandsun**
Product Name:	**Trip II**
Model No.(EUT):	**Trip II (EV)**
Date of Receipt:	**2022-09-22**
Date of Test:	**2022-09-22**

Tested by:	**Max.Chen**
Made by:	**Max.Chen**
Checked by:	**Noki.Ho**

REVISION HISTORY

Revision Record		
Version	**Date**	**Reason for change**
V0.1	2017-05-20	First edition

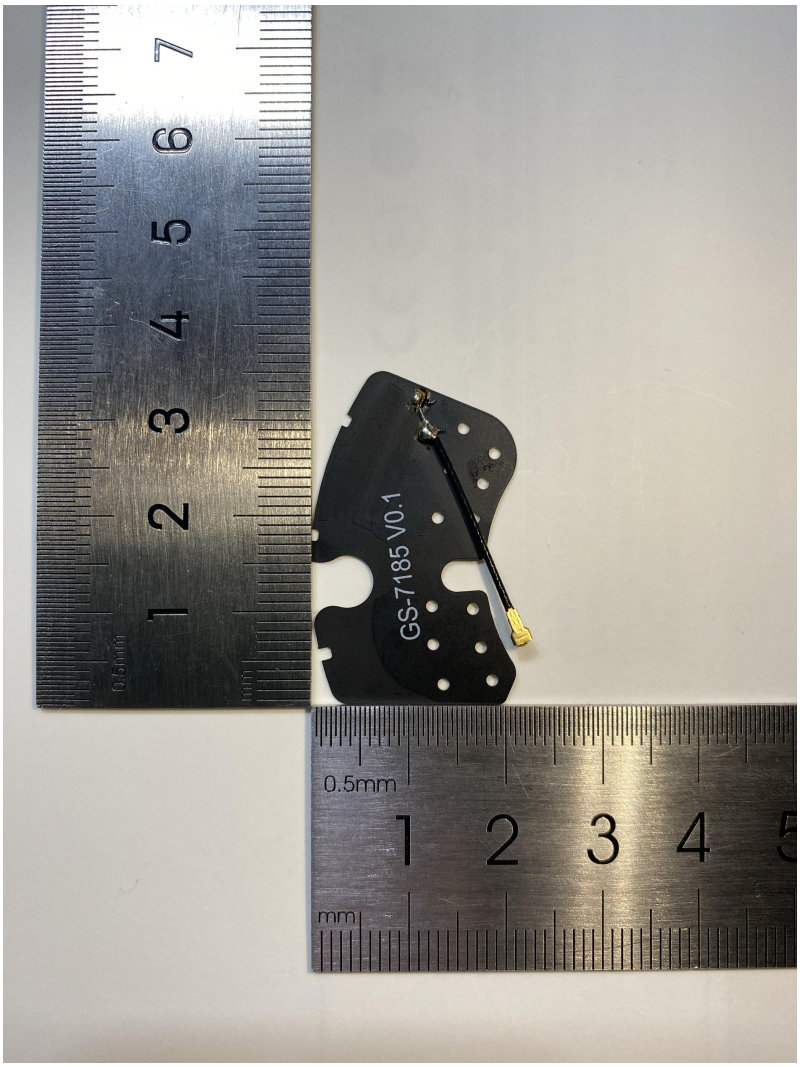

CONTENTS

1. GENERAL INFORMATION……4

1.1Test Location……4

1.2Test item and results……4

1.3Laboratory Environment……4

1.4 Test Equipments List……4

1.5 Measurement Uncertainty……4

2. OTA MEASUREMENTS SYSTEM CONFIGURATION……5

3. TEST RESULTS……6

3.1 Efficiency & Gain……6

3.2 2-D antenna pattern……6

3.3 3-D antenna pattern……7

3.4 Passive pattern……8

4. APPENDIX A THE EUT AND TEST CONFIGURATION……10

1. GENERAL INFORMATION

1.1 Test Location

Company: Shenzhen Grandsun Electronics Co.,Ltd.
Address: Gaoqiao Industry Zone,Pingdi Town,Longgang District,Shenzhen,China
Post code: 518117
Telephone: +86-755-89234568

1.2 Test item and results

Test detailed items/section as below:

NO	Items
1	Gain
2	Efficiency
3	2-D/3-D pattern

1.3 Laboratory Environment

Temperature	Min.=18℃ Max.=24℃	
Relative humidity	Min.=30% Max.=70℃	
Shield effect	0.5-10GHZ	＞100dB
Ground resistance	＜0.4Ω	

1.4 Test Equipments List

Equipment Name	Model NO.	Manufacture	Calibration	Valid Period
Network Analyzer	E5071C	Keysight	2022-04-20	One year
Chamber	AMS-8923-195	ETS-LINDGERN	2022-04-20	One year

1.5 Measurement Uncertainty

Item	2.4GHZ-2.5GHZ(dB)
Gain	0.3
Efficiency	0.3

2. OTA MEASUREMENTS SYSTEM CONFIGURATION

The system is designed for fully-compliant radiated wireless antenna measurements over the frequency range from 700 MHz to 6 GHz with a 1.95-meter path length. The system includes a multi-antenna array with twenty-three (23) dual-polarized measurement antennas spaced every 15°, The chamber size is 5m*5m*5m

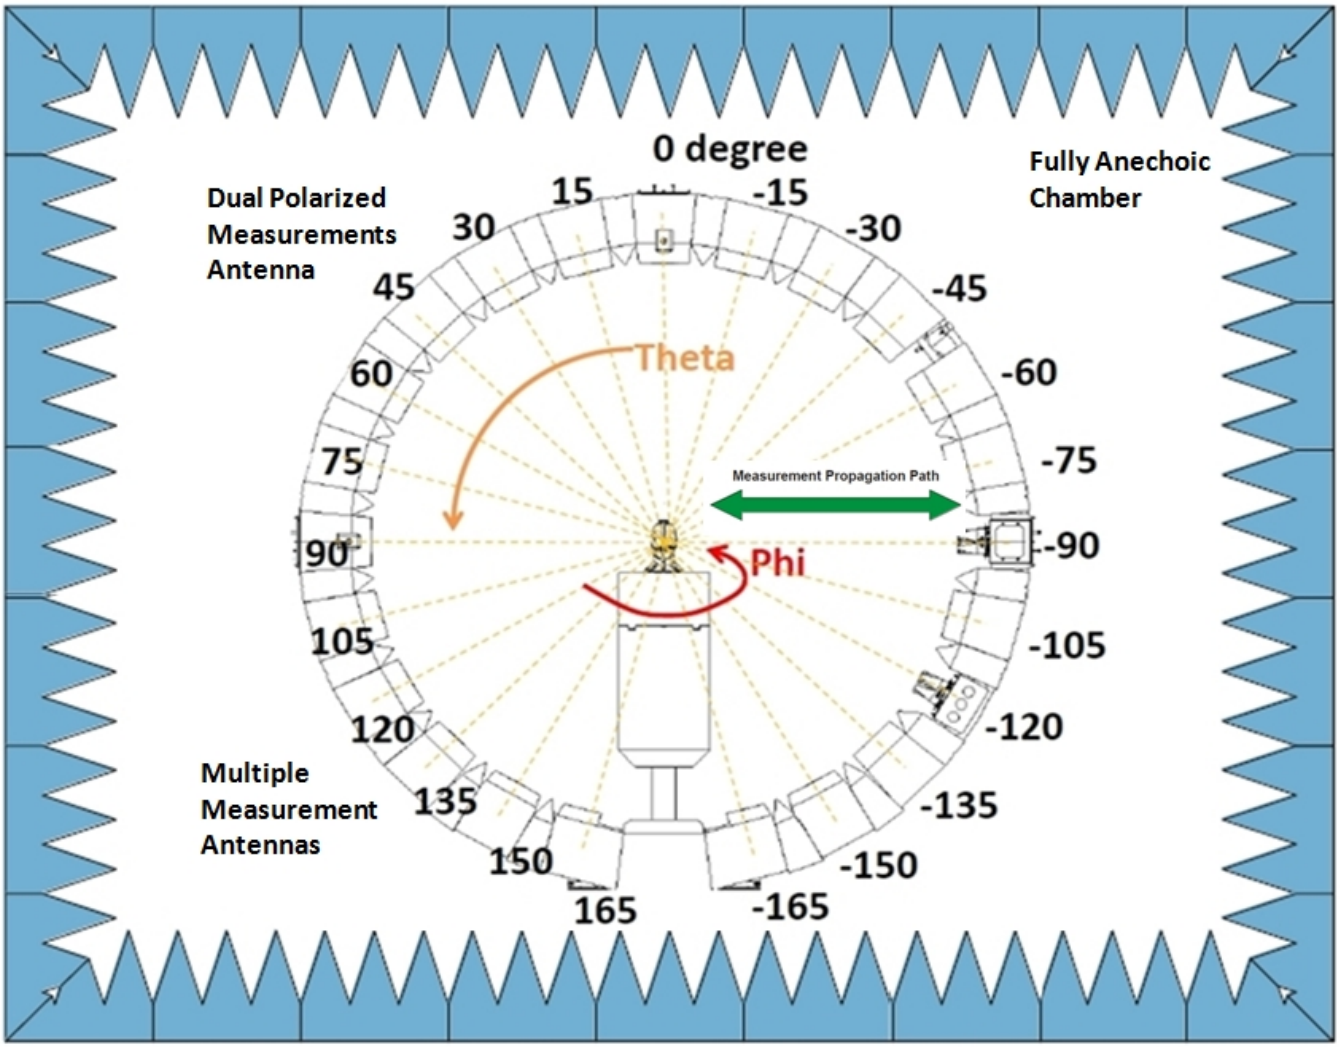

OTA measurement System Configuration

Note：Phi(The turntable) is from 0~180°,Theta(the ring, multiple antennas) is from -165°~165°, Rotate the AUT and multi-antenna array record the data ,the step of rotation is 15 degree.

3. TEST RESULTS

3.1 Efficiency & Gain

Frequency（Mhz）	Efficiency（dB）	Efficiency（%）	Gain（dBi）
2400	-2.86	51.7	2.96
2410	-2.82	52.2	2.90
2420	-2.82	52.1	2.91
2430	-2.93	50.8	2.84
2440	-2.83	52.0	2.86
2450	-2.72	53.3	2.86
2460	-2.76	52.8	2.77
2470	-2.70	53.6	2.83
2480	-2.72	53.3	2.75
2490	-2.73	53.3	2.74
2500	-2.75	53.0	2.69

3.2 2-D antenna pattern（Phi=90°）

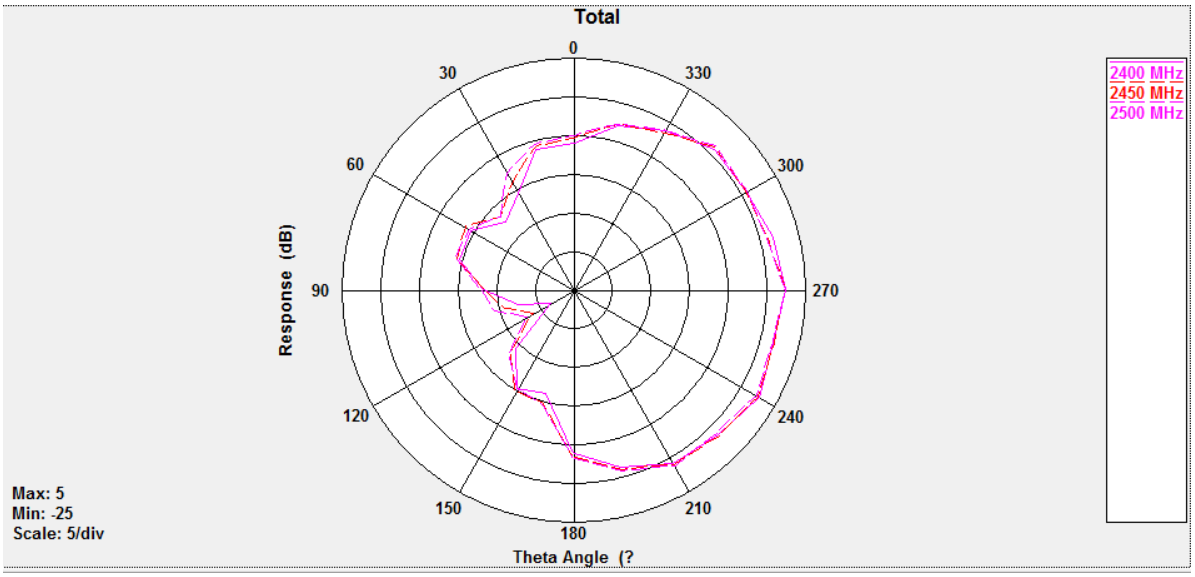

3.3 3-D antenna pattern

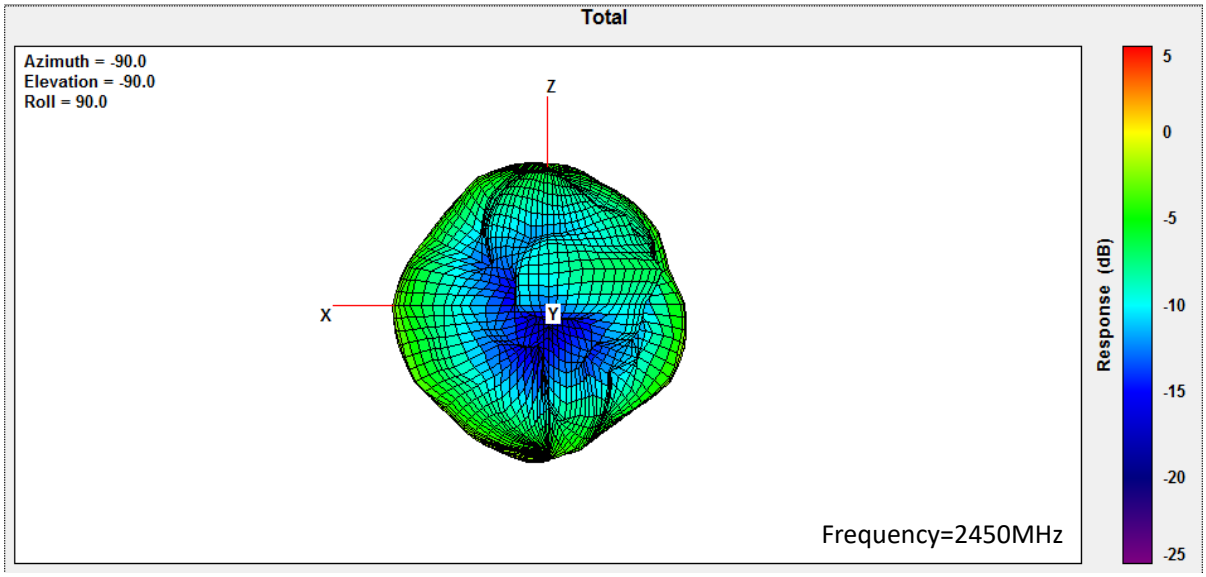

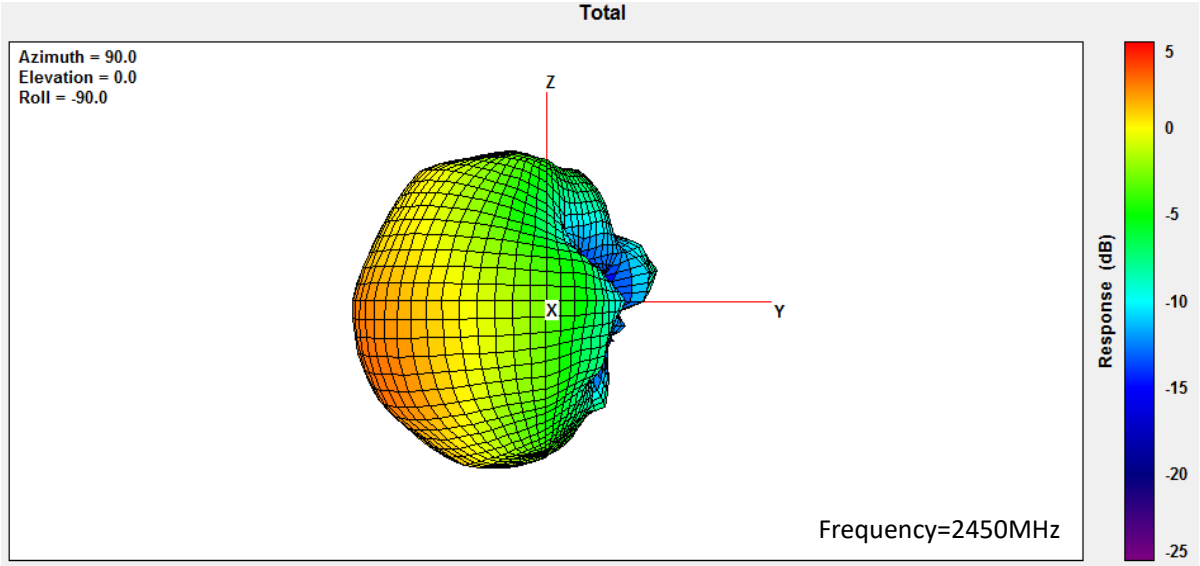

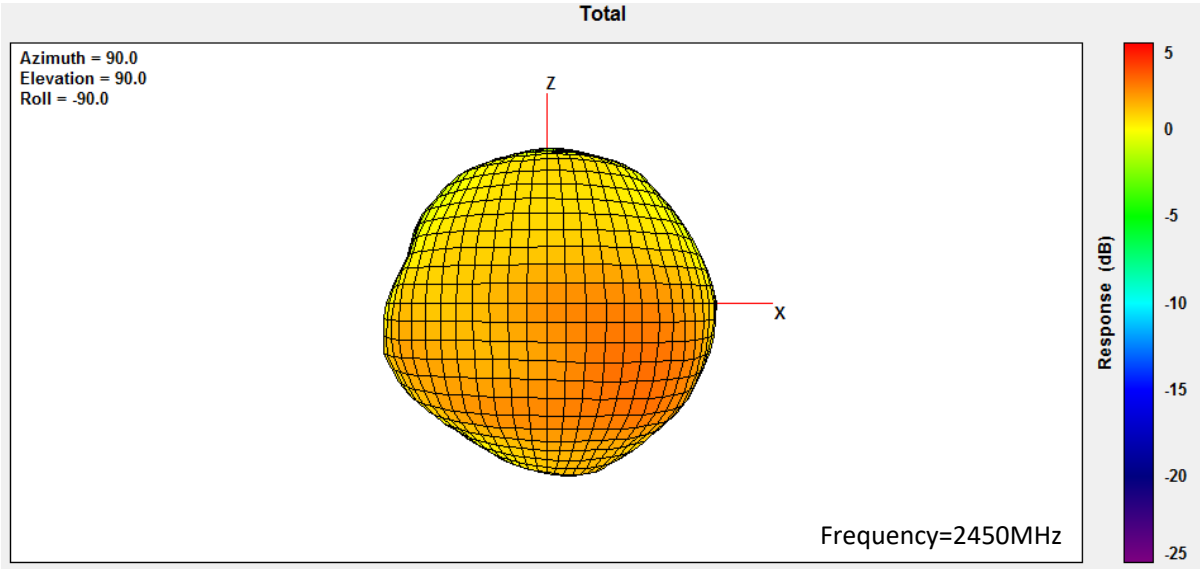

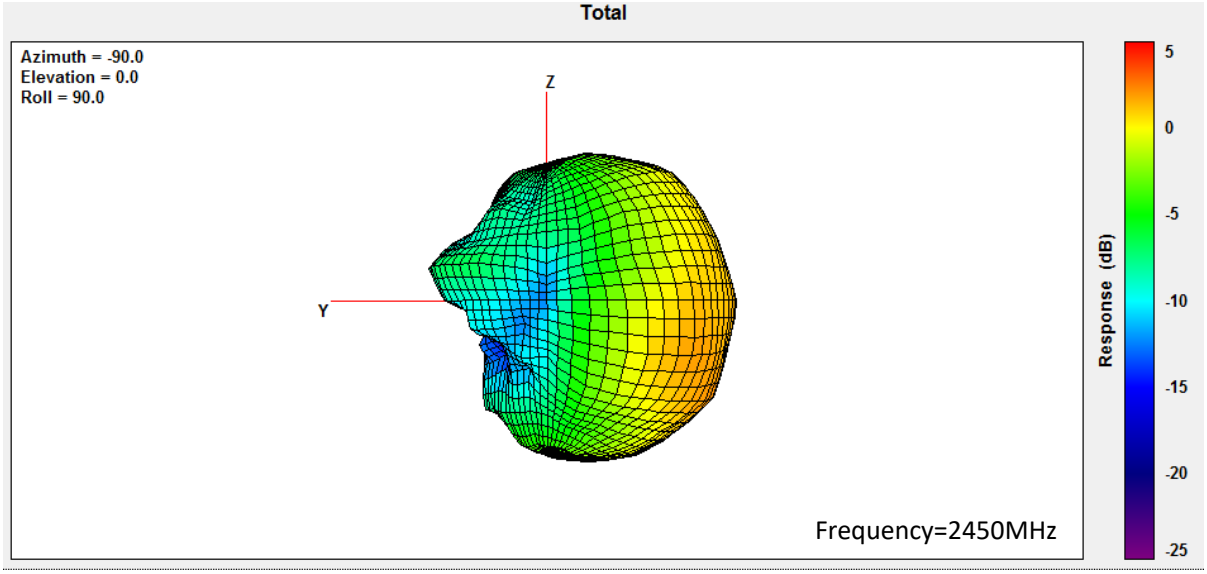

3.4 Passive pattern

3.4.1 VSWR

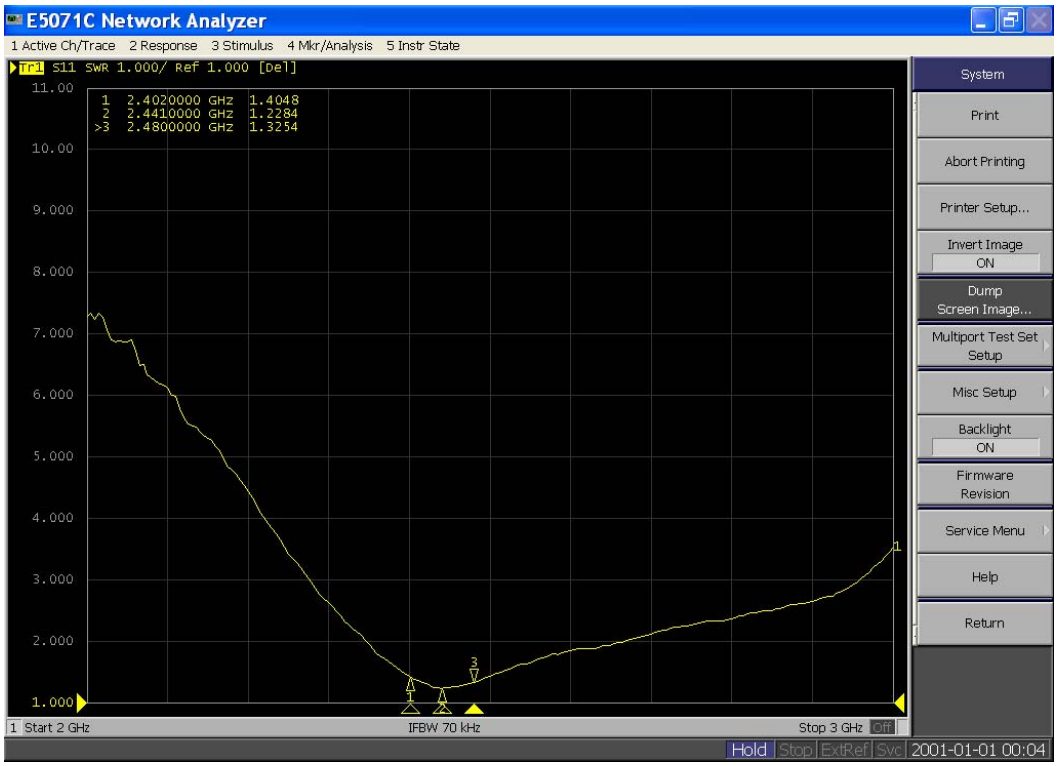

3.4.2 Return loss

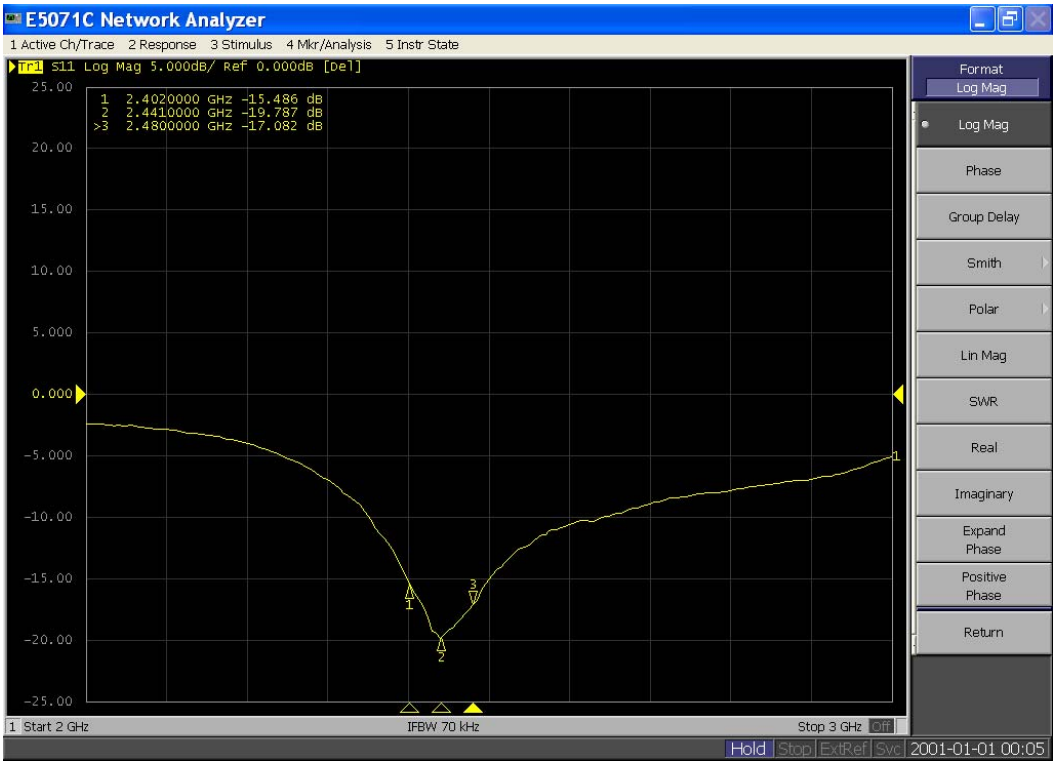

3.4.3 Impedance

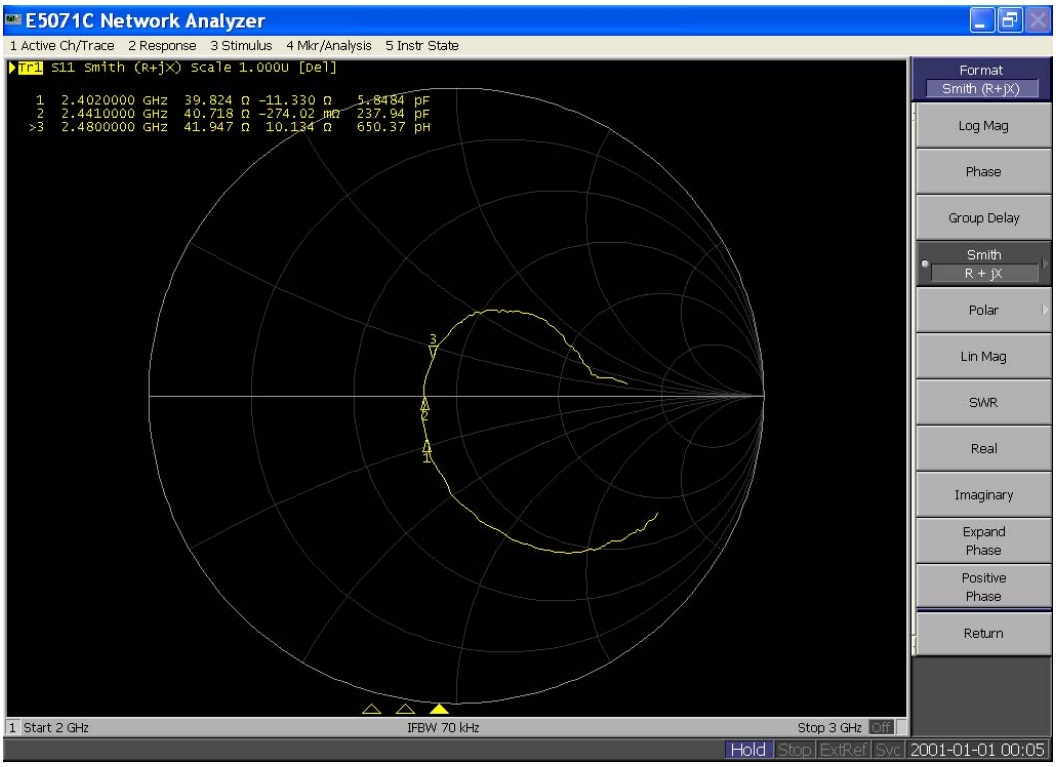
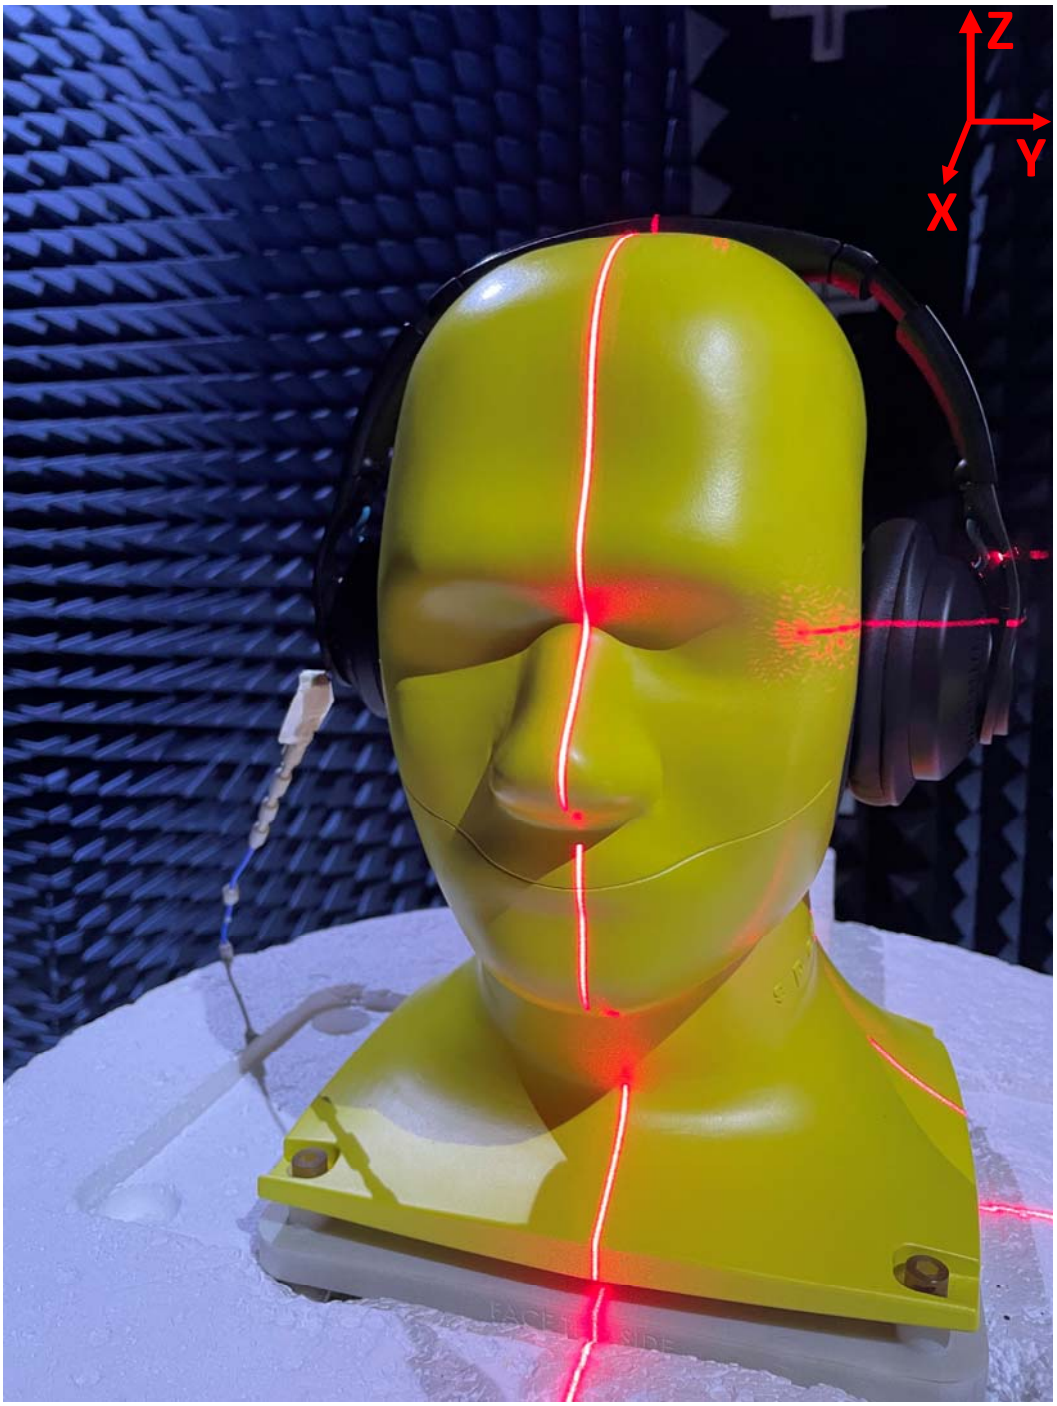
4.APPENDIX A THE EUT AND TEST CONFIGURATION