# Appendix B

# RF Test Data for BT LE (Conducted Measurement)

**Product Name: Wearable Smart Air Conditioner**

**Test Model: Metaura**

**Environmental Conditions**

| | |
|---|---|
| Temperature: | 23.5 ° C |
| Relative Humidity: | 52.2% |
| ATM Pressure: | 100.0 kPa |
| Test Engineer: | Kay Hu |
| Supervised by: | Li Huan |

# B.1 -6dB Bandwidth

| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit (MHz) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | 0.647 | 0.5 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | 0.658 | 0.5 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 0.648 | 0.5 | Pass |

Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

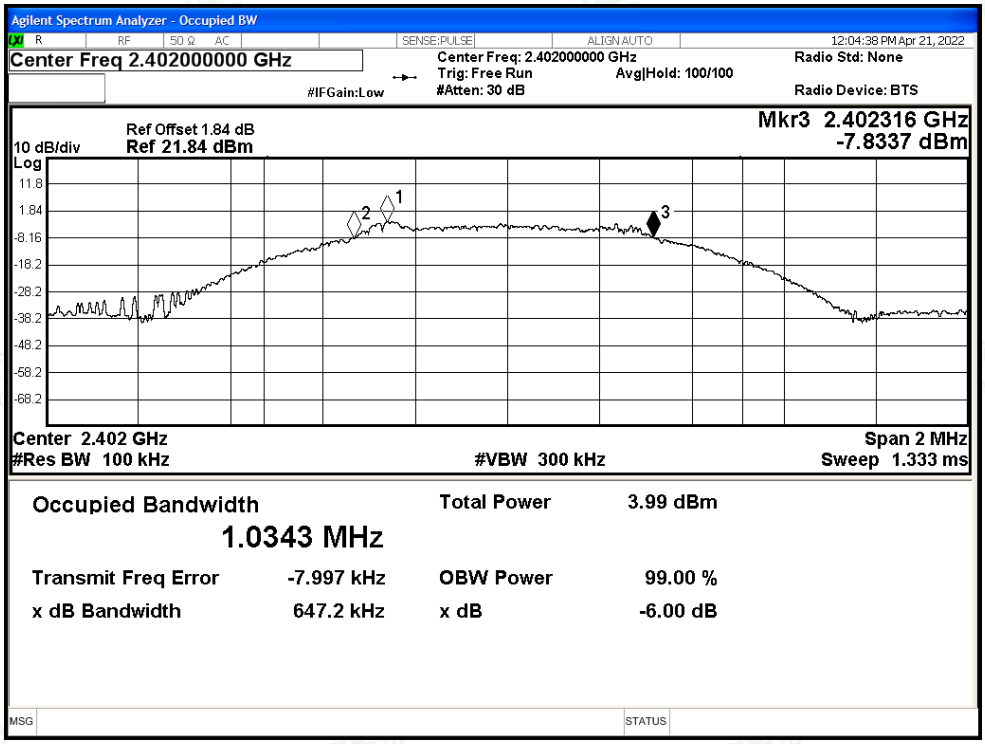


-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

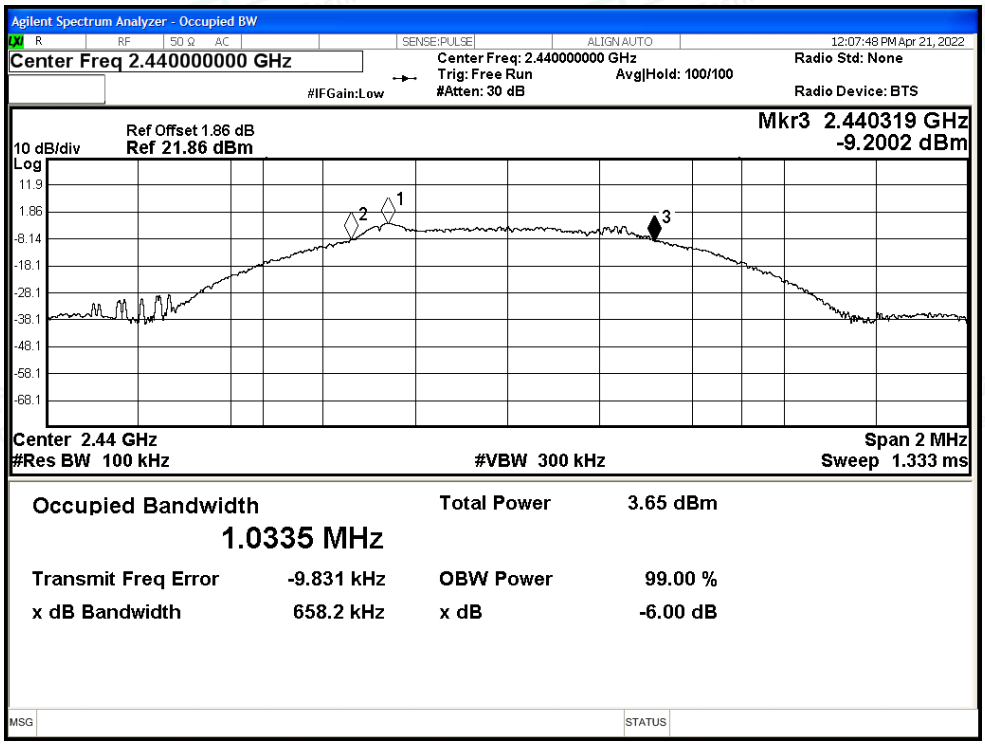

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

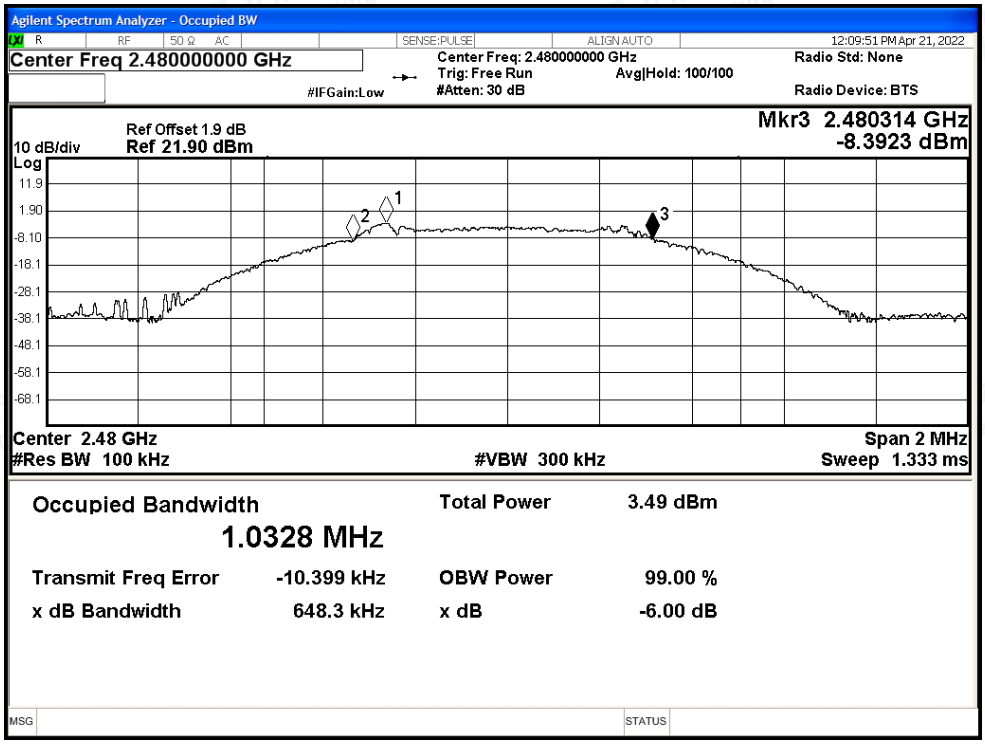

# B.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Limit (dBm) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -1.83 | 30 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -2.26 | 30 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -2.35 | 30 | Pass |

Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

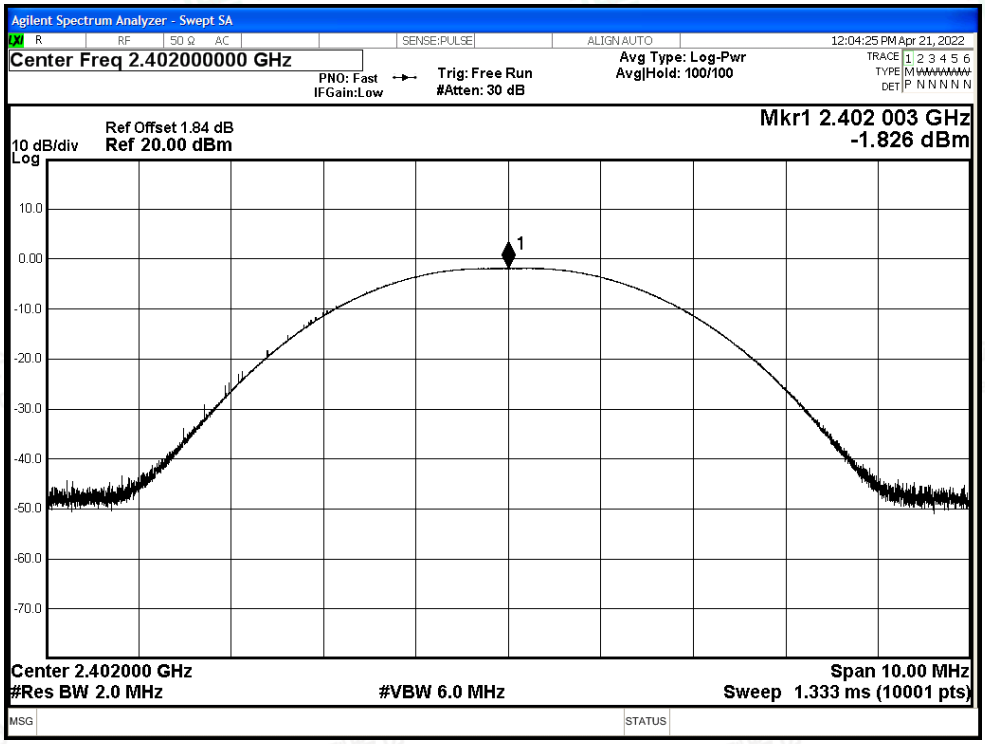


Power NVNT BLE 1M 2440MHz Ant1

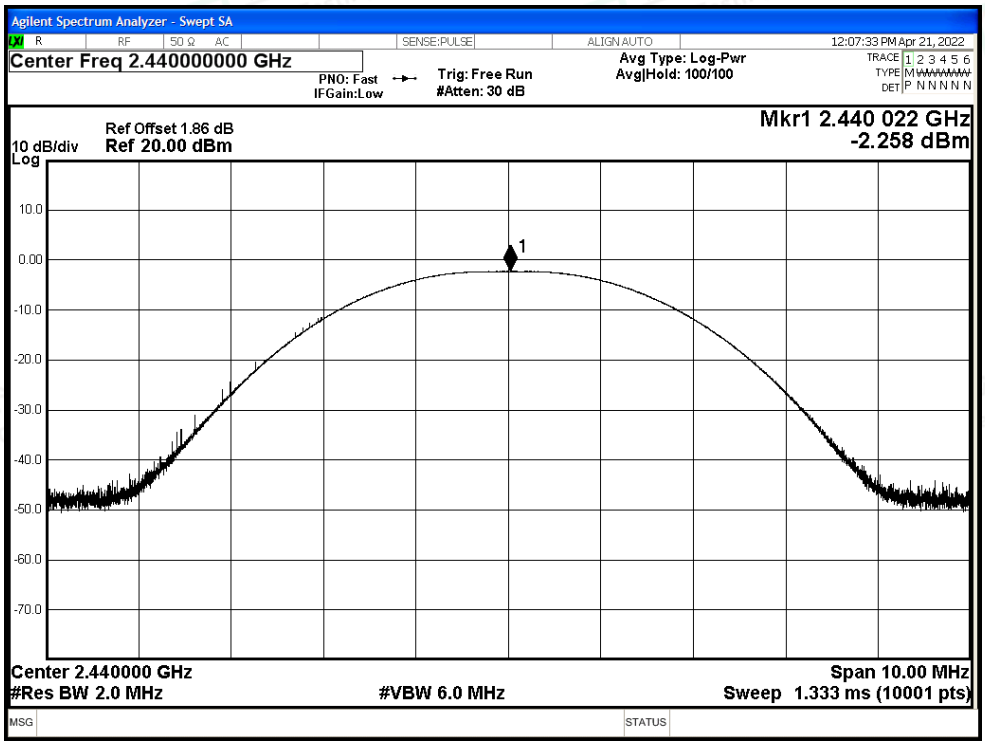

Power NVNT BLE 1M 2480MHz Ant1

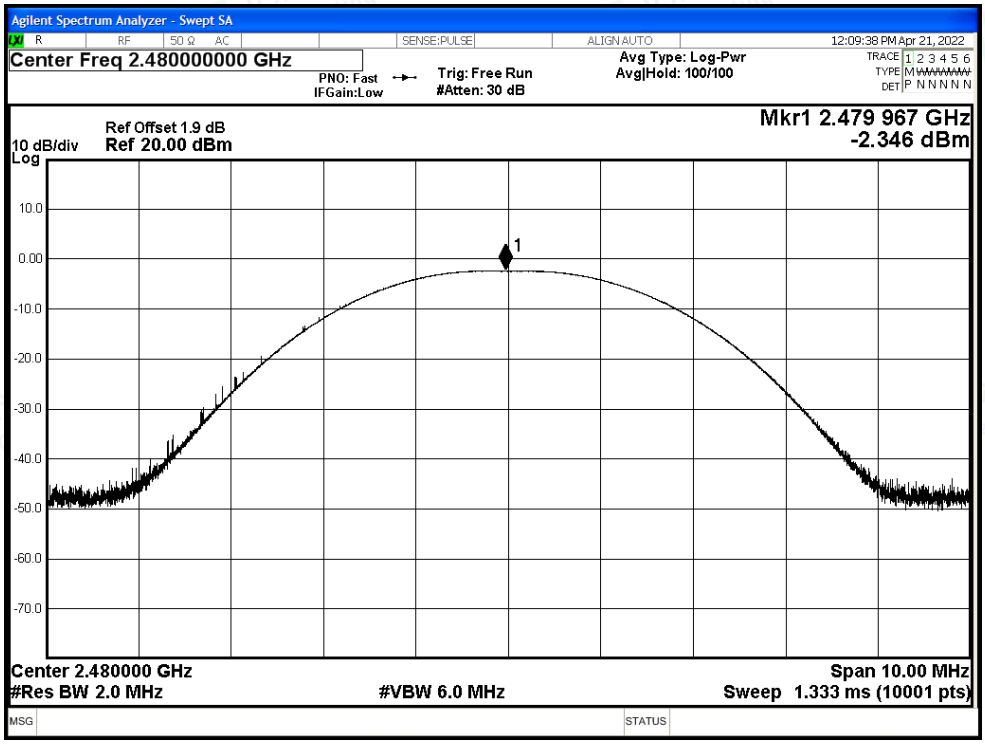

# B.3 Maximum Power Spectral Density Level

| Condition | Mode | Frequency (MHz) | Antenna | Conducted PSD (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -18.05 | 8 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -18.52 | 8 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -18.67 | 8 | Pass |

Test Graphs

PSD NVNT BLE 1M 2402MHz Ant1

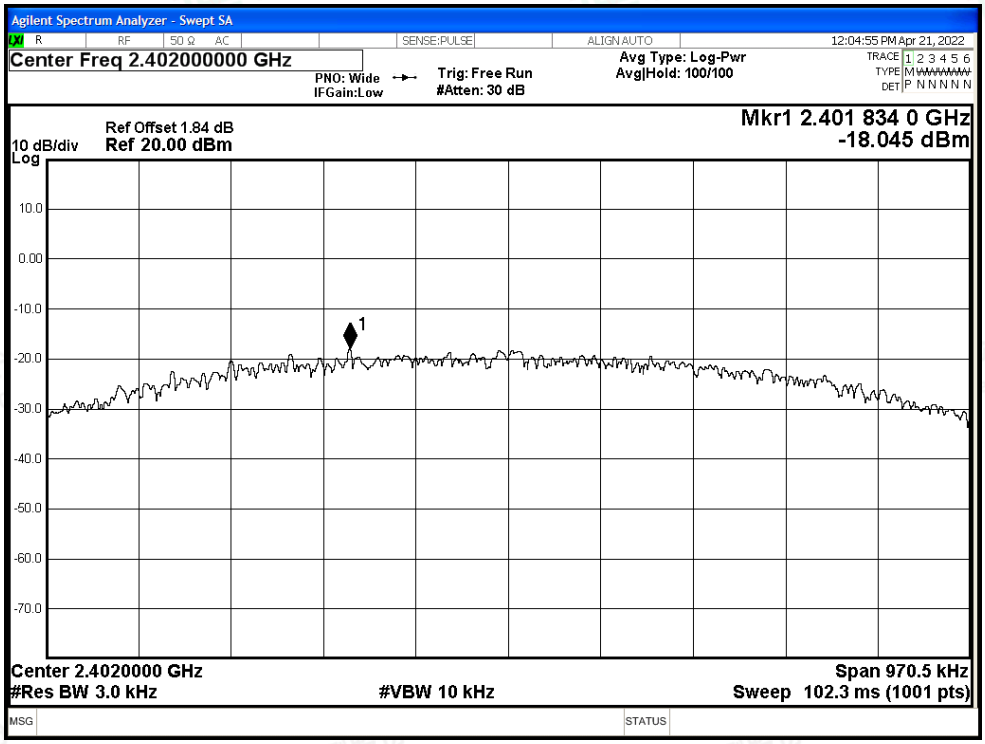


PSD NVNT BLE 1M 2440MHz Ant1

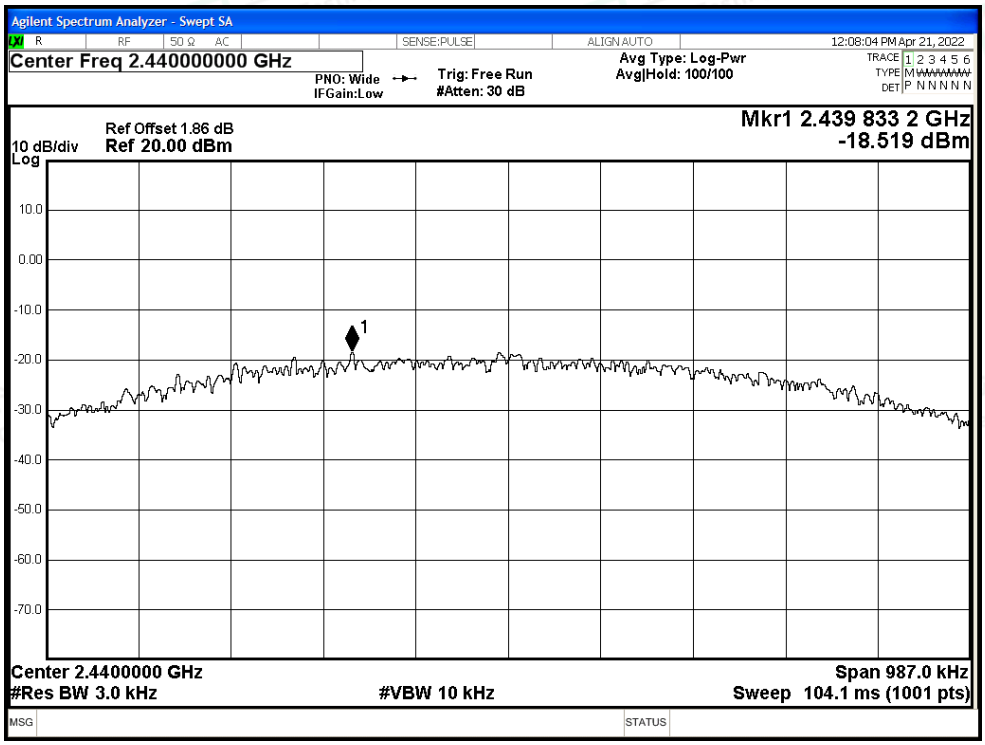

PSD NVNT BLE 1M 2480MHz Ant1

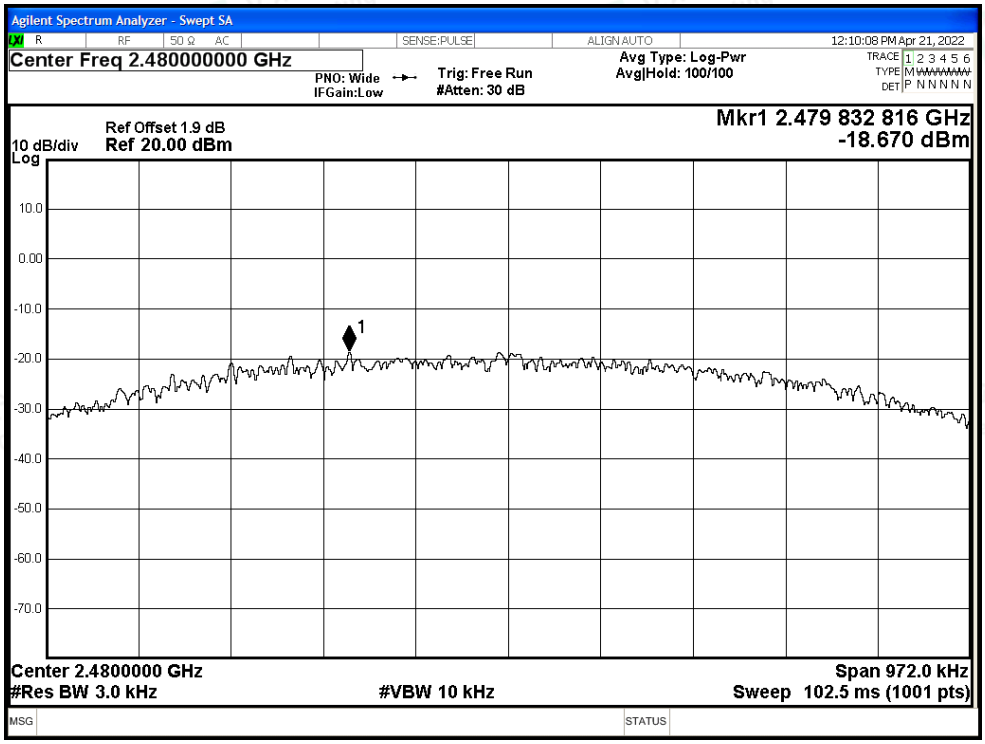

# B.4 Band Edge

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -55.09 | -20 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -53.63 | -20 | Pass |

Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

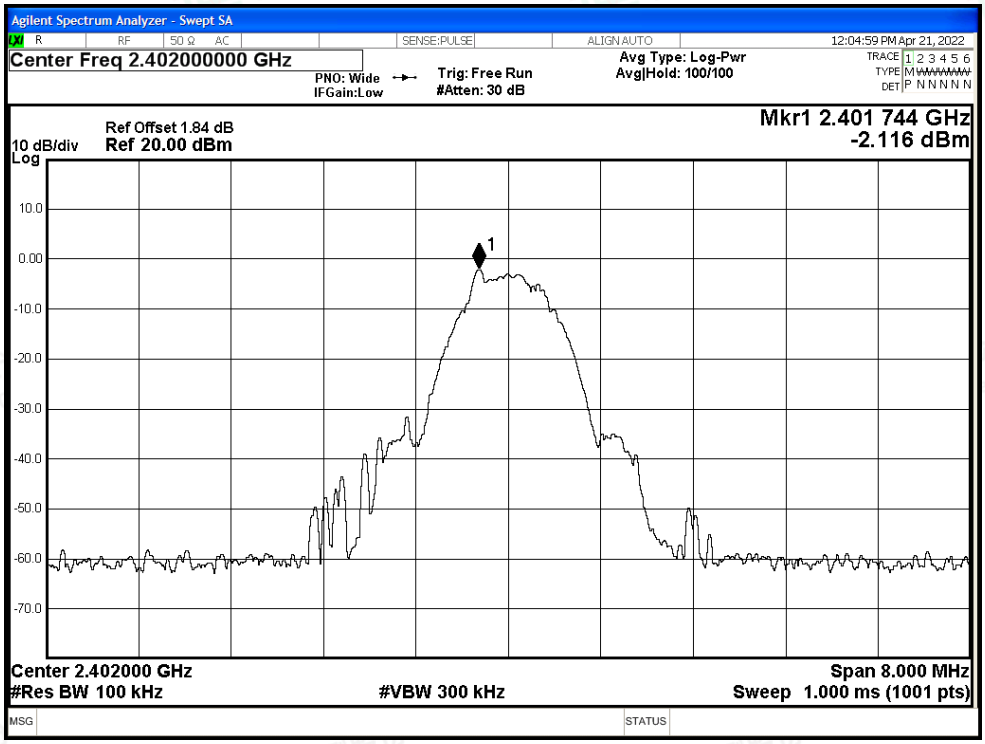


Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

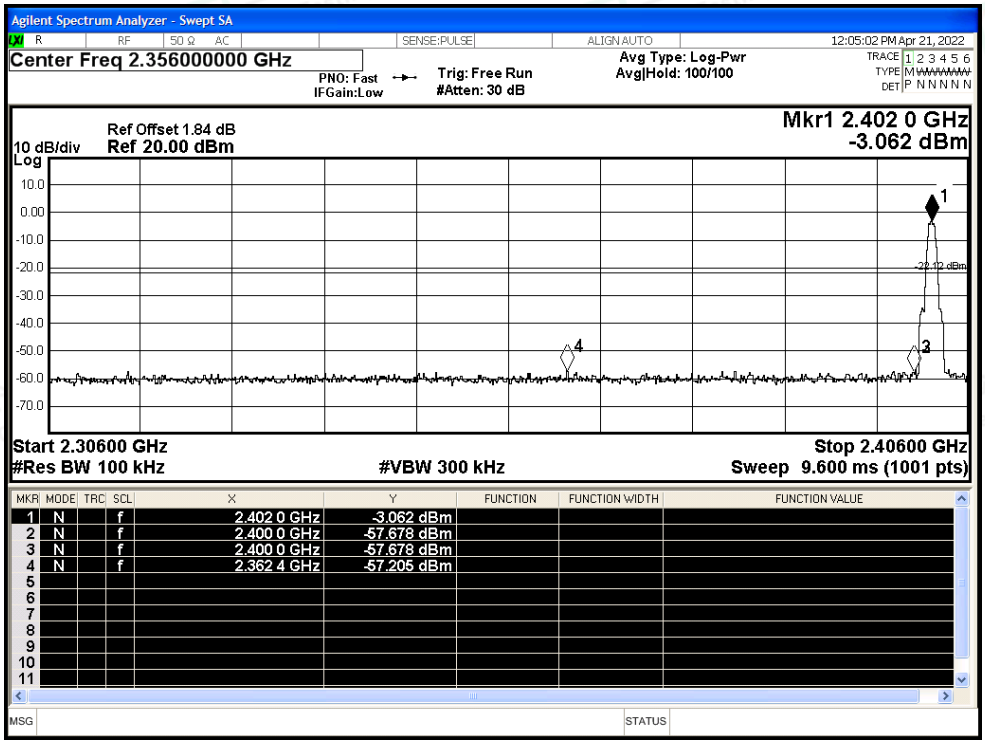

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

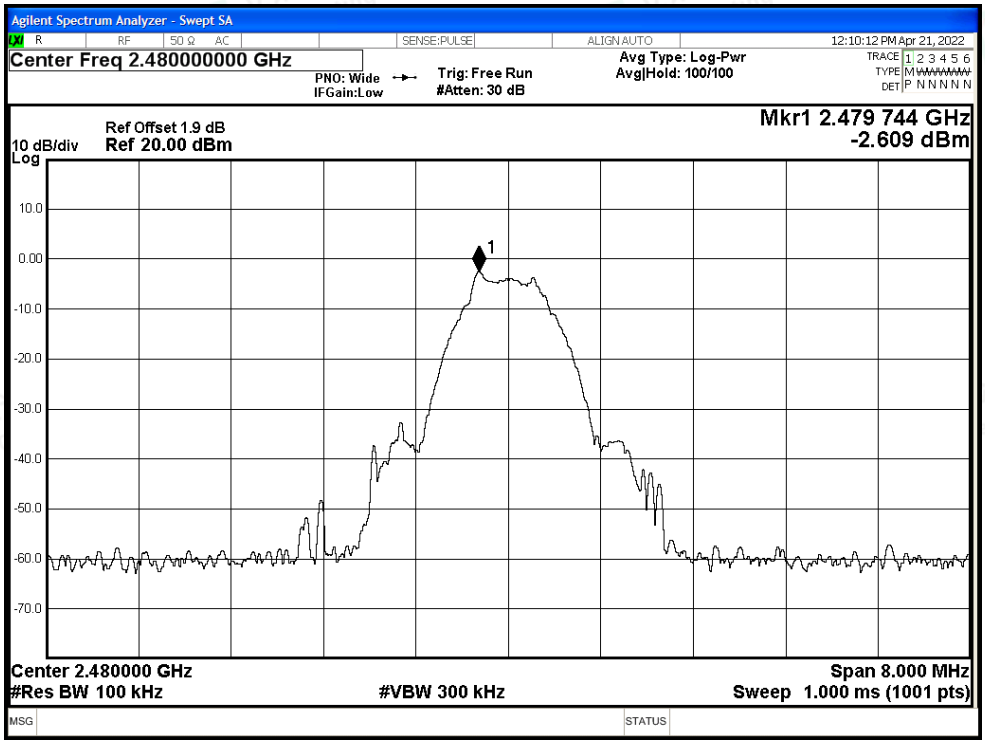


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

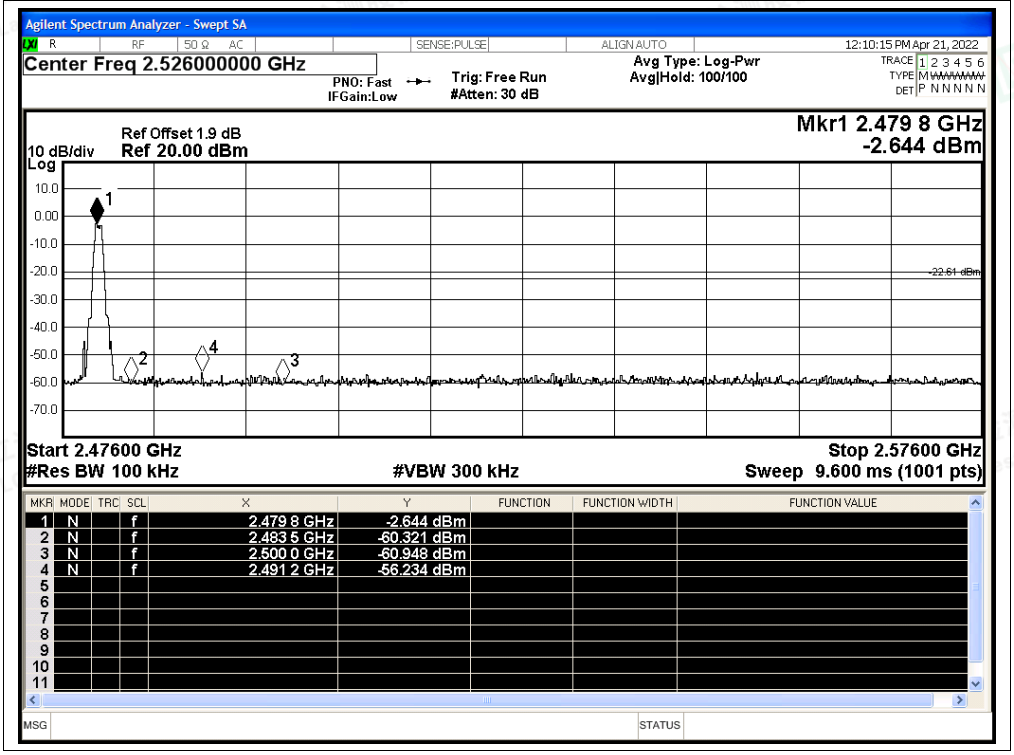

# B.5 Conducted RF Spurious Emission

| Condition | Mode | Frequency (MHz) | Antenna | Max Value (dBc) | Limit (dBc) | Verdict |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | -53.48 | -20 | Pass |
| NVNT | BLE 1M | 2440 | Ant1 | -53.4 | -20 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | -52.34 | -20 | Pass |

Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

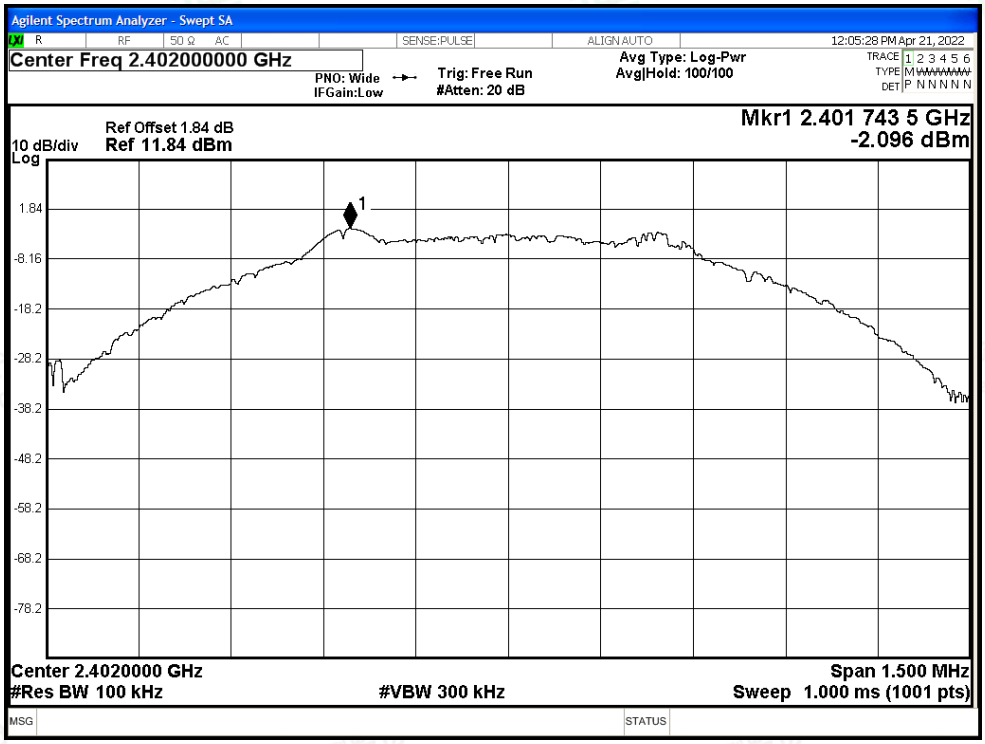


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

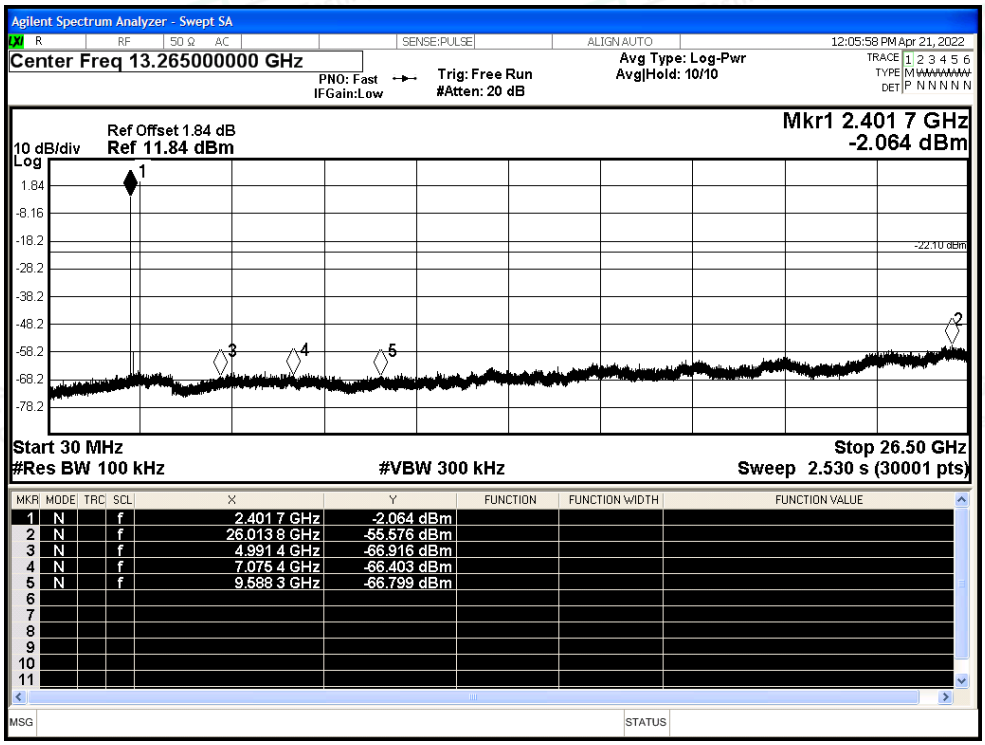

Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Ref

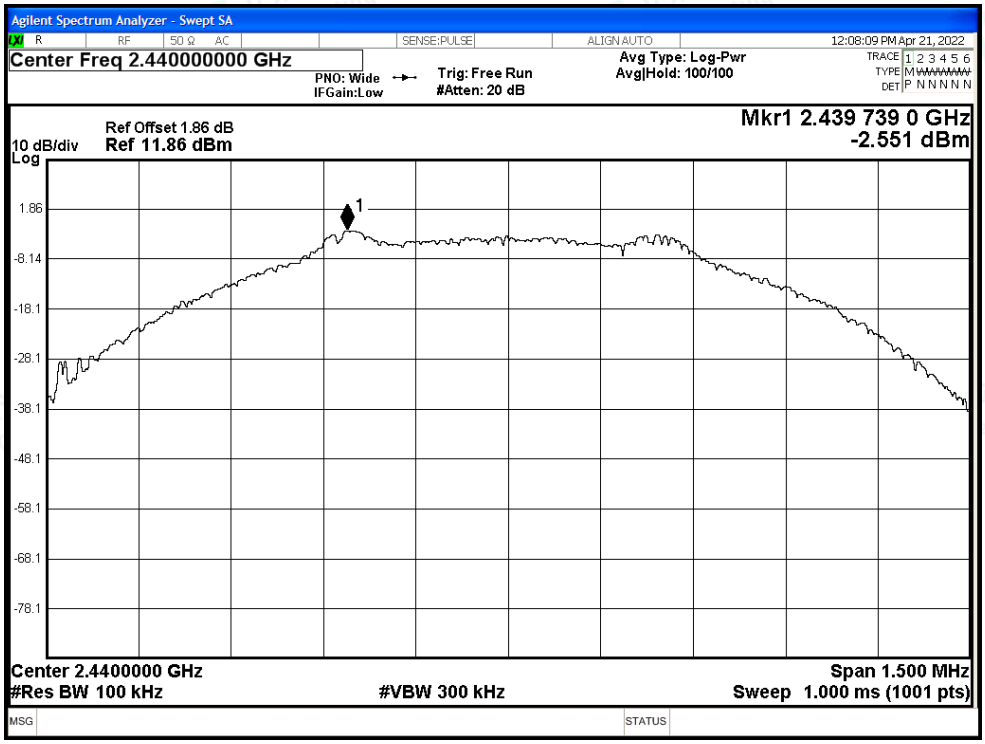


Tx. Spurious NVNT BLE 1M 2440MHz Ant1 Emission

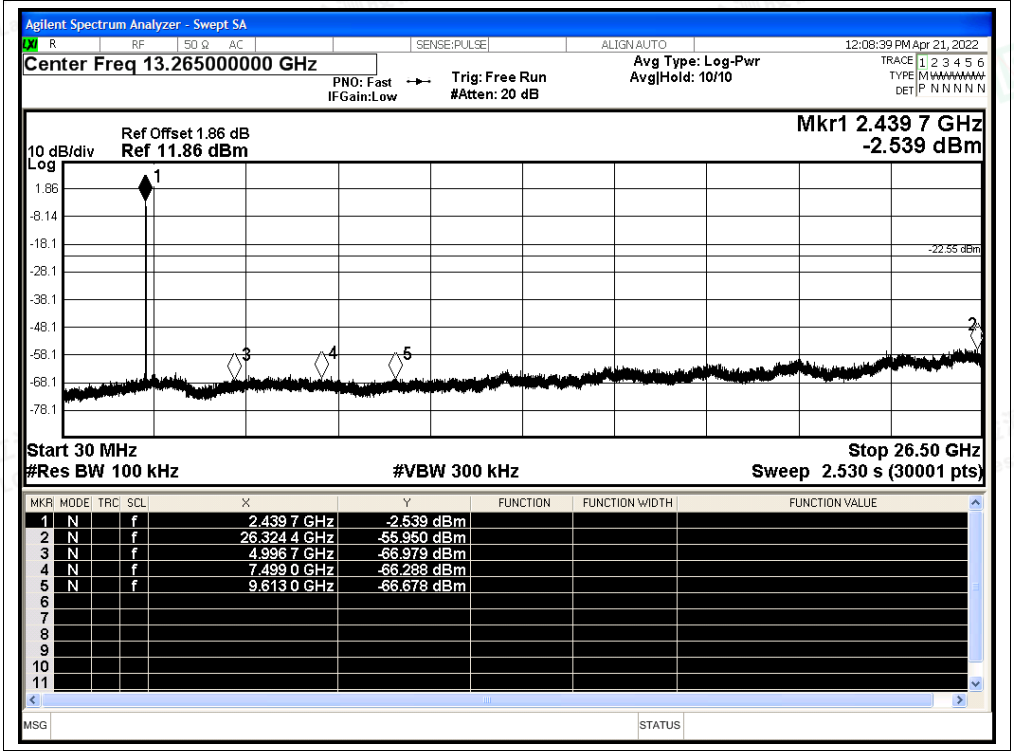

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

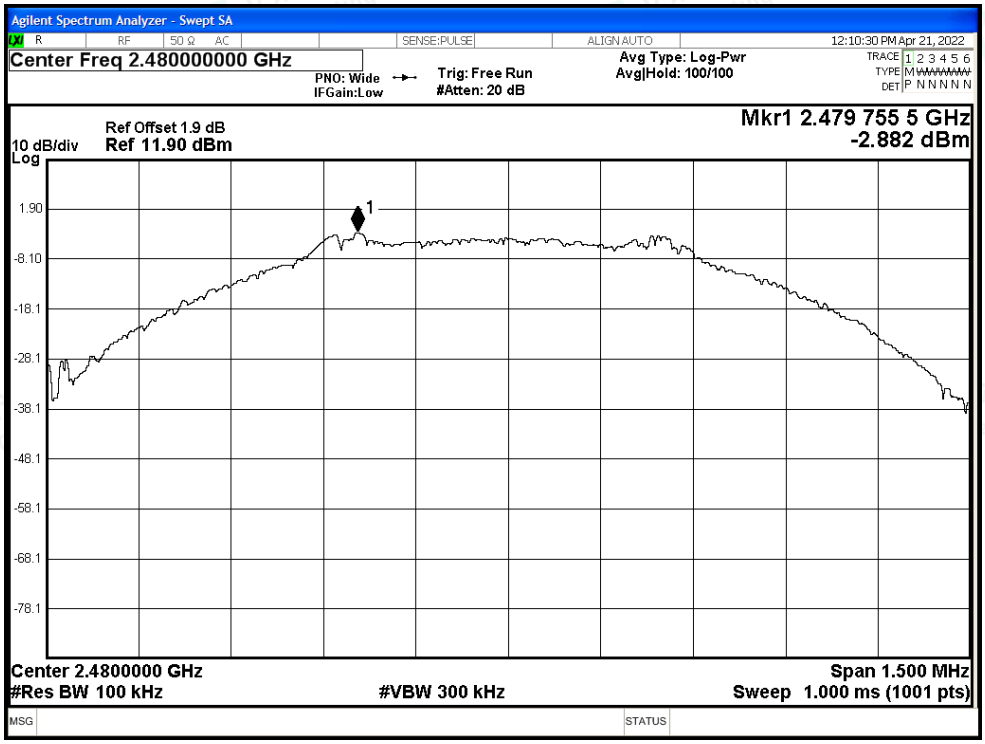


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

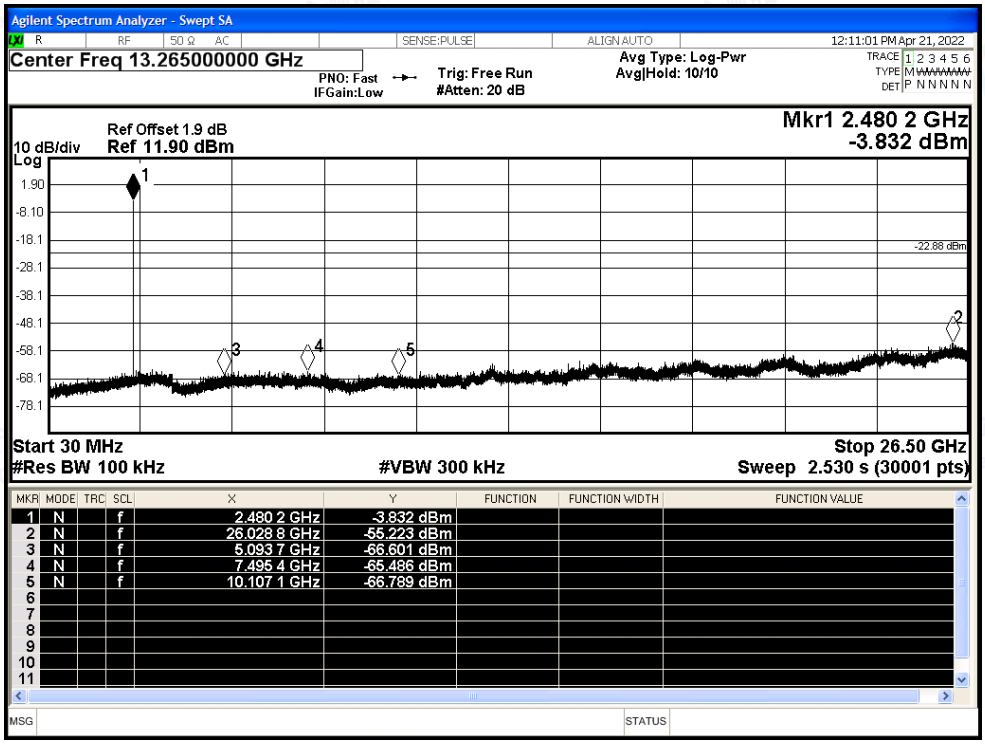

# B.6 Duty Cycle

| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | 87.18 | 0.6 | 0.61 |
| NVNT | BLE 1M | 2440 | Ant1 | 87.2 | 0.59 | 0.61 |
| NVNT | BLE 1M | 2480 | Ant1 | 87.2 | 0.59 | 0.61 |

Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

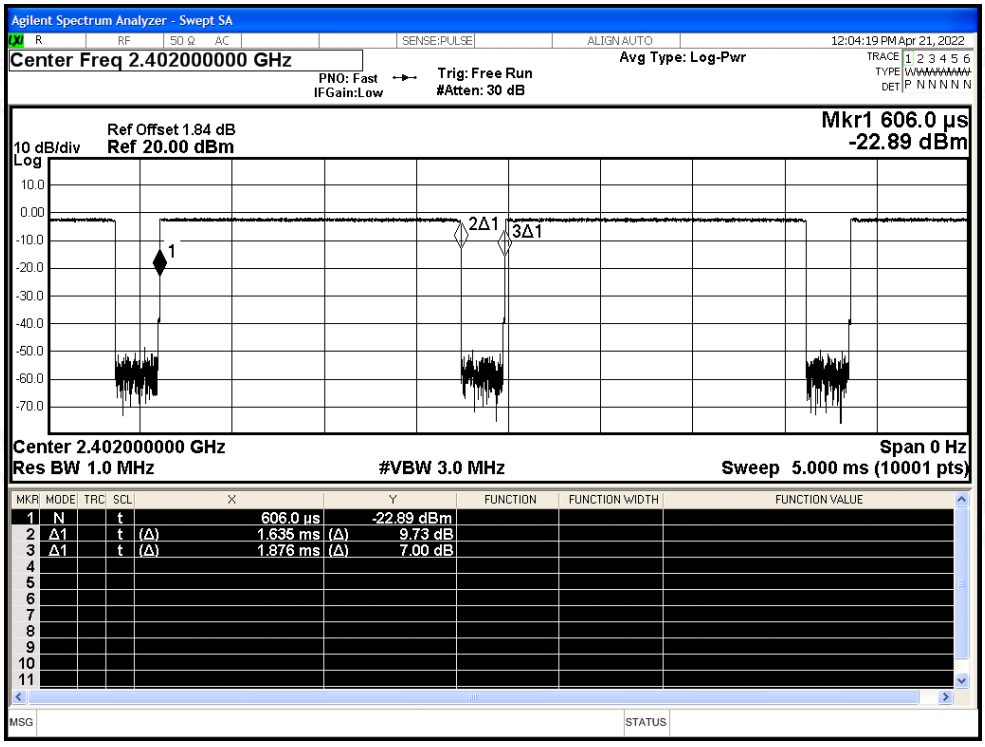


Duty Cycle NVNT BLE 1M 2440MHz Ant1

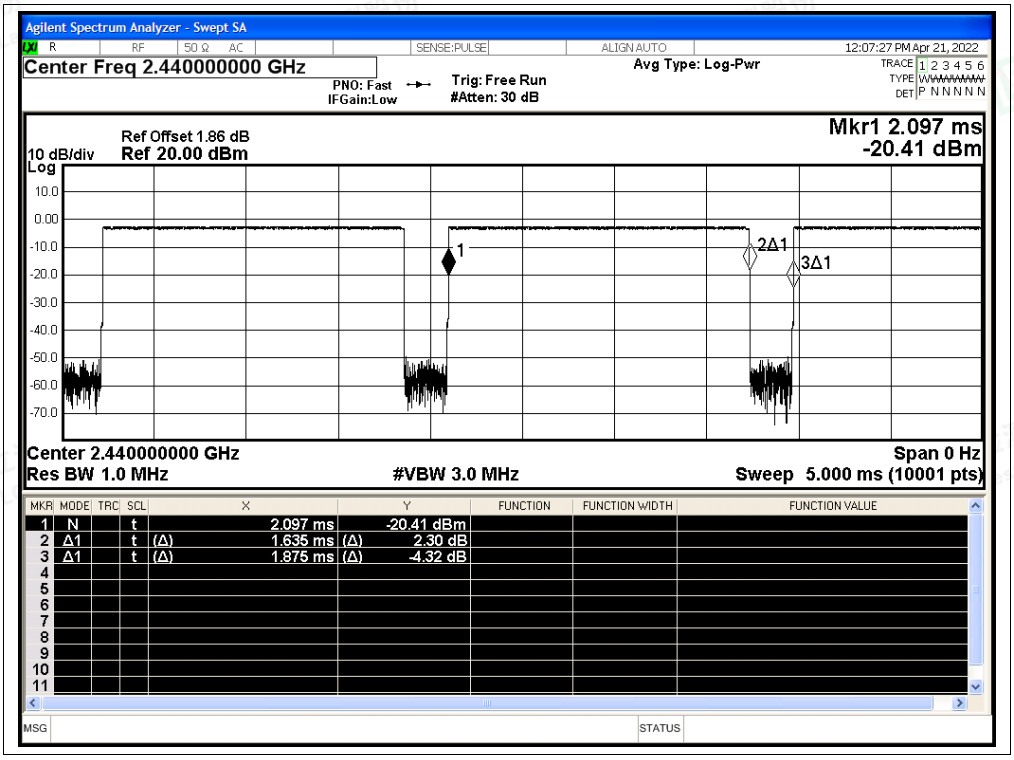
Agilent Spectrum Analyzer - Swept SA
Center Freq 2.440000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 30 dB
Avg Type: Log-Pwr
12:07:27 PM Apr 21, 2022
Ref Offset 1.86 dB
10 dB/div
Log
Ref 20.00 dBm
Mkr1 2.097 ms
-20.41 dBm
Center 2.440000000 GHz
Res BW 1.0 MHz
#VBW 3.0 MHz
Span 0 Hz
Sweep 5.000 ms (10001 pts)
1 N t 2.097 ms -20.41 dBm
2 Δ1 t (Δ) 1.635 ms (Δ) 2.30 dB
3 Δ1 t (Δ) 1.875 ms (Δ) -4.32 dB

Duty Cycle NVNT BLE 1M 2480MHz Ant1

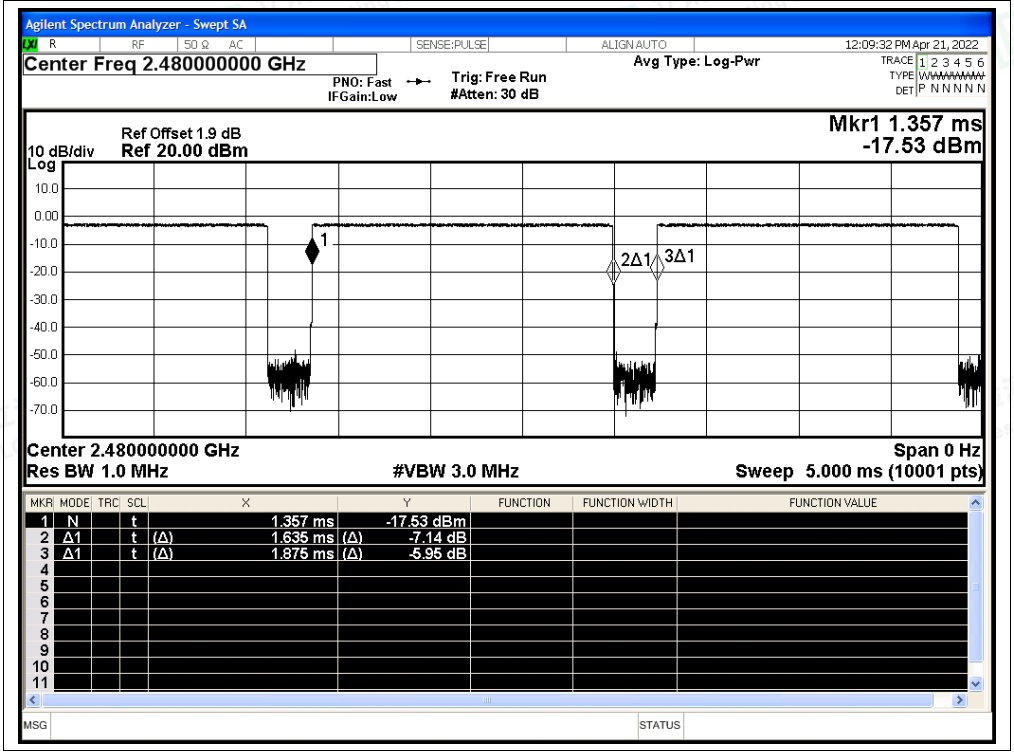

# B.7 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | E (dBuV/m) | Detector | Limit (dBuV/m) | Verdict |
|---|---|---|---|---|---|---|---|---|---|---|
| NVNT | BLE 1M | 2402 | Ant1 | 2310 | -52.45 | 2 | 44.81 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2310 | -60.26 | 2 | 37 | Average | 54 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2315.76 | -47.4 | 2 | 49.86 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2388.144 | -59.86 | 2 | 37.4 | Average | 54 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2390 | -51.34 | 2 | 45.92 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2402 | Ant1 | 2390 | -60.01 | 2 | 37.25 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2483.5 | -49.85 | 2 | 47.41 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2483.5 | -59.6 | 2 | 37.66 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2486.896 | -46.67 | 2 | 50.59 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2497.504 | -59.42 | 2 | 37.84 | Average | 54 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2500 | -50.61 | 2 | 46.65 | Peak | 74 | Pass |
| NVNT | BLE 1M | 2480 | Ant1 | 2500 | -59.69 | 2 | 37.57 | Average | 54 | Pass |

Test Graphs

Restrict Band NVNT BLE 1M 2402MHz Ant1 Peak

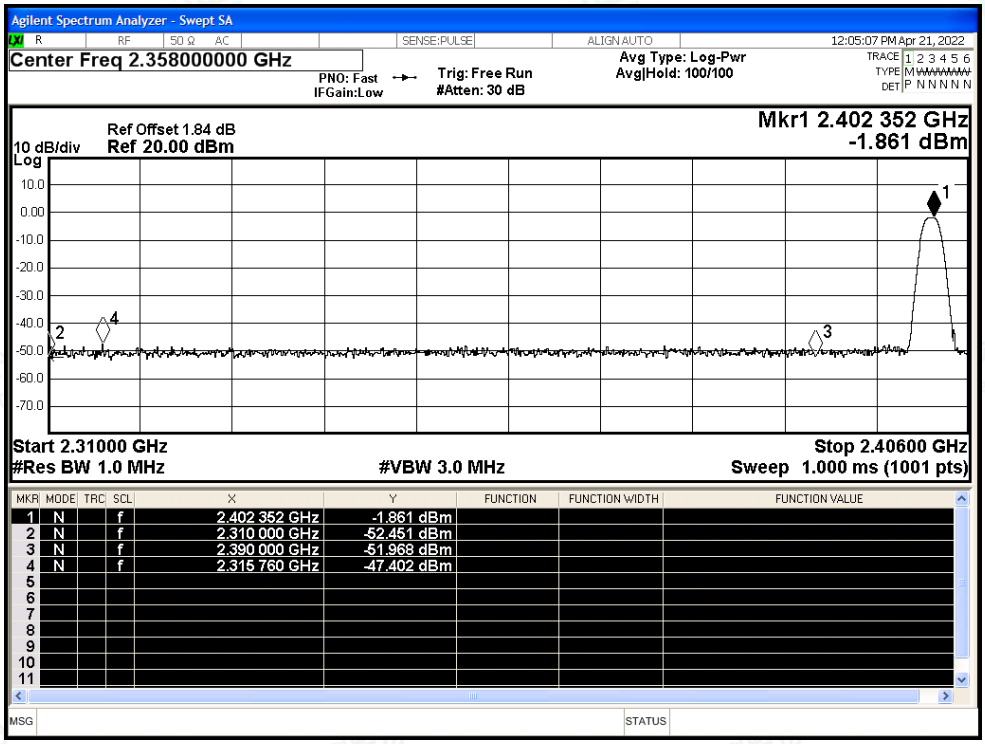


Restrict Band NVNT BLE 1M 2402MHz Ant1 Average

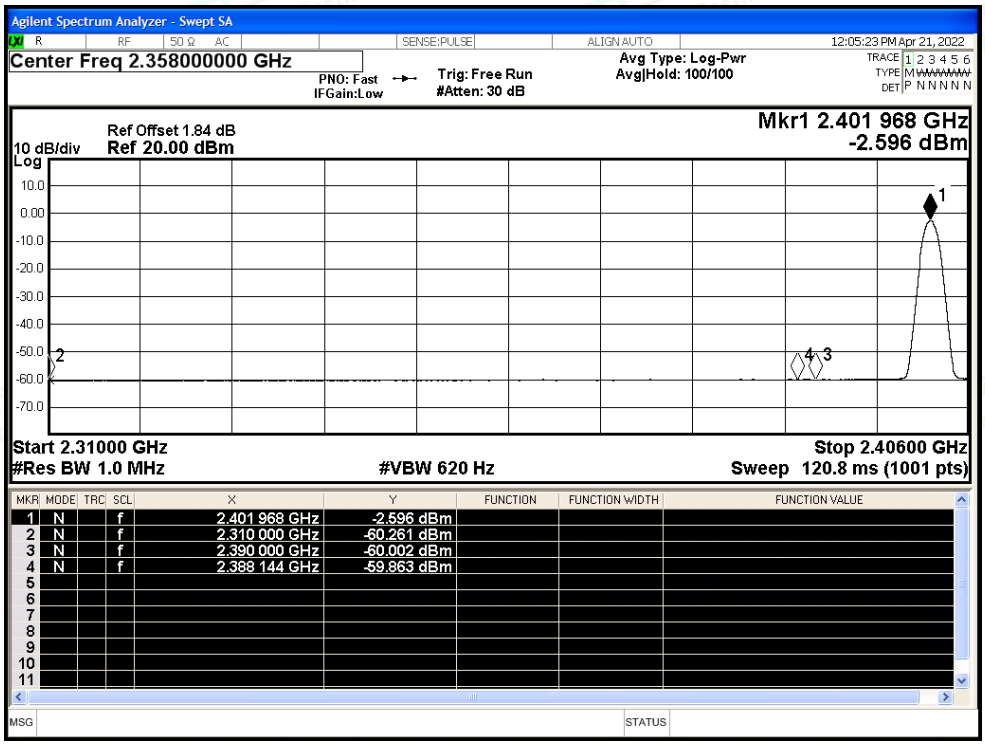

Restrict Band NVNT BLE 1M 2480MHz Ant1 Peak

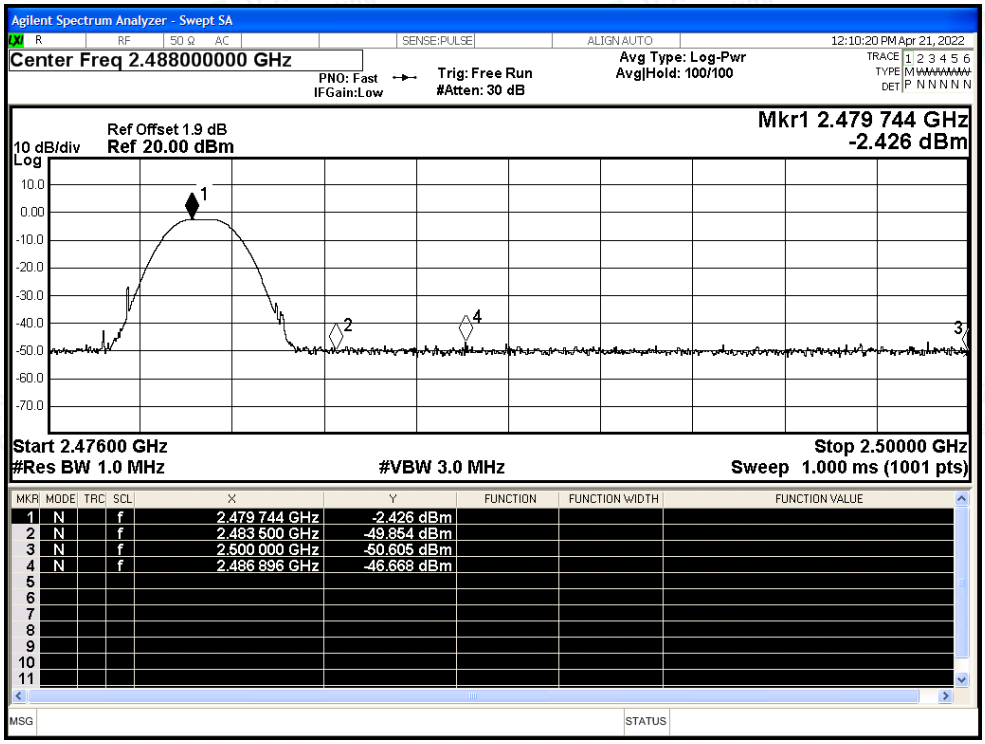

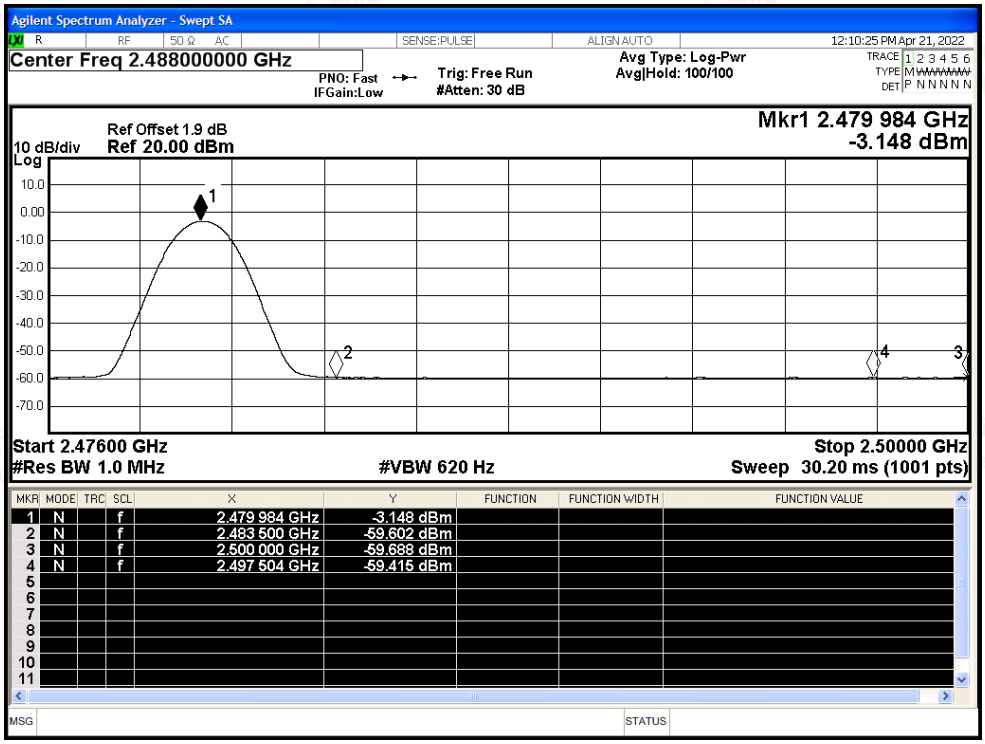
Restrict Band NVNT BLE 1M 2480MHz Ant1 Average