ACCREDITED
Certificate # 3939.01

FCC TEST REPORT

(Part 15, Subpart E)

Applicant:	Mundo Reader S.L.
Address:	Calle Sofía 10, Parque Industrial y Tecnológico Europólis 28232 Las Rozas - Madrid SPAIN

Manufacturer or Supplier	Mundo Reader S.L.
Address	Calle Sofía 10, Parque Industrial y Tecnológico Europólis 28232 Las Rozas - Madrid SPAIN
Product	Smartphone
Brand Name	BQ
Model Name	Aquaris U2
FCC ID	2AN87AQUARISU2
Date of tests	Nov. 11, 2017 ~ Nov. 21, 2017

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart E, Section 15.407**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Yuqiang Yin Engineer / Mobile Department	Approved by Bill Yao Manager / Mobile Department
Date: Nov. 22, 2017	Date: Nov. 22, 2017

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

BV 7Layers Communications Technology (Shenzhen) Co. Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.dg@cn.bureauveritas.com

TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS 5

1.1 MEASUREMENT UNCERTAINTY 5

2 GENERAL INFORMATION 6

2.1 GENERAL DESCRIPTION OF EUT 6

2.2 DESCRIPTION OF TEST MODES 8

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL 10

2.3 DUTY CYCLE OF TEST SIGNAL 13

2.4 DESCRIPTION OF SUPPORT UNITS 14

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST 15

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS 15

3 TEST TYPES AND RESULTS 16

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT 16

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT 16

3.1.2 LIMITS OF UNWANTED EMISSION 16

3.1.3 TEST INSTRUMENTS 17

3.1.4 TEST PROCEDURES 18

3.1.5 DEVIATION FROM TEST STANDARD 18

3.1.6 TEST SETUP 19

3.1.7 EUT OPERATING CONDITION 20

3.1.8 TEST RESULTS 21

3.2 CONDUCTED EMISSION MEASUREMENT 69

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 69

3.2.2 TEST INSTRUMENTS 69

3.2.3 TEST PROCEDURES 69

3.2.4 DEVIATION FROM TEST STANDARD 70

3.2.5 TEST SETUP 70

3.2.6 EUT OPERATING CONDITIONS 70

3.2.7 TEST RESULTS 71

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 73

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT 73

3.3.2 TEST SETUP 74
3.3.3 TEST INSTRUMENTS 75
3.3.4 TEST PROCEDURE 75
3.3.5 DEVIATION FROM TEST STANDARD 77
3.3.6 EUT OPERATING CONDITIONS 77
3.3.7 TEST RESULTS 78
3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT 92
3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT 92
3.4.2 TEST SETUP 92
3.4.3 TEST INSTRUMENTS 92
3.4.4 TEST PROCEDURES 93
3.4.5 DEVIATION FROM TEST STANDARD 93
3.4.6 EUT OPERATING CONDITIONS 93
3.4.7 TEST RESULTS 94
3.5 FREQUENCY STABILITY 101
3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT 101
3.5.2 TEST SETUP 101
3.5.3 TEST INSTRUMENTS 101
3.5.4 TEST PROCEDURE 102
3.5.5 DEVIATION FROM TEST STANDARD 102
3.5.6 EUT OPERATING CONDITION 102
3.5.7 TEST RESULTS 103

4 PHOTOGRAPHS OF THE TEST CONFIGURATION 105

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB 106

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF171110W005-3	Original release	Nov. 22, 2017

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	**TEST TYPE AND LIMIT**	**RESULT**	**REMARK**
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -22.59dB at 0.162000MHz.
15.407(b) (1/2/3/4/6)	Radiated Emission & Band Edge Measurement	PASS	Meet the requirement of limit. Minimum passing margin is -1.01dB at 5973.23MHz.
15.407(a/1/2/3)	Maximum conducted output Power	PASS	Meet the requirement of limit.
15.407(a/1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(e)	6 dB Bandwidth	PASS	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GMHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.

2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	Smartphone
MODEL NO.	Aquaris U2
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.85Vdc (Li-polymer, battery)
MODULATION TYPE	64QAM, 16QAM, QPSK, BPSK
MODULATION TECHNOLOGY	OFDM
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to MCS7 802.11ac: up to 390.0Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5700MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5500 ~ 5700MHz: 8 for 802.11a, 802.11n (20MHz) 3 for 802.11n (40MHz) 1 for 802.11ac (80MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 1 for 802.11ac (80MHz)
AVERAGE POWER	22.803mW for 5180 ~ 5240MHz 22.029mW for 5260 ~ 5320MHz 23.388mW for 5500 ~ 5700MHz 21.330mW for 5745 ~ 5825MHz
ANTENNA TYPE	LDS Antenna with -5dBi gain
HW VERSION	LLDM956B3-3 VER:B34-2 1728 MDK MB- 18 W
SW VERSION	1.9.0_20171116-1320
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: Shielded without core, detachable, 1.0m

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. The EUT matched the following USB cable:

USB CABLE	
BRAND:	HFG Communication Technology Co., LTD.
MODEL:	HY-005015
SIGNAL LINE:	1.0 METER

3. The EUT incorporates a SISO function. Physically, the EUT provides one completed transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11a	1TX/1RX
802.11n (20MHz)	1TX/1RX
802.11n (40MHz)	1TX/1RX
802.11ac (80MHz)	1TX/1RX

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

2.2 DESCRIPTION OF TEST MODES

FOR 5150 ~ 5250MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

FOR 5250 ~ 5350MHz

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		

FOR 5470 ~ 5725MHz

8 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	134	5670 MHz
110	5550 MHz		

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz		

FOR 5725 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (80MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
155	5775 MHz		

2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	**-**	**Powered by Adapter with wifi(5G) link**
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where **RE≥1G:** Radiated Emission above 1GHz **RE<1G:** Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

NOTE:
The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane.**
NOTE: "-"means no effect.

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

RADIATED EMISSION TEST (BELOW 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (20MHz)	5725-5825	149 to 165	165	OFDM	BPSK	MCS0

POWER LINE CONDUCTED EMISSION TEST:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11n (20MHz)	5725-5825	149 to 165	165	OFDM	BPSK	MCS0

BANDEDGE MEASUREMENT:

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 48	OFDM	BPSK	6.0
A	802.11n (20MHz)		36 to 48	36, 48	OFDM	BPSK	MCS0
A	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
A	802.11a	5260-5320	52 to 64	52, 64	OFDM	BPSK	6.0
A	802.11n (20MHz)		52 to 64	52, 64	OFDM	BPSK	MCS0
A	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
A	802.11a	5500-5700	100 to 140	100, 140	OFDM	BPSK	6.0
A	802.11n (20MHz)		100 to 140	100, 140	OFDM	BPSK	MCS0
A	802.11n (40MHz)		102 to 134	102, 134	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
A	802.11a	5725-5825	149 to 165	149, 165	OFDM	BPSK	6.0
A	802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	MCS0
A	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
A	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

ANTENNA PORT CONDUCTED MEASUREMENT:

☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.0
B	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	BPSK	MCS0
B	802.11n (40MHz)		38 to 46	38, 46	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		42	42	OFDM	BPSK	V0
B	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	BPSK	6.0
B	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	BPSK	MCS0
B	802.11n (40MHz)		54 to 62	54, 62	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		58	58	OFDM	BPSK	V0
B	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	BPSK	6.0
B	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	BPSK	MCS0
B	802.11n (40MHz)		102 to 134	102, 110, 134	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		106	106	OFDM	BPSK	V0
B	802.11a	5725-5825	149 to 165	149, 165	OFDM	BPSK	6.0
B	802.11n (20MHz)		149 to 165	149, 165	OFDM	BPSK	MCS0
B	802.11n (40MHz)		151 to 159	151, 159	OFDM	BPSK	MCS0
B	802.11ac (80MHz)		155	155	OFDM	BPSK	V0

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 62%RH	DC 5V By Adapter	Simon Yang
RE≥1G	23deg. C, 62%RH	DC 5V By Adapter	Simon Yang
PLC	24deg. C, 61%RH	DC 5V By Adapter	Jocan Guo
APCM	23.5deg. C, 60%RH	DC 3.85V By battery	Wenliang Wu

2.3 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 1.351/1.573 = 0.859, Duty factor = 10 * log(1/0.859) = 0.66

802.11n (20MHz): Duty cycle = 1.267/1.492 = 0.849, Duty factor = 10 * log(1/0.849) = 0.71

802.11n (40MHz): Duty cycle = 0.630/0.841 = 0.749, Duty factor = 10 * log(1/0.749) = 1.26

802.11ac (80MHz): Duty cycle = 0.244/0.455 = 0.536, Duty factor = 10 * log(1/0.536) = 2.71

802.11a

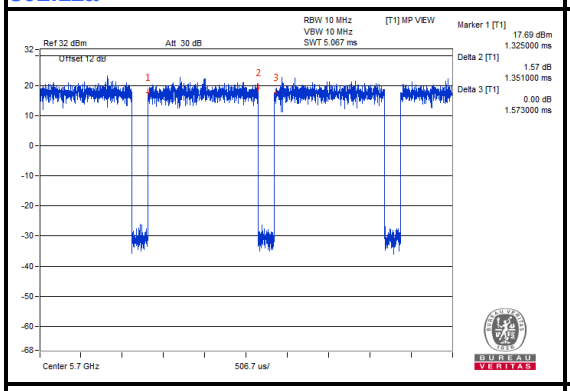

802.11n (20MHz)

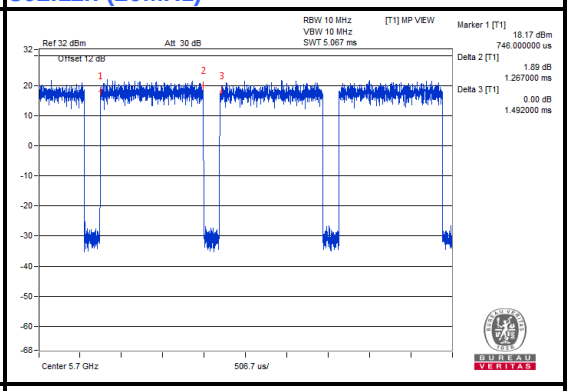

802.11n (40MHz)

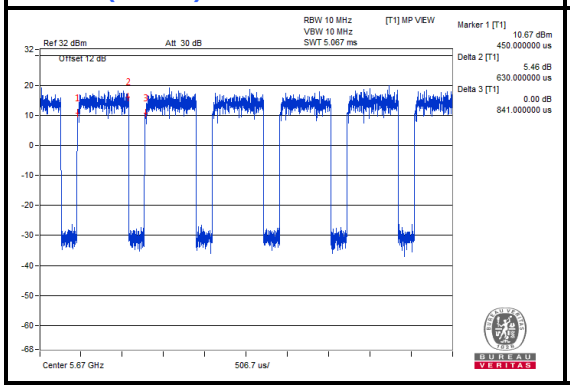

802.11ac (80MHz)

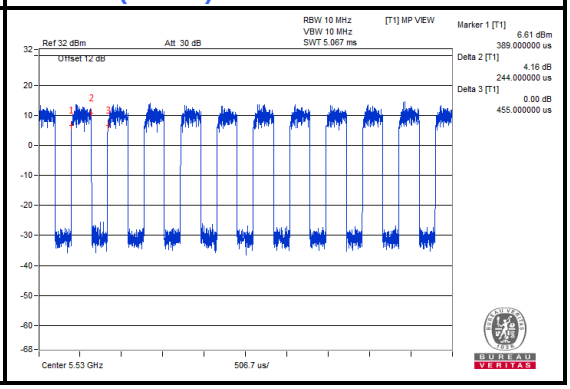

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Adapter	N/A	N/A	N/A	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A
2	AC Line: Unshielded, Detachable 1.5m

NOTE:

1. All power cords of the above support units are non shielded (1.8m).

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

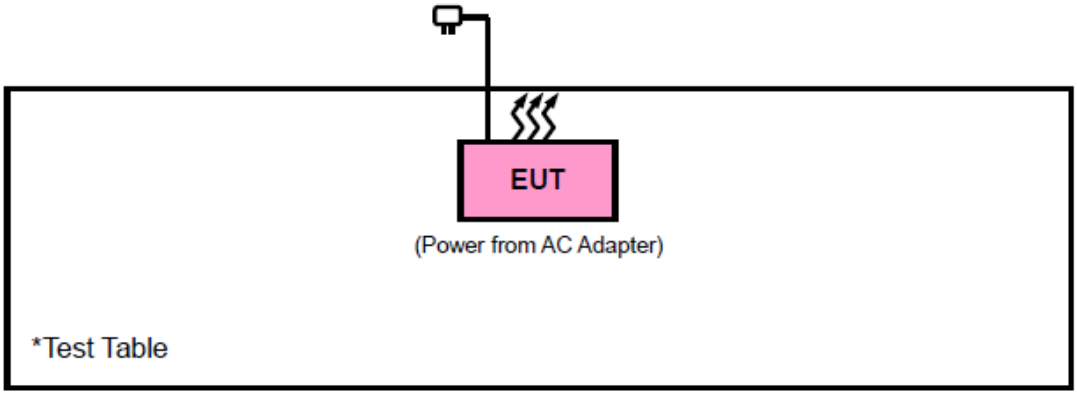

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)
KDB 789033 D02 General U-NII Test Procedures New Rules v01r02
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION

	APPLICABLE TO	LIMIT	
RESTRICTED BANDS	789033 D02 General UNII Test Procedures New Rules v01r02	FIELD STRENGTH AT 3m (dBμV/m)	
		PK : 74	AV : 54
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m)
	15.407(b)(1)	PK : -27	PK : 68.3
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See note 2 (FCC 16-24)	

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3}$$ μV/m, where P is the eirp (Watts).

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	May 06,17	May 05,18
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 28,16	Nov. 27,17
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Dec. 16,16	Dec. 15,17
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 24,17	Jul. 23,18
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 10,17	Mar. 09,18
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 24,17	Jul. 23,18
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 24,17	Jul. 23,18

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in 3m Chamber.
3. The FCC Site Registration No. is 525120.

3.1.4 TEST PROCEDURES

a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

3.1.5 DEVIATION FROM TEST STANDARD

No deviation.

3.1.6 TEST SETUP

< Frequency Range below 30MHz>

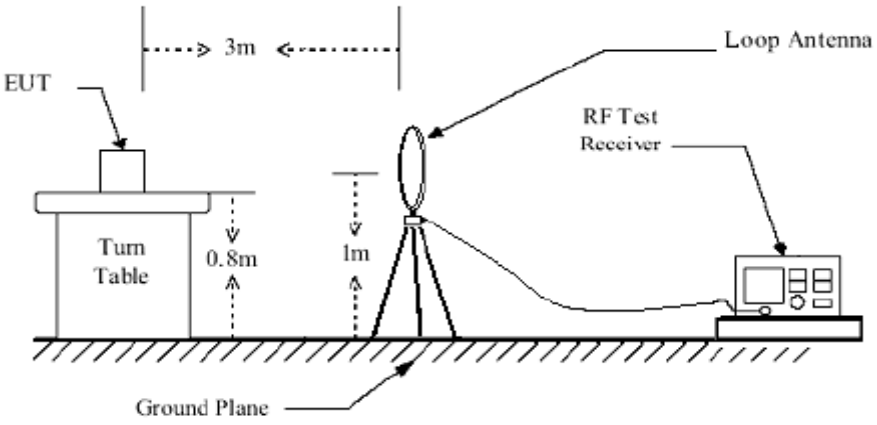

< Frequency Range 30MHz~1GHz >

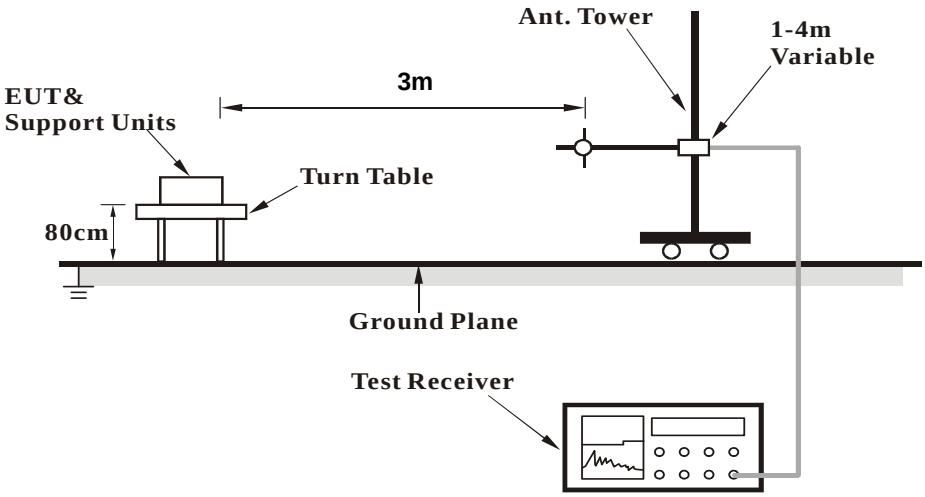

<Frequency Range above 1GHz>

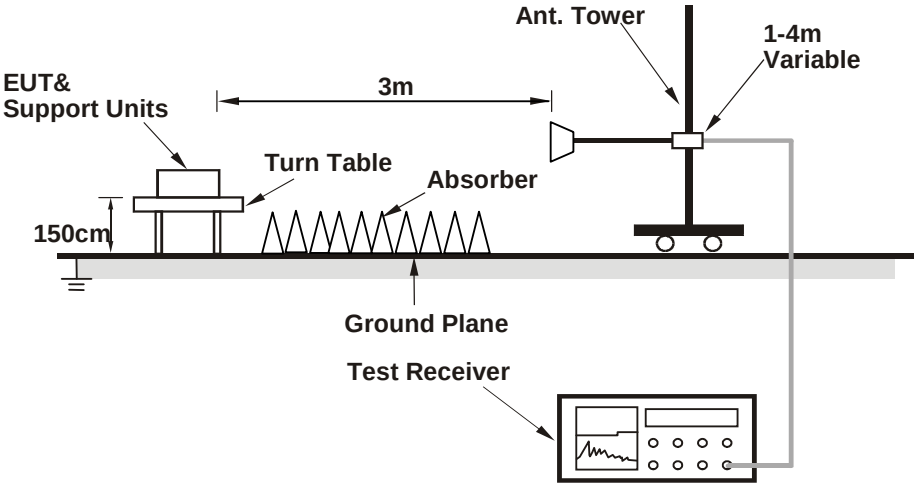

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

a. Set the EUT under full load condition and placed them on a testing table.

b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.

c. The necessary accessories enable the EUT in full functions.

3.1.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:

9 KHz – 30 MHz data: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:

802.11n (20MHz)

CHANNEL	TX Channel 165	**DETECTOR FUNCTION**	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
58.13	31.06	60.81	40	-8.94	6.42	1.16	37.33	100	248	QP
144.46	36.48	62.91	43.5	-7.02	8.54	1.85	36.82	100	15	QP
235.64	32.19	54.61	46	-13.81	11.74	2.37	36.53	100	31	QP
344.28	27.31	46.14	46	-18.69	14.86	2.91	36.6	100	222	QP
485.9	26.77	42.05	46	-19.23	18.23	3.42	36.93	100	289	QP
666.32	22.69	33.66	46	-23.31	22.16	4.19	37.32	100	321	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

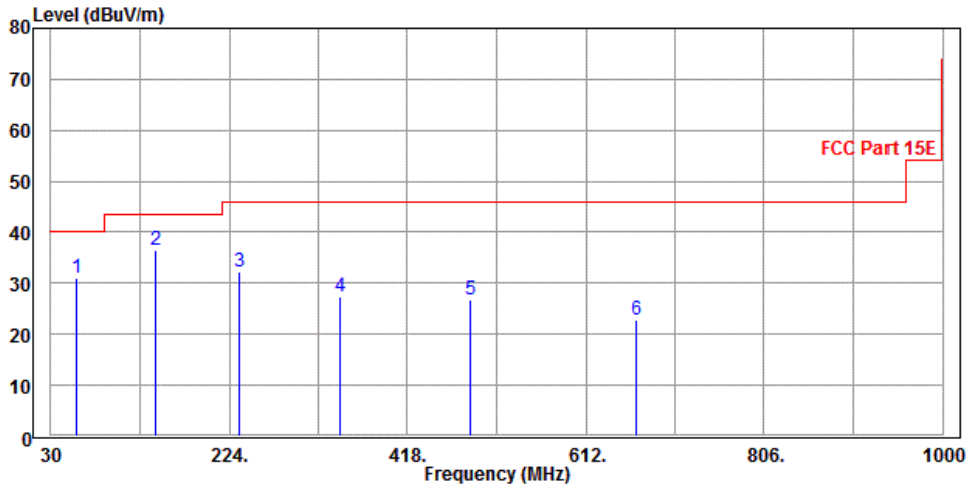

CHANNEL	Channel 165	**DETECTOR FUNCTION**	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
66.86	29.49	58.78	40	-10.51	6.74	1.25	37.28	100	124	QP
144.46	15.3	41.73	43.5	-28.2	8.54	1.85	36.82	100	302	QP
235.64	22.7	45.12	46	-23.3	11.74	2.37	36.53	100	196	QP
340.4	27.1	46.1	46	-18.9	14.7	2.89	36.59	100	269	QP
564.47	22.83	36.55	46	-23.17	19.62	3.81	37.15	100	33	QP
733.25	22.24	32.21	46	-23.76	23.07	4.41	37.45	100	114	QP

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

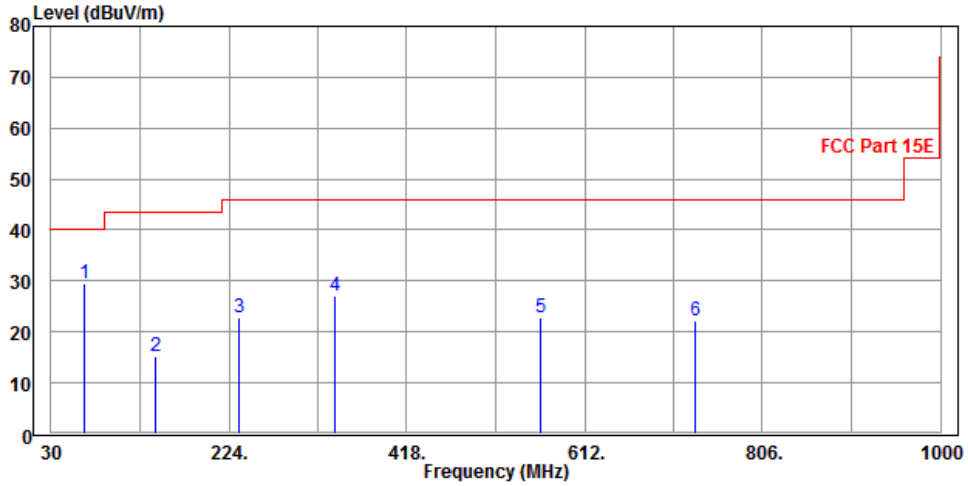

ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

Band 1

802.11a

CHANNEL	TX Channel 36	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.62	45.64	54	-6.38	34.48	13.71	46.21	100	8	Average
5150	61.92	59.94	74	-12.08	34.48	13.71	46.21	100	8	Peak
5180	85.66	83.57			34.52	13.79	46.22	100	8	Average
5180	96.1	94.01			34.52	13.79	46.22	100	8	Peak
5350	46.1	43.35	54	-7.9	34.72	14.28	46.25	100	8	Average
5350	61.28	58.53	74	-12.72	34.72	14.28	46.25	100	8	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	46.54	44.56	54	-7.46	34.48	13.71	46.21	100	290	Average
5150	61.53	59.55	74	-12.47	34.48	13.71	46.21	100	290	Peak
5180	95.33	93.24			34.52	13.79	46.22	100	290	Average
5180	105.52	103.43			34.52	13.79	46.22	100	290	Peak
5350	46.29	43.54	54	-7.71	34.72	14.28	46.25	130	255	Average
5350	62.26	59.51	74	-11.74	34.72	14.28	46.25	100	290	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	46.79	44.81	54	-7.21	34.48	13.71	46.21	100	18	Average
5150	61.17	59.19	74	-12.83	34.48	13.71	46.21	100	18	Peak
5200	84.75	82.58			34.54	13.85	46.22	100	18	Average
5200	97.38	95.21			34.54	13.85	46.22	100	18	Peak
5350	46.22	43.47	54	-7.78	34.72	14.28	46.25	100	18	Average
5350	61.38	58.63	74	-12.62	34.72	14.28	46.25	100	18	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	46.77	44.79	54	-7.23	34.48	13.71	46.21	100	295	Average
5150	60.11	58.13	74	-13.89	34.48	13.71	46.21	100	295	Peak
5200	95.35	93.18			34.54	13.85	46.22	100	295	Average
5200	104.77	102.6			34.54	13.85	46.22	100	295	Peak
5350	47.28	44.53	54	-6.72	34.72	14.28	46.25	100	295	Average
5350	61.36	58.61	74	-12.64	34.72	14.28	46.25	100	295	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.74	45.76	54	-6.26	34.48	13.71	46.21	100	20	Average
5150	61.17	59.19	74	-12.83	34.48	13.71	46.21	100	20	Peak
5240	85.89	83.56			34.59	13.97	46.23	100	20	Average
5240	95.47	93.14			34.59	13.97	46.23	100	20	Peak
5350	47.04	44.29	54	-6.96	34.72	14.28	46.25	100	20	Average
5350	61.58	58.83	74	-12.42	34.72	14.28	46.25	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.71	45.73	54	-6.29	34.48	13.71	46.21	100	292	Average
5150	61.54	59.56	74	-12.46	34.48	13.71	46.21	100	292	Peak
5240	98.5	96.17			34.59	13.97	46.23	100	292	Average
5240	106.11	103.78			34.59	13.97	46.23	100	292	Peak
5350	47.16	44.41	54	-6.84	34.72	14.28	46.25	100	292	Average
5350	62.53	59.78	74	-11.47	34.72	14.28	46.25	100	292	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 36	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.75	45.77	54	-6.25	34.48	13.71	46.21	100	25	Average
5150	60.2	58.22	74	-13.8	34.48	13.71	46.21	100	25	Peak
5180	84.81	82.72			34.52	13.79	46.22	100	25	Average
5180	95.94	93.85			34.52	13.79	46.22	100	25	Peak
5350	47.39	44.64	54	-6.61	34.72	14.28	46.25	100	25	Average
5350	61.3	58.55	74	-12.7	34.72	14.28	46.25	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.8	45.82	54	-6.2	34.48	13.71	46.21	100	295	Average
5150	60.65	58.67	74	-13.35	34.48	13.71	46.21	100	295	Peak
5180	95.89	93.8			34.52	13.79	46.22	100	295	Average
5180	104.64	102.55			34.52	13.79	46.22	100	295	Peak
5350	47.28	44.53	54	-6.72	34.72	14.28	46.25	100	295	Average
5350	60.56	57.81	74	-13.44	34.72	14.28	46.25	100	295	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	46.83	44.85	54	-7.17	34.48	13.71	46.21	100	20	Average
5150	60.51	58.53	74	-13.49	34.48	13.71	46.21	100	20	Peak
5200	85.48	83.31			34.54	13.85	46.22	100	20	Average
5200	94.74	92.57			34.54	13.85	46.22	100	20	Peak
5350	47.33	44.58	54	-6.67	34.72	14.28	46.25	100	20	Average
5350	61.11	58.36	74	-12.89	34.72	14.28	46.25	100	20	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.86	45.88	54	-6.14	34.48	13.71	46.21	100	290	Average
5150	61.05	59.07	74	-12.95	34.48	13.71	46.21	100	290	Peak
5200	96.32	94.15			34.54	13.85	46.22	100	290	Average
5200	105.65	103.48			34.54	13.85	46.22	100	290	Peak
5350	47.41	44.66	54	-6.59	34.72	14.28	46.25	100	290	Average
5350	61.71	58.96	74	-12.29	34.72	14.28	46.25	100	290	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.79	45.81	54	-6.21	34.48	13.71	46.21	100	26	Average
5150	60.93	58.95	74	-13.07	34.48	13.71	46.21	100	26	Peak
5240	86.49	84.16			34.59	13.97	46.23	100	26	Average
5240	96.38	94.05			34.59	13.97	46.23	100	26	Peak
5350	47.07	44.32	54	-6.93	34.72	14.28	46.25	100	26	Average
5350	60.68	57.93	74	-13.32	34.72	14.28	46.25	100	26	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.8	45.82	54	-6.2	34.48	13.71	46.21	100	300	Average
5150	60.25	58.27	74	-13.75	34.48	13.71	46.21	100	300	Peak
5240	96.5	94.17			34.59	13.97	46.23	100	300	Average
5240	105.88	103.55			34.59	13.97	46.23	100	300	Peak
5350	47.12	44.37	54	-6.88	34.72	14.28	46.25	100	300	Average
5350	61.1	58.35	74	-12.9	34.72	14.28	46.25	100	300	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 38	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.91	45.93	54	-6.09	34.48	13.71	46.21	100	18	Average
5150	60.61	58.63	74	-13.39	34.48	13.71	46.21	100	18	Peak
5190	80.91	78.78			34.53	13.82	46.22	100	18	Average
5190	94.04	91.91			34.53	13.82	46.22	100	18	Peak
5350	47.32	44.57	54	-6.68	34.72	14.28	46.25	100	18	Average
5350	61.49	58.74	74	-12.51	34.72	14.28	46.25	100	18	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.99	46.01	54	-6.01	34.48	13.71	46.21	100	292	Average
5150	62.43	60.45	74	-11.57	34.48	13.71	46.21	100	292	Peak
5190	92.59	90.46			34.53	13.82	46.22	100	292	Average
5190	103.04	100.91			34.53	13.82	46.22	100	292	Peak
5350	47.54	44.79	54	-6.46	34.72	14.28	46.25	100	292	Average
5350	61.46	58.71	74	-12.54	34.72	14.28	46.25	100	292	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5190MHz: Fundamental frequency.

CHANNEL	TX Channel 46	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.69	45.71	54	-6.31	34.48	13.71	46.21	100	25	Average
5150	60.84	58.86	74	-13.16	34.48	13.71	46.21	100	25	Peak
5230	80.32	78.03			34.58	13.94	46.23	100	25	Average
5230	95.43	93.14			34.58	13.94	46.23	100	25	Peak
5350	47.77	45.02	54	-6.23	34.72	14.28	46.25	100	25	Average
5350	61.21	58.46	74	-12.79	34.72	14.28	46.25	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.76	45.78	54	-6.24	34.48	13.71	46.21	100	290	Average
5150	60.76	58.78	74	-13.24	34.48	13.71	46.21	100	290	Peak
5230	92.53	90.24			34.58	13.94	46.23	100	290	Average
5230	102.5	100.21			34.58	13.94	46.23	100	290	Peak
5350	47.27	44.52	54	-6.73	34.72	14.28	46.25	100	290	Average
5350	61.35	58.6	74	-12.65	34.72	14.28	46.25	100	290	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.

802.11ac (80MHz)

CHANNEL	TX Channel 42	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.77	45.79	54	-6.23	34.48	13.71	46.21	100	30	Average
5150	59.09	57.11	74	-14.91	34.48	13.71	46.21	100	30	Peak
5210	76.3	74.09			34.55	13.88	46.22	100	30	Average
5210	92.05	89.84			34.55	13.88	46.22	100	30	Peak
5350	47.28	44.53	54	-6.72	34.72	14.28	46.25	100	30	Average
5350	60.39	57.64	74	-13.61	34.72	14.28	46.25	100	30	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.97	45.99	54	-6.03	34.48	13.71	46.21	100	300	Average
5150	61.82	59.84	74	-12.18	34.48	13.71	46.21	100	300	Peak
5210	86.72	84.51			34.55	13.88	46.22	100	300	Average
5210	100.7	98.49			34.55	13.88	46.22	100	300	Peak
5350	47.54	44.79	54	-6.46	34.72	14.28	46.25	100	300	Average
5350	61.44	58.69	74	-12.56	34.72	14.28	46.25	100	300	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5210MHz: Fundamental frequency.

Band 2

802.11a

CHANNEL	TX Channel 52	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.57	45.59	54	-6.43	34.48	13.71	46.21	100	25	Average
5150	61.66	59.68	74	-12.34	34.48	13.71	46.21	100	25	Peak
5260	84.61	82.21			34.61	14.02	46.23	100	25	Average
5260	94.71	92.31			34.61	14.02	46.23	100	25	Peak
5350	46.93	44.18	54	-7.07	34.72	14.28	46.25	100	25	Average
5350	61	58.25	74	-13	34.72	14.28	46.25	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.59	45.61	54	-6.41	34.48	13.71	46.21	100	290	Average
5150	60.09	58.11	74	-13.91	34.48	13.71	46.21	100	290	Peak
5260	96.12	93.72			34.61	14.02	46.23	100	290	Average
5260	101.22	98.82			34.61	14.02	46.23	100	290	Peak
5350	46.88	44.13	54	-7.12	34.72	14.28	46.25	100	290	Average
5350	59.83	57.08	74	-14.17	34.72	14.28	46.25	100	290	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.32	45.34	54	-6.68	34.48	13.71	46.21	100	44	Average
5150	60.01	58.03	74	-13.99	34.48	13.71	46.21	100	44	Peak
5300	85.15	82.59			34.66	14.14	46.24	100	44	Average
5300	93.77	91.21			34.66	14.14	46.24	100	44	Peak
5350	47.58	44.83	54	-6.42	34.72	14.28	46.25	100	44	Average
5350	60.99	58.24	74	-13.01	34.72	14.28	46.25	100	44	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.43	45.45	54	-6.57	34.48	13.71	46.21	100	285	Average
5150	60.53	58.55	74	-13.47	34.48	13.71	46.21	100	285	Peak
5300	94.16	91.6			34.66	14.14	46.24	100	285	Average
5300	103.58	101.02			34.66	14.14	46.24	100	285	Peak
5350	47.66	44.91	54	-6.34	34.72	14.28	46.25	100	285	Average
5350	60.65	57.9	74	-13.35	34.72	14.28	46.25	100	285	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.25	45.27	54	-6.75	34.48	13.71	46.21	100	60	Average
5150	60.42	58.44	74	-13.58	34.48	13.71	46.21	100	60	Peak
5320	83.77	81.13			34.68	14.2	46.24	100	60	Average
5320	92.91	90.27			34.68	14.2	46.24	100	60	Peak
5350	47.53	44.78	54	-6.47	34.72	14.28	46.25	100	60	Average
5350	61	58.25	74	-13	34.72	14.28	46.25	100	60	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.24	45.26	54	-6.76	34.48	13.71	46.21	100	331	Average
5150	59.89	57.91	74	-14.11	34.48	13.71	46.21	100	331	Peak
5320	95.08	92.44			34.68	14.2	46.24	100	331	Average
5320	103.85	101.21			34.68	14.2	46.24	100	331	Peak
5350	47.54	44.79	54	-6.46	34.72	14.28	46.25	100	331	Average
5350	59.94	57.19	74	-14.06	34.72	14.28	46.25	100	331	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 52	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.59	45.61	54	-6.41	34.48	13.71	46.21	100	60	Average
5150	60.66	58.68	74	-13.34	34.48	13.71	46.21	100	60	Peak
5260	86.09	83.69			34.61	14.02	46.23	100	60	Average
5260	95.67	93.27			34.61	14.02	46.23	100	60	Peak
5350	46.87	44.12	54	-7.13	34.72	14.28	46.25	100	60	Average
5350	61.74	58.99	74	-12.26	34.72	14.28	46.25	100	60	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.57	45.59	54	-6.43	34.48	13.71	46.21	100	325	Average
5150	60.82	58.84	74	-13.18	34.48	13.71	46.21	100	325	Peak
5260	95.42	93.02			34.61	14.02	46.23	100	325	Average
5260	104.85	102.45			34.61	14.02	46.23	100	325	Peak
5350	47.1	44.35	54	-6.9	34.72	14.28	46.25	100	325	Average
5350	62.04	59.29	74	-11.96	34.72	14.28	46.25	100	325	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.42	45.44	54	-6.58	34.48	13.71	46.21	220	60	Average
5150	60.54	58.56	74	-13.46	34.48	13.71	46.21	220	60	Peak
5300	87.07	84.51			34.66	14.14	46.24	220	60	Average
5300	94.78	92.22			34.66	14.14	46.24	220	60	Peak
5350	47.68	44.93	54	-6.32	34.72	14.28	46.25	220	60	Average
5350	60.71	57.96	74	-13.29	34.72	14.28	46.25	220	60	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.47	45.49	54	-6.53	34.48	13.71	46.21	100	320	Average
5150	60.57	58.59	74	-13.43	34.48	13.71	46.21	100	320	Peak
5300	94.68	92.12			34.66	14.14	46.24	100	320	Average
5300	104.87	102.31			34.66	14.14	46.24	100	320	Peak
5350	47.67	44.92	54	-6.33	34.72	14.28	46.25	100	320	Average
5350	61.63	58.88	74	-12.37	34.72	14.28	46.25	100	320	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.29	45.31	54	-6.71	34.48	13.71	46.21	210	60	Average
5150	59.85	57.87	74	-14.15	34.48	13.71	46.21	210	60	Peak
5320	86.97	84.33			34.68	14.2	46.24	210	60	Average
5320	94.59	91.95			34.68	14.2	46.24	210	60	Peak
5350	47.54	44.79	54	-6.46	34.72	14.28	46.25	210	60	Average
5350	61.94	59.19	74	-12.06	34.72	14.28	46.25	210	60	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.3	45.32	54	-6.7	34.48	13.71	46.21	100	320	Average
5150	60.7	58.72	74	-13.3	34.48	13.71	46.21	100	320	Peak
5320	94.68	92.04			34.68	14.2	46.24	100	320	Average
5320	103.47	100.83			34.68	14.2	46.24	100	320	Peak
5350	47.71	44.96	54	-6.29	34.72	14.28	46.25	100	320	Average
5350	60.83	58.08	74	-13.17	34.72	14.28	46.25	100	320	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.

802.11n (40MHz)

CHANNEL	TX Channel 54	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.7	45.72	54	-6.3	34.48	13.71	46.21	220	58	Average
5150	60.75	58.77	74	-13.25	34.48	13.71	46.21	220	58	Peak
5270	83.73	81.29			34.62	14.05	46.23	220	58	Average
5270	93.07	90.63			34.62	14.05	46.23	220	58	Peak
5350	47.33	44.58	54	-6.67	34.72	14.28	46.25	220	58	Average
5350	61.48	58.73	74	-12.52	34.72	14.28	46.25	220	58	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.04	45.06	54	-6.96	34.48	13.71	46.21	100	290	Average
5150	60.3	58.32	74	-13.7	34.48	13.71	46.21	100	290	Peak
5270	92.71	90.27			34.62	14.05	46.23	100	290	Average
5270	102.51	100.07			34.62	14.05	46.23	100	290	Peak
5350	47.96	45.21	54	-6.04	34.72	14.28	46.25	100	290	Average
5350	61.63	58.88	74	-12.37	34.72	14.28	46.25	100	290	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5270MHz: Fundamental frequency.

CHANNEL	TX Channel 62	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.69	45.71	54	-6.31	34.48	13.71	46.21	215	60	Average
5150	60.6	58.62	74	-13.4	34.48	13.71	46.21	215	60	Peak
5310	84.22	81.62			34.67	14.17	46.24	215	60	Average
5310	93.99	91.39			34.67	14.17	46.24	215	60	Peak
5350	47.56	44.81	54	-6.44	34.72	14.28	46.25	215	60	Average
5350	61.02	58.27	74	-12.98	34.72	14.28	46.25	215	60	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.84	45.86	54	-6.16	34.48	13.71	46.21	100	295	Average
5150	60.4	58.42	74	-13.6	34.48	13.71	46.21	100	295	Peak
5310	92.15	89.55			34.67	14.17	46.24	100	295	Average
5310	101.96	99.36			34.67	14.17	46.24	100	295	Peak
5350	47.83	45.08	54	-6.17	34.72	14.28	46.25	100	295	Average
5350	61.5	58.75	74	-12.5	34.72	14.28	46.25	100	295	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.

802.11ac (80MHz)

CHANNEL	TX Channel 58	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.77	45.79	54	-6.23	34.48	13.71	46.21	215	58	Average
5150	60.85	58.87	74	-13.15	34.48	13.71	46.21	215	58	Peak
5290	77.75	75.23			34.65	14.11	46.24	215	58	Average
5290	91.05	88.53			34.65	14.11	46.24	215	58	Peak
5350	47.78	45.03	54	-6.22	34.72	14.28	46.25	215	58	Average
5350	60.27	57.52	74	-13.73	34.72	14.28	46.25	215	58	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5150	47.83	45.85	54	-6.17	34.48	13.71	46.21	100	285	Average
5150	60.81	58.83	74	-13.19	34.48	13.71	46.21	100	285	Peak
5290	85.01	82.49			34.65	14.11	46.24	100	285	Average
5290	99.16	96.64			34.65	14.11	46.24	100	285	Peak
5350	47.9	45.15	54	-6.1	34.72	14.28	46.25	100	285	Average
5350	61.27	58.52	74	-12.73	34.72	14.28	46.25	100	285	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5290MHz: Fundamental frequency.

Band 3

802.11a

CHANNEL	TX Channel 100	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.71	44.53	54	-6.29	34.85	14.6	46.27	100	295	Average
5460	62.03	58.85	74	-11.97	34.85	14.6	46.27	100	295	Peak
#5470	61.4	58.19	68.3	-6.90	34.86	14.62	46.27	100	295	Peak
5500	90.44	87.11			34.9	14.71	46.28	100	295	Average
5500	100.48	97.15			34.9	14.71	46.28	100	295	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	47.76	44.58	54	-6.24	34.85	14.6	46.27	100	210	Average
5460	62.17	58.99	74	-11.83	34.85	14.6	46.27	100	210	Peak
#5470	61.86	58.65	68.3	-6.44	34.86	14.62	46.27	100	210	Peak
5500	94.56	91.23			34.9	14.71	46.28	100	210	Average
5500	104.98	101.65			34.9	14.71	46.28	100	210	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5580	88.84	84.89			35	15.23	46.28	100	290	Average
5580	97.43	93.48			35	15.23	46.28	100	290	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5580	93.96	90.01			35	15.23	46.28	120	215	Average
5580	102.64	98.69			35	15.23	46.28	120	215	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.

CHANNEL	TX Channel 140	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5700	94.42	89.55			35.14	16.01	46.28	100	295	Average
5700	102.58	97.71			35.14	16.01	46.28	100	295	Peak
#5725	64.65	59.58	68.3	-3.65	35.17	16.18	46.28	100	295	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5700	97.01	92.14			35.14	16.01	46.28	100	235	Average
5700	105.65	100.78			35.14	16.01	46.28	100	235	Peak
#5725	64.89	59.82	68.3	-3.41	35.17	16.18	46.28	100	235	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11n (20MHz)

CHANNEL	TX Channel 100	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	47.95	44.77	54	-6.05	34.85	14.6	46.27	120	170	Average
5460	61.27	58.09	74	-12.73	34.85	14.6	46.27	120	170	Peak
#5470	61.18	57.97	68.3	-7.12	34.86	14.62	46.27	120	170	Peak
5500	89.34	86.01			34.9	14.71	46.28	120	170	Average
5500	98.27	94.94			34.9	14.71	46.28	120	170	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	47.92	44.74	54	-6.08	34.85	14.6	46.27	100	35	Average
5460	61.13	57.95	74	-12.87	34.85	14.6	46.27	100	35	Peak
#5470	61.56	58.35	68.3	-6.74	34.86	14.62	46.27	100	35	Peak
5500	94.07	90.74			34.9	14.71	46.28	100	35	Average
5500	101.96	98.63			34.9	14.71	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5580	90.91	86.96			35	15.23	46.28	120	170	Average
5580	99.21	95.26			35	15.23	46.28	120	170	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5580	92.91	88.96			35	15.23	46.28	100	30	Average
5580	101.51	97.56			35	15.23	46.28	100	30	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.

CHANNEL	TX Channel 140	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5700	93.98	89.11			35.14	16.01	46.28	170	120	Average
5700	101.95	97.08			35.14	16.01	46.28	170	120	Peak
#5725	64.7	59.63	68.3	-3.6	35.17	16.18	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5700	95.98	91.11			35.14	16.01	46.28	100	35	Average
5700	103.76	98.89			35.14	16.01	46.28	100	35	Peak
#5725	64.8	59.73	68.3	-3.5	35.17	16.18	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 102	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	48	44.82	54	-6	34.85	14.6	46.27	170	115	Average
5460	61.09	57.91	74	-12.91	34.85	14.6	46.27	170	115	Peak
#5470	61.6	58.39	68.3	-6.7	34.86	14.62	46.27	170	115	Peak
5510	86.39	82.98			34.91	14.78	46.28	170	115	Average
5510	95.47	92.06			34.91	14.78	46.28	170	115	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	47.84	44.66	54	-6.16	34.85	14.6	46.27	100	40	Average
5460	62.02	58.84	74	-11.98	34.85	14.6	46.27	100	40	Peak
#5470	63.79	60.58	68.3	-4.51	34.86	14.62	46.27	100	40	Peak
5510	91.05	87.64			34.91	14.78	46.28	100	40	Average
5510	100.72	97.31			34.91	14.78	46.28	100	40	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 110	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5550	86.93	83.21			34.96	15.04	46.28	170	120	Average
5550	98.28	94.56			34.96	15.04	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5550	90.64	86.92			34.96	15.04	46.28	100	35	Average
5550	101.79	98.07			34.96	15.04	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5550MHz: Fundamental frequency.

CHANNEL	TX Channel 134	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5670	91.73	87.09			35.1	15.82	46.28	170	120	Average
5670	101.28	96.64			35.1	15.82	46.28	170	120	Peak
#5725	63.61	58.54	68.3	-4.69	35.17	16.18	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5670	93.07	88.43			35.1	15.82	46.28	100	35	Average
5670	103.33	98.69			35.1	15.82	46.28	100	35	Peak
#5725	64.1	59.03	68.3	-4.2	35.17	16.18	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5670MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ac (80MHz)

CHANNEL	TX Channel 106	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	50.39	47.21	54	-3.61	34.85	14.6	46.27	100	30	Average
5460	65.59	62.41	74	-8.41	34.85	14.6	46.27	100	30	Peak
#5470	66.8	63.59	68.3	-1.5	34.86	14.62	46.27	100	30	Peak
5530	88.43	84.86			34.94	14.91	46.28	100	30	Average
5530	92.7	89.13			34.94	14.91	46.28	100	30	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5460	50.76	47.58	54	-3.24	34.85	14.6	46.27	100	300	Average
5460	65.92	62.74	74	-8.08	34.85	14.6	46.27	100	300	Peak
#5470	66.66	63.45	68.3	-1.64	34.86	14.62	46.27	100	300	Peak
5530	86.99	83.42			34.94	14.91	46.28	100	300	Average
5530	101.24	97.67			34.94	14.91	46.28	100	300	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

Band 4

802.11a

CHANNEL	TX Channel 149	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	96.23	91.01			35.19	16.31	46.28	170	120	Average
5745	105.02	99.8			35.19	16.31	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	97.33	92.11			35.19	16.31	46.28	100	35	Average
5745	106.13	100.91			35.19	16.31	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.

OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5561.88	63.86	60.06	68.3	-4.44	34.97	15.11	46.28	170	120	Peak
5985.1	66.46	59.39	68.3	-1.84	35.48	17.87	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5588	62.66	58.65	68.3	-5.64	35.01	15.28	46.28	101	35	Peak
5988.9	66.16	59.05	68.3	-2.14	35.49	17.9	46.28	101	35	Peak

CH 149

Horiontal

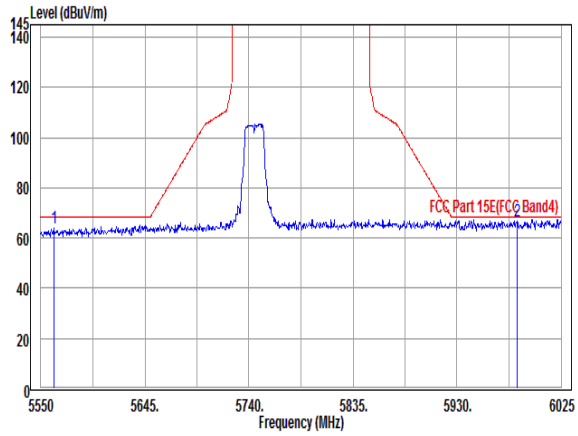

Vertical

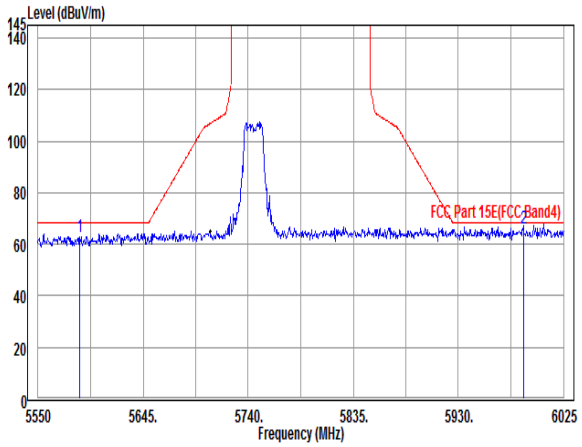

CHANNEL	TX Channel 157	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5785	96.42	90.89			35.24	16.57	46.28	170	115	Average
5785	104.59	99.06			35.24	16.57	46.28	170	115	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5785	97.89	92.36			35.24	16.57	46.28	100	32	Average
5785	105.73	100.2			35.24	16.57	46.28	100	32	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.

OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5561.4	64.53	60.73	68.3	-3.77	34.97	15.11	46.28	170	120	Peak
6004.58	66.89	59.72	68.3	-1.41	35.5	17.95	46.28	170	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5574.7	63.66	59.75	68.3	-4.64	34.99	15.2	46.28	101	35	Peak
6004.1	66.73	59.56	68.3	-1.57	35.5	17.95	46.28	101	35	Peak

CH 157

Horiontal

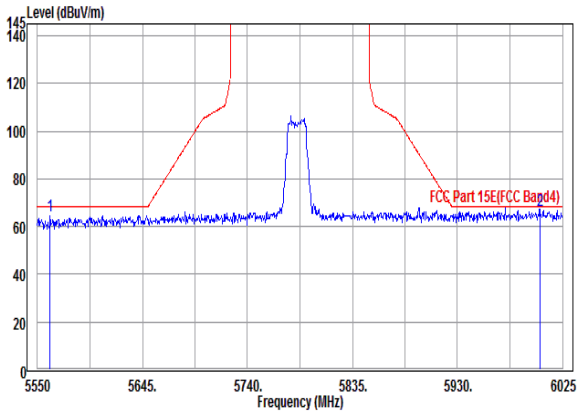

Vertical

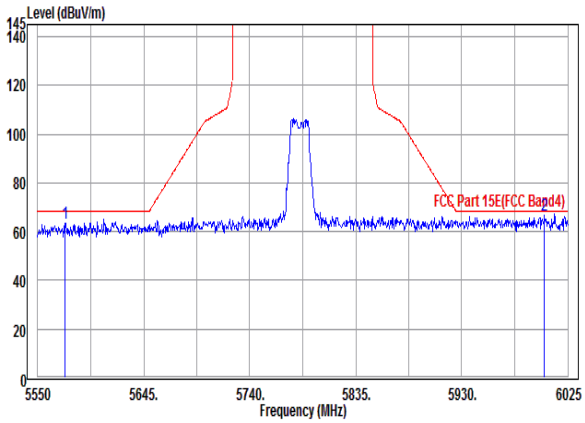

CHANNEL	TX Channel 165	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5825	103.97	98.13			35.29	16.83	46.28	168	124	Average
5825	104.51	98.67			35.29	16.83	46.28	168	124	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5825	94.98	89.14			35.29	16.83	46.28	100	32	Average
5825	103.68	97.84			35.29	16.83	46.28	100	32	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.

OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5563.78	63.88	60.05	68.3	-4.42	34.98	15.13	46.28	168	124	Peak
5989.85	66.2	59.09	68.3	-2.1	35.49	17.9	46.28	168	124	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5583.25	64.55	60.58	68.3	-3.75	35	15.25	46.28	100	32	Peak
5981.3	67.23	60.18	68.3	-1.07	35.48	17.85	46.28	100	32	Peak

CH 165

Horiontal

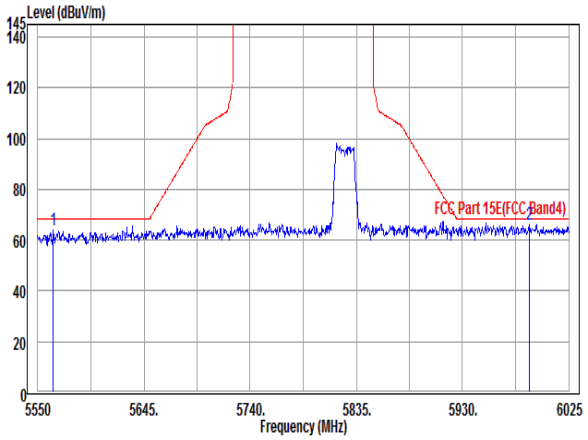

Vertical

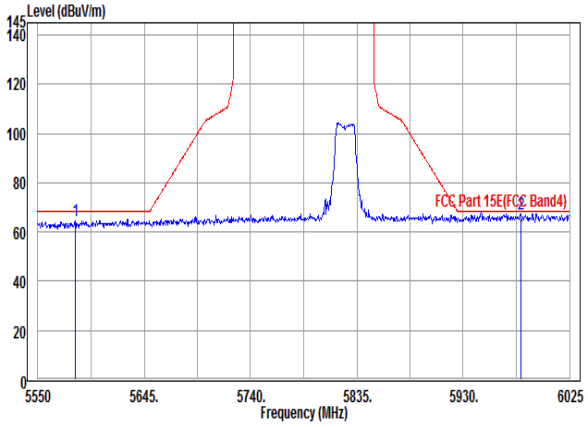

802.11n (20MHz)

CHANNEL	TX Channel 149	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	95.08	89.86			35.19	16.31	46.28	170	130	Average
5745	103.47	98.25			35.19	16.31	46.28	170	130	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	96.99	91.77			35.19	16.31	46.28	100	35	Average
5745	106.34	101.12			35.19	16.31	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.

OOBE DATA

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5592.28	65.57	61.53	68.3	-2.73	35.01	15.31	46.28	170	130	Peak
6002.68	66.5	59.32	68.3	-1.8	35.5	17.96	46.28	170	130	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5593.23	63.5	59.45	68.3	-4.8	35.01	15.32	46.28	100	35	Peak
6016.45	66.98	59.86	68.3	-1.32	35.5	17.9	46.28	100	35	Peak

CH 149

Horiontal

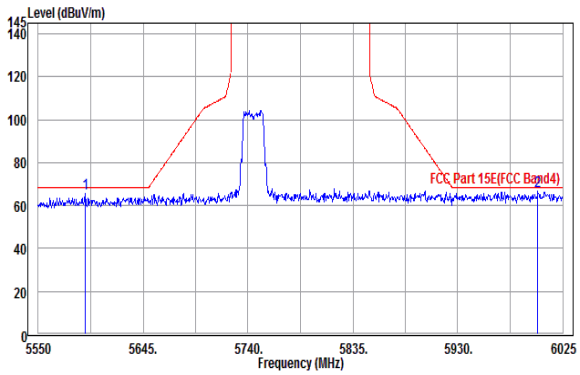

Vertical

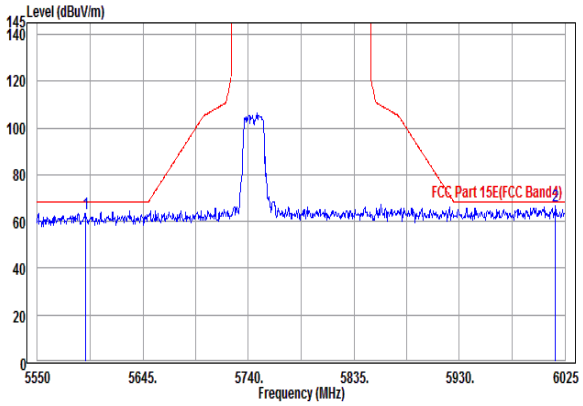

CHANNEL	TX Channel 157	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5785	94.4	88.87			35.24	16.57	46.28	135	120	Average
5785	103.41	97.88			35.24	16.57	46.28	135	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5785	95.89	90.36			35.24	16.57	46.28	100	40	Average
5785	105.76	100.23			35.24	16.57	46.28	100	40	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.

OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5599.4	63.83	59.73	68.3	-4.47	35.02	15.36	46.28	135	120	Peak
6005.05	66.89	59.72	68.3	-1.41	35.5	17.95	46.28	135	120	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5597.98	64.75	60.66	68.3	-3.55	35.02	15.35	46.28	100	40	Peak
6017.4	65.44	58.32	68.3	-2.86	35.5	17.9	46.28	100	40	Peak

CH 157

Horiontal

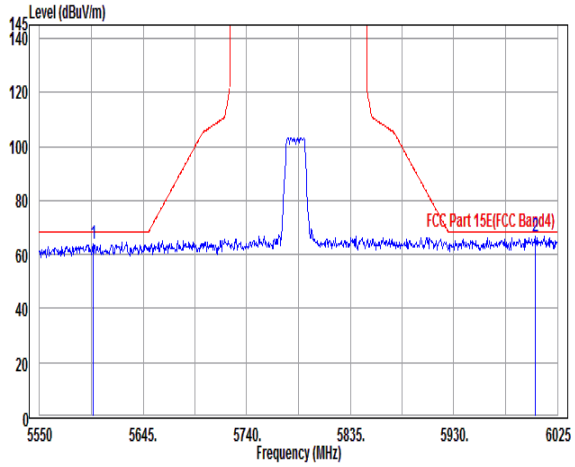

Vertical

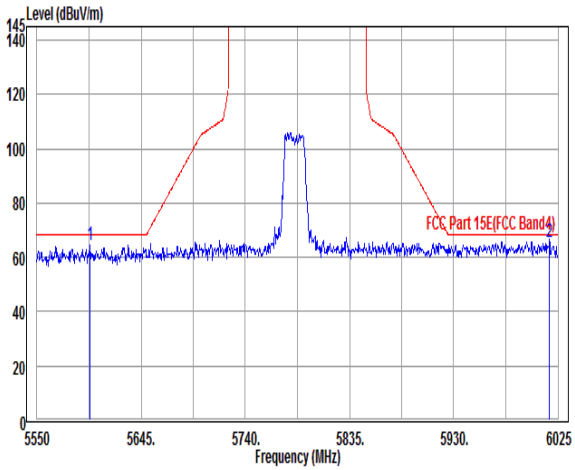

CHANNEL	TX Channel 165	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5825	94.07	88.23			35.29	16.83	46.28	135	125	Average
5825	102.7	96.86			35.29	16.83	46.28	135	125	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5825	96.31	90.47			35.29	16.83	46.28	100	36	Average
5825	104.46	98.62			35.29	16.83	46.28	100	36	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.

OOBE DATA

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5597.98	65.29	61.2	68.3	-3.01	35.02	15.35	46.28	135	125	Peak
5973.23	**67.29**	**60.3**	**68.3**	**-1.01**	**35.47**	**17.8**	**46.28**	**135**	**125**	**Peak**
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5597.98	65.29	61.2	68.3	-3.01	35.02	15.35	46.28	100	36	Peak
5983.68	67.2	60.14	68.3	-1.1	35.48	17.86	46.28	100	36	Peak

CH 165

Horiontal

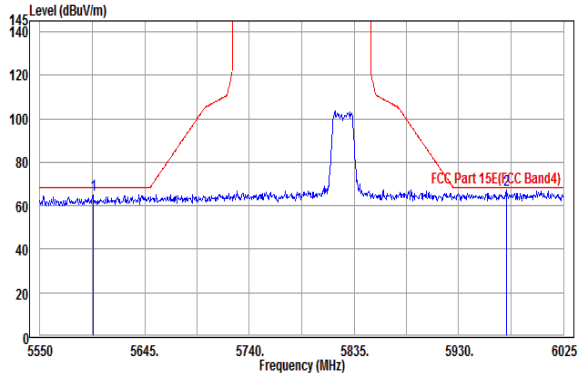

Vertical

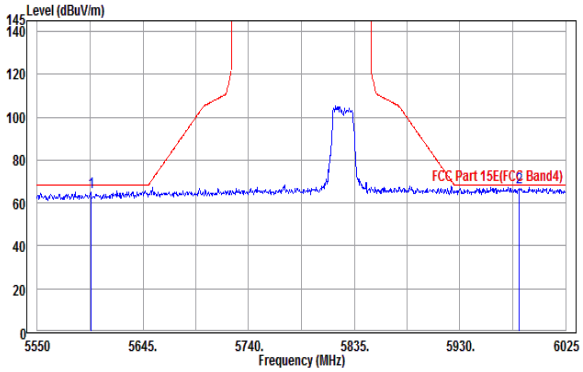

802.11n (40MHz)

CHANNEL	TX Channel 151	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	84.3	79			35.21	16.37	46.28	100	135	Average
5755	94.67	89.37			35.21	16.37	46.28	100	135	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	87.18	81.88			35.21	16.37	46.28	100	30	Average
5755	97.2	91.9			35.21	16.37	46.28	100	30	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.

OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5624.1	64.46	60.17	68.3	-3.84	35.05	15.52	46.28	100	135	Peak
5981.78	67.07	60.02	68.3	-1.23	35.48	17.85	46.28	100	135	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5596.08	65.08	61	68.3	-3.22	35.02	15.34	46.28	100	30	Peak
5972.28	66.9	59.92	68.3	-1.4	35.47	17.79	46.28	100	30	Peak

CH 151

Horiontal

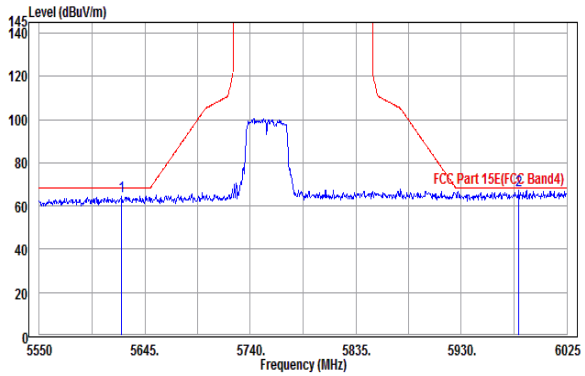

Vertical

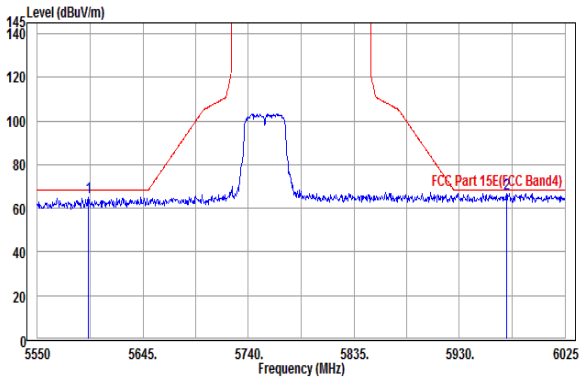

CHANNEL	TX Channel 159	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5795	85.84	80.24			35.25	16.63	46.28	100	140	Average
5795	95.19	89.59			35.25	16.63	46.28	100	140	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	**EMISSION LEVEL (dBuV/m)**	**READ LEVEL (dBuV)**	**LIMIT (dBuV/m)**	**MARGIN (dB)**	**ANTENNA FACTOR (dB /m)**	**CABLE LOSS (dB)**	**PREAMP FACTOR (dB)**	**ANTENNA HEIGHT (cm)**	**TABLE ANGLE (Degree)**	**REMARK**
5795	88.87	83.27			35.25	16.63	46.28	100	40	Average
5795	98.16	92.56			35.25	16.63	46.28	100	40	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.

OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5568.05	63.52	59.67	68.3	-4.78	34.98	15.15	46.28	100	140	Peak
6007.43	66.61	59.45	68.3	-1.69	35.5	17.94	46.28	100	140	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5597.5	65.34	61.25	68.3	-2.96	35.02	15.35	46.28	100	40	Peak
5958.98	66.98	60.11	68.3	-1.32	35.45	17.7	46.28	100	40	Peak

CH 159

Horiontal	Vertical
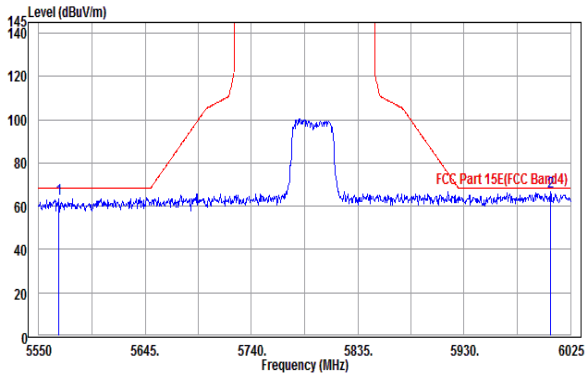	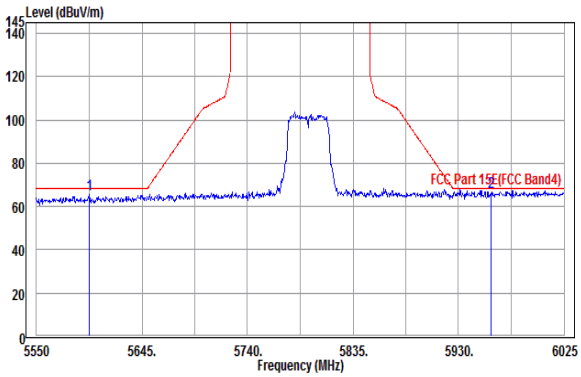

802.11ac (80MHz)

CHANNEL	TX Channel 155	**DETECTOR FUNCTION**	Peak (PK) Average (AV)
FREQUENCY RANGE	1GHz ~ 40GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	85.27	79.82			35.23	16.5	46.28	100	125	Average
5775	94.38	88.93			35.23	16.5	46.28	100	125	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	86.47	81.02			35.23	16.5	46.28	100	35	Average
5775	97.59	92.14			35.23	16.5	46.28	100	35	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
   Margin value = Emission level – Limit value.
2. 5775MHz: Fundamental frequency.

OOBE DATA

802.11ac (80MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5594.18	63.93	59.88	68.3	-4.37	35.01	15.32	46.28	100	125	Peak
5980.83	65.88	58.84	68.3	-2.42	35.48	17.84	46.28	100	125	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5595.6	63.45	59.39	68.3	-4.85	35.01	15.33	46.28	100	35	Peak
6012.18	65.72	58.58	68.3	-2.58	35.5	17.92	46.28	100	35	Peak

CH 155

Horiontal	Vertical
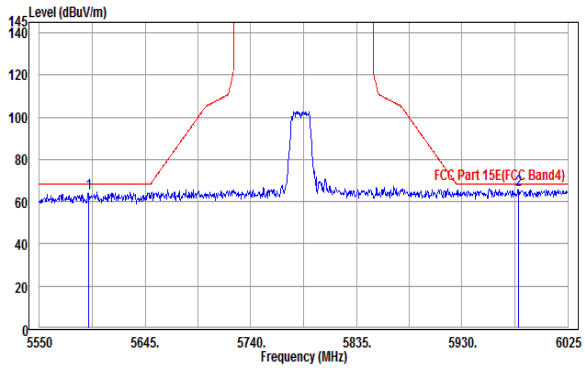	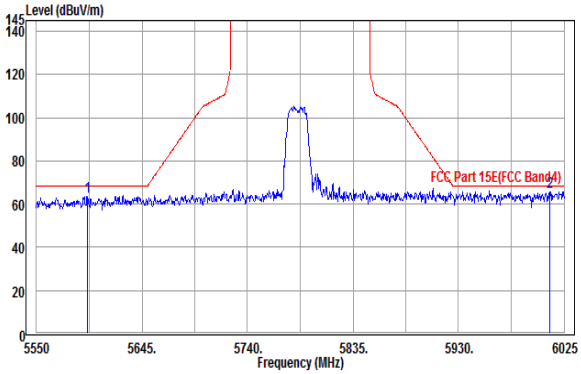

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Jun. 28,17	Jun. 27,18
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Sep. 18,17	Sep. 17,18

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES

a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.

b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

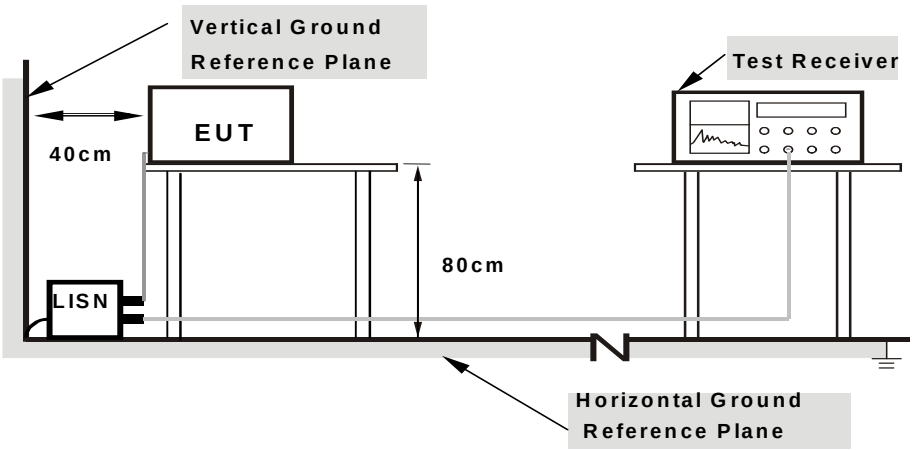

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.6.

3.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA：

Frequency Range	150KHz ~ 30MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	**Environmental Conditions**	24deg. C, 55RH
Tested By	Jocan Guo	**Test Date**	2017/11/14

Frequency (MHz)	QuasiPeak (dB¦ÌV)	CAverage (dB¦ÌV)	Limit (dB¦ÌV)	Margin (dB)	Line	Filter	Corr. (dB)
0.162000	---	28.28	55.36	-27.08	L	ON	9.6
0.162000	42.77	---	65.36	-22.59	L	ON	9.6
0.188000	---	24.43	54.12	-29.69	L	ON	9.7
0.188000	39.52	---	64.12	-24.60	L	ON	9.7
0.488000	---	21.25	46.20	-24.95	L	ON	9.7
0.488000	32.21	---	56.20	-23.99	L	ON	9.7
1.692000	---	12.06	46.00	-33.94	L	ON	9.7
1.692000	23.01	---	56.00	-32.99	L	ON	9.7
2.248000	---	13.10	46.00	-32.90	L	ON	9.7
2.248000	23.00	---	56.00	33.00	L	ON	9.7
14.300000	---	24.39	50.00	-25.61	L	ON	9.9
14.300000	32.41	---	60.00	-27.59	L	ON	9.9

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

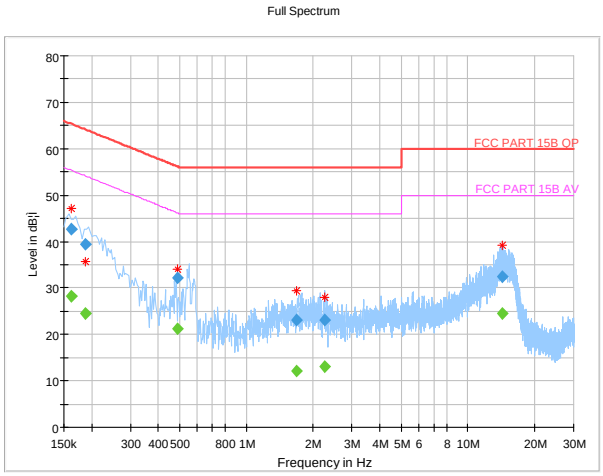

Frequency Range	150KHz ~ 30MHz	**Detector Function & Resolution Bandwidth**	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	**Environmental Conditions**	24deg. C, 55RH
Tested By	Jocan Guo	**Test Date**	2017/11/14

Frequency (MHz)	QuasiPeak (dB¦ÌV)	CAverage (dB¦ÌV)	Limit (dB¦ÌV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158000	---	22.50	55.57	-33.07	N	ON	10.1
0.158000	35.48	---	65.57	-30.09	N	ON	10.1
0.396000	---	20.44	47.94	-27.50	N	ON	10.1
0.396000	30.53	---	57.94	-27.41	N	ON	10.1
0.584000	---	20.24	46.00	-25.76	N	ON	10.1
0.584000	32.07	---	56.00	-23.93	N	ON	10.1
4.852000	---	14.90	46.00	-31.10	N	ON	9.8
4.852000	27.98	---	56.00	-28.02	N	ON	9.8
9.900000	---	18.85	50.00	-31.15	N	ON	9.9
9.900000	28.83	---	60.00	-31.17	N	ON	9.9
13.928000	---	25.64	50.00	-24.36	N	ON	9.9
13.928000	33.21	---	60.00	-26.79	N	ON	9.9

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

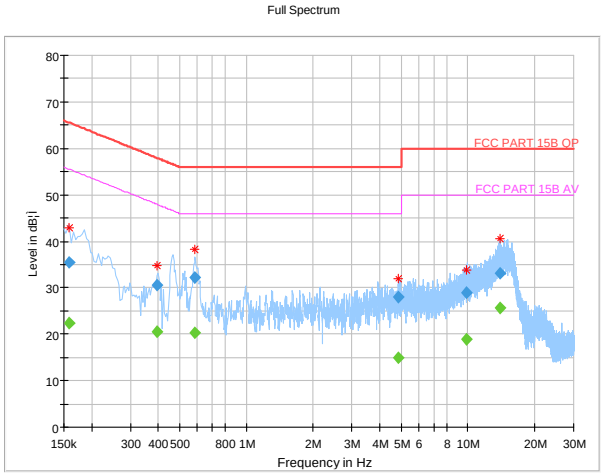

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≦125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

NOTE: Where B is the 26dB emission bandwidth in MHz.

3.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

802.11a, 802.11n (20MHz), 802.11n (40MHz) TEST CONFIGURATION

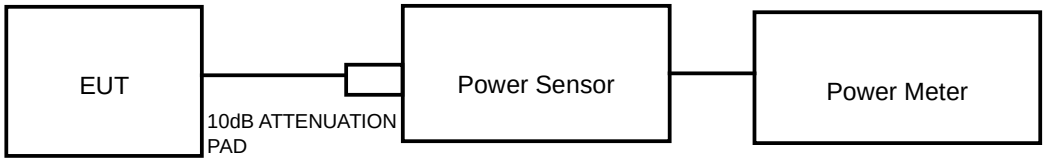

11ac TEST CONFIGURATION

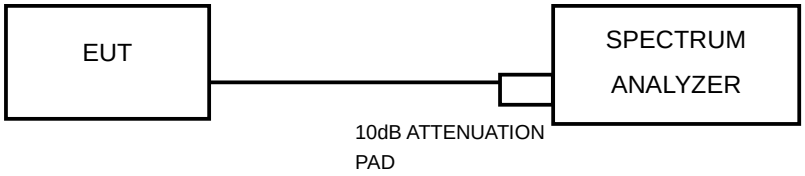

FOR 26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Mar. 01,17	Feb. 28,18
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Mar. 01,17	Feb. 28,18
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510332	Mar. 01,17	Feb. 28,18
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 01,17	Feb. 28,18

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.4 TEST PROCEDURE

FOR POWER MEASUREMENT

For 802.11a, 802.11n (20MHz), 802.11n (40MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For 802.11ac (80MHz)

1. Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
2. Set sweep trigger to “free run”.
3. Set RBW = 1 MHz.
4. Set VBW ≥ 3 MHz
5. Number of points in sweep ≥ 2 Span / RBW.
6. Sweep time ≤ (number of points in sweep) * T
7. Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
8. Detector = RMS.
9. Trace mode = max hold.
10. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW ≥ 3 · RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

FOR 26dB BANDWIDTH

1) Set RBW = approximately 1% of the emission bandwidth.
2) Set the VBW > RBW.
3) Detector = Peak.
4) Trace mode = max hold.
5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

3.3.7 TEST RESULTS

OUTPUT POWER:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	13.24	21.086	24	PASS
40	5200	13.14	20.606	24	PASS
48	5240	13.23	21.038	24	PASS
52	5260	13.25	21.135	24	PASS
60	5300	13.29	21.330	24	PASS
64	5320	13.12	20.512	24	PASS
100	5500	12.99	19.907	24	PASS
116	5580	13.25	21.135	24	PASS
140	5700	13.21	20.941	24	PASS
149	5745	13.25	21.135	30	PASS
157	5785	13.29	**21.330**	30	PASS
165	5825	13.12	20.512	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	13.33	21.528	24	PASS
40	5200	13.15	20.654	24	PASS
48	5240	13.17	20.749	24	PASS
52	5260	13.25	21.135	24	PASS
60	5300	13.18	20.797	24	PASS
64	5320	13.10	20.417	24	PASS
100	5500	13.07	20.277	24	PASS
116	5580	13.53	22.542	24	PASS
140	5700	13.33	21.528	24	PASS
149	5745	13.08	20.324	30	PASS
157	5785	13.01	19.999	30	PASS
165	5825	13.15	20.654	30	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
38	5190	13.58	**22.803**	24	PASS
46	5230	13.41	21.928	24	PASS
54	5270	13.43	**22.029**	24	PASS
62	5310	13.39	21.827	24	PASS
102	5510	13.69	**23.388**	24	PASS
110	5550	13.63	23.067	24	PASS
134	5670	13.54	22.594	24	PASS
151	5755	13.11	20.464	30	PASS
165	5825	13.17	20.749	30	PASS

802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER w/o Duty Factor (dBm)	Duty Factor	AVERAGE POWER with Duty Factor (dBm)	AVERAGE POWER (mW)	POWER LIMIT (dBm)	PASS/FAIL
42	5210	9.91	2.71	12.62	18.281	24	PASS
58	5290	9.97	2.71	12.68	18.535	24	PASS
106	5530	9.94	2.71	12.65	18.408	24	PASS
155	5775	9.87	2.71	12.58	18.113	30	PASS

SPECTRUM PLOT OF 802.11ac (80MHz)

CH 42

CH 58

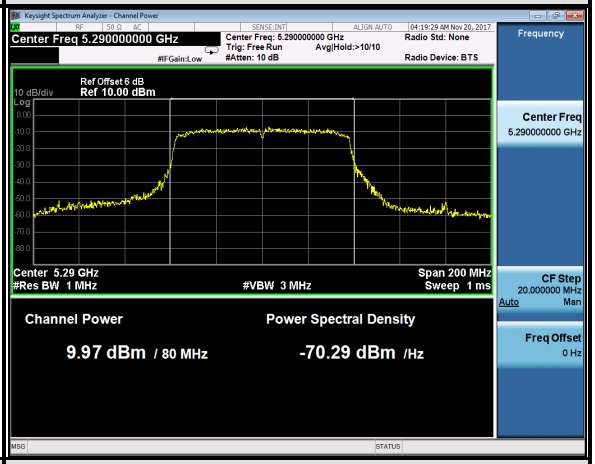

CH 106

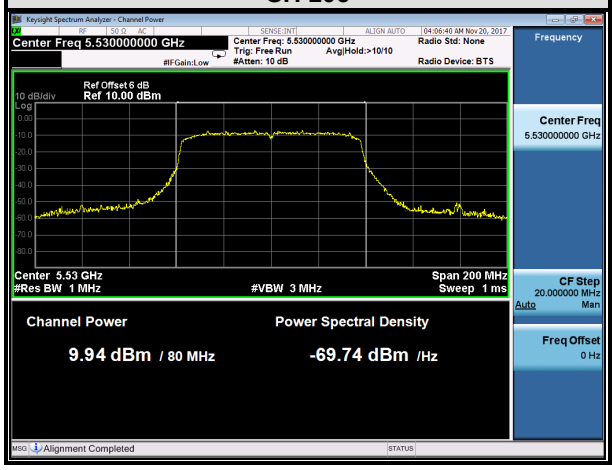

CH 155

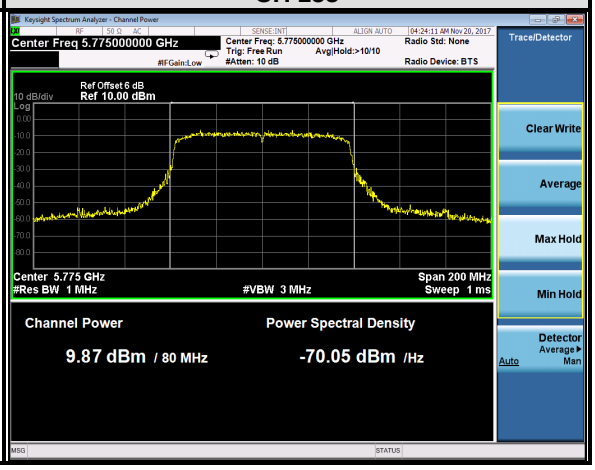

99% OCCUPIED BANDWIDTH & 26dB BANDWIDTH/6dB BANDWIDTH:

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	16.98	22.36	PASS
40	5200	16.92	22.22	PASS
48	5240	16.92	22.31	PASS
52	5260	16.92	22.11	PASS
60	5300	17.04	22.23	PASS
64	5320	16.86	22.39	PASS
100	5500	16.92	22.12	PASS
116	5580	16.92	22.41	PASS
140	5700	16.92	22.69	PASS
CHANNEL	**CHANNEL FREQUENCY (MHz)**	**99% OCCUPIED BANDWIDTH**	**6dB BANDWIDTH (MHz)**	**PASS/FAIL**
149	5745	16.86	16.36	PASS
157	5785	16.74	16.35	PASS
165	5825	16.80	16.34	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
36	5180	18.00	22.78	PASS
40	5200	18.00	22.57	PASS
48	5240	18.00	22.71	PASS
52	5260	18.00	22.93	PASS
60	5300	17.94	22.98	PASS
64	5320	18.12	22.87	PASS
100	5500	18.00	22.64	PASS
116	5580	18.00	22.64	PASS
140	5700	18.00	22.80	PASS
CHANNEL	**CHANNEL FREQUENCY (MHz)**	**99% OCCUPIED BANDWIDTH**	**6dB BANDWIDTH (MHz)**	**PASS/FAIL**
149	5745	17.94	17.60	PASS
157	5785	17.88	17.57	PASS
165	5825	17.88	17.57	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
38	5190	36.36	44.73	PASS
46	5230	36.36	45.25	PASS
54	5270	36.48	45.23	PASS
62	5310	36.30	45.47	PASS
102	5510	36.30	45.64	PASS
110	5550	36.60	46.97	PASS
134	5670	36.30	45.51	PASS
CHANNEL	**CHANNEL FREQUENCY (MHz)**	**99% OCCUPIED BANDWIDTH**	**6dB BANDWIDTH (MHz)**	**PASS/FAIL**
151	5755	36.18	35.10	PASS
159	5795	36.18	35.03	PASS

802.11ac (80MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH	26dB BANDWIDTH (MHz)	PASS/FAIL
42	5210	74.88	84.76	PASS
58	5290	74.76	84.70	PASS
106	5530	74.88	85.17	PASS
CHANNEL	**CHANNEL FREQUENCY (MHz)**	**99% OCCUPIED BANDWIDTH**	**6dB BANDWIDTH (MHz)**	**PASS/FAIL**
155	5775	74.76	72.65	PASS

For U-NII-1:

SPECTRUM PLOT OF WORST VALUE of 99% OCCUPIED BANDWIDTH	
802.11a	**802.11n (20MHz)**
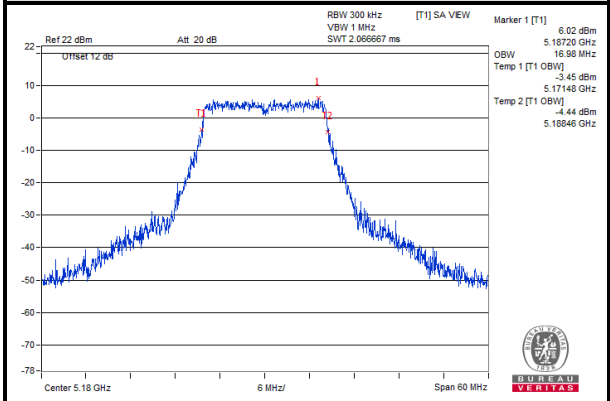	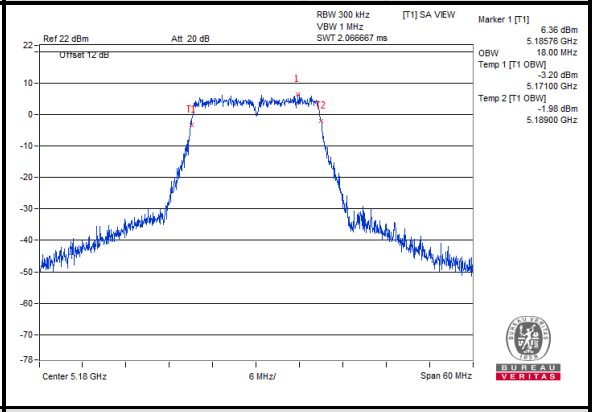
802.11n (40MHz)	**802.11ac (80MHz)**
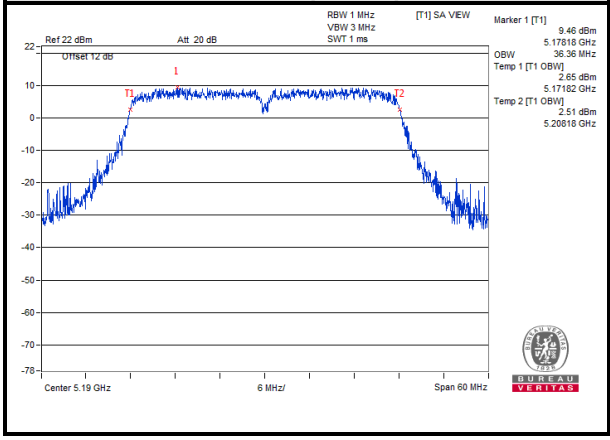	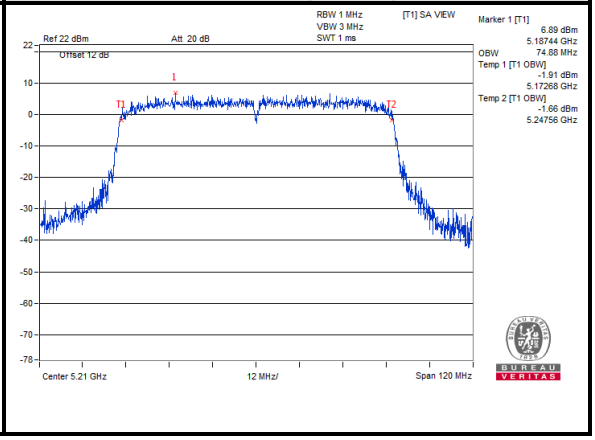

SPECTRUM PLOT OF WORST VALUE of 26dB Bandwidth

802.11a

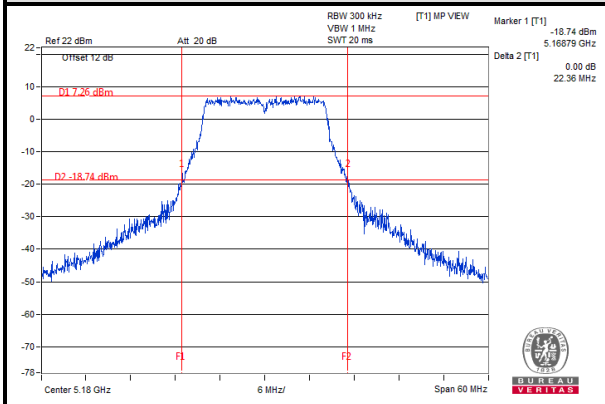

802.11n (20MHz)

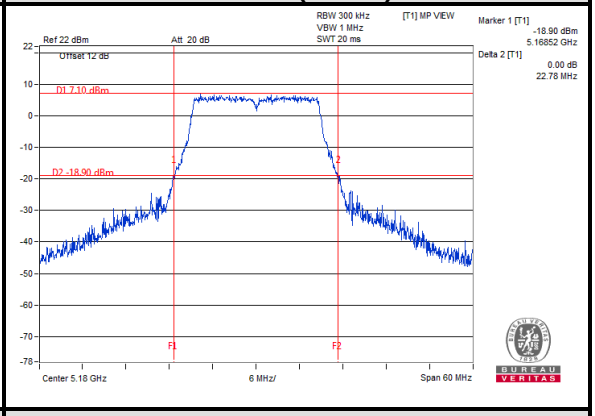

802.11n (40MHz)

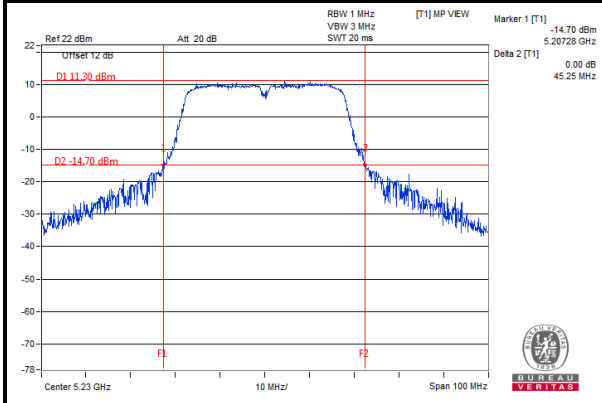

802.11ac (80MHz)

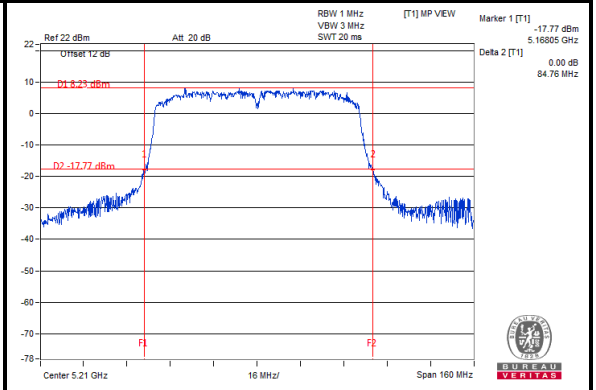

For U-NII-2A:

SPECTRUM PLOT OF WORST VALUE of 99% OCCUPIED BANDWIDTH	
802.11a	**802.11n (20MHz)**
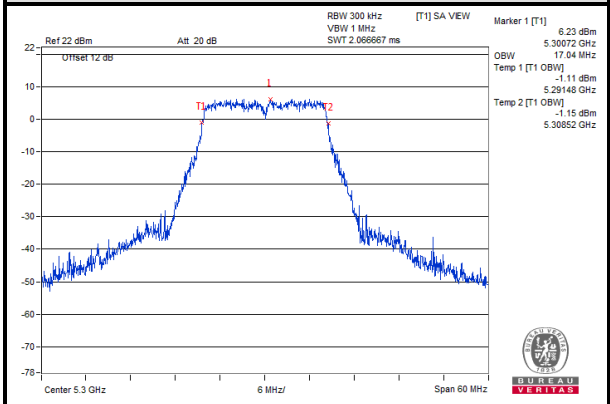	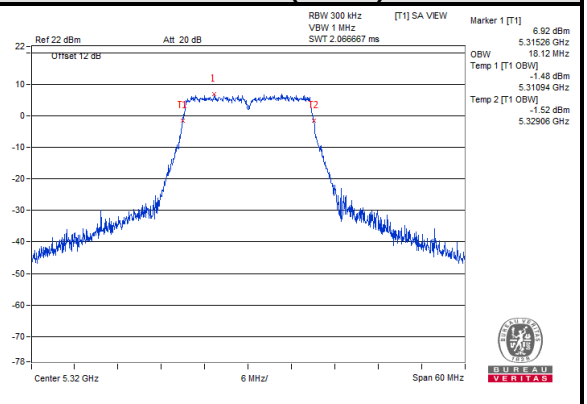
802.11n (40MHz)	**802.11ac (80MHz)**
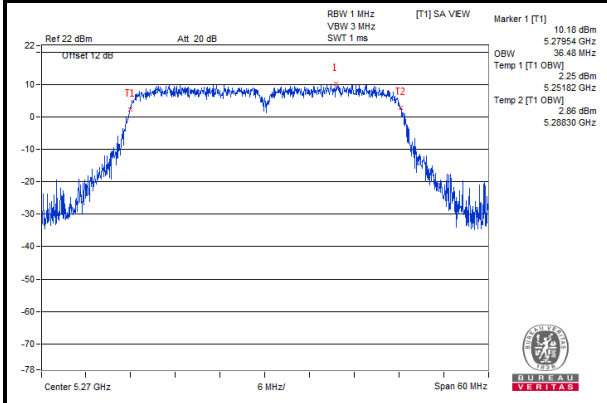	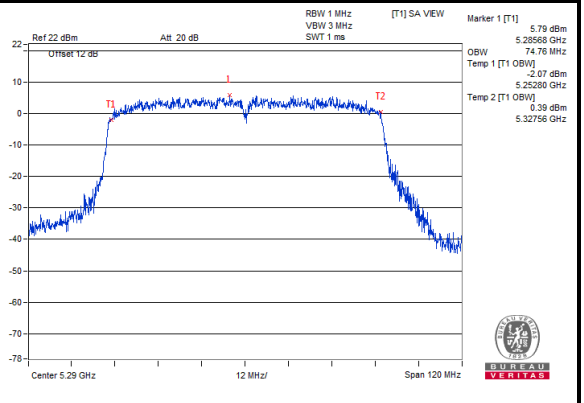

SPECTRUM PLOT OF WORST VALUE of 26dB Bandwidth

802.11a

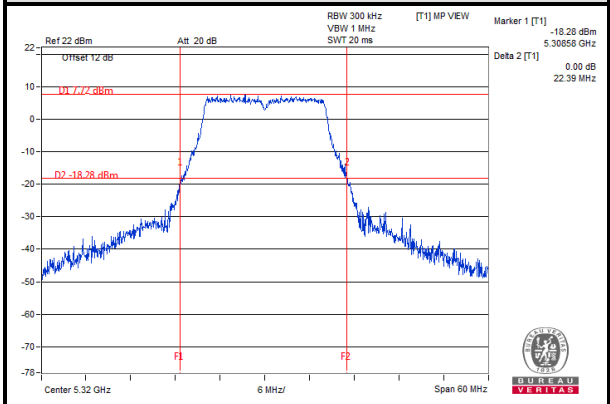

802.11n (20MHz)

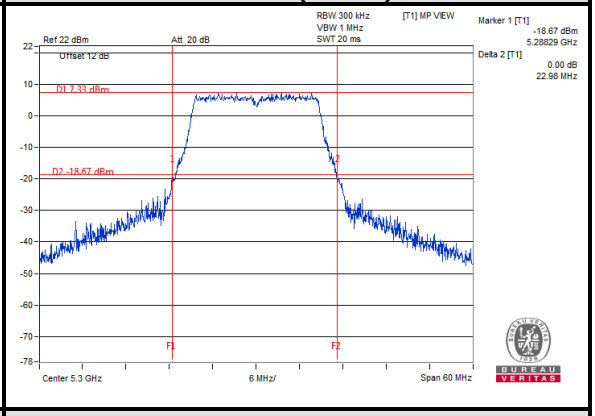

802.11n (40MHz)

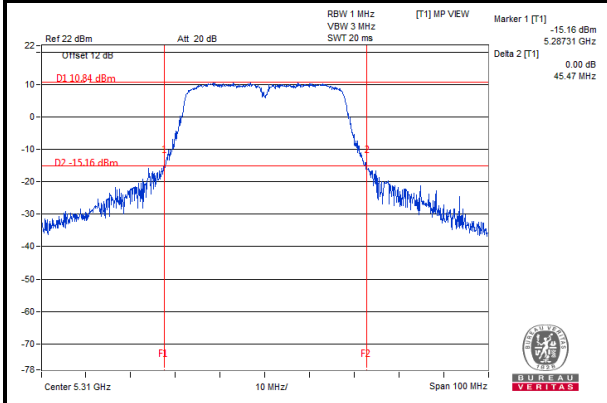

802.11ac (80MHz)

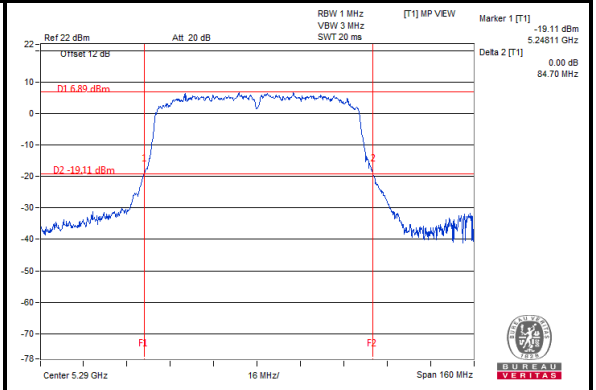

For U-NII-2C:

SPECTRUM PLOT OF WORST VALUE of 99% OCCUPIED BANDWIDTH	
802.11a	**802.11n (20MHz)**
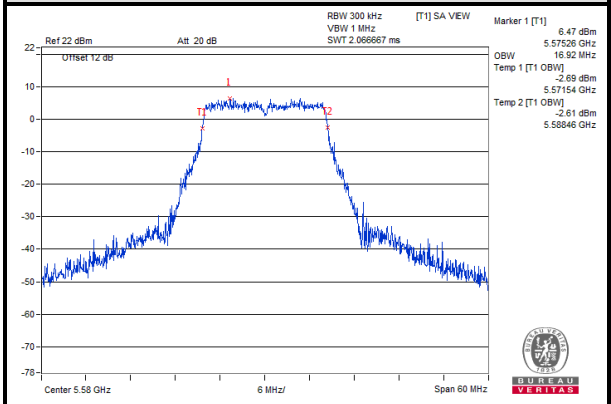	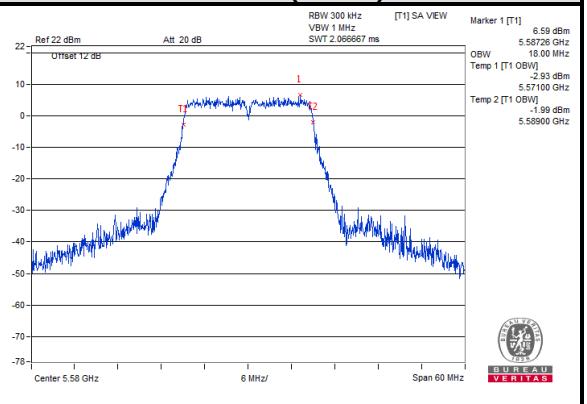
802.11n (40MHz)	**802.11ac (80MHz)**
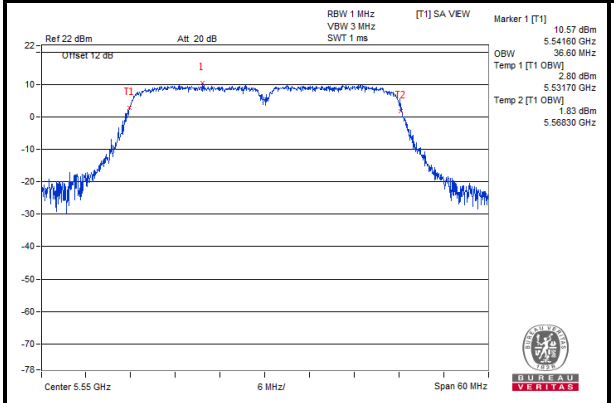	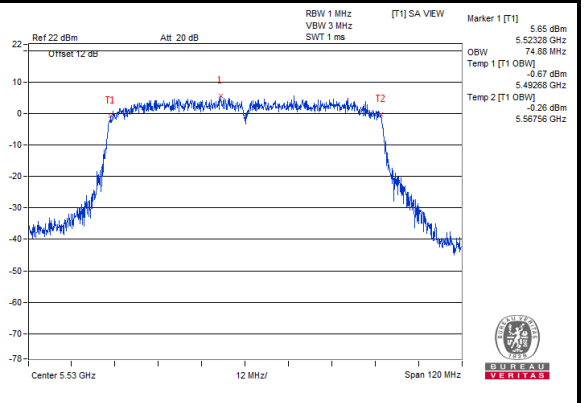

SPECTRUM PLOT OF WORST VALUE of 26dB Bandwidth

802.11a

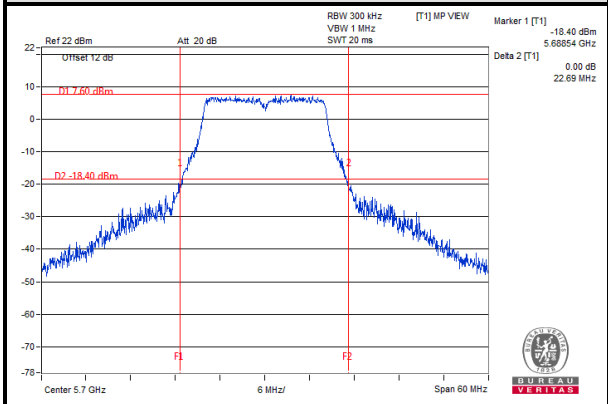

802.11n (20MHz)

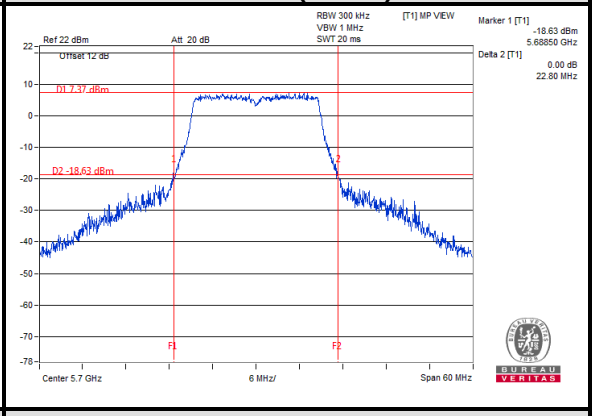

802.11n (40MHz)

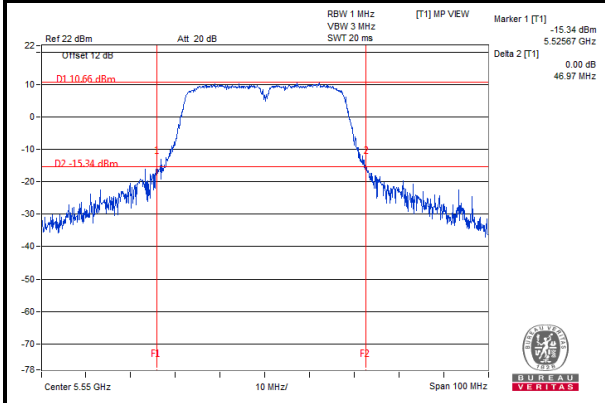

802.11ac (80MHz)

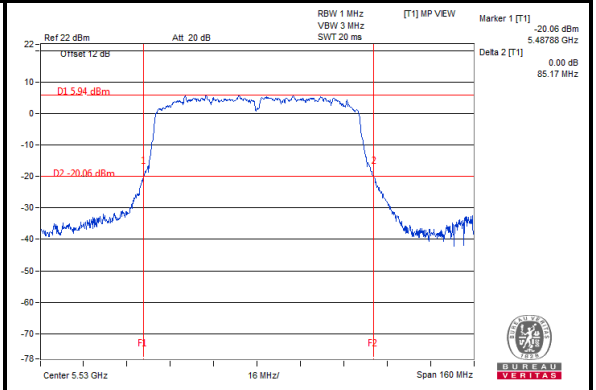

For U-NII-3:

SPECTRUM PLOT OF WORST VALUE of 99% OCCUPIED BANDWIDTH	
802.11a	**802.11n (20MHz)**
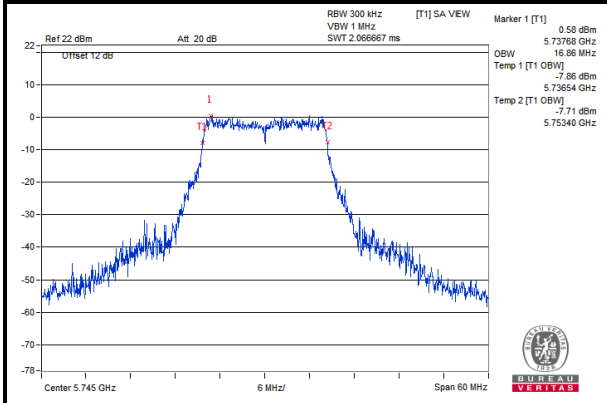	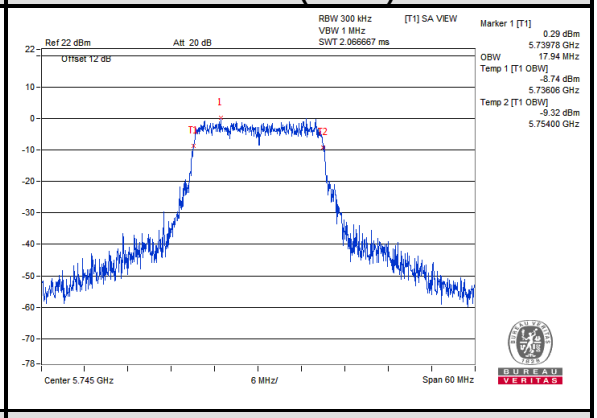
802.11n (40MHz)	**802.11ac (80MHz)**
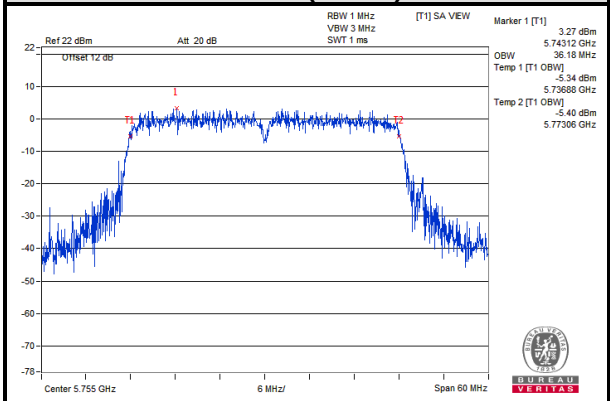	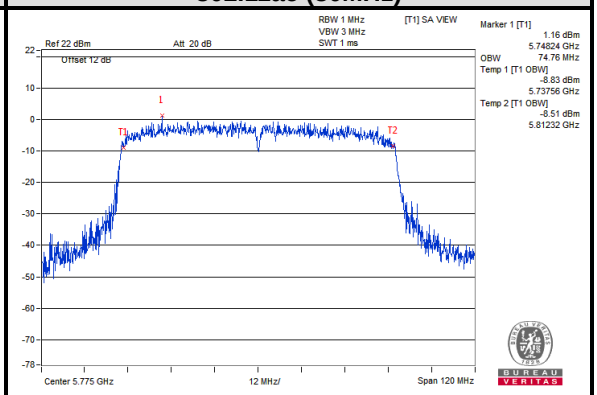

SPECTRUM PLOT OF WORST VALUE of 6dB Bandwidth

802.11a

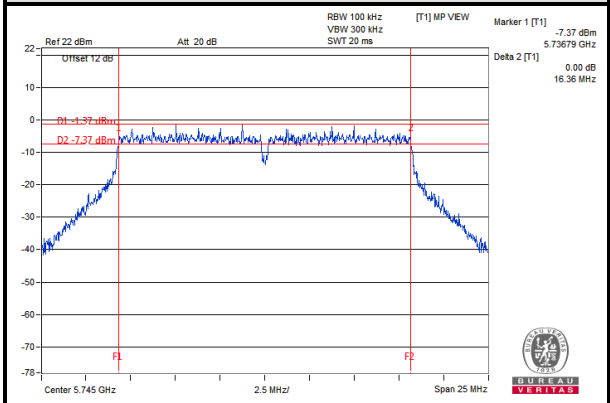

802.11n (20MHz)

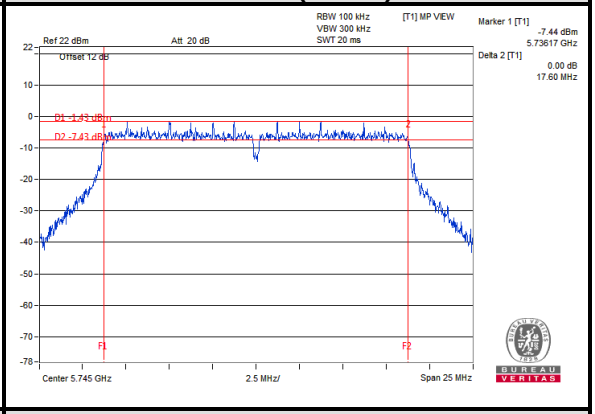

802.11n (40MHz)

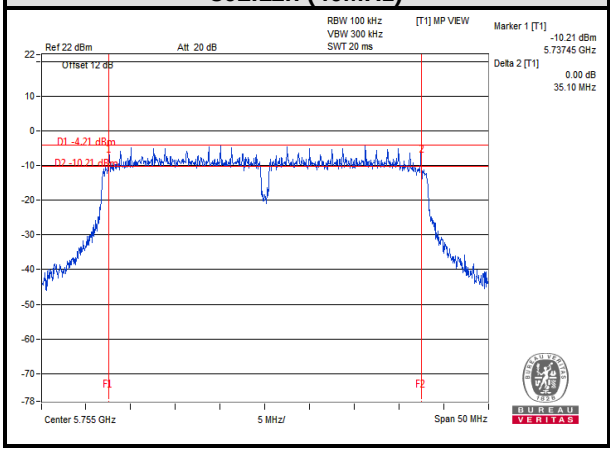

802.11ac (80MHz)

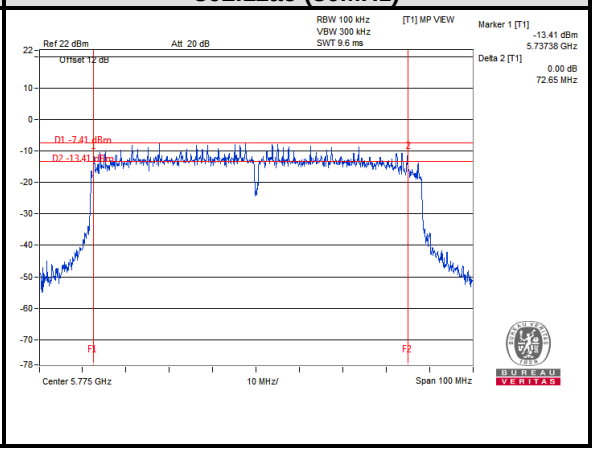

3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

Using method SA-2

1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
2) Set RBW = 1 MHz, Set VBW ≥ 3 MHz, Detector = RMS
3) Set Channel power measure = 1MHz
4) Sweep time = auto, trigger set to “free run”.
5) Trace average at least 100 traces in power averaging mode.
6) Add 10 log (1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
7) Record the max value

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.6.

3.4.7 TEST RESULTS

For U-NII-1 & U-NII-2A:

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	2.16	0.66	2.82	11	PASS
40	5200	2.60	0.66	3.26	11	PASS
48	5240	2.74	0.66	3.40	11	PASS
52	5260	3.11	0.66	3.77	11	PASS
60	5300	2.94	0.66	3.6	11	PASS
64	5320	2.89	0.66	3.55	11	PASS
100	5500	2.75	0.66	3.41	11	PASS
116	5580	8.93	0.66	9.59	11	PASS
140	5700	2.93	0.66	3.59	11	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
36	5180	2.60	0.71	3.31	11	PASS
40	5200	2.39	0.71	3.10	11	PASS
48	5240	2.61	0.71	3.32	11	PASS
52	5260	2.72	0.71	3.43	11	PASS
60	5300	2.71	0.71	3.42	11	PASS
64	5320	2.68	0.71	3.39	11	PASS
100	5500	2.58	0.71	3.29	11	PASS
116	5580	2.42	0.71	3.13	11	PASS
140	5700	2.85	0.71	3.56	11	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
38	5190	-0.24	1.26	1.02	11	PASS
46	5230	-0.23	1.26	1.03	11	PASS
54	5270	0.12	1.26	1.38	11	PASS
62	5310	-0.02	1.26	1.24	11	PASS
102	5510	-0.39	1.26	0.87	11	PASS
110	5550	-0.48	1.26	0.78	11	PASS
134	5670	-0.67	1.26	0.59	11	PASS

802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	Duty Factor	PSD with Duty Factor (dBm/MHz)	MAXIMUM LIMIT (dBm/MHz)	PASS/FAIL
42	5210	6.65	2.71	9.36	11	PASS
58	5290	5.44	2.71	8.15	11	PASS
106	5530	4.43	2.71	7.14	11	PASS

For U-NII-3:

802.11a

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	7.81	4.80	0.66	5.46	30	PASS
157	5785	7.10	4.09	0.66	4.75	30	PASS
165	5825	7.30	4.29	0.66	4.95	30	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
149	5745	7.71	4.70	0.71	5.41	30	PASS
157	5785	7.37	4.36	0.71	5.07	30	PASS
165	5825	6.45	3.44	0.71	4.15	30	PASS

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
151	5755	4.46	1.45	1.26	2.71	30	PASS
159	5795	4.04	1.03	1.26	2.29	30	PASS

802.11ac (80MHz)

CHANNEL	FREQUENCY (MHz)	PSD w/o Duty Factor (dBm/MHz)	PSD w/o Duty Factor (dBm/500kHz)	Duty Factor	PSD with Duty Factor (dBm/500kHz)	LIMIT (dBm/500kHz)	PASS /FAIL
155	5775	1.08	-1.93	2.71	0.78	30	PASS

For 5180~5240MHz

PSD w/o Duty Factor	
802.11a	802.11n (20MHz)
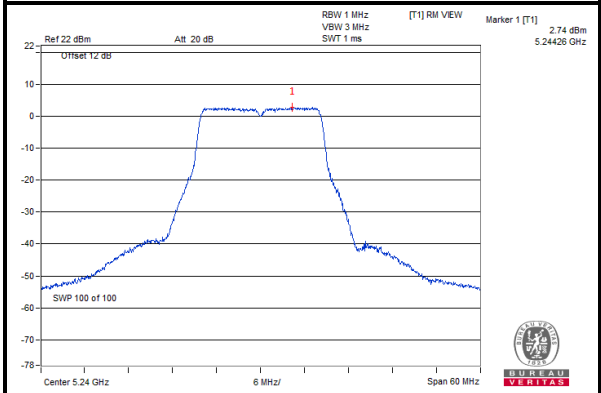	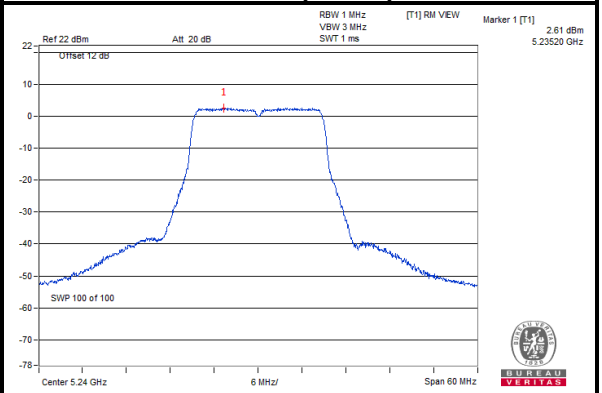
802.11n (40MHz)	802.11ac (80MHz)
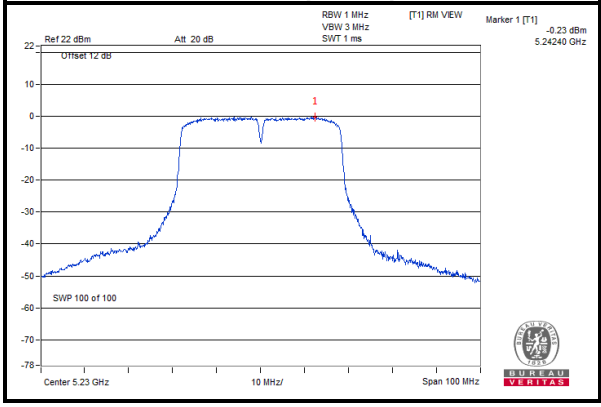	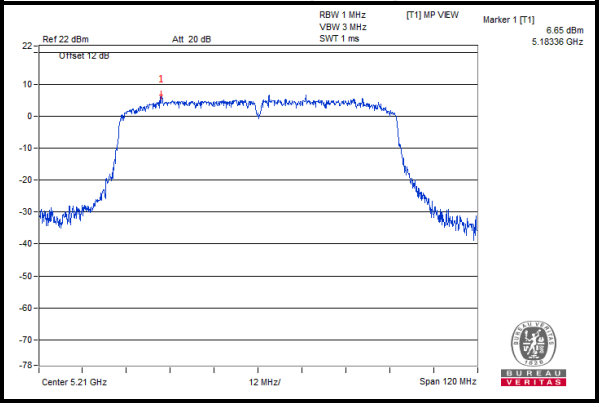

For 5260~5320MHz

PSD w/o Duty Factor	
802.11a	**802.11n (20MHz)**
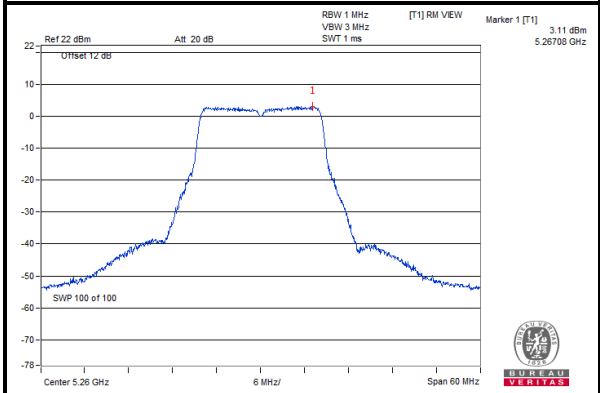	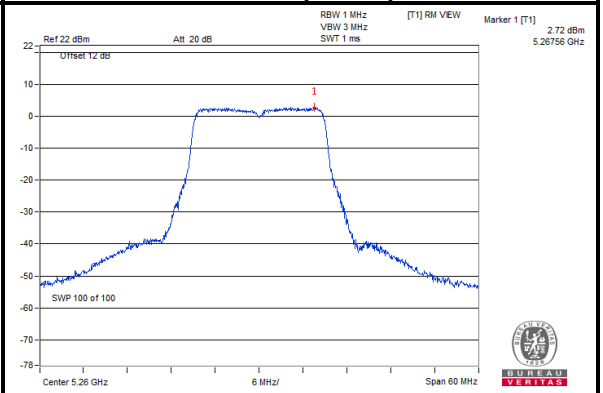
802.11n (40MHz)	**802.11ac (80MHz)**
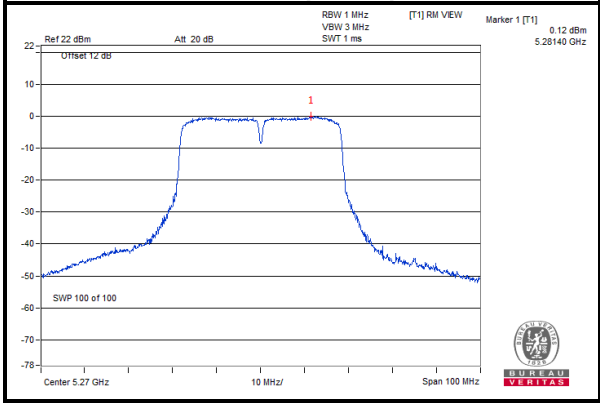	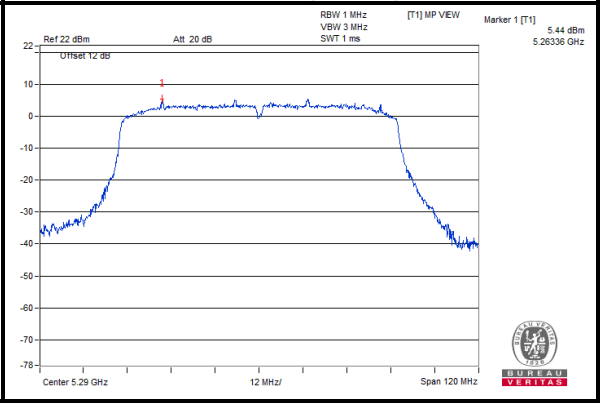

For 5500~5700MHz

PSD w/o Duty Factor	
802.11a	802.11n (20MHz)
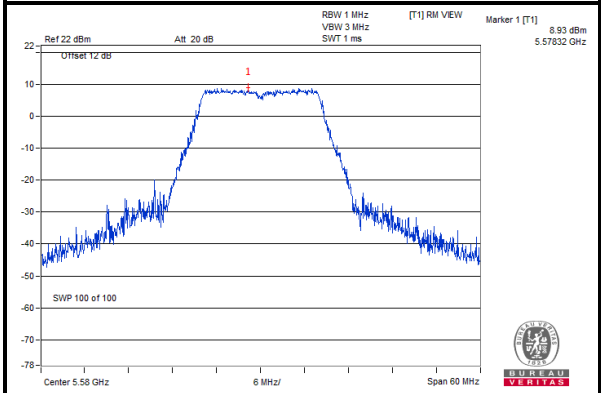	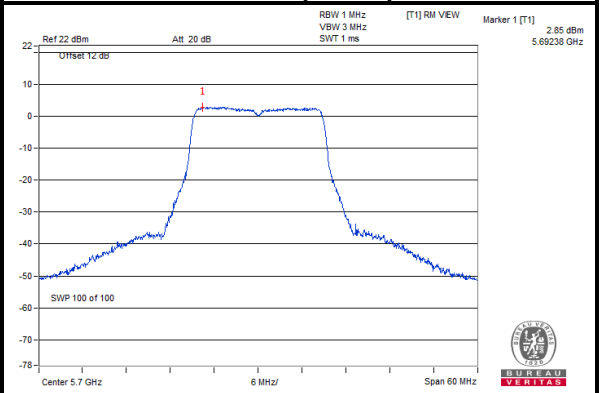
802.11n (40MHz)	802.11ac (80MHz)
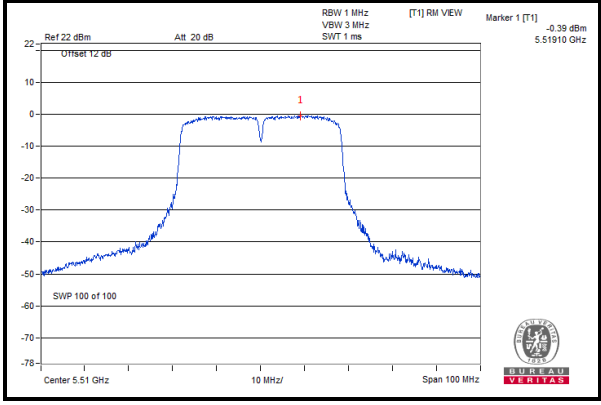	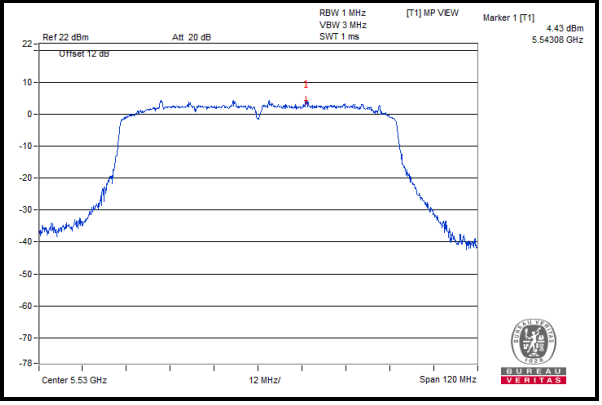

For 5745~5825MHz

PSD w/o Duty Factor	
802.11a	**802.11n (20MHz)**
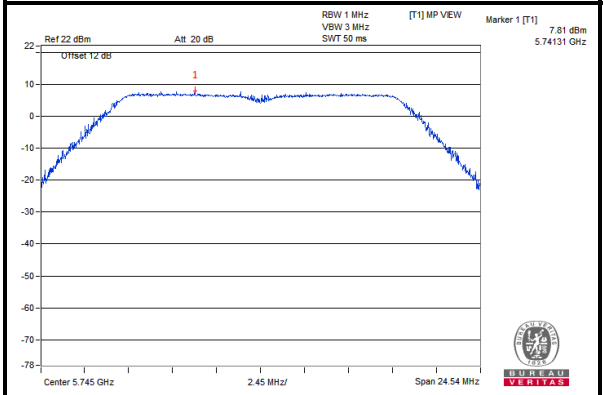	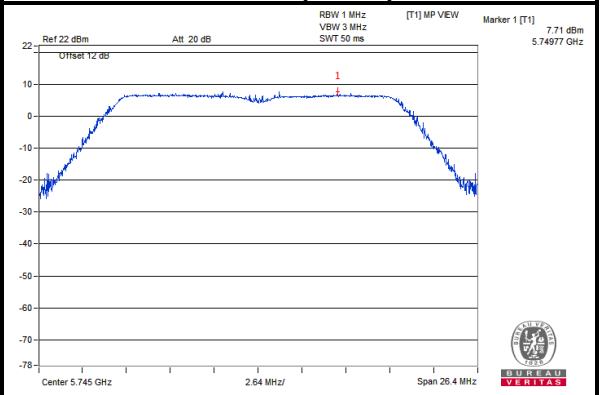
802.11n (40MHz)	**802.11ac (80MHz)**
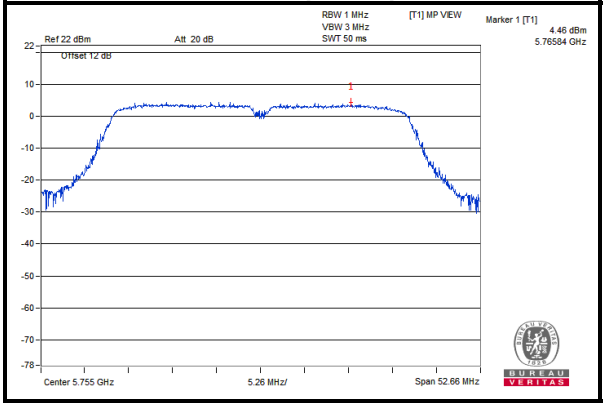	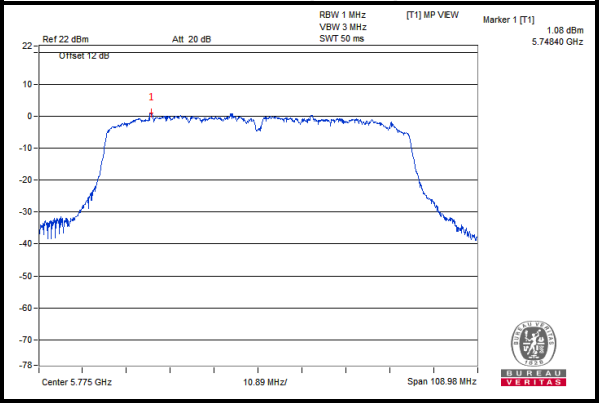

3.5 FREQUENCY STABILITY

3.5.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

3.5.2 TEST SETUP

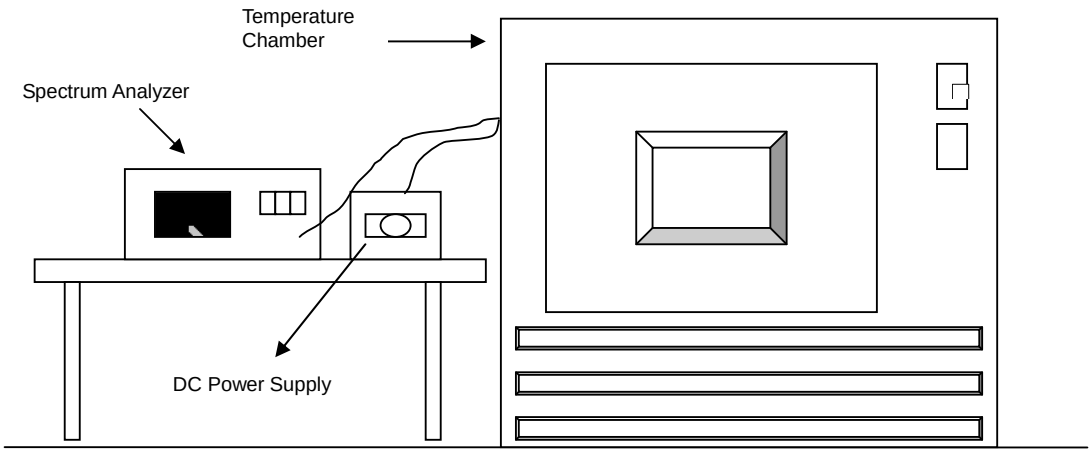

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.4 TEST PROCEDURE

a. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.

b. Turn the EUT on and couple its output to a spectrum analyzer.

c. Turn the EUT off and set the chamber to the highest temperature specified.

d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.

e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.

f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.

3.5.7 TEST RESULTS

FREQUEMCY STABILITY VERSUS TEMP.										RESULT
OPERATING FREQUENCY: 5180MHz										
TEMP. (℃)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5179.9911	-1.718	5179.9936	-1.236	5179.9878	-2.355	5179.9862	-2.664	PASS
40	120	5180.0081	1.564	5180.003	0.579	5180.0077	1.486	5180.0042	0.811	PASS
30	120	5180.0093	1.795	5180.0053	1.023	5180.0065	1.255	5180.0101	1.950	PASS
20	120	5180.0019	0.367	5180.001	0.193	5180.0038	0.734	5180.004	0.772	PASS
10	120	5180.0069	1.332	5180.0084	1.622	5180.0049	0.946	5180.004	0.772	PASS
0	120	5180.0278	5.367	5180.0225	4.344	5180.024	4.633	5180.0221	4.266	PASS
-10	120	5180.0049	0.946	5180.0012	0.232	5180.0008	0.154	5179.997	-0.579	PASS
-20	120	5180.0062	1.197	5180.0109	2.104	5180.0115	2.220	5180.0066	1.274	PASS
-30	120	5180.0083	1.602	5180.0118	2.278	5180.0018	0.347	5180.0097	1.873	PASS

FREQUEMCY STABILITY VERSUS VOLTAGE										RESULT
OPERATING FREQUENCY: 5180MHz										
TEMP. (℃)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5180.0023	0.444	5180.0016	0.309	5180.0033	0.637	5180.004	0.772	PASS
	120	5180.0019	0.367	5180.001	0.193	5180.0038	0.734	5180.004	0.772	PASS
	102	5180.0026	0.502	5180.0026	0.502	5180.0038	0.734	5180.0054	1.042	PASS

FREQUEMCY STABILITY VERSUS TEMP.										RESULT
OPERATING FREQUENCY: 5825MHz										
TEMP. (℃)	Power Supply (Vdc)	0 MINUTE		2 MINUTES		5 MINUTES		10 MINUTE		
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
50	120	5824.9888	-1.923	5824.9912	-1.511	5824.9954	-0.790	5824.9893	-1.837	PASS
40	120	5824.9743	-4.412	5824.9765	-4.034	5824.9778	-3.811	5824.972	-4.807	PASS
30	120	5825.0015	0.258	5825.0059	1.013	5825.0068	1.167	5825.0069	1.185	PASS
20	120	5825.0078	1.339	5825.0125	2.146	5825.0067	1.150	5825.0092	1.579	PASS
10	120	5824.9765	-4.034	5824.9776	-3.845	5824.9697	-5.202	5824.9696	-5.219	PASS
0	120	5824.9785	-3.691	5824.9795	-3.519	5824.9832	-2.884	5824.9808	-3.296	PASS
-10	120	5825.0094	1.614	5825.0072	1.236	5825.01	1.717	5825.0119	2.043	PASS
-20	120	5825.0205	3.519	5825.0136	2.335	5825.0109	1.871	5825.0206	3.536	PASS
-30	120	5824.9826	-2.987	5824.978	-3.777	5824.9796	-3.502	5824.9777	-3.828	PASS

FREQUEMCY STABILITY VERSUS VOLTAGE										RESULT
OPERATING FREQUENCY: 5180MHz										
TEMP. (℃)	Power Supply (Vdc)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE		
		Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	Measured Frequency (MHz)	Frequency Drift (ppm)	
20	138	5825.0078	1.339	5825.0138	2.369	5825.0072	1.236	5825.0076	1.305	PASS
	120	5825.0078	1.339	5825.0125	2.146	5825.0067	1.150	5825.0092	1.579	PASS
	102	5825.0076	1.305	5825.0137	2.352	5825.0077	1.322	5825.0085	1.459	PASS

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---