



# FCC TEST REPORT

**FCC ID: 2AN8NCDRZ14**

|                  |                                                                                                                                                    |
|------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:    | <b>Wireless Charger</b>                                                                                                                            |
| Trademark:       | <b>Humixx</b>                                                                                                                                      |
| Model Number:    | CDRZ14                                                                                                                                             |
| Prepared For :   | <b>Shenzhen Hui Yu E-Commerce Co., Ltd.</b>                                                                                                        |
| Address :        | No.150-3 Hao 209, Jinyun Road, Buji Street, Longgang Distric, shenzhen, Guangdong, 518116, China                                                   |
| Prepared By :    | <b>Shenzhen BCTC Testing Co., Ltd.</b>                                                                                                             |
| Address :        | BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China |
| Test Date:       | <b>Jan. 29 - Feb. 05, 2018</b>                                                                                                                     |
| Date of Report : | <b>Feb. 29, 2018</b>                                                                                                                               |
| Report No.:      | <b>BCTC-FY180100398-1E</b>                                                                                                                         |



## TABLE OF CONTENTS

|                                                          |           |
|----------------------------------------------------------|-----------|
| <b>TEST REPORT DECLARATION .....</b>                     | <b>3</b>  |
| <b>1.GENERAL INFORMATION .....</b>                       | <b>4</b>  |
| 1.1. Report information .....                            | 4         |
| 1.2. Measurement Uncertainty .....                       | 4         |
| 1.3. Test Facility.....                                  | 4         |
| 1.4. Test Uncertainty.....                               | 4         |
| <b>2.PRODUCT DESCRIPTION .....</b>                       | <b>5</b>  |
| 2.1. EUT Description.....                                | 5         |
| 2.2. Block Diagram of EUT Configuration.....             | 5         |
| 2.3. Test Conditions.....                                | 5         |
| 2.4. Description Of Support Units (Conducted Mode) ..... | 6         |
| <b>3.TEST RESULTS SUMMARY .....</b>                      | <b>6</b>  |
| <b>4.TEST EQUIPMENT USED .....</b>                       | <b>7</b>  |
| 4.1. For Conducted Emission Test .....                   | 7         |
| 4.2. For Radiated Emission Measurement.....              | 7         |
| <b>5.CONDUCTED EMISSION TEST .....</b>                   | <b>8</b>  |
| 5.1. Block Diagram of Test Setup .....                   | 8         |
| 5.2. Test Standard.....                                  | 8         |
| 5.3. Conducted Emission Limit.....                       | 8         |
| 5.4. EUT Configuration on Test.....                      | 8         |
| 5.5. Operating Condition of EUT .....                    | 9         |
| 5.6. Test Procedure.....                                 | 9         |
| 5.7. Test Result.....                                    | 9         |
| <b>6.RADIATED EMISSION MEASUREMENT .....</b>             | <b>14</b> |
| 6.1. Block Diagram of Test Setup .....                   | 14        |
| 6.2. Test Standard.....                                  | 14        |
| 6.3. EMI Test Receiver Setup .....                       | 14        |
| 6.4. Test Procedure.....                                 | 15        |
| 6.5. Test Result.....                                    | 15        |
| <b>7. EUT TEST PHOTOS.....</b>                           | <b>21</b> |
| <b>8. EUT PHOTOS .....</b>                               | <b>23</b> |



## TEST REPORT DECLARATION

Applicant : Shenzhen Hui Yu E-Commerce Co., Ltd.  
Address : No.150-3 Hao 209, Jinyun Road, Buji Street, Longgang Distric,  
shenzhen, Guangdong, 518116, China  
EUT Description : Wireless Charger  
Model Number CDRZ14


Test Standards:

### FCC Part 15 C: 2015

This device described above has been tested by BCTC, and the test results show that the equipment under And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Prepared by(Engineer): Eric Yang  
Reviewer(Supervisor): Jade Yang  
Approved(Manager): Carson Zhang





## 1. GENERAL INFORMATION

### 1.1. Report information

- 1.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that BCTC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that BCTC in any way guarantees the later performance of the product/equipment.
- 1.1.2. The sample/s mentioned in this report is/are supplied by Applicant, BCTC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 1.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through BCTC, unless the applicant has authorized BCTC in writing to do so.

### 1.2. Measurement Uncertainty

Available upon request.

### 1.3. Test Facility

|                  |                                                                                                                                                               |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Site Description |                                                                                                                                                               |
| Name of Firm     | : Shenzhen BCTC Testing Co., Ltd.                                                                                                                             |
| Site Location    | : BCTC Building & 1-2F, East of B Building,<br>Pengzhou Industrial, Fuyuan 1st Road, Qiaotou<br>Community, Fuyong Street, Bao'an District,<br>Shenzhen, China |

### 1.4. Test Uncertainty

|                               |   |         |
|-------------------------------|---|---------|
| Conducted Emission            | = | ±2.66dB |
| Uncertainty                   |   |         |
| Radiated Emission Uncertainty | = | ±4.15dB |

## 2. PRODUCT DESCRIPTION

### 2.1.EUT Description

Description : **Wireless Charger**

Applicant : **Shenzhen Hui Yu E-Commerce Co., Ltd.**  
No.150-3 Hao 209, Jinyun Road, Buji Street, Longgang Distric,  
shenzhen, Guangdong, 518116, China

Manufacturer : **Shenzhen Hui Yu E-Commerce Co., Ltd.**  
No.150-3 Hao 209, Jinyun Road, Buji Street, Longgang Distric,  
shenzhen, Guangdong, 518116, China

Trademark : **Humixx**

Model Number : CDRZ14

Serial Model : N/A


Model : N/A

Difference

Power Supply : Input: DC 5V2A/9V1.8A  
Output: DC5V1A/9V1.5A

Work Frequency : 110-205KHz

### 2.2.Block Diagram of EUT Configuration

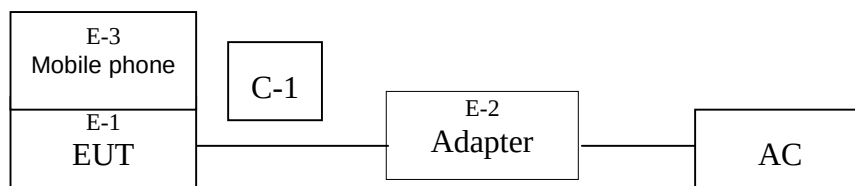

### 2.3.Test Conditions

Temperature: 23~25℃

Relative Humidity: 55~63 %



## 2.4. Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment               | Mfr/Brand | Model/Type No.            | Series No. | Note                                                                                                                                 |
|------|-------------------------|-----------|---------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------|
| E-1  | <b>Wireless Charger</b> | Humixx    | CDRZ14                    | N/A        | EUT                                                                                                                                  |
| E-2  | <b>Adapter</b>          | UGreen    | CD122                     | N/A        | AC100-240V 50/60Hz 500mA<br>Output: 5V $\overline{\text{---}}$ 3A<br>9V $\overline{\text{---}}$ 2A, 12V $\overline{\text{---}}$ 1.5A |
| E-3  | <b>Mobile phone</b>     | N/A       | Samsung<br>Galaxy S7 edge | N/A        |                                                                                                                                      |
|      |                         |           |                           |            |                                                                                                                                      |

| Item | Shielded Type | Ferrite Core | Length | Note                 |
|------|---------------|--------------|--------|----------------------|
| C-1  | NO            | NO           | 0.8M   | USB cable unshielded |
|      |               |              |        |                      |
|      |               |              |        |                      |

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

## 3. TEST RESULTS SUMMARY

Table 1 Test Results Summary

| Test Items            | Test Results |
|-----------------------|--------------|
| Conducted disturbance | Pass         |
| Radiated disturbance  | Pass         |

Remark: “N/A” means “Not applicable.”



## 4. TEST EQUIPMENT USED

### 4.1. For Conducted Emission Test


| Item | Equipment     | Manufacturer | Type No. | Serial No.                 | Last calibration | Calibrated until |
|------|---------------|--------------|----------|----------------------------|------------------|------------------|
| 1    | Test Receiver | R&S          | ESCI     | 1166.5950K03-1<br>01165-ha | 2017.08.27       | 2018.08.26       |
| 2    | LISN          | SCHWARZBECK  | NSLK8127 | 8127739                    | 2017.08.27       | 2018.08.26       |
| 3    | LISN          | R&S          | NSLK8126 | 8126487                    | 2017.08.27       | 2018.08.26       |
| 4    | RF cables     | R&S          | R204     | R20X                       | 2017.08.27       | 2018.08.26       |
| 5    | Attenuator    | R&S          | ESH3-Z2  | 143206                     | 2017.08.27       | 2018.08.26       |

### 4.2. For Radiated Emission Measurement

| Item | Equipment                       | Manufacturer    | Type No.  | Serial No. | Last calibration | Calibrated until |
|------|---------------------------------|-----------------|-----------|------------|------------------|------------------|
| 5    | Horn Antenna<br>(14GHz-40GHz)   | SCHWARZBECK     | BBHA 9170 | 9170-181   | 2017.09.03       | 2018.09.02       |
| 6    | Amplifier<br>(9KHz-6GHz)        | SCHWARZBECK     | BBV9744   | 9744-0037  | 2017.08.27       | 2018.08.26       |
| 7    | Amplifier<br>(1GHz-18GHz)       | SCHWARZBECK     | BBV9718   | 9718-309   | 2017.08.27       | 2018.08.26       |
| 8    | Amplifier<br>(18GHz-40GHz)      | SCHWARZBECK     | BBV 9721  | 9721-205   | 2017.08.27       | 2018.08.26       |
| 9    | Loop Antenna<br>(9KHz-30MHz)    | SCHWARZBECK     | FMZB1519B | 00014      | 2017.09.03       | 2018.09.02       |
| 10   | RF cables1<br>(9kHz-1GHz)       | R&S             | R203      | R20X       | 2017.08.27       | 2018.08.26       |
| 11   | RF cables2<br>(1GHz-40GHz)      | R&S             | R204      | R21X       | 2017.08.27       | 2018.08.26       |
| 12   | Antenna<br>connector            | Florida RF Labs | N/A       | RF 01#     | 2017.08.27       | 2018.08.26       |
| 13   | Power Metter                    | ANRITSU         | ML2487A   | 6K00001568 | 2017.08.27       | 2018.08.26       |
| 14   | Power Sensor<br>(AV)            | ANRITSU         | ML2491A   | 030989     | 2017.08.27       | 2018.08.26       |
| 15   | Signal Analyzer<br>9kHz-26.5GHz | Agilent         | N9010A    | MY48030494 | 2017.08.27       | 2018.08.26       |
| 16   | Test Receiver<br>20kHz-40GHz    | R&S             | ESU 40    | 100376     | 2017.08.27       | 2018.08.26       |
| 17   | D.C. Power<br>Supply            | LongWei         | PS-305D   | 010964729  | 2017.08.27       | 2018.08.26       |

## 5. CONDUCTED EMISSION TEST

### 5.1. Block Diagram of Test Setup

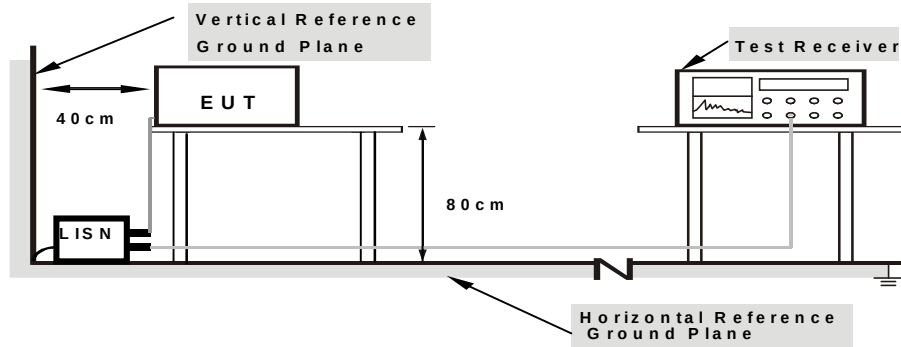

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

(EUT: **Wireless Charger** )

### 5.2. Test Standard

FCC§15.207

### 5.3. Conducted Emission Limit

| Frequency<br>MHz | Limits dB(μV)    |               |
|------------------|------------------|---------------|
|                  | Quasi-peak Level | Average Level |
| 0.15 ~ 0.50      | 66 ~ 56*         | 56 ~ 46*      |
| 0.50 ~ 5.00      | 56               | 46            |
| 5.00 ~ 30.00     | 60               | 50            |

Notes: 1. \*Decreasing linearly with logarithm of frequency.

### 5.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet FCC Part 15.207 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### 5.4.1. milestone dual

Model Number: **CDRZ14**



## 5.5.Operating Condition of EUT

5.5.1.Setup the EUT and simulators as shown in Section 5.1.

5.5.2.Turn on the power of all equipments.

5.5.3.Let the EUT work in test modes (EUT Working) and test it.

## 5.6.Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver (R&S Test Receiver ESHS30) is used to test the emissions form both sides of AC line. The bandwidth of EMI test receiver is set at 9kHz.

The bandwidth of the test receiver (R&S Test Receiver ESHS30) is set at 10KHz.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.


## 5.7.Test Result

**PASS**

Please refer to the following pages.



|                       |                                                  |                    |             |
|-----------------------|--------------------------------------------------|--------------------|-------------|
| EUT:                  | Wireless Charger                                 | Model Name :       | CDRZ14      |
| Temperature:          | 26 °C                                            | Relative Humidity: | 54%         |
| Pressure:             | 1010hPa                                          | Phase :            | L           |
| <b>Test Voltage :</b> | DC 5V For Adapter<br>(adapter intpu:AC120V/60Hz) | Test Mode:         | Normal Link |

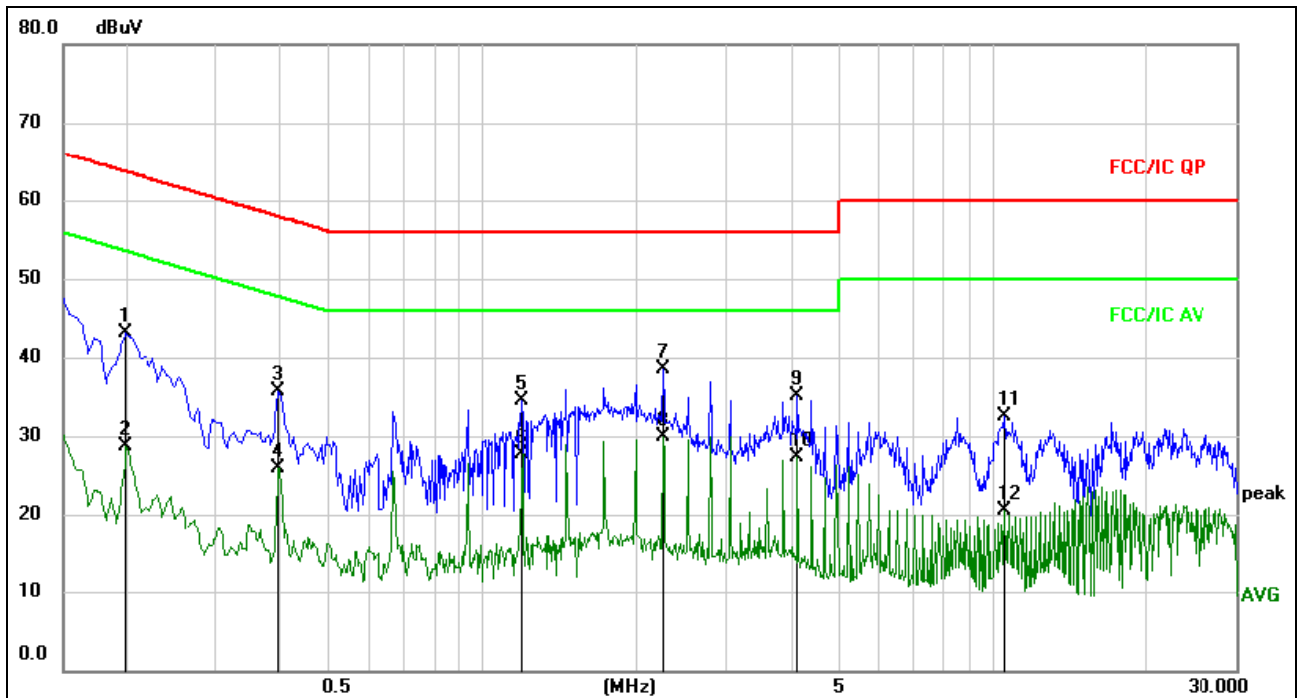


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1995       | 33.39                    | 9.65                    | 43.04                    | 63.63         | -20.59     | QP       |         |
| 2   |     | 0.1995       | 19.06                    | 9.65                    | 28.71                    | 53.63         | -24.92     | AVG      |         |
| 3   |     | 0.3975       | 26.02                    | 9.67                    | 35.69                    | 57.91         | -22.22     | QP       |         |
| 4   |     | 0.3975       | 16.30                    | 9.67                    | 25.97                    | 47.91         | -21.94     | AVG      |         |
| 5   |     | 1.1940       | 24.78                    | 9.69                    | 34.47                    | 56.00         | -21.53     | QP       |         |
| 6   |     | 1.1940       | 18.06                    | 9.69                    | 27.75                    | 46.00         | -18.25     | AVG      |         |
| 7   |     | 2.2605       | 28.77                    | 9.72                    | 38.49                    | 56.00         | -17.51     | QP       |         |
| 8   | *   | 2.2605       | 20.09                    | 9.72                    | 29.81                    | 46.00         | -16.19     | AVG      |         |
| 9   |     | 4.1235       | 25.37                    | 9.73                    | 35.10                    | 56.00         | -20.90     | QP       |         |
| 10  |     | 4.1235       | 17.56                    | 9.73                    | 27.29                    | 46.00         | -18.71     | AVG      |         |
| 11  |     | 10.5135      | 22.65                    | 9.82                    | 32.47                    | 60.00         | -27.53     | QP       |         |
| 12  |     | 10.5135      | 10.76                    | 9.82                    | 20.58                    | 50.00         | -29.42     | AVG      |         |



|                       |                                                  |                    |             |
|-----------------------|--------------------------------------------------|--------------------|-------------|
| EUT:                  | Wireless Charger                                 | Model Name. :      | CDRZ14      |
| Temperature:          | 26 °C                                            | Relative Humidity: | 54%         |
| Pressure:             | 1010hPa                                          | Phase :            | N           |
| <b>Test Voltage :</b> | DC 5V For Adapter<br>(adapter intpu:AC120V/60Hz) | Test Mode:         | Normal Link |

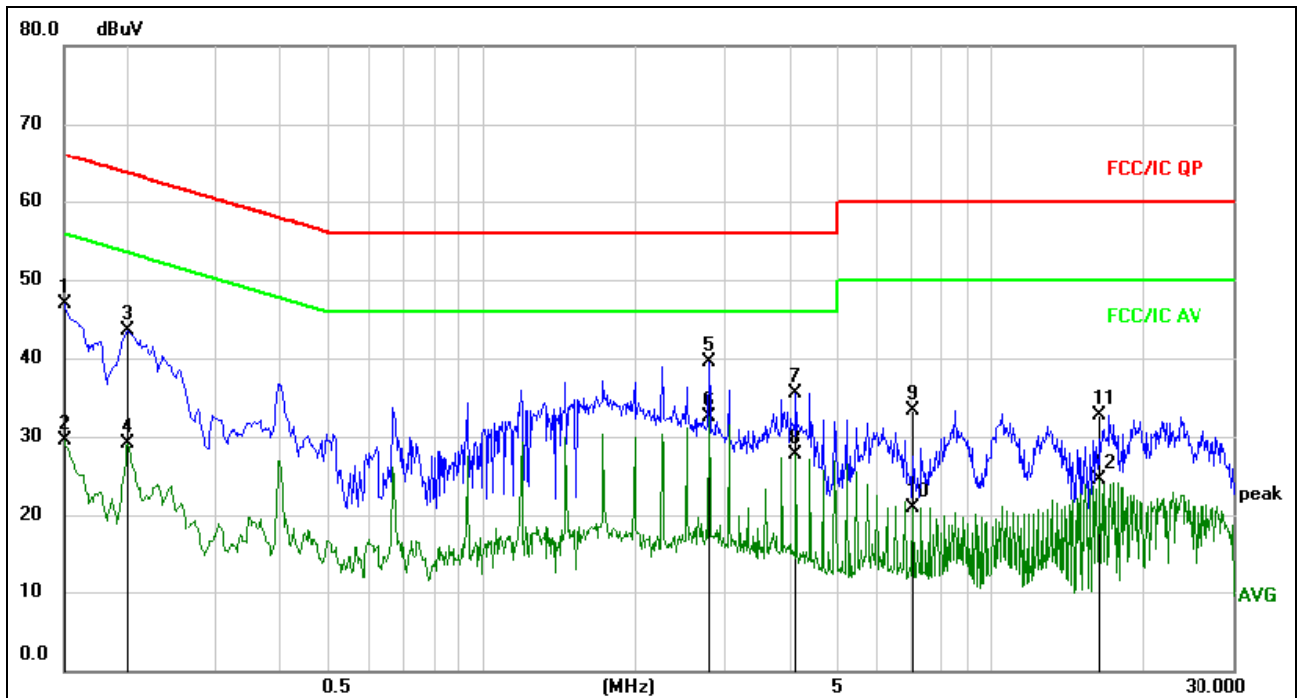


## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   |     | 0.1500       | 37.24                    | 9.67                    | 46.91                    | 66.00         | -19.09     | QP       |         |
| 2   |     | 0.1500       | 19.88                    | 9.67                    | 29.55                    | 56.00         | -26.45     | AVG      |         |
| 3   |     | 0.1996       | 33.77                    | 9.65                    | 43.42                    | 63.63         | -20.21     | QP       |         |
| 4   |     | 0.1996       | 19.43                    | 9.65                    | 29.08                    | 53.63         | -24.55     | AVG      |         |
| 5   |     | 2.7869       | 29.71                    | 9.72                    | 39.43                    | 56.00         | -16.57     | QP       |         |
| 6   | *   | 2.7869       | 22.77                    | 9.72                    | 32.49                    | 46.00         | -13.51     | AVG      |         |
| 7   |     | 4.1235       | 25.87                    | 9.73                    | 35.60                    | 56.00         | -20.40     | QP       |         |
| 8   |     | 4.1235       | 18.06                    | 9.73                    | 27.79                    | 46.00         | -18.21     | AVG      |         |
| 9   |     | 7.0485       | 23.42                    | 9.80                    | 33.22                    | 60.00         | -26.78     | QP       |         |
| 10  |     | 7.0485       | 11.16                    | 9.80                    | 20.96                    | 50.00         | -29.04     | AVG      |         |
| 11  |     | 16.3635      | 22.88                    | 9.88                    | 32.76                    | 60.00         | -27.24     | QP       |         |
| 12  |     | 16.3635      | 14.71                    | 9.88                    | 24.59                    | 50.00         | -25.41     | AVG      |         |



|                       |                                                  |                    |          |
|-----------------------|--------------------------------------------------|--------------------|----------|
| EUT:                  | Wireless Charger                                 | Model Name :       | CDRZ14   |
| Temperature:          | 26 °C                                            | Relative Humidity: | 54%      |
| Pressure:             | 1010hPa                                          | Phase :            | L        |
| <b>Test Voltage :</b> | DC 9V For Adapter<br>(adapter intpu:AC120V/60Hz) | Test Mode:         | Charging |

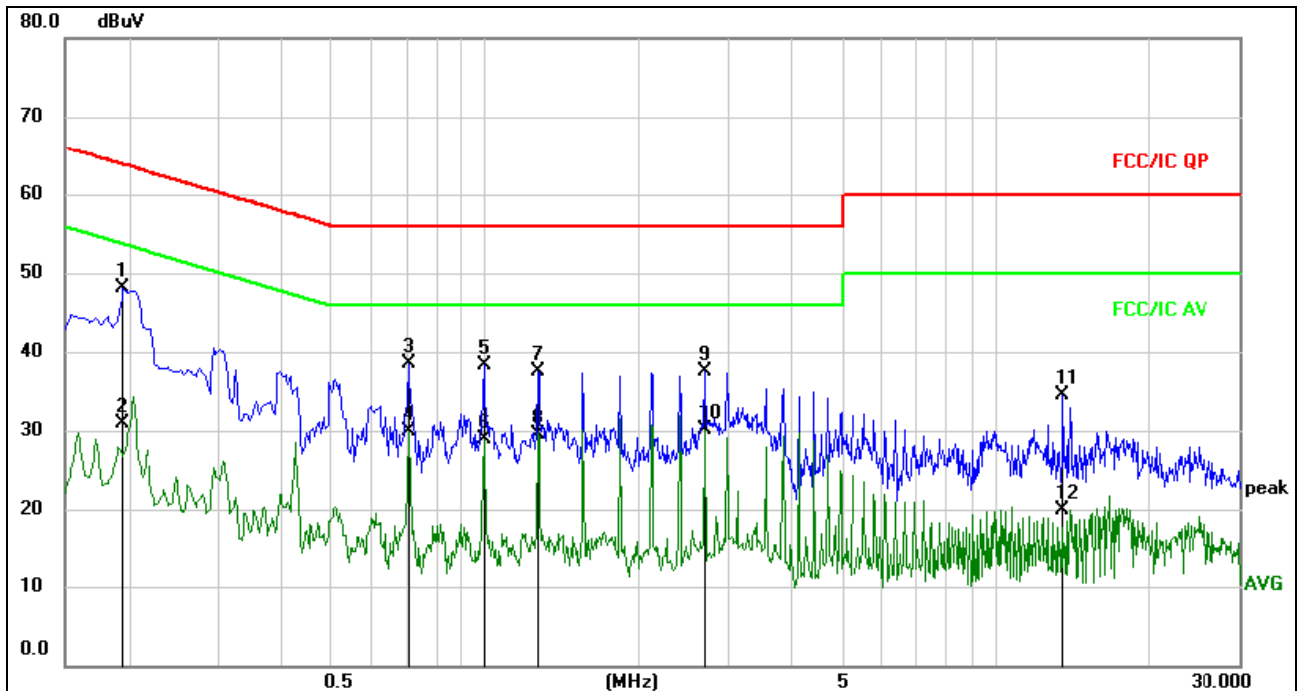


## Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1   | *   | 0.1949       | 38.41                    | 9.65                    | 48.06                    | 63.83         | -15.77     | QP       |         |
| 2   |     | 0.1949       | 21.19                    | 9.65                    | 30.84                    | 53.83         | -22.99     | AVG      |         |
| 3   |     | 0.7080       | 28.85                    | 9.68                    | 38.53                    | 56.00         | -17.47     | QP       |         |
| 4   |     | 0.7080       | 20.32                    | 9.68                    | 30.00                    | 46.00         | -16.00     | AVG      |         |
| 5   |     | 0.9915       | 28.56                    | 9.69                    | 38.25                    | 56.00         | -17.75     | QP       |         |
| 6   |     | 0.9915       | 19.16                    | 9.69                    | 28.85                    | 46.00         | -17.15     | AVG      |         |
| 7   |     | 1.2750       | 27.79                    | 9.70                    | 37.49                    | 56.00         | -18.51     | QP       |         |
| 8   |     | 1.2750       | 19.90                    | 9.70                    | 29.60                    | 46.00         | -16.40     | AVG      |         |
| 9   |     | 2.6880       | 27.85                    | 9.72                    | 37.57                    | 56.00         | -18.43     | QP       |         |
| 10  |     | 2.6880       | 20.48                    | 9.72                    | 30.20                    | 46.00         | -15.80     | AVG      |         |
| 11  |     | 13.4925      | 24.59                    | 9.84                    | 34.43                    | 60.00         | -25.57     | QP       |         |
| 12  |     | 13.4925      | 9.99                     | 9.84                    | 19.83                    | 50.00         | -30.17     | AVG      |         |



|                |                                                  |                    |          |
|----------------|--------------------------------------------------|--------------------|----------|
| EUT:           | Wireless Charger                                 | Model Name :       | CDRZ14   |
| Temperature:   | 26 °C                                            | Relative Humidity: | 54%      |
| Pressure:      | 1010hPa                                          | Phase :            | N        |
| Test Voltage : | DC 9V For Adapter<br>(adapter intpu:AC120V/60Hz) | Test Mode:         | Charging |

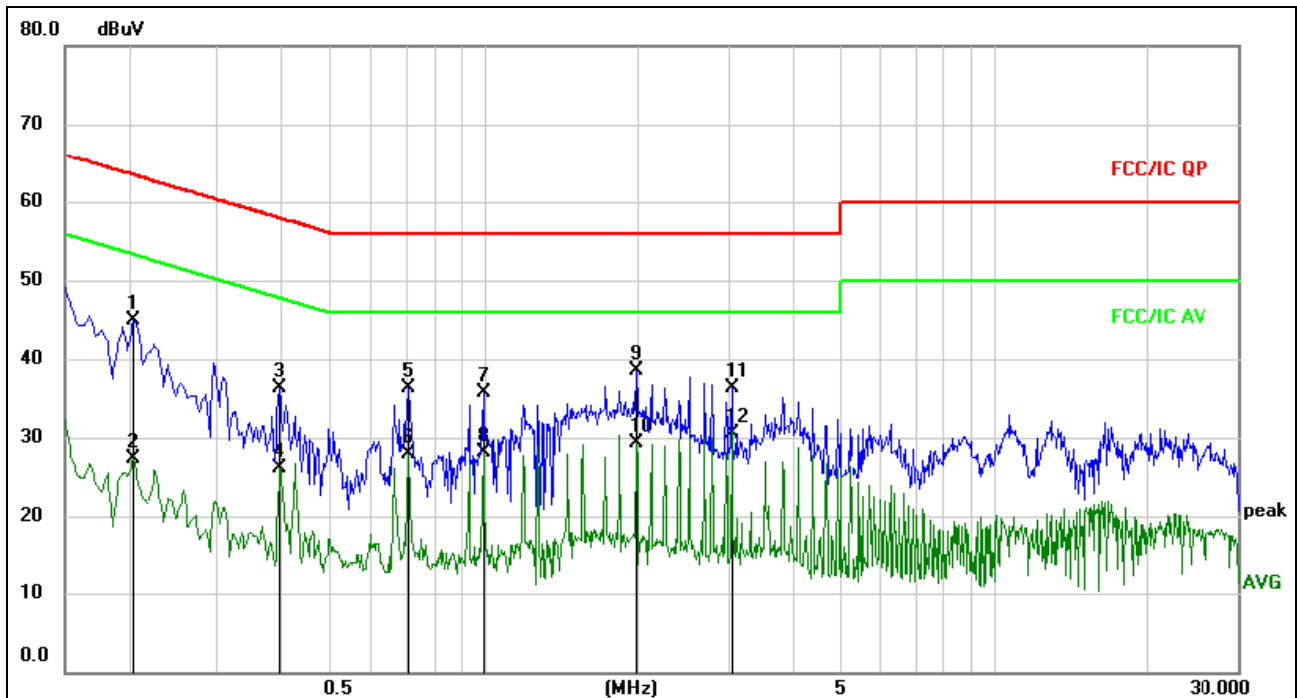

Remark:


1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

| No. | Mk. | Freq.  | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector | Comment |
|-----|-----|--------|---------------|----------------|-------------|-------|--------|----------|---------|
|     |     | MHz    | dBuV          | dB             | dBuV        | dBuV  | dB     |          |         |
| 1   |     | 0.2040 | 35.34         | 9.65           | 44.99       | 63.45 | -18.46 | QP       |         |
| 2   |     | 0.2040 | 17.74         | 9.65           | 27.39       | 53.45 | -26.06 | AVG      |         |
| 3   |     | 0.3975 | 26.58         | 9.67           | 36.25       | 57.91 | -21.66 | QP       |         |
| 4   |     | 0.3975 | 16.45         | 9.67           | 26.12       | 47.91 | -21.79 | AVG      |         |
| 5   |     | 0.7080 | 26.65         | 9.68           | 36.33       | 56.00 | -19.67 | QP       |         |
| 6   |     | 0.7080 | 18.26         | 9.68           | 27.94       | 46.00 | -18.06 | AVG      |         |
| 7   |     | 0.9915 | 25.99         | 9.69           | 35.68       | 56.00 | -20.32 | QP       |         |
| 8   |     | 0.9915 | 18.38         | 9.69           | 28.07       | 46.00 | -17.93 | AVG      |         |
| 9   |     | 1.9905 | 28.77         | 9.71           | 38.48       | 56.00 | -17.52 | QP       |         |
| 10  |     | 1.9905 | 19.69         | 9.71           | 29.40       | 46.00 | -16.60 | AVG      |         |
| 11  |     | 3.0525 | 26.62         | 9.72           | 36.34       | 56.00 | -19.66 | QP       |         |
| 12  | *   | 3.0525 | 20.88         | 9.72           | 30.60       | 46.00 | -15.40 | AVG      |         |

## 6. RADIATED EMISSION MEASUREMENT


### 6.1. Block Diagram of Test Setup

#### 6.1.1. Block Diagram of connection between the EUT and the simulators

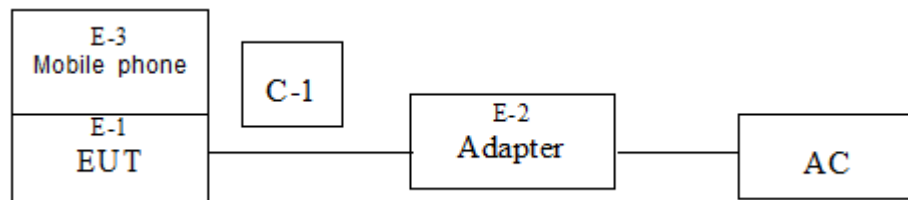

(EUT: **Wireless Charger** )

#### 6.1.2. Anechoic Chamber Test Setup Diagram

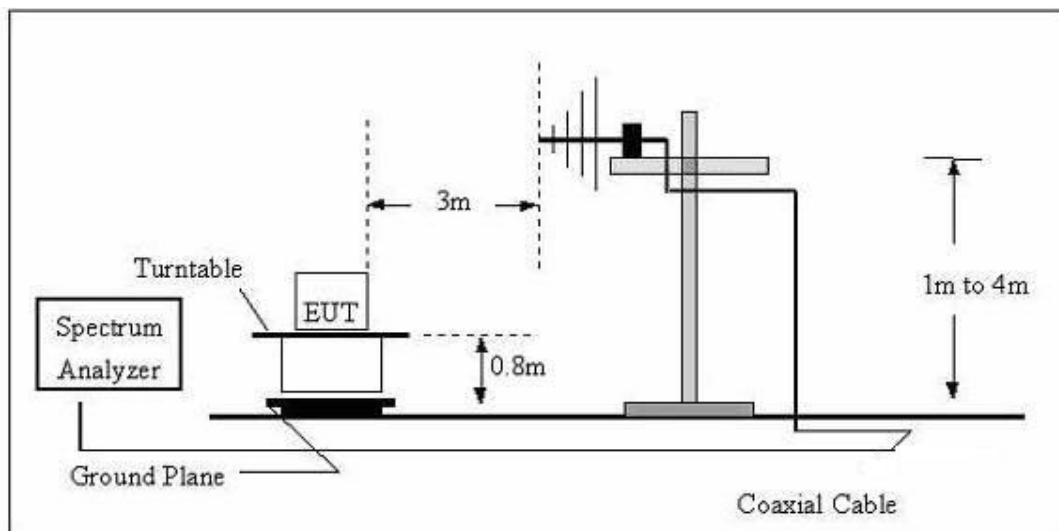

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.

### 6.2. Test Standard

FCC §15.209; §15.205;

### 6.3. EMI Test Receiver Setup

The system was investigated from 9kHz to 1GHz.

During the radiated emission test, the EMI test receiver setup was set with the following configurations:



| Frequency Range   | RBW     | Video B/W | Detector |
|-------------------|---------|-----------|----------|
| 9 kHz – 150 kHz   | 200 kHz | 1 kHz     | QP       |
| 150 kHz – 30MHz   | 9kHz    | 30kHz     | QP       |
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | QP       |

Note: For the frequency bands 9-90 kHz and 110-490 kHz, the test was based on average detector.

## 6.4.Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

## 6.5.Test Result

**PASS**

Please refer to the following pages.



|                |                                              |                    |            |
|----------------|----------------------------------------------|--------------------|------------|
| EUT:           | Wireless Charger                             | Model Name :       | CDRZ14     |
| Temperature:   | 26 °C                                        | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa                                     | Polarization :     | Horizontal |
| Test Voltage : | DC 5V For Adapter(adapter intpu:AC120V/60Hz) |                    |            |
| Test Mode :    | Normal Link                                  |                    |            |

### 9kHz-490kHz

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (kHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 36.0007   | 91.81         | 20.54  | 112.35         | 136.48   | -24.13 | PK            |
| 36.0007   | 80.18         | 20.54  | 100.72         | 116.48   | -15.76 | AV            |
| 162.6105  | 59.16         | 21.19  | 80.35          | 123.38   | -43.03 | PK            |
| 162.6105  | 47.24         | 21.19  | 68.43          | 103.38   | -34.95 | AV            |
| 479.6078  | 48.45         | 22.47  | 70.92          | 113.99   | -43.07 | PK            |
| 479.6078  | 37.01         | 22.47  | 59.48          | 93.99    | -34.51 | AV            |

### 490kHz-30MHz

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 0.5007    | 28.17         | 23.59  | 51.76          | 73.61    | -21.85 | QP            |
| 1.8715    | 18.79         | 24.93  | 43.72          | 69.54    | -25.82 | QP            |
| 7.8035    | 23.29         | 25.06  | 48.35          | 69.54    | -21.19 | QP            |
| 19.6106   | 18.28         | 27.06  | 45.34          | 69.54    | -24.2  | QP            |
| 21.6099   | 12.77         | 27.15  | 39.92          | 69.54    | -29.62 | QP            |
| 27.5968   | 9.99          | 27.58  | 37.57          | 69.54    | -31.97 | QP            |

Note:

Pre-scan in the all of mode, the worst case in of was recorded.


Factor = antenna factor + cable loss – pre-amplifier.

Margin = Emission Level- Limit.



## 30MHz-1GHz

|                |                                              |                    |            |
|----------------|----------------------------------------------|--------------------|------------|
| EUT:           | Wireless Charger                             | Model Name :       | CDRZ14     |
| Temperature:   | 26 °C                                        | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa                                     | Polarization :     | Horizontal |
| Test Voltage : | DC 9V For Adapter(adapter intpu:AC120V/60Hz) |                    |            |
| Test Mode :    | Normal Link                                  |                    |            |

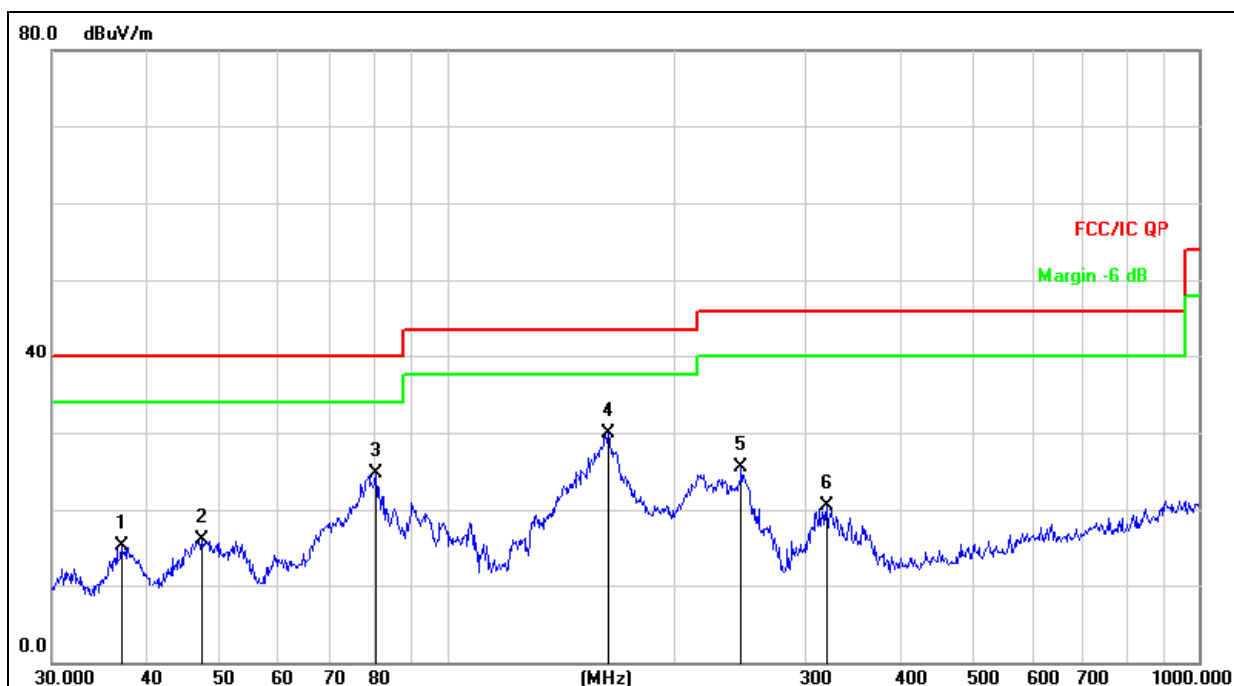


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over        |
|-----|-----|----------|---------------|----------------|-------------|-------|-------------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB Detector |
| 1   |     | 37.0248  | 31.12         | -15.78         | 15.34       | 40.00 | -24.66 QP   |
| 2   |     | 47.3255  | 30.09         | -13.99         | 16.10       | 40.00 | -23.90 QP   |
| 3   |     | 80.6442  | 44.26         | -19.48         | 24.78       | 40.00 | -15.22 QP   |
| 4   | *   | 163.7550 | 48.86         | -18.89         | 29.97       | 43.50 | -13.53 QP   |
| 5   |     | 246.8149 | 40.79         | -15.23         | 25.56       | 46.00 | -20.44 QP   |
| 6   |     | 319.9370 | 34.03         | -13.62         | 20.41       | 46.00 | -25.59 QP   |



|                |                                              |                    |          |
|----------------|----------------------------------------------|--------------------|----------|
| EUT:           | Wireless Charger                             | Model Name :       | CDRZ14   |
| Temperature:   | 26 °C                                        | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa                                     | Polarization :     | Vertical |
| Test Voltage : | DC 5V For Adapter(adapter intpu:AC120V/60Hz) |                    |          |
| Test Mode :    | Normal Link                                  |                    |          |

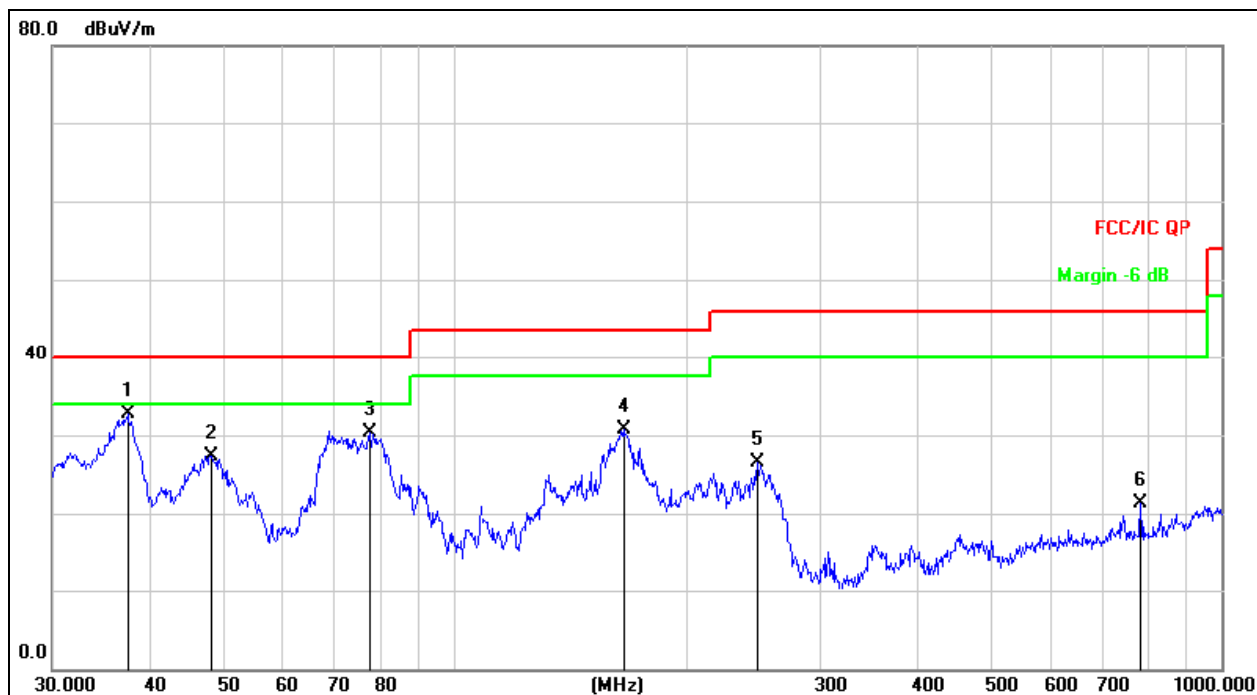


Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     | Detector |
| 1   | *   | 37.5479  | 48.25         | -15.59         | 32.66        | 40.00 | -7.34  | QP       |
| 2   |     | 48.1626  | 41.34         | -13.98         | 27.36        | 40.00 | -12.64 | QP       |
| 3   |     | 77.5928  | 49.39         | -19.14         | 30.25        | 40.00 | -9.75  | QP       |
| 4   |     | 166.0680 | 49.43         | -18.78         | 30.65        | 43.50 | -12.85 | QP       |
| 5   |     | 248.5519 | 41.68         | -15.16         | 26.52        | 46.00 | -19.48 | QP       |
| 6   |     | 782.3453 | 26.28         | -4.92          | 21.36        | 46.00 | -24.64 | QP       |



|                |                                              |                    |            |
|----------------|----------------------------------------------|--------------------|------------|
| EUT:           | Wireless Charger                             | Model Name :       | CDRZ14     |
| Temperature:   | 26 °C                                        | Relative Humidity: | 54%        |
| Pressure:      | 1010 hPa                                     | Polarization :     | Horizontal |
| Test Voltage : | DC 9V For Adapter(adapter intpu:AC120V/60Hz) |                    |            |
| Test Mode :    | Normal Link                                  |                    |            |

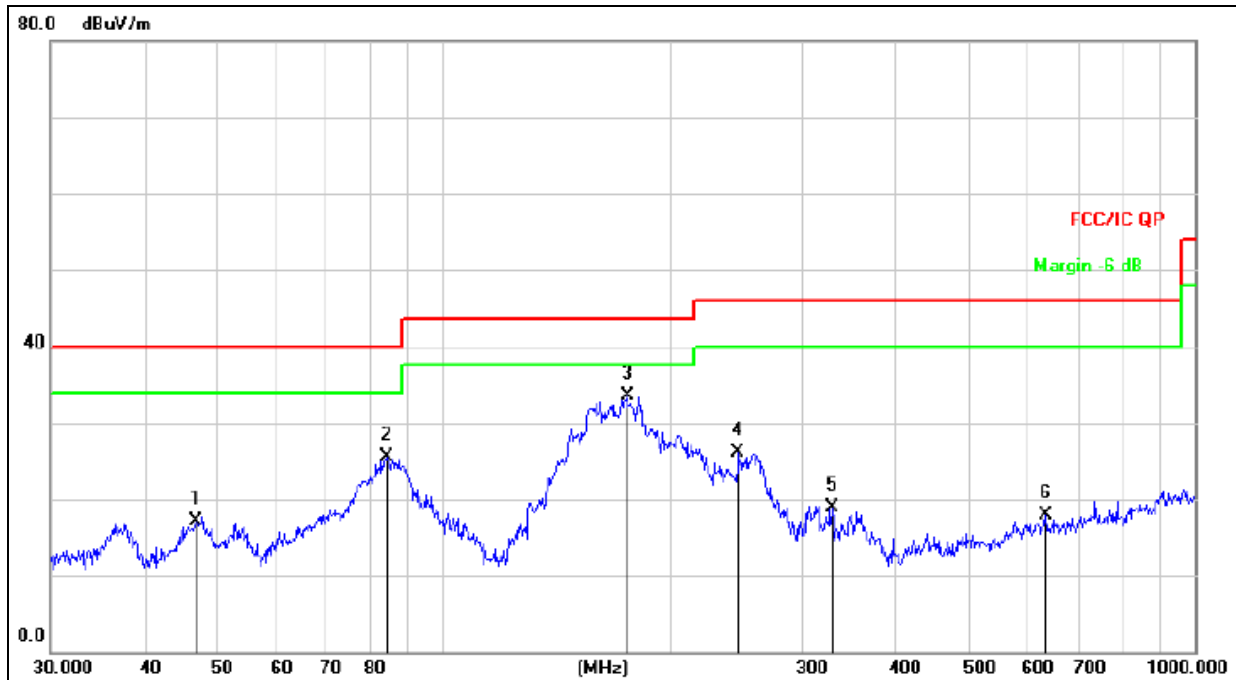


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit | Over   |          |
|-----|-----|----------|---------|---------|----------|-------|--------|----------|
|     |     | MHz      | Level   | Factor  | ment     |       |        | Detector |
|     |     |          | dBuV    | dB      | dBuV/m   | dB/m  | dB     |          |
| 1   |     | 46.8303  | 31.06   | -14.00  | 17.06    | 40.00 | -22.94 | QP       |
| 2   |     | 84.1100  | 44.15   | -18.73  | 25.42    | 40.00 | -14.58 | QP       |
| 3   | *   | 175.6516 | 51.82   | -18.30  | 33.52    | 43.50 | -9.98  | QP       |
| 4   |     | 246.8149 | 41.36   | -15.23  | 26.13    | 46.00 | -19.87 | QP       |
| 5   |     | 329.0389 | 32.31   | -13.42  | 18.89    | 46.00 | -27.11 | QP       |
| 6   |     | 633.9072 | 24.44   | -6.52   | 17.92    | 46.00 | -28.08 | QP       |



|                |                                              |                    |          |
|----------------|----------------------------------------------|--------------------|----------|
| EUT:           | Wireless Charger                             | Model Name :       | CDRZ14   |
| Temperature:   | 26 °C                                        | Relative Humidity: | 54%      |
| Pressure:      | 1010 hPa                                     | Polarization :     | Vertical |
| Test Voltage : | DC 9V For Adapter(adapter intpu:AC120V/60Hz) |                    |          |
| Test Mode :    | Normal Link                                  |                    |          |

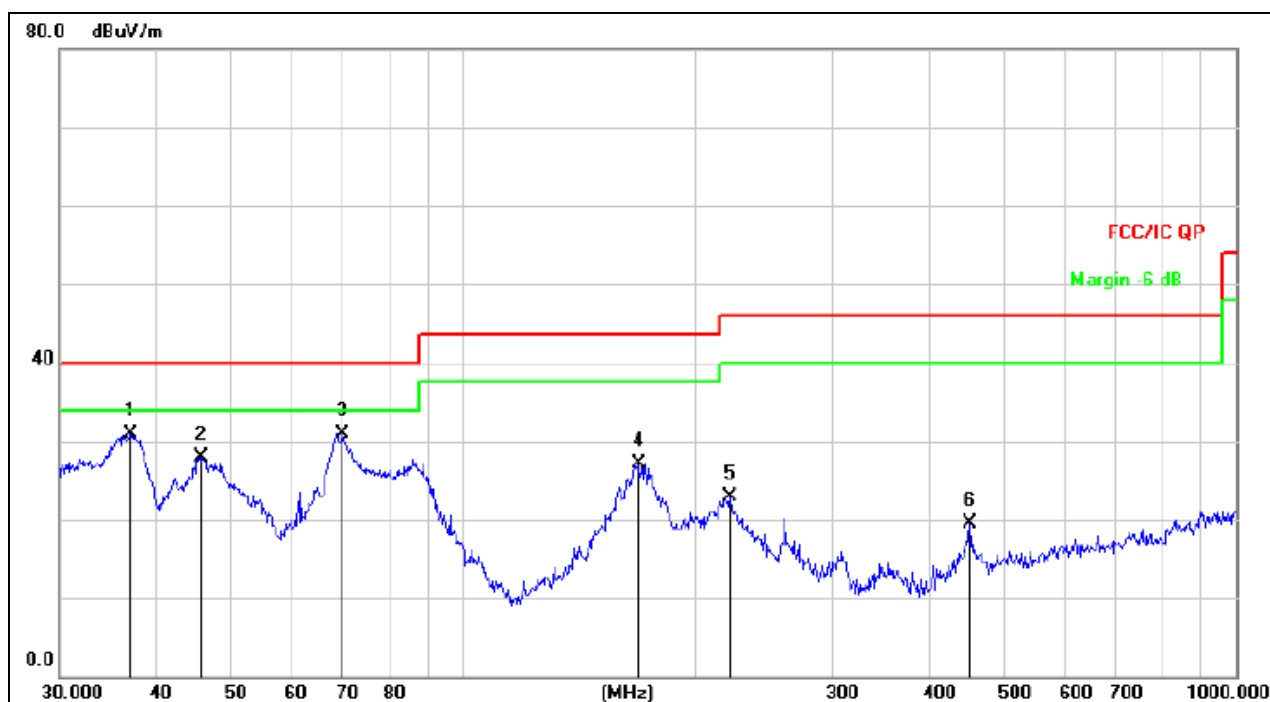

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m       | dB/m  | dB     | Detector |
| 1   |     | 37.0248  | 46.75         | -15.78         | 30.97        | 40.00 | -9.03  | QP       |
| 2   |     | 45.8551  | 42.00         | -14.02         | 27.98        | 40.00 | -12.02 | QP       |
| 3   | *   | 69.8450  | 48.55         | -17.56         | 30.99        | 40.00 | -9.01  | QP       |
| 4   |     | 168.4138 | 45.72         | -18.66         | 27.06        | 43.50 | -16.44 | QP       |
| 5   |     | 221.3920 | 38.98         | -16.16         | 22.82        | 46.00 | -23.18 | QP       |
| 6   |     | 452.7196 | 30.07         | -10.59         | 19.48        | 46.00 | -26.52 | QP       |

## 7. EUT TEST PHOTOS


### Conducted Measurement Photos



**Radiated Measurement Photos**  
9KHz-30MHz

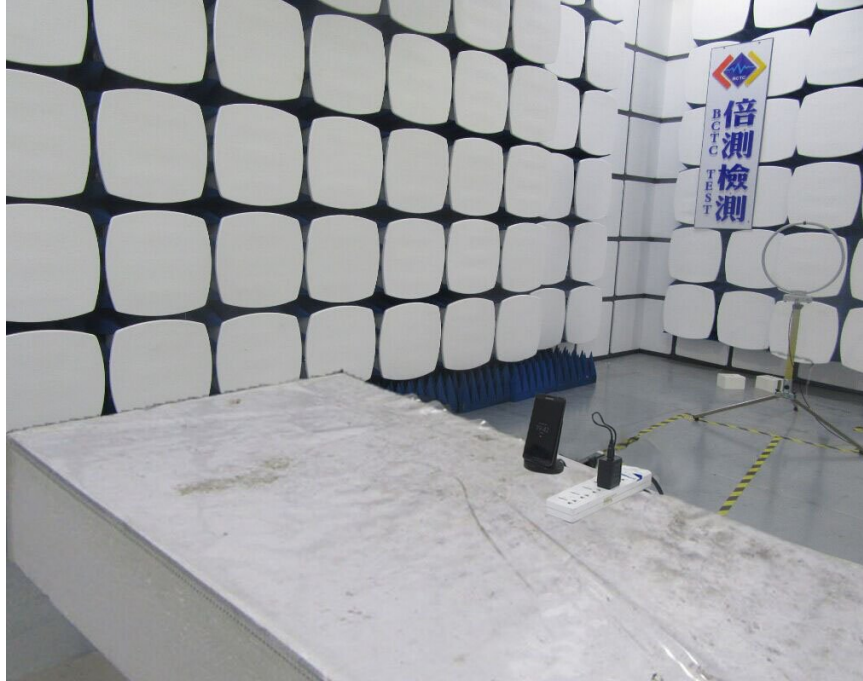

30MHz-1GHz

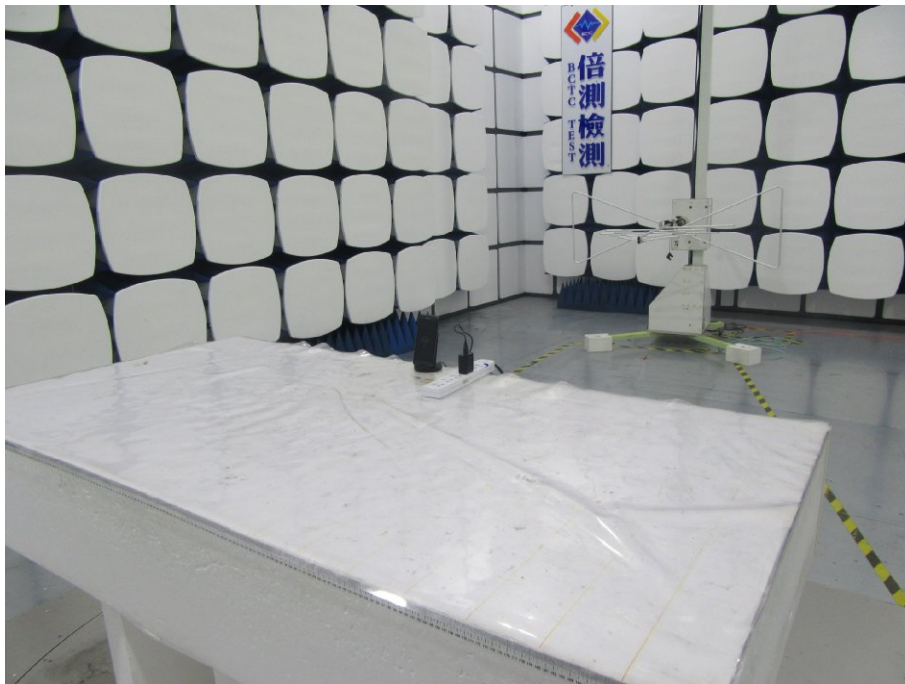

## 8. EUT PHOTOS



\*\*\*\*\* END OF REPORT \*\*\*\*\*