


FCC PART 27
FCC PART 22H, PART 24E
MEASUREMENT AND TEST REPORT

For

Shanghai Yuge Information Technology Co., Ltd

Room 603, Building No.E, 666 Shengxia Road ZhangJiangHigh-tech Park, Pudong, Shanghai, China

FCC ID: 2AN95-CLM920

Report Type: Original Report	Product Type: 4G LTE Wireless Module
Test Engineer: Max Min	
Report Number: RKSA171108001-00A	
Report Date: 2017-12-12	
Reviewed By: Oscar Ye RF Leader	
Prepared By: Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
CHANNEL LIST	5
EQUIPMENT MODIFICATIONS	8
SUPPORT EQUIPMENT LIST AND DETAILS	8
EXTERNAL CABLE LIST AND DETAILS	8
BLOCK DIAGRAM OF TEST SETUP	9
SUMMARY OF TEST RESULTS	10
TEST EQUIPMENT LIST	11
FCC §1.1307& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
FCC §2.1047 - MODULATION CHARACTERISTIC	16
FCC §2.1046; § 22.913 (A);§ 24.232 (C); §27.50 (H) - RF OUTPUT POWER	17
APPLICABLE STANDARDS.....	17
TEST PROCEDURE	17
TEST DATA	17
FCC §2.1049, §22.917, §22.905 §24.238 & §27.53 - OCCUPIED BANDWIDTH	38
APPLICABLE STANDARDS.....	38
TEST PROCEDURE	38
TEST DATA	38
FCC § 2.1051; § 22.917 (A);§ 24.238 (A); §27.53 (M) SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....	66
APPLICABLE STANDARDS.....	66
TEST PROCEDURE	66
TEST DATA	66
FCC § 2.1053; § 22.917 (A);§ 24.238 (A); §27.53 (M) - SPURIOUS RADIATED EMISSIONS	95
APPLICABLE STANDARDS.....	95
TEST PROCEDURE	95
TEST DATA	96
FCC § 22.917 (A);§ 24.238 (A); §27.53 (M) - BAND EDGES	101
APPLICABLE STANDARDS.....	101
TEST PROCEDURE	101
TEST DATA	101
FCC § 2.1055; § 22.355;§ 24.235; §27.54; - FREQUENCY STABILITY	150
APPLICABLE STANDARDS.....	150
TEST PROCEDURE	150
TEST DATA	151

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Shanghai Yuge Information Technology Co., Ltd
Tested Model	CLM920
Series Model	CLM920 TD5, CLM920 TD3, CLR920, CLR820, CLM830, CLM500, CLM600, CLM700, CWM900, CWM930, QM338, LPM2200, LPM2300, LPM2400
Model Difference	Model Name
Product Type	4G LTE Wireless Module
Dimension	51 mm(L) × 30 mm(W) × 3.8 mm(H)
Power Supply	DC 3.7V

**All measurement and test data in this report was gathered from production sample serial number: 20171108001. (Assigned by the BACL. The EUT supplied by the applicant was received on 2017-11-08)*

Objective

This type approval report is prepared on behalf of Shanghai Yuge Information Technology Co., Ltd in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services
Part 27 – Miscellaneous wireless communications services

Applicable Standards: TIA/EIA 603-D.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.05dB
	1GHz~6GHz	4.48dB
	6GHz~18GHz	5.22dB
Occupied Bandwidth		0.5kHz
Frequency Stability		1Hz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road,Kunshan,Jiangsu province,China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

Channel List

Mode		Channel		Frequency
GSM/GPRS/EDGE 850		Low	128	824.2
		Middle	190	836.6
		High	251	848.8
PCS/GPRS/EDGE 1900		Low	512	1850.2
		Middle	661	1880.0
		High	810	1909.8
WCDMA Band II		Low	9262	1852.4
		Middle	9400	1880.0
		High	9538	1907.6
WCDMA Band V		Low	4132	826.4
		Middle	4182	836.4
		High	4233	846.6
LTE Band 2	1.4M	Low	18607	1850.7
		Middle	18900	1880.0
		High	19193	1909.3
	3M	Low	18615	1851.5
		Middle	18900	1880.0
		High	19185	1908.5
	5M	Low	18625	1852.5
		Middle	18900	1880.0
		High	19175	1907.5
	10M	Low	18650	1855.0
		Middle	18900	1880.0
		High	19150	1905.0
	15M	Low	18675	1857.5
		Middle	18900	1880.0
		High	19125	1902.5
	20M	Low	18700	1860.0
		Middle	18900	1880.0
		High	19100	1900.0

Mode		Channel		Frequency
LTE Band 4	1.4M	Low	19957	1710.7
		Middle	20175	1732.5
		High	20393	1754.3
	3M	Low	19965	1711.5
		Middle	20175	1732.5
		High	20385	1753.5
	5M	Low	19975	1712.5
		Middle	20175	1732.5
		High	20375	1752.5
	10M	Low	20000	1715.0
		Middle	20175	1732.5
		High	20350	1750.0
	15M	Low	20025	1717.5
		Middle	20175	1732.5
		High	20325	1747.5
	20M	Low	20050	1720.0
		Middle	20175	1732.5
		High	20300	1745.0

Mode		Channel		Frequency
LTE Band 5	1.4M	Low	20407	824.7
		Middle	20525	836.5
		High	20643	848.3
	3M	Low	20415	825.5
		Middle	20525	836.5
		High	20635	847.5
	5M	Low	20425	826.5
		Middle	20525	836.5
		High	20625	846.5
	10M	Low	20450	829.0
		Middle	20525	836.5
		High	20600	844.0
LTE Band 7	5M	Low	20775	2502.5
		Middle	21100	2535.0
		High	21425	2567.5
	10M	Low	20800	2505.0
		Middle	21100	2535.0
		High	21400	2565.0
	15M	Low	20825	2507.5
		Middle	21100	2535.0
		High	21375	2562.5
	20M	Low	20850	2510.0
		Middle	21100	2535.0
		High	21350	2560.0

Equipment Modifications

No modifications were made to the EUT.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478
/	Antanna-1	/	/
/	Antenna-2	/	/
/	Adapter Input: AC 100-240V, 50/60Hz Output: DC 5V, 2000mA	/	/

External Cable List and Details

Cable Description	Shielding Type	Length (m)	From Port	To
/	/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz & Above 1GHz)

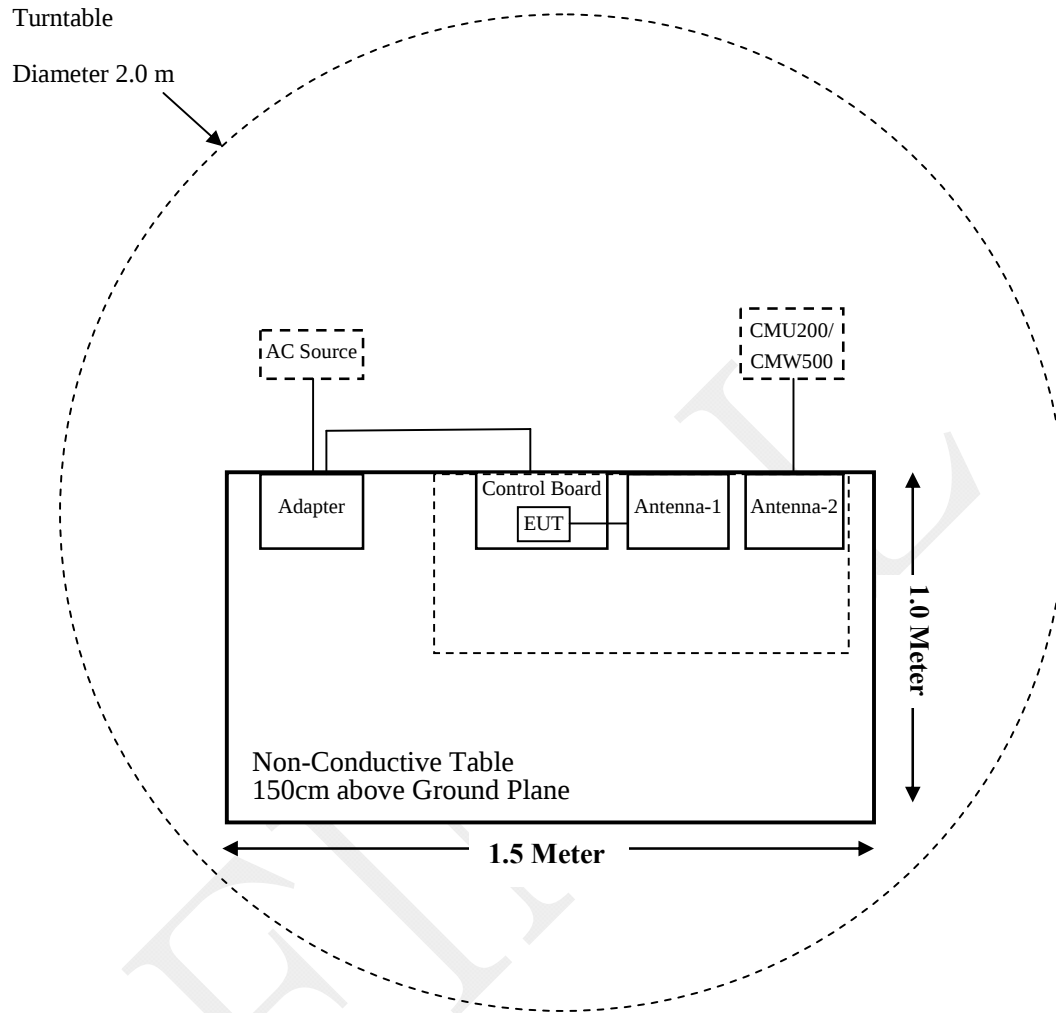

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §1.1307 (b) (1) & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§2.1046; § 22.913 (a);§ 24.232 (c); §27.50 (h)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905; § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (m)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053; § 22.917 (a); § 24.238 (a); §27.53 (m)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53 (m)	Band Edge	Compliance
§ 2.1055; § 22.355; § 24.235; §27.54;	Frequency stability	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2016-11-25	2017-11-24
HP	Signal Generator	HP 8341B	2624A00116	2017-08-29	2018-08-28
Sunol Sciences	Broadband Antenna	JB3	A040914-2	2016-01-09	2019-01-08
Sunol Sciences	Broadband Antenna	JB3	A090314-2	2016-01-09	2019-01-08
Sonoma Instrument	Pre-amplifier	310N	171205	2017-08-15	2018-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2017-08-15	2018-08-14
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2016-11-25	2017-11-24
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2017-07-22	2018-07-21
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2017-08-27	2018-08-26
HP	Signal Generator	HP 8341B	2624A00116	2017-08-29	2018-08-28
ETS-LINDGREN	Horn Antenna	3115	9311-4159	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3115	6229	2016-01-11	2019-01-10
ETS-LINDGREN	Horn Antenna	3116	00084159	2016-12-12	2019-12-12
ETS-LINDGREN	Horn Antenna	3116	2516	2016-12-12	2019-12-12
Narda	Pre-amplifier	AFS42-00101800	2001270	2016-12-12	2017-12-11
Heatsink Required	Amplifier	QLW-18405536-J0	15964001009	2016-12-12	2017-12-11
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2017-08-15	2018-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2017-08-15	2018-08-14
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2016-11-25	2017-11-24
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2017-07-22	2018-07-21

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2017-09-05	2018-09-04
Rohde & Schwarz	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	110605	2016-11-25	2017-11-24
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	104478	2017-07-22	2018-07-21
BACL	Temperature & Humidity Chamber	BTH-150	30023	2017-10-10	2018-10-09
EAST	Regulated DC Power Supply	MCH-303D-II	14070562	2017-10-10	2018-10-09
Agilent	Power Meter	N1912A	MY5000492	2016-12-12	2017-12-11
Agilent	Power Sensor	N1921A	MY54210024	2016-12-12	2017-12-11
Yuge	RF Cable	/	/	/	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1307& §2.1091 –MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1307, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1307 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Max Turn-up power (dBm)	ERP/EIRP Limit (dBm)	Max Antenna Gain (dBi)
GSM 850/GPRS 850	33.0	38.45	5.45
EGPRS 850	26.0	38.45	12.45
GSM 1900/GPRS 1900	30.5	33	2.5
EGPRS 1900	25.0	33	8.0
WCDMA Band V	24.0	38.45	14.45
WCDMA Band II	22.5	33	10.5
LTE Band 2	22.0	33	11.0
LTE Band 4	23.0	30	7.0
LTE Band 5	23.0	38.45	15.45
LTE Band 7	22.5	33	10.5

Mode	Frequency	Antenna Gain		Target Output Power		Evaluation Distance	Power Density	MPE Limit
	(MHz)	(dBi)	(numeric)	(dBm)	(mW)	(cm)	(mW/cm ²)	(mW/cm ²)
GSM 850 /GPRS 850	824.2	5.41	3.48	29.0	794.33	20	0.549	0.549
EGPRS 850	824.2	11.41	13.84	23.0	199.53	20	0.549	0.549
GSM 1900 /GPRS 1900	1909.8	10.01	10.03	27.0	501.19	20	1.000	1.000
EGPRS 1900	1850.2	15.01	31.71	22.0	158.49	20	1.000	1.000
WCDMA Band V	826.4	10.43	11.03	24	251.19	20	0.551	0.551
WCDMA Band II	1880.0	14.51	28.26	22.5	177.83	20	1.000	1.000
LTE Band 2	1880.0	15.01	31.71	22.0	158.49	20	1.000	1.000
LTE Band 4	1732.5	14.01	25.19	23.0	199.53	20	1.000	1.000
LTE Band 5	824.7	11.42	13.87	23	199.53	20	0.550	0.550
LTE Band 7	2535.0	14.51	28.26	22.5	177.83	20	1.000	1.000

Note 1:

The target output power:

GSM 850: Maximum output power with 1 slot is 33.0dBm, time based Ave. power is 24.0dBm;
 GPRS 850: Maximum output power with 4 slots is 32.0dBm, time based Ave. power is 29.0dBm;
 EGPRS 850: Maximum output power with 4 slots is 26.0dBm, time based Ave. power is 23.0dBm;
 GSM 1900: Maximum output power with 1 slot is 30.5dBm, time based Ave. power is 21.5dBm;
 GPRS 1900: Maximum output power with 4 slots is 30.0dBm, time based Ave. power is 27.0dBm;
 EGPRS 1900: Maximum output power with 4 slots is 25.0dBm, time based Ave. power is 22.0dBm;
 WCDMA Band V: 24.0dBm;
 WCDMA Band II: 22.5dBm;
 LTE Band2: 22.0dBm;
 LTE Band4: 23.0dBm;
 LTE Band5: 23.0dBm;
 LTE Band7: 22.5dBm,

which was declared by the manufacturer.

Number of Time slot	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.08
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.26 dB	-3 dB

Mode	Max Allow Antenna Gain (dBi)
GSM 850/GPRS 850	5.41
EGPRS 850	11.41
GSM 1900/GPRS 1900	2.5
EGPRS 1900	8.0
WCDMA Band V	10.43
WCDMA Band II	10.50
LTE Band 2	11.0
LTE Band 4	7.0
LTE Band 5	11.42
LTE Band 7	10.50

Note 2:

To meet RF exposure & ERP/ERIP, the maximum net gain of antennas allowed are 5.41dBi @ GSM 850/GPRS 850 , 11.41dBi @ EGPRS 850 , 2.5dBi @ GSM 1900/GPRS 1900 , 8.0dBi @ EGPRS 1900 , 10.43dBi @ WCDMA Band V , 10.50dBi @ WCDMA Band II , 11.0dBi @ LTE Band 2 , 7.0dBi @ LTE Band 4 , 11.42dBi @ LTE Band 5 , 10.50dBi @ LTE Band 7. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d) , Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FINAL

FCC §2.1046; § 22.913 (a);§ 24.232 (c); §27.50 (h) - RF OUTPUT POWER**Applicable Standards**

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to FCC §27.50 (h) The following power limits shall apply in the BRS and EBS:


(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Equipment employed must be authorized in accordance with the provisions of §24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

Conducted method:

The RF output of the transmitter was connected to the CMW500/CMU200 through sufficient attenuation.

**Test Data****Environmental Conditions**

Temperature:	23.4°C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min on 2017-11-27.

Conducted Power:**GSM 850 Band**

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	128	824.2	32.80	38.45
	190	836.6	32.40	38.45
	251	848.8	32.30	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	128	824.2	32.99	32.68	32.26	31.88	38.45
	190	836.6	32.91	32.59	32.24	31.83	38.45
	251	848.8	32.97	32.64	32.28	31.76	38.45

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	128	824.2	26.20	26.19	26.01	25.87	38.45
	190	836.6	26.19	26.05	25.88	25.78	38.45
	251	848.8	26.08	25.93	25.72	25.57	38.45

WCDMA Band V

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	Rel 99	1	23.44	23.39	23.51
			1	23.41	23.43	23.44
		HSDPA	2	23.39	23.41	23.45
			3	23.29	23.27	23.31
			4	23.18	23.21	23.24
			4	23.18	23.21	23.24
		HSUPA	1	23.46	23.42	23.48
			2	23.39	23.37	23.43
			3	23.23	23.28	23.31
			4	23.19	23.21	23.27
			5	23.51	23.54	23.52
		DC-HSDPA	1	23.39	23.40	23.42
			2	23.38	23.40	23.44
			3	23.28	23.25	23.30
			4	23.16	23.20	23.22

PCS 1900 Band

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
GSM	512	1850.2	29.90	33
	661	1880.0	29.80	33
	810	1909.8	30.03	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
GPRS	512	1850.2	29.86	29.95	29.87	29.86	33
	661	1880.0	30.04	29.70	29.66	29.65	33
	810	1909.8	30.14	29.87	29.75	29.68	33

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)				Limit (dBm)
			1 slot	2 slots	3 slots	4 slots	
EGPRS	512	1850.2	25.56	25.27	25.26	25.05	33
	661	1880.0	25.53	25.17	25.12	24.99	33
	810	1909.8	25.44	25.14	25.01	24.85	33

WCDMA Band II

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	22.23	22.25	22.32
		HSDPA	1	22.16	22.37	22.37
			2	22.02	22.08	22.13
			3	21.98	21.99	22.02
			4	21.87	21.95	21.99
		HSUPA	1	21.97	21.99	22.03
			2	21.78	21.82	21.88
			3	21.83	21.85	21.87
			4	22.01	22.03	22.07
			5	22.31	22.41	22.37
		DC-HSDPA	1	21.95	21.97	22.01
			2	21.77	21.81	21.86
			3	21.99	22.02	22.04
			4	21.85	21.96	21.98

Maximum Output Power:**LTE Band 2**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
1.4M	QPSK	1#0	21.38	21.41	21.35	33
		1#3	21.31	21.38	21.29	
		1#5	21.42	21.45	21.25	
		3#0	21.22	21.29	21.19	
		3#1	21.14	21.20	21.14	
		3#3	21.09	21.16	21.06	
		6#0	21.01	21.03	21.03	
	16-QAM	1#0	21.10	21.13	21.09	
		1#3	21.05	21.09	21.01	
		1#5	21.28	21.31	21.27	
		3#0	21.27	21.27	21.28	
		3#1	21.17	21.22	21.22	
		3#3	21.09	21.28	21.15	
		6#0	21.03	21.09	21.06	
3M	QPSK	1#0	21.51	21.57	21.53	33
		1#7	21.48	21.53	21.50	
		1#14	21.36	21.48	21.46	
		8#0	21.30	21.42	21.39	
		8#4	21.26	21.37	21.32	
		8#7	21.22	21.32	21.27	
		15#0	21.10	21.08	21.03	
	16-QAM	1#0	21.23	21.25	21.20	
		1#7	21.20	21.21	21.17	
		1#14	21.17	21.18	21.14	
		8#0	21.14	21.16	21.09	
		8#4	21.10	21.11	21.09	
		8#7	21.08	21.09	21.07	
		15#0	21.01	21.04	21.02	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
5M	QPSK	1#0	21.41	21.44	21.42	33
		1#12	21.37	21.41	21.38	
		1#24	21.31	21.36	21.33	
		12#0	21.29	21.32	21.30	
		12#6	21.22	21.27	21.21	
		12#11	21.18	21.23	21.19	
		25#0	21.13	21.19	21.12	
	16-QAM	1#0	21.23	21.26	21.24	
		1#12	21.20	21.22	21.21	
		1#24	21.16	21.21	21.18	
		12#0	21.11	21.16	21.13	
		12#6	21.08	21.11	21.10	
		12#11	21.01	21.05	21.03	
		25#0	21.08	21.11	21.09	
10M	QPSK	1#0	21.38	21.44	21.39	33
		1#24	21.33	21.41	21.34	
		1#49	21.28	21.39	21.30	
		25#0	21.26	21.34	21.27	
		25#12	21.20	21.30	21.23	
		25#24	21.18	21.27	21.19	
		50#0	21.16	21.21	21.13	
	16-QAM	1#0	21.36	21.41	21.38	
		1#24	21.32	21.39	21.33	
		1#49	21.27	21.32	21.30	
		25#0	21.23	21.27	21.25	
		25#12	21.20	21.21	21.23	
		25#24	21.14	21.18	21.16	
		50#0	21.11	21.14	21.12	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
15M	QPSK	1#0	21.26	21.28	21.27	33
		1#37	21.23	21.25	21.24	
		1#74	21.21	21.25	21.23	
		36#0	21.18	21.22	21.20	
		36#17	21.15	21.18	21.16	
		36#35	21.12	21.15	21.14	
		75#0	21.11	21.16	21.13	
	16-QAM	1#0	21.26	21.30	21.31	
		1#37	21.24	21.25	21.26	
		1#74	21.12	21.18	21.18	
		36#0	21.05	21.10	21.17	
		36#17	21.02	21.07	21.08	
		36#35	21.03	21.01	21.07	
		75#0	21.01	21.08	21.07	
20M	QPSK	1#0	21.42	21.50	21.44	33
		1#49	21.41	21.44	21.43	
		1#99	21.38	21.39	21.41	
		50#0	21.33	21.36	21.37	
		50#24	21.30	21.36	21.34	
		50#49	21.29	21.34	21.33	
		100#0	21.19	21.29	21.23	
	16-QAM	1#0	21.33	21.41	21.37	
		1#49	21.32	21.36	21.34	
		1#99	21.30	21.32	21.31	
		50#0	21.28	21.29	21.29	
		50#24	21.26	21.28	21.27	
		50#49	21.25	21.26	21.25	
		100#0	21.22	21.23	21.21	

LTE Band 4

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
1.4M	QPSK	1#0	22.61	22.65	22.55	30
		1#3	22.45	22.51	22.46	
		1#5	22.39	22.45	22.43	
		3#0	22.34	22.37	22.35	
		3#1	21.85	21.88	22.25	
		3#3	21.82	21.83	21.89	
		6#0	21.73	21.77	21.55	
	16-QAM	1#0	22.21	22.25	22.23	
		1#3	22.16	22.19	22.18	
		1#5	22.15	22.05	22.11	
		3#0	22.06	21.96	22.02	
		3#1	21.98	21.93	21.94	
		3#3	21.73	21.91	21.94	
		6#0	21.42	21.83	21.87	
3M	QPSK	1#0	22.63	22.70	22.64	30
		1#7	22.52	22.57	22.53	
		1#14	22.05	22.53	22.37	
		8#0	22.01	22.48	22.35	
		8#4	21.95	22.47	22.12	
		8#7	21.85	22.22	22.03	
		15#0	21.84	22.04	21.91	
	16-QAM	1#0	21.98	22.21	22.12	
		1#7	21.82	22.19	21.89	
		1#14	21.78	22.09	21.59	
		8#0	21.77	21.89	21.53	
		8#4	21.61	21.74	21.48	
		8#7	21.45	21.66	21.42	
		15#0	21.41	21.52	21.41	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
5M	QPSK	1#0	22.55	22.68	22.54	30
		1#12	22.51	22.59	22.33	
		1#24	22.39	22.39	22.32	
		12#0	22.21	22.34	22.31	
		12#6	22.21	22.32	22.23	
		12#11	22.07	22.15	22.22	
		25#0	21.96	22.15	22.12	
	16-QAM	1#0	21.89	21.91	21.88	
		1#12	21.58	21.86	21.84	
		1#24	21.53	21.77	21.75	
		12#0	21.49	21.68	21.66	
		12#6	21.33	21.65	21.57	
		12#11	21.13	21.46	21.43	
		25#0	21.01	21.34	21.09	
10M	QPSK	1#0	22.61	22.58	22.47	30
		1#24	22.35	22.49	22.42	
		1#49	22.33	22.46	22.21	
		25#0	22.31	22.32	22.18	
		25#12	22.24	22.27	22.11	
		25#24	22.11	22.09	22.02	
		50#0	22.04	21.96	21.97	
	16-QAM	1#0	22.42	22.53	22.44	
		1#24	22.37	22.45	22.28	
		1#49	22.23	22.35	22.18	
		25#0	22.01	22.32	22.01	
		25#12	21.98	22.16	21.99	
		25#24	21.87	22.08	21.89	
		50#0	21.79	21.91	21.88	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
15M	QPSK	1#0	21.73	21.77	21.46	30
		1#37	21.67	21.69	21.35	
		1#74	21.63	21.52	21.18	
		36#0	21.61	21.51	21.16	
		36#17	21.51	21.45	21.13	
		36#35	21.35	21.41	21.12	
		75#0	21.26	21.26	21.09	
	16-QAM	1#0	21.77	21.70	21.76	
		1#37	21.64	21.58	21.55	
		1#74	21.19	21.52	21.55	
		36#0	21.05	21.42	21.43	
		36#17	21.04	21.27	21.31	
		36#35	21.19	21.12	21.31	
		75#0	21.14	21.09	21.07	
20M	QPSK	1#0	22.61	22.62	22.51	30
		1#49	22.59	22.55	22.45	
		1#99	22.45	22.51	22.44	
		50#0	22.41	22.48	22.19	
		50#24	22.17	22.32	22.16	
		50#49	21.98	22.13	22.13	
		100#0	21.91	22.08	21.89	
	16-QAM	1#0	22.58	22.44	22.54	
		1#49	22.44	22.41	22.49	
		1#99	22.12	22.38	22.44	
		50#0	22.12	22.23	22.31	
		50#24	22.07	22.18	22.15	
		50#49	21.97	22.05	22.06	
		100#0	21.88	21.88	21.93	

LTE Band 5

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
1.4M	QPSK	1#0	22.91	22.94	22.91	38.45
		1#3	22.87	22.87	22.43	
		1#5	22.83	22.84	22.32	
		3#0	22.38	22.69	22.24	
		3#1	22.27	22.61	22.11	
		3#3	22.21	22.28	21.99	
		6#0	22.16	22.19	21.91	
	16-QAM	1#0	22.91	22.89	22.71	
		1#3	22.65	22.77	22.19	
		1#5	22.56	22.73	22.08	
		3#0	22.17	22.55	22.07	
		3#1	22.13	22.18	22.01	
		3#3	21.96	22.13	21.96	
		6#0	21.93	21.95	21.92	
3M	QPSK	1#0	22.86	22.86	22.71	38.45
		1#7	22.44	22.47	22.59	
		1#14	22.43	22.39	22.51	
		8#0	22.34	22.16	22.28	
		8#4	22.18	22.09	22.26	
		8#7	21.83	22.01	22.16	
		15#0	21.66	21.99	21.72	
	16-QAM	1#0	22.51	22.51	22.67	
		1#7	22.18	22.42	22.52	
		1#14	22.16	22.27	22.43	
		8#0	21.81	22.08	22.41	
		8#4	21.72	21.82	22.36	
		8#7	21.69	21.81	22.21	
		15#0	21.61	21.57	21.66	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
5M	QPSK	1#0	22.72	22.76	22.58	38.45
		1#12	22.51	22.65	22.53	
		1#24	22.35	22.61	22.37	
		12#0	22.24	22.39	22.27	
		12#6	22.17	22.22	22.25	
		12#11	22.07	22.12	21.99	
		25#0	21.47	21.87	21.99	
	16-QAM	1#0	22.75	22.55	22.56	
		1#12	22.57	22.35	22.35	
		1#24	22.17	21.74	22.03	
		12#0	22.01	21.74	21.71	
		12#6	21.75	21.61	21.71	
		12#11	21.72	21.51	21.65	
		25#0	21.64	21.43	21.45	
10M	QPSK	1#0	22.69	22.83	22.74	38.45
		1#24	22.26	22.08	22.71	
		1#49	22.12	21.84	22.58	
		25#0	22.12	21.69	22.42	
		25#12	22.04	21.62	22.15	
		25#24	21.84	21.56	21.94	
		50#0	21.65	21.36	21.45	
	16-QAM	1#0	22.54	22.75	22.75	
		1#24	22.51	22.17	22.23	
		1#49	22.43	22.08	22.15	
		25#0	22.36	22.08	21.82	
		25#12	22.22	21.93	21.61	
		25#24	21.64	21.88	21.43	
		50#0	21.23	21.84	21.18	

LTE Band 7

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
5M	QPSK	1#0	21.79	22.36	22.34	33
		1#12	21.65	22.21	22.11	
		1#24	21.49	22.17	21.83	
		12#0	21.46	22.15	21.67	
		12#6	21.43	22.15	21.53	
		12#11	21.41	21.88	21.39	
		25#0	21.16	21.57	21.18	
	16-QAM	1#0	21.71	21.57	21.65	
		1#12	21.69	21.45	21.48	
		1#24	21.43	21.36	21.26	
		12#0	21.17	21.32	21.23	
		12#6	21.16	21.25	21.12	
		12#11	21.23	21.24	21.17	
		25#0	21.08	21.06	21.09	
10M	QPSK	1#0	22.15	22.31	22.25	33
		1#24	21.93	22.19	21.92	
		1#49	21.83	21.98	21.86	
		25#0	21.74	21.97	21.74	
		25#12	21.63	21.65	21.44	
		25#24	21.52	21.23	21.38	
		50#0	21.52	21.14	21.26	
	16-QAM	1#0	21.75	21.71	21.18	
		1#24	21.52	21.47	21.09	
		1#49	21.51	21.21	21.06	
		25#0	21.62	21.34	21.18	
		25#12	21.54	21.23	21.14	
		25#24	21.07	21.11	21.07	
		50#0	21.04	21.02	21.06	

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)	Limit (dBm)
15M	QPSK	1#0	22.09	22.49	21.93	33
		1#37	21.93	22.47	21.88	
		1#74	21.84	22.01	21.87	
		36#0	21.64	21.74	21.85	
		36#17	21.45	21.67	21.49	
		36#35	21.29	21.51	21.46	
		75#0	21.29	21.41	21.42	
	16-QAM	1#0	21.86	21.97	21.91	
		1#37	21.55	21.94	21.66	
		1#74	21.49	21.86	21.59	
		36#0	21.42	21.77	21.56	
		36#17	21.12	21.54	21.55	
		36#35	21.01	21.41	21.28	
		75#0	21.04	21.01	21.02	
20M	QPSK	1#0	22.25	22.33	22.32	33
		1#49	22.09	22.31	21.94	
		1#99	22.07	22.23	21.77	
		50#0	21.89	22.09	21.61	
		50#24	21.59	21.96	21.44	
		50#49	21.58	21.71	21.36	
		100#0	21.21	21.18	21.06	
	16-QAM	1#0	21.65	21.50	21.54	
		1#49	21.26	21.26	21.31	
		1#99	21.07	21.10	21.15	
		50#0	21.43	21.35	21.42	
		50#24	21.18	21.35	21.22	
		50#49	21.18	21.15	21.17	
		100#0	21.01	21.02	21.05	

Peak-to-average ratio (PAR):**GSM 850 Band**

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	2.32	13
	Middle	2.29	13
	High	2.46	13

Mode	Channel	PAR (dB)	Limit (dB)
GPRS	Low	2.33	13
	Middle	2.27	13
	High	2.43	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.54	13
	Middle	2.51	13
	High	2.48	13

WCDMA Band V

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA	Low	3.22	13
	Middle	3.21	13
	High	3.17	13
HSDPA	Low	2.87	13
	Middle	2.82	13
	High	2.76	13
HSUPA	Low	2.79	13
	Middle	2.74	13
	High	2.69	13
DC-HSDPA	Low	2.54	13
	Middle	2.51	13
	High	2.46	13

PCS 1900 Band

Mode	Channel	PAR (dB)	Limit (dB)
GSM	Low	2.32	13
	Middle	2.31	13
	High	2.27	13

Mode	Channel	PAR (dB)	Limit (dB)
GPRS	Low	2.32	13
	Middle	2.29	13
	High	2.46	13

Mode	Channel	PAR (dB)	Limit (dB)
EGPRS	Low	2.37	13
	Middle	2.49	13
	High	2.43	13

WCDMA Band II

Mode	Channel	PAR (dB)	Limit (dB)
WCDMA	Low	2.70	13
	Middle	2.71	13
	High	2.73	13
HSDPA	Low	2.32	13
	Middle	2.31	13
	High	2.29	13
HSUPA	Low	2.42	13
	Middle	2.48	13
	High	2.49	13
DC-HSDPA	Low	2.75	13
	Middle	2.80	13
	High	2.73	13

LTE Band 2

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.53	13	Pass
QPSK (100%RB Size)	5.76	13	Pass
16QAM (1RB Size)	4.78	13	Pass
16QAM (100%RB Size)	6.83	13	Pass

LTE Band 4

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	3.53	13	Pass
QPSK (100%RB Size)	6.23	13	Pass
16QAM (1RB Size)	5.34	13	Pass
16QAM (100%RB Size)	7.23	13	Pass

LTE Band 5

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.06	13	Pass
QPSK (100%RB Size)	7.29	13	Pass
16QAM (1RB Size)	6.02	13	Pass
16QAM (100%RB Size)	7.87	13	Pass

LTE Band 7

Modulation	Middle Channel (dB)	PAR Limit (dB)	Result
QPSK (1RB Size)	5.35	13	Pass
QPSK (100%RB Size)	7.26	13	Pass
16QAM (1RB Size)	6.05	13	Pass
16QAM (100%RB Size)	7.78	13	Pass

Radiated Power:**GSM Mode**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
GSM850 Band, Middle Channel (ERP)										
836.6	65.31	85	104	H	24.99	0.30	4.86	29.55	38.45	8.90
836.6	66.04	57	179	V	27.72	0.30	4.86	32.28	38.45	6.17
PCS 1900 Band, Middle Channel (EIRP)										
1880.0	86.68	169	104	H	17.10	0.85	8.81	25.06	33	7.94
1880.0	84.64	360	173	V	19.45	0.85	8.81	27.41	33	5.59

EGPRS Mode

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
GSM850 Band, Middle Channel(ERP)										
836.6	69.80	294	140	H	20.50	0.30	4.86	25.06	38.45	13.39
836.6	69.23	227	157	V	24.53	0.30	4.86	29.09	38.45	9.36
PCS 1900 Band, Middle Channel(EIRP)										
1880.0	88.45	119	202	H	17.97	1.40	6.72	23.29	33	9.71
1880.0	86.94	47	150	V	19.79	1.40	6.72	25.11	33	7.89

WCDMA Mode

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Band V, Middle Channel(ERP)										
836.6	73.43	354	142	H	23.20	0.63	-1.14	21.43	38.45	17.02
836.6	69.75	82	217	V	30.34	0.63	-1.14	28.57	38.45	9.88
WCDMA Band II, Middle Channel(EIRP)										
1880.0	90.14	123	144	H	13.64	0.85	8.81	21.60	33	11.4
1880.0	87.30	201	205	V	16.79	0.85	8.81	24.75	33	8.25

Note:

All above data were tested with no amplifier.

Absolute Level = Submitted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

ERP:**LTE Band 5**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW Middle Channel								
836.5	H	82.17	21.48	0.63	-1.14	19.71	38.45	18.74
836.5	V	92.26	25.11	0.63	-1.14	23.34	38.45	15.11
16-QAM 1.4M BW Middle Channel								
836.5	H	82.86	22.17	0.63	-1.14	20.40	38.45	18.05
836.5	V	92.78	25.63	0.63	-1.14	23.86	38.45	14.59
QPSK 3M BW Middle Channel								
836.5	H	81.79	21.10	0.63	-1.14	19.33	38.45	19.12
836.5	V	92.12	24.97	0.63	-1.14	23.20	38.45	15.25
16-QAM 3M BW Middle Channel								
836.5	H	82.13	21.44	0.63	-1.14	19.67	38.45	18.78
836.5	V	92.46	25.31	0.63	-1.14	23.54	38.45	14.91
QPSK 5M BW Middle Channel								
836.5	H	81.99	21.30	0.63	-1.14	19.53	38.45	18.92
836.5	V	92.03	24.88	0.63	-1.14	23.11	38.45	15.34
16-QAM 5M BW Middle Channel								
836.5	H	82.03	21.34	0.63	-1.14	19.57	38.45	18.88
836.5	V	92.13	24.98	0.63	-1.14	23.21	38.45	15.24
QPSK 10M BW Middle Channel								
836.5	H	83.17	22.48	0.63	-1.14	20.71	38.45	17.74
836.5	V	91.02	23.87	0.63	-1.14	22.10	38.45	16.35
16-QAM 10M BW Middle Channel								
836.5	H	81.24	20.55	0.63	-1.14	18.78	38.45	19.67
836.5	V	91.38	24.23	0.63	-1.14	22.46	38.45	15.99

EIRP:**LTE Band 2**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW Middle Channel								
1880.0	H	82.83	11.81	0.85	8.81	19.77	33	13.23
1880.0	V	86.55	15.22	0.85	8.81	23.18	33	9.82
16-QAM 1.4M BW Middle Channel								
1880.0	H	82.88	11.86	0.85	8.81	19.82	33	13.18
1880.0	V	86.52	15.19	0.85	8.81	23.15	33	9.85
QPSK 3M BW Middle Channel								
1880.0	H	80.92	9.90	0.85	8.81	17.86	33	15.14
1880.0	V	85.25	13.92	0.85	8.81	21.88	33	11.12
16-QAM 3M BW Middle Channel								
1880.0	H	81.52	10.50	0.85	8.81	18.46	33	14.54
1880.0	V	85.59	14.26	0.85	8.81	22.22	33	10.78
QPSK 5M BW Middle Channel								
1880.0	H	79.56	8.54	0.85	8.81	16.50	33	16.50
1880.0	V	84.02	12.69	0.85	8.81	20.65	33	12.35
16-QAM 5M BW Middle Channel								
1880.0	H	79.37	8.35	0.85	8.81	16.31	33	16.69
1880.0	V	83.72	12.39	0.85	8.81	20.35	33	12.65
QPSK 10M BW Middle Channel								
1880.0	H	78.66	7.64	0.85	8.81	15.60	33	17.40
1880.0	V	83.26	11.93	0.85	8.81	19.89	33	13.11
16-QAM 10M BW Middle Channel								
1880.0	H	79.17	8.15	0.85	8.81	16.11	33	16.89
1880.0	V	83.51	12.18	0.85	8.81	20.14	33	12.86
QPSK 15M BW Middle Channel								
1880.0	H	78.17	7.15	0.85	8.81	15.11	33	17.89
1880.0	V	82.84	11.51	0.85	8.81	19.47	33	13.53
16-QAM 15M BW Middle Channel								
1880.0	H	78.62	7.60	0.85	8.81	15.56	33	17.44
1880.0	V	83.09	11.76	0.85	8.81	19.72	33	13.28
QPSK 20M BW Middle Channel								
1880.0	H	77.42	6.40	0.85	8.81	14.36	33	18.64
1880.0	V	82.26	10.93	0.85	8.81	18.89	33	14.11
16-QAM 20M BW Middle Channel								
1880.0	H	77.95	6.93	0.85	8.81	14.89	33	18.11
1880.0	V	82.77	11.44	0.85	8.81	19.40	33	13.60

LTE Band 4

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4M BW Middle Channel								
1732.5	H	84.82	12.78	0.84	8.57	20.51	30	9.49
1732.5	V	87.58	15.27	0.84	8.57	23.00	30	7.00
16-QAM 1.4M BW Middle Channel								
1732.5	H	85.32	13.28	0.84	8.57	21.01	30	8.99
1732.5	V	88.21	15.90	0.84	8.57	23.63	30	6.37
QPSK 3M BW Middle Channel								
1732.5	H	84.35	12.31	0.84	8.57	20.04	30	9.96
1732.5	V	87.01	14.70	0.84	8.57	22.43	30	7.57
16-QAM 3M BW Middle Channel								
1732.5	H	84.87	12.83	0.84	8.57	20.56	30	9.44
1732.5	V	87.45	15.14	0.84	8.57	22.87	30	7.13
QPSK 5M BW Middle Channel								
1732.5	H	83.98	11.94	0.84	8.57	19.67	30	10.33
1732.5	V	86.41	14.10	0.84	8.57	21.83	30	8.17
16-QAM 5M BW Middle Channel								
1732.5	H	84.21	12.17	0.84	8.57	19.90	30	10.10
1732.5	V	86.98	14.67	0.84	8.57	22.40	30	7.60
QPSK 10M BW Middle Channel								
1732.5	H	83.49	11.45	0.84	8.57	19.18	30	10.82
1732.5	V	85.69	13.38	0.84	8.57	21.11	30	8.89
16-QAM 10M BW Middle Channel								
1732.5	H	82.01	9.97	0.84	8.57	17.70	30	12.30
1732.5	V	84.92	12.61	0.84	8.57	20.34	30	9.66
QPSK 15M BW Middle Channel								
1732.5	H	81.67	9.63	0.84	8.57	17.36	30	12.64
1732.5	V	83.73	11.42	0.84	8.57	19.15	30	10.85
16-QAM 15M BW Middle Channel								
1732.5	H	81.21	9.17	0.84	8.57	16.90	30	13.10
1732.5	V	84.18	11.87	0.84	8.57	19.60	30	10.40
QPSK 20M BW Middle Channel								
1732.5	H	79.36	7.32	0.84	8.57	15.05	30	14.95
1732.5	V	82.63	10.32	0.84	8.57	18.05	30	11.95
16-QAM 20M BW Middle Channel								
1732.5	H	80.31	8.27	0.84	8.57	16.00	30	14.00
1732.5	V	83.12	10.81	0.84	8.57	18.54	30	11.46

LTE Band 7

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Submitted Level (dBm)	Cable loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5M BW Middle Channel								
2535.0	H	74.43	4.87	0.89	10.05	14.03	33	18.97
2535.0	V	81.11	11.55	0.89	10.05	20.71	33	12.29
16-QAM 5M BW Middle Channel								
2535.0	H	74.97	5.41	0.89	10.05	14.57	33	18.43
2535.0	V	81.75	12.19	0.89	10.05	21.35	33	11.65
QPSK 10M BW Middle Channel								
2535.0	H	73.99	4.43	0.89	10.05	13.59	33	19.41
2535.0	V	81.12	11.56	0.89	10.05	20.72	33	12.28
16-QAM 10M BW Middle Channel								
2535.0	H	74.51	4.95	0.89	10.05	14.11	33	18.89
2535.0	V	80.78	11.22	0.89	10.05	20.38	33	12.62
QPSK 15M BW Middle Channel								
2535.0	H	73.45	3.89	0.89	10.05	13.05	33	19.95
2535.0	V	80.53	10.97	0.89	10.05	20.13	33	12.87
16-QAM 15M BW Middle Channel								
2535.0	H	74.17	4.61	0.89	10.05	13.77	33	19.23
2535.0	V	80.11	10.55	0.89	10.05	19.71	33	13.29
QPSK 20M BW Middle Channel								
2535.0	H	72.61	3.05	0.89	10.05	12.21	33	20.79
2535.0	V	79.26	9.70	0.89	10.05	18.86	33	14.14
16-QAM 20M BW Middle Channel								
2535.0	H	73.12	3.56	0.89	10.05	12.72	33	20.28
2535.0	V	79.87	10.31	0.89	10.05	19.47	33	13.53

Note:

All above data were tested with no amplifier

Absolute Level = Submitted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level


FCC §2.1049, §22.917, §22.905 §24.238 & §27.53 - OCCUPIED BANDWIDTH**Applicable Standards**

FCC 47 §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

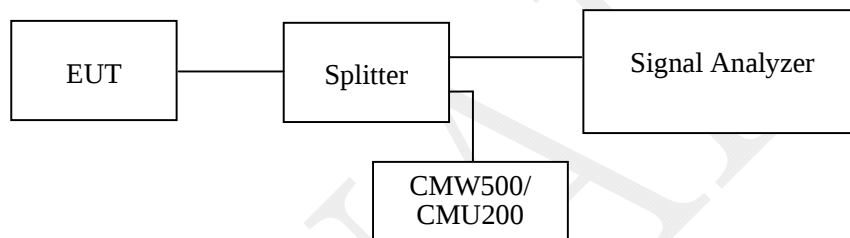**Test Data****Environmental Conditions**

Temperature:	23 °C
Relative Humidity:	50 %
ATM Pressure:	101.0kPa

The testing was performed by Max Min on 2017-11-14 to 2017-11-21.

EUT operation mode: Transmitting

Test Result: Compliance.

GSM 850 Band

Mode	Frequency (MHz)	26 dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
GSM (GMSK)	836.6	308.62	240.48
GSM (GMSK)	836.6	316.63	244.49
EGPRS (8PSK)	836.6	314.63	246.49

WCDMA Band V



Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
WCDMA (BPSK)	836.6	4.73	4.15



PCS 1900 Band

Mode	Frequency (MHz)	26 dB Emission Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
GSM (GMSK)	1880.0	308.62	242.48
GSM (GMSK)	1880.0	316.63	246.49
EGPRS (8PSK)	1880.0	306.61	244.49

WCDMA Band II


Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
WCDMA (BPSK)	1880.0	4.73	4.17

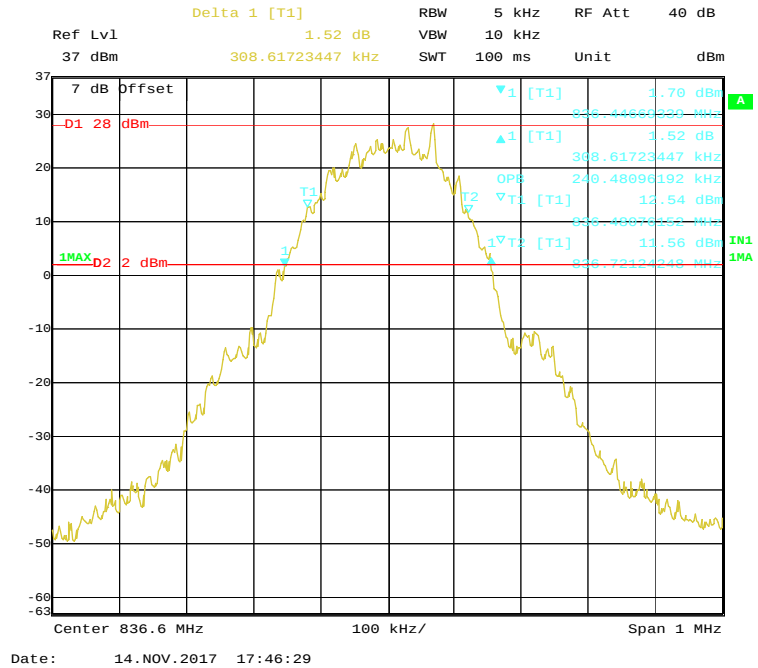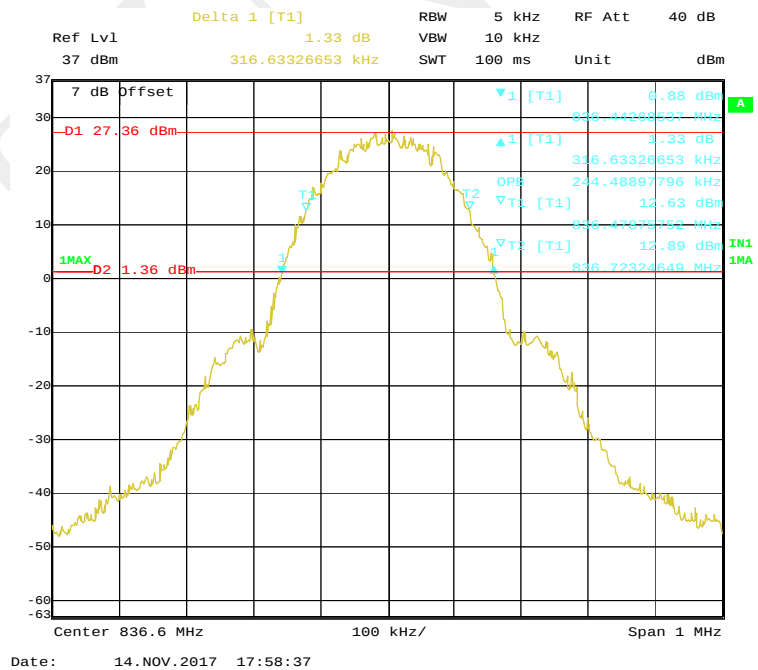GSM 850 Band**99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode****99% Occupied & 26 dB Emissions Bandwidth for GRPS (GMSK) Mode**

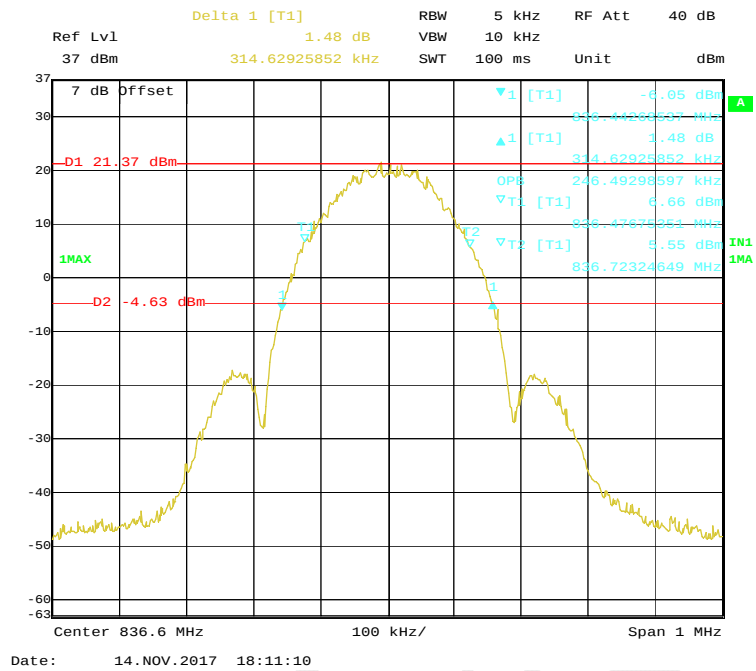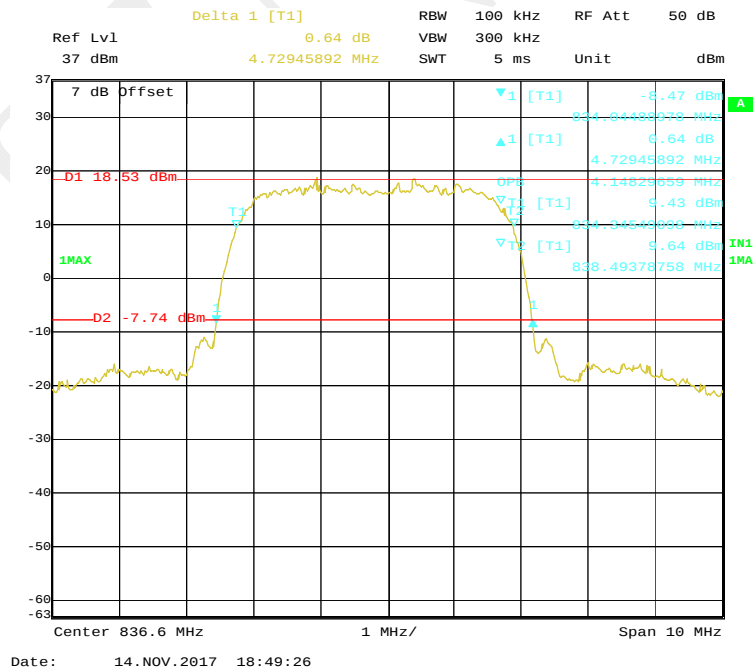
99% Occupied & 26 dB Emissions Bandwidth for EGRPS (8PSK) Mode**WCDMA Band V****99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**



PCS 1900Band

99% Occupied & 26 dB Emissions Bandwidth for GSM (GMSK) Mode

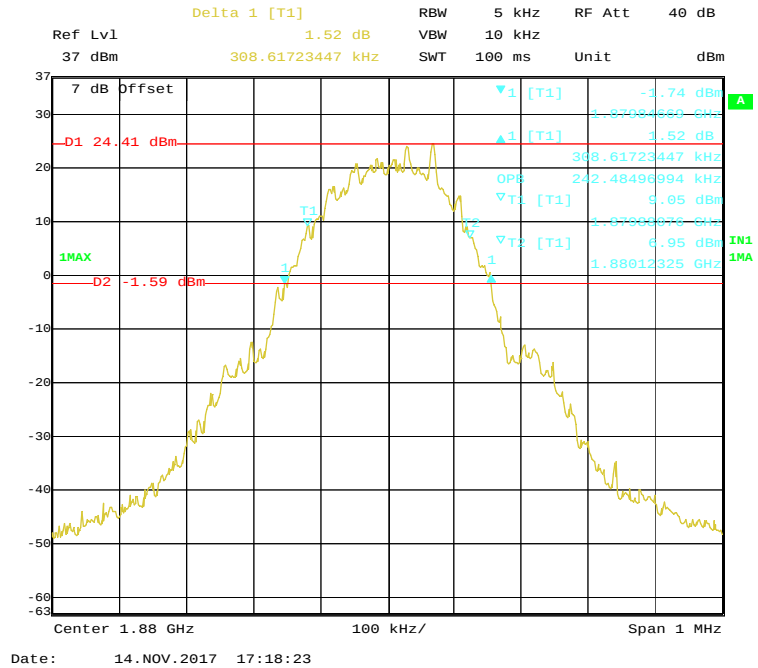

99% Occupied & 26 dB Emissions Bandwidth for GPRS (GMSK) Mode

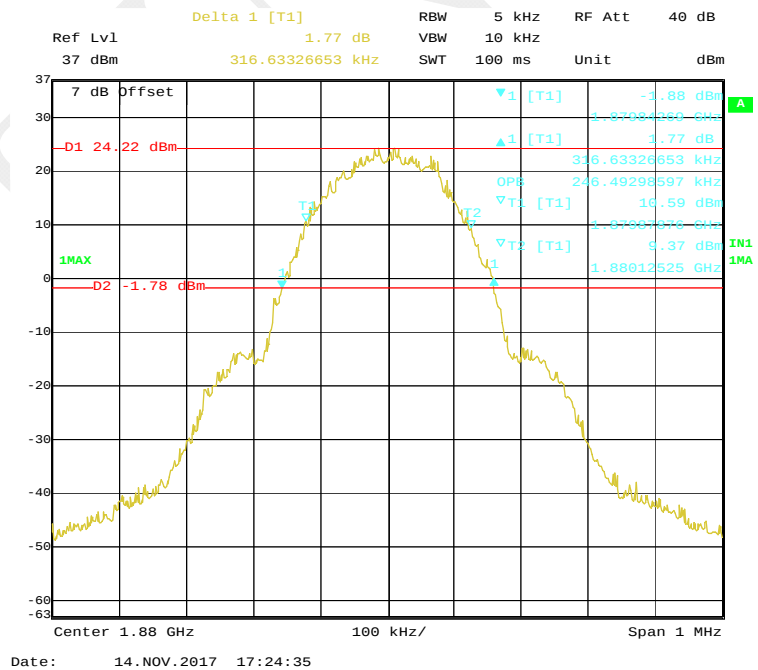

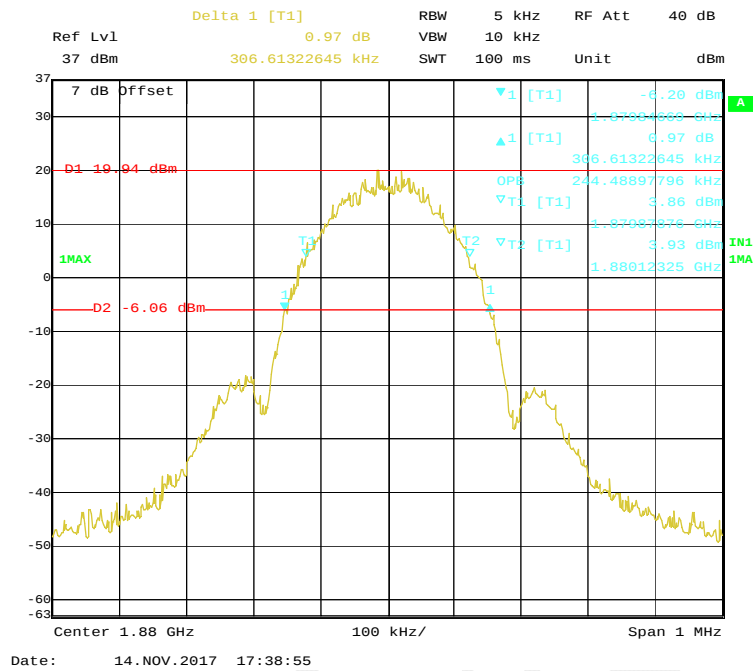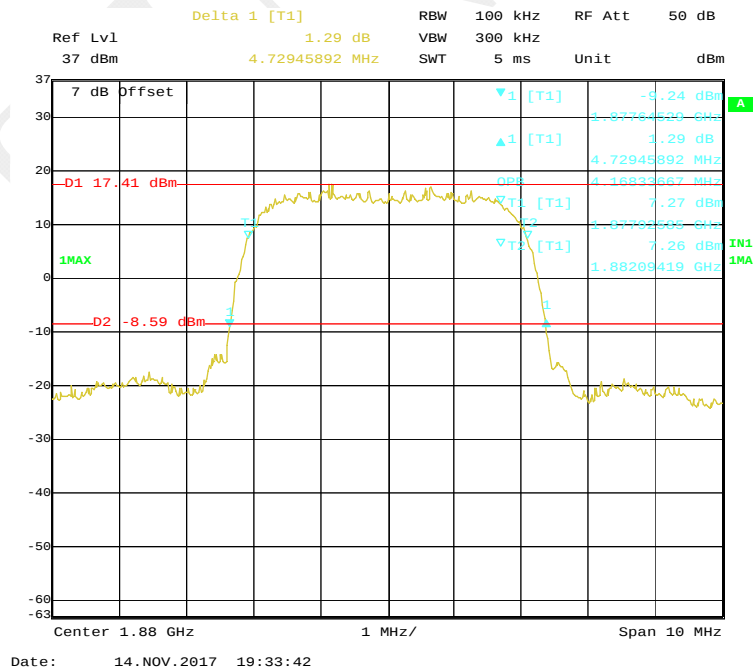99% Occupied & 26 dB Emissions Bandwidth for EGRPS (8PSK) Mode**WCDMA Band II****99% Occupied & 26 dB Emissions Bandwidth for WCDMA (BPSK) Mode**

LTE Band 2:

Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
QPSK	1.4M	Middle	1.33	1.11
	3M		2.95	2.71
	5M		5.01	4.53
	10M		9.62	8.98
	15M		14.92	13.53
	20M		19.34	17.88
16-QAM	1.4M	Middle	1.31	1.12
	3M		2.95	2.71
	5M		5.03	4.53
	10M		9.69	8.94
	15M		14.77	13.47
	20M		19.33	17.96

LTE Band 4:



Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
QPSK	1.4M	Middle	1.33	1.11
	3M		2.96	2.71
	5M		5.03	4.53
	10M		9.63	8.94
	15M		14.93	13.53
	20M		19.40	17.96
16-QAM	1.4M	Middle	1.32	1.12
	3M		2.94	2.71
	5M		5.05	4.55
	10M		9.74	8.94
	15M		14.90	13.53
	20M		19.22	17.96

LTE Band 5:


Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
QPSK	1.4M	Middle	1.30	1.12
	3M		2.95	2.71
	5M		5.01	4.53
	10M		9.74	9.02
16-QAM	1.4M	Middle	1.32	1.11
	3M		2.95	2.71
	5M		5.03	4.55
	10M		9.81	8.94

LTE Band 7:


Test Modulation	Test Bandwidth	Test Channel	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
QPSK	5M	Middle	5.01	4.55
	10M		9.61	8.94
	15M		14.85	13.53
	20M		19.33	17.96
16-QAM	5M	Middle	5.06	4.55
	10M		9.82	8.98
	15M		14.86	13.53
	20M		19.50	17.96

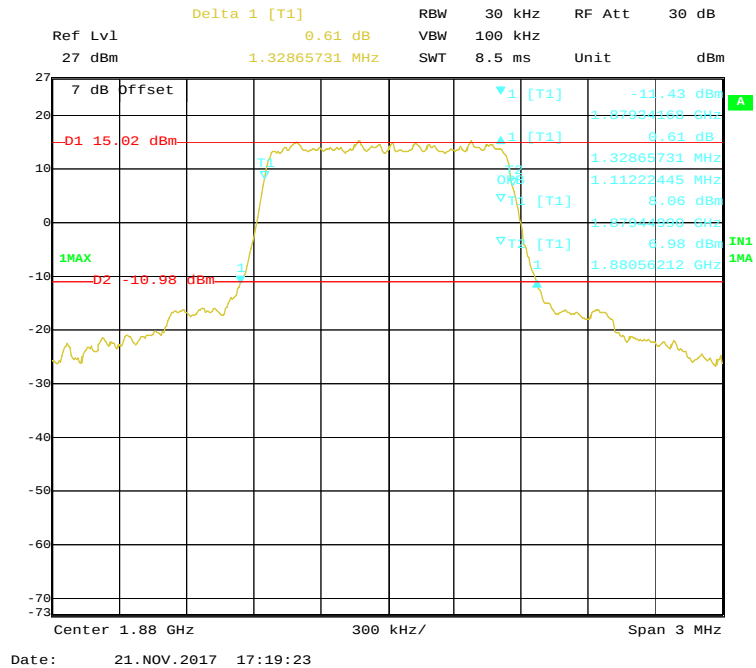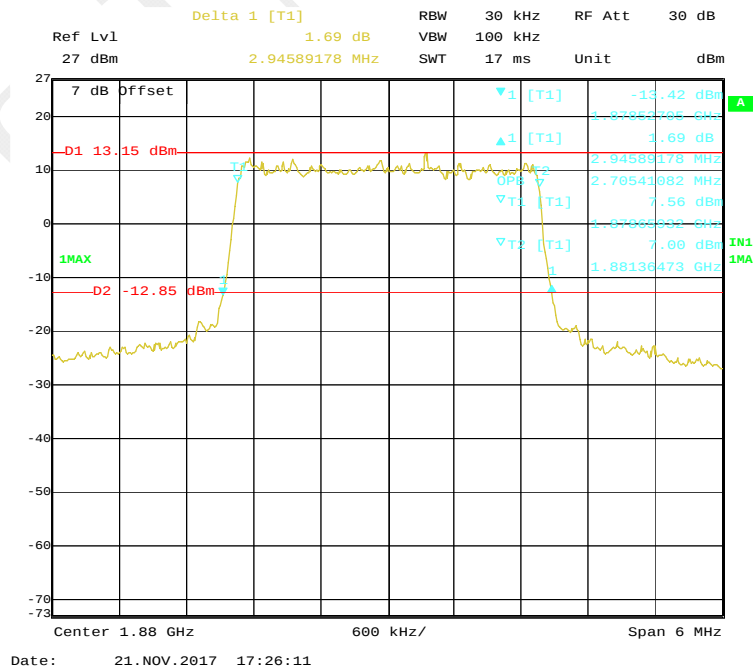26 dB Bandwidth & 99% Occupied Bandwidth**LTE Band 2:****QPSK (1.4 MHz) - Middle channel****QPSK (3.0 MHz) - Middle channel**


QPSK (5.0 MHz) - Middle channel

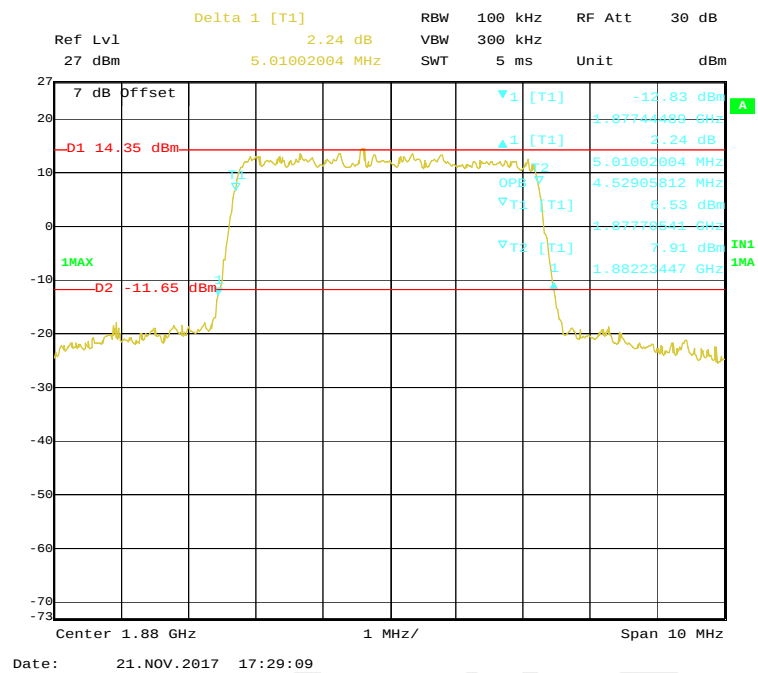


QPSK (10.0MHz) - Middle channel

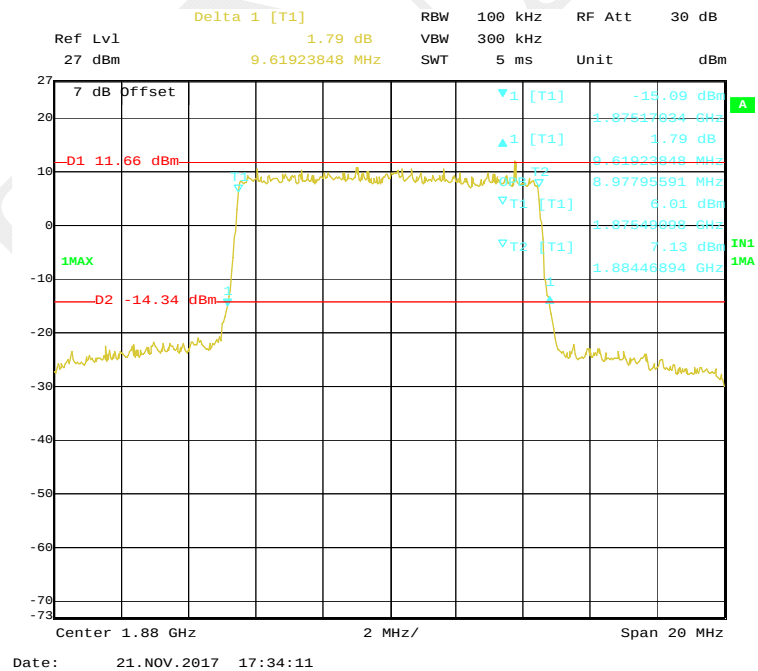


QPSK (15.0 MHz) - Middle channel


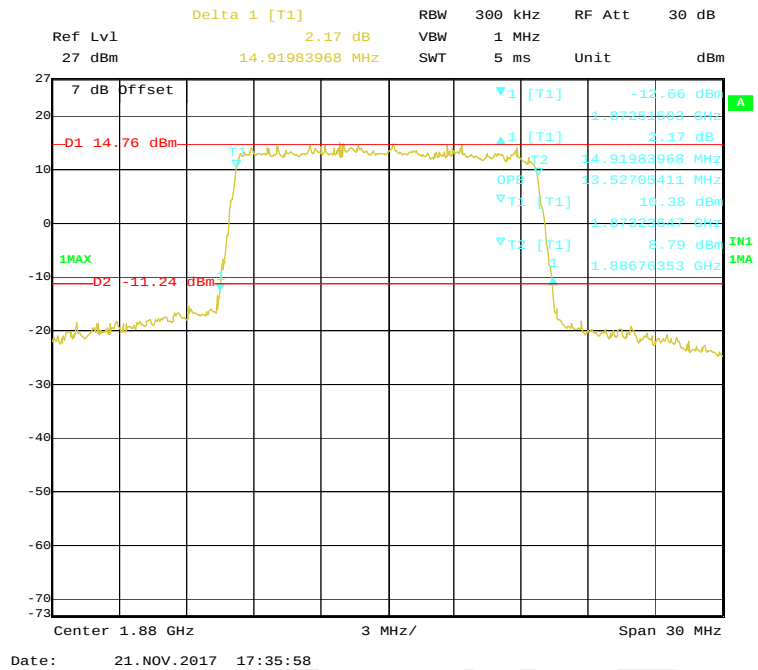




QPSK (20.0MHz) - Middle channel

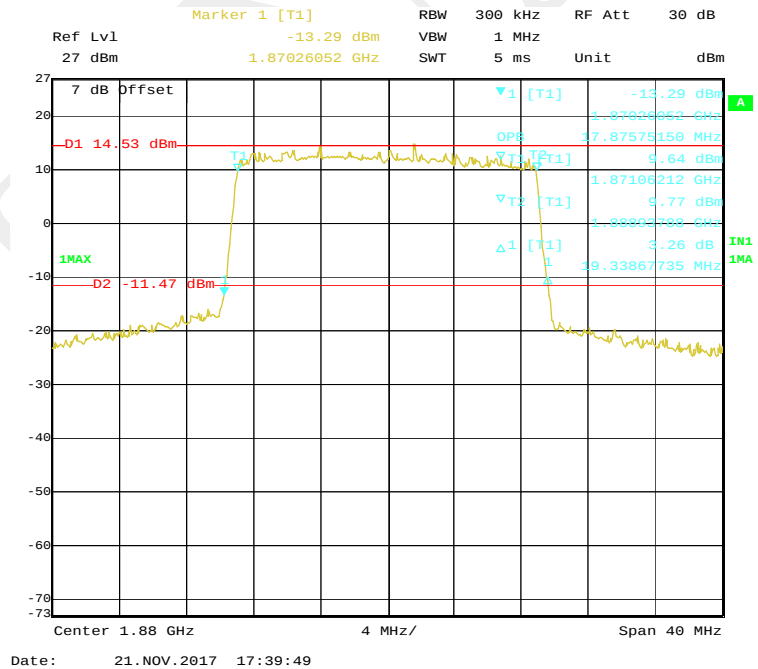

16-QAM (1.4 MHz) - Middle channel

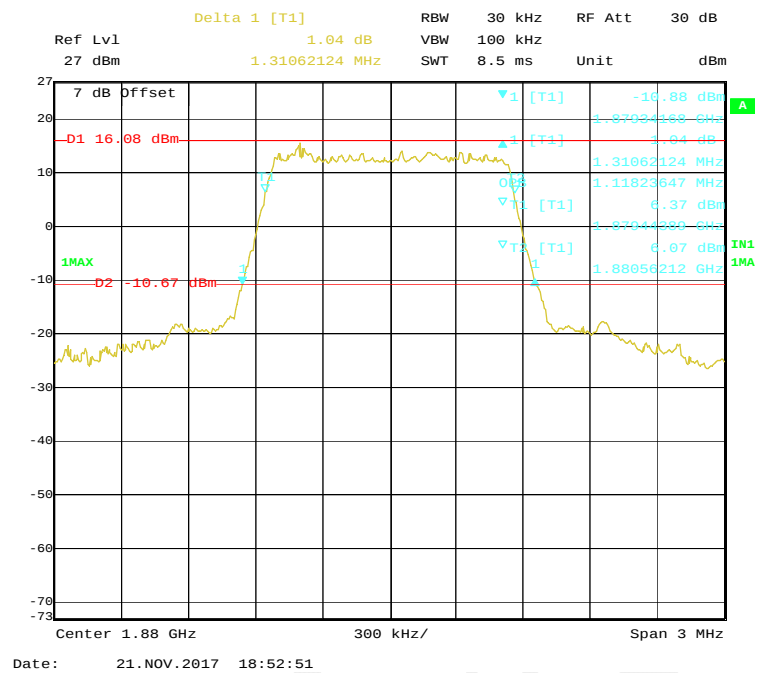


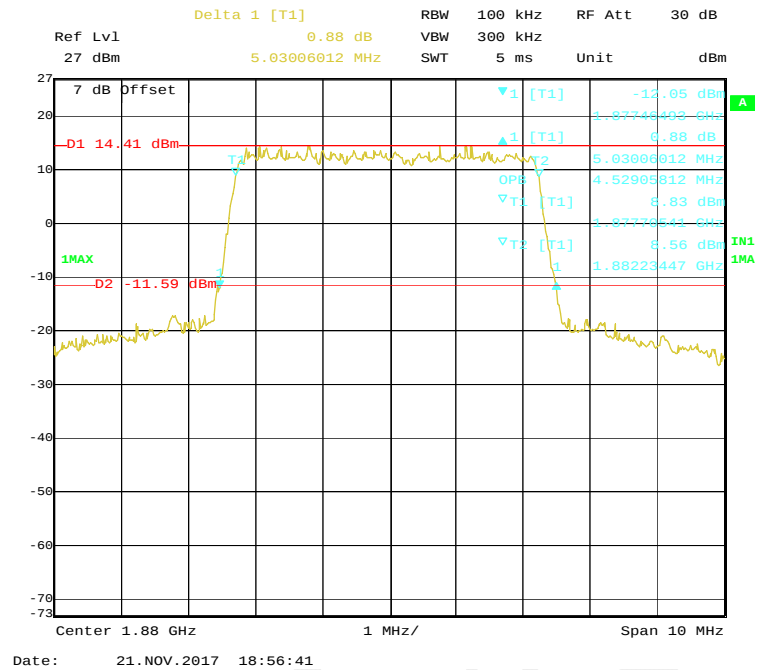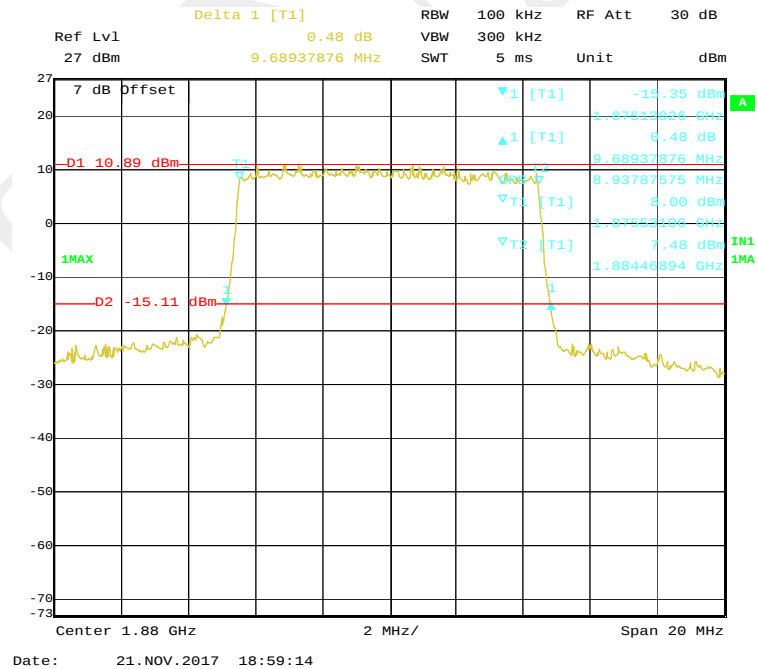16-QAM (5.0 MHz) - Middle channel**16-QAM (10.0 MHz) - Middle channel**

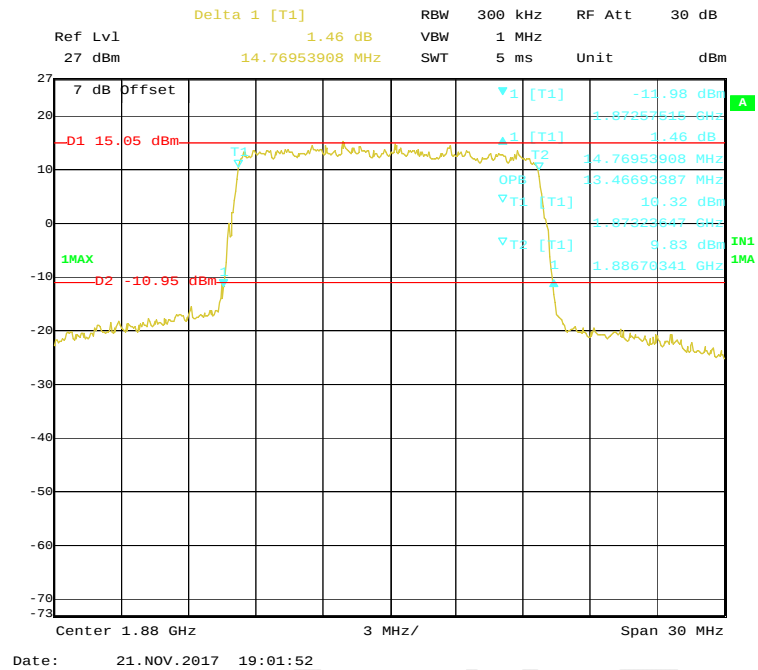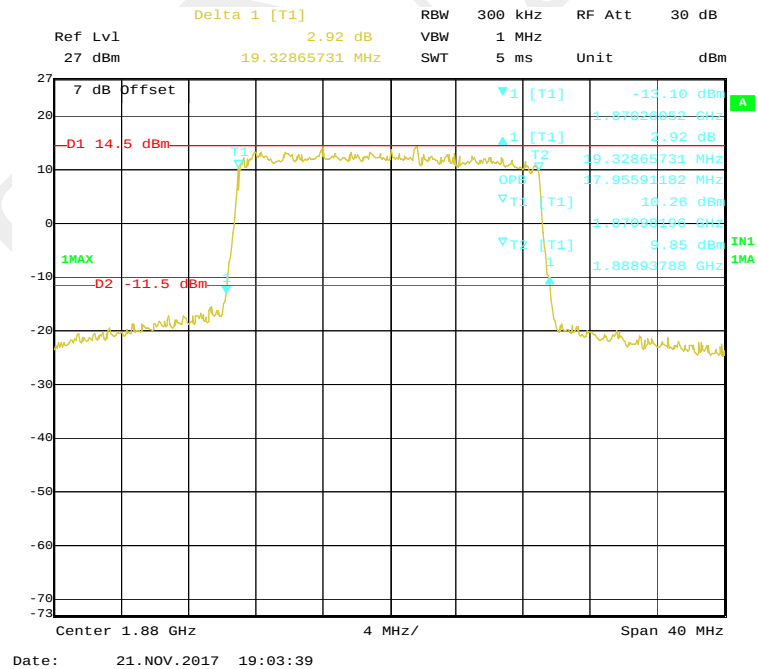
16-QAM (15.0 MHz) - Middle channel**16-QAM (20.0 MHz) - Middle channel**

LTE Band 4:


QPSK (1.4 MHz) - Middle channel

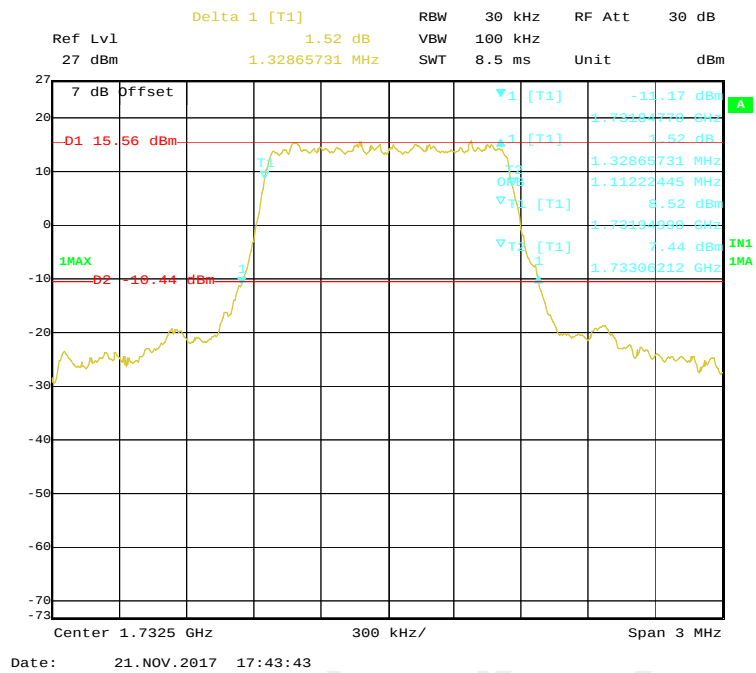


QPSK (3.0 MHz) - Middle channel

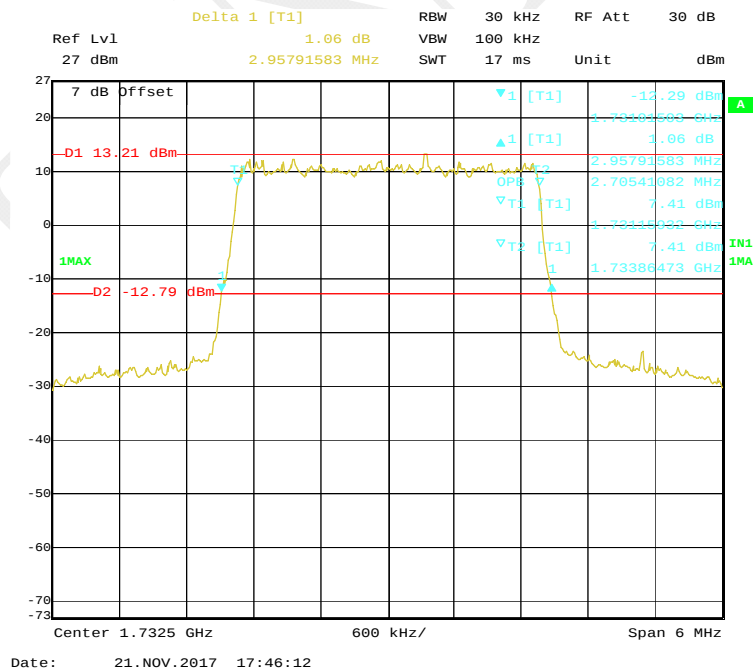


QPSK (5.0 MHz) - Middle channel

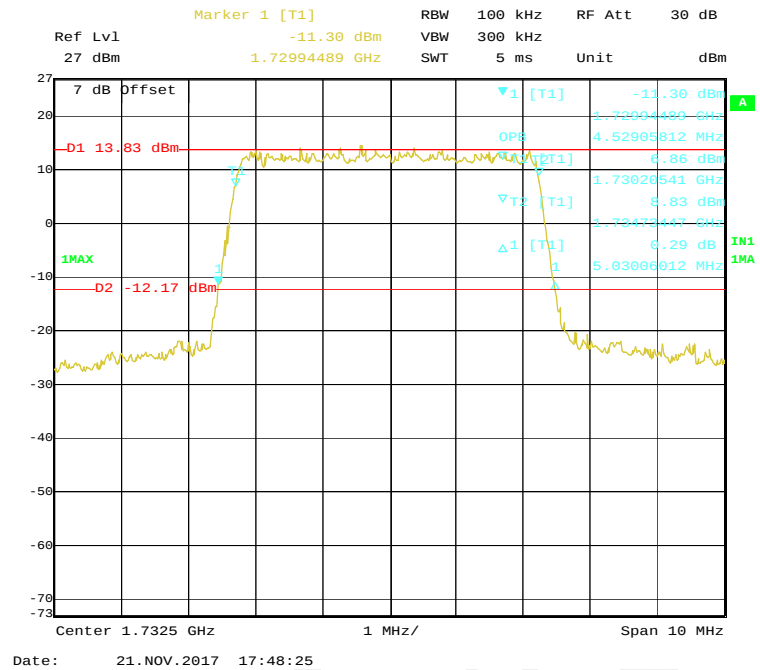


QPSK (10.0MHz) - Middle channel

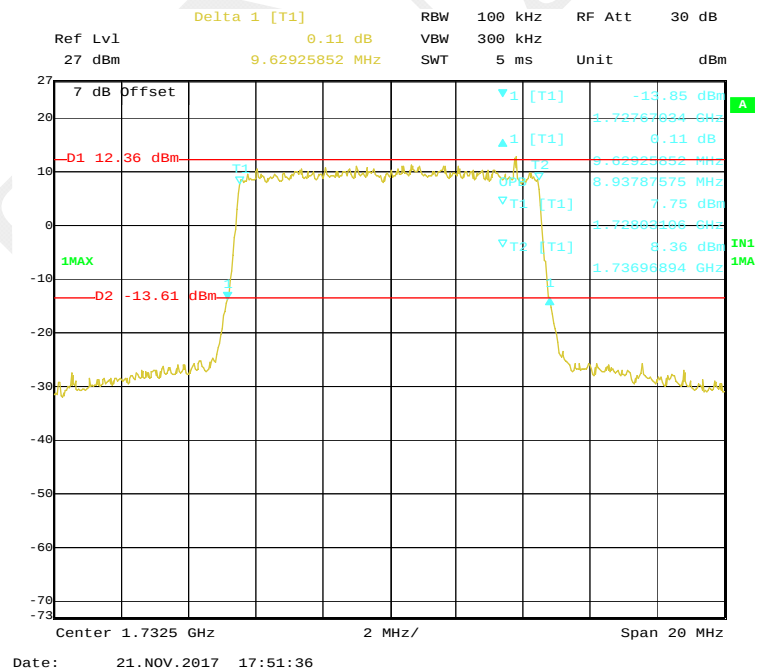


QPSK (15.0 MHz) - Middle channel

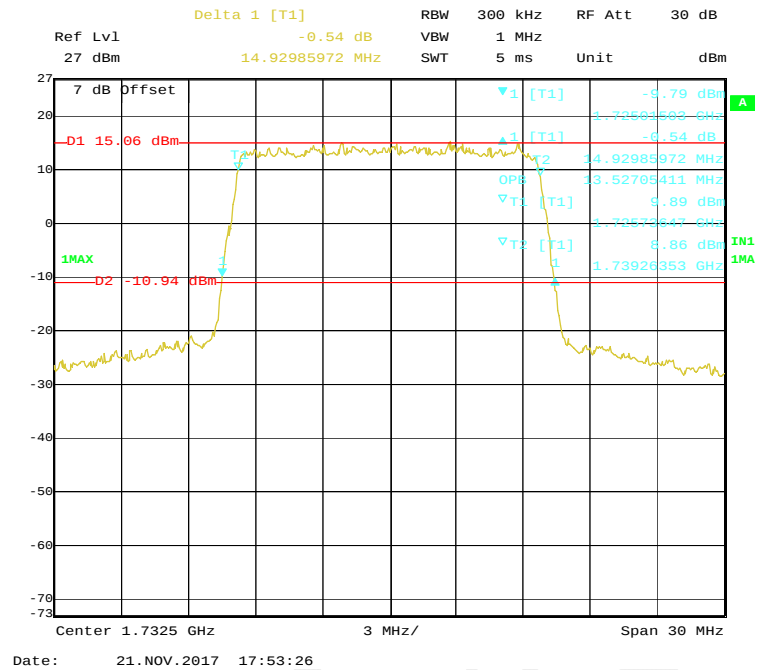


QPSK (20.0MHz) - Middle channel


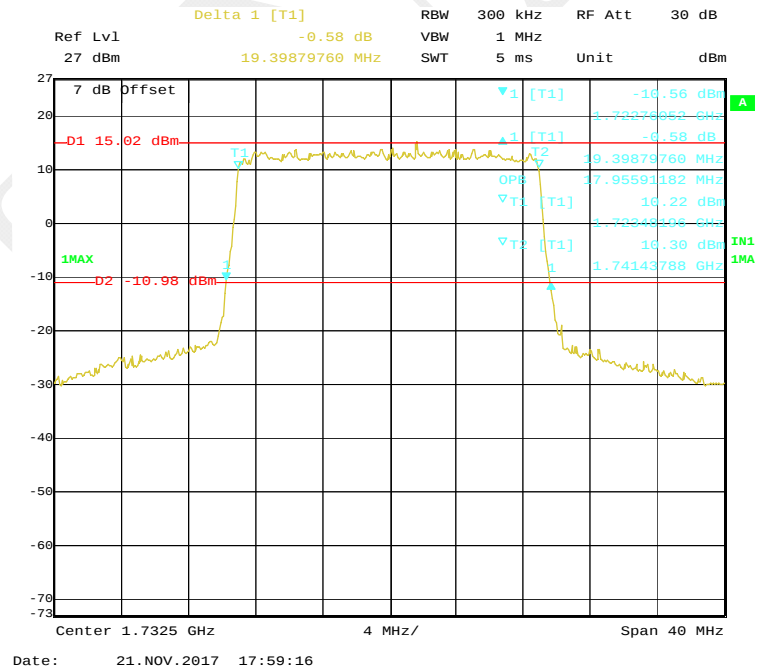




16-QAM (1.4 MHz) - Middle channel

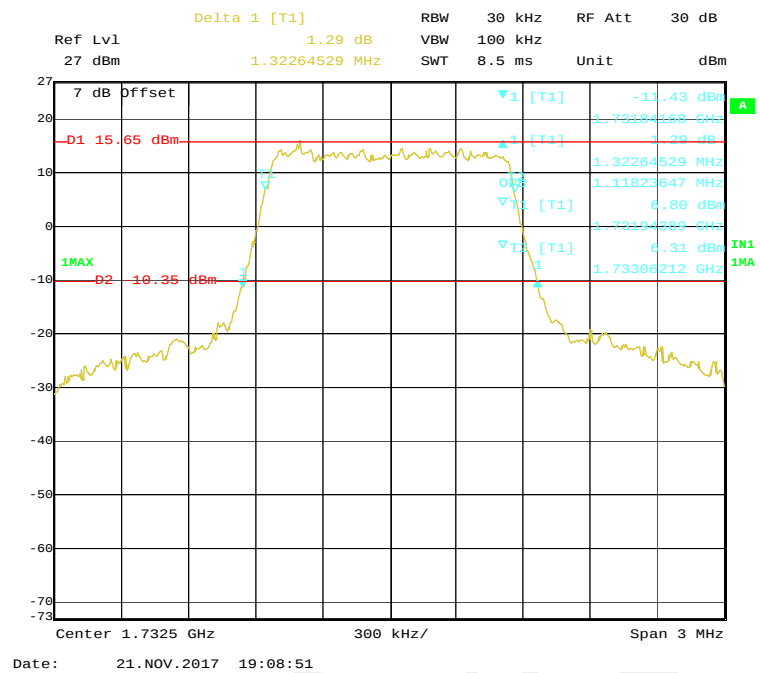

16-QAM (3.0 MHz) - Middle channel

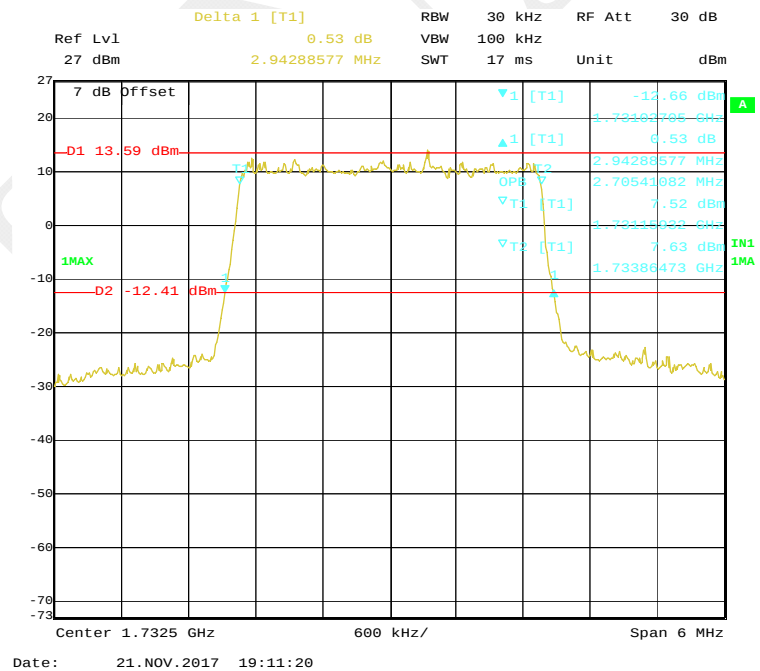


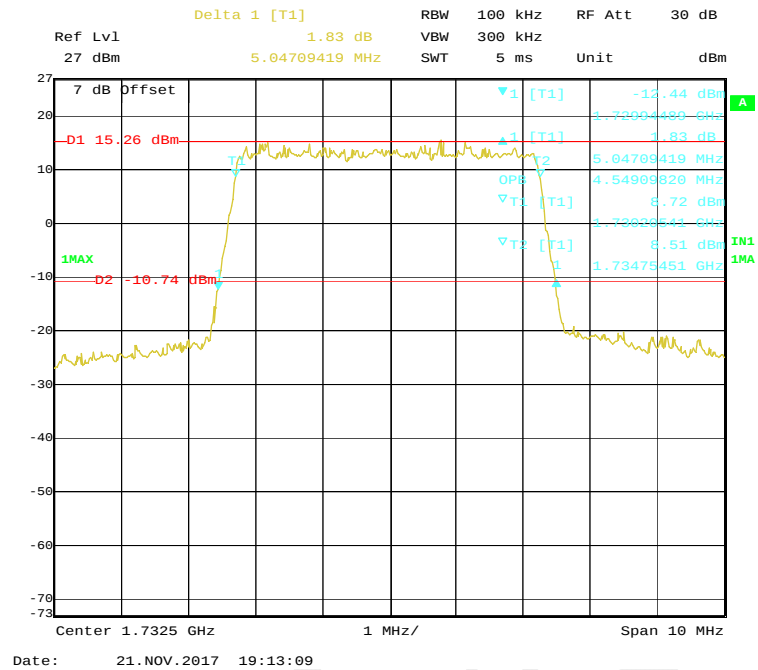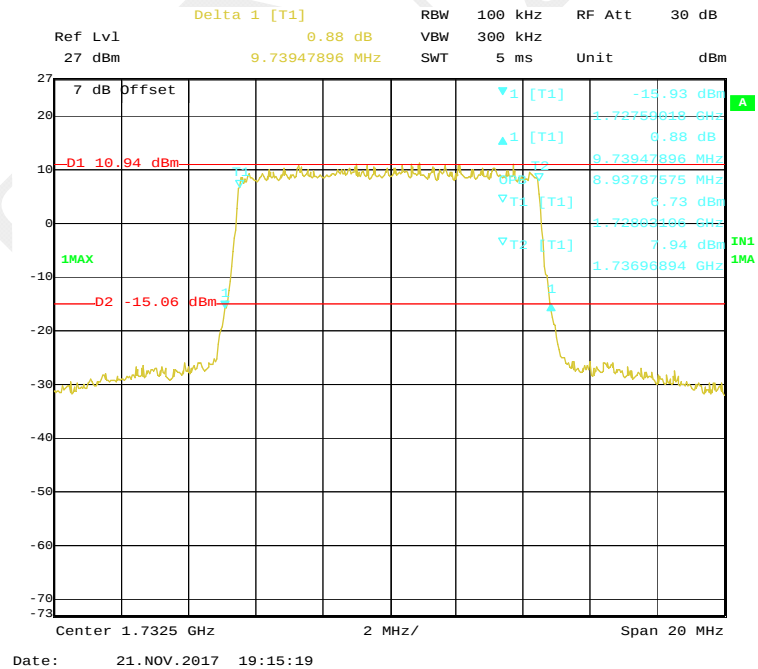16-QAM (5.0 MHz) - Middle channel**16-QAM (10.0 MHz) - Middle channel**

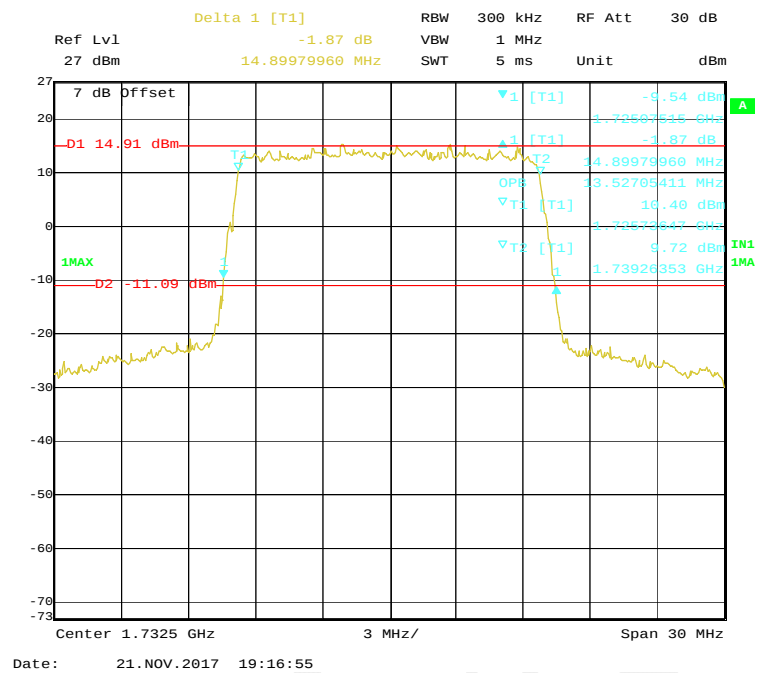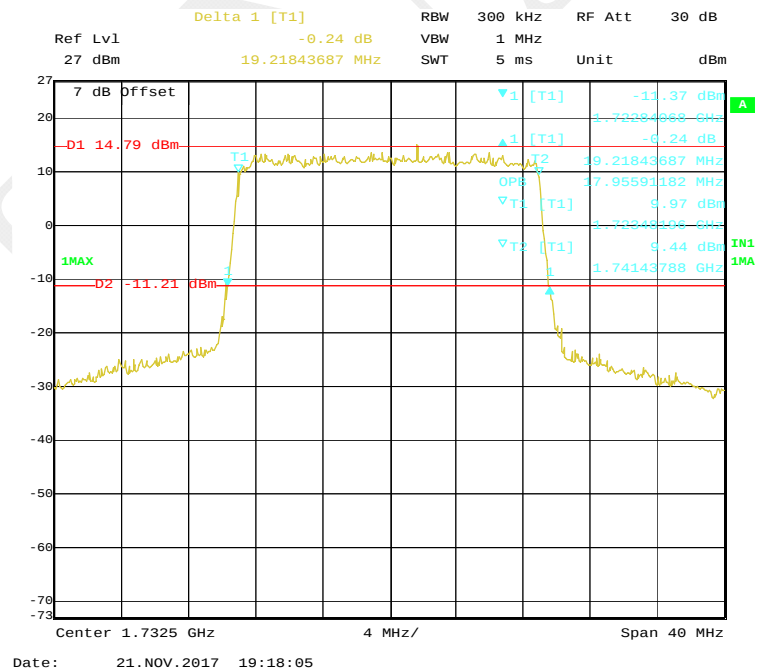
16-QAM (15.0 MHz) - Middle channel**16-QAM (20.0 MHz) - Middle channel**

LTE Band 5:


QPSK (1.4 MHz) - Middle channel

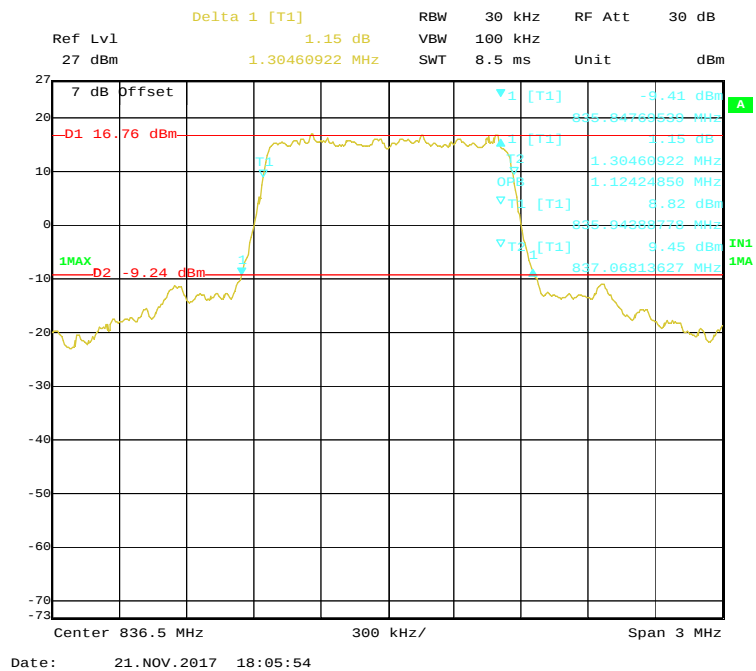


QPSK (3.0 MHz) - Middle channel

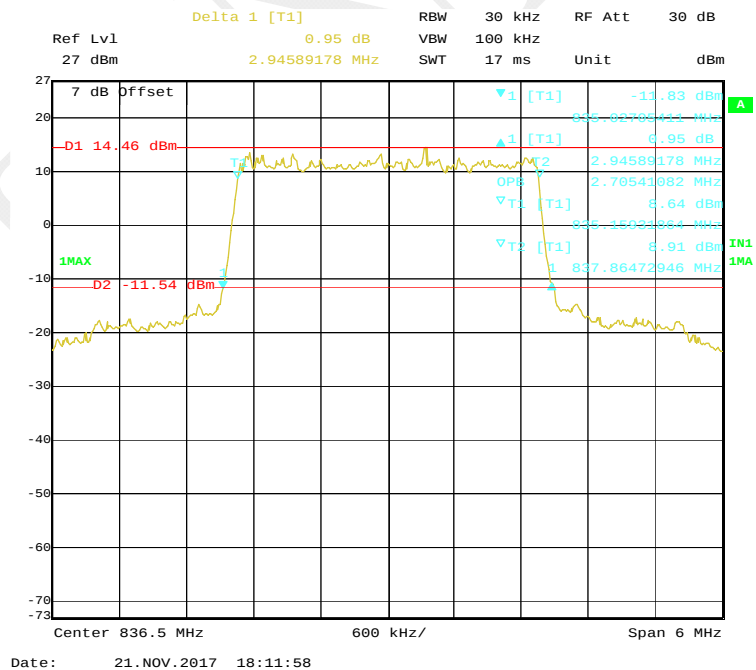


QPSK (5.0 MHz) - Middle channel

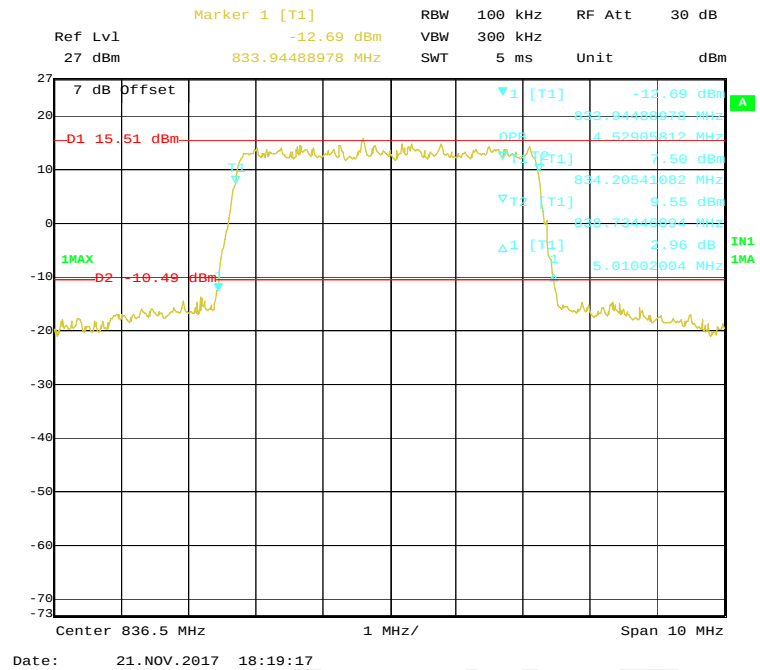


QPSK (10.0MHz) - Middle channel


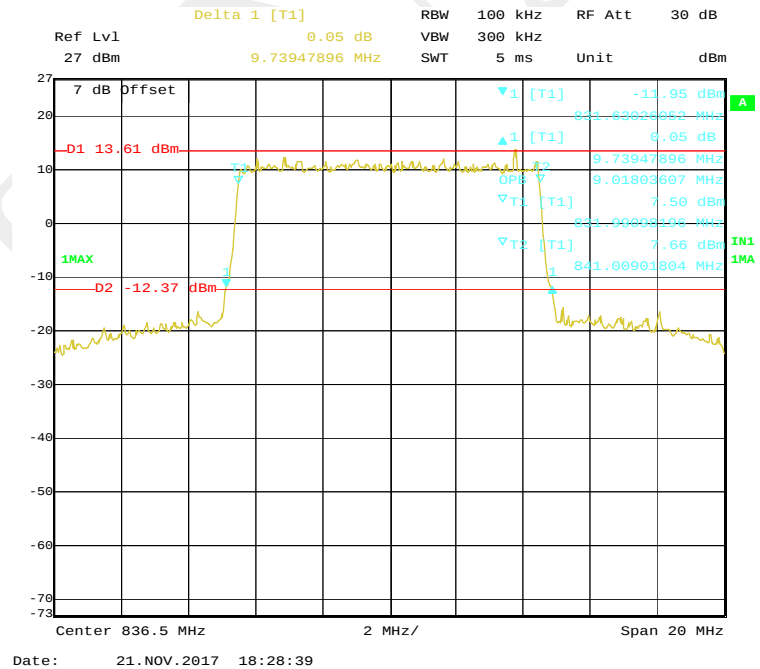


16-QAM (1.4 MHz) - Middle channel

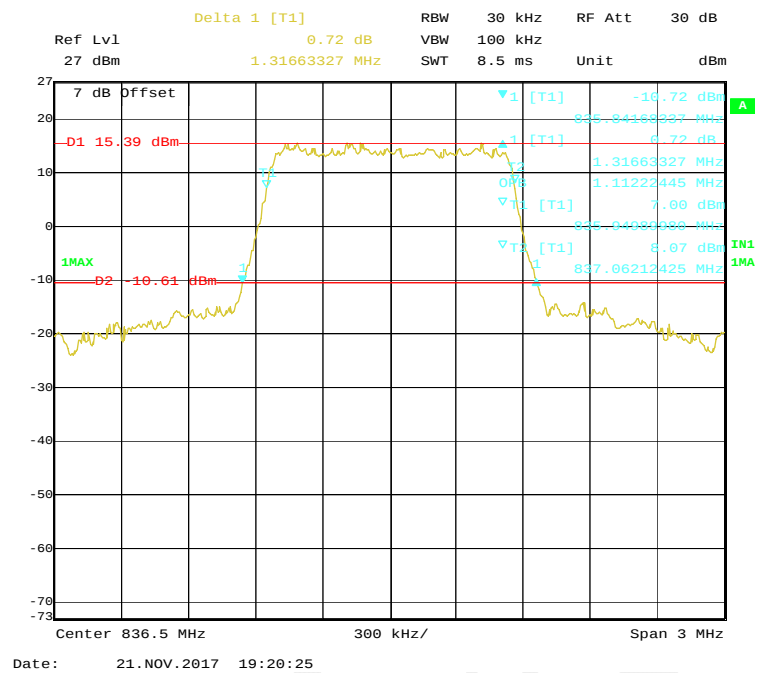


16-QAM (3.0 MHz) - Middle channel

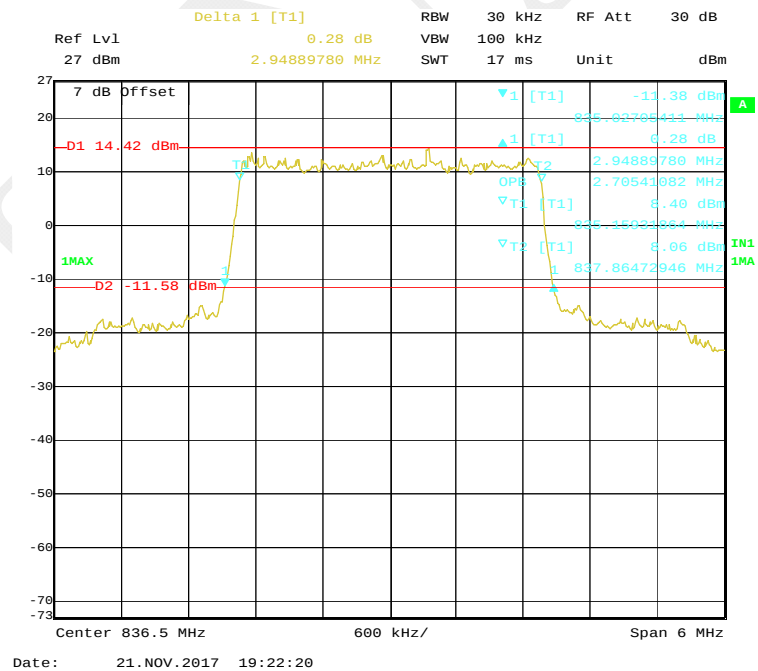

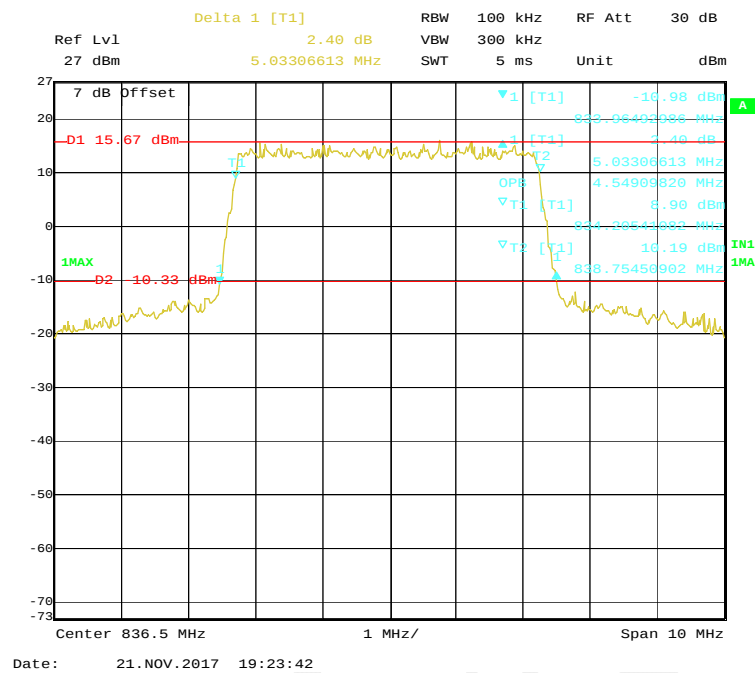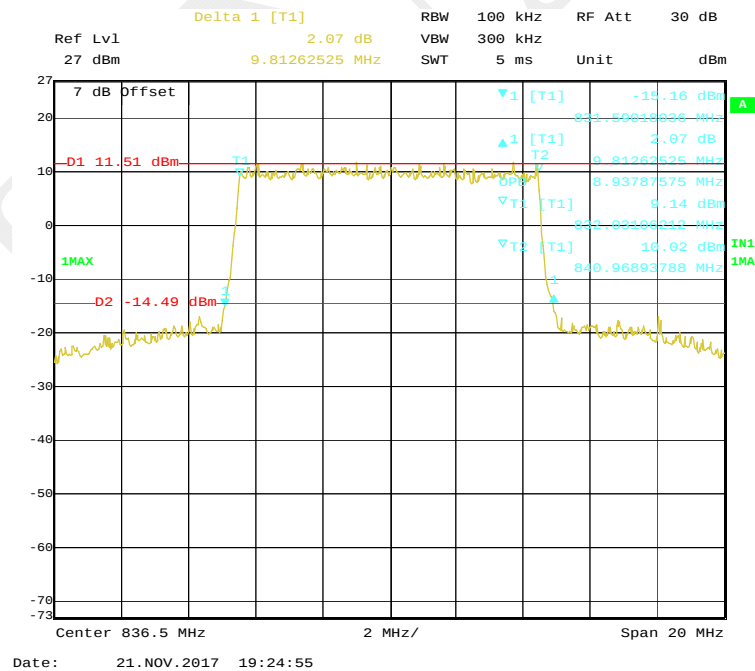
16-QAM (5.0 MHz) - Middle channel**16-QAM (10.0 MHz) - Middle channel**

LTE Band 7:


QPSK (5 MHz) - Middle channel

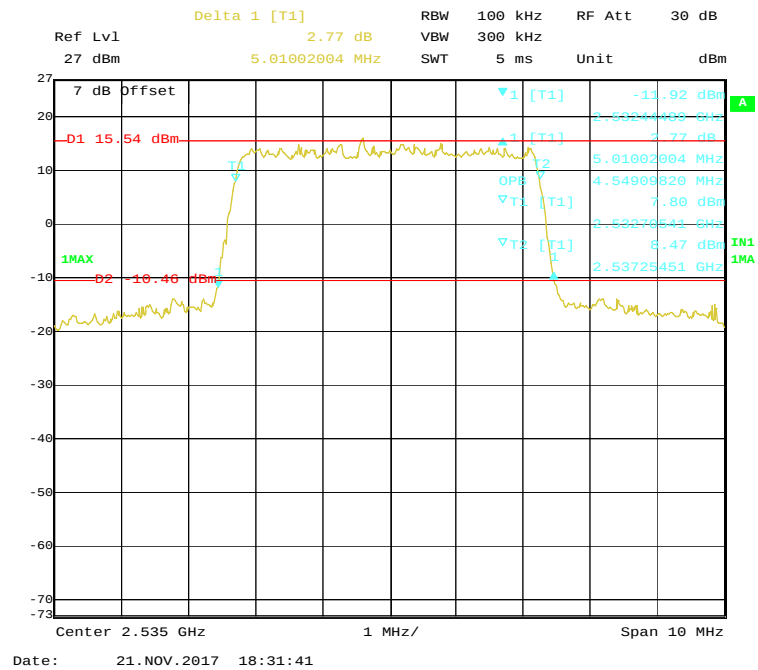


QPSK (10 MHz) - Middle channel

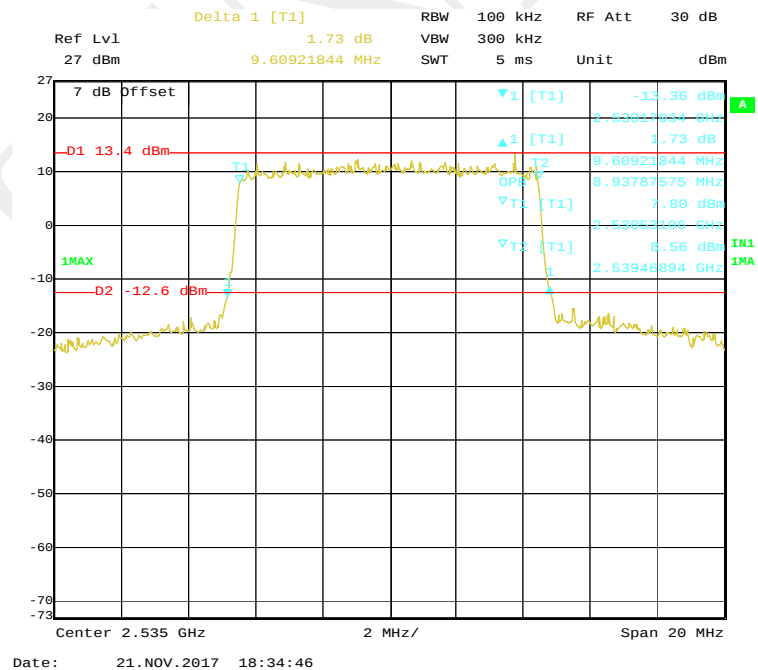


QPSK (15MHz) - Middle channel

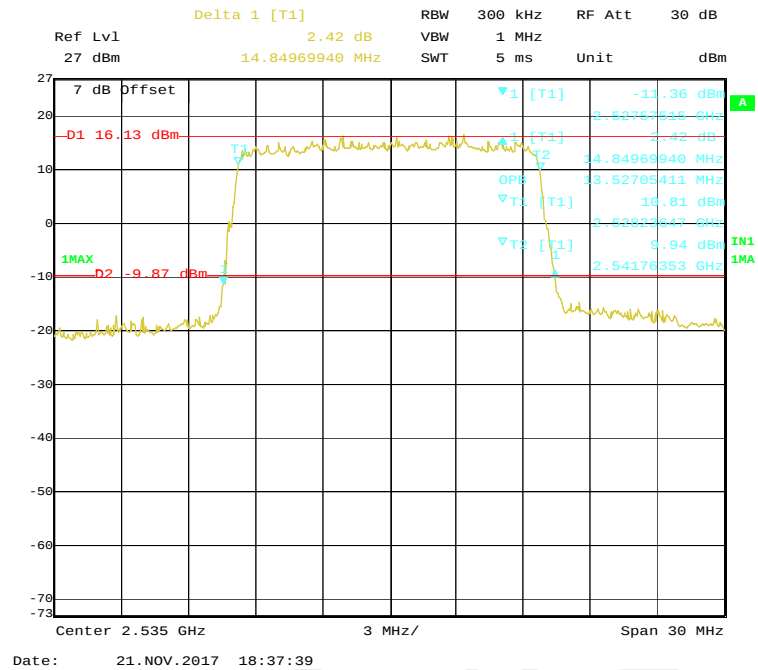


QPSK (20 MHz) - Middle channel

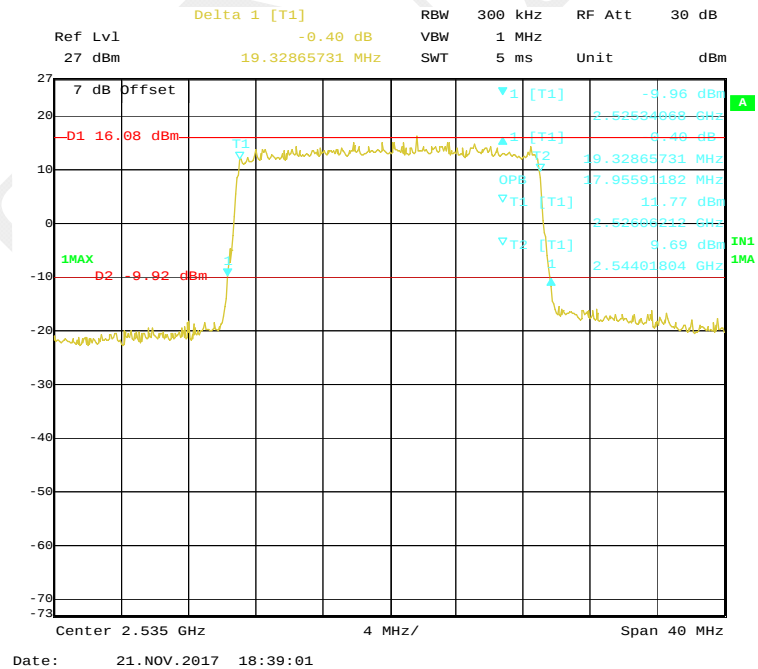


Marker 1 [T1]



16-QAM (15 MHz) - Middle channel

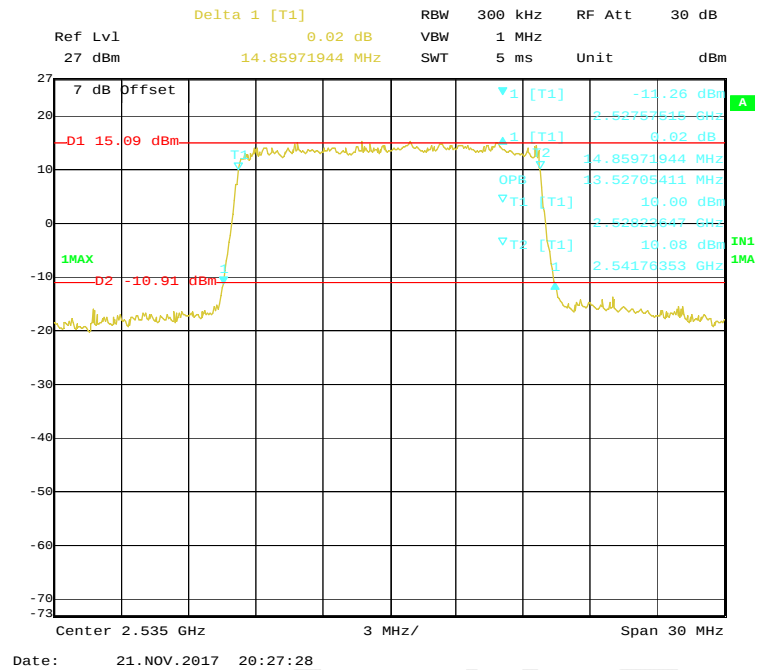

16-QAM (20 MHz) - Middle channel

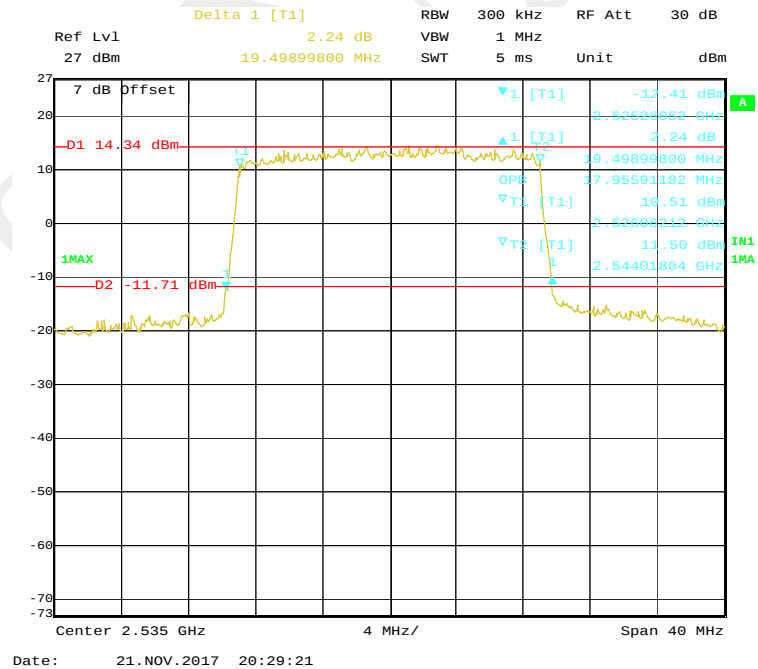


**FCC § 2.1051; § 22.917 (a); § 24.238 (a); §27.53 (m) SPURIOUS EMISSIONS
AT ANTENNA TERMINALS****Applicable Standards**

FCC §2.1051, §22.917(a) and §24.238(a) and §27.53(m).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.



Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz & 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

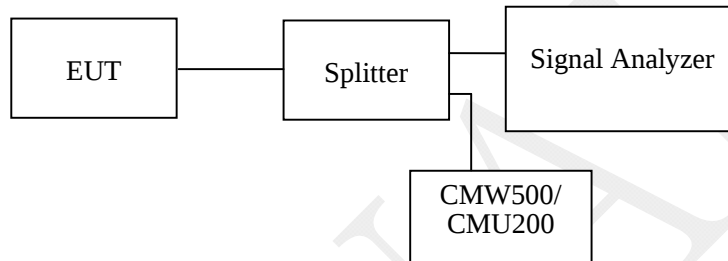**Test Data****Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min from 2017-11-15 to 2017-12-12.

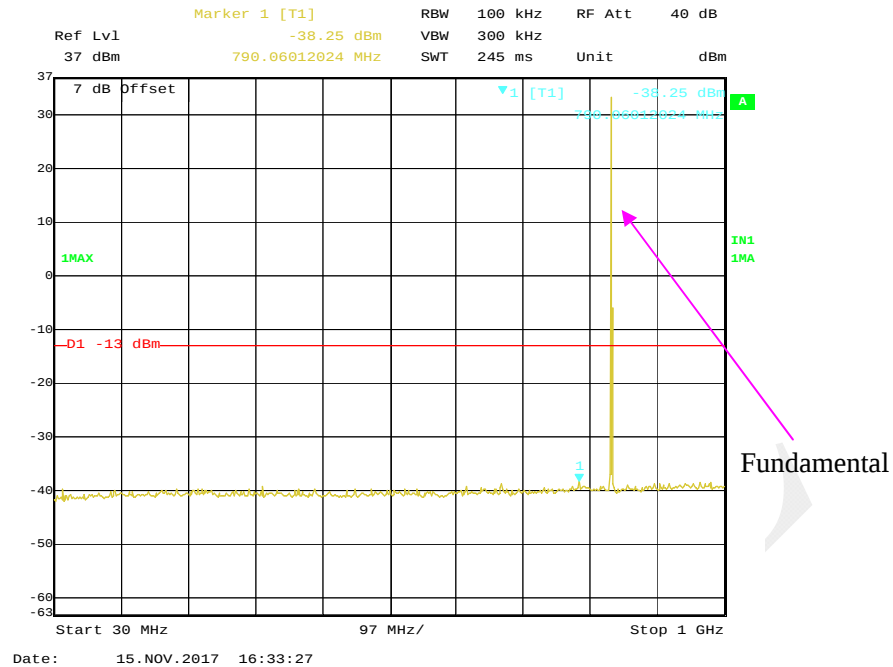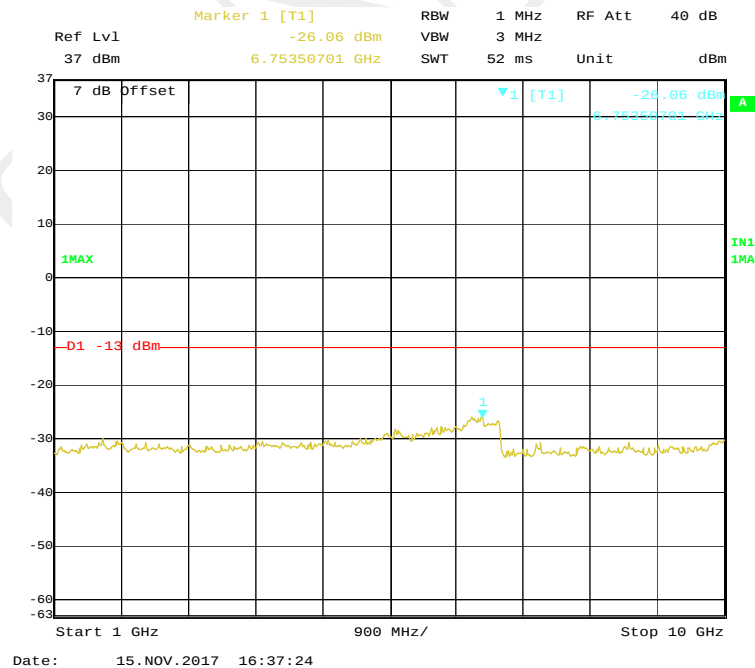GSM 850 Band:**30 MHz – 1GHz(GSM Mode)****1 GHz – 10 GHz (GSM Mode)**

Marker 1 [T1]

7 dB Offset

▼1 [T1]

-35.82 dBm

843.33617324 MHz

1MHz

D1 -13 dBm

1MAX

Start 30 MHz

97 MHz/

Stop 1 GHz


Fundamental

Marker 1 [T1]


The screenshot displays a spectrum analyzer interface. The vertical axis (Y-axis) represents power in dBm, ranging from -63 to 37. The horizontal axis (X-axis) represents frequency in MHz, with markers at 1 GHz, 900 MHz, and 10 GHz. A yellow trace shows the signal spectrum, with a prominent peak at 8.62725455 GHz reaching a level of -26.25 dBm. A red horizontal line is drawn at -13 dBm, labeled 'D1 -13 dBm'. A green label '1MAX' is visible on the left side of the plot. A blue cursor is positioned at the peak of the signal, labeled '1' and 'v1 [T1]'. The text '7 dB Offset' is visible at the top left of the plot area.



Page 68 of 159

30 MHz – 1GHz(EGPRS Mode)

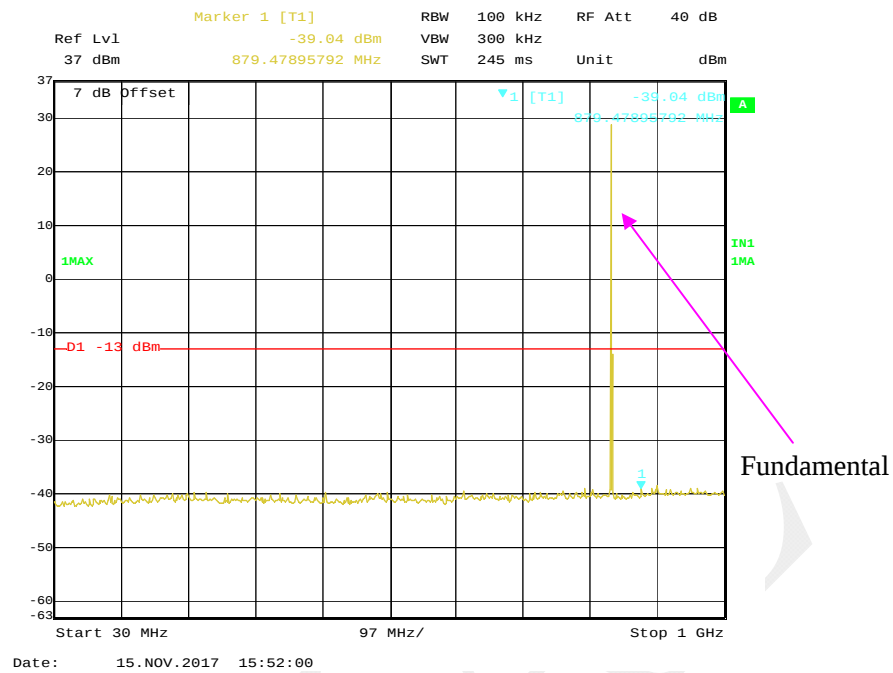


1 GHz – 10 GHz (EGPRS Mode)

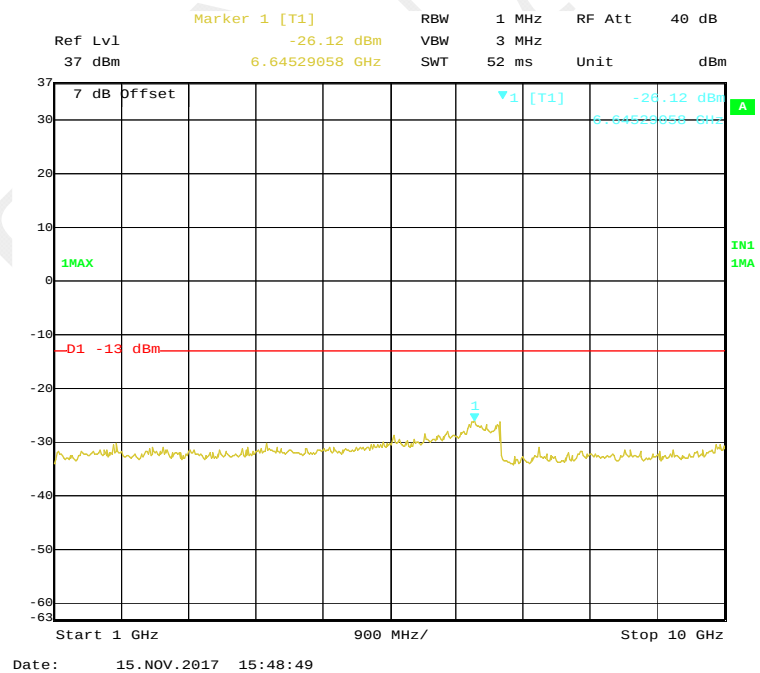

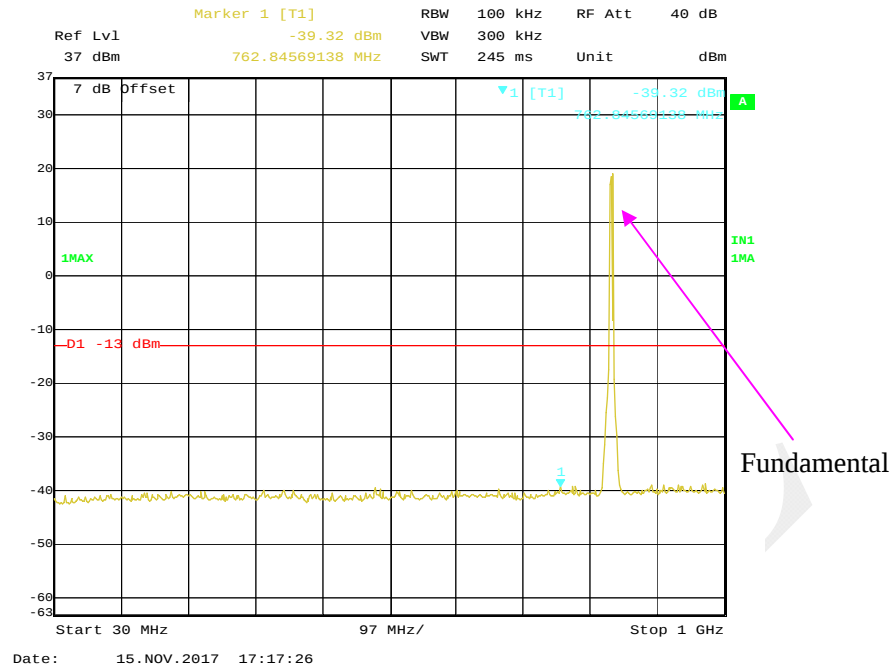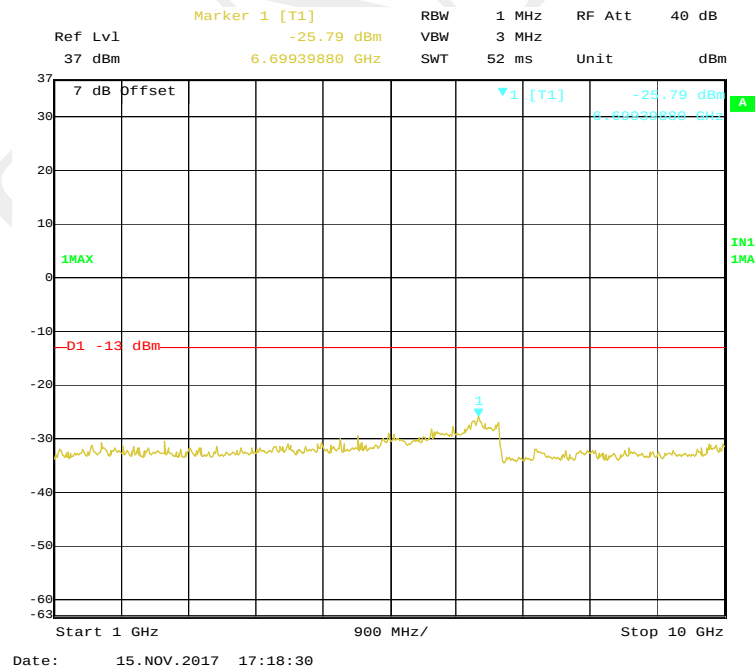
WCDMA Band V:**30 MHz – 1GHz(WCDMA Mode)****1 GHz – 10 GHz (WCDMA Mode)**

PCS 1900 Band:


30 MHz – 1GHz(GSM Mode)

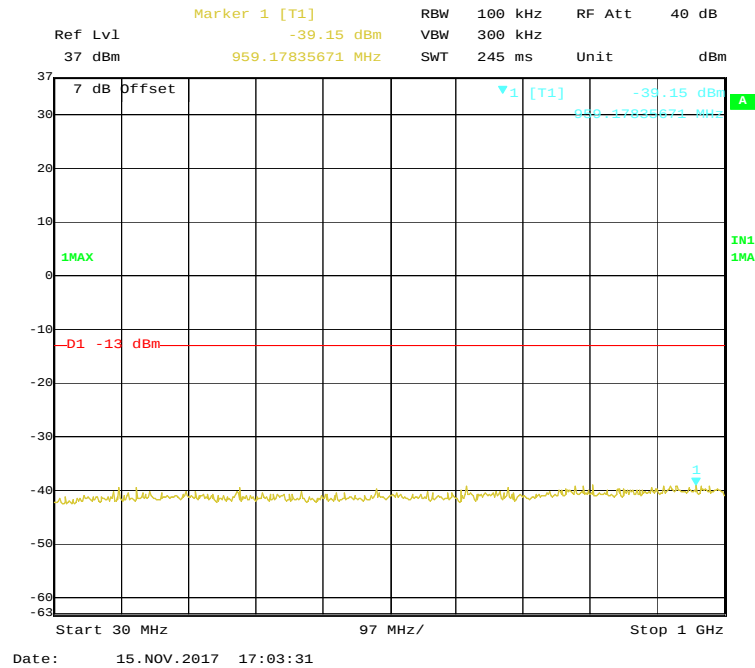


1 GHz – 20 GHz (GSM Mode)

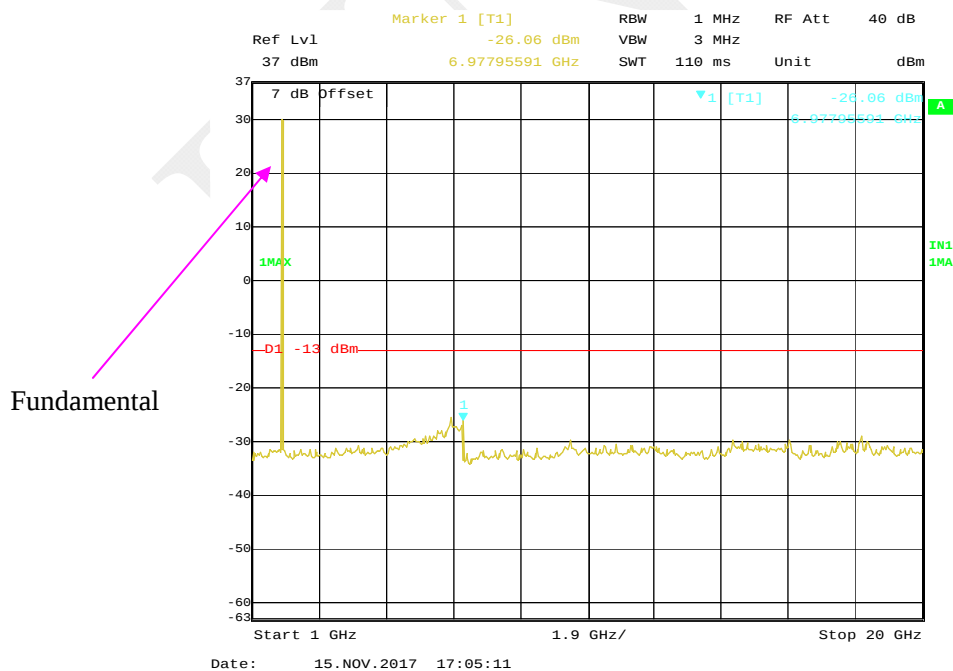

30 MHz – 1GHz(GPRS Mode)

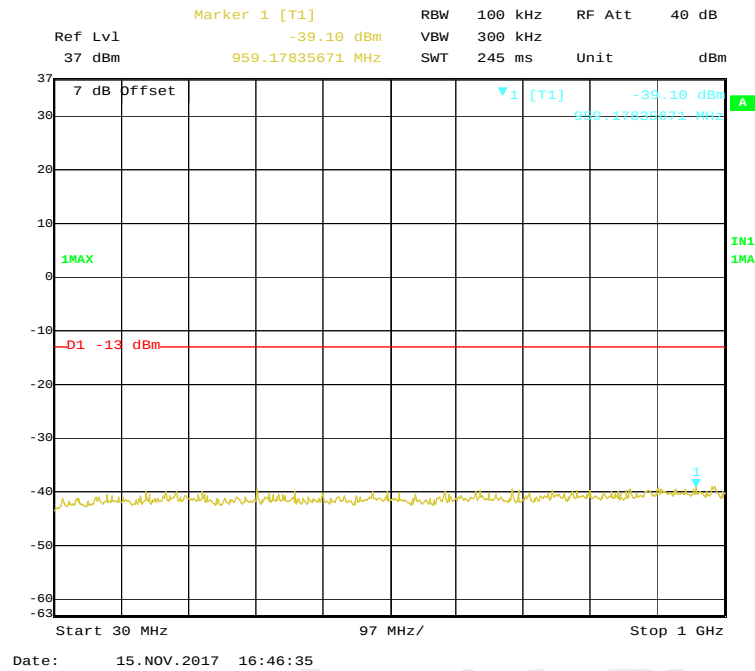

1 GHz – 20 GHz (GPRS Mode)

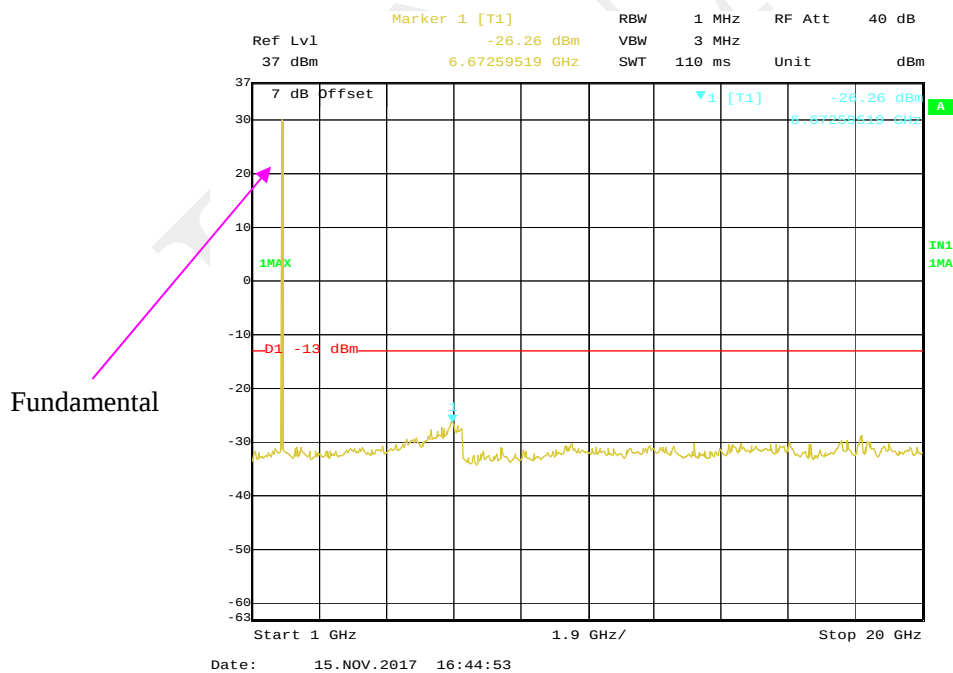


Marker 1 [T1]

1 GHz – 20 GHz (EGPRS Mode)


Fundamental



WCDMA Band II:

30 MHz – 1 GHz (WCDMA Mode)

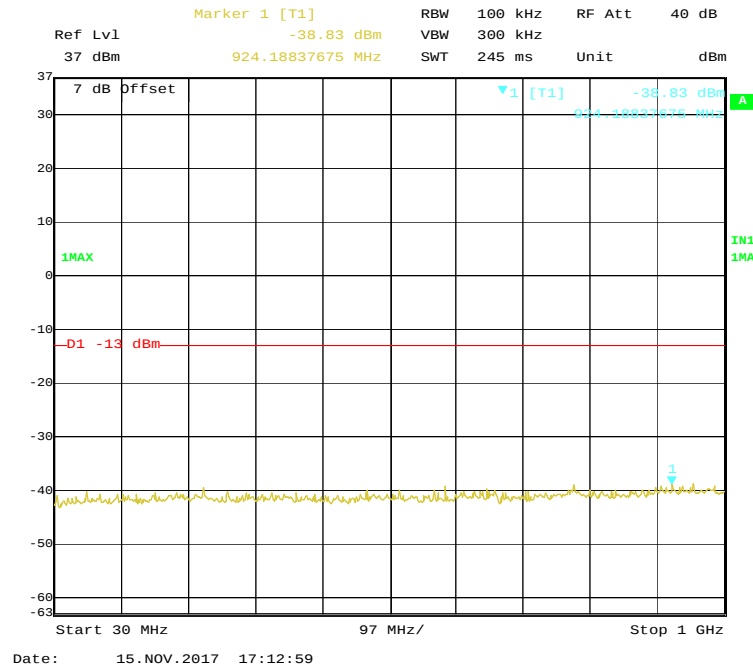


1 GHz – 20 GHz (WCDMA Mode)

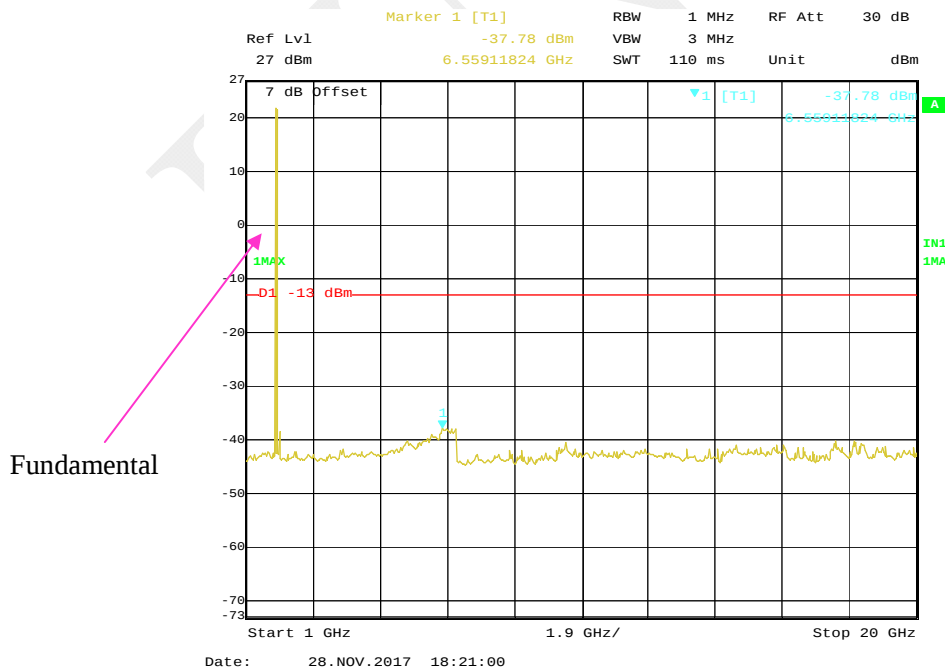


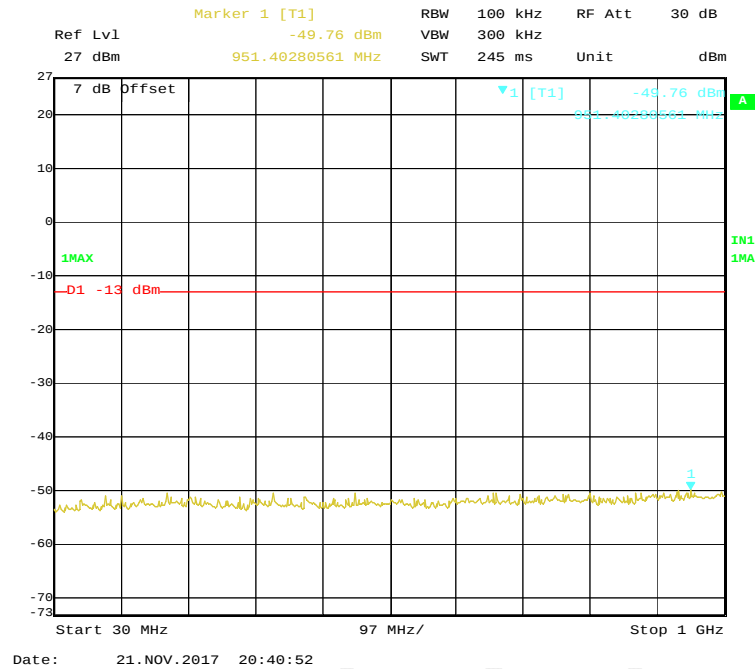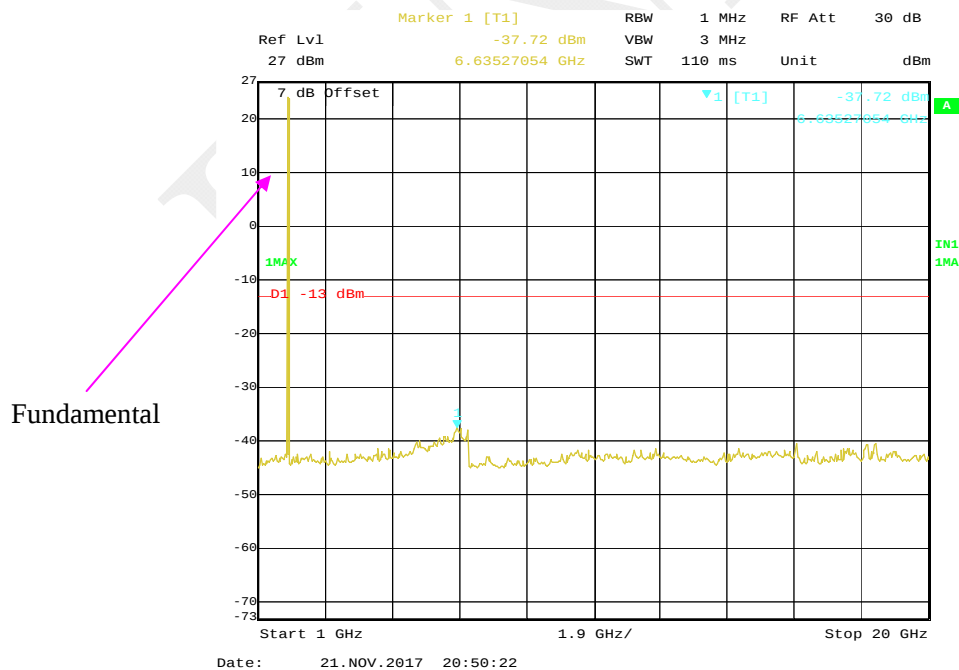LTE Band 2:**30 MHz - 1 GHz (1.4 MHz, Middle Channel)****1 GHz - 20 GHz (1.4 MHz, Middle Channel)**


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

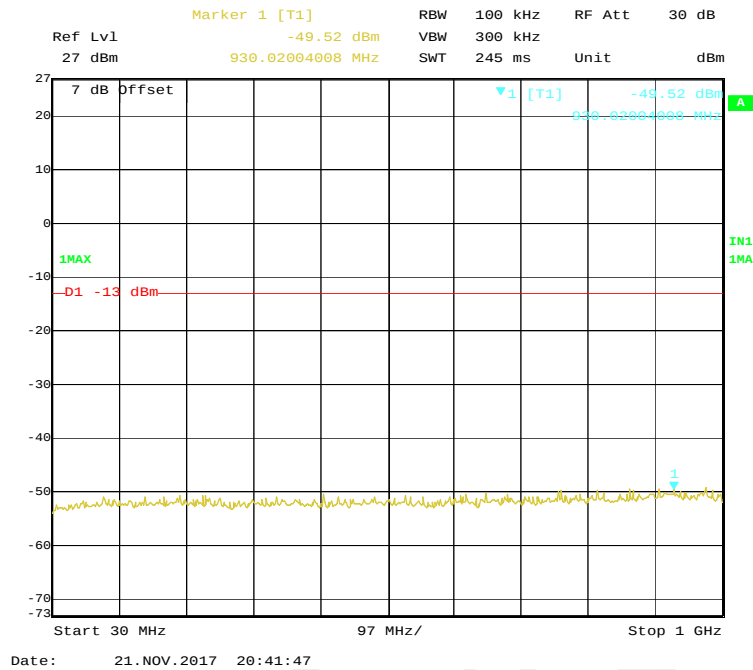


1 GHz – 20 GHz (3.0 MHz, Middle Channel)

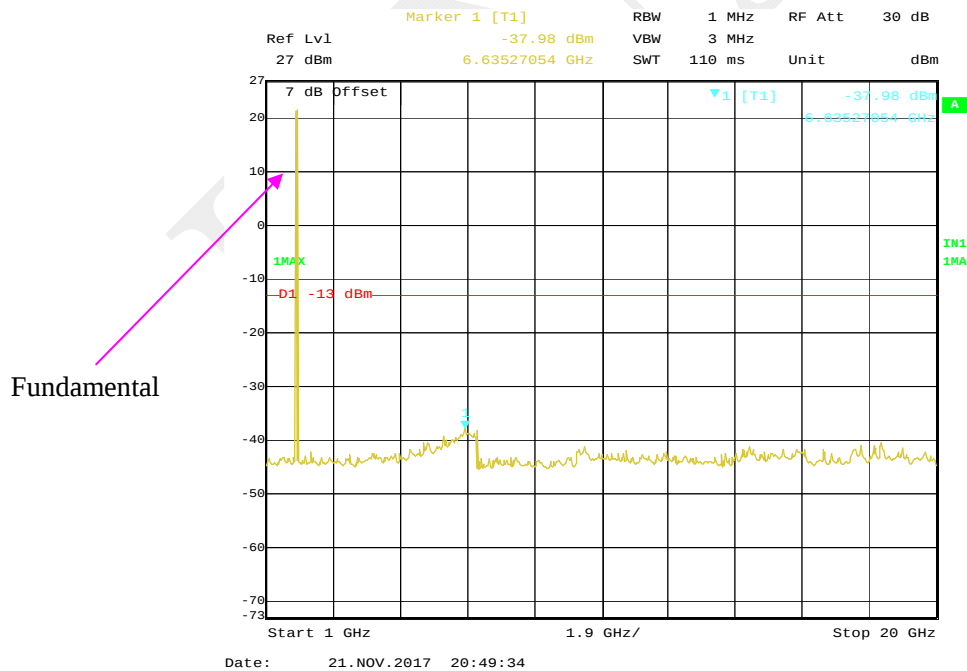


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

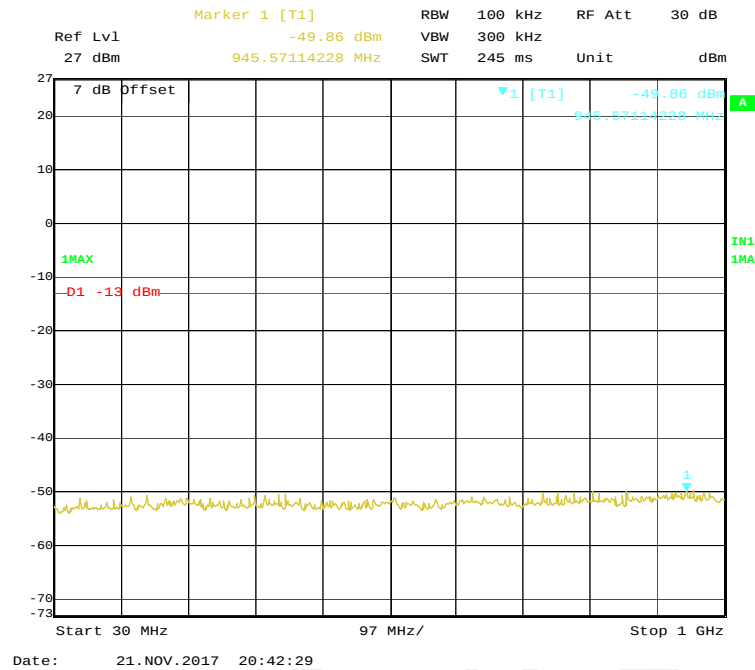


1 GHz – 20 GHz (5.0MHz, Middle Channel)

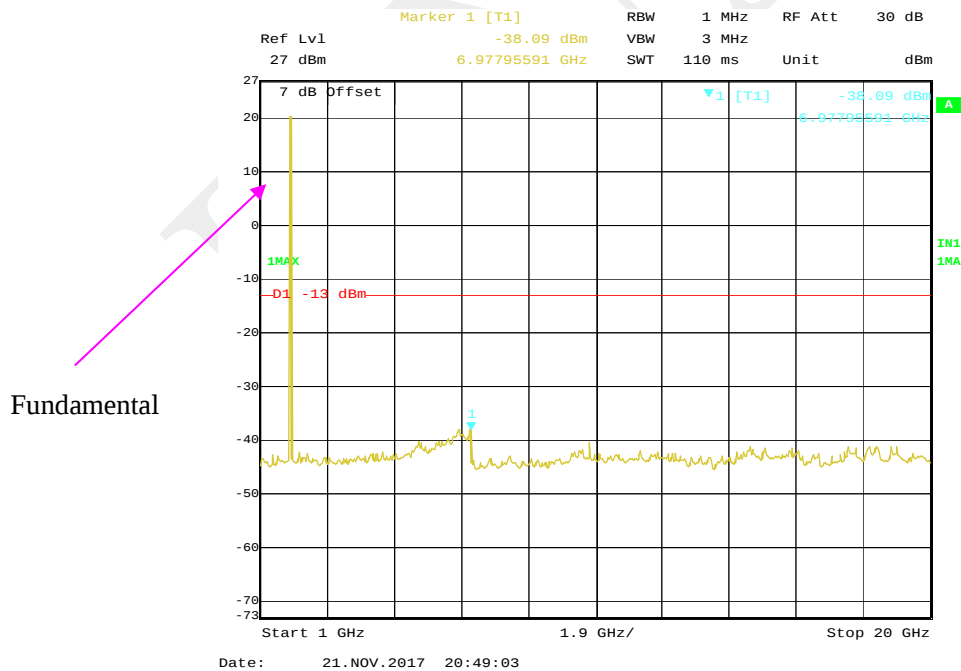


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

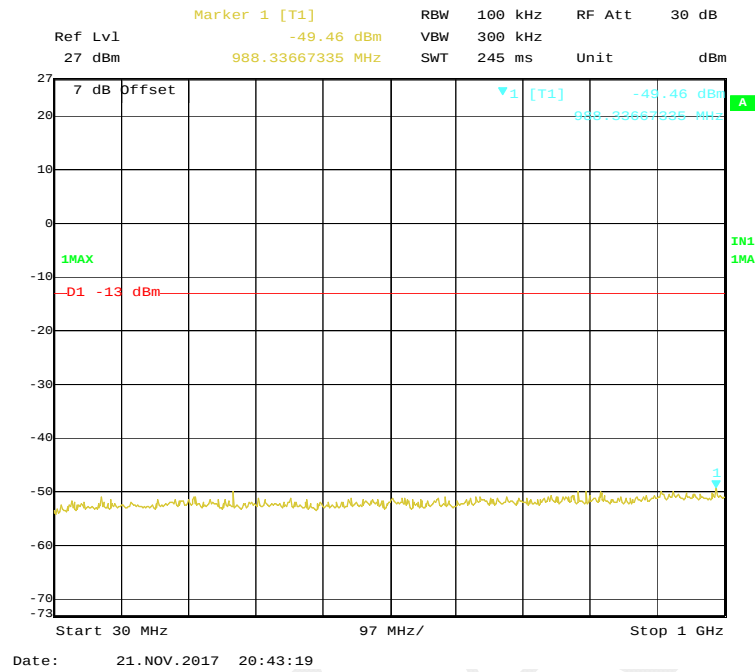


1 GHz – 20 GHz (10.0 MHz, Middle Channel)

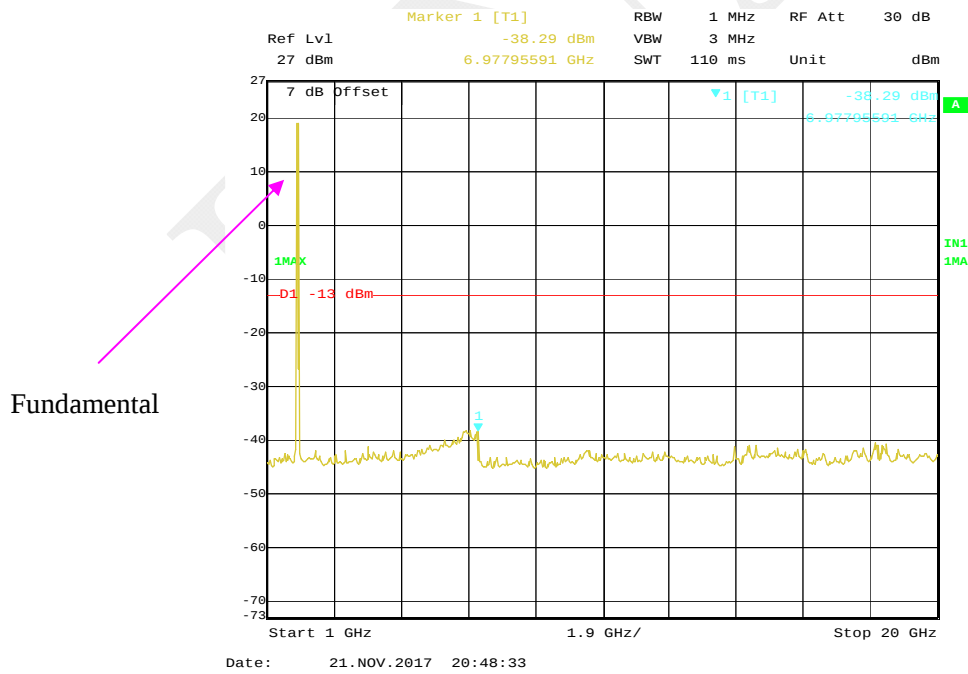


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

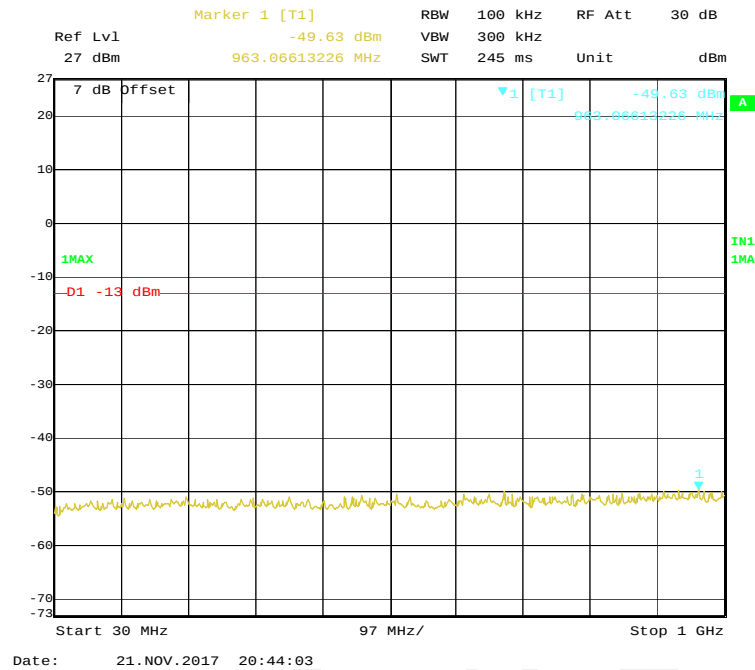


1 GHz – 20 GHz (15.0 MHz, Middle Channel)

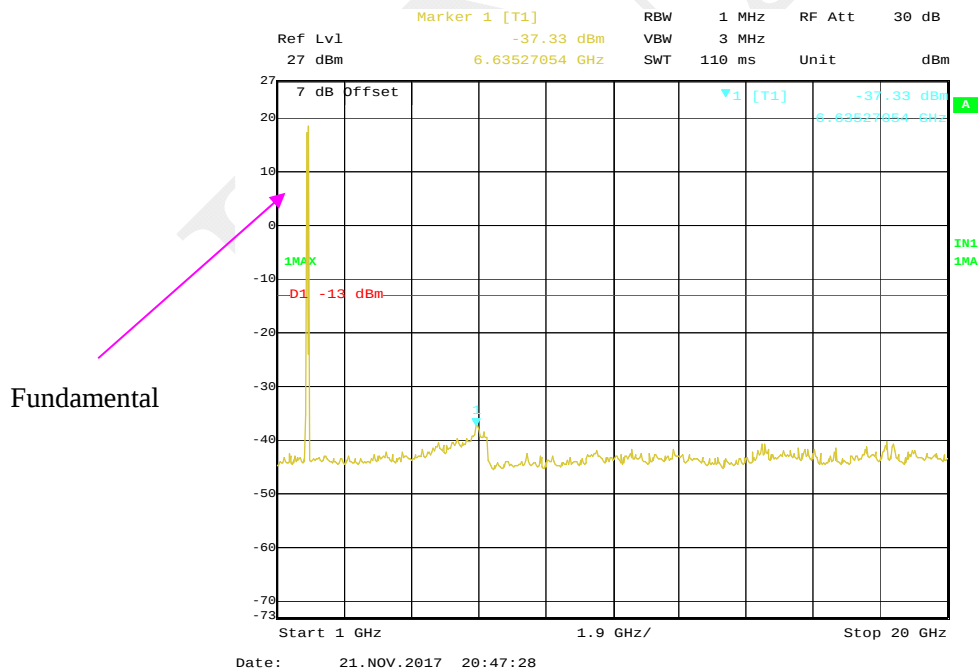

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

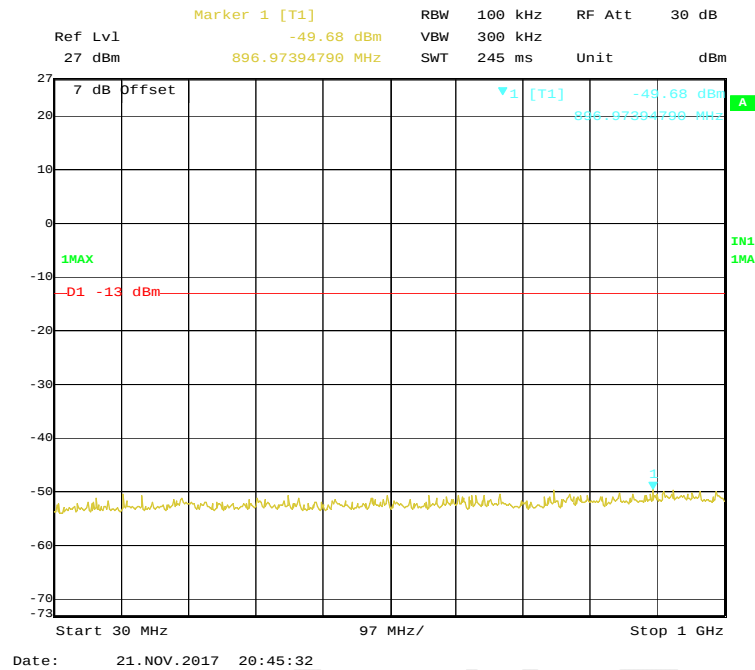


1 GHz – 20 GHz (20.0 MHz, Middle Channel)

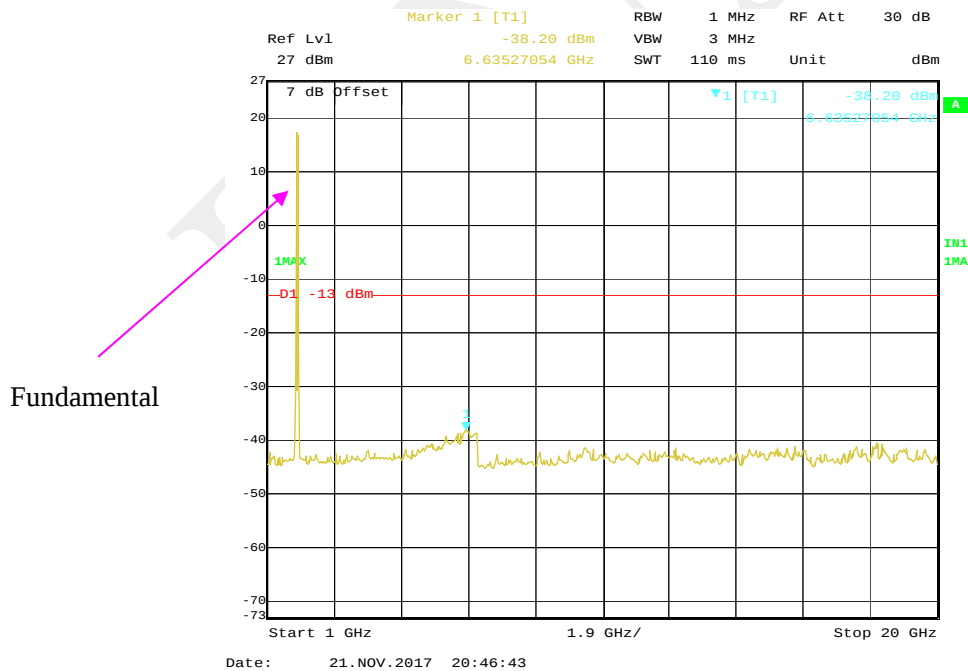


LTE Band 4:


30 MHz - 1 GHz (1.4 MHz, Middle Channel)

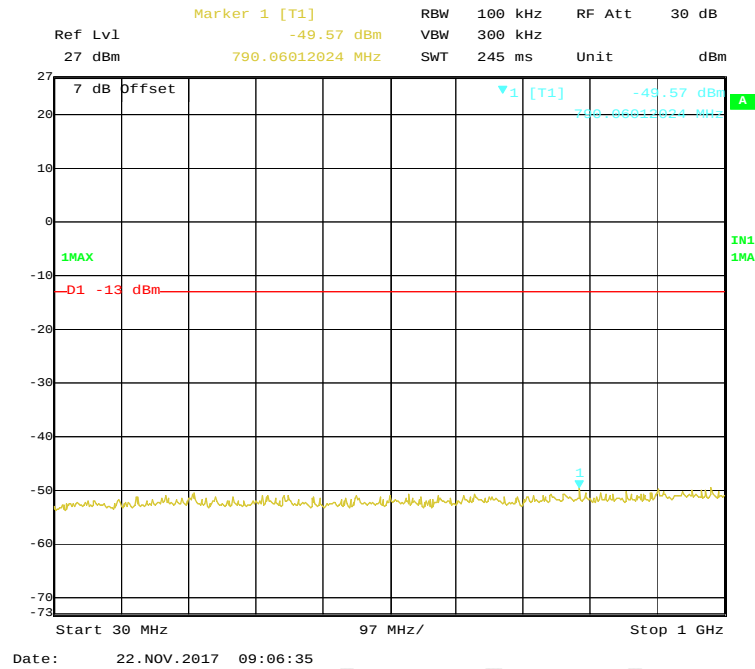


1 GHz – 20 GHz (1.4 MHz, Middle Channel)

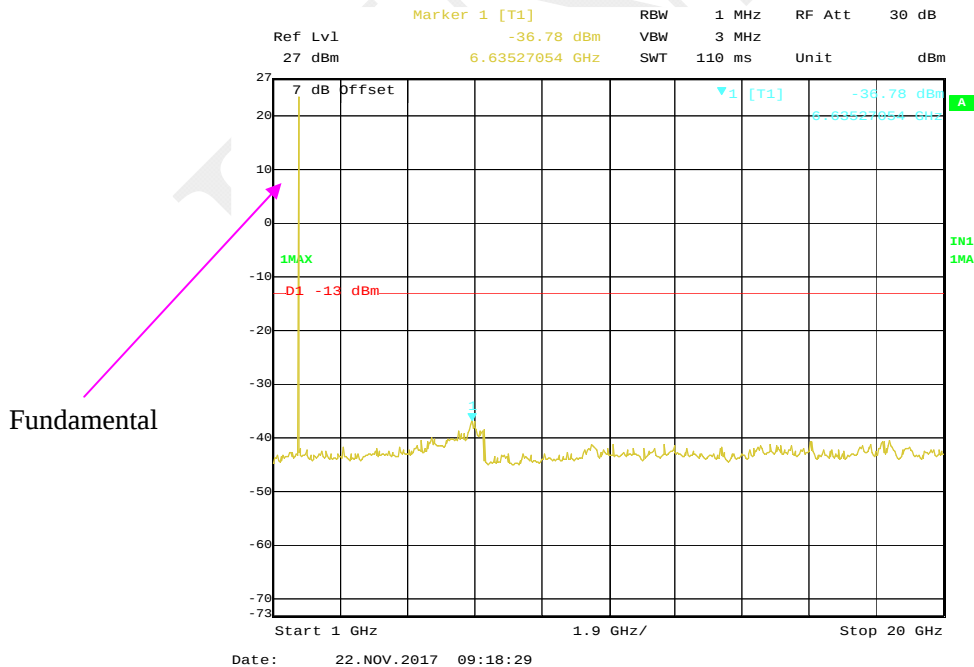


30 MHz - 1 GHz (3.0 MHz, Middle Channel)

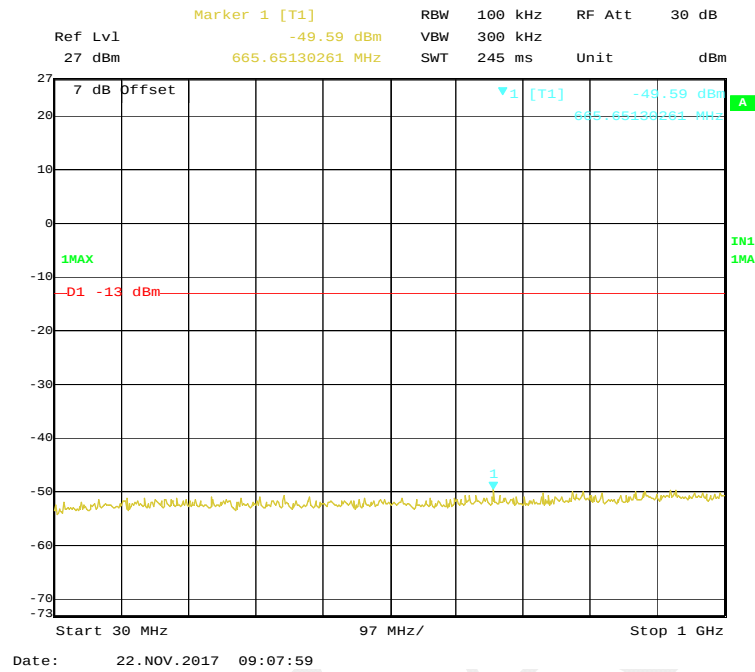


1 GHz – 20 GHz (3.0 MHz, Middle Channel)

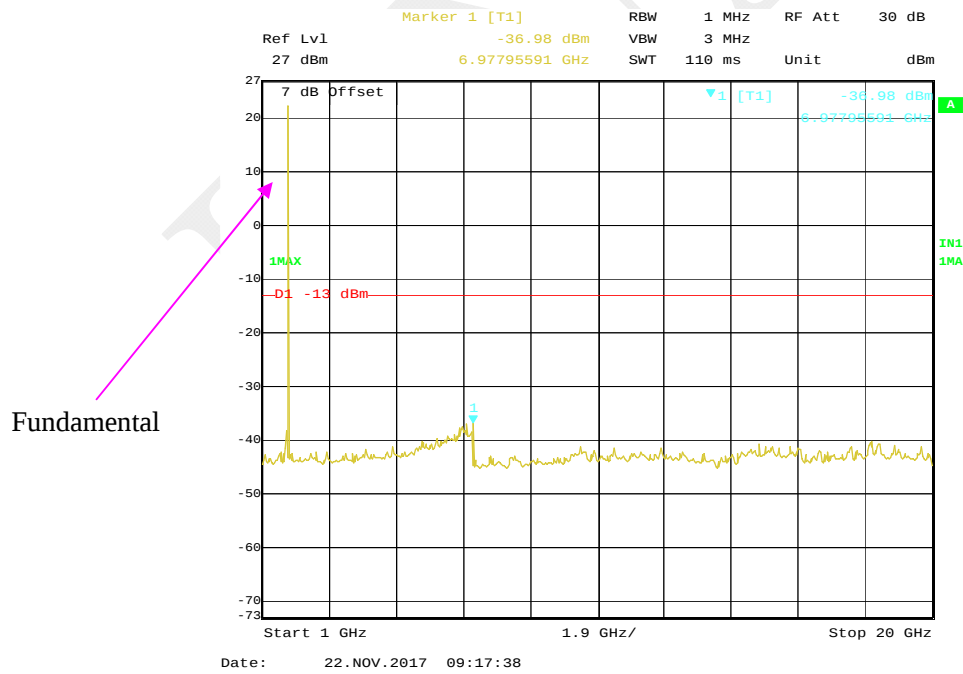


30 MHz - 1 GHz (5.0 MHz, Middle Channel)

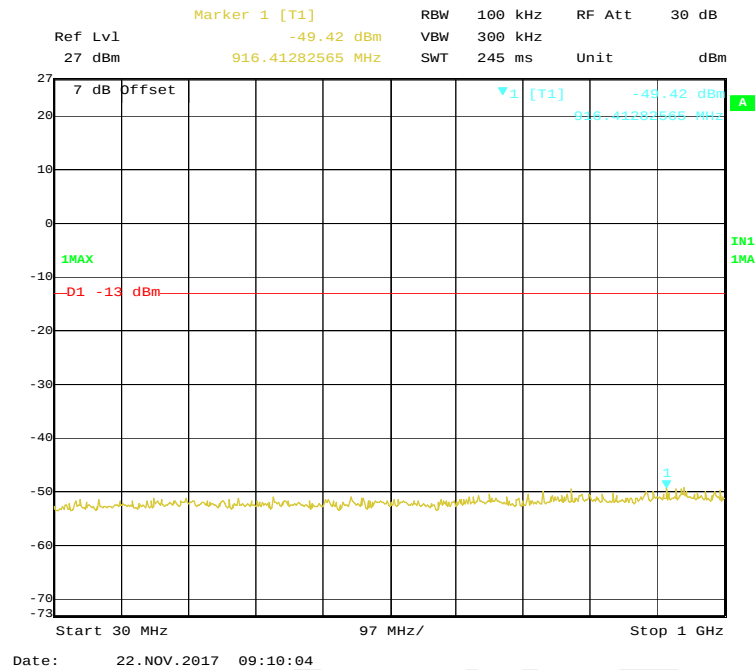


1 GHz – 20 GHz (5.0MHz, Middle Channel)

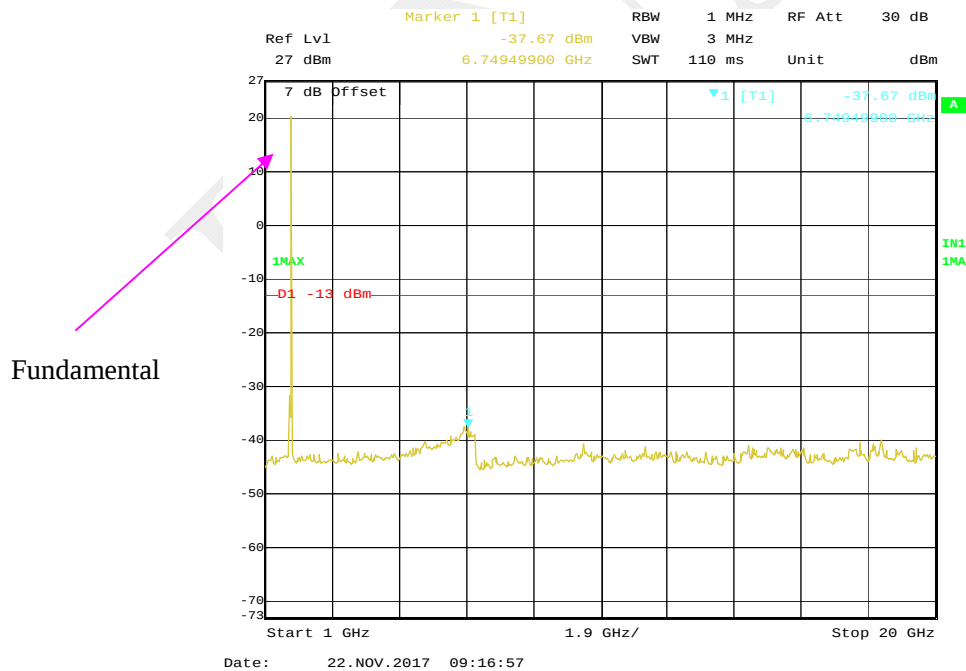


30 MHz - 1 GHz (10.0 MHz, Middle Channel)

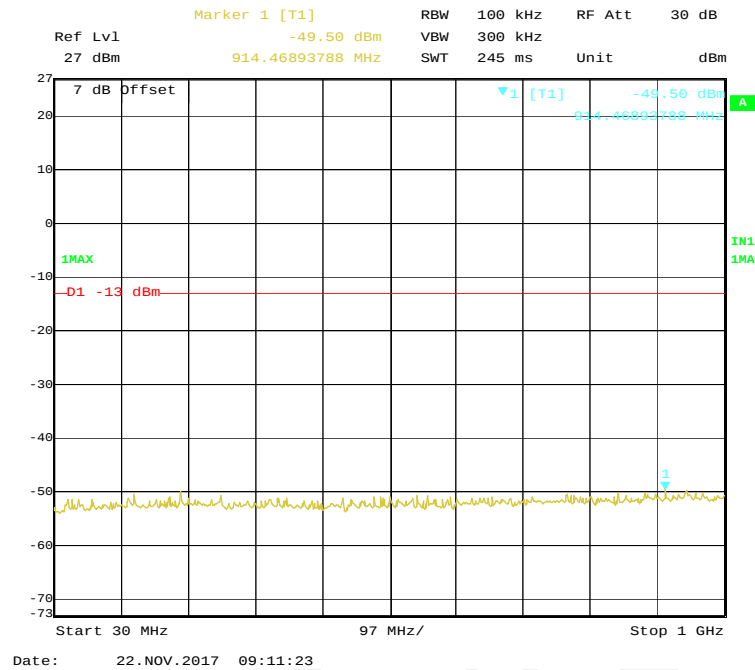


1 GHz – 20 GHz (10.0 MHz, Middle Channel)

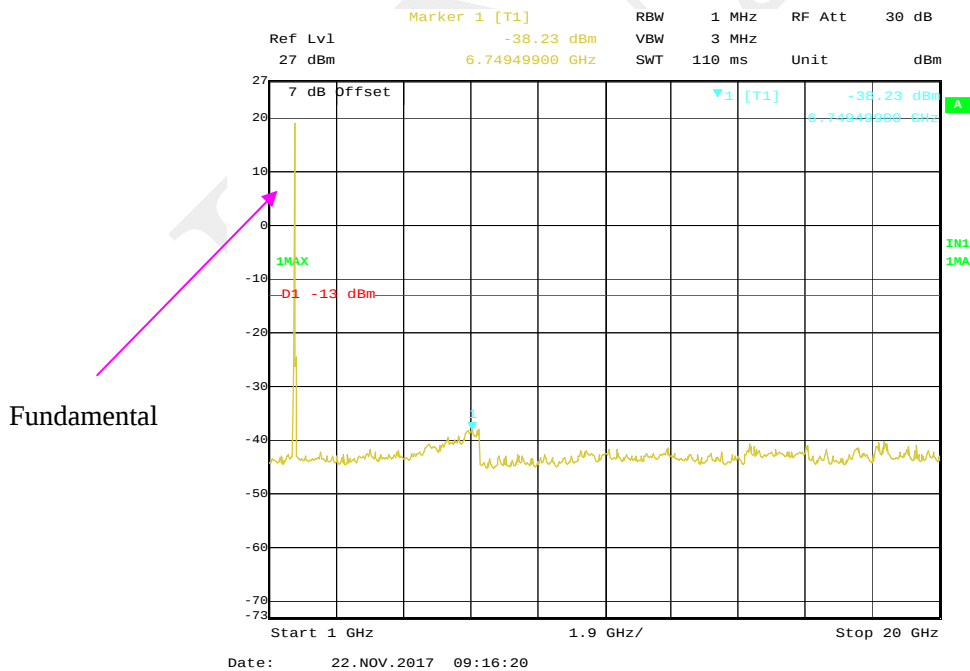


30 MHz - 1 GHz (15.0 MHz, Middle Channel)

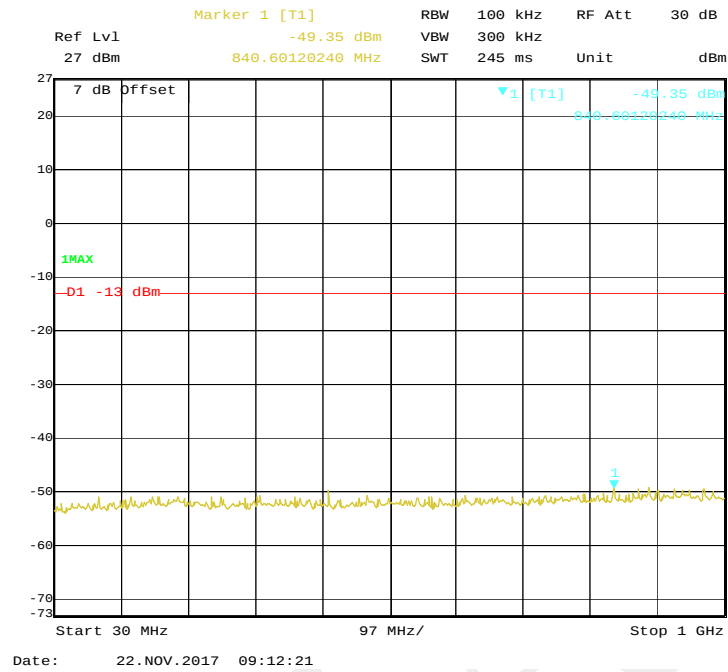


1 GHz – 20 GHz (15.0 MHz, Middle Channel)

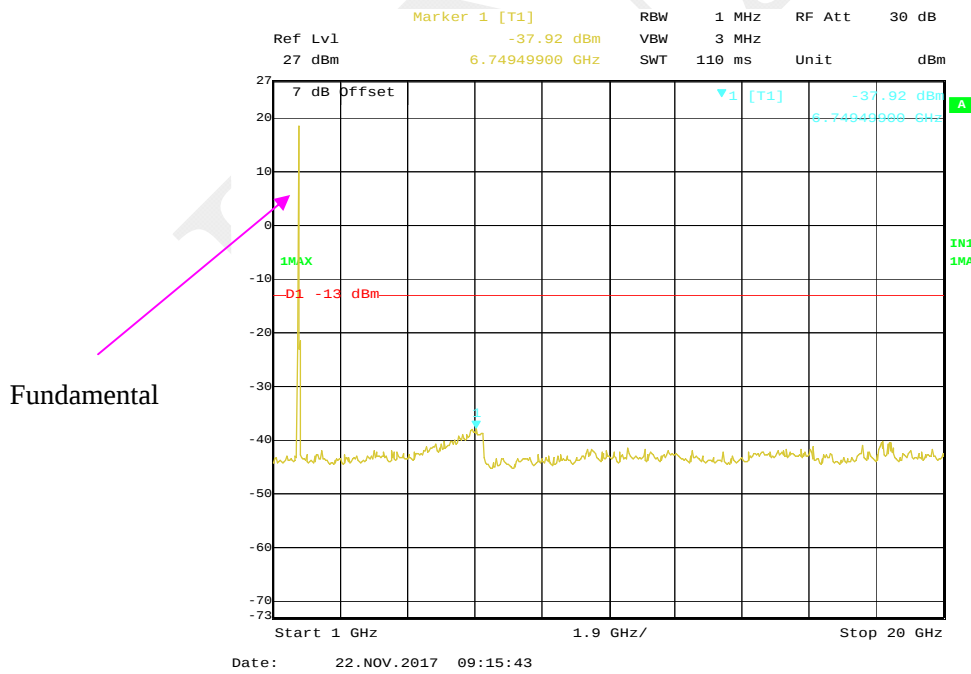

30 MHz - 1 GHz (20.0 MHz, Middle Channel)

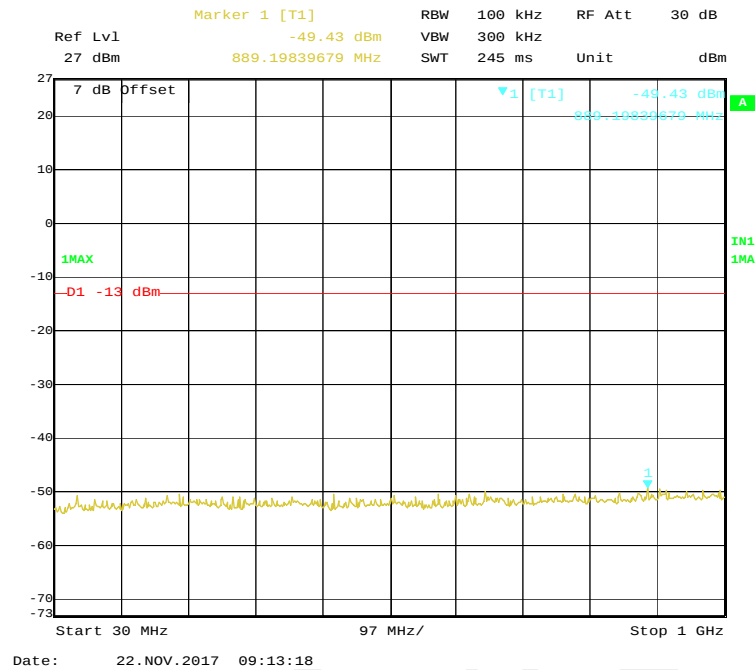


1 GHz – 20 GHz (20.0 MHz, Middle Channel)

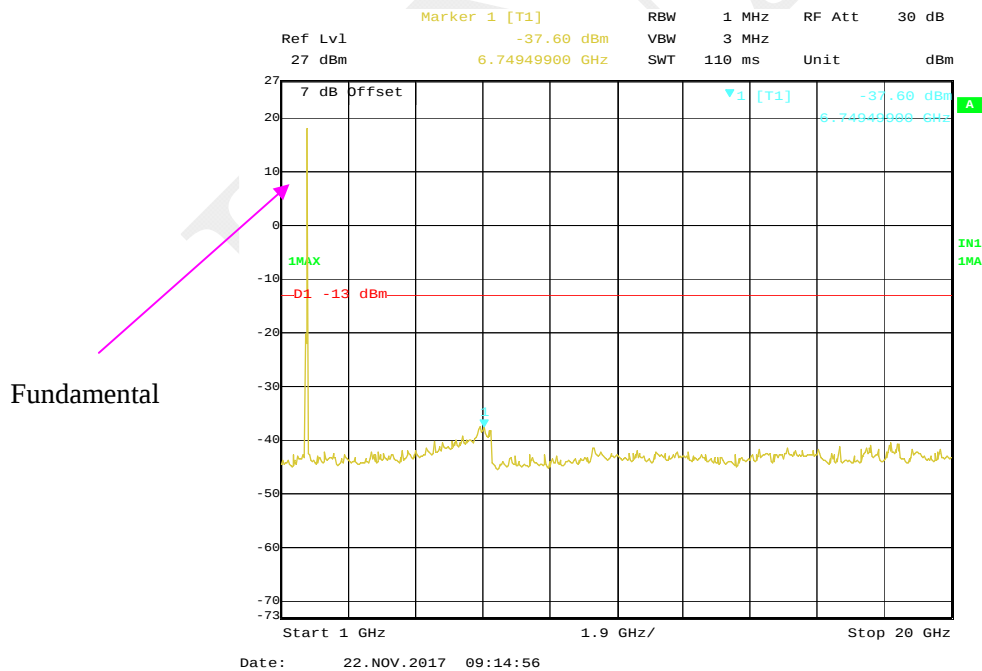




LTE Band 5:

30 MHz - 1 GHz (1.4 MHz, Middle Channel)

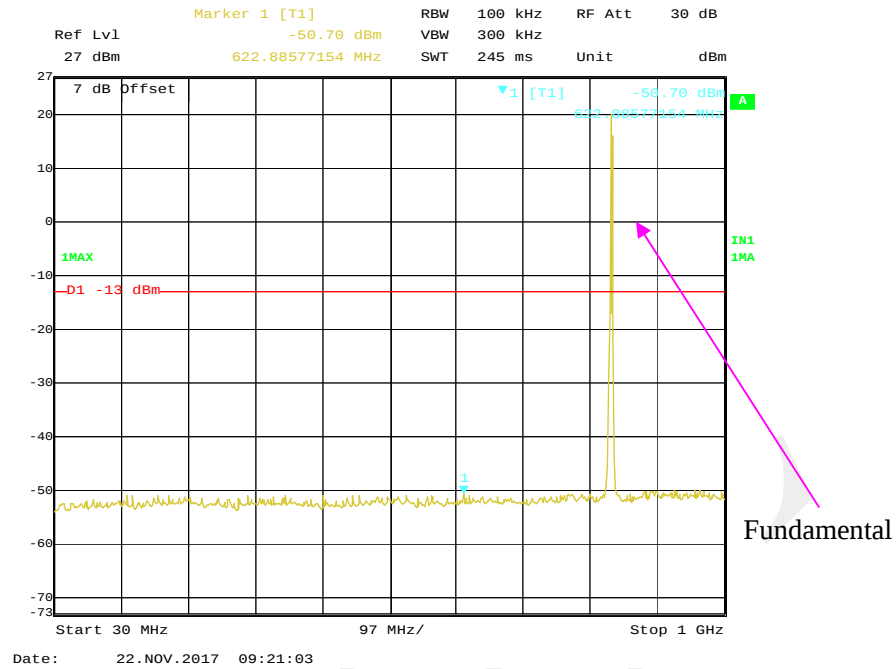


1 GHz – 10 GHz (1.4 MHz, Middle Channel)

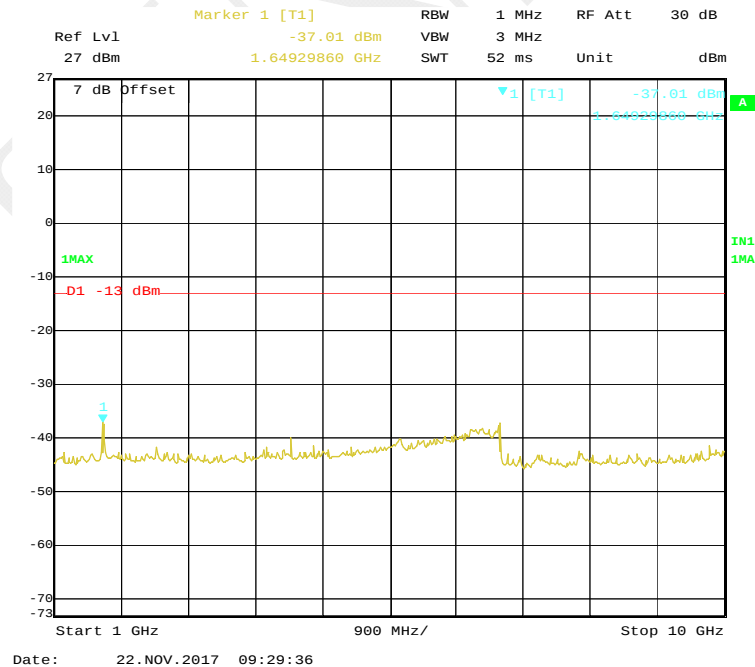


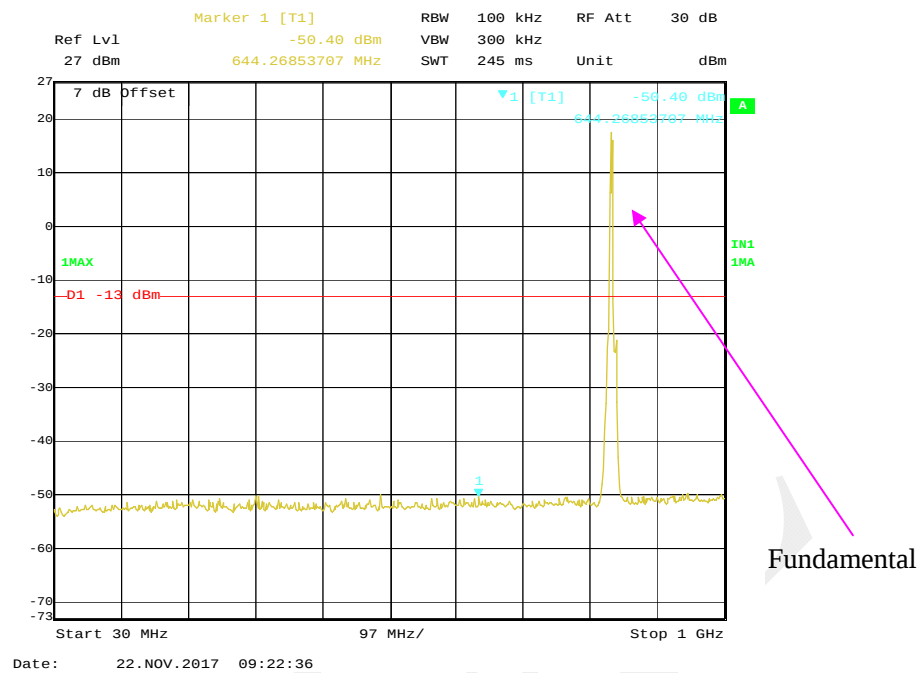
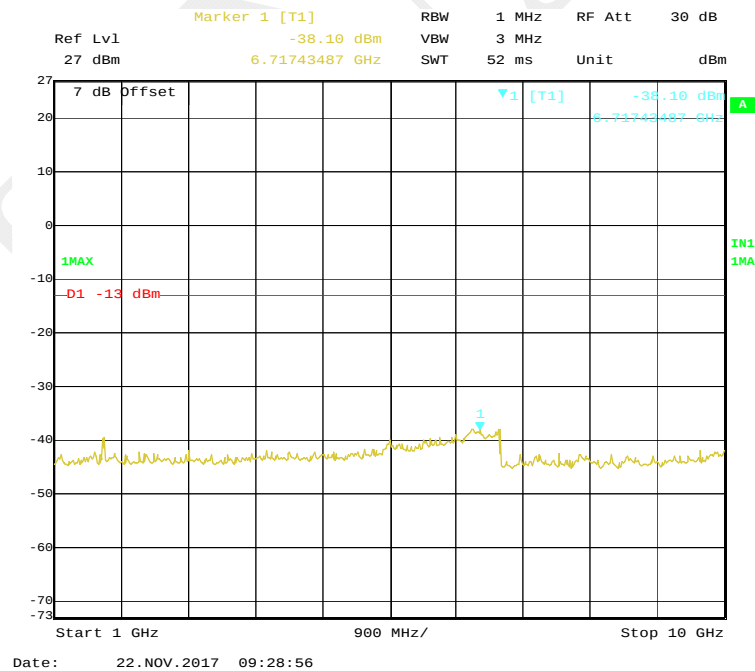
30 MHz - 1 GHz (3.0 MHz, Middle Channel)**1 GHz – 10 GHz (3.0 MHz, Middle Channel)**



30 MHz - 1 GHz (5.0 MHz, Middle Channel)


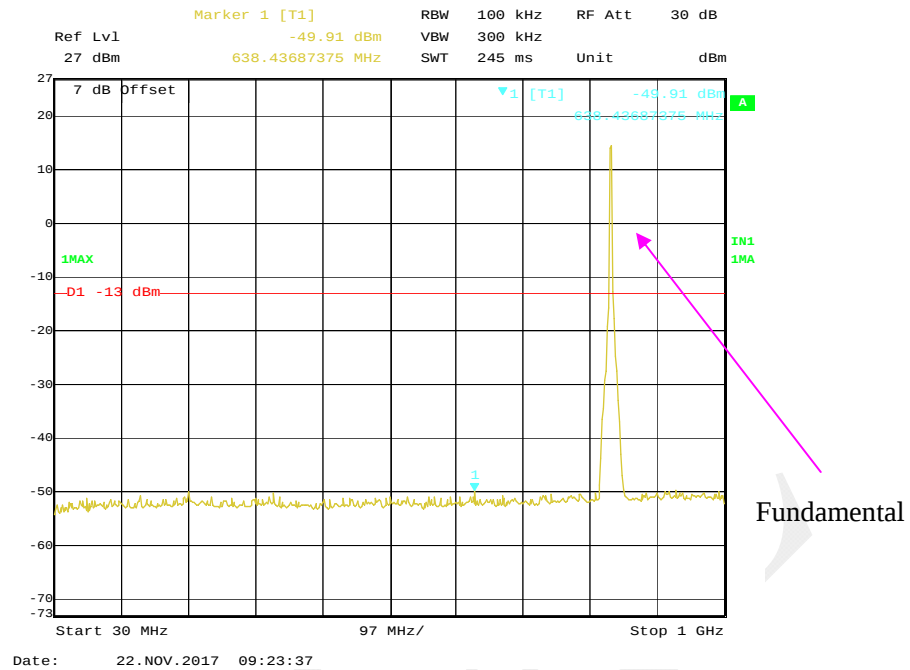


1 GHz – 10 GHz (5.0MHz, Middle Channel)

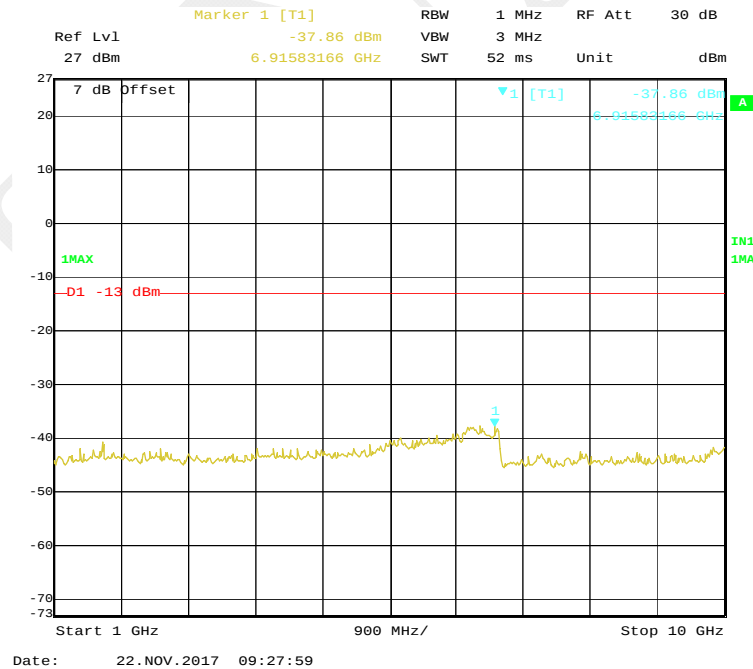


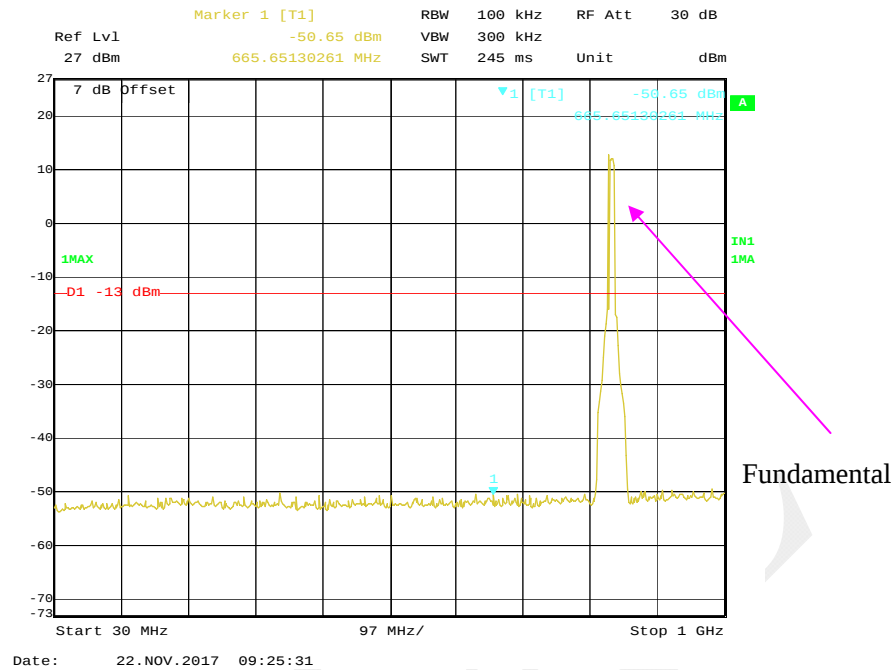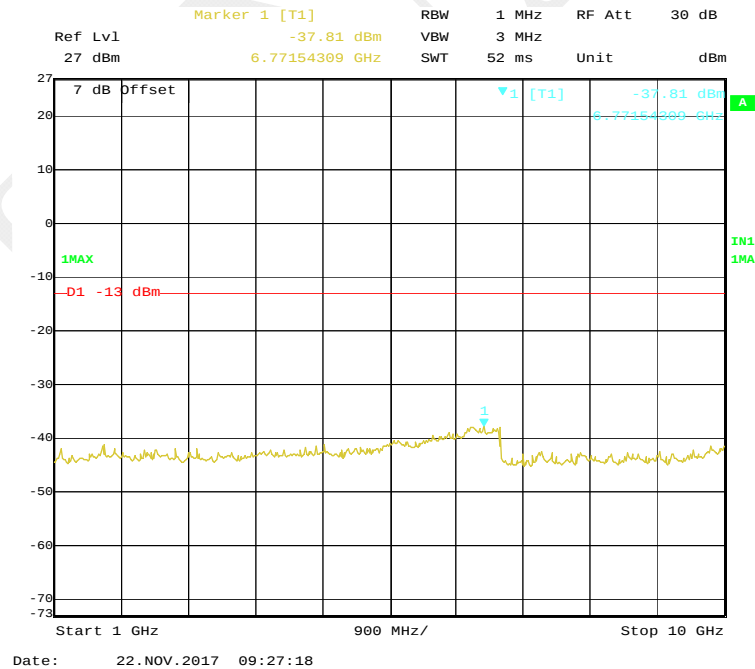30 MHz - 1 GHz (10.0 MHz, Middle Channel)**1 GHz – 10 GHz (10.0 MHz, Middle Channel)**

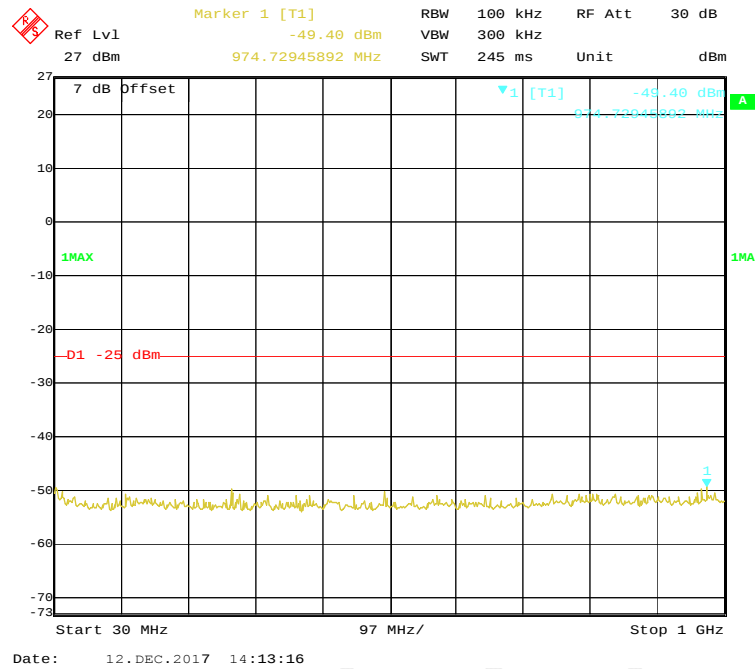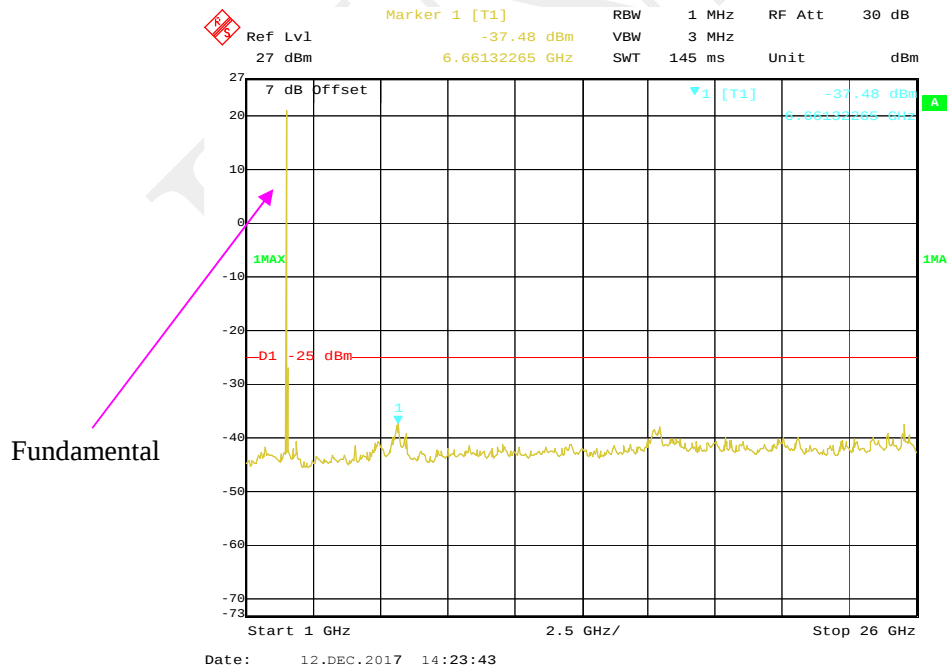
LTE Band 7:**30 MHz - 1 GHz (5 MHz, Middle Channel)****1 GHz - 26 GHz (5 MHz, Middle Channel)**

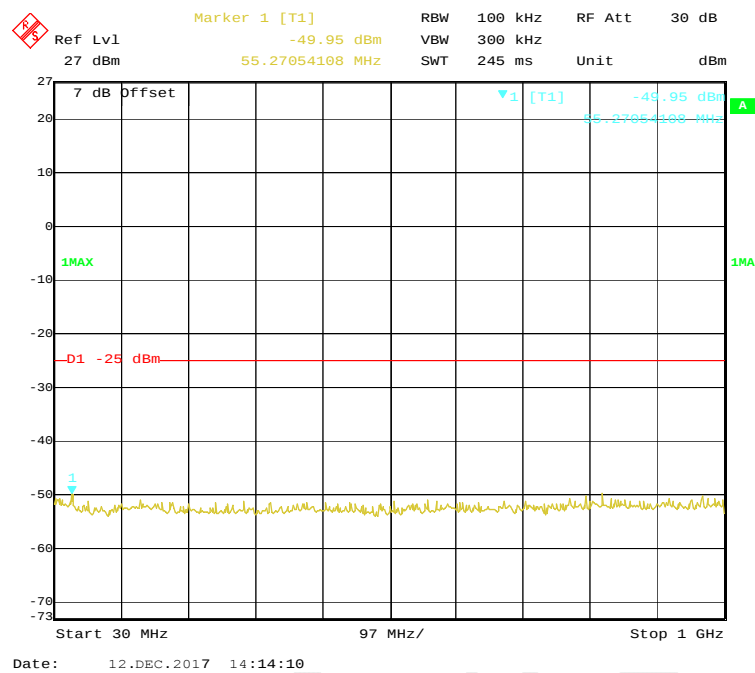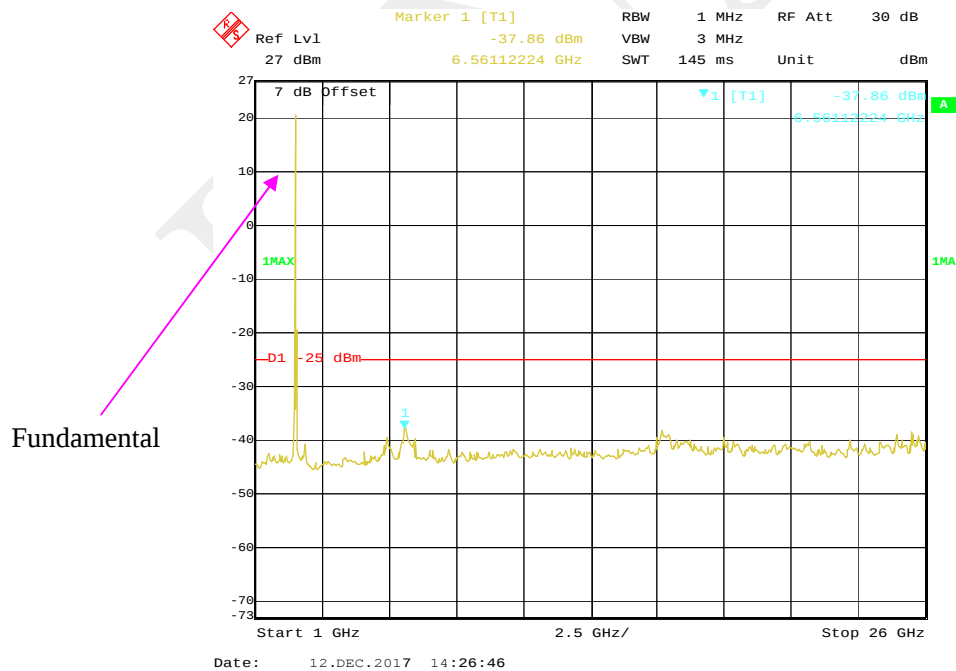30 MHz - 1 GHz (10MHz, Middle Channel)**1 GHz – 26 GHz (10 MHz, Middle Channel)**


30 MHz - 1 GHz (15 MHz, Middle Channel)

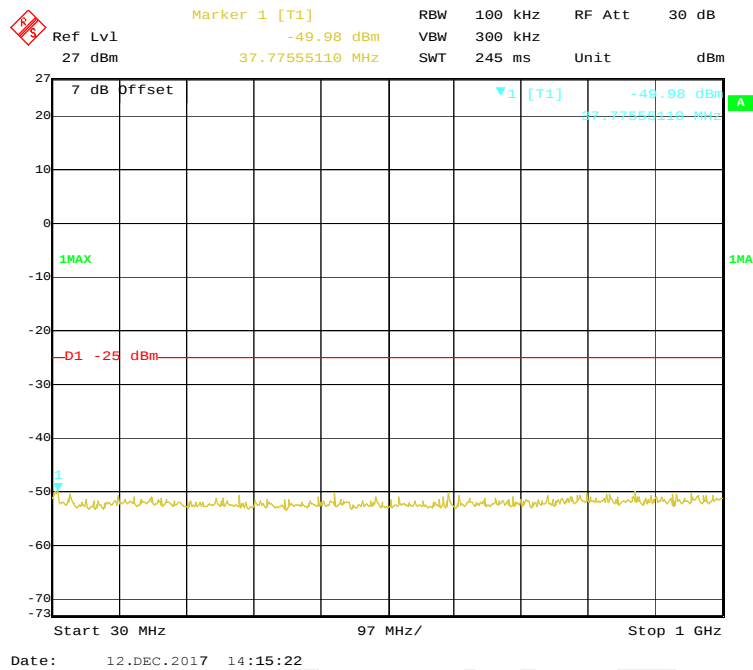


1 GHz – 26 GHz (15MHz, Middle Channel)

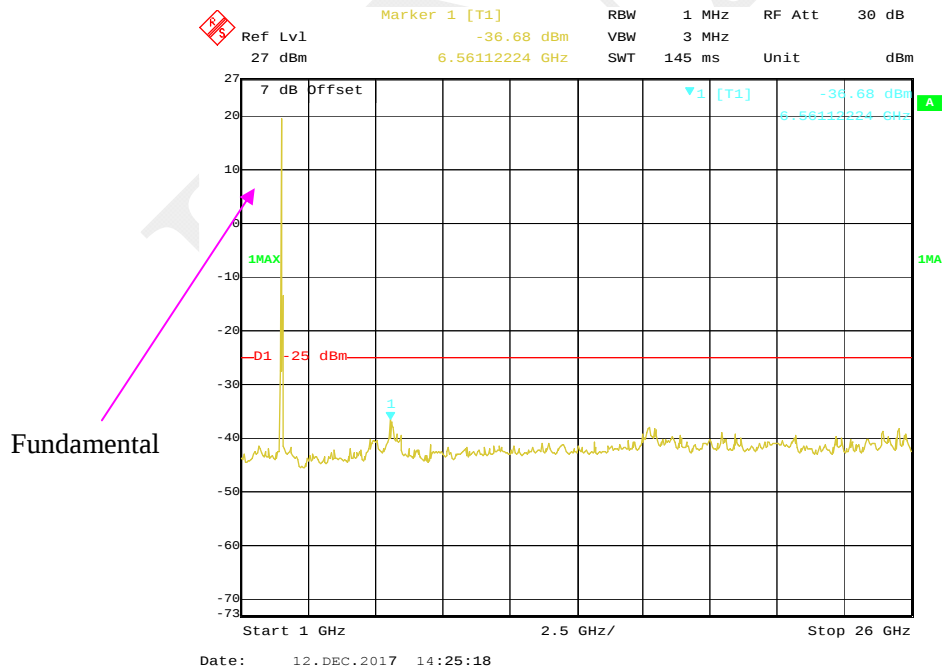

30 MHz - 1 GHz (20 MHz, Middle Channel)

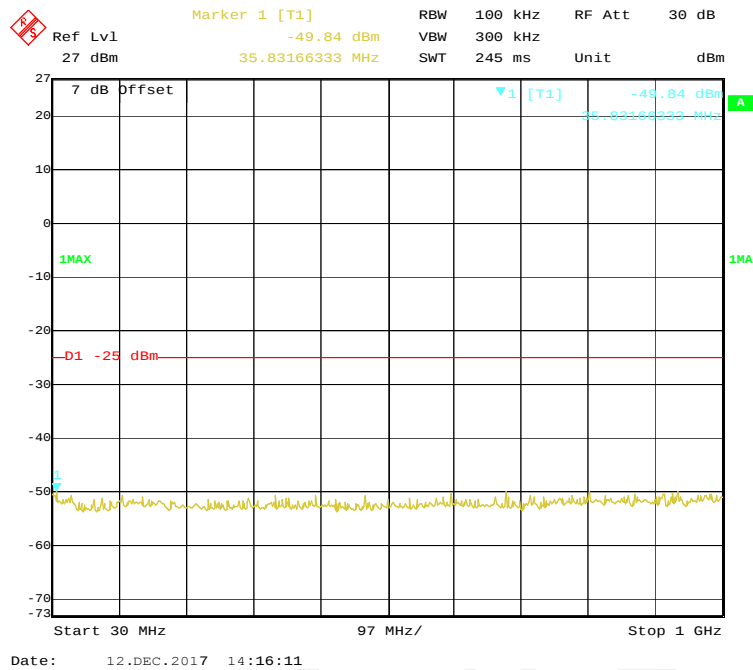

1 GHz – 26 GHz (20 MHz, Middle Channel)

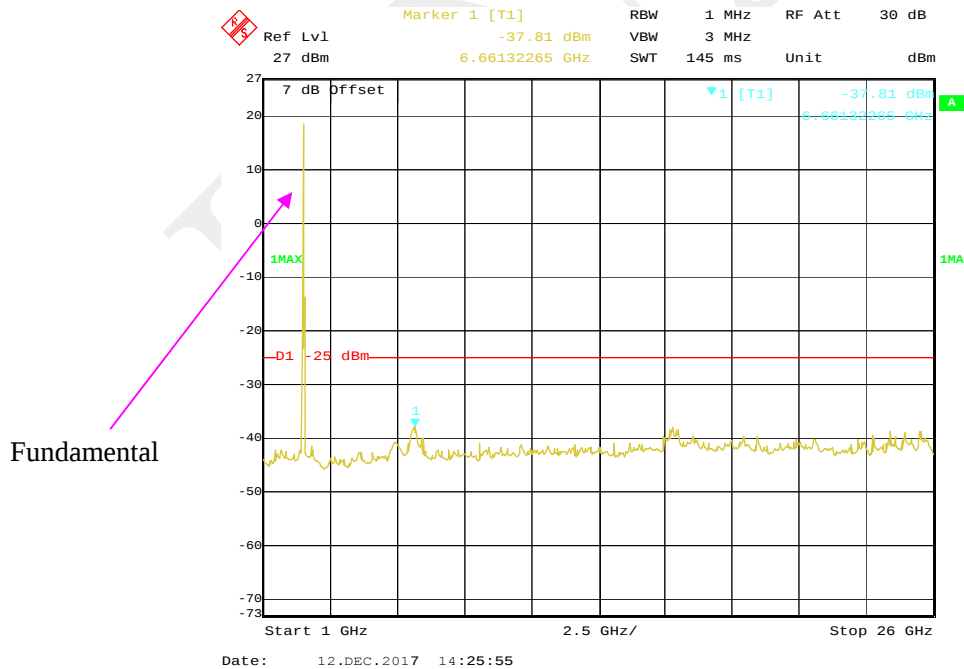

FCC § 2.1053; § 22.917 (a); § 24.238 (a); § 27.53 (m) - SPURIOUS RADIATED EMISSIONS

Applicable Standards

FCC § 2.1053, § 22.917(a) and § 24.238(a) and § 27.53(m)

22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

27.53 (m), For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg(\text{TX pwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10}(\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	23.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min on 2017-11-22.

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

30 MHz ~ 10 GHz:

GSM 850 Band

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Middle channel										
81.30	63.78	175	125	H	-43.10	0.30	-7.73	-51.13	-13	38.13
81.30	66.38	63	217	V	-40.37	0.30	-7.73	-48.40	-13	35.40
1673.20	60.77	16	180	H	-52.40	0.84	8.48	-44.76	-13	31.76
1673.20	67.21	250	140	V	-46.22	0.84	8.48	-38.58	-13	25.58
2509.80	51.21	208	158	H	-59.93	0.89	10.09	-50.73	-13	37.73
2509.80	57.38	351	146	V	-53.83	0.89	10.09	-44.63	-13	31.63

WCDMA Band V

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Middle channel										
81.30	63.54	84	209	H	-43.34	0.30	-7.73	-51.37	-13	38.37
81.30	65.89	48	116	V	-40.86	0.30	-7.73	-48.89	-13	35.89
1673.20	55.83	94	145	H	-57.34	0.84	8.48	-49.70	-13	36.70
1673.20	56.92	98	223	V	-56.51	0.84	8.48	-48.87	-13	35.87
2509.80	46.35	192	128	H	-64.79	0.89	10.09	-55.59	-13	42.59
2509.80	48.37	138	138	V	-62.84	0.89	10.09	-53.64	-13	40.64

30 MHz ~ 20 GHz:

PCS 1900 Band

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
GSM Mode, Middle channel										
81.30	62.78	222	196	H	-44.10	0.30	-7.73	-52.13	-13	39.13
81.30	65.37	62	167	V	-41.38	0.30	-7.73	-49.41	-13	36.41
3760.00	54.11	43	156	H	-52.67	0.95	9.74	-43.88	-13	30.88
3760.00	51.98	129	185	V	-55.12	0.95	9.74	-46.33	-13	33.33
5640.00	51.02	242	155	H	-52.15	1.15	10.74	-42.56	-13	29.56
5640.00	48.56	76	109	V	-54.91	1.15	10.74	-45.32	-13	32.32

WCDMA Band II

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
WCDMA Mode, Middle channel										
81.30	62.03	299	176	H	-44.85	0.30	-7.73	-52.88	-13	39.88
81.30	65.10	207	214	V	-41.65	0.30	-7.73	-49.68	-13	36.68
3760.00	47.54	35	115	H	-59.24	0.95	9.74	-50.45	-13	37.45
3760.00	47.12	280	239	V	-59.98	0.95	9.74	-51.19	-13	38.19
5640.00	51.99	187	162	H	-51.18	1.15	10.74	-41.59	-13	28.59
5640.00	53.74	218	145	V	-49.73	1.15	10.74	-40.14	-13	27.14

Test mode: Transmitting (Pre-scan with all the bandwidth, and worse case as below)

30 MHz ~ 10 GHz:

LTE Band 5:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth Middle Channel										
81.30	62.38	96	1.5	H	-44.50	0.30	-7.73	-52.53	-13	39.53
81.30	65.21	246	1.7	V	-41.54	0.30	-7.73	-49.57	-13	36.57
1673.00	57.59	117	1.3	H	-55.58	0.84	8.48	-47.94	-13	34.94
1673.00	64.78	176	2.0	V	-48.65	0.84	8.48	-41.01	-13	28.01
2509.50	50.21	159	1.8	H	-60.93	0.89	10.09	-51.73	-13	38.73
2509.50	55.35	32	2.4	V	-55.86	0.89	10.09	-46.66	-13	33.66
16-QAM 1.4MHz Bandwidth Middle Channel										
81.30	62.87	8	1.7	H	-44.01	0.30	-7.73	-52.04	-13	39.04
81.30	65.11	129	2.0	V	-41.64	0.30	-7.73	-49.67	-13	36.67
1673.00	58.11	293	1.1	H	-55.06	0.84	8.48	-47.42	-13	34.42
1673.00	65.16	32	1.5	V	-48.27	0.84	8.48	-40.63	-13	27.63
2509.50	50.78	163	1.6	H	-60.36	0.89	10.09	-51.16	-13	38.16
2509.50	55.98	300	2.1	V	-55.23	0.89	10.09	-46.03	-13	33.03

30 MHz ~ 20 GHz:**LTE Band 2:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth Middle Channel										
81.30	62.46	10	1.7	H	-44.42	0.30	-7.73	-52.45	-13	39.45
81.30	65.21	154	1.9	V	-41.54	0.30	-7.73	-49.57	-13	36.57
3760.00	49.54	329	1.4	H	-57.24	0.95	9.74	-48.45	-13	35.45
3760.00	49.78	189	1.6	V	-57.32	0.95	9.74	-48.53	-13	35.53
5640.00	56.59	47	1.6	H	-46.58	1.15	10.74	-36.99	-13	23.99
5640.00	58.13	176	1.9	V	-45.34	1.15	10.74	-35.75	-13	22.75
16-QAM 1.4MHz Bandwidth Middle Channel										
81.30	61.89	213	1.4	H	-44.99	0.30	-7.73	-53.02	-13	40.02
81.30	64.87	236	1.6	V	-41.88	0.30	-7.73	-49.91	-13	36.91
3760.00	48.89	255	2.5	H	-57.89	0.95	9.74	-49.10	-13	36.10
3760.00	49.12	130	1.7	V	-57.98	0.95	9.74	-49.19	-13	36.19
5640.00	56.59	33	1.8	H	-46.58	1.15	10.74	-36.99	-13	23.99
5640.00	59.64	276	1.4	V	-43.83	1.15	10.74	-34.24	-13	21.24

LTE Band 4:

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 1.4MHz Bandwidth Middle Channel										
81.30	62.35	170	2.2	H	-44.53	0.30	-7.73	-52.56	-13	39.56
81.30	64.88	15	1.4	V	-41.87	0.30	-7.73	-49.90	-13	36.90
3465.00	50.94	74	2.2	H	-56.81	0.93	9.87	-47.87	-13	34.87
3465.00	50.45	52	2.2	V	-57.73	0.93	9.87	-48.79	-13	35.79
5197.50	49.55	333	2.3	H	-55.37	1.10	10.30	-46.17	-13	33.17
5197.50	53.44	169	1.9	V	-51.69	1.10	10.30	-42.49	-13	29.49
16-QAM 1.4MHz Bandwidth Middle Channel										
81.30	61.87	17	2.1	H	-45.01	0.30	-7.73	-53.04	-13	40.04
81.30	64.21	233	2.4	V	-42.54	0.30	-7.73	-50.57	-13	37.57
3465.00	49.01	331	1.7	H	-58.74	0.93	9.87	-49.80	-13	36.80
3465.00	50.68	51	2.2	V	-57.50	0.93	9.87	-48.56	-13	35.56
5197.50	50.66	301	2.3	H	-54.26	1.10	10.30	-45.06	-13	32.06
5197.50	52.94	89	2.4	V	-52.19	1.10	10.30	-42.99	-13	29.99

30 MHz ~ 26 GHz:**LTE Band 7:**

Frequency (MHz)	Receiver Reading (dBμV)	Turntable Angle Degree	Rx Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Height (cm)	Polar (H/V)	Submitted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd/dBi)			
QPSK 5MHz Bandwidth Middle Channel										
81.30	61.59	351	2.3	H	-45.29	0.30	-7.73	-53.32	-25	28.32
81.30	64.87	329	1.7	V	-41.88	0.30	-7.73	-49.91	-25	24.91
5070.00	54.98	128	1.3	H	-50.65	1.09	10.30	-41.44	-25	16.44
5070.00	57.90	58	1.6	V	-47.90	1.09	10.30	-38.69	-25	13.69
7605.00	57.35	47	1.1	H	-42.76	1.78	10.08	-34.46	-25	9.46
7605.00	60.12	350	1.9	V	-40.14	1.78	10.08	-31.84	-25	6.84
16-QAM 5MHz Bandwidth Middle Channel										
81.30	61.33	220	2.1	H	-45.55	0.30	-7.73	-53.58	-25	28.58
81.30	64.28	94	1.2	V	-42.47	0.30	-7.73	-50.50	-25	25.5
5070.00	54.99	105	2.2	H	-50.64	1.09	10.30	-41.43	-25	16.43
5070.00	58.98	129	1.9	V	-46.82	1.09	10.30	-37.61	-25	12.61
7605.00	58.02	122	1.7	H	-42.09	1.78	10.08	-33.79	-25	8.79
7605.00	61.01	104	1.8	V	-39.25	1.78	10.08	-30.95	-25	5.95

FCC § 22.917 (a);§ 24.238 (a); §27.53 (m) - BAND EDGES

Applicable Standards

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to FCC §27.53 (m), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency

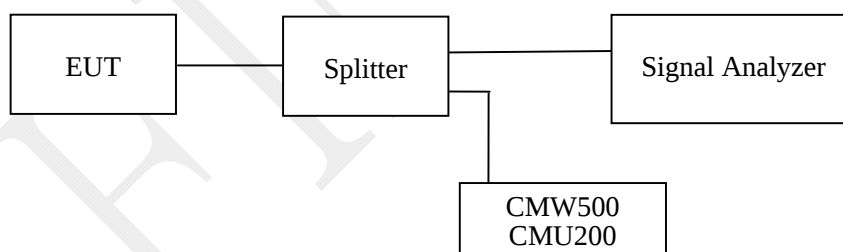

Test Data

Environmental Conditions

Temperature:	23.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa


The testing was performed by Max Min from 2017-11-15 to 2017-11-22.

EUT operation mode: Transmitting


Test Result: Compliance.

GSM 850 Band:


GSM Mode, Left Band Edge

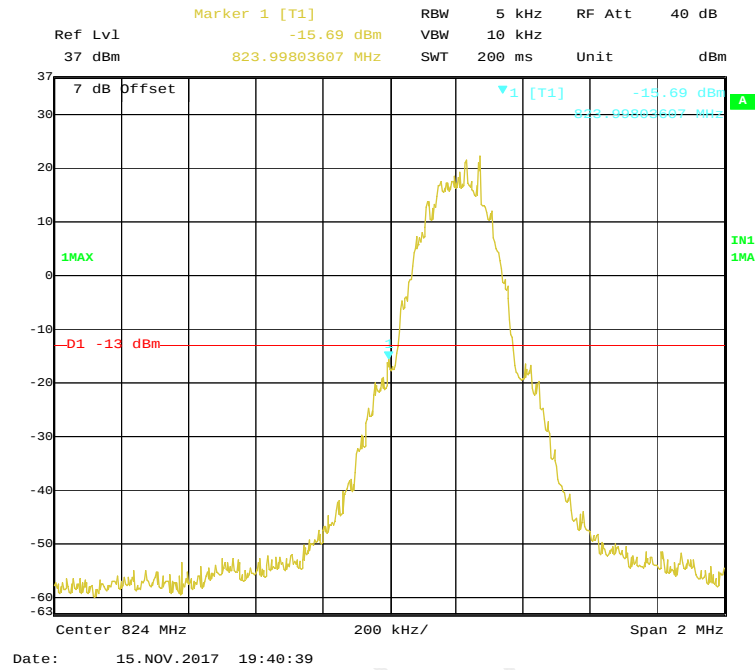


GSM Mode, Right Band Edge


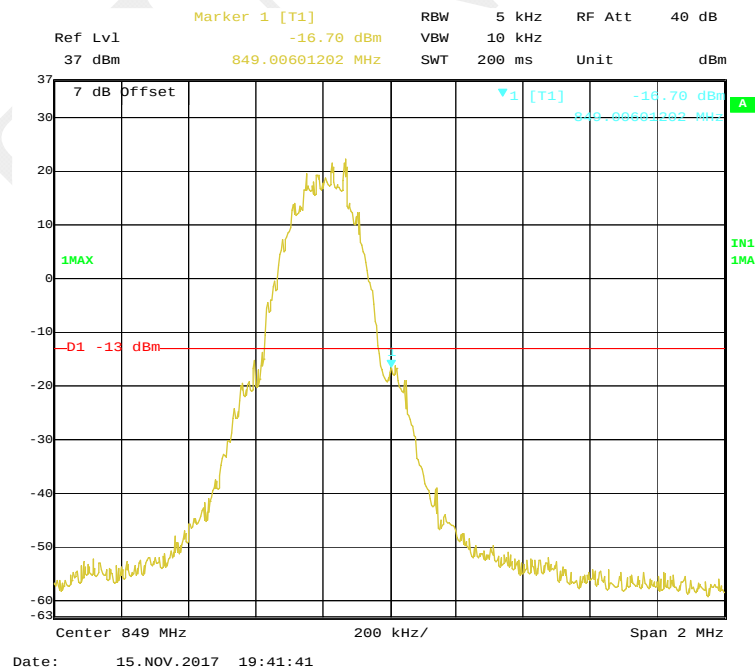


GPRS Mode, Left Band Edge

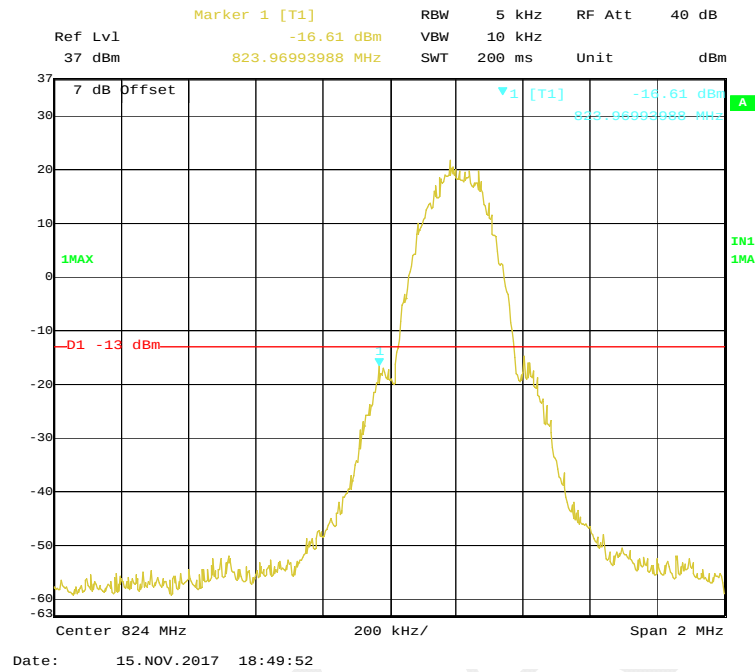


GPRS Mode, Right Band Edge

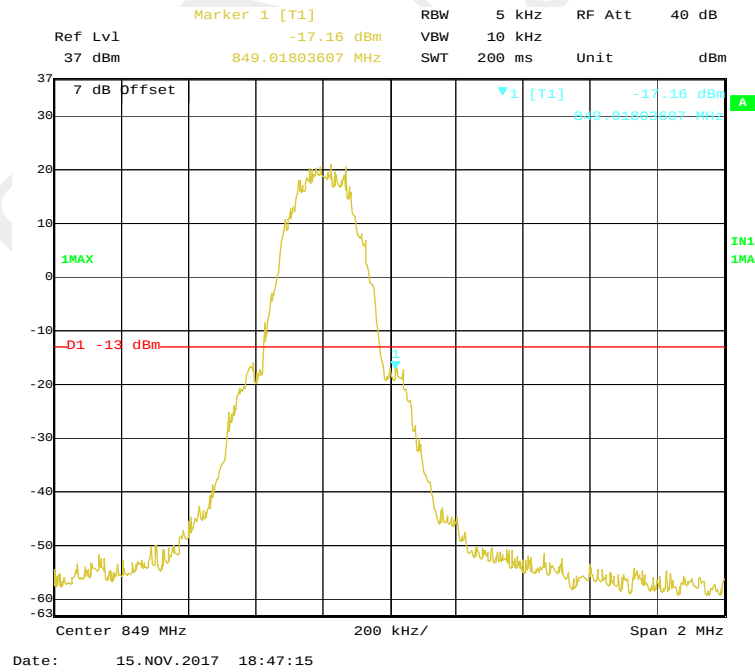


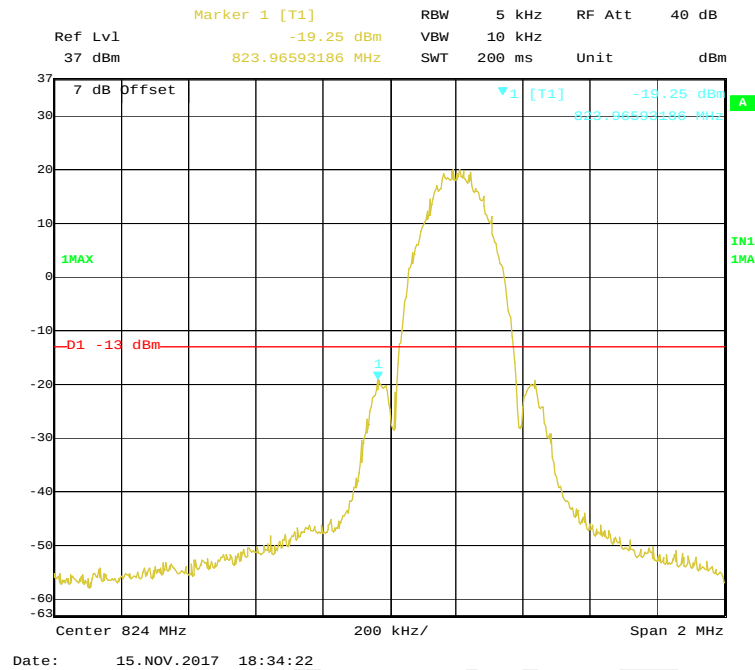
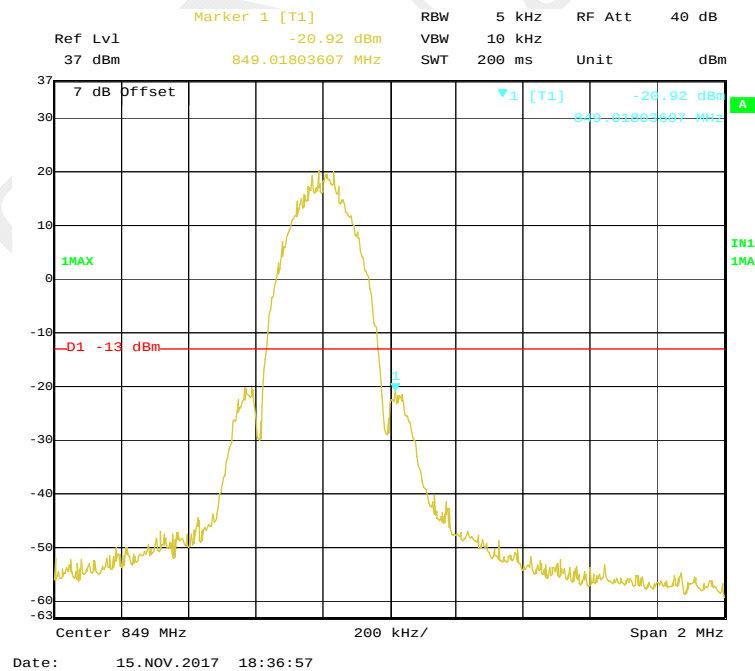
EGPRS Mode, Left Band Edge**EGPRS Mode, Right Band Edge**

WCDMA Mode Band V, Left Band Edge

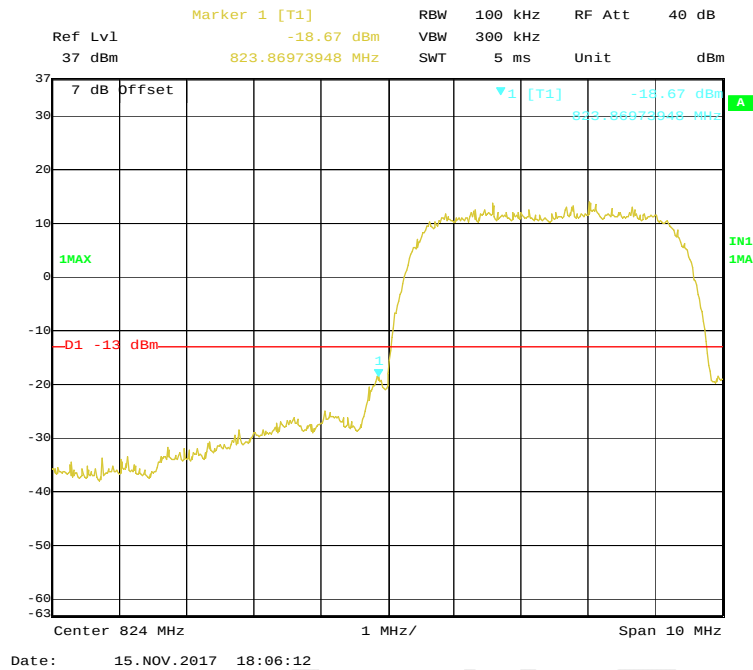


WCDMA Mode Band V, Right Band Edge

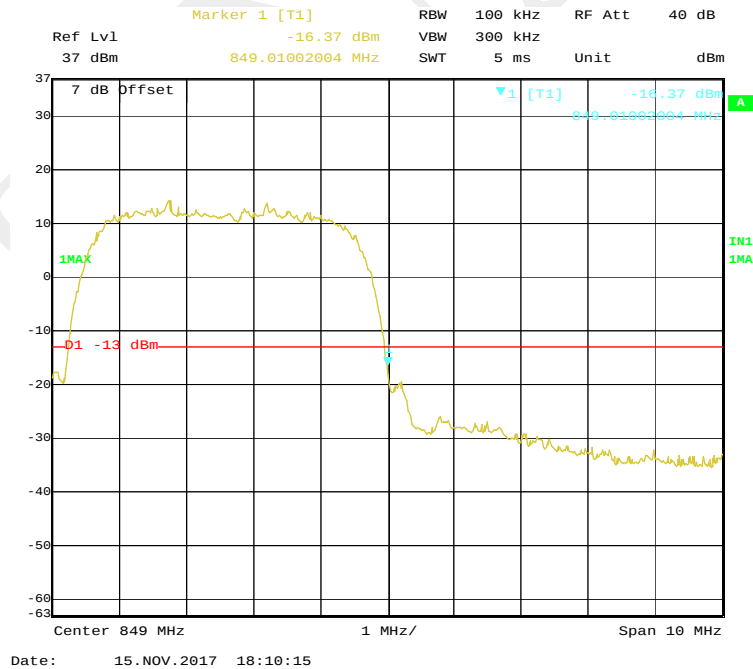


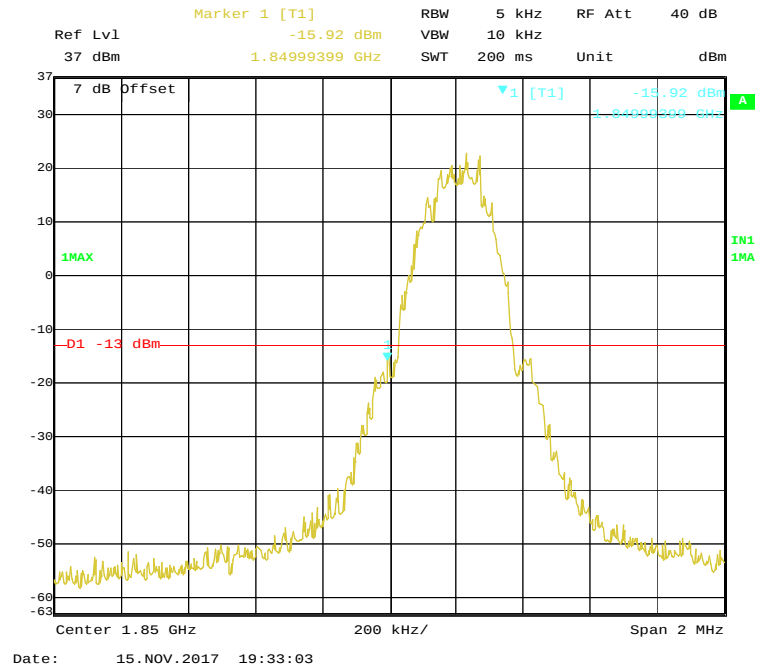
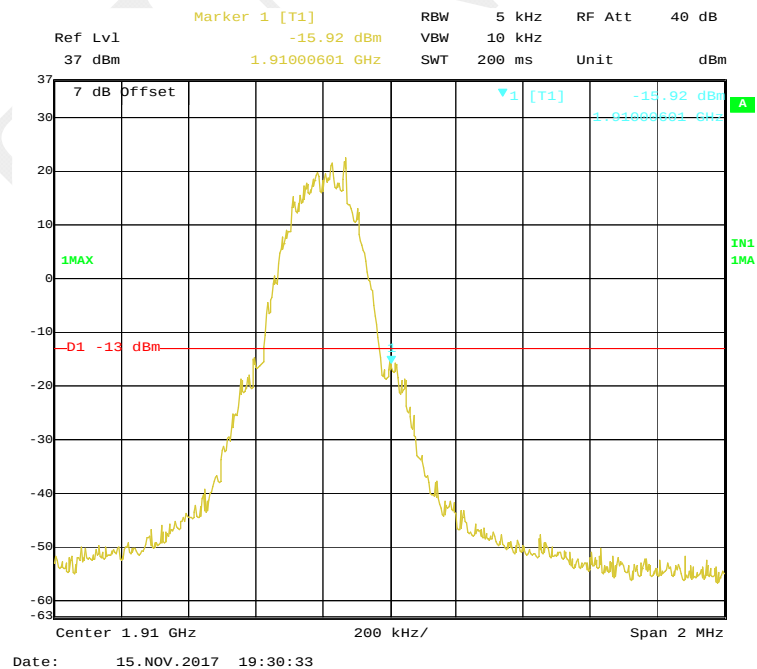
PCS 1900 Band:**GSM Mode, Left Band Edge****GSM Mode, Right Band Edge**



GPRS Mode, Left Band Edge

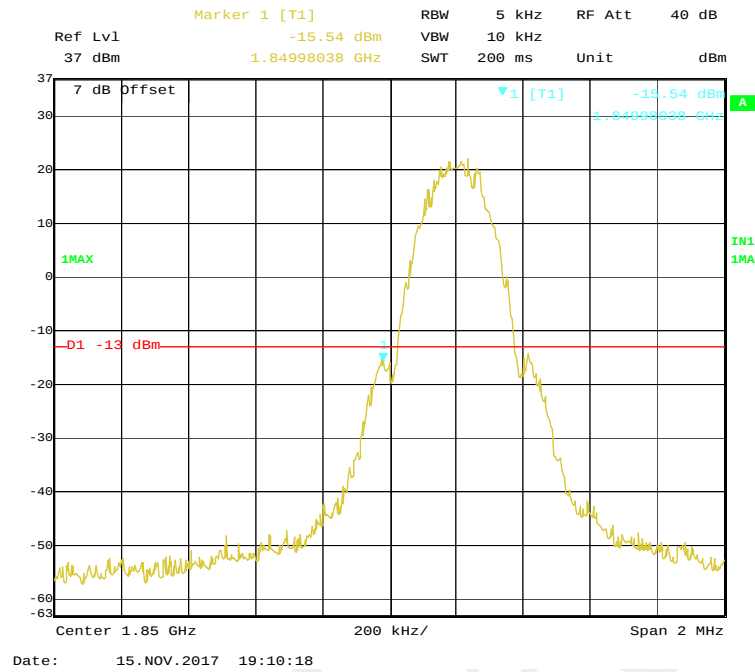

GPRS Mode, Right Band Edge

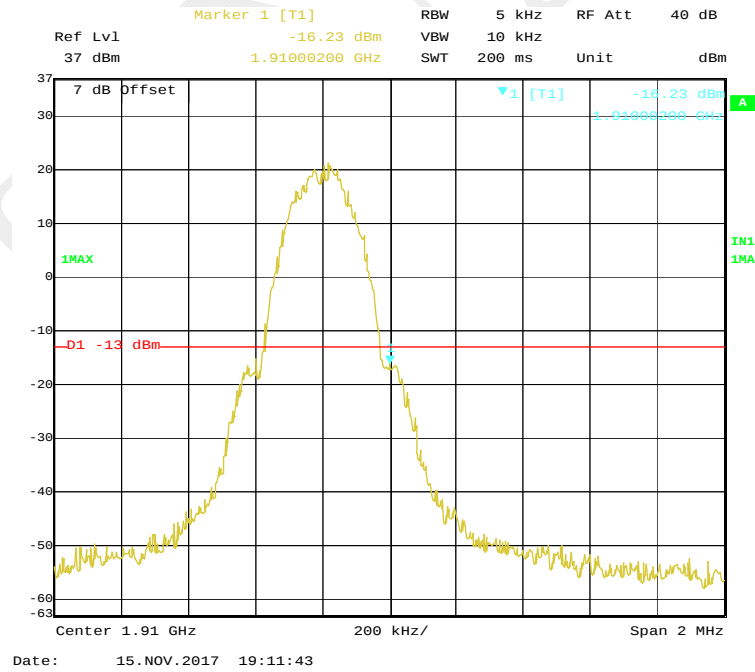


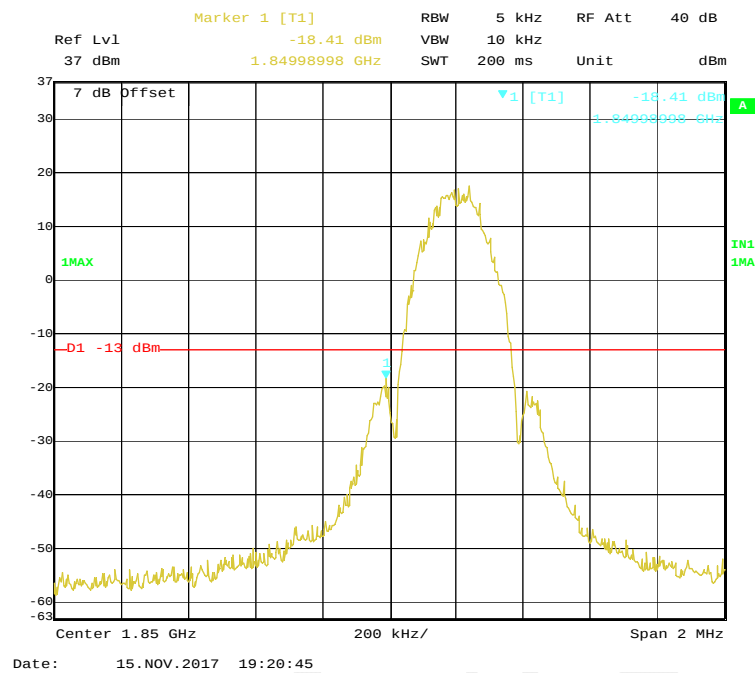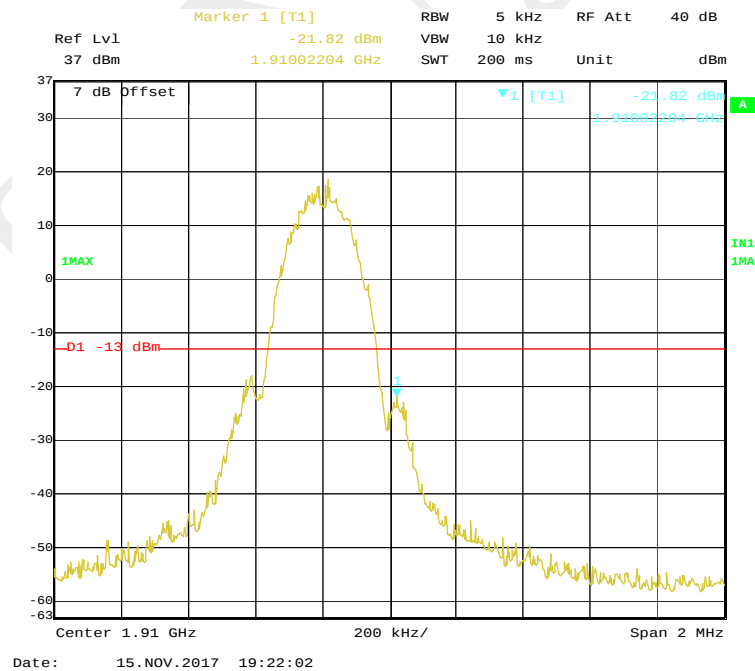EGPRS Mode, Left Band Edge**EGPRS Mode, Right Band Edge**

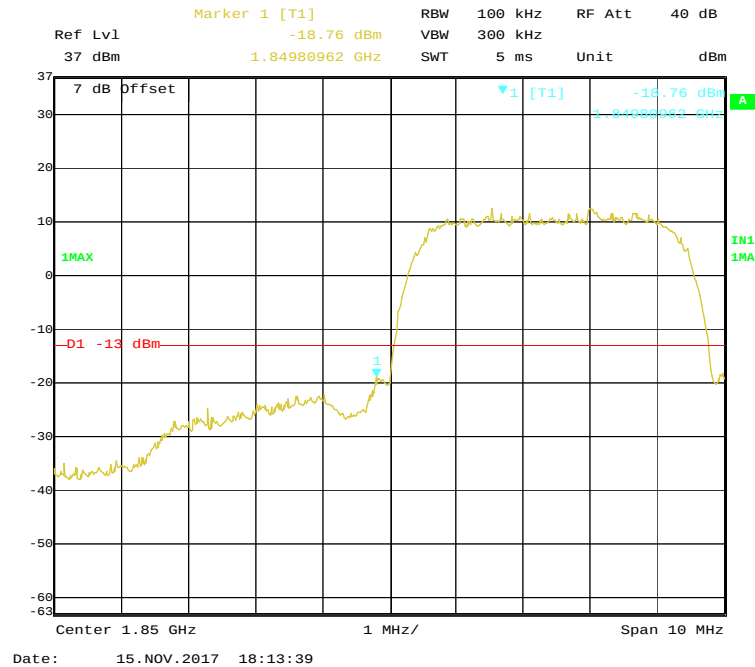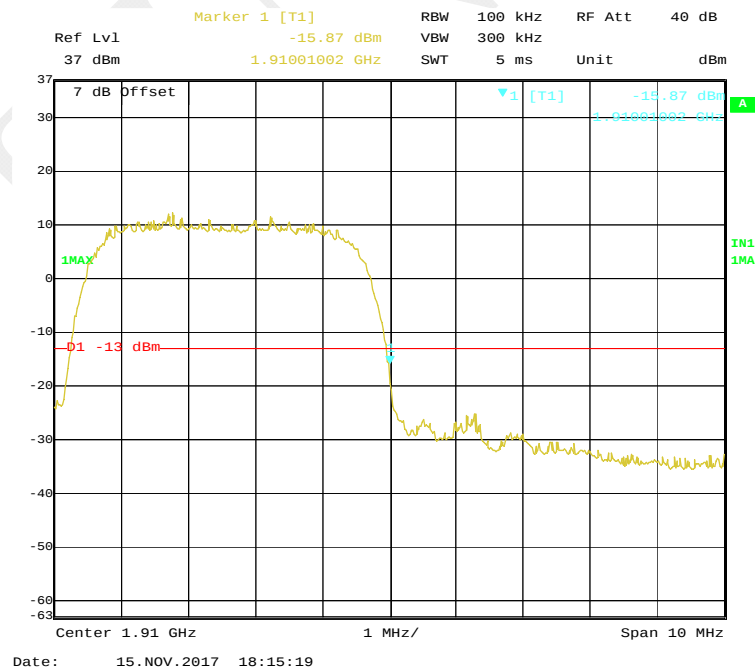
WCDMA Band II**WCDMA Mode, Left Band Edge****WCDMA Mode, Right Band Edge**

LTE Band 2:


QPSK (1.4 MHz, FULL RB) - Left Band Edge

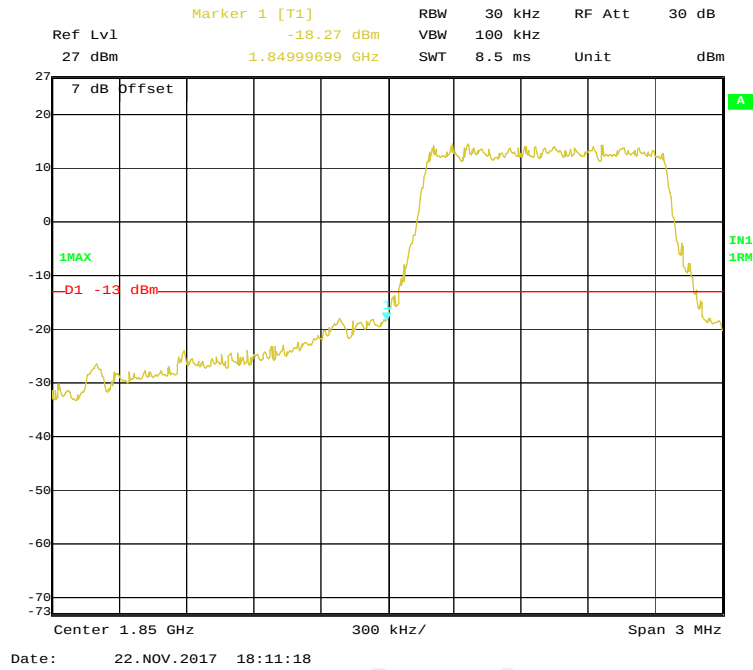


QPSK (1.4 MHz, FULL RB) - Right Band Edge

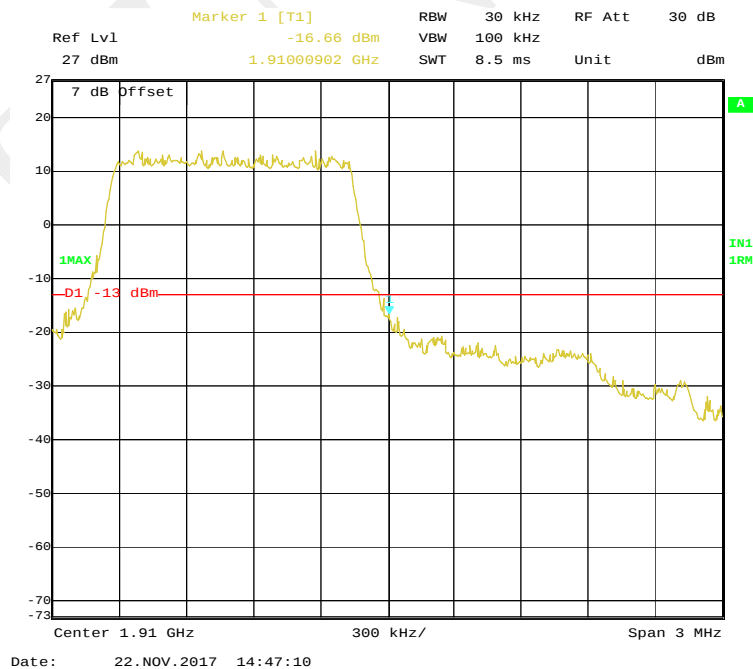


QPSK (3.0 MHz, FULL RB) - Left Band Edge

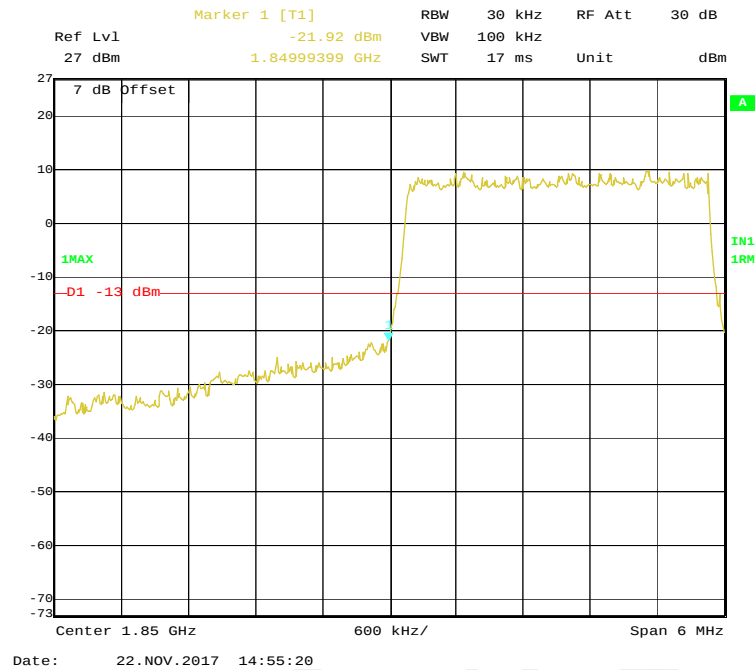


QPSK (3.0 MHz, FULL RB) - Right Band Edge

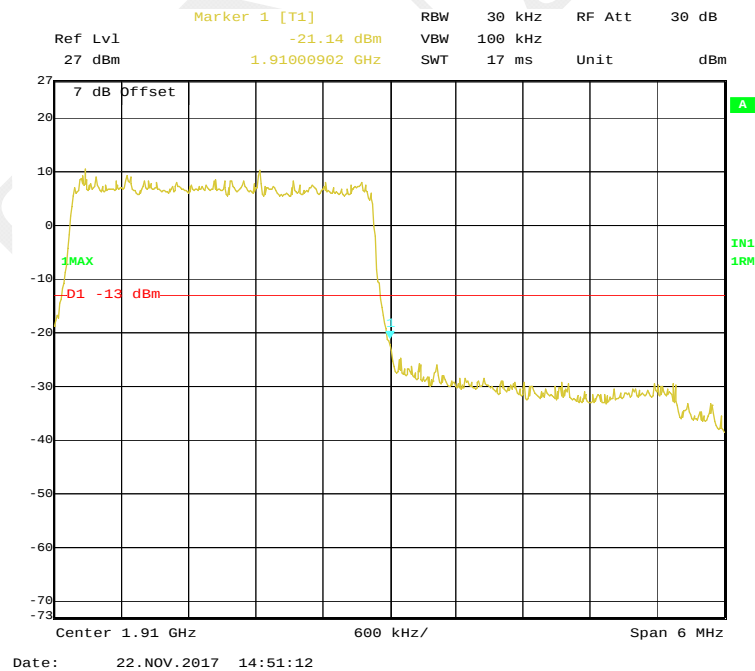


QPSK (5.0 MHz, FULL RB) - Left Band Edge

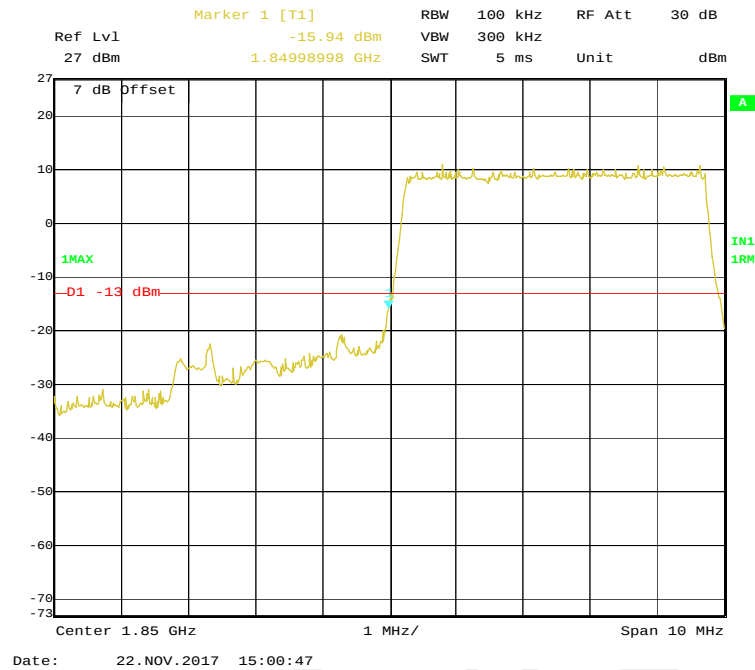


QPSK (5.0 MHz, FULL RB) - Right Band Edge

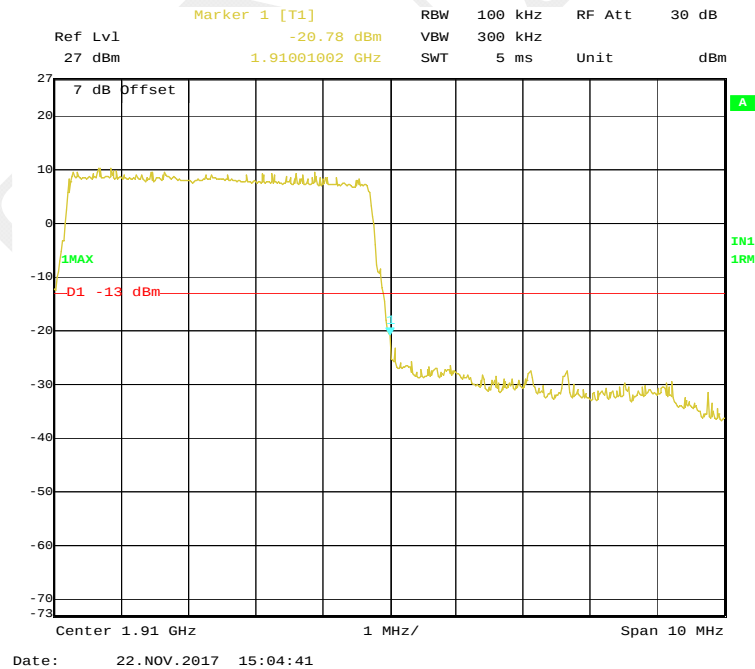


QPSK (10.0 MHz, FULL RB) - Left Band Edge

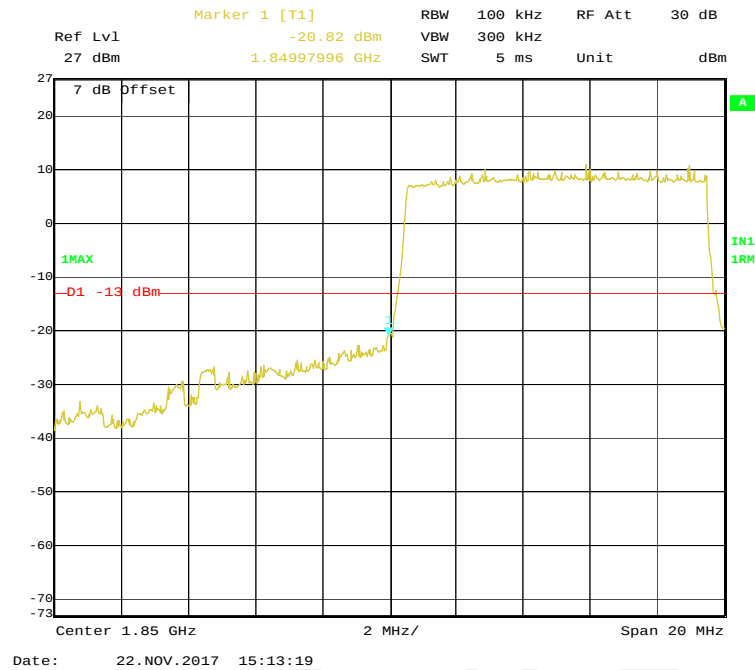


QPSK (10.0 MHz, FULL RB) - Right Band Edge

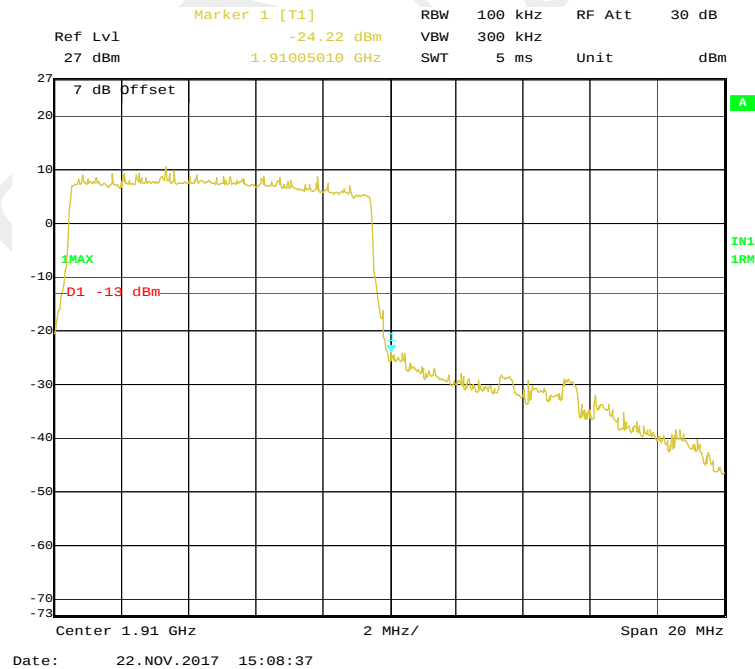


QPSK (15.0 MHz, FULL RB) - Left Band Edge

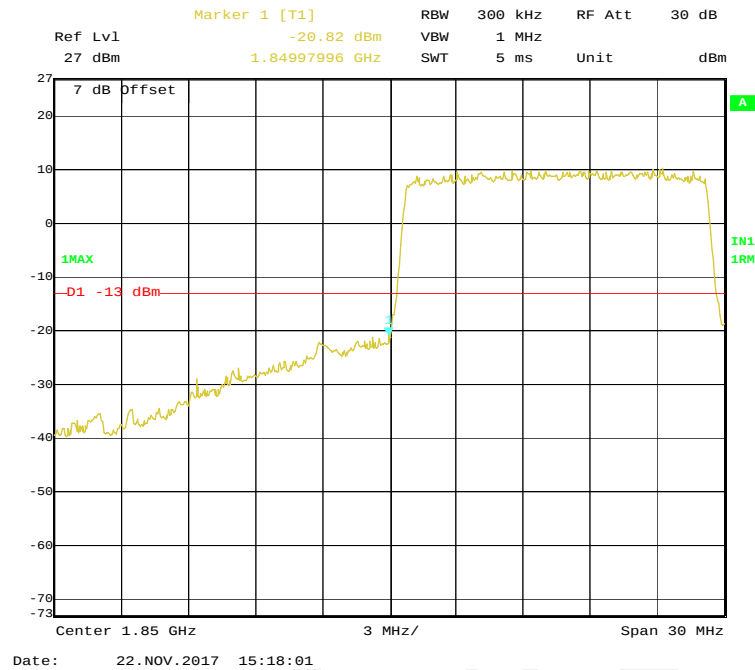


QPSK (15.0 MHz, FULL RB) - Right Band Edge

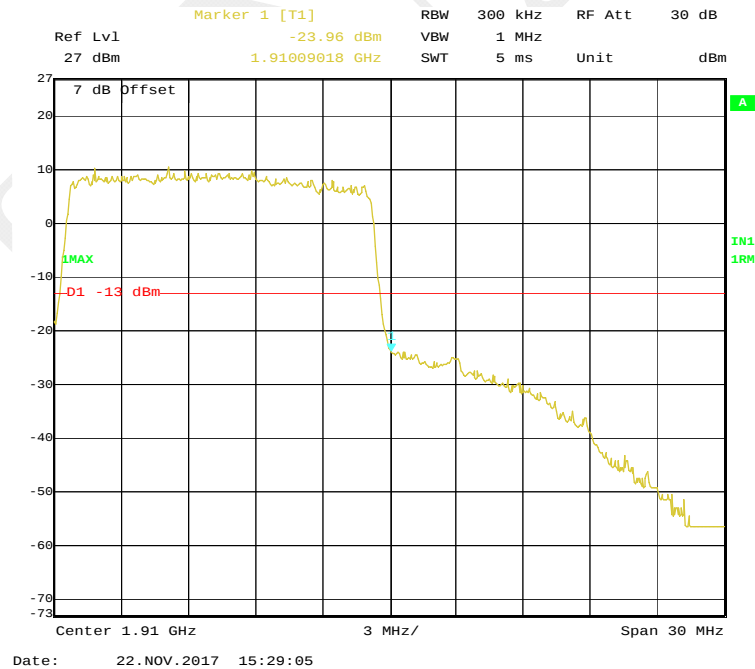


QPSK (20.0 MHz, FULL RB) - Left Band Edge

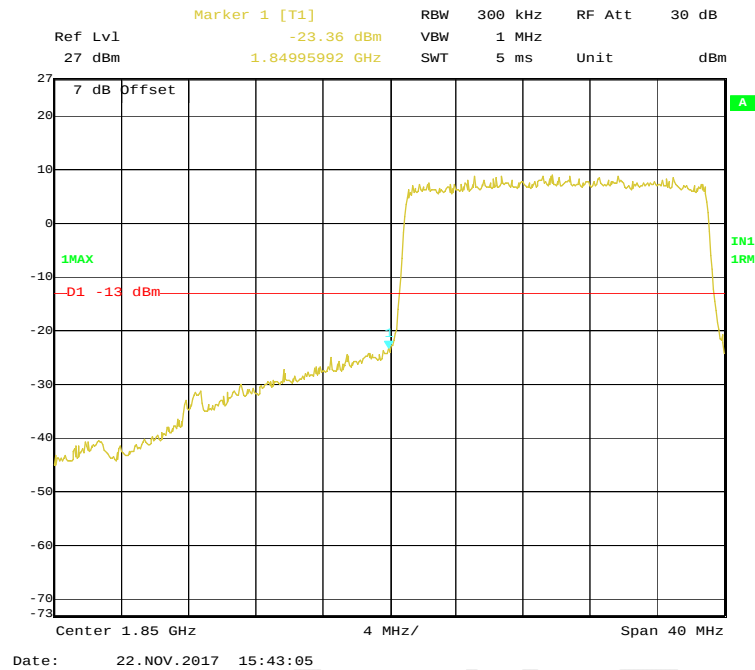


QPSK (20.0 MHz, FULL RB) - Right Band Edge

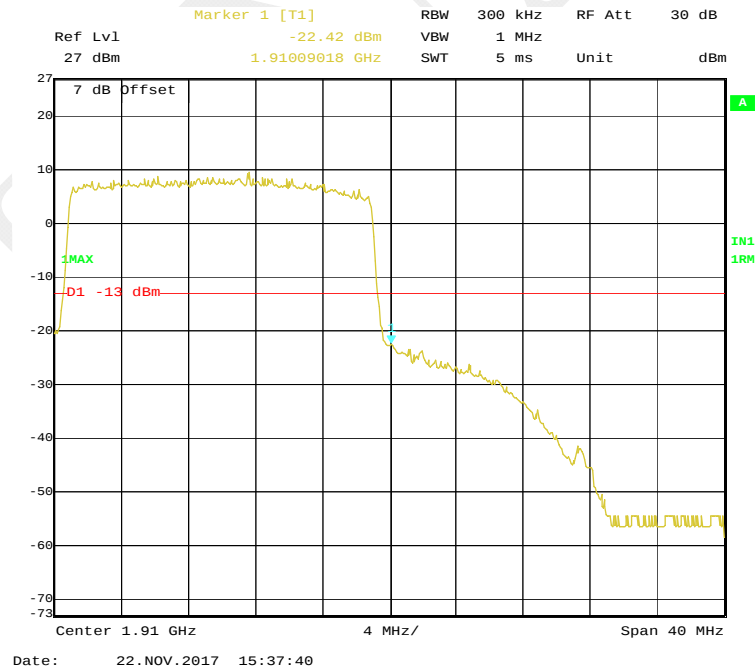


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

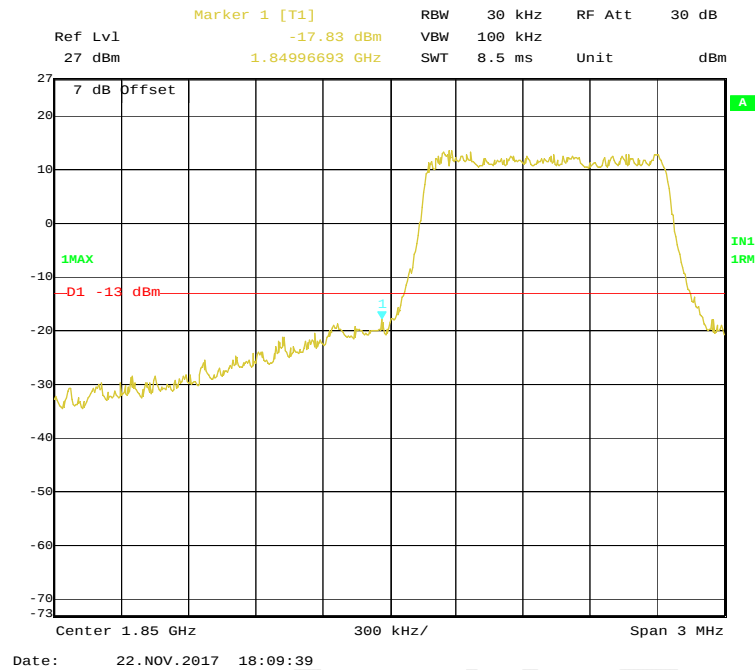


16-QAM (1.4 MHz, FULL RB) - Right Band Edge


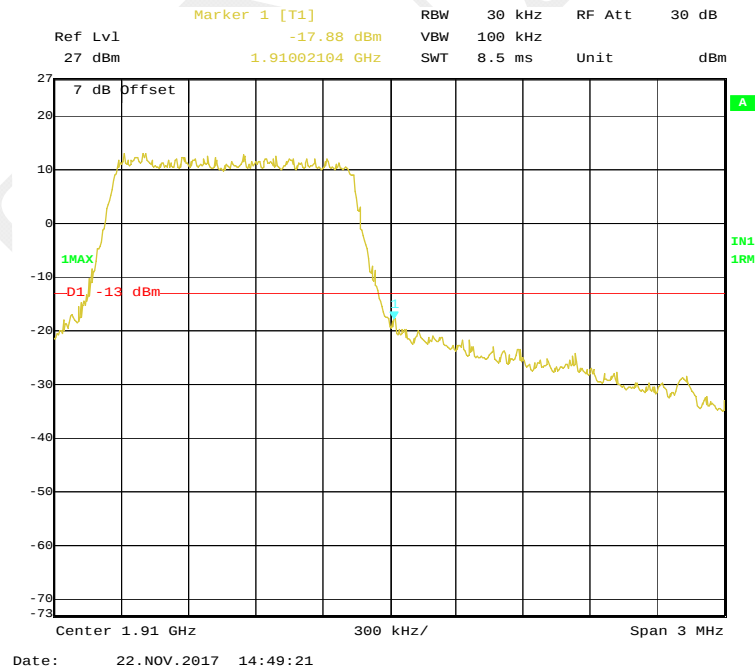


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

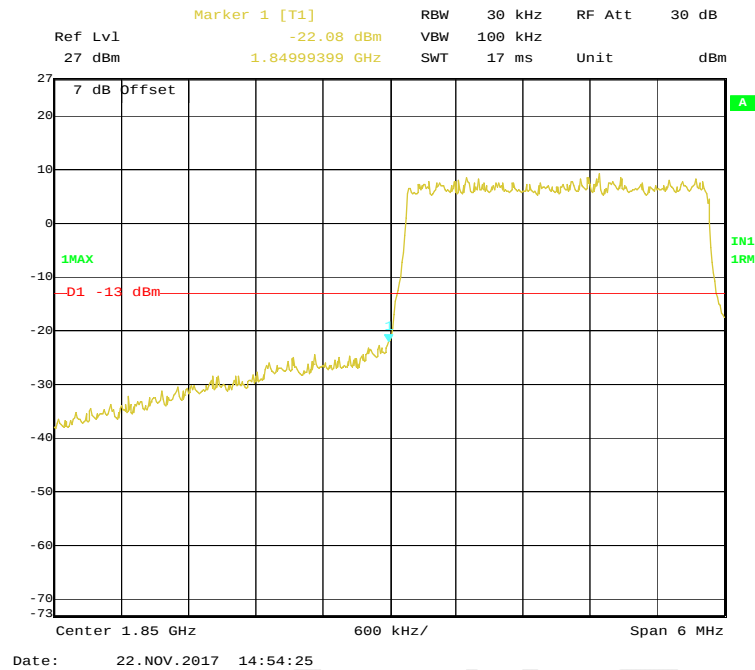


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

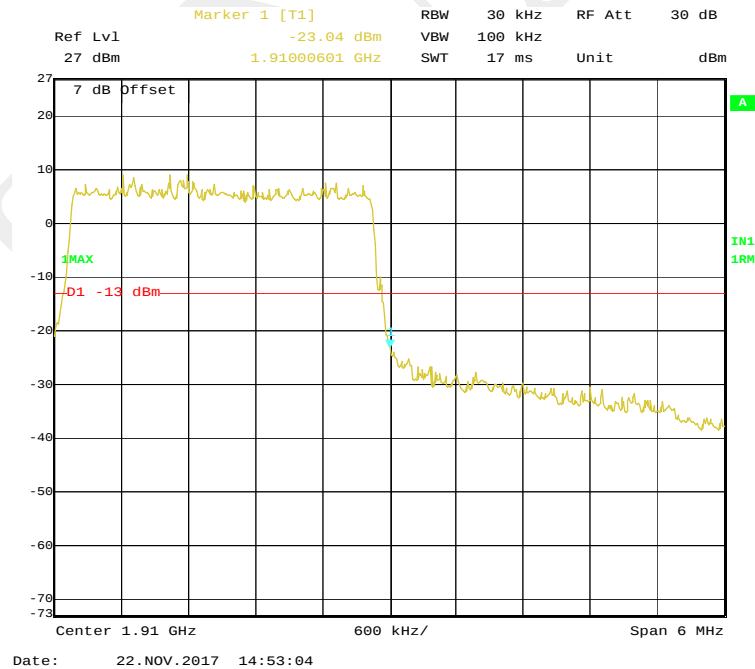


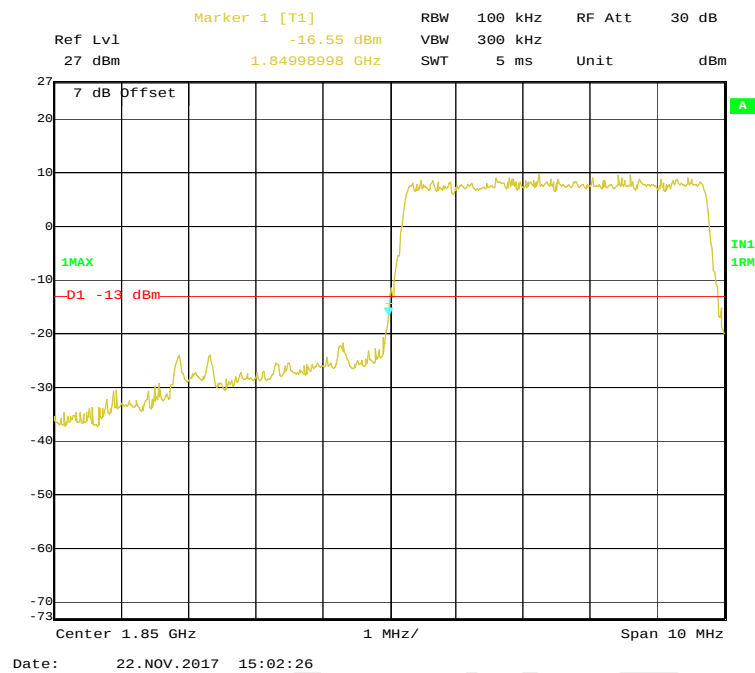
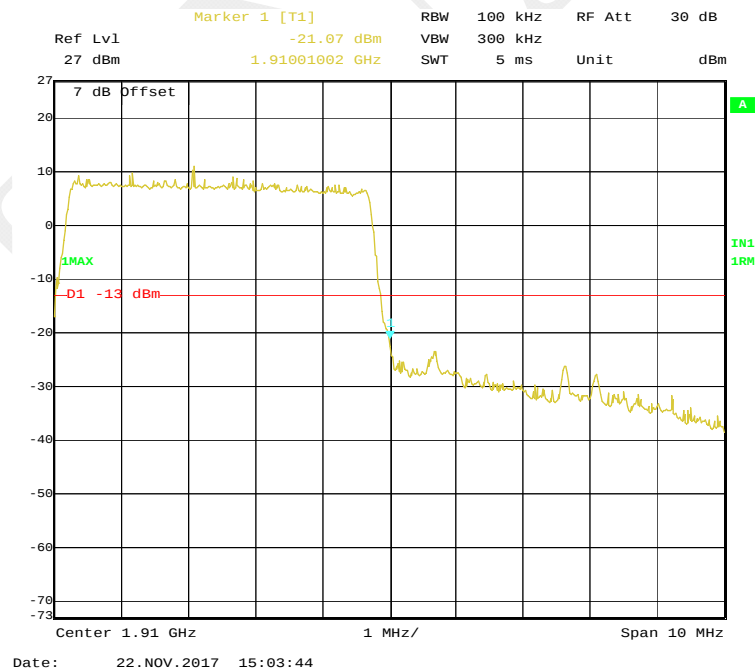
16-QAM (5.0 MHz, FULL RB) - Left Band Edge**16-QAM (5.0 MHz, FULL RB) - Right Band Edge**

16-QAM (10.0 MHz, FULL RB) - Left Band Edge

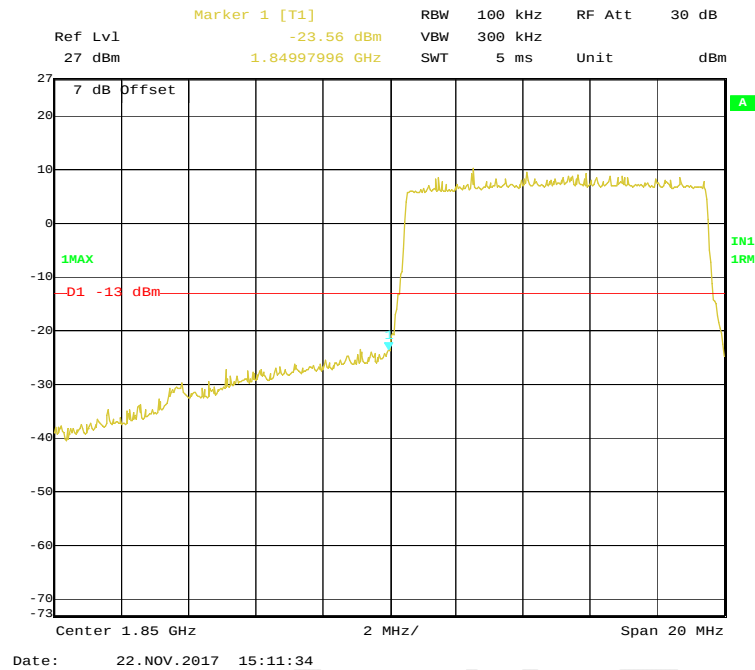


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

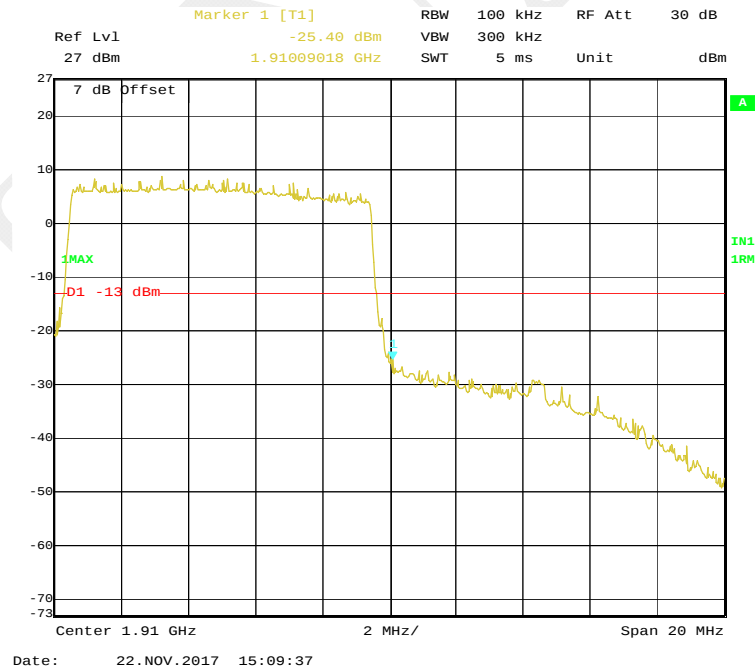


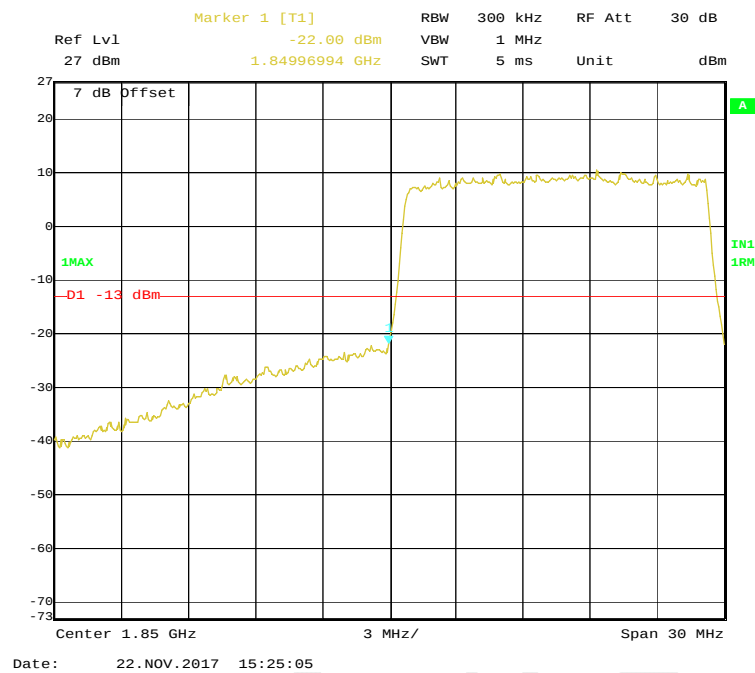
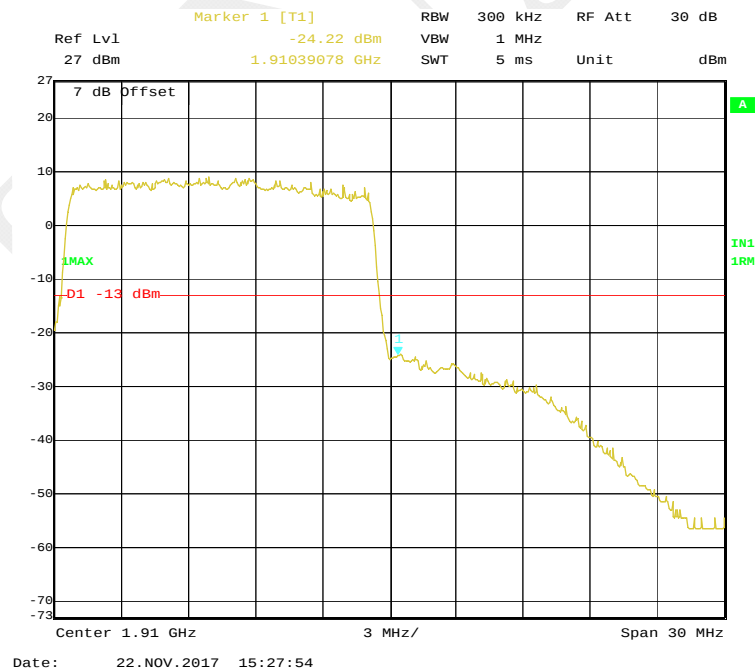
16-QAM (15.0 MHz, FULL RB) - Left Band Edge**16-QAM (15.0 MHz, FULL RB) - Right Band Edge**

16-QAM (20.0 MHz, FULL RB) - Left Band Edge

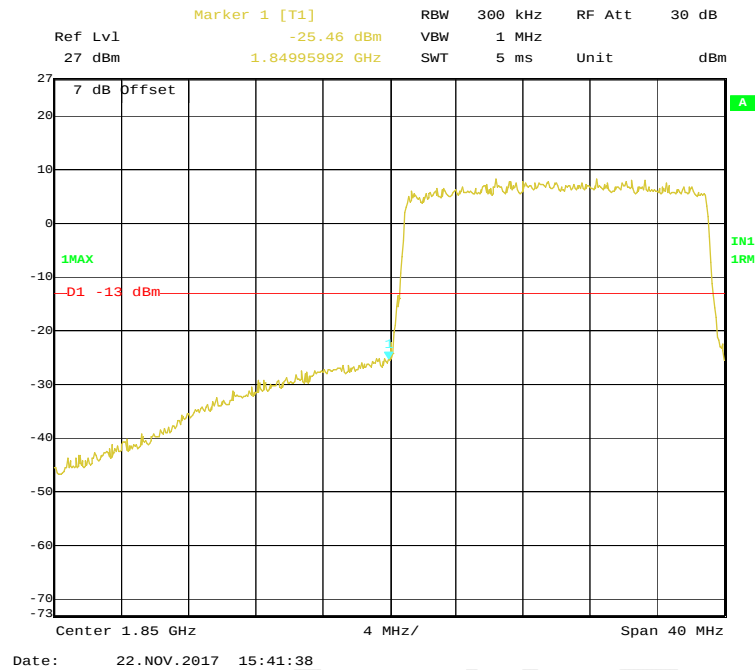


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

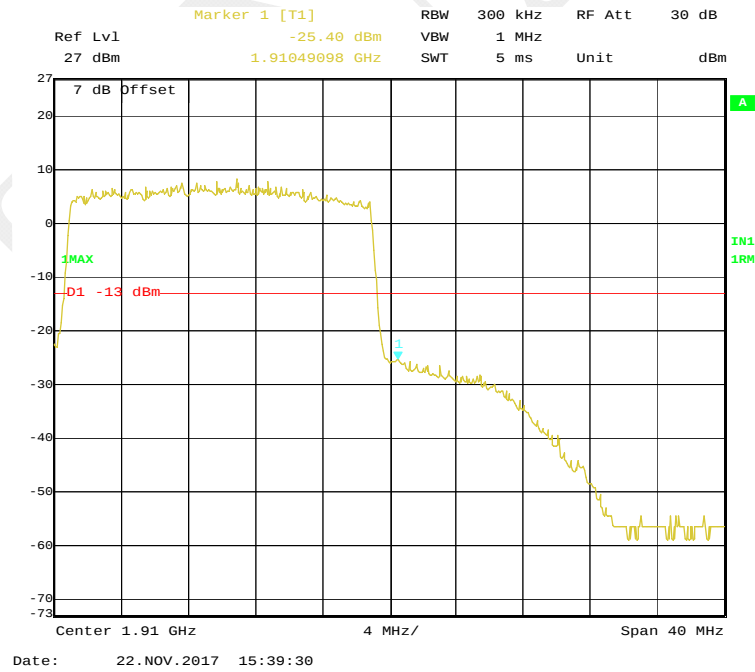


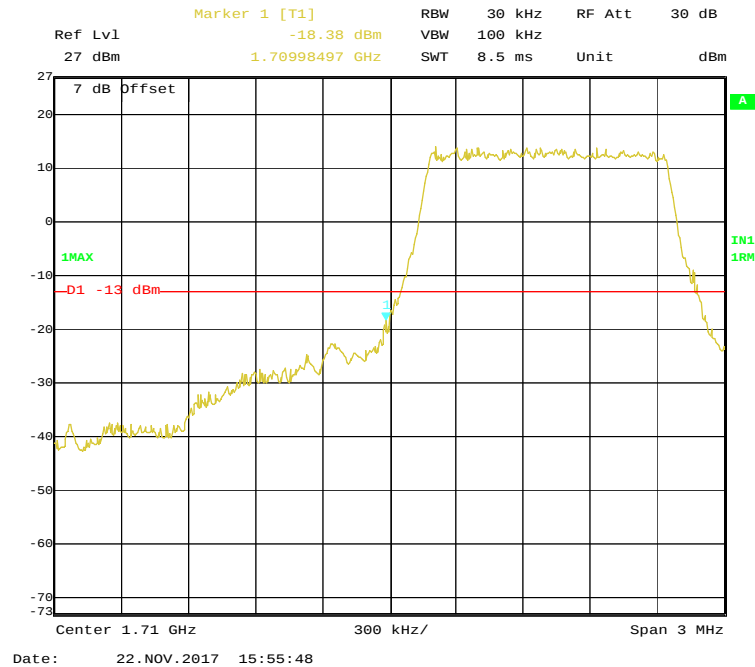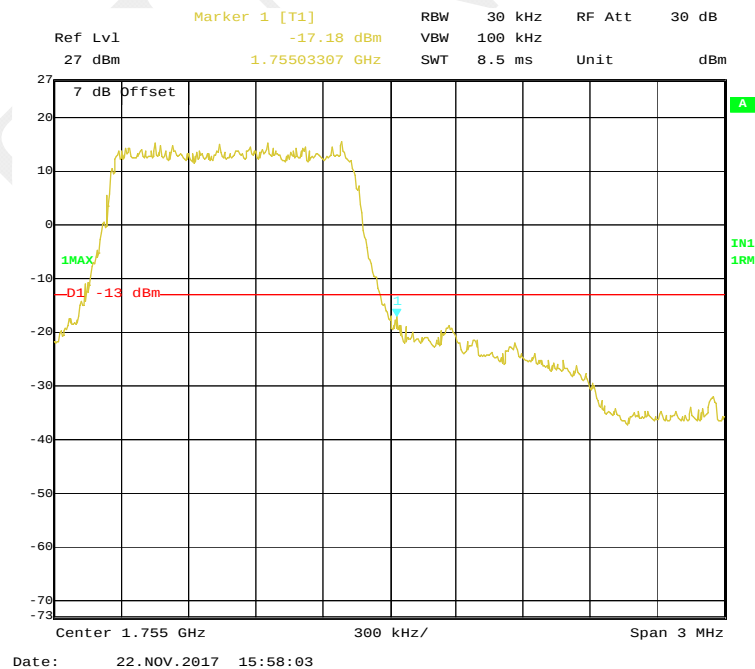LTE Band 4:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**


QPSK (3.0 MHz, FULL RB) - Left Band Edge

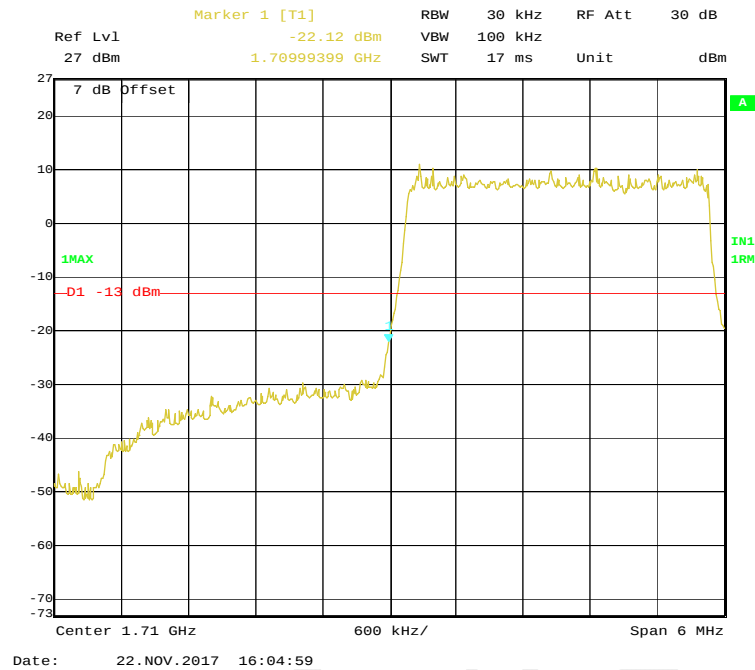


QPSK (3.0 MHz, FULL RB) - Right Band Edge

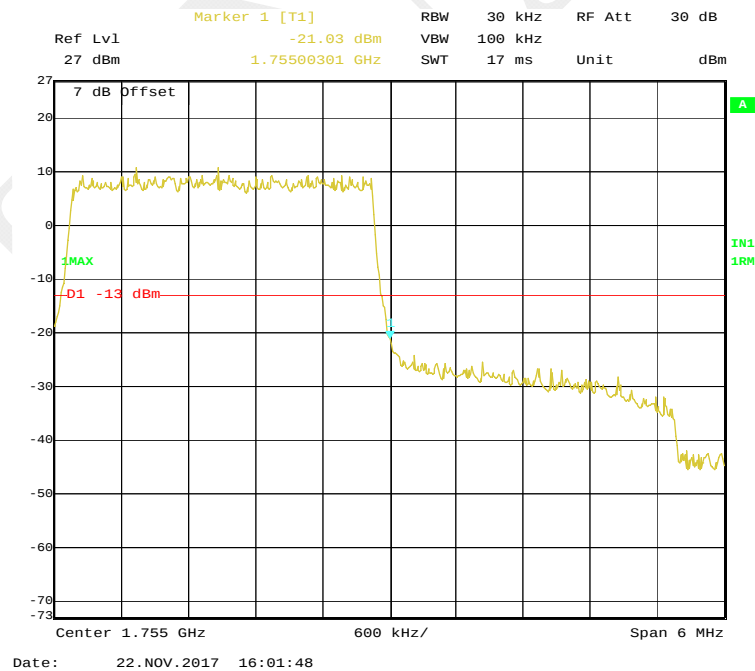


QPSK (5.0 MHz, FULL RB) - Left Band Edge

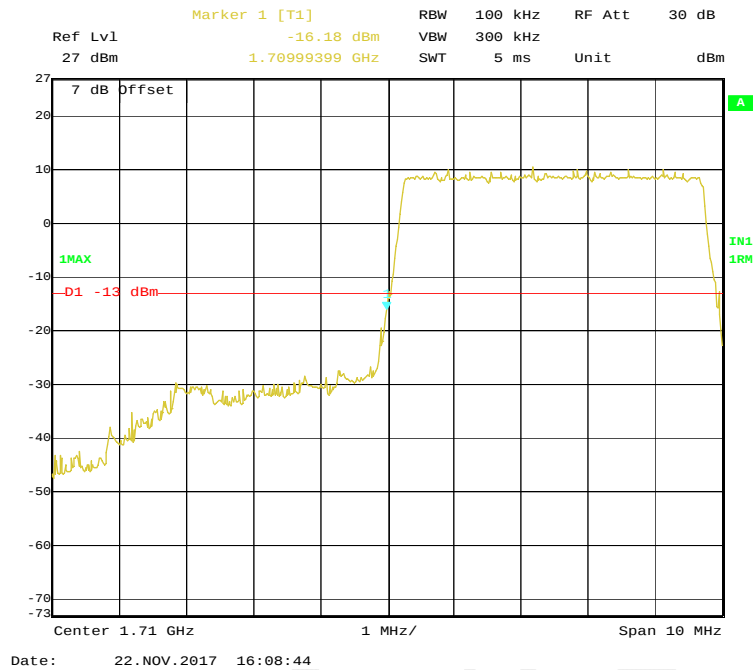


QPSK (5.0 MHz, FULL RB) - Right Band Edge

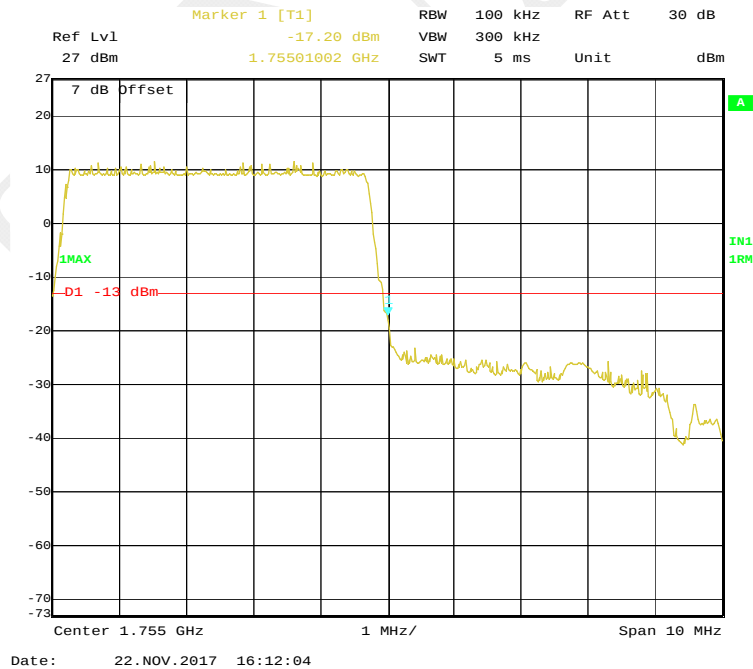


QPSK (10.0 MHz, FULL RB) - Left Band Edge

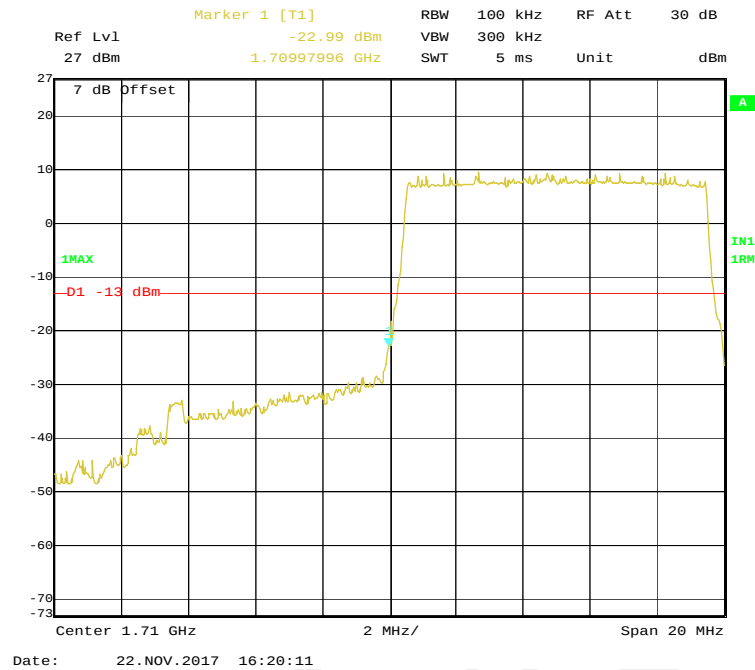


QPSK (10.0 MHz, FULL RB) - Right Band Edge

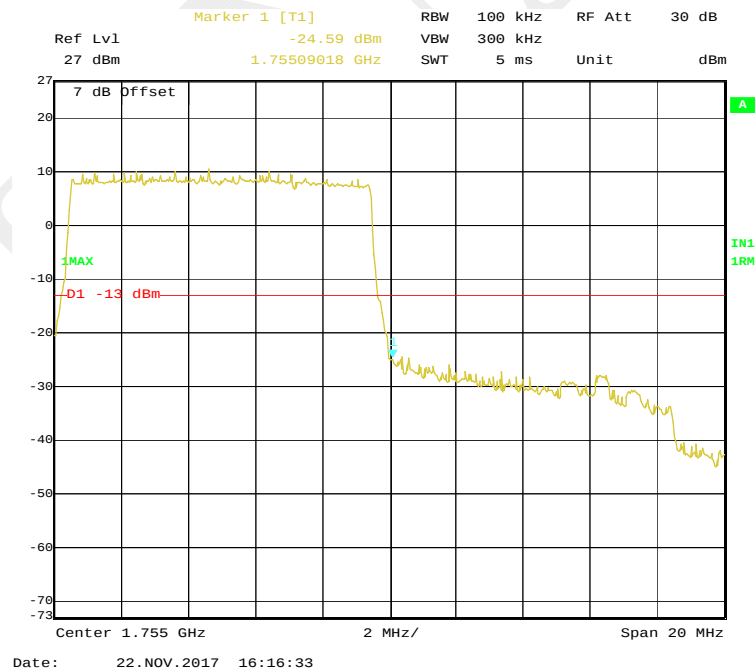


QPSK (15.0 MHz, FULL RB) - Left Band Edge

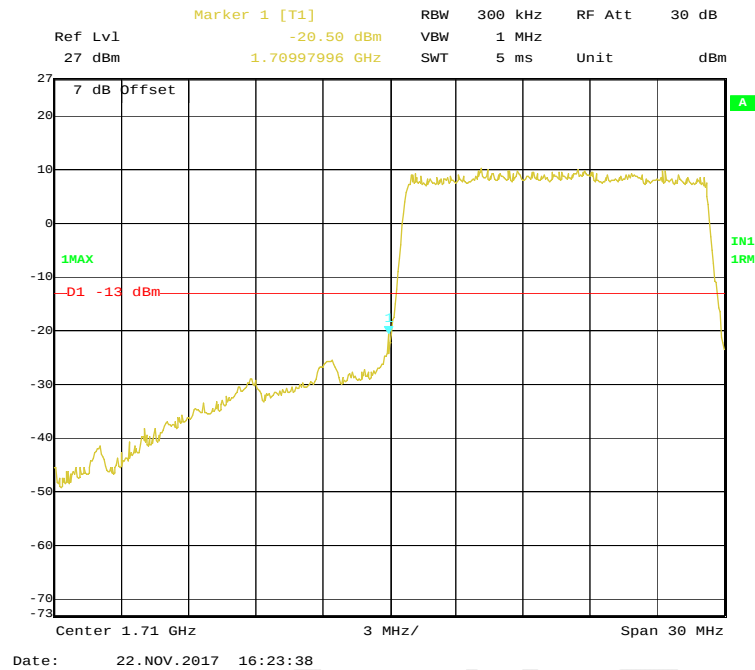


QPSK (15.0 MHz, FULL RB) - Right Band Edge

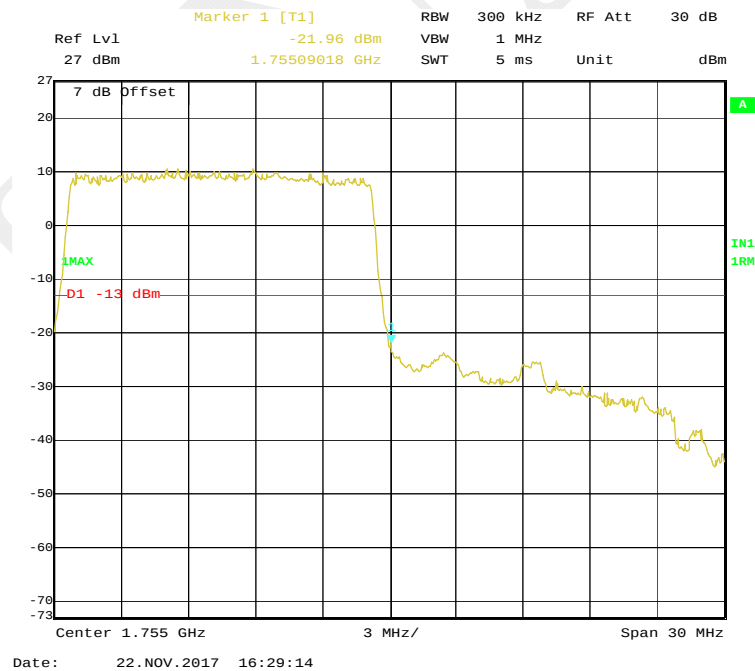


QPSK (20.0 MHz, FULL RB) - Left Band Edge

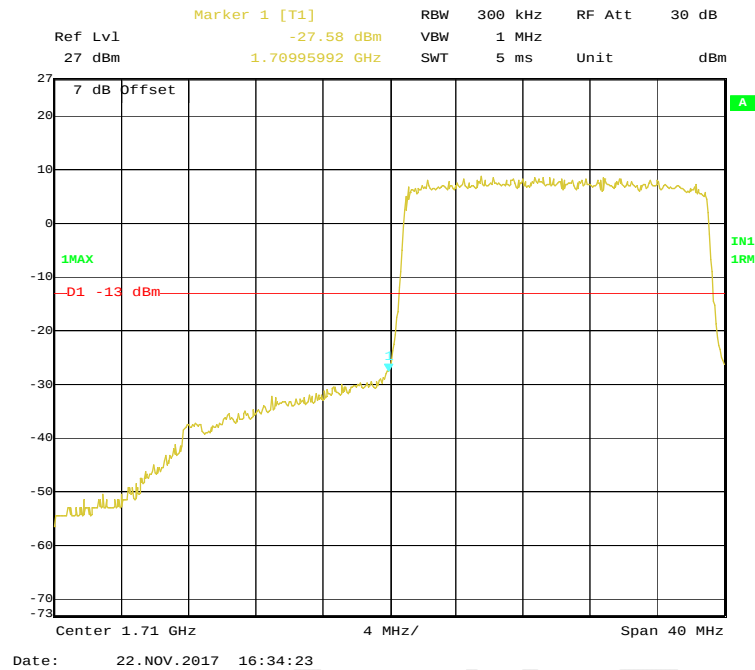


QPSK (20.0 MHz, FULL RB) - Right Band Edge

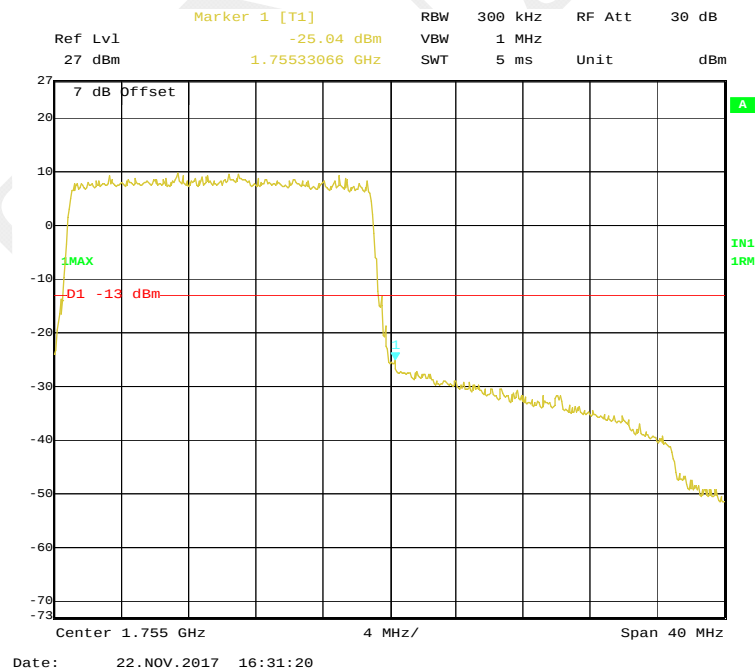


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

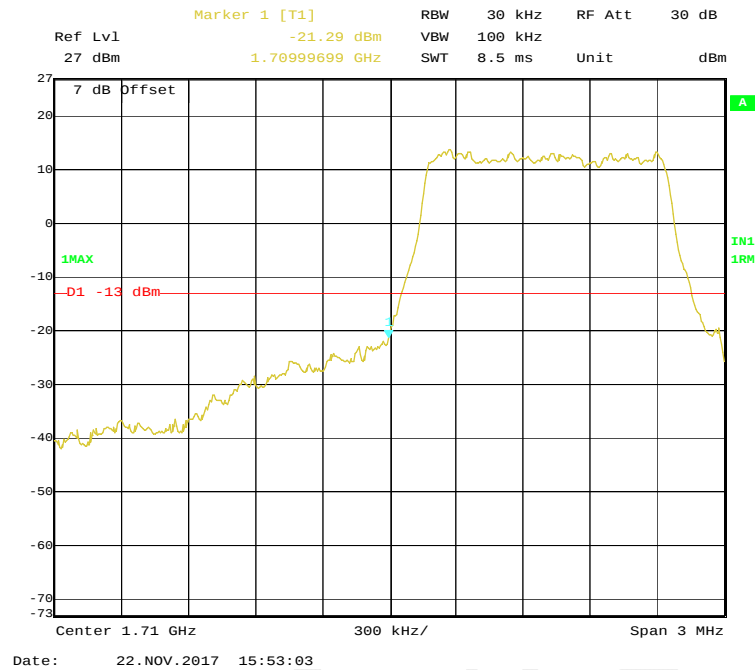


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

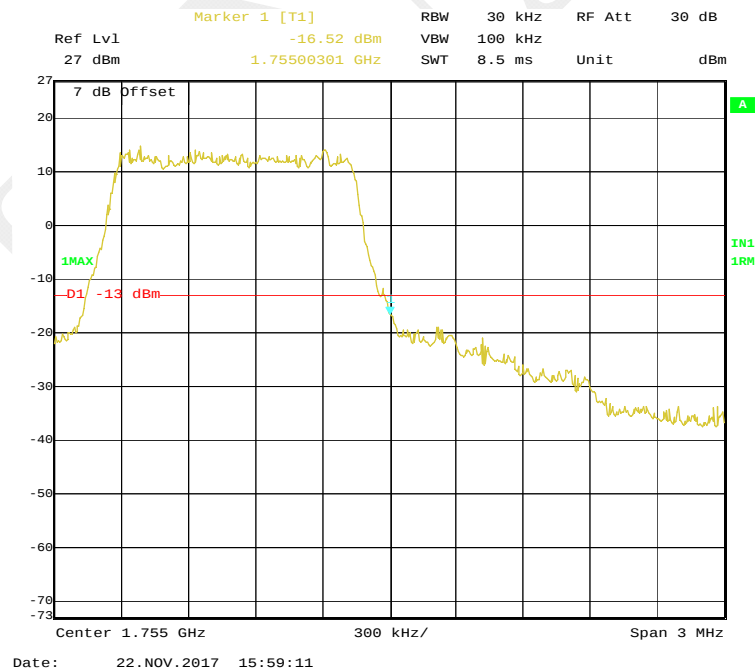


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

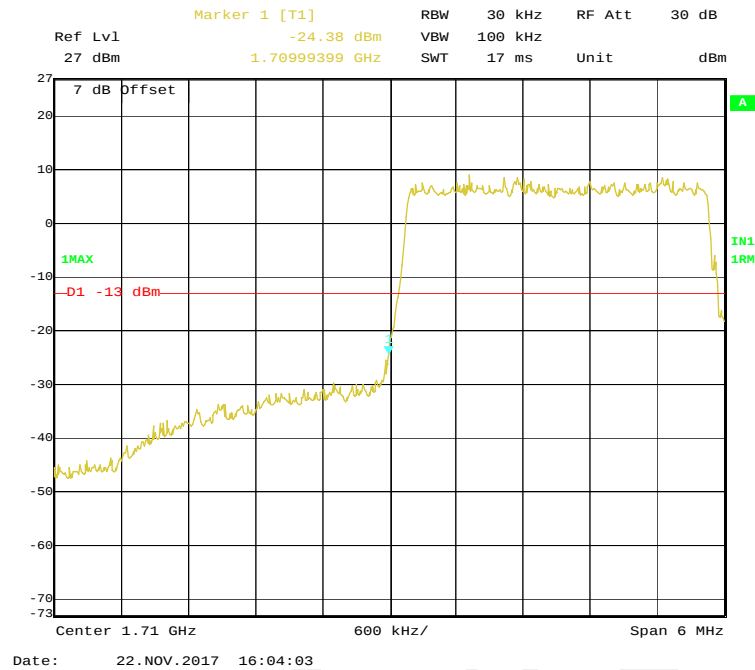


16-QAM (3.0 MHz, FULL RB) - Right Band Edge

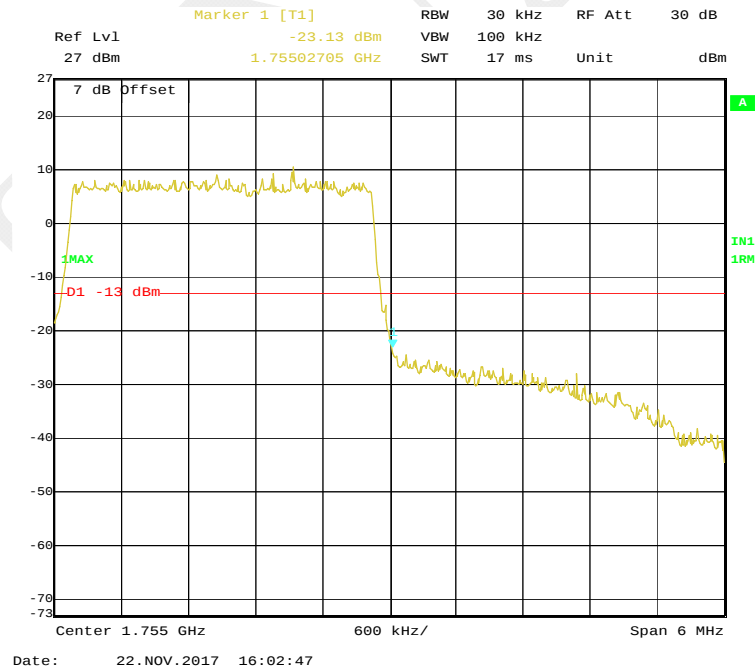


16-QAM (5.0 MHz, FULL RB) - Left Band Edge

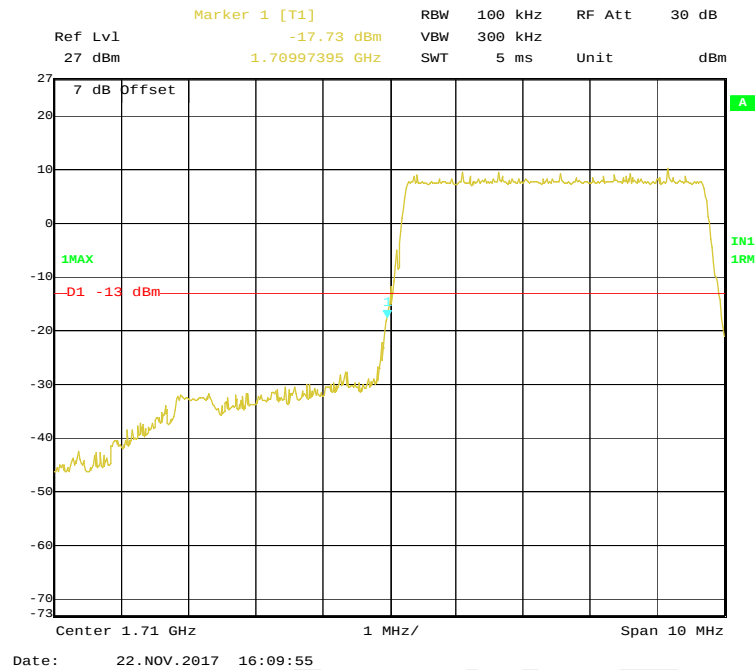


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

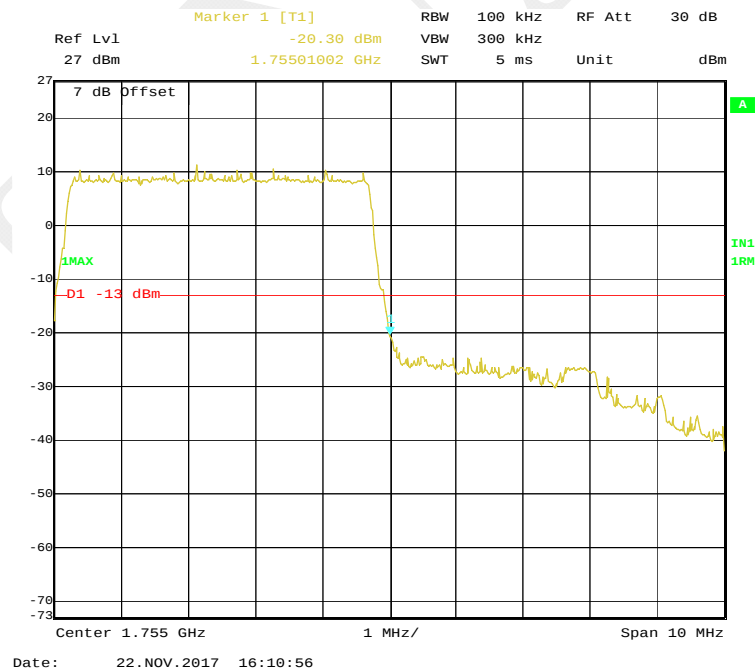


16-QAM (10.0 MHz, FULL RB) - Left Band Edge

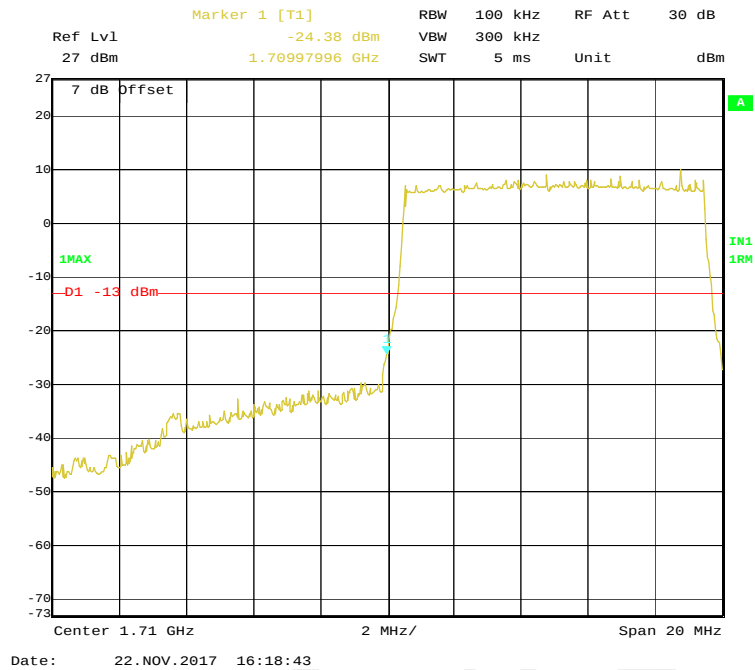


16-QAM (10.0 MHz, FULL RB) - Right Band Edge

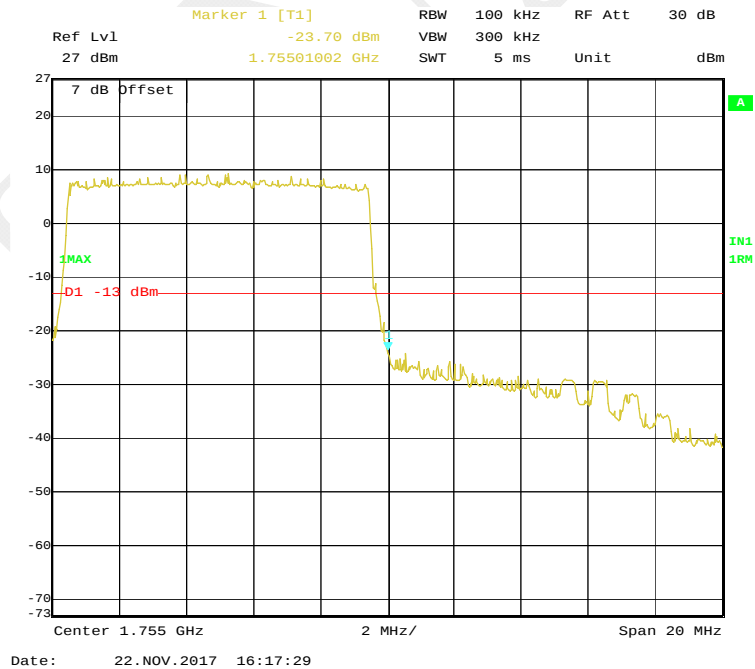


16-QAM (15.0 MHz, FULL RB) - Left Band Edge

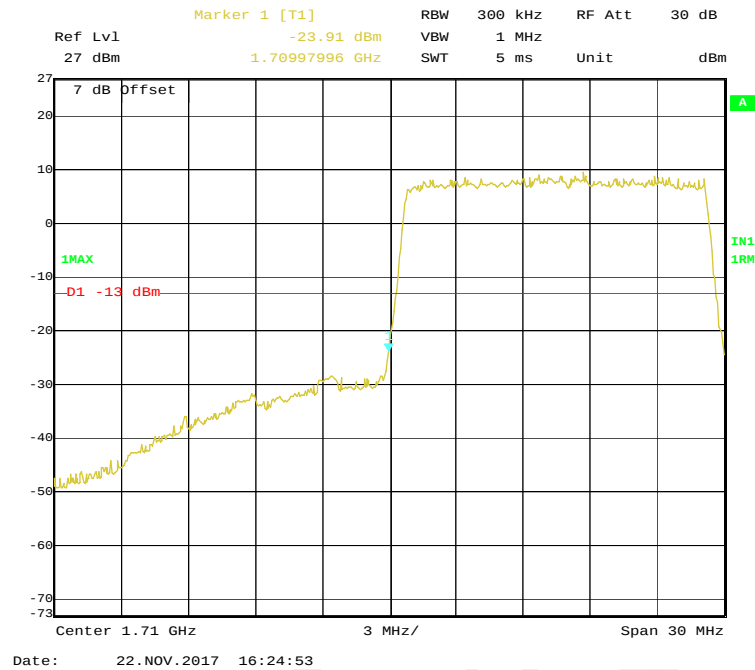


16-QAM (15.0 MHz, FULL RB) - Right Band Edge


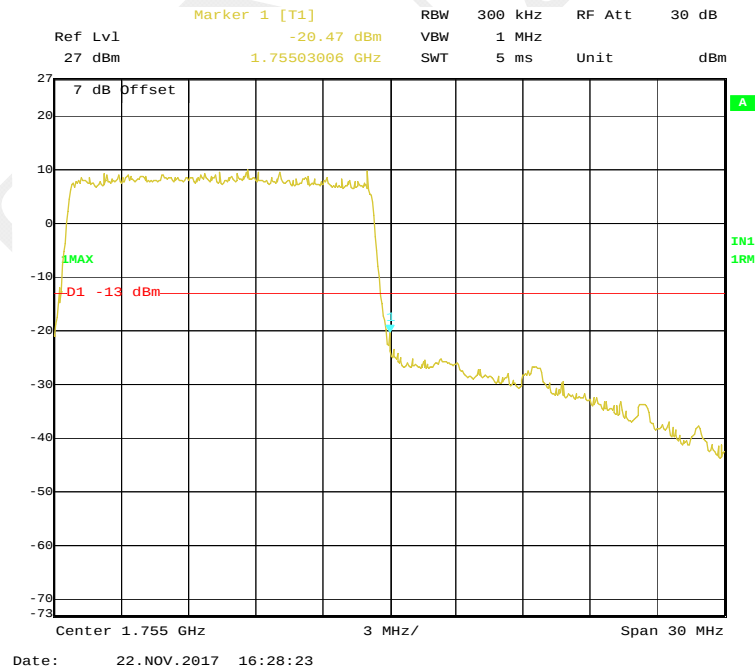


16-QAM (20.0 MHz, FULL RB) - Left Band Edge

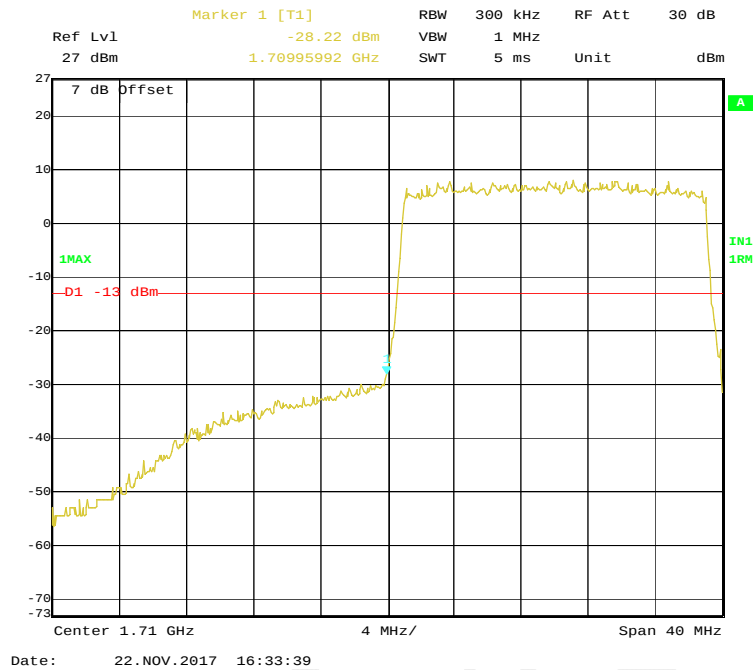


16-QAM (20.0 MHz, FULL RB) - Right Band Edge

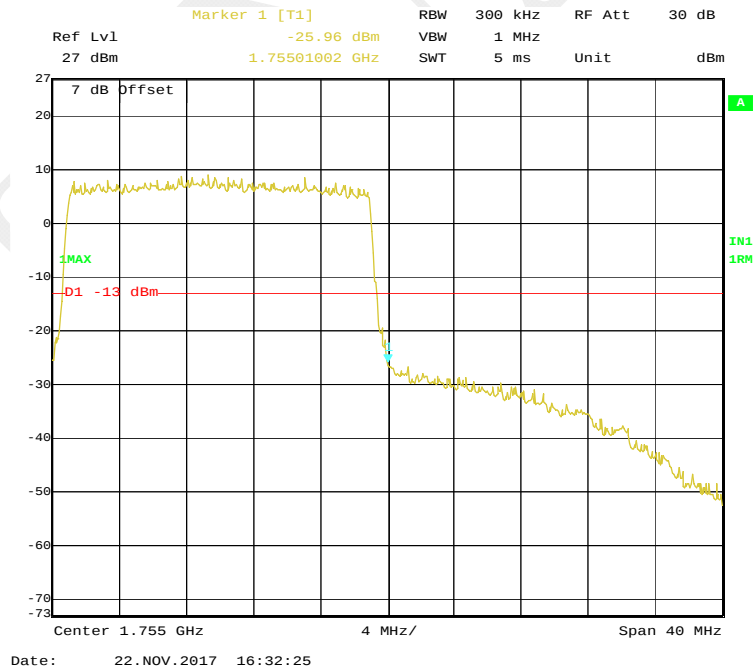


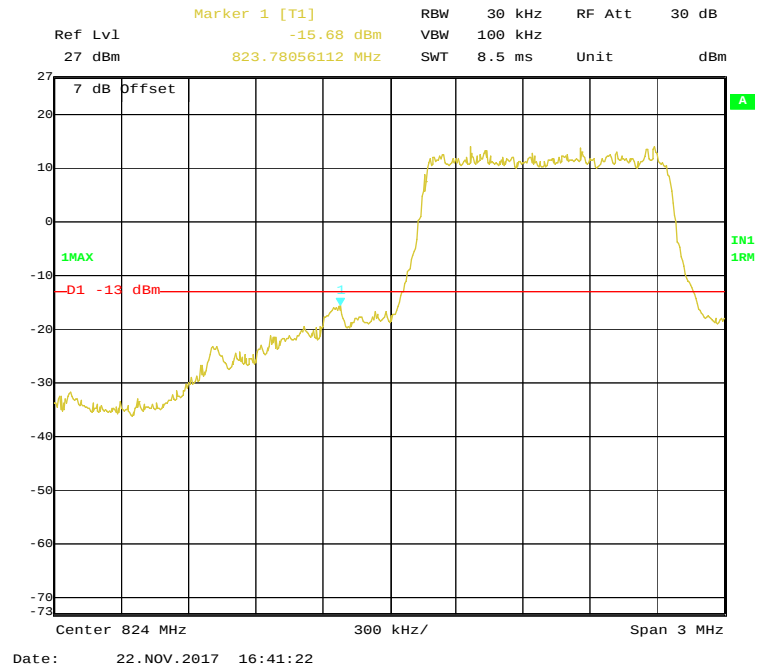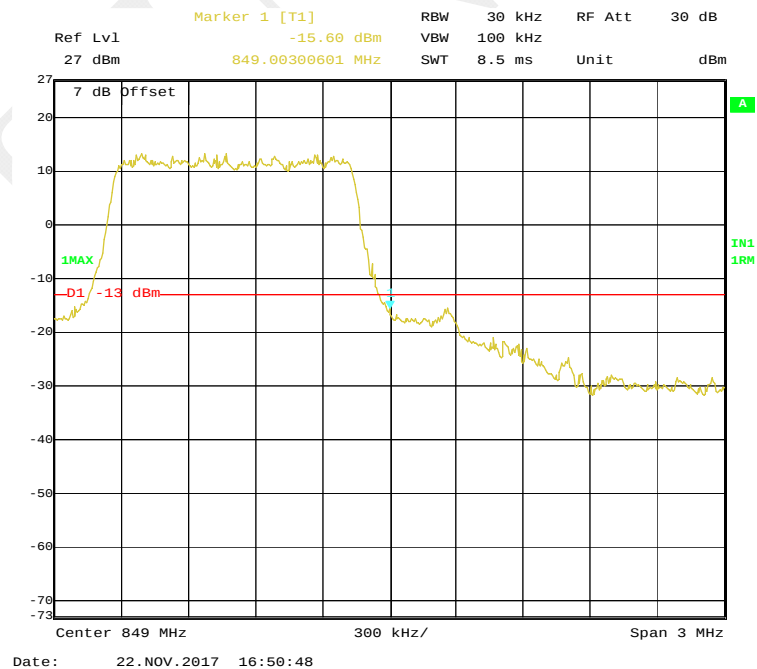LTE Band 5:**QPSK (1.4 MHz, FULL RB) - Left Band Edge****QPSK (1.4 MHz, FULL RB) - Right Band Edge**


QPSK (3.0 MHz, FULL RB) - Left Band Edge

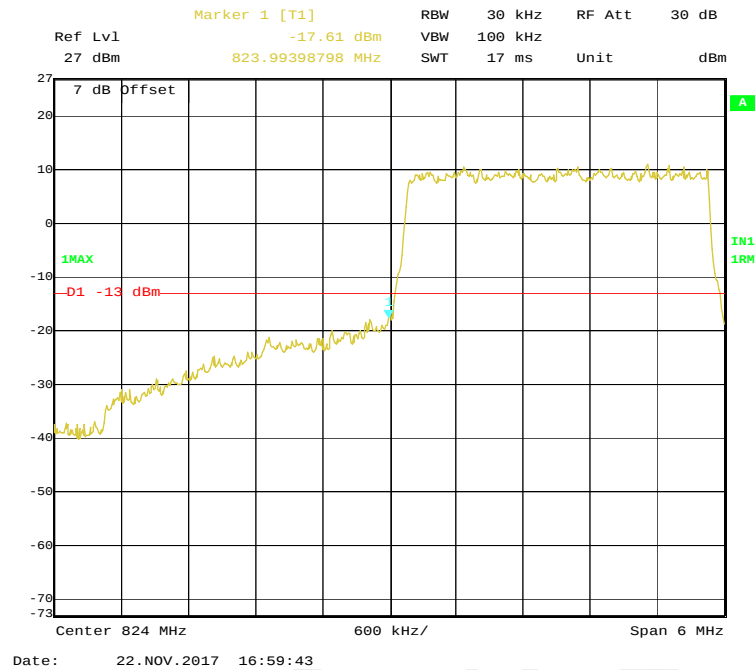


QPSK (3.0 MHz, FULL RB) - Right Band Edge

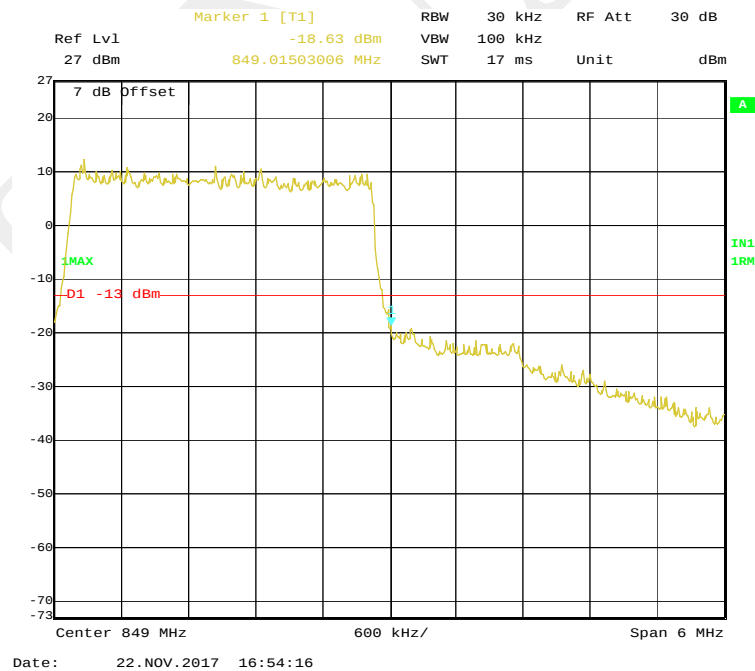


QPSK (5.0 MHz, FULL RB) - Left Band Edge

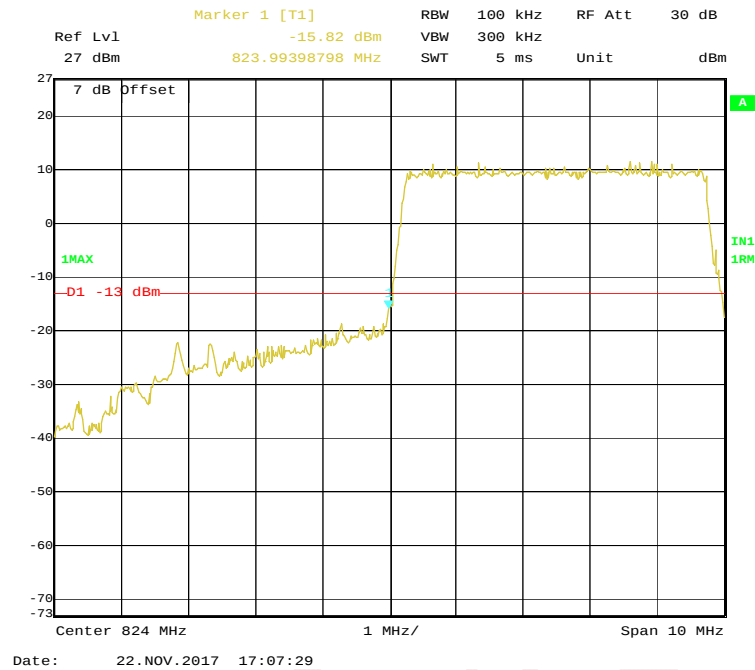


QPSK (5.0 MHz, FULL RB) - Right Band Edge

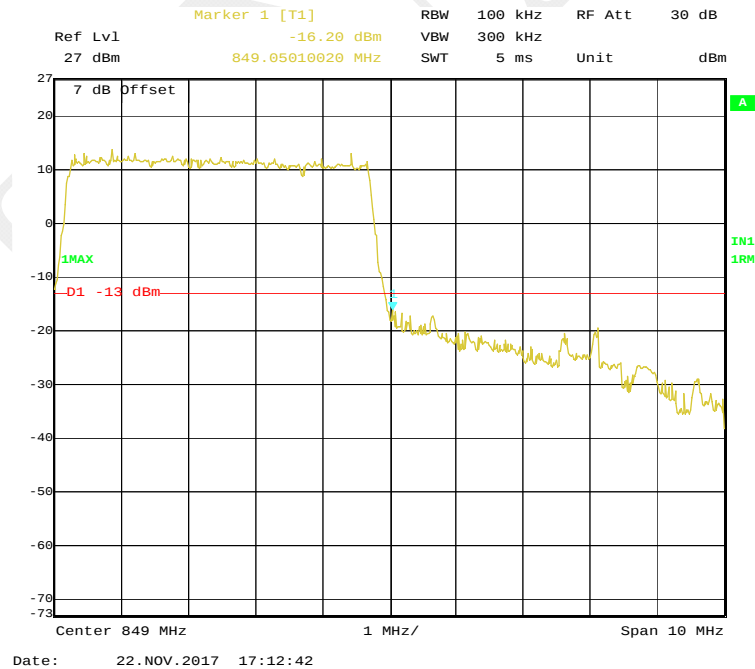


QPSK (10.0 MHz, FULL RB) - Left Band Edge

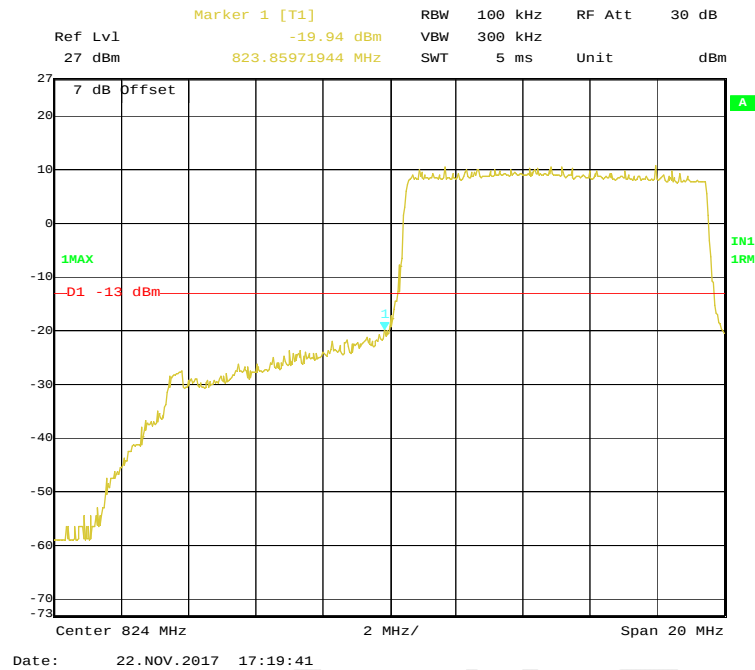


QPSK (10.0 MHz, FULL RB) - Right Band Edge

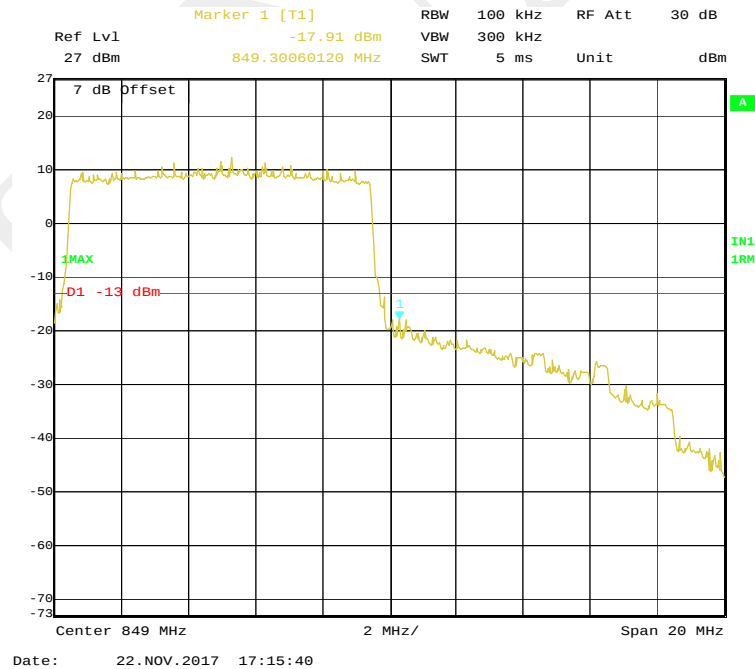


16-QAM (1.4 MHz, FULL RB) - Left Band Edge

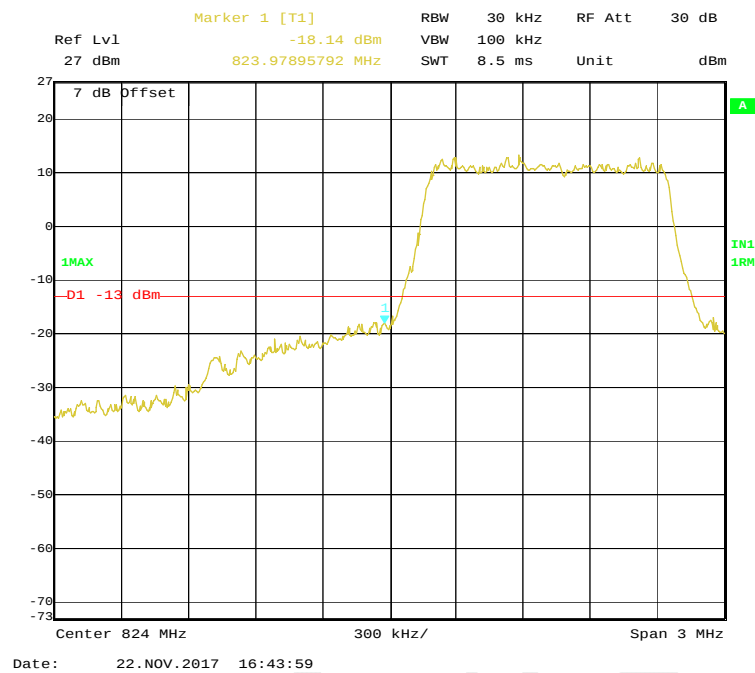


16-QAM (1.4 MHz, FULL RB) - Right Band Edge

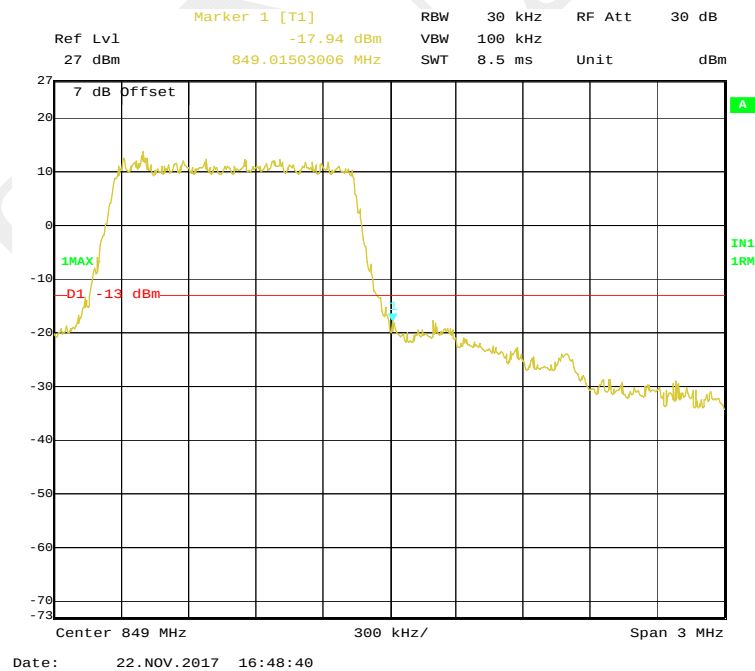


16-QAM (3.0 MHz, FULL RB) - Left Band Edge

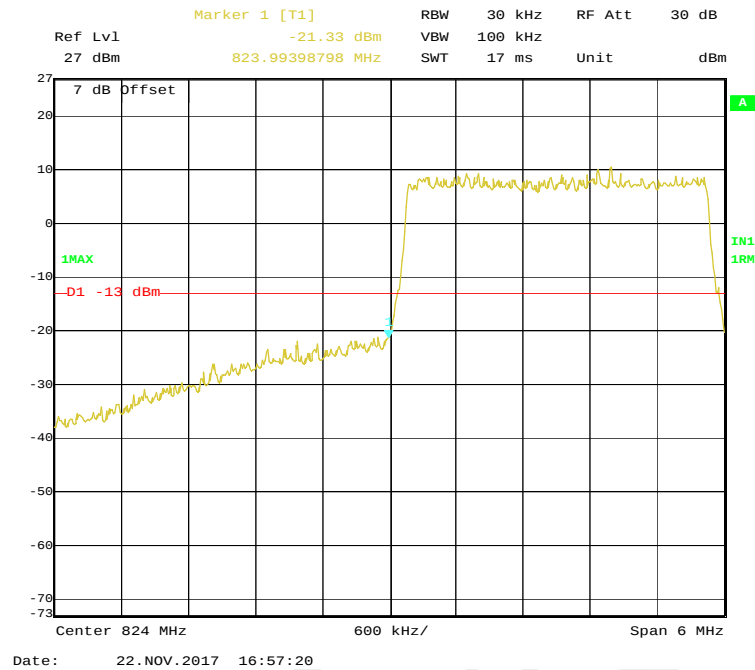


16-QAM (3.0 MHz, FULL RB) - Right Band Edge


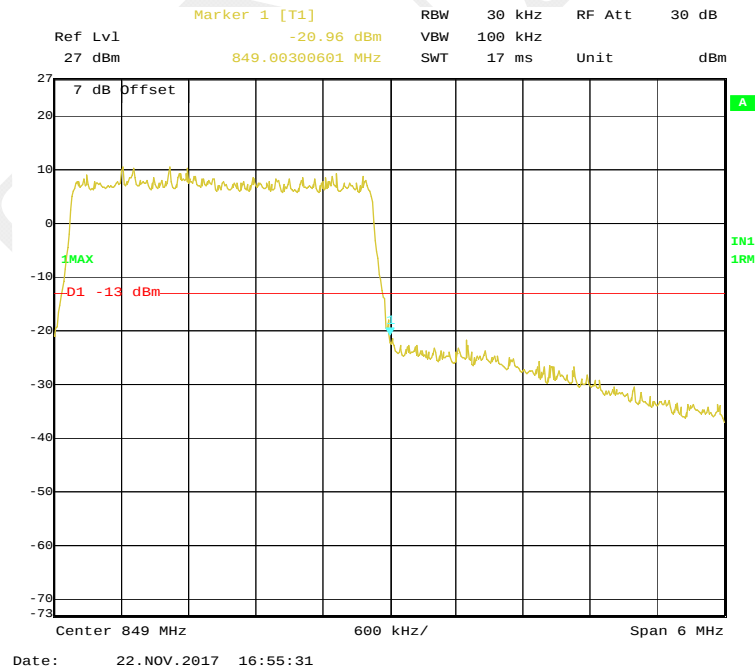




16-QAM (5.0 MHz, FULL RB) - Left Band Edge

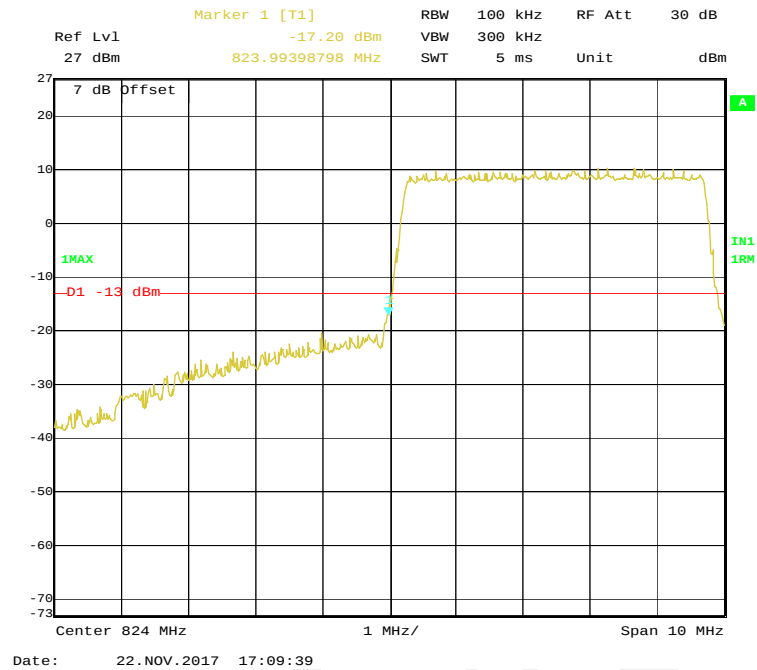


16-QAM (5.0 MHz, FULL RB) - Right Band Edge

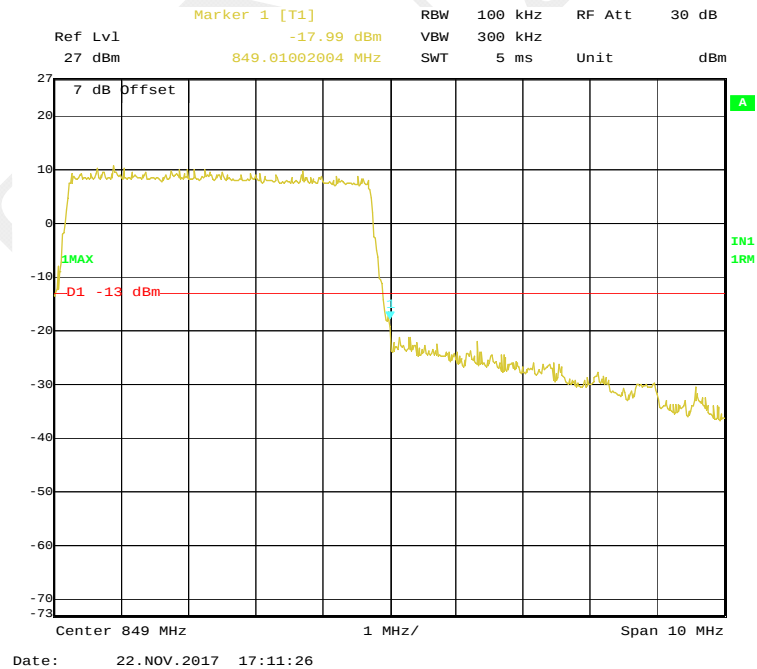

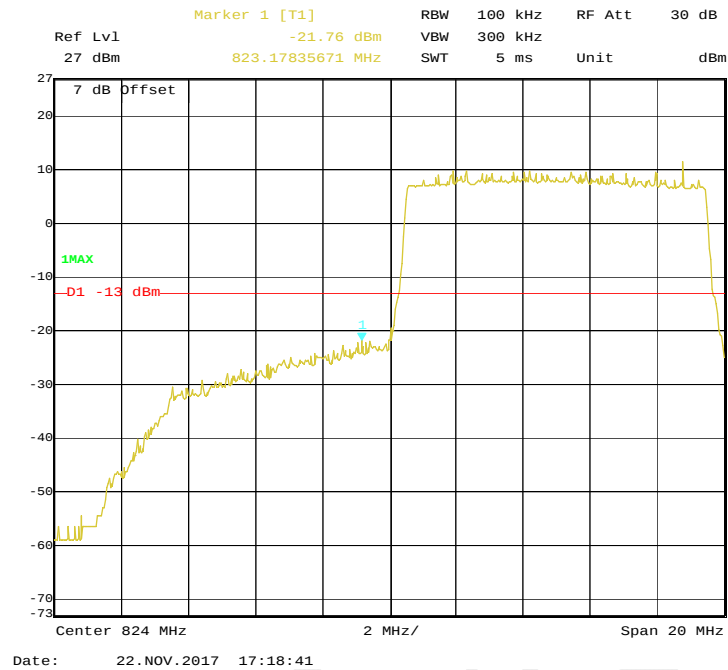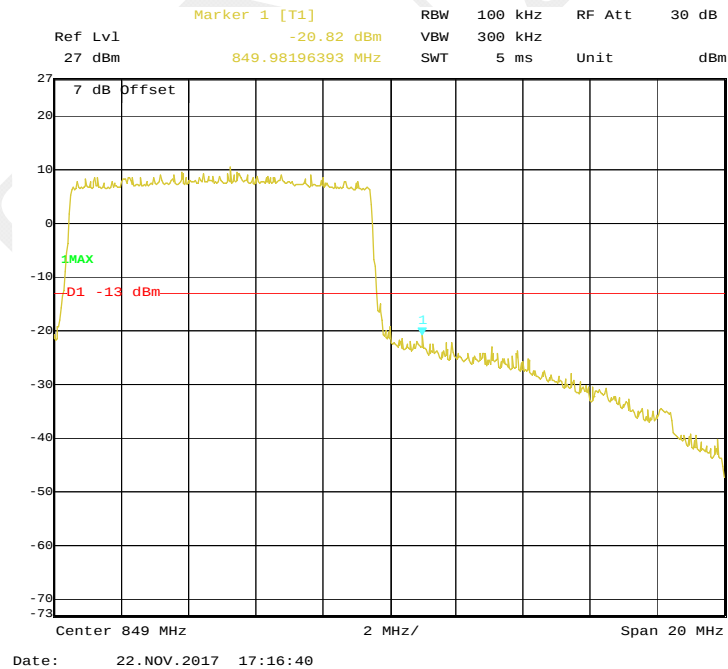
16-QAM (10.0 MHz, FULL RB) - Left Band Edge**16-QAM (10.0 MHz, FULL RB) - Right Band Edge**

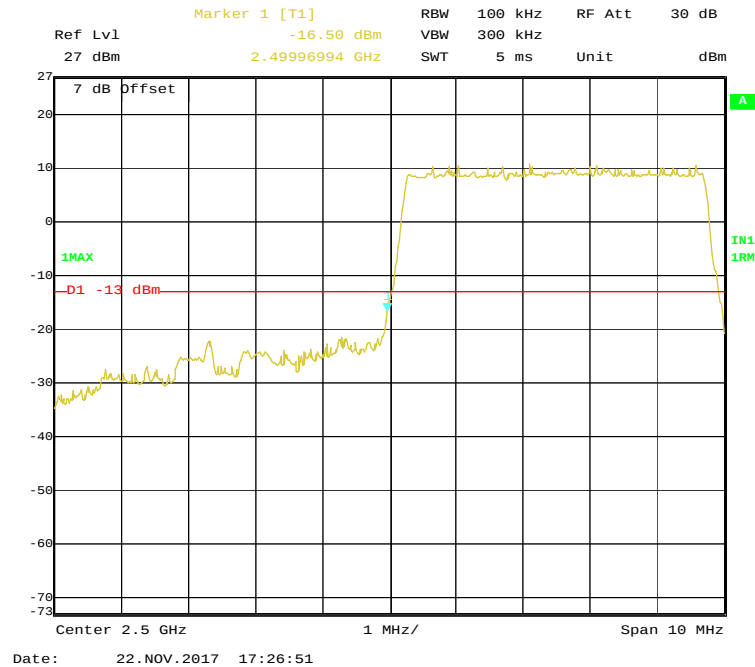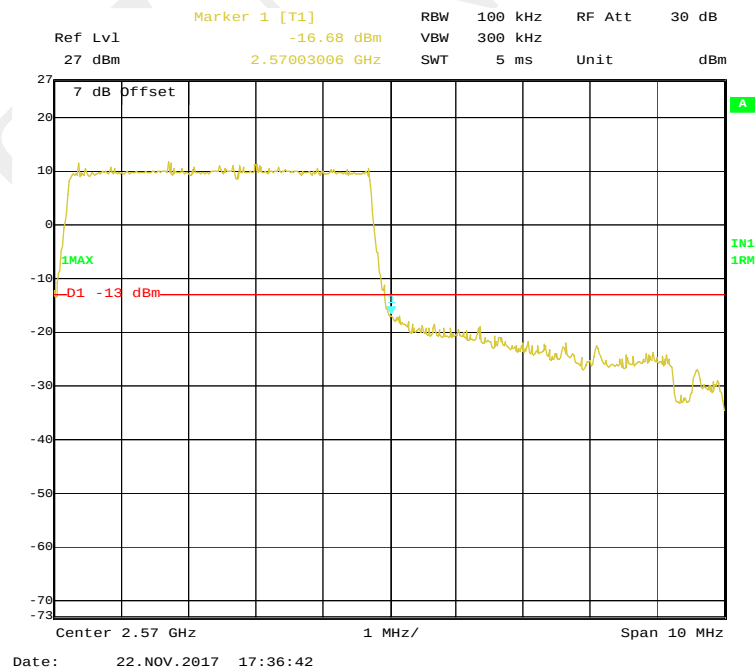LTE Band 7:**QPSK (5 MHz, FULL RB) - Left Band Edge****QPSK (5 MHz, FULL RB) - Right Band Edge**


QPSK (10 MHz, FULL RB) - Left Band Edge

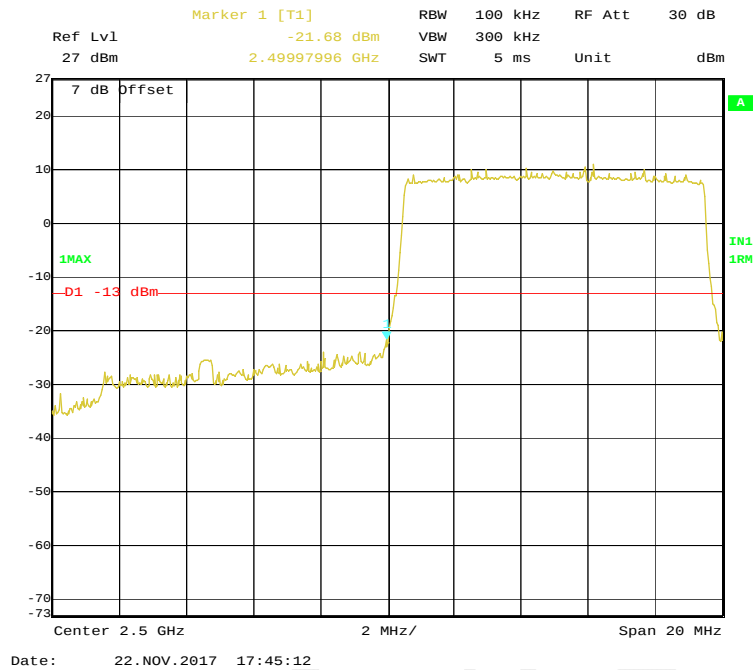


QPSK (10 MHz, FULL RB) - Right Band Edge

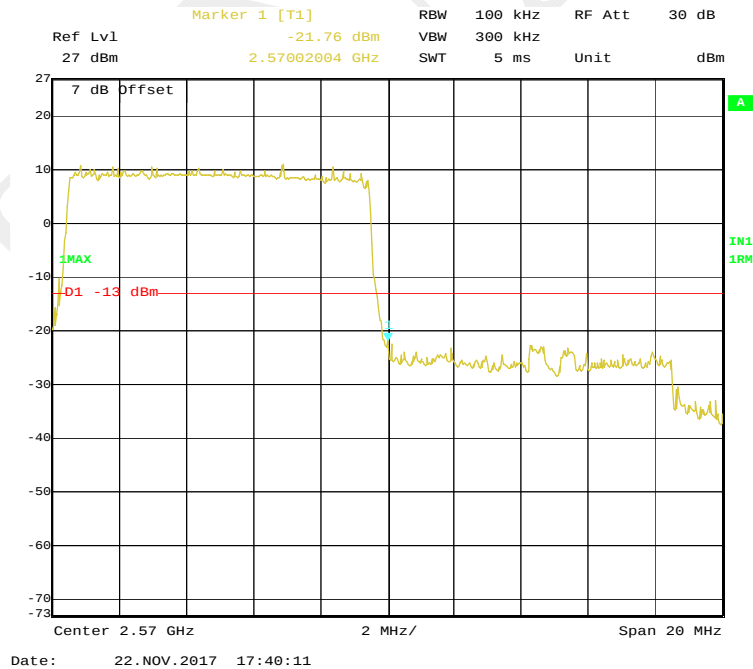


QPSK (15 MHz, FULL RB) - Left Band Edge

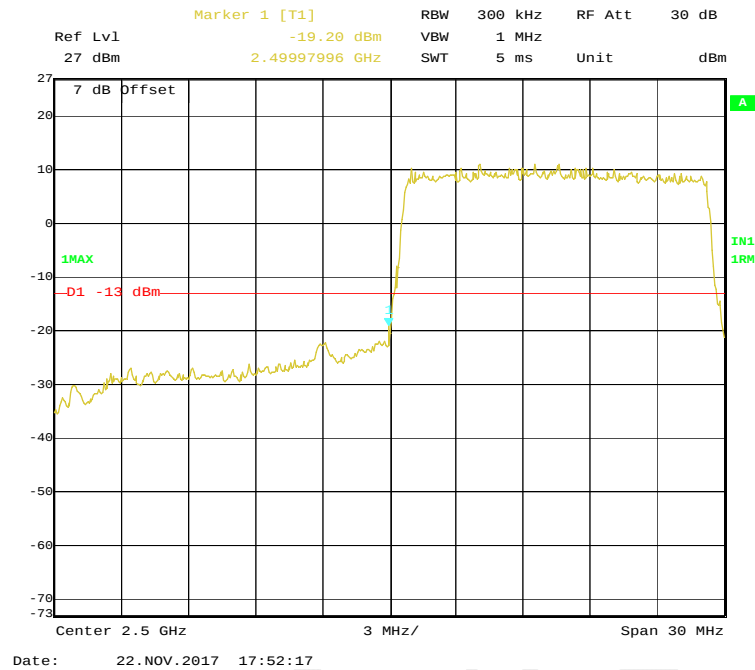


QPSK (15 MHz, FULL RB) - Right Band Edge


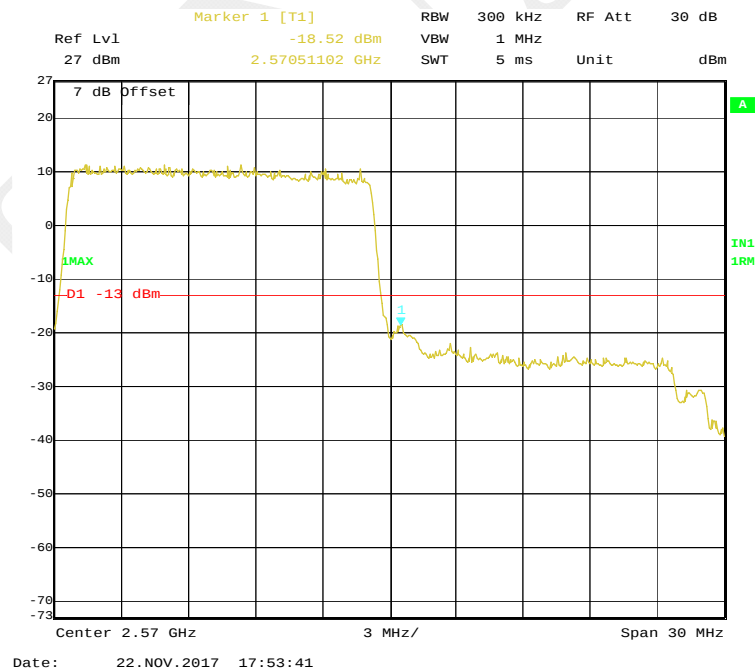


QPSK (20 MHz, FULL RB) - Left Band Edge

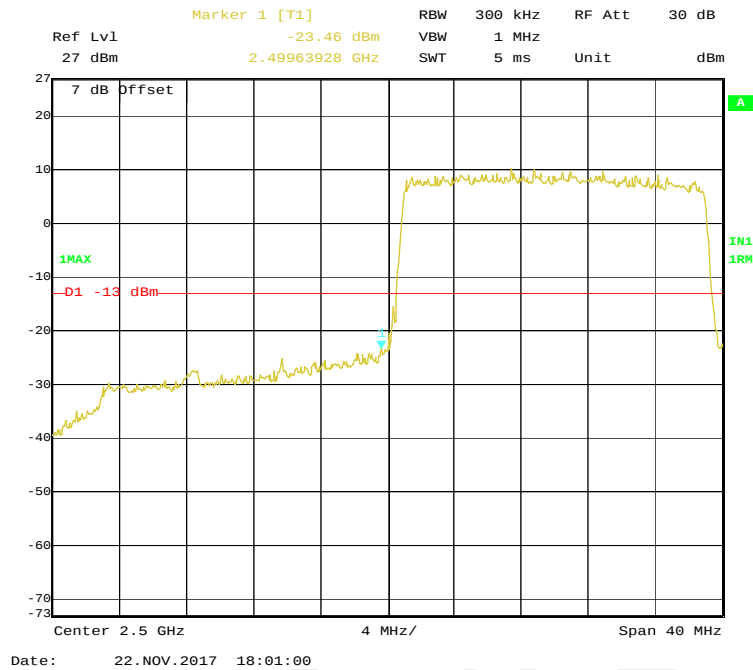


QPSK (20 MHz, FULL RB) - Right Band Edge

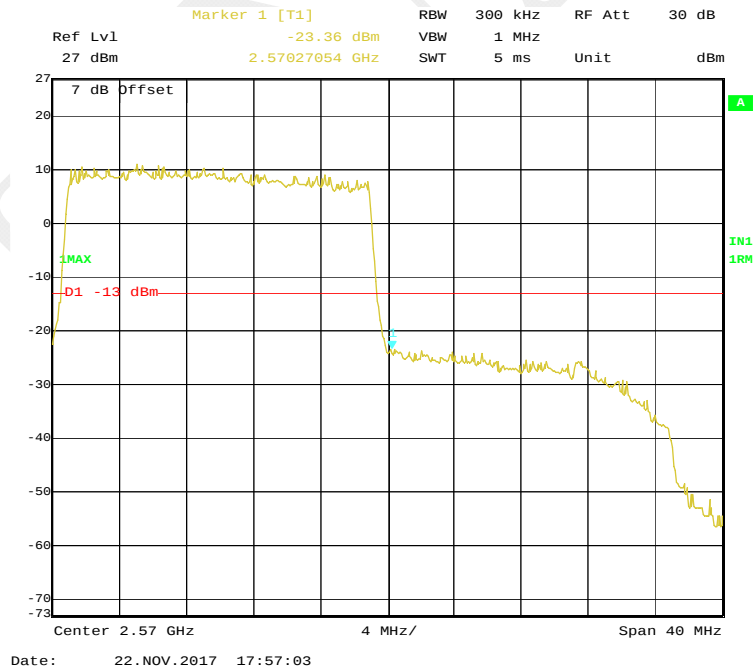


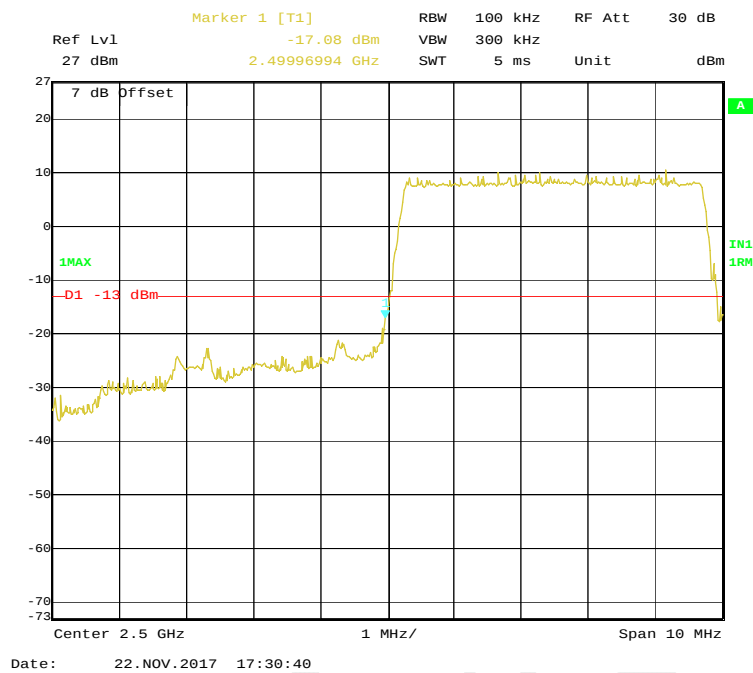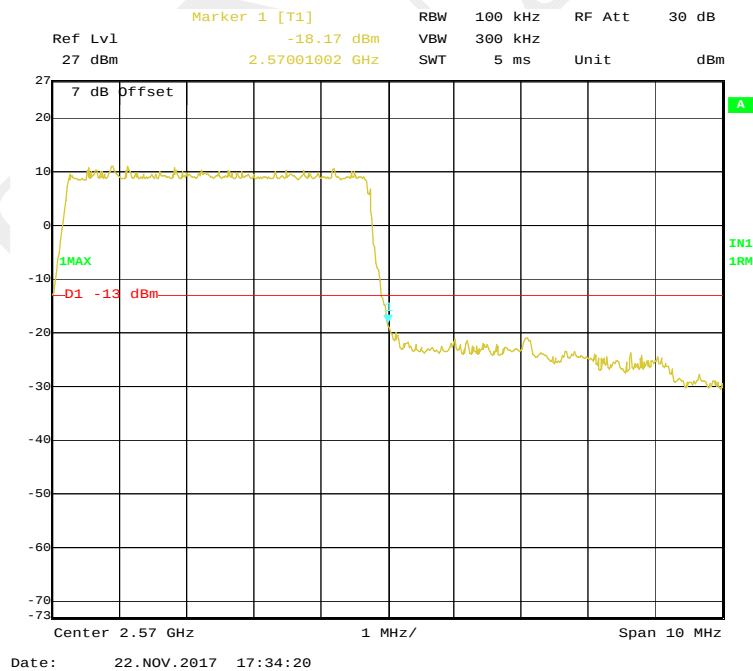16QAM (5 MHz, FULL RB) - Left Band Edge**16QAM (5 MHz, FULL RB) - Right Band Edge**


16QAM (10 MHz, FULL RB) - Left Band Edge

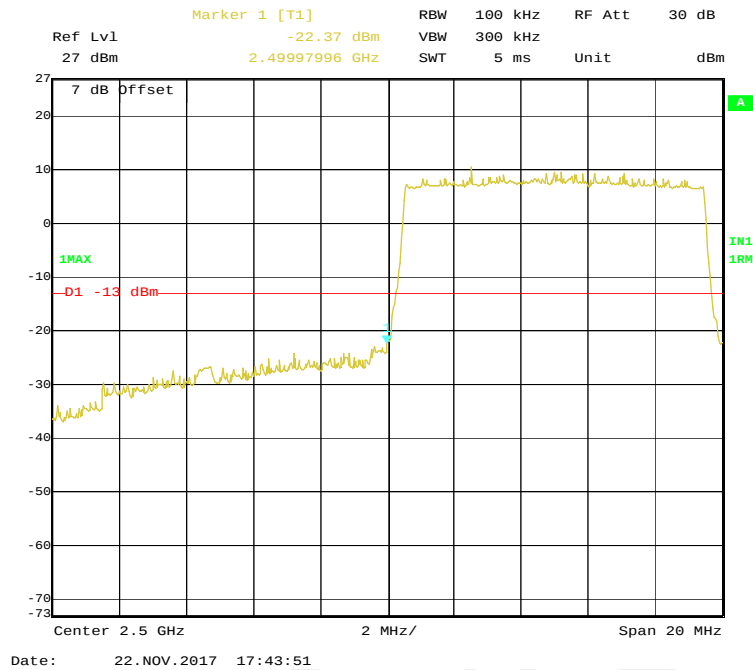


16QAM (10 MHz, FULL RB) - Right Band Edge

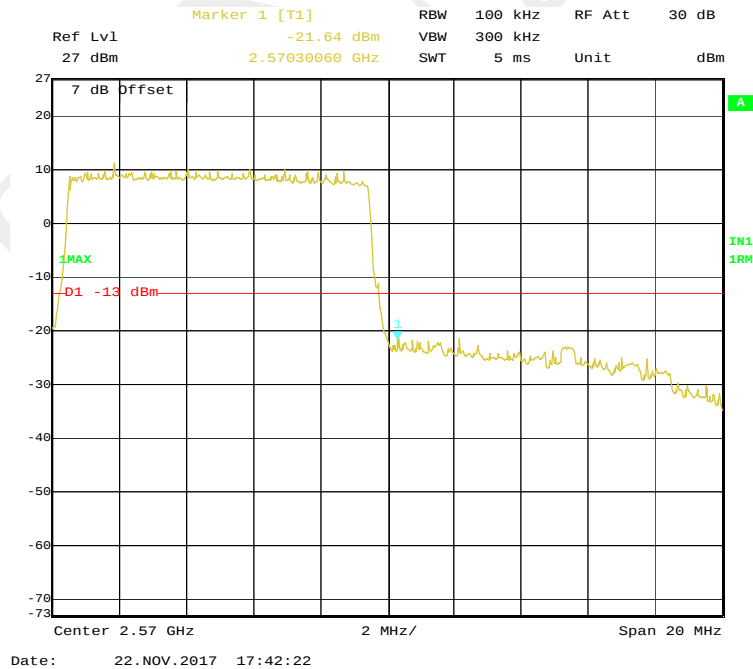


16QAM (15 MHz, FULL RB) - Left Band Edge

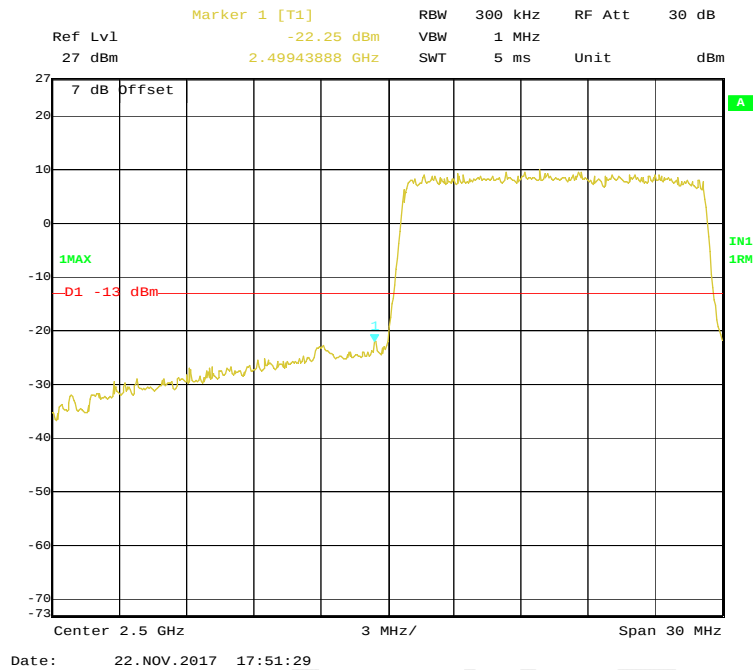


16QAM (15 MHz, FULL RB) - Right Band Edge

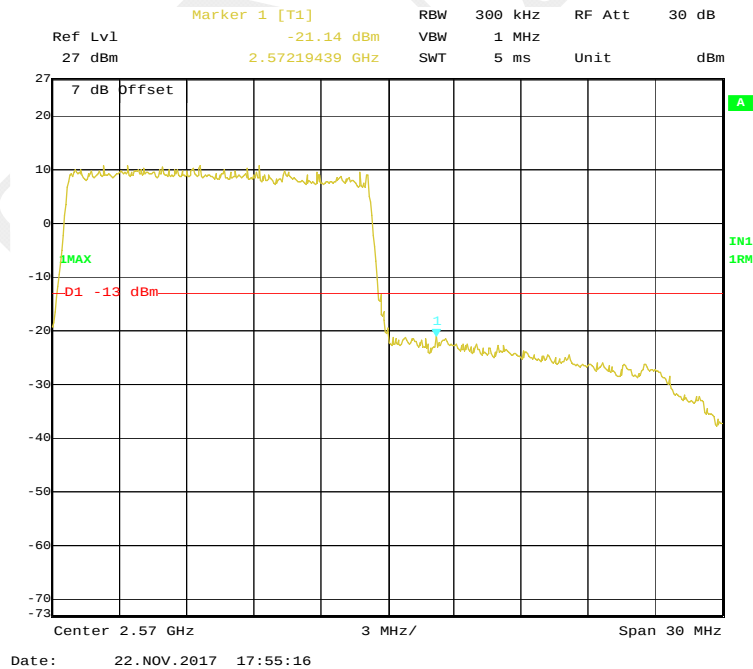

16QAM (20 MHz, FULL RB) - Left Band Edge

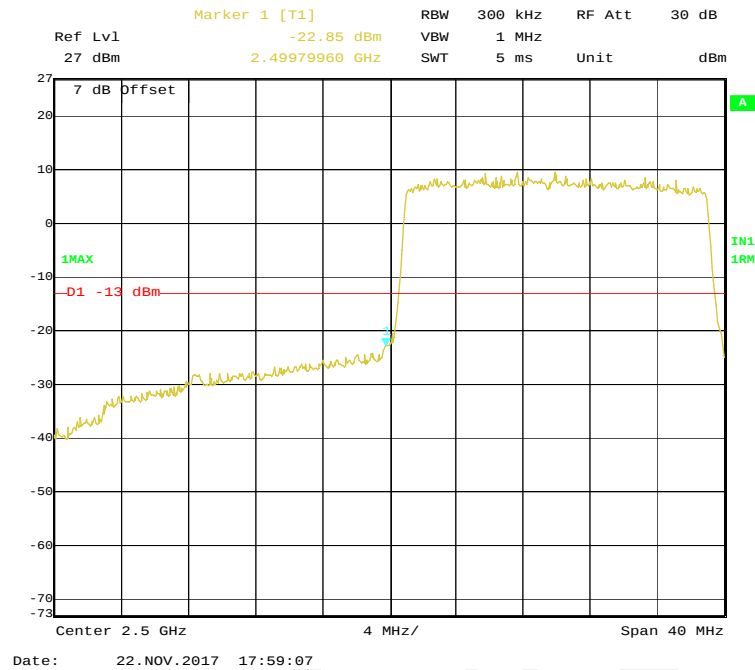

16QAM (20 MHz, FULL RB) - Right Band Edge

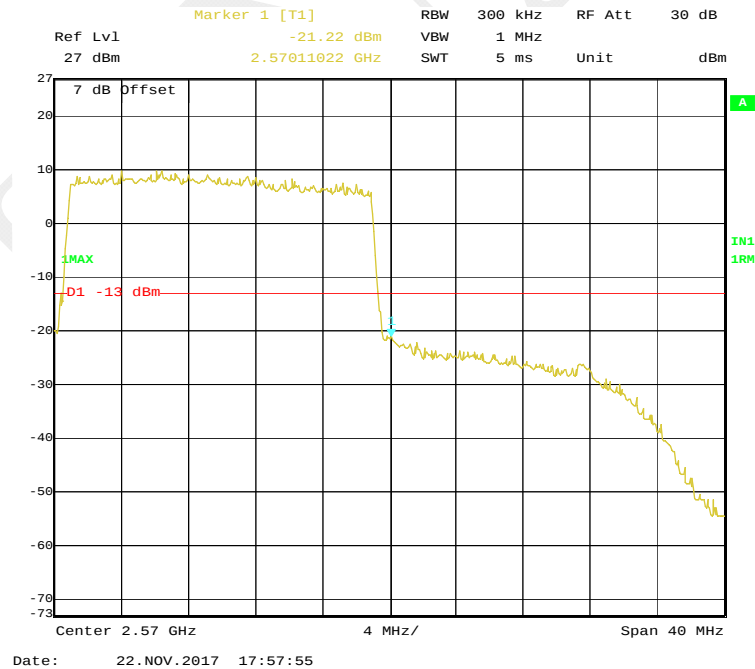

FCC § 2.1055; § 22.355; § 24.235; §27.54; - FREQUENCY STABILITY**Applicable Standards**

FCC § 2.1055, §22.355, §24.235 and §27.54.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

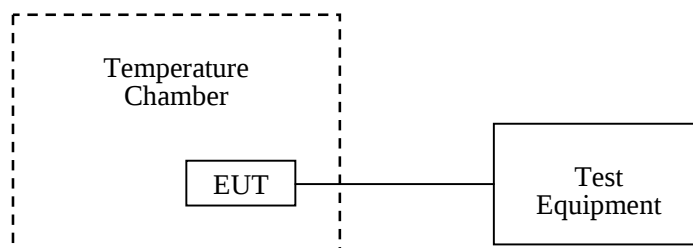

Test Data**Environmental Conditions**

Temperature:	23.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2kPa

The testing was performed by Max Min on 2017-11-22.

EUT operation mode: Transmitting

Test Result: Compliance.

GSM 850 Band:

GSM Mode, Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	9	0.0108	2.5
-20		8	0.0096	2.5
-10		7	0.0084	2.5
0		5	0.0060	2.5
10		6	0.0072	2.5
20		8	0.0096	2.5
30		7	0.0084	2.5
40		10	0.0120	2.5
50		9	0.0108	2.5
25	V min.= 3.3	9	0.0108	2.5
25	V max.= 4.2	11	0.0131	2.5

GPRS Mode, Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	10	0.0120	2.5
-20		8	0.0096	2.5
-10		7	0.0084	2.5
0		6	0.0072	2.5
10		5	0.0060	2.5
20		8	0.0096	2.5
30		7	0.0084	2.5
40		9	0.0108	2.5
50		10	0.0120	2.5
25	V min.= 3.3	9	0.0108	2.5
25	V max.= 4.2	11	0.0131	2.5

EGPRS Mode, Middle Channel, $f_0=836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	14	0.0167	2.5
-20		13	0.0155	2.5
-10		10	0.0120	2.5
0		9	0.0108	2.5
10		11	0.0131	2.5
20		12	0.0143	2.5
30		13	0.0155	2.5
40		12	0.0143	2.5
50		15	0.0179	2.5
25	V min.= 3.3	12	0.0143	2.5
25	V max.= 4.2	13	0.0155	2.5

WCDMA Band V:

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	-8	-0.0096	2.5
-20		-9	-0.0108	2.5
-10		-12	-0.0143	2.5
0		-7	-0.0084	2.5
10		-8	-0.0096	2.5
20		-8	-0.0096	2.5
30		-6	-0.0072	2.5
40		-6	-0.0072	2.5
50		-7	-0.0084	2.5
25	V min.= 3.3	-9	-0.0108	2.5
25	V max.= 4.2	-10	-0.0120	2.5

PCS 1900 Band:

GSM Mode, Middle Channel, $f_0 = 1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-6	-0.0032	pass
-20		-7	-0.0037	pass
-10		-10	-0.0053	pass
0		-9	-0.0048	pass
10		-8	-0.0043	pass
20		-7	-0.0037	pass
30		-7	-0.0037	pass
40		-10	-0.0053	pass
50		-12	-0.0064	pass
25	V min.= 3.3	-8	-0.0043	pass
25	V max.= 4.2	-10	-0.0053	pass

GRPS Mode, Middle Channel, $f_o=1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-5	-0.0027	pass
-20		-7	-0.0037	pass
-10		-9	-0.0048	pass
0		-8	-0.0043	pass
10		-8	-0.0043	pass
20		-7	-0.0037	pass
30		-6	-0.0032	pass
40		-7	-0.0037	pass
50		-11	-0.0059	pass
25	V min.= 3.3	-7	-0.0037	pass
25	V max.= 4.2	-10	-0.0053	pass

EGPRS Mode, Middle Channel, $f_o=1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	-12	-0.0064	pass
-20		-9	-0.0048	pass
-10		-4	-0.0021	pass
0		-8	-0.0043	pass
10		-4	-0.0021	pass
20		-6	-0.0032	pass
30		-7	-0.0037	pass
40		-4	-0.0021	pass
50		-9	-0.0048	pass
25	V min.= 3.3	-8	-0.0043	pass
25	V max.= 4.2	-10	-0.0053	pass

WCDMA Band II:

WCDMA Mode, Middle Channel, $f_0=1880.0$ MHz				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	9	0.0048	pass
-20		8	0.0043	pass
-10		6	0.0032	pass
0		7	0.0037	pass
10		6	0.0032	pass
20		6	0.0032	pass
30		5	0.0027	pass
40		7	0.0037	pass
50		11	0.0059	pass
25	V min.= 3.3	7	0.0037	pass
25	V max.= 4.2	9	0.0048	pass

LTE Band 2:

20.0 MHz Middle Channel, $f_0=1880.0$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V_{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	6	0.0032	pass
-20		10	0.0053	pass
-10		8	0.0043	pass
0		6	0.0032	pass
10		5	0.0027	pass
20		8	0.0043	pass
30		7	0.0037	pass
40		9	0.0048	pass
50		10	0.0053	pass
25	V min.= 3.3	6	0.0032	pass
25	V max.= 4.2	9	0.0048	pass

20.0 MHz Middle Channel, $f_0=1880.0$ MHz (16QAM)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	7	0.0037	pass
-20		9	0.0048	pass
-10		8	0.0043	pass
0		6	0.0032	pass
10		6	0.0032	pass
20		9	0.0048	pass
30		7	0.0037	pass
40		10	0.0053	pass
50		11	0.0059	pass
25	V min.= 3.3	7	0.0037	pass
25	V max.= 4.2	10	0.0053	pass

LTE Band 4:

20.0 MHz Middle Channel, $f_0=1732.5$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	9	0.0052	pass
-20		7	0.0040	pass
-10		6	0.0035	pass
0		5	0.0029	pass
10		4	0.0023	pass
20		5	0.0029	pass
30		6	0.0035	pass
40		9	0.0052	pass
50		10	0.0058	pass
25	V min.= 3.3	8	0.0046	pass
25	V max.= 4.2	11	0.0063	pass

20.0 MHz Middle Channel, $f_0=1732.5$ MHz (16QAM)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	10	0.0058	pass
-20		8	0.0046	pass
-10		6	0.0035	pass
0		6	0.0035	pass
10		5	0.0029	pass
20		7	0.0040	pass
30		8	0.0046	pass
40		9	0.0052	pass
50		11	0.0063	pass
25	V min.= 3.3	9	0.0052	pass
25	V max.= 4.2	10	0.0058	pass

LTE Band 5:

10.0 MHz Middle Channel, $f_0=836.5$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	12	0.0143	2.5
-20		11	0.0132	2.5
-10		10	0.0120	2.5
0		11	0.0132	2.5
10		8	0.0096	2.5
20		6	0.0072	2.5
30		9	0.0108	2.5
40		10	0.0120	2.5
50		8	0.0096	2.5
25	V min.= 3.3	9	0.0108	2.5
25	V max.= 4.2	12	0.0143	2.5

10.0 MHz Middle Channel, $f_0 = 836.5$ MHz (16QAM)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-30	3.7	13	0.0155	2.5
-20		12	0.0143	2.5
-10		11	0.0132	2.5
0		11	0.0132	2.5
10		9	0.0108	2.5
20		6	0.0072	2.5
30		8	0.0096	2.5
40		10	0.0120	2.5
50		9	0.0108	2.5
25	V min.= 3.3	9	0.0108	2.5
25	V max.= 4.2	11	0.0132	2.5

LTE Band 7:

10.0 MHz Middle Channel, $f_0 = 2535$ MHz (QPSK)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	6	0.0024	pass
-20		9	0.0036	pass
-10		7	0.0028	pass
0		6	0.0024	pass
10		5	0.0020	pass
20		7	0.0028	pass
30		6	0.0024	pass
40		9	0.0036	pass
50		8	0.0032	pass
25	V min.= 3.3	7	0.0028	pass
25	V max.= 4.2	9	0.0036	pass

10.0 MHz Middle Channel, $f_o = 2535$ MHz (16QAM)				
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Result
-30	3.7	7	0.0028	pass
-20		10	0.0039	pass
-10		8	0.0032	pass
0		6	0.0024	pass
10		6	0.0024	pass
20		7	0.0028	pass
30		8	0.0032	pass
40		6	0.0024	pass
50		7	0.0028	pass
25	V min.= 3.3	8	0.0032	pass
25	V max.= 4.2	9	0.0036	pass

***** END OF REPORT *****