




**FCC PART 27**  
**FCC PART 22H, PART 24E**  
**TEST REPORT**

For

**Quanzhou Feijie Electron Co., Ltd**

No.6, Zi Hua Road, Jiangnan High-tech Park, Quanzhou, Fujian, China

**FCC ID: 2AN96PO26801**

|                                        |                                                                                                                                                                                                                                                                                                           |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Name:</b><br>Dual-Mode PoC Radio                                                                                                                                                                                                                                                               |
| <b>Report Number:</b>                  | 2507A33259E-RF-02                                                                                                                                                                                                                                                                                         |
| <b>Report Date:</b>                    | 2026-05-12                                                                                                                                                                                                                                                                                                |
| <b>Reviewed By:</b>                    | Ash Lin                                                                                                                                                                                                                |
| <b>Approved By:</b>                    | Miles Chen                                                                                                                                                                                                                                                                                                |
| <b>Prepared By:</b>                    | Bay Area Compliance Laboratories Corp. (Xiamen)<br>Unit 102, No. 902 Meifeng South Road, Binhai West Avenue<br>Science and Technology Innovation Park, Torch High Tech<br>Zone Xiamen, People's Republic of China<br>Tel: +86-592-3200111<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

## **TABLE OF CONTENTS**

|                                                                       |           |
|-----------------------------------------------------------------------|-----------|
| <b>REPORT REVISION HISTORY .....</b>                                  | <b>3</b>  |
| <b>1. GENERAL INFORMATION.....</b>                                    | <b>4</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....          | 4         |
| 1.2 ★OPERATION VOLTAGE (VDC): .....                                   | 4         |
| 1.3 ★ANTENNA INFORMATION.....                                         | 5         |
| 1.4 OBJECTIVE .....                                                   | 5         |
| 1.5 MEASUREMENT UNCERTAINTY .....                                     | 5         |
| 1.6 TEST FACILITY .....                                               | 6         |
| <b>2. SYSTEM TEST CONFIGURATION.....</b>                              | <b>7</b>  |
| 2.1 JUSTIFICATION .....                                               | 7         |
| 2.2 CHANNEL LIST .....                                                | 7         |
| 2.3 EUT OPERATION CONDITION:.....                                     | 8         |
| 2.4 SUPPORT EQUIPMENT LIST AND DETAILS.....                           | 8         |
| 2.5 EXTERNAL I/O CABLE.....                                           | 8         |
| 2.6 BLOCK DIAGRAM OF TEST SETUP .....                                 | 8         |
| <b>3. SUMMARY OF TEST RESULTS .....</b>                               | <b>10</b> |
| <b>4. TEST EQUIPMENT LIST .....</b>                                   | <b>11</b> |
| <b>5. REQUIREMENTS AND TEST PROCEDURES .....</b>                      | <b>12</b> |
| 5.1 APPLICABLE STANDARD FOR PART 22 SUBPART H: .....                  | 12        |
| 5.1.1 RF Output Power .....                                           | 12        |
| 5.1.2 Spurious Emissions .....                                        | 12        |
| 5.1.3 Frequency stability.....                                        | 12        |
| 5.2 APPLICABLE STANDARD FOR PART 24 SUBPART E:.....                   | 13        |
| 5.2.1 RF Output Power .....                                           | 13        |
| 5.2.2 Spurious Emissions .....                                        | 13        |
| 5.2.3 Frequency stability.....                                        | 13        |
| 5.3 APPLICABLE STANDARD FOR PART 27: .....                            | 14        |
| 5.3.1 RF Output Power .....                                           | 14        |
| 5.3.2 Spurious Emissions .....                                        | 15        |
| 5.3.3 Frequency stability.....                                        | 16        |
| 5.4 TEST METHOD:.....                                                 | 17        |
| 5.4.1 Transmitter output power, e.r.p. and e.i.r.p.....               | 17        |
| 5.4.2 Occupied Bandwidth.....                                         | 18        |
| 5.4.3 Transmitter unwanted emissions-at antenna terminals.....        | 19        |
| 5.4.4 Out of band emission .....                                      | 20        |
| 5.4.5 Frequency stability.....                                        | 21        |
| 5.4.6 Transmitter unwanted emissions-Radiated Spurious emissions..... | 22        |
| <b>6. TEST DATA AND RESULT .....</b>                                  | <b>24</b> |
| 6.1 LTE RF CONDUCTED DATA .....                                       | 24        |
| 6.2 RADIATED SPURIOUS EMISSIONS .....                                 | 25        |
| 6.2.1 30MHz~1GHz .....                                                | 25        |
| 6.2.2 Above 1GHz.....                                                 | 28        |
| <b>7. EUT PHOTOGRAPHS .....</b>                                       | <b>33</b> |
| <b>8. TEST SETUP PHOTOGRAPHS .....</b>                                | <b>34</b> |

REPORT REVISION HISTORY

| Number of Revisions | Report No.        | Version | Issue Date | Description   |
|---------------------|-------------------|---------|------------|---------------|
| 0                   | 2507A33259E-RF-02 | R1V1    | 2026-05-12 | Initial Issue |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                                                                                                                                                                                                                                                                                                                                                                                                                             |         |                                                                                                                                                                                                                                                               |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:                                                                                                                                                                                                                                                                                                                                                                                                                  |         | Quanzhou Feijie Electron Co., Ltd                                                                                                                                                                                                                             |
| Product Name:                                                                                                                                                                                                                                                                                                                                                                                                               |         | Dual-Mode PoC Radio                                                                                                                                                                                                                                           |
| Tested Model:                                                                                                                                                                                                                                                                                                                                                                                                               |         | LT-80                                                                                                                                                                                                                                                         |
| Series Models:                                                                                                                                                                                                                                                                                                                                                                                                              |         | LT-81, LT-82, LT-80N, LT-80G, LT-80P                                                                                                                                                                                                                          |
| Trade Name:                                                                                                                                                                                                                                                                                                                                                                                                                 |         | LINTON                                                                                                                                                                                                                                                        |
| Power Supply:                                                                                                                                                                                                                                                                                                                                                                                                               |         | DC 7.4V from battery or DC 5V from adapter or DC 8.7V from charger                                                                                                                                                                                            |
| Adapter information:                                                                                                                                                                                                                                                                                                                                                                                                        | Model:  | U282E0A050100                                                                                                                                                                                                                                                 |
|                                                                                                                                                                                                                                                                                                                                                                                                                             | Input:  | AC 100-240V, 50/60Hz, 0.15A                                                                                                                                                                                                                                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                             | Output: | DC 5V, 1A                                                                                                                                                                                                                                                     |
| Charger information:                                                                                                                                                                                                                                                                                                                                                                                                        | Input:  | DC 5V, 1A                                                                                                                                                                                                                                                     |
|                                                                                                                                                                                                                                                                                                                                                                                                                             | Output: | DC 8.7V, 0.5A                                                                                                                                                                                                                                                 |
| RF Function:                                                                                                                                                                                                                                                                                                                                                                                                                |         | LTE                                                                                                                                                                                                                                                           |
| Operating Band/Frequency:                                                                                                                                                                                                                                                                                                                                                                                                   |         | LTE Band 2: 1850-1910 MHz(TX), 1930-1990 MHz(RX)<br>LTE Band 4: 1710-1755 MHz(TX), 2110-2155 MHz(RX)<br>LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX)<br>LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX)<br>LTE Band 66: 1710-1780 MHz(TX), 2110-2180 MHz(RX) |
| Modulation Type:                                                                                                                                                                                                                                                                                                                                                                                                            |         | QPSK, 16QAM                                                                                                                                                                                                                                                   |
| EUT Received Status:                                                                                                                                                                                                                                                                                                                                                                                                        |         | Good                                                                                                                                                                                                                                                          |
| <p><i>Note:</i></p> <p>1. The test model is identify with the series model except for the model name, please refer to declaration letter for more detail.</p> <p>2. All measurement and test data in this report was gathered from production sample serial number: 3F96-11 (RF Conducted and Radiated Spurious Emission) (Assigned by the BACL (Xiamen). The EUT supplied by the applicant was received on 2025-12-26)</p> |         |                                                                                                                                                                                                                                                               |

### 1.2 ★Operation Voltage (VDC):

|                |      |                |      |                 |      |
|----------------|------|----------------|------|-----------------|------|
| <b>Lowest:</b> | 6.4V | <b>Normal:</b> | 7.4V | <b>Highest:</b> | 8.4V |
|----------------|------|----------------|------|-----------------|------|

**1.3 ★Antenna Information**

| Antenna Type | Operation Bands | Antenna Frequency Range (MHz) | Antenna Gain( $G_T$ ) (dBi) | $L_C$ (dB) |
|--------------|-----------------|-------------------------------|-----------------------------|------------|
| Monopole     | LTE B2          | 1850-1910                     | 0.22                        | 0          |
|              | LTE B4          | 1710-1755                     | -0.35                       | 0          |
|              | LTE B5          | 824-849                       | 0.1                         | 0          |
|              | LTE B7          | 2500-2570                     | -1.11                       | 0          |
|              | LTE B66         | 1710-1780                     | -0.35                       | 0          |

Note:

1.  $L_C$ = Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.2. The RF conduction test point is the same as the point tested in antenna report, and the cable loss between the module and the antenna has been taken into account in the antenna gain, so EIRP/ERP no longer calculates  $L_C$ .**1.4 Objective**

This type approval report is prepared for *Quanzhou Feijie Electron Co., Ltd* in accordance with Part 2, Part 22-Subpart H and Part 24-Subpart E and Part 27 of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, Peak-to-average Ratio (PAR), occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

**1.5 Measurement Uncertainty**

| Item                                            |               | $U_{lab}$                  |
|-------------------------------------------------|---------------|----------------------------|
| Radiated Spurious Emission                      | 30MHz~1GHz    | 4.68dB                     |
|                                                 | 1GHz~18GHz    | 5.00dB                     |
|                                                 | 18GHz~26.5GHz | 4.90dB                     |
|                                                 | 26.5GHz~40GHz | 4.90dB                     |
| Occupied Bandwidth                              |               | 2%                         |
| Conducted Spurious Emission                     |               | $\pm 2.92$ dB              |
| Transmitter Conducted Power(Conducted RF power) |               | $\pm 1.49$ dB              |
| Frequency Error(RF Frequency)                   |               | $0.085 \times 10^{-6}$ MHz |
| Duty Cycle                                      |               | 1%                         |
| Voltage (DC)                                    |               | 0.4%                       |
| Temperature                                     |               | $\pm 1.0^\circ\text{C}$    |
| Humidity                                        |               | $\pm 5\%$                  |

## **1.6 Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Xiamen) to collect test data is located on the Unit 102, No. 902 Meifeng South Road, Binhai West Avenue Science and Technology Innovation Park, Torch High Tech Zone Xiamen, People's Republic of China

Bay Area Compliance Laboratories Corp. (Xiamen) Lab is accredited to ISO/IEC 17025 by A2LA (Certificate Number: 7134.01) and the lab has been recognized as the FCC accredited lab under the KDB 974614 D01, the FCC Designation No. : CN1384.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 Justification

The EUT was configured for testing according to ANSI C63.26-2015.

The final qualification test was performed with the EUT operating at normal mode.

### 2.2 Channel List

The device operates on LTE Band 2/4/5/7/66; test was performed with channels as below table:

| Frequency Bands | Bandwidth (MHz) | Test Frequency(MHz) |        |        |
|-----------------|-----------------|---------------------|--------|--------|
|                 |                 | Low                 | Middle | High   |
| LTE Band 2      | 1.4             | 1850.7              | 1880   | 1909.3 |
|                 | 3               | 1851.5              | 1880   | 1908.5 |
|                 | 5               | 1852.5              | 1880   | 1907.5 |
|                 | 10              | 1855                | 1880   | 1905   |
|                 | 15              | 1857.5              | 1880   | 1902.5 |
|                 | 20              | 1860                | 1880   | 1900   |
| LTE Band 4      | 1.4             | 1710.7              | 1732.5 | 1754.3 |
|                 | 3               | 1711.5              | 1732.5 | 1753.5 |
|                 | 5               | 1712.5              | 1732.5 | 1752.5 |
|                 | 10              | 1715                | 1732.5 | 1750   |
|                 | 15              | 1717.5              | 1732.5 | 1747.5 |
|                 | 20              | 1720                | 1732.5 | 1745   |
| LTE Band 5      | 1.4             | 824.7               | 836.5  | 848.3  |
|                 | 3               | 825.5               | 836.5  | 847.5  |
|                 | 5               | 826.5               | 836.5  | 846.5  |
|                 | 10              | 829                 | 836.5  | 844    |
| LTE Band 7      | 5               | 2502.5              | 2535   | 2567.5 |
|                 | 10              | 2505                | 2535   | 2565   |
|                 | 15              | 2507.5              | 2535   | 2562.5 |
|                 | 20              | 2510                | 2535   | 2560   |
| LTE Band 66     | 1.4             | 1710.7              | 1745   | 1779.3 |
|                 | 3               | 1711.5              | 1745   | 1778.5 |
|                 | 5               | 1712.5              | 1745   | 1777.5 |
|                 | 10              | 1715                | 1745   | 1775   |
|                 | 15              | 1717.5              | 1745   | 1772.5 |
|                 | 20              | 1720                | 1745   | 1770   |

### 2.3 EUT Operation Condition:

|                          |                                                                                                                            |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------|
| EUT Operation Mode:      | The system was configured for testing in each operation mode.<br>LTE Category is 1, 16QAM only support up to maximum 27RB. |
| Equipment Modifications: | No                                                                                                                         |
| EUT Exercise Software:   | No                                                                                                                         |

### 2.4 Support Equipment List and Details


| Manufacturer | Description                         | Model   | Serial Number |
|--------------|-------------------------------------|---------|---------------|
| R&S          | Wideband Radio Communication Tester | CMW500  | 122920        |
| Unknown      | Antenna                             | Unknown | Unknown       |

### 2.5 External I/O Cable


| Cable Description | Length (m) | From Port | To     |
|-------------------|------------|-----------|--------|
| USB Cable         | 1          | Adapter   | EUT    |
| Coaxial Cable     | 10         | Antenna   | CMW500 |

### 2.6 Block Diagram of Test Setup

For Radiated Spurious Emission (Below 1GHz):

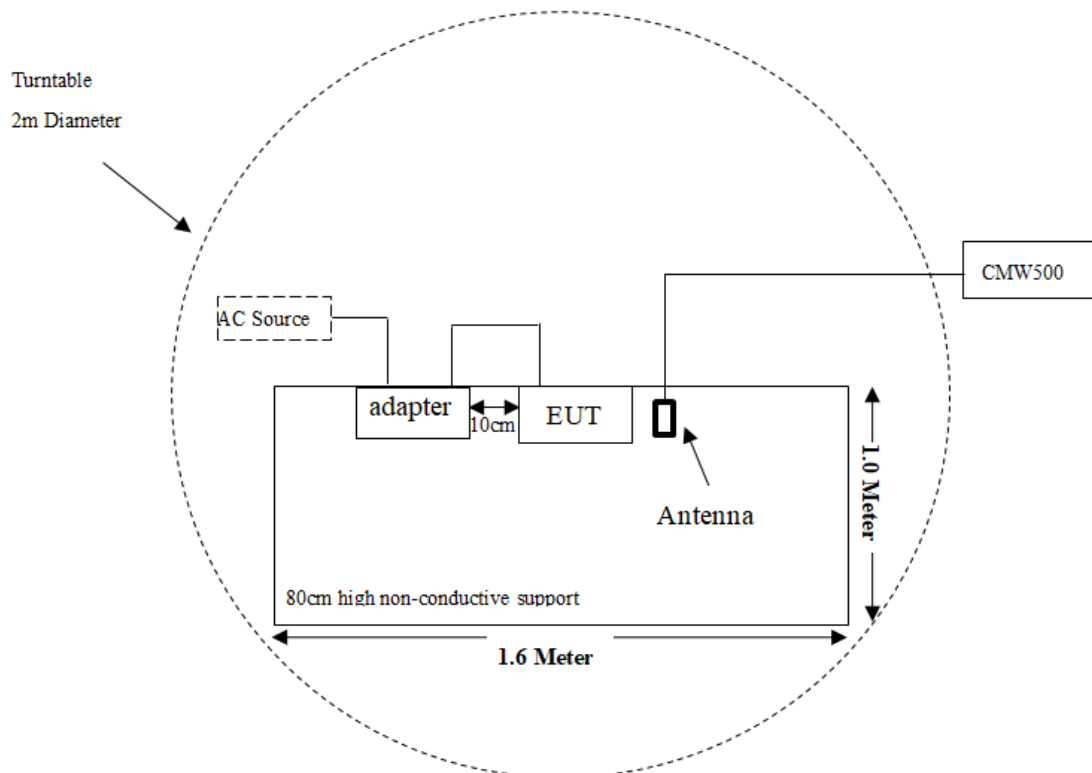

For Radiated Spurious Emission (Above 1GHz):

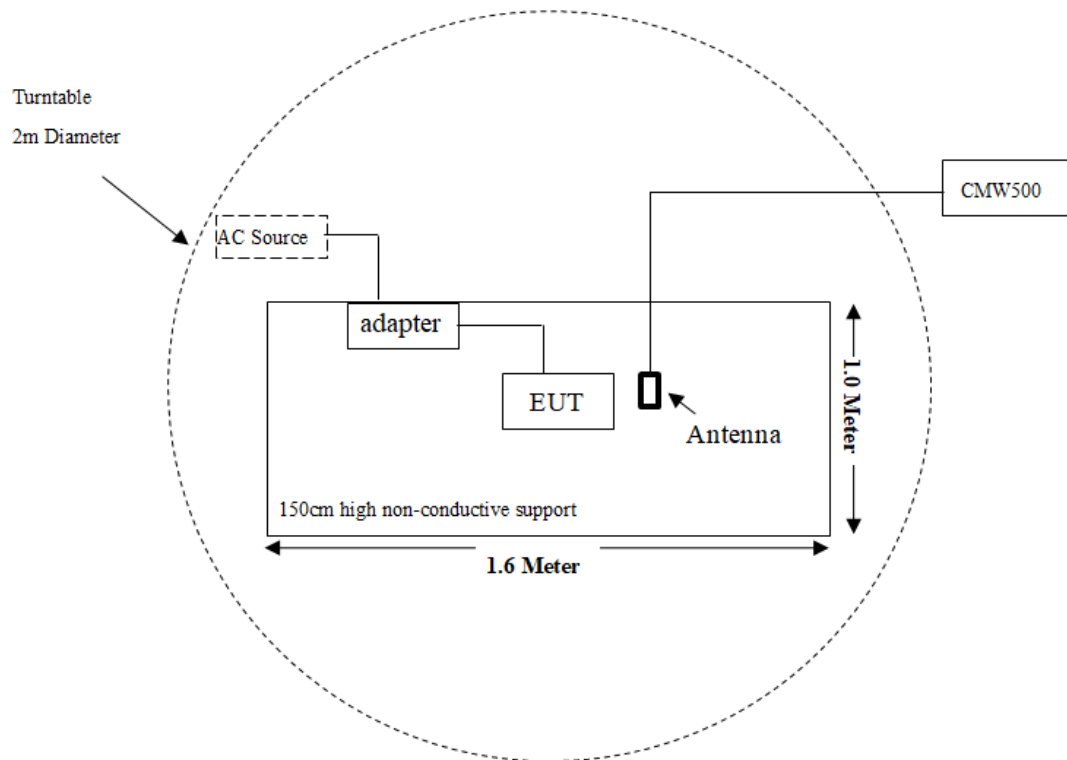

### 3. SUMMARY OF TEST RESULTS

| FCC Rules                                       | Description of Test                                                                 | Result    |
|-------------------------------------------------|-------------------------------------------------------------------------------------|-----------|
| FCC§2.1046; § 22.913; §24.232;<br>§27.50        | RF Output Power                                                                     | Compliant |
| FCC§2.1046; § 24.232; §27.50;<br>§22.913        | Peak-to-average Ratio(PAR)                                                          | Compliant |
| FCC§2.1049; §22.905;§22.917;<br>§24.238; §27.53 | Occupied Bandwidth                                                                  | Compliant |
| FCC§2.1051; §22.917; §24.238;<br>§27.53         | Spurious Emissions at Antenna Terminal                                              | Compliant |
| FCC§2.1051; §24.238; §22.917;<br>§27.53         | Out of band emission, Band Edge                                                     | Compliant |
| FCC§2.1055; §27.54; §24.235;<br>§22.355         | Frequency stability vs. temperature &<br>Frequency stability vs. voltage Compliance | Compliant |
| FCC§2.1053; §22.917; §27.53;<br>§24.238         | Radiated Spurious Emission                                                          | Compliant |

**4. TEST EQUIPMENT LIST**

| Test Equipment                                     | Manufacturer    | Model            | Serial Number | Calibration Date | Calibration Due Date |
|----------------------------------------------------|-----------------|------------------|---------------|------------------|----------------------|
| <b>Radiated Spurious Emissions 30 MHz to 1 GHz</b> |                 |                  |               |                  |                      |
| EMI Test Receiver                                  | Rohde & Schwarz | ESR3             | 103103        | 2025/2/20        | 2026/2/19            |
| Antenna                                            | Sunol Sciences  | JB6              | A122022-5     | 2023/7/27        | 2026/7/26            |
| Amplifier                                          | Sonoma          | 310B             | 120903        | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH400T-N-4M      | CC002         | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH460B-N-2M      | CC006         | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH460B-N-12M     | CC007         | 2025/2/20        | 2026/2/19            |
| Microwave Analog Signal Generator                  | Agilent         | N5183A           | MY47420335    | 2025/2/20        | 2026/2/19            |
| Dipole antenna                                     | EMCO            | 3121C            | 9209-860      | N/A              | N/A                  |
| Wideband Radio Communication Tester                | Rohde & Schwarz | CMW500           | 122920        | 2025/2/20        | 2026/2/19            |
| <b>Radiated Spurious Emissions Above 1 GHz</b>     |                 |                  |               |                  |                      |
| Spectrum Analyzer                                  | Rohde & Schwarz | FSV40-N          | 102051        | 2025/2/20        | 2026/2/19            |
| Filter Switch Unit                                 | Decentest       | DT7220FSU        | DS79904       | 2025/2/21        | 2026/2/20            |
| Multiplex Switch Test Control Set                  | Decentest       | DT7220SCU        | DS79901       | 2025/2/21        | 2026/2/20            |
| Horn Antenna                                       | EMCO            | 3115             | 9002-3355     | 2024/11/19       | 2027/11/18           |
| Double Ridge Guide Horn Antenna                    | A.H.Systems     | SAS-571          | 1980          | 2023/7/28        | 2026/7/27            |
| Preamplifier                                       | GLOBAL          | 1313-A100M18G    | 4121301       | 2026/1/14        | 2027/1/13            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH800A-N-6M      | CC003         | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH800A-N-1M      | CC005         | 2025/2/20        | 2026/2/19            |
| Horn Antenna                                       | EMCO            | 3116             | 9407-2232     | 2023/7/31        | 2026/7/30            |
| Preamplifier                                       | A.H.Systems     | PAM-1840         | 200           | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH360A-2.92-3M   | CC008         | 2025/2/20        | 2026/2/19            |
| Coaxial Cable                                      | XINHANGWEIBO    | XH360A-2.92-1M   | CC009         | 2025/2/20        | 2026/2/19            |
| Microwave Analog Signal Generator                  | Agilent         | N5183A           | MY47420335    | 2025/2/20        | 2026/2/19            |
| Wideband Radio Communication Tester                | Rohde & Schwarz | CMW500           | 122920        | 2025/2/20        | 2026/2/19            |
| Waveguide Standard Gain Horn Antenna               | PASTERNAK       | PE9852/2F-20     | 11 20         | 2024/9/13        | 2027/9/12            |
| <b>RF Conducted Test</b>                           |                 |                  |               |                  |                      |
| Spectrum Analyzer                                  | Rohde & Schwarz | FSV40-N          | 102051        | 2025/2/20        | 2026/2/19            |
| constant temperature and humidity testing machine  | BACL            | BTH-150-60       | 30234         | 2025/7/28        | 2026/7/27            |
| Wideband Radio Communication Tester                | Rohde & Schwarz | CMW500           | 122920        | 2025/2/20        | 2026/2/19            |
| Attenuator                                         | YiCheng         | SMA-JK6G-10dB    | N/A           | Each time        | N/A                  |
| Multimeter                                         | Deli            | DL8490           | 23930192      | 2025/2/20        | 2026/2/19            |
| Directional coupler                                | narda           | 4226-20          | 8412          | Each time        | N/A                  |
| DC power supply                                    | Maisheng        | MS-606DS         | 2023115703    | Each time        | N/A                  |
| Coaxial Cable                                      | Lianxun         | RF113            | N/A           | Each time        | N/A                  |
| Test Software                                      | JD              | JDAutoTestSystem | 1.0.0.3813    | N/A              | N/A                  |

**Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Xiamen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## 5. REQUIREMENTS AND TEST PROCEDURES

### 5.1 Applicable Standard for Part 22 Subpart H:

#### 5.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) Power measurement. Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (see FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

#### 5.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

#### 5.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section

| Frequency range (MHz) | Base, fixed (ppm) | Mobile >3 watts (ppm) | Mobile ≤3 watts (ppm) |
|-----------------------|-------------------|-----------------------|-----------------------|
| 25 to 50              | 20                | 20                    | 50                    |
| 50 to 450             | 5                 | 5                     | 50                    |
| 450 to 512            | 2.5               | 5                     | 5                     |
| 821 to 896            | 1.5               | 2.5                   | 2.5                   |
| 928 to 929            | 5                 | n/a                   | n/a                   |
| 929 to 960            | 1.5               | n/a                   | n/a                   |
| 2110 to 2220          | 10                | n/a                   | n/a                   |

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

## 5.2 Applicable Standard for Part 24 Subpart E:

### 5.2.1 RF Output Power

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.2.2 Spurious Emissions

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section. 4.2.3 Frequency stability FCC §24.235 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 5.2.3 Frequency stability

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 5.3 Applicable Standard For Part 27:

#### 5.3.1 RF Output Power

FCC §27.50

(a) The following power limits and related requirements apply to stations transmitting in the 2305-2320 MHz band or the 2345-2360 MHz band.

(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) Automatic transmit power control. Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) Prohibition on external vehicle-mounted antennas. The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b) The following power and antenna height limits apply to transmitters operating in the 746-758 MHz, 775-788 MHz and 805-806 MHz bands:

(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c) The following power and antenna height requirements apply to stations transmitting in the 600 MHz band and the 698-746 MHz band:

(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d) The following power and antenna height requirements apply to stations transmitting in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz and 2180-2200 MHz bands:

(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(5) Equipment employed must be authorized in accordance with the provisions of § 24.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph(d)(6) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

(k) The following power requirements apply to stations transmitting in the 3450-3550 MHz band:

(3) Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(4) Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (k)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 5.3.2 Spurious Emissions

#### FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;

(iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log(P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log(P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log(P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log(P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log(P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log(P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 5.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

## 5.4 Test Method:

### 5.4.1 Transmitter output power, e.r.p. and e.i.r.p

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

Where:


ERP or EIRP=effective radiated power or equivalent isotropically radiated power, respectively  
(expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  =gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  =signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Test Setup Block:

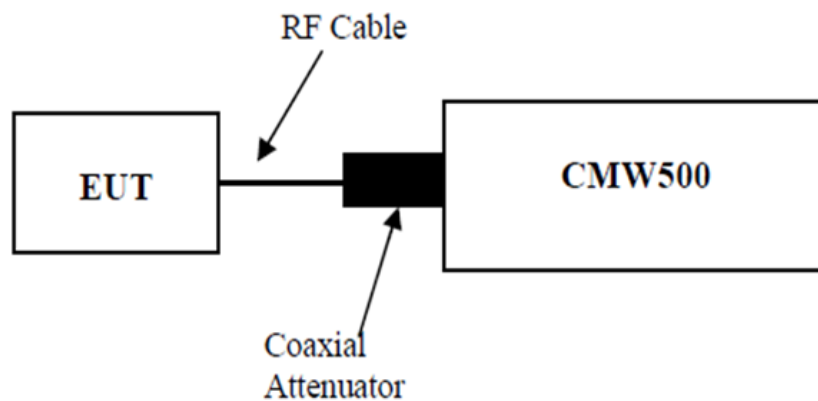

Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

### 5.4.2 Occupied Bandwidth


According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.
- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Test Setup Block:

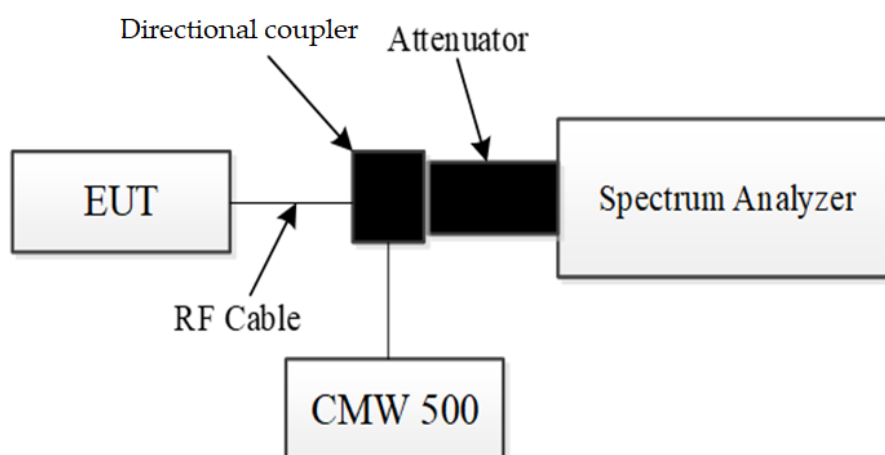


Note: The Insertion loss of the RF cable, directional coupler and coaxial Attenuator was offset into the level of Spectrum Analyzer.

### 5.4.3 Transmitter unwanted emissions-at antenna terminals

According to ANSI C63.26-2015 Section 5.7.4:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),<sup>8</sup> effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.

#### Test Setup Block:

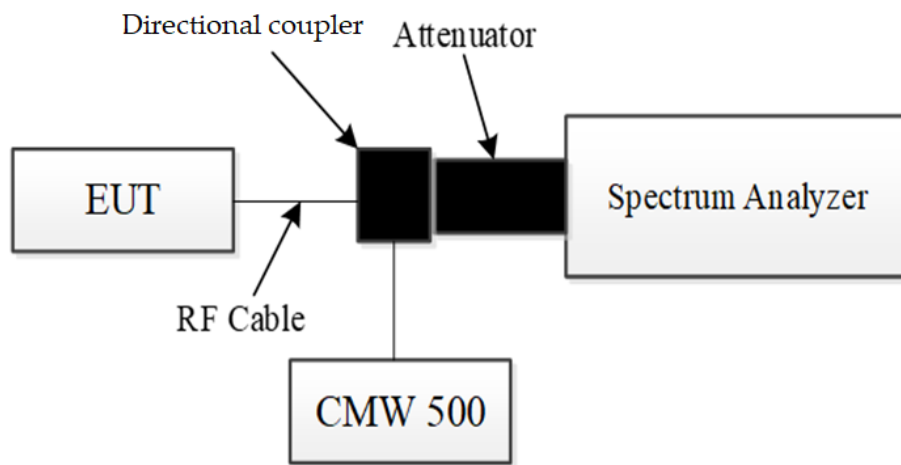


Note: The Insertion loss of the RF cable, directional coupler and coaxial Attenuator was offset into the level of Spectrum Analyzer.

#### 5.4.4 Out of band emission

According to ANSI C63.26-2015 Section 5.7.3:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.

##### Test Setup Block:

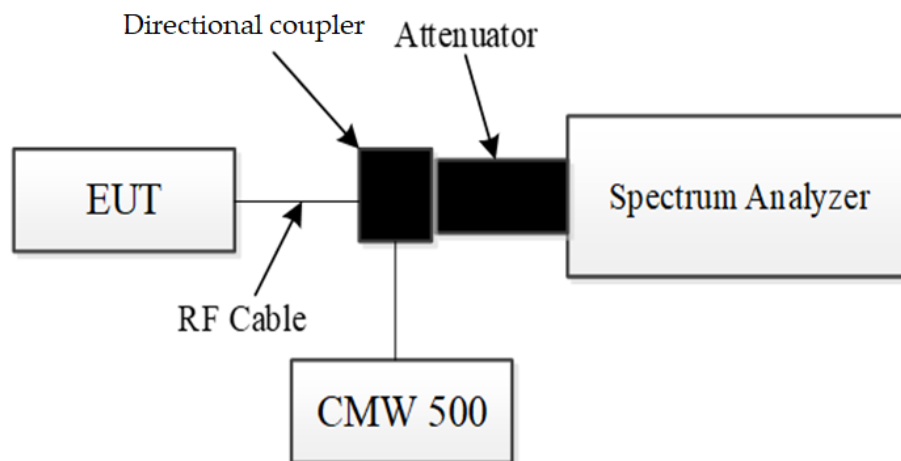

Note: The Insertion loss of the RF cable, directional coupler and coaxial Attenuator was offset into the level of Spectrum Analyzer.

### 5.4.5 Frequency stability

According to ANSI C63.26-2015 Section 5.6:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.


The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between -30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and  $\pm 15\%$  supply voltage variations. If a product is specified to operate over a range of input voltage, then the -15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

#### Test Setup Block:

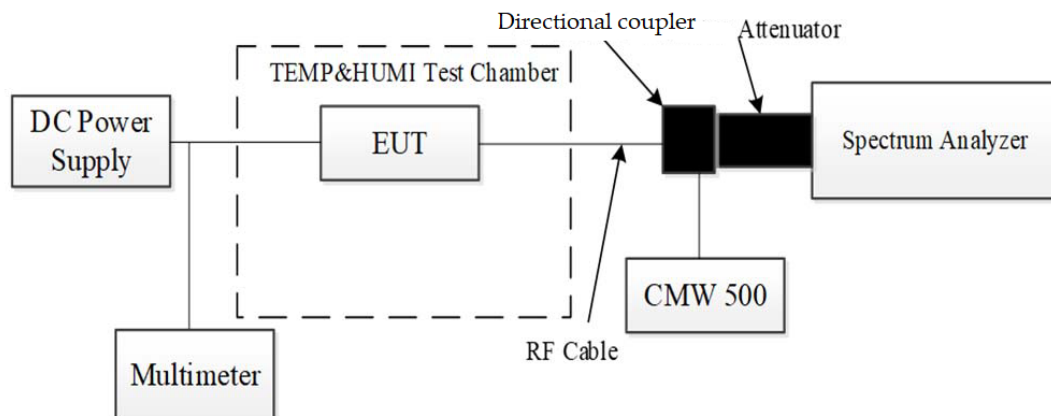


Note: The Insertion loss of the RF cable, directional coupler and coaxial Attenuator was offset into the level of Spectrum Analyzer.


#### 5.4.6 Transmitter unwanted emissions-Radiated Spurious emissions

According to ANSI C63.26-2015 Section 5.5.3:

**Test setup:**

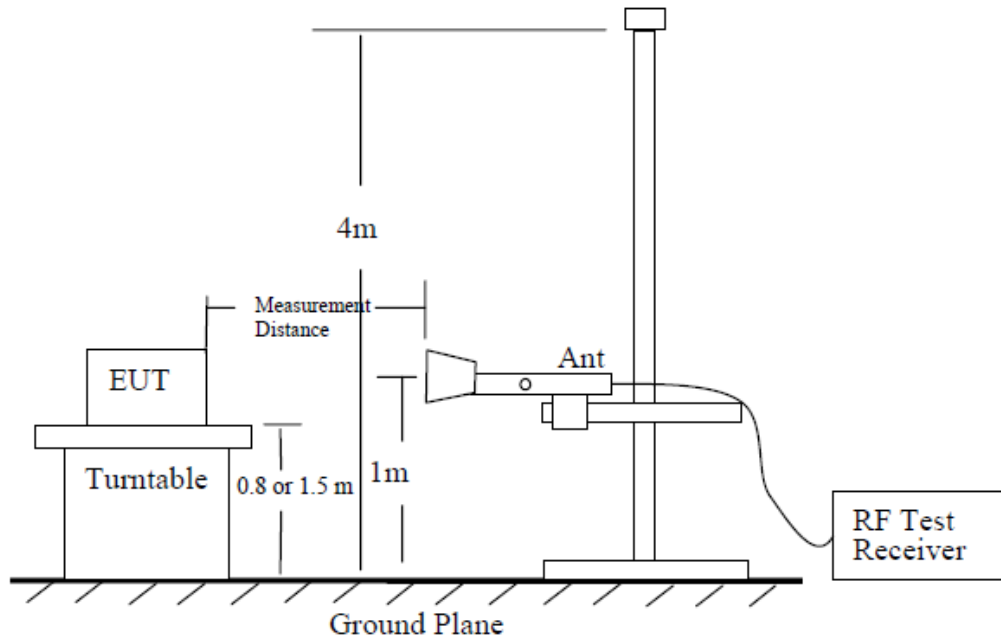

**Figure 6—Test site-up for radiated ERP and/or EIRP measurements**

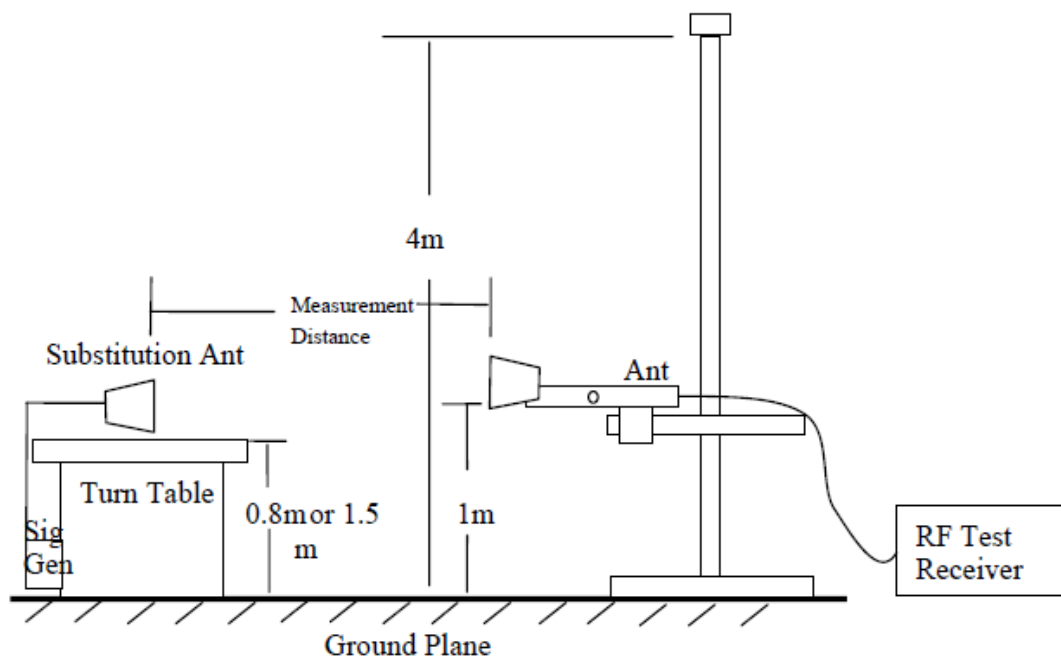

**Figure 7—Substitution method set-up for radiated emission**

**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

$P_e$  = equivalent emission power in dBm

$P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

## **6. TEST DATA AND RESULT**

---

### **6.1 LTE RF Conducted Data**

Please refer to the attachment Appendix A for detail test data.

## 6.2 Radiated Spurious Emissions

|                           |             |             |
|---------------------------|-------------|-------------|
| <b>Frequency Range:</b>   | Below 1 GHz | Above 1 GHz |
| <b>Temperature:</b>       | 20.9°C      | 22.1°C      |
| <b>Relative Humidity:</b> | 40%         | 54%         |
| <b>ATM Pressure:</b>      | 100.1kPa    | 100.1kPa    |
| <b>Test Date:</b>         | 2026-01-09  | 2026-02-06  |
| <b>Test Engineer:</b>     | Wlif Wu     | Wlif Wu     |

Pre-scan in the X, Y and Z axes of orientation, the worst case Y-axis of orientation was recorded.

### 6.2.1 30MHz~1GHz

#### Test Data

Note: The worst modulation and bandwidth is as below:

#### FDD-LTE Band 2:

| Frequency<br>(MHz)                      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 1850.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 37.71                                   | H              | 49.07                         | -52.10                        | -25.30                   | 0.13                  | -77.53                     | -13.00         | 64.53          |
| 55.37                                   | V              | 51.58                         | -59.29                        | -12.43                   | 0.15                  | -71.87                     | -13.00         | 58.87          |
| 91.16                                   | H              | 50.75                         | -64.50                        | 0.00                     | 0.18                  | -64.68                     | -13.00         | 51.68          |
| 196.89                                  | V              | 50.98                         | -56.70                        | 0.00                     | 0.25                  | -56.95                     | -13.00         | 43.95          |
| 1.4MHz QPSK RB1#0, Frequency: 1880MHz   |                |                               |                               |                          |                       |                            |                |                |
| 47.22                                   | H              | 50.11                         | -57.49                        | -17.63                   | 0.14                  | -75.26                     | -13.00         | 62.26          |
| 55.08                                   | V              | 52.58                         | -58.19                        | -12.57                   | 0.15                  | -70.91                     | -13.00         | 57.91          |
| 90.77                                   | H              | 51.95                         | -63.32                        | 0.00                     | 0.18                  | -63.50                     | -13.00         | 50.50          |
| 195.82                                  | V              | 50.70                         | -57.06                        | 0.00                     | 0.25                  | -57.31                     | -13.00         | 44.31          |
| 1.4MHz QPSK RB1#0, Frequency: 1909.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 89.80                                   | H              | 51.08                         | -64.22                        | 0.00                     | 0.18                  | -64.40                     | -13.00         | 51.40          |
| 35.29                                   | V              | 50.85                         | -48.43                        | -24.14                   | 0.12                  | -72.69                     | -13.00         | 59.69          |
| 43.63                                   | H              | 49.54                         | -55.62                        | -21.61                   | 0.13                  | -77.36                     | -13.00         | 64.36          |
| 55.26                                   | V              | 51.50                         | -59.33                        | -12.48                   | 0.15                  | -71.96                     | -13.00         | 58.96          |

**FDD-LTE Band 4:**

| Frequency<br>(MHz)                       | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                          |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0 , Frequency: 1710.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 38.88                                    | H              | 49.17                         | -52.77                        | -25.86                   | 0.13                  | -78.76                     | -13.00         | 65.76          |
| 55.75                                    | V              | 51.00                         | -60.00                        | -12.26                   | 0.15                  | -72.41                     | -13.00         | 59.41          |
| 89.90                                    | H              | 51.35                         | -63.96                        | 0.00                     | 0.18                  | -64.14                     | -13.00         | 51.14          |
| 197.37                                   | V              | 51.07                         | -56.57                        | 0.00                     | 0.25                  | -56.82                     | -13.00         | 43.82          |
| 1.4MHz QPSK RB1#0, Frequency: 1732.5MHz  |                |                               |                               |                          |                       |                            |                |                |
| 90.97                                    | H              | 50.30                         | -64.96                        | 0.00                     | 0.18                  | -65.14                     | -13.00         | 52.14          |
| 46.05                                    | V              | 52.15                         | -54.23                        | -18.77                   | 0.14                  | -73.14                     | -13.00         | 60.14          |
| 38.97                                    | H              | 48.46                         | -53.55                        | -25.91                   | 0.13                  | -79.59                     | -13.00         | 66.59          |
| 55.17                                    | V              | 51.62                         | -59.19                        | -12.52                   | 0.15                  | -71.86                     | -13.00         | 58.86          |
| 1.4MHz QPSK RB1#0, Frequency: 1754.3MHz  |                |                               |                               |                          |                       |                            |                |                |
| 43.05                                    | H              | 49.32                         | -55.44                        | -22.38                   | 0.13                  | -77.95                     | -13.00         | 64.95          |
| 55.17                                    | V              | 51.95                         | -58.86                        | -12.52                   | 0.15                  | -71.53                     | -13.00         | 58.53          |
| 90.09                                    | H              | 51.62                         | -63.69                        | 0.00                     | 0.18                  | -63.87                     | -13.00         | 50.87          |
| 195.20                                   | V              | 50.60                         | -57.21                        | 0.00                     | 0.25                  | -57.46                     | -13.00         | 44.46          |

**FDD-LTE Band 5:**

DB-EYE Band 6

| Frequency<br>(MHz)                     | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                        |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 824.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 39.36                                  | H              | 48.96                         | -53.31                        | -26.09                   | 0.13                  | -79.53                     | -13.00         | 66.53          |
| 42.17                                  | V              | 50.34                         | -53.36                        | -23.54                   | 0.13                  | -77.03                     | -13.00         | 64.03          |
| 91.35                                  | H              | 50.94                         | -64.30                        | 0.00                     | 0.18                  | -64.48                     | -13.00         | 51.48          |
| 55.75                                  | V              | 52.18                         | -58.82                        | -12.26                   | 0.15                  | -71.23                     | -13.00         | 58.23          |
| 1.4MHz QPSK RB1#0, Frequency: 836.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 55.75                                  | H              | 52.23                         | -59.19                        | -12.26                   | 0.15                  | -71.60                     | -13.00         | 58.60          |
| 55.27                                  | V              | 52.39                         | -58.45                        | -12.48                   | 0.15                  | -71.08                     | -13.00         | 58.08          |
| 196.70                                 | H              | 50.15                         | -57.65                        | 0.00                     | 0.25                  | -57.90                     | -13.00         | 44.90          |
| 196.70                                 | V              | 50.96                         | -56.74                        | 0.00                     | 0.25                  | -56.99                     | -13.00         | 43.99          |
| 1.4MHz QPSK RB1#0, Frequency: 848.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 43.73                                  | H              | 48.51                         | -56.71                        | -21.48                   | 0.13                  | -78.32                     | -13.00         | 65.32          |
| 41.50                                  | V              | 51.16                         | -52.07                        | -24.43                   | 0.13                  | -76.63                     | -13.00         | 63.63          |
| 91.55                                  | H              | 51.01                         | -64.21                        | 0.00                     | 0.18                  | -64.39                     | -13.00         | 51.39          |
| 55.95                                  | V              | 52.42                         | -58.64                        | -12.16                   | 0.15                  | -70.95                     | -13.00         | 57.95          |

**FDD-LTE Band 7:**

| Frequency<br>(MHz)                    | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                       |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Cable<br>Loss<br>(dB) |                            |                |                |
| 5MHz QPSK RB1#0, Frequency: 2502.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 46.93                                 | H              | 49.52                         | -57.88                        | -17.91                   | 0.14                  | -75.93                     | -25.00         | 50.93          |
| 55.08                                 | V              | 52.64                         | -58.13                        | -12.57                   | 0.15                  | -70.85                     | -25.00         | 45.85          |
| 90.97                                 | H              | 50.17                         | -65.09                        | 0.00                     | 0.18                  | -65.27                     | -25.00         | 40.27          |
| 196.60                                | V              | 51.08                         | -56.62                        | 0.00                     | 0.25                  | -56.87                     | -25.00         | 31.87          |
| 5MHz QPSK RB1#0, Frequency: 2535MHz   |                |                               |                               |                          |                       |                            |                |                |
| 33.93                                 | H              | 48.67                         | -50.00                        | -24.49                   | 0.12                  | -74.61                     | -25.00         | 49.61          |
| 55.75                                 | V              | 51.98                         | -59.02                        | -12.26                   | 0.15                  | -71.43                     | -25.00         | 46.43          |
| 90.00                                 | H              | 50.66                         | -64.66                        | 0.00                     | 0.18                  | -64.84                     | -25.00         | 39.84          |
| 196.99                                | V              | 50.34                         | -57.33                        | 0.00                     | 0.25                  | -57.58                     | -25.00         | 32.58          |
| 5MHz QPSK RB1#0, Frequency: 2567.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 32.86                                 | H              | 48.46                         | -49.50                        | -24.98                   | 0.12                  | -74.60                     | -25.00         | 49.60          |
| 34.41                                 | V              | 50.43                         | -48.31                        | -24.27                   | 0.12                  | -72.70                     | -25.00         | 47.70          |
| 91.35                                 | H              | 51.30                         | -63.94                        | 0.00                     | 0.18                  | -64.12                     | -25.00         | 39.12          |
| 55.08                                 | V              | 52.97                         | -57.80                        | -12.57                   | 0.15                  | -70.52                     | -25.00         | 45.52          |

**FDD-LTE Band 66:**

| Frequency<br>(MHz)                      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBd) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 1710.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 44.21                                   | H              | 47.96                         | -57.59                        | -20.84                   | 0.13                  | -78.56                     | -13.00         | 65.56          |
| 36.94                                   | V              | 51.79                         | -48.51                        | -24.93                   | 0.12                  | -73.56                     | -13.00         | 60.56          |
| 91.55                                   | H              | 50.05                         | -65.17                        | 0.00                     | 0.18                  | -65.35                     | -13.00         | 52.35          |
| 55.56                                   | V              | 52.49                         | -58.44                        | -12.34                   | 0.15                  | -70.93                     | -13.00         | 57.93          |
| 1.4MHz QPSK RB1#0, Frequency: 1745MHz   |                |                               |                               |                          |                       |                            |                |                |
| 30.34                                   | H              | 48.90                         | -47.39                        | -26.14                   | 0.11                  | -73.64                     | -13.00         | 60.64          |
| 41.50                                   | V              | 51.20                         | -52.03                        | -24.43                   | 0.13                  | -76.59                     | -13.00         | 63.59          |
| 90.77                                   | H              | 50.29                         | -64.98                        | 0.00                     | 0.18                  | -65.16                     | -13.00         | 52.16          |
| 55.17                                   | V              | 53.05                         | -57.76                        | -12.52                   | 0.15                  | -70.43                     | -13.00         | 57.43          |
| 1.4MHz QPSK RB1#0, Frequency: 1779.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 42.76                                   | H              | 48.44                         | -56.12                        | -22.76                   | 0.13                  | -79.01                     | -13.00         | 66.01          |
| 55.66                                   | V              | 51.93                         | -59.03                        | -12.30                   | 0.15                  | -71.48                     | -13.00         | 58.48          |
| 90.58                                   | H              | 50.40                         | -64.88                        | 0.00                     | 0.18                  | -65.06                     | -13.00         | 52.06          |
| 196.11                                  | V              | 50.30                         | -57.44                        | 0.00                     | 0.25                  | -57.69                     | -13.00         | 44.69          |

Note:

1. The unit of antenna gain is dBd for frequency below 1GHz.

2. Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

**6.2.2 Above 1GHz**

Note: The worst modulation and bandwidth is as below:

**FDD-LTE Band 2 (1GHz - 20GHz):**

| Frequency<br>(MHz)                       | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|------------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                          |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBi) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 1850.7MHz  |                |                               |                               |                          |                       |                            |                |                |
| 3701.400                                 | H              | 79.67                         | -25.31                        | 6.00                     | 2.39                  | -21.70                     | -13.00         | 8.70           |
| 3701.400                                 | V              | 77.31                         | -27.94                        | 6.00                     | 2.39                  | -24.33                     | -13.00         | 11.33          |
| 5552.100                                 | H              | 70.59                         | -35.19                        | 10.19                    | 2.91                  | -27.91                     | -13.00         | 14.91          |
| 5552.100                                 | V              | 71.24                         | -35.07                        | 10.19                    | 2.91                  | -27.79                     | -13.00         | 14.79          |
| 1.4MHz QPSK RB1#0, Frequency: 1880 MHz   |                |                               |                               |                          |                       |                            |                |                |
| 3760.000                                 | H              | 80.88                         | -24.05                        | 5.92                     | 2.41                  | -20.54                     | -13.00         | 7.54           |
| 3760.000                                 | V              | 76.77                         | -28.32                        | 5.92                     | 2.41                  | -24.81                     | -13.00         | 11.81          |
| 5640.000                                 | H              | 71.10                         | -34.37                        | 9.90                     | 2.93                  | -27.40                     | -13.00         | 14.40          |
| 5640.000                                 | V              | 67.73                         | -38.30                        | 9.90                     | 2.93                  | -31.33                     | -13.00         | 18.33          |
| 1.4MHz QPSK RB1#0, Frequency: 1909.3 MHz |                |                               |                               |                          |                       |                            |                |                |
| 3818.600                                 | H              | 80.72                         | -24.16                        | 6.15                     | 2.42                  | -20.43                     | -13.00         | 7.43           |
| 3818.600                                 | V              | 75.72                         | -29.20                        | 6.15                     | 2.42                  | -25.47                     | -13.00         | 12.47          |
| 5727.900                                 | H              | 64.57                         | -40.60                        | 9.69                     | 2.95                  | -33.86                     | -13.00         | 20.86          |
| 5727.900                                 | V              | 65.87                         | -39.88                        | 9.69                     | 2.95                  | -33.14                     | -13.00         | 20.14          |

**FDD-LTE Band 4 (1GHz - 18GHz):**

| Frequency<br>(MHz)                      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBi) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 1710.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 3421.400                                | H              | 79.39                         | -25.74                        | 4.73                     | 2.32                  | -23.33                     | -13.00         | 10.33          |
| 3421.400                                | V              | 71.14                         | -34.59                        | 4.73                     | 2.32                  | -32.18                     | -13.00         | 19.18          |
| 5132.100                                | H              | 71.07                         | -34.68                        | 10.74                    | 2.77                  | -26.71                     | -13.00         | 13.71          |
| 5132.100                                | V              | 73.82                         | -32.45                        | 10.74                    | 2.77                  | -24.48                     | -13.00         | 11.48          |
| 10264.200                               | H              | 57.67                         | -37.41                        | 9.51                     | 3.86                  | -31.76                     | -13.00         | 18.76          |
| 10264.200                               | V              | 55.07                         | -41.17                        | 9.51                     | 3.86                  | -35.52                     | -13.00         | 22.52          |
| 1.4MHz QPSK RB1#0, Frequency: 1732.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 3465.000                                | H              | 80.79                         | -24.36                        | 5.08                     | 2.34                  | -21.62                     | -13.00         | 8.62           |
| 3465.000                                | V              | 73.97                         | -31.82                        | 5.08                     | 2.34                  | -29.08                     | -13.00         | 16.08          |
| 5197.500                                | H              | 69.51                         | -36.28                        | 10.61                    | 2.80                  | -28.47                     | -13.00         | 15.47          |
| 5197.500                                | V              | 71.55                         | -34.75                        | 10.61                    | 2.80                  | -26.94                     | -13.00         | 13.94          |
| 6930.000                                | H              | 56.93                         | -44.55                        | 9.54                     | 3.24                  | -38.25                     | -13.00         | 25.25          |
| 6930.000                                | V              | 57.38                         | -44.59                        | 9.54                     | 3.24                  | -38.29                     | -13.00         | 25.29          |
| 1.4MHz QPSK RB1#0, Frequency: 1754.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 3508.600                                | H              | 80.86                         | -24.29                        | 5.57                     | 2.35                  | -21.07                     | -13.00         | 8.07           |
| 3508.600                                | V              | 74.45                         | -31.36                        | 5.57                     | 2.35                  | -28.14                     | -13.00         | 15.14          |
| 5262.900                                | H              | 67.14                         | -38.69                        | 10.85                    | 2.82                  | -30.66                     | -13.00         | 17.66          |
| 5262.900                                | V              | 66.76                         | -39.58                        | 10.85                    | 2.82                  | -31.55                     | -13.00         | 18.55          |
| 7017.200                                | H              | 52.95                         | -48.24                        | 9.19                     | 3.25                  | -42.30                     | -13.00         | 29.30          |
| 7017.200                                | V              | 55.49                         | -46.15                        | 9.19                     | 3.25                  | -40.21                     | -13.00         | 27.21          |

**FDD-LTE Band 5 (1GHz - 10GHz):**

| Frequency<br>(MHz)                     | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                        |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBi) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 824.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 1649.400                               | H              | 66.86                         | -47.06                        | 8.00                     | 1.64                  | -40.70                     | -13.00         | 27.70          |
| 1649.400                               | V              | 67.97                         | -46.33                        | 8.00                     | 1.64                  | -39.97                     | -13.00         | 26.97          |
| 2474.100                               | H              | 67.44                         | -39.16                        | 2.71                     | 1.98                  | -38.43                     | -13.00         | 25.43          |
| 2474.100                               | V              | 63.60                         | -43.36                        | 2.71                     | 1.98                  | -42.63                     | -13.00         | 29.63          |
| 4950.000                               | H              | 61.09                         | -44.57                        | 10.70                    | 2.72                  | -36.59                     | -13.00         | 23.59          |
| 4950.000                               | V              | 58.04                         | -48.07                        | 10.70                    | 2.72                  | -40.09                     | -13.00         | 27.09          |
| 1.4MHz QPSK RB1#0, Frequency: 836.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 1673.000                               | H              | 67.93                         | -45.70                        | 7.91                     | 1.65                  | -39.44                     | -13.00         | 26.44          |
| 1673.000                               | V              | 68.38                         | -45.62                        | 7.91                     | 1.65                  | -39.36                     | -13.00         | 26.36          |
| 2509.500                               | H              | 68.28                         | -38.13                        | 2.21                     | 1.99                  | -37.91                     | -13.00         | 24.91          |
| 2509.500                               | V              | 59.29                         | -47.48                        | 2.21                     | 1.99                  | -47.26                     | -13.00         | 34.26          |
| 3345.400                               | H              | 61.98                         | -43.13                        | 4.72                     | 2.29                  | -40.70                     | -13.00         | 27.70          |
| 5019.400                               | V              | 55.74                         | -50.46                        | 10.60                    | 2.74                  | -42.60                     | -13.00         | 29.60          |
| 1.4MHz QPSK RB1#0, Frequency: 848.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 1696.600                               | H              | 68.34                         | -45.00                        | 7.81                     | 1.66                  | -38.85                     | -13.00         | 25.85          |
| 1696.600                               | V              | 71.32                         | -42.38                        | 7.81                     | 1.66                  | -36.23                     | -13.00         | 23.23          |
| 2544.900                               | H              | 66.34                         | -39.97                        | 1.85                     | 2.01                  | -40.13                     | -13.00         | 27.13          |
| 2544.900                               | V              | 62.35                         | -44.31                        | 1.85                     | 2.01                  | -44.47                     | -13.00         | 31.47          |
| 3393.200                               | H              | 63.33                         | -41.80                        | 4.61                     | 2.31                  | -39.50                     | -13.00         | 26.50          |
| 3393.200                               | V              | 56.26                         | -49.44                        | 4.61                     | 2.31                  | -47.14                     | -13.00         | 34.14          |

**FDD-LTE Band 7 (1GHz - 26GHz):**

| Frequency<br>(MHz)                    | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|---------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                       |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBi) | Cable<br>Loss<br>(dB) |                            |                |                |
| 5MHz QPSK RB1#0, Frequency: 2502.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 5005.000                              | H              | 66.60                         | -39.08                        | 10.60                    | 2.73                  | -31.21                     | -25.00         | 6.21           |
| 5005.000                              | V              | 68.74                         | -37.45                        | 10.60                    | 2.73                  | -29.58                     | -25.00         | 4.58           |
| 7507.500                              | H              | 56.25                         | -44.28                        | 7.56                     | 3.34                  | -40.06                     | -25.00         | 15.06          |
| 7507.500                              | V              | 57.00                         | -44.66                        | 7.56                     | 3.34                  | -40.44                     | -25.00         | 15.44          |
| 5MHz QPSK RB1#0, Frequency: 2535MHz   |                |                               |                               |                          |                       |                            |                |                |
| 5070.000                              | H              | 65.97                         | -39.75                        | 10.68                    | 2.75                  | -31.82                     | -25.00         | 6.82           |
| 5070.000                              | V              | 67.03                         | -39.20                        | 10.68                    | 2.75                  | -31.27                     | -25.00         | 6.27           |
| 7605.000                              | H              | 48.13                         | -52.21                        | 8.20                     | 3.38                  | -47.39                     | -25.00         | 22.39          |
| 7605.000                              | V              | 53.94                         | -47.48                        | 8.20                     | 3.38                  | -42.66                     | -25.00         | 17.66          |
| 5MHz QPSK RB1#0, Frequency: 2567.5MHz |                |                               |                               |                          |                       |                            |                |                |
| 5135.000                              | H              | 65.09                         | -40.67                        | 10.73                    | 2.78                  | -32.72                     | -25.00         | 7.72           |
| 5135.000                              | V              | 66.16                         | -40.11                        | 10.73                    | 2.78                  | -32.16                     | -25.00         | 7.16           |
| 7702.500                              | H              | 45.66                         | -54.48                        | 7.44                     | 3.43                  | -50.47                     | -25.00         | 25.47          |
| 7702.500                              | V              | 55.06                         | -46.12                        | 7.44                     | 3.43                  | -42.11                     | -25.00         | 17.11          |

**FDD-LTE Band 66 (1GHz - 18GHz):**

| Frequency<br>(MHz)                      | Polar<br>(H/V) | Receiver<br>Reading<br>(dBμV) | Substituted Method            |                          |                       | Absolute<br>Level<br>(dBm) | Limit<br>(dBm) | Margin<br>(dB) |
|-----------------------------------------|----------------|-------------------------------|-------------------------------|--------------------------|-----------------------|----------------------------|----------------|----------------|
|                                         |                |                               | Substituted<br>Level<br>(dBm) | Antenna<br>Gain<br>(dBi) | Cable<br>Loss<br>(dB) |                            |                |                |
| 1.4MHz QPSK RB1#0, Frequency: 1710.7MHz |                |                               |                               |                          |                       |                            |                |                |
| 3421.400                                | H              | 79.50                         | -25.63                        | 4.73                     | 2.32                  | -23.22                     | -13.00         | 10.22          |
| 3421.400                                | V              | 71.28                         | -34.45                        | 4.73                     | 2.32                  | -32.04                     | -13.00         | 19.04          |
| 5132.100                                | H              | 69.94                         | -35.81                        | 10.74                    | 2.77                  | -27.84                     | -13.00         | 14.84          |
| 5132.100                                | V              | 70.81                         | -35.46                        | 10.74                    | 2.77                  | -27.49                     | -13.00         | 14.49          |
| 1.4MHz QPSK RB1#0, Frequency: 1745MHz   |                |                               |                               |                          |                       |                            |                |                |
| 3490.000                                | H              | 79.80                         | -25.36                        | 5.38                     | 2.35                  | -22.33                     | -13.00         | 9.33           |
| 3490.000                                | V              | 74.78                         | -31.04                        | 5.38                     | 2.35                  | -28.01                     | -13.00         | 15.01          |
| 5235.000                                | H              | 67.33                         | -38.48                        | 10.74                    | 2.81                  | -30.55                     | -13.00         | 17.55          |
| 5235.000                                | V              | 68.41                         | -37.92                        | 10.74                    | 2.81                  | -29.99                     | -13.00         | 16.99          |
| 1.4MHz QPSK RB1#0, Frequency: 1779.3MHz |                |                               |                               |                          |                       |                            |                |                |
| 3558.600                                | H              | 81.50                         | -23.61                        | 5.92                     | 2.36                  | -20.05                     | -13.00         | 7.05           |
| 3558.600                                | V              | 73.87                         | -31.79                        | 5.92                     | 2.36                  | -28.23                     | -13.00         | 15.23          |
| 5337.900                                | H              | 65.31                         | -40.56                        | 10.92                    | 2.84                  | -32.48                     | -13.00         | 19.48          |
| 5337.900                                | V              | 66.36                         | -40.03                        | 10.92                    | 2.84                  | -31.95                     | -13.00         | 18.95          |

Note:

1. The unit of antenna gain is dBi for frequency above 1GHz.

2. Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

## **7. EUT PHOTOGRAPHS**

---

Please refer to the attachment 2507A33259E-RF-EXP EUT External photos and 2507A33259E-RF-INP EUT Internal photos.

## **8. TEST SETUP PHOTOGRAPHS**

---

Please refer to the attachment 2507A33259E-RF-TSP Setup photos.

## Declarations

1. Bay Area Compliance Laboratories Corp. (Xiamen) is not responsible for authenticity of any information provided by the applicant. Information from the applicant that may affect test results are marked with an asterisk “★”.
2. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested.
3. Unless required by the rule provided by the applicant or product regulations, then decision rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor  $k=2$  with the 95% confidence interval.
5. This report cannot be reproduced except in full, without prior written approval of Bay Area Compliance Laboratories Corp. (Xiamen).
6. This report is valid only with a valid digital signature. The digital signature may be available only under the adobe software above version 7.0.

**\*\*\*\*\* END OF REPORT \*\*\*\*\***