



惠州市创华实业有限公司

HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.

承认书

PRODUCT SPECIFICATION FOR APPROVAL

客户/CUSTOMER NO : FJ-ST

客户料号/CUSTOMER P/N: TX00000319


客户型号/Description: K10 天线线圈/ANT Coi

产品描述/DESCRIPTION : 非接天线/Disconnect ANT 基材Material+2UEW0.1+PCB 66X49.49

版 本/version : V06(客供资料fj-k10-210105)

编号/PART NUMBER : K10-V06

客户确认签章/CUSTOMER APPROVED SIGNATURE

检 查 (TESTER)	审 核 (CHD. BY)	批 准 (APPD. BY)
	 Date: 2021.10.14 15:48:22 +08'00'	

请确认后七天内回签,如不回签则视贵司默认接收,且在发生品质异议时按此份标准执行.

Please confirm and send it back with signature within 7days. If no sign back, we will assume your acceptance. And if there is any quality dissent, two parties will execute according to this agreement.

日 期 DATE	制 作 MADE. BY	审 核 CHD. BY	批 准 APPD. BY	版 本 REV	页 码 PAGE
2021-09-24	鲁红阳	田长波	曹后川	V06	1/6

惠州市创华实业有限公司/ HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.

地址: 惠州市惠城区小金口街道办事处金叶街 62 号 B 栋

Building B, No. 62, Jinye Street, Xiaojinkou Sub-district Office, Huicheng District, Huizhou

联系电话: 0752-3106952


TEL: 0752-3106952

传 真: 0752-5313208

Fax: 0752-5313208

惠州市创华实业有限公司 HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.				CUSTOMER PART NO	
				产品类型 PRODUCT TYPE	K10-210105
				日期 DATE	2021-09-24
产品编号 PART NUMBER		版本 version	V06	页码 PAGE	3/6

一、外观图/EXTERNAL VIEW

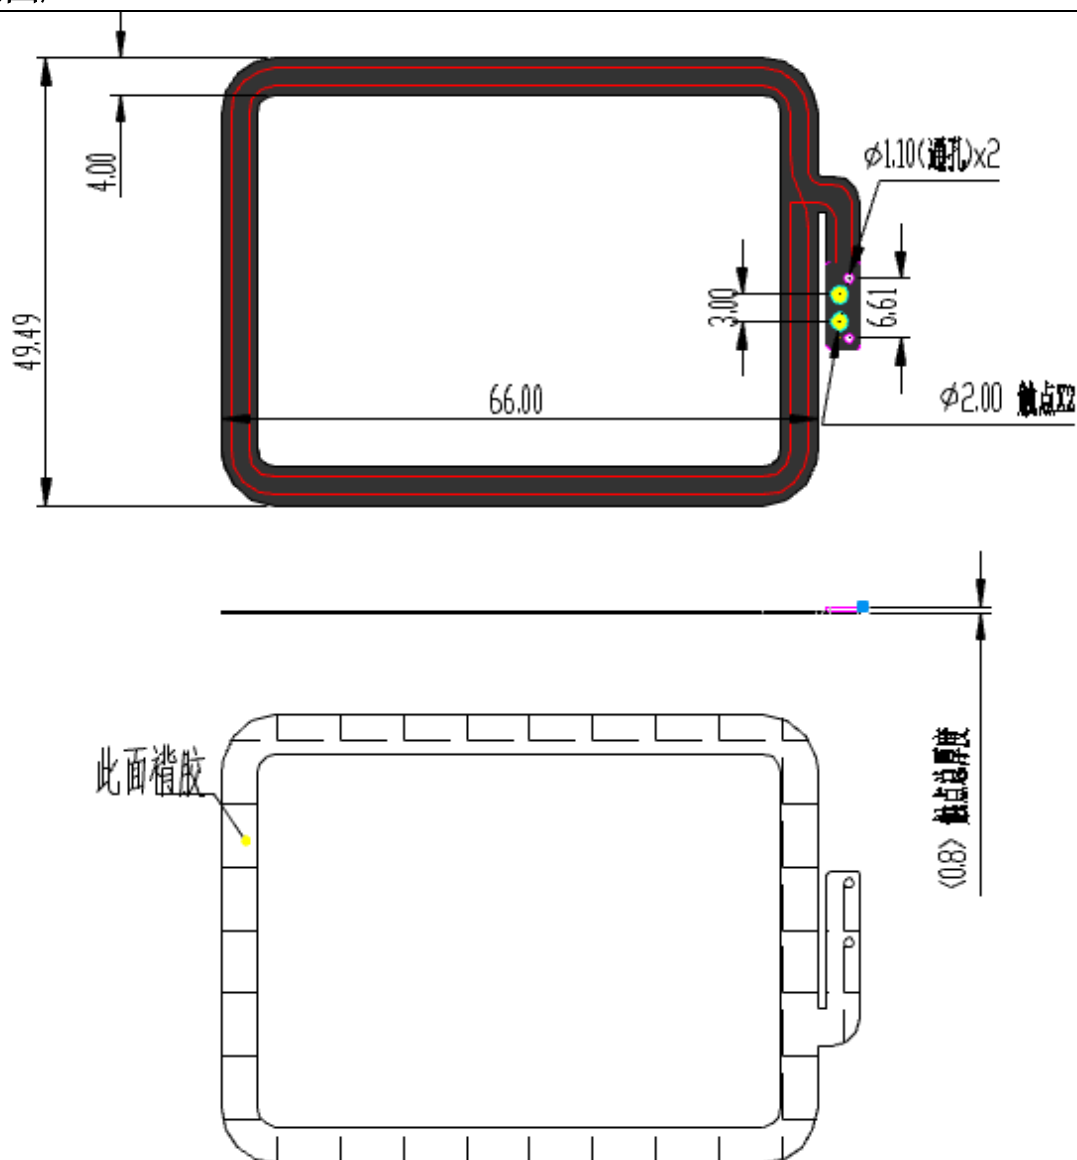

备注：1、单位：mm，未标尺寸±0.1mm；
 2、焊接工艺采用焊锡工艺或激光焊或电阻焊均可，保证焊接强度和整体接入电阻小于3欧姆即可。
 3、产品整体背胶。
Note:
1, unit: mm, unmarked size ±0.1mm;
2, welding process using solder process or laser welding or resistance welding can ensure welding strength and overall access Resistance is less than 3 ohms.
3, the product overall back glue.

本外观图来源于客供图纸，只供技术参数参考，成品交付实物以包装插图为准(包含我司生产必须附加的辅材及工艺附加物)。


This appearance drawing is from the customer's drawings, only for technical parameters reference, the finished product delivery physical package illustration(including our production must be added to the auxiliary materials and process additives).

制 作/MADE. BY

鲁红阳

 惠州市创华实业有限公司 HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.				客户料号 CUSTOMER PART NO	
				产品类型 PRODUCT TYPE	K10-210105
				日 期 DATE	2021-09-24
产品编号 PART NUMBER		版 本 version	V06	页 码 PAGE	4/6

二、原理图/ SCHEMATIC DIAGRAM:



三、绕线结构/WINDING STRUCTURE

绕组 WIND	起--始 Start-Finish	绕规 WIRE GUAGSE	圈数 TURN	胶带 Tape	挡墙	铁氟龙套管 TFL TUBE		REMARKING 备注
						START	FINISH	
N1	S--F	2UEW-B ϕ 0.10*1P	2TS		/			按资料

注意：第二圈和第一圈保持间隙，排线整齐，不可堆线，交叉打结；
This appearance drawing is from the customer's drawings, only for technical parameters reference, the finished product delivery physical package illustration(including our production must be added to the auxiliary materials and process additives).

四．主要功能、性能、结构、技术参数

- | | |
|--|--|
| <div>1.主要功能：使用电流范围：10~100mA
使用电压范围：1~12V
使用频率范围：20~200KHz
直流电阻：3Ω MAX 25℃</div> <div>2. 使用环境温度：-20℃--40℃</div> <div>3.引出端子：</div> <div>4. 散热条件：自然冷却</div> <div>5.温升：无要求</div> <div>6. 耐压：300VAC</div> <div>7. 绝缘方式：B 级绝缘</div> <div>8. 气压：无要求</div> <div>9. 震动：无要求</div> <div>10. 盐雾：无要求</div> <div>11. 安装方式：接触导通</div> <div>12. 产品重量：</div> <div>13. 标识：无要求</div> | <div>1. Main function: Current range: 10~100mA
Voltage range: 1~12V
Frequency range: 20~200KHz
Dc resistance: 3Ω MAX 25℃</div> <div>2. Ambient temperature: -20℃--40℃</div> <div>3. Lead out terminal:</div> <div>4. Heat dissipation condition: natural cooling</div> <div>5. Temperature rise: No requirement</div> <div>6. Withstand voltage: 300VAC</div> <div>7. Insulation method: Class B insulation</div> <div>8. Air pressure: No requirement</div> <div>9. Vibration: No requirement</div> <div>10. Salt spray: No requirement</div> <div>11. Installation mode: contact conduction</div> <div>12. Product weight:</div> <div>13. Identification: No requirement</div> |
|--|--|

制 作/MADE. BY	鲁红阳
--------------	-----

 惠州市创华实业有限公司 HUIZHOU SHI CHUANGHUA INDUSTRIAL CO., LTD.				客户料号 CUSTOMER PART NO	
				产品类型 PRODUCT TYPE	K10-210105
				日期 DATE	2021-09-24
产品编号 PART NUMBER		版本 version	V06	页 码 PAGE	5/6

五、材料表/MATERIAL LIST

一、外观图/EXTERNAL VIEW							
序号 NO	名称 ITEM	材料 (MATERIAL)					
		制造商 MANUFACTURER	材料描述 MATERIAL DESCRIPTION	型号TYPE	TEMP. RATING FLAME CLASS	UL NO	USE
1	WIRE	BOLUO FENGCHING MAGNET WIRE CO.,LTD	Φ0.10mm	2UEW	130℃	E172395	√
		GUANGDONGJINYANELECTROTECHNICS JOINT STOCK CO LTD	Φ0.10mm	2UEW	130℃	E238500	√
2	INSULATION SLICES	Heyuan poly plastic technology co. LTD	T0.15mm	PVC	80℃		√

六、包装规格/Packing specification

采用 外箱+ 内盒 包装方式

External box+ internal box packing method
 1内盒数量: 32张*16个/张=512个
 每箱数量 4盒*512个/盒=2048个

1 Number of boxes: 32 pieces *16 pieces/pieces = 512 pieces
 Quantity per box 4 boxes *512 PCS/box = 2048 PCS

内盒产品排列方式: 箱内共4层

Product arrangement in the inner box: there are 4 layers in the box



制 作/MADE. BY	鲁红阳
--------------	-----



2021-09-24

6/6

Frequency (Hz)	Returnloss (dB)	Returnphase (°)	Transmiss	Transmiss	Rs (Ohm)	Xs (Ohm)	Z (Ohm)	Magnitude	SWR	Theta	GroupDelay (nS)
1000000	-0.413248108	169.0609383	0	0	1.200096	4.784885	4.933088	0.953537	42.0451	75.92009	0
1000000	-0.398638496	169.0860134	0	0	1.157636	4.774039	4.91239	0.955142	43.58543	76.36968	0
1000000	-0.399253071	169.0858149	0	0	1.159421	4.774119	4.912888	0.955075	43.51836	76.34967	0
1000000	-0.408696052	169.029877	0	0	1.186944	4.798615	4.943231	0.954037	42.51322	76.10668	0
1000000	-0.405925485	169.0714581	0	0	1.178818	4.780351	4.923553	0.954341	42.80328	76.14743	0
1000000	-0.408203412	169.0463109	0	0	1.185481	4.791388	4.935866	0.954091	42.56451	76.10302	0
1000000	-0.409957213	169.0335302	0	0	1.190598	4.79699	4.942534	0.953898	42.38248	76.06104	0