






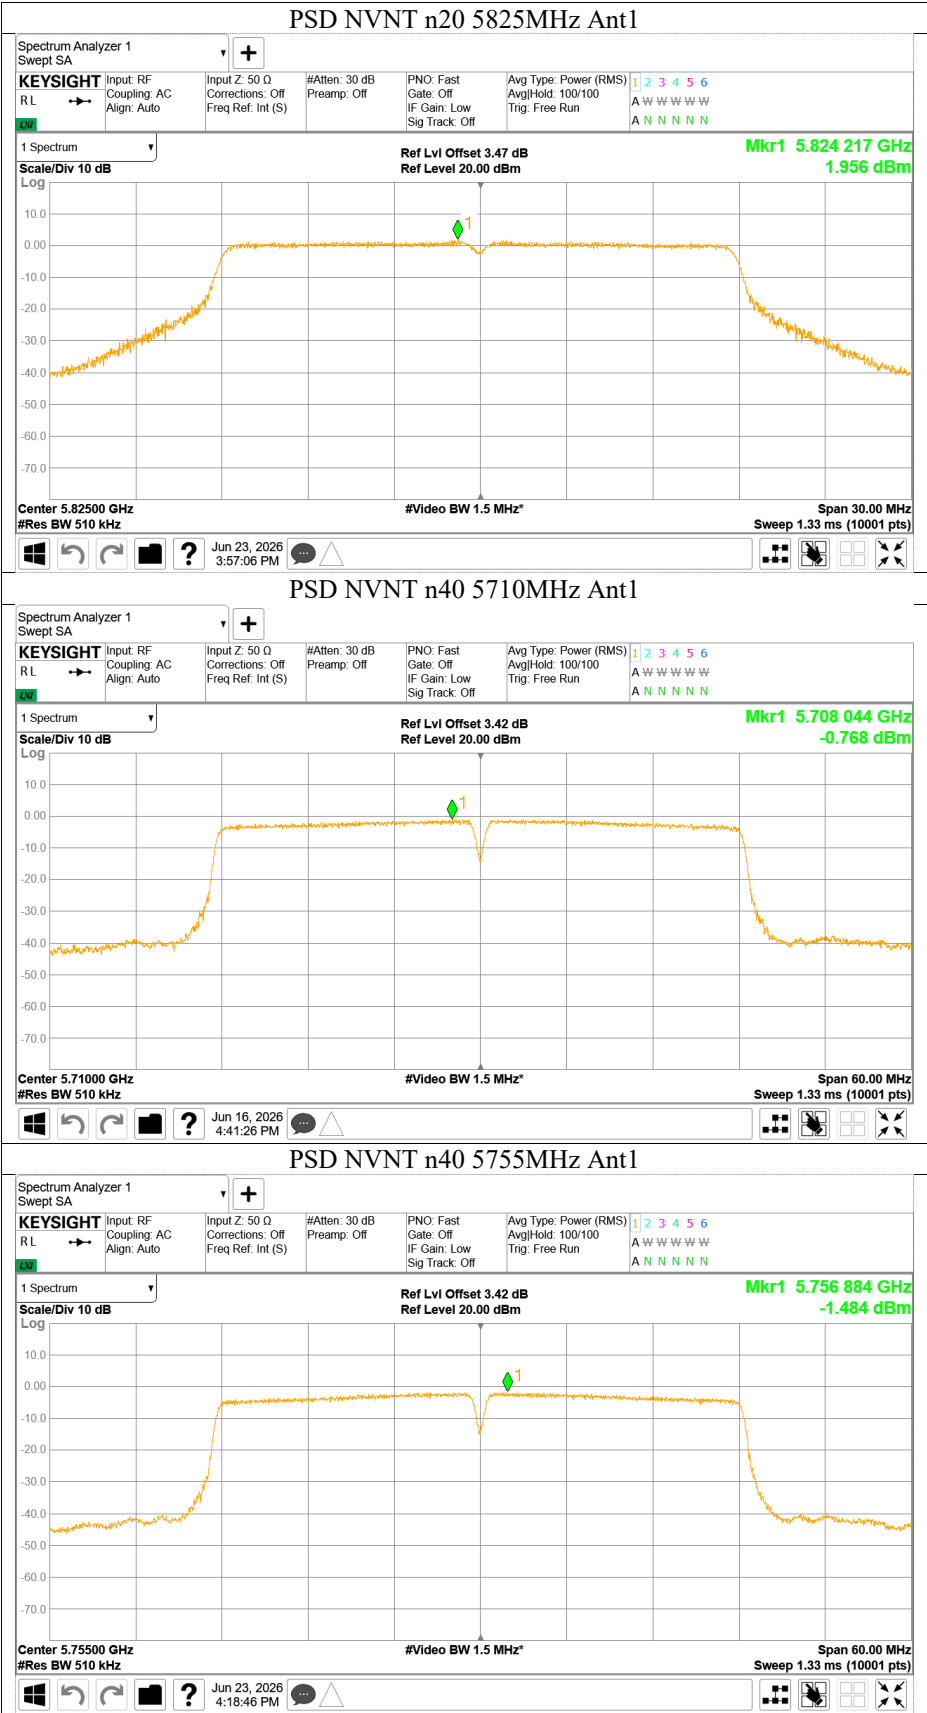


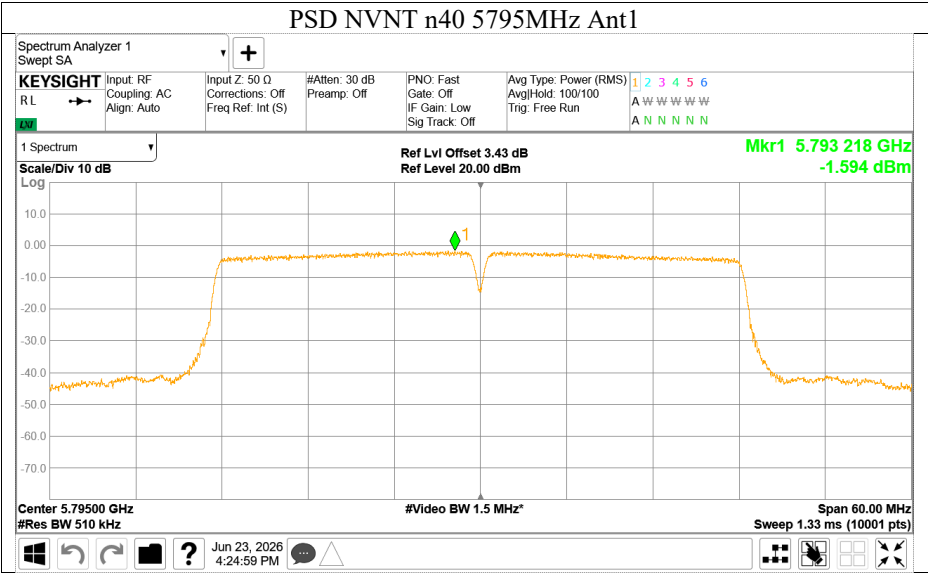


4 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT U-NII-1	a	5180	Ant1	21.285	--	Pass
	a	5200	Ant1	21.084	--	Pass
	a	5240	Ant1	21.401	--	Pass
	n20	5180	Ant1	23.012	--	Pass
	n20	5200	Ant1	22.421	--	Pass
	n20	5240	Ant1	22.438	--	Pass
	n40	5190	Ant1	39.035	--	Pass
	n40	5230	Ant1	39.11	--	Pass

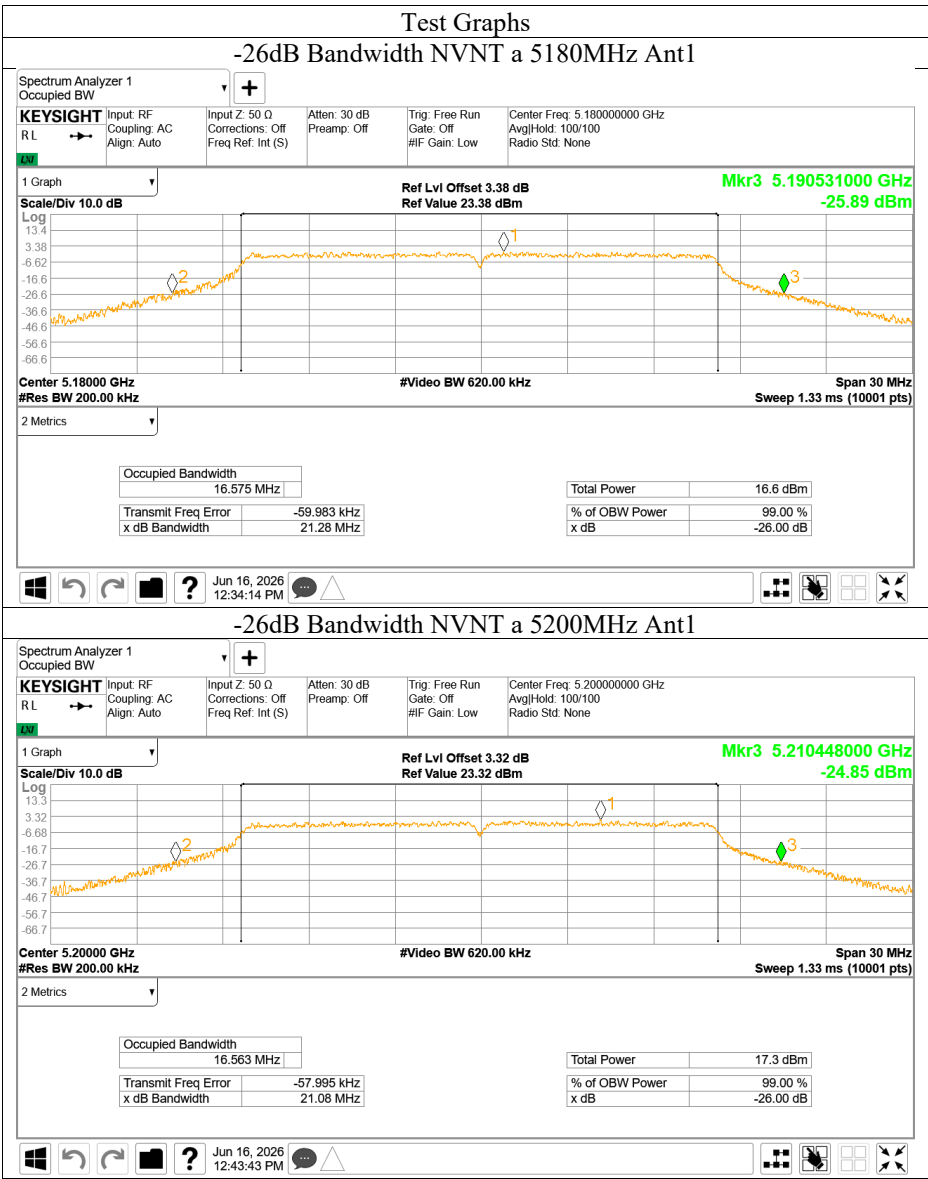


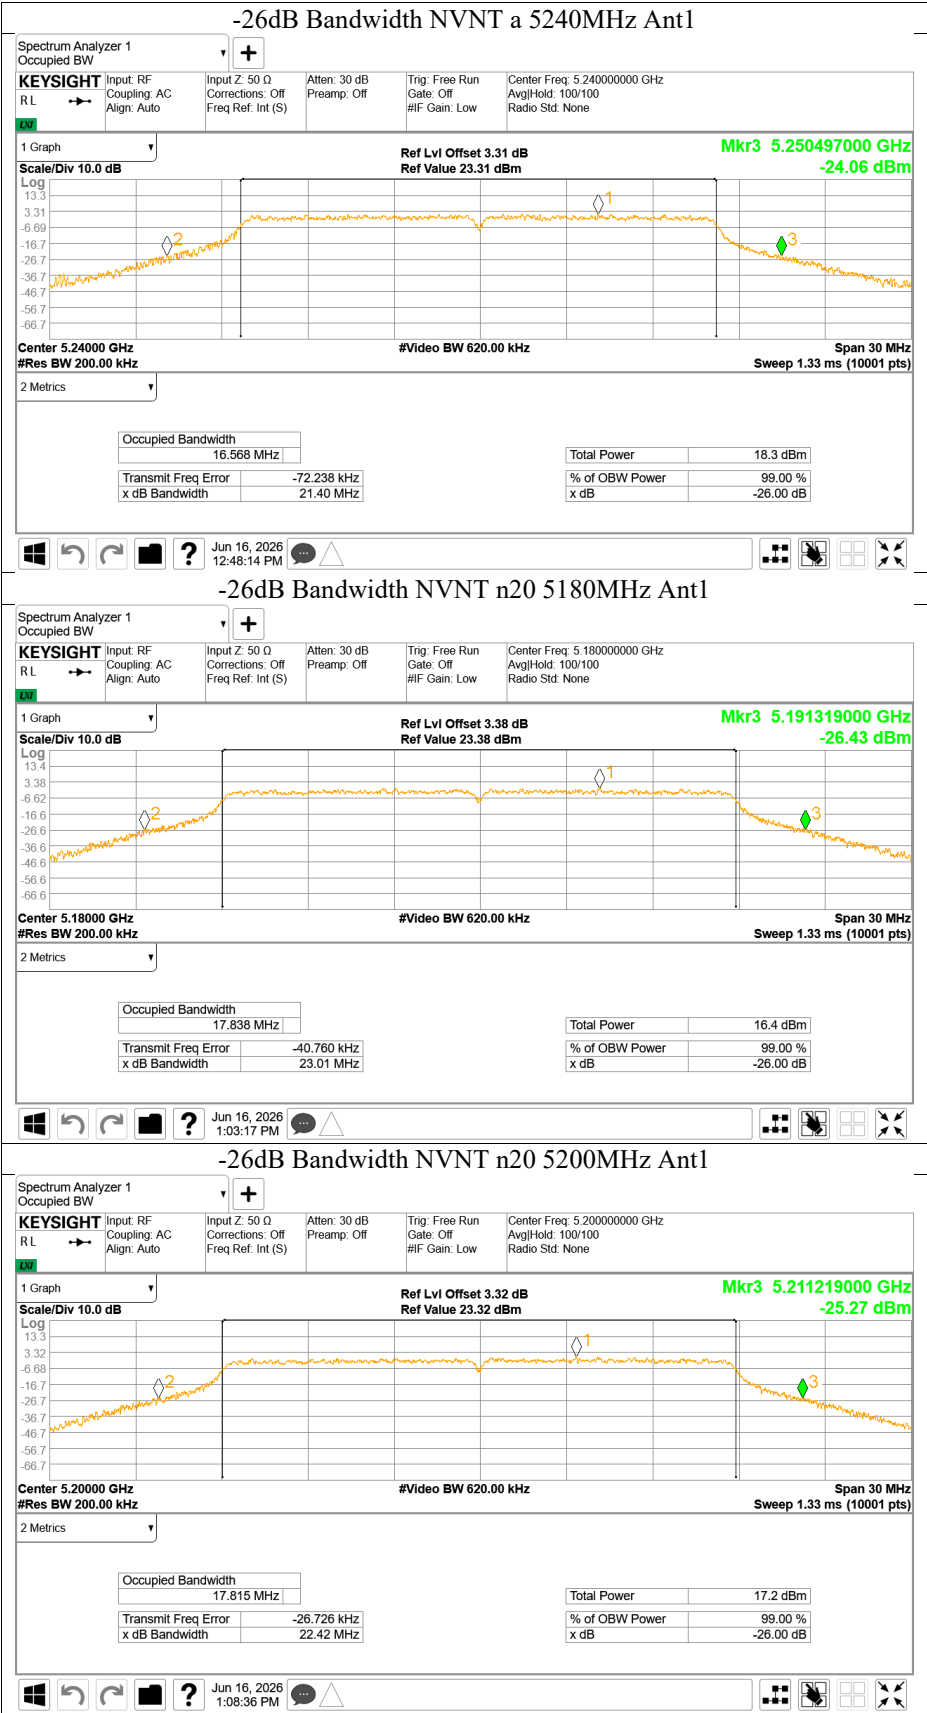


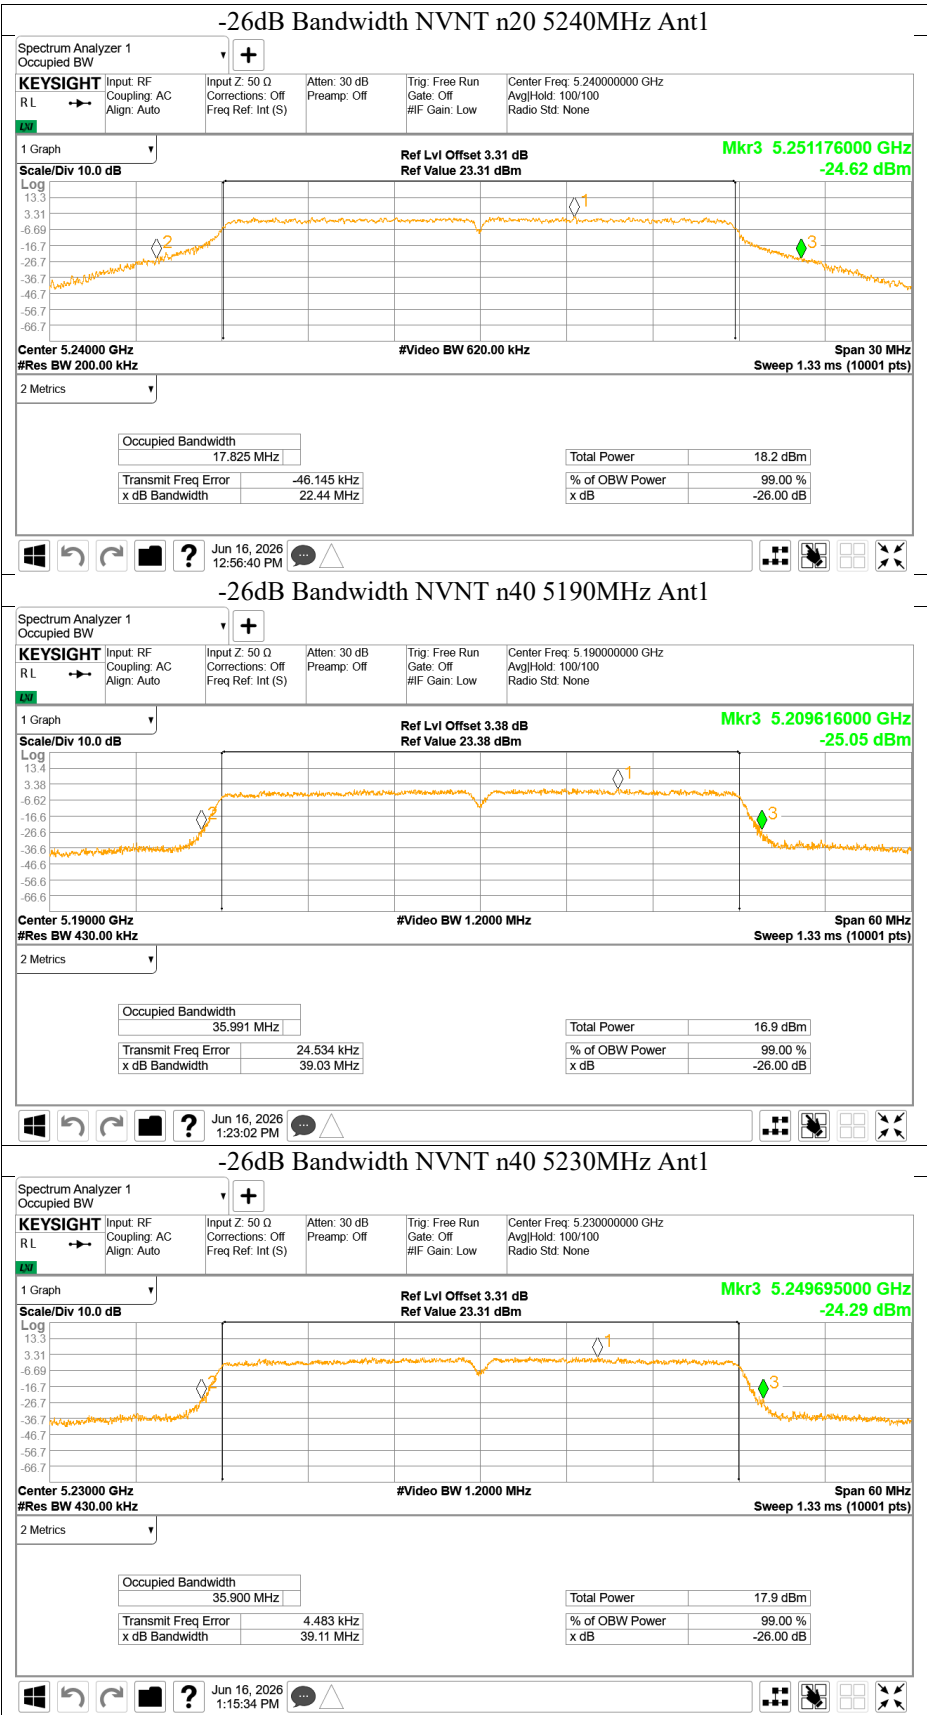





Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT U-NII-2A	a	5260	Ant1	21.419	--	Pass
	a	5280	Ant1	21.263	--	Pass
	a	5320	Ant1	21.18	--	Pass
	n20	5260	Ant1	22.479	--	Pass
	n20	5280	Ant1	22.632	--	Pass
	n20	5320	Ant1	22.646	--	Pass
	n40	5270	Ant1	38.834	--	Pass
	n40	5310	Ant1	38.858	--	Pass

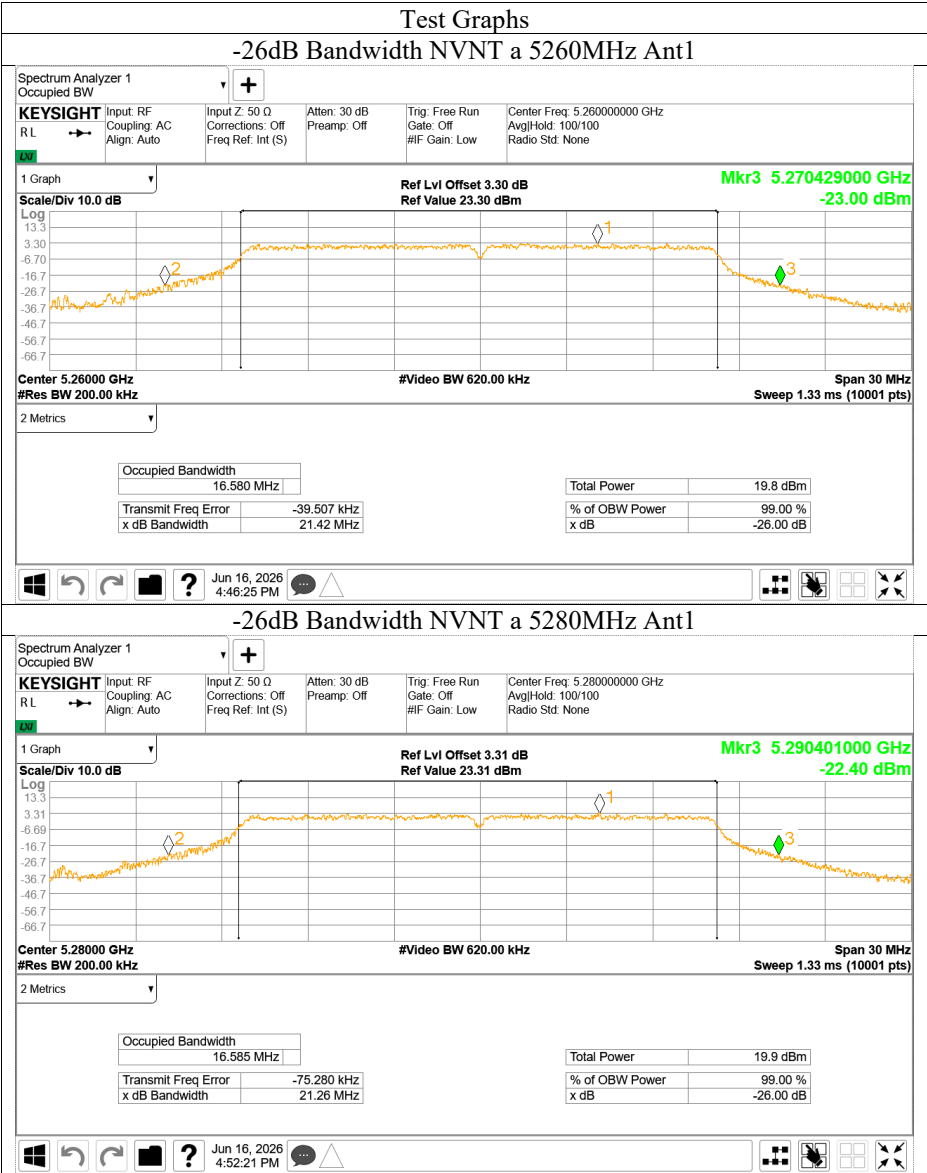


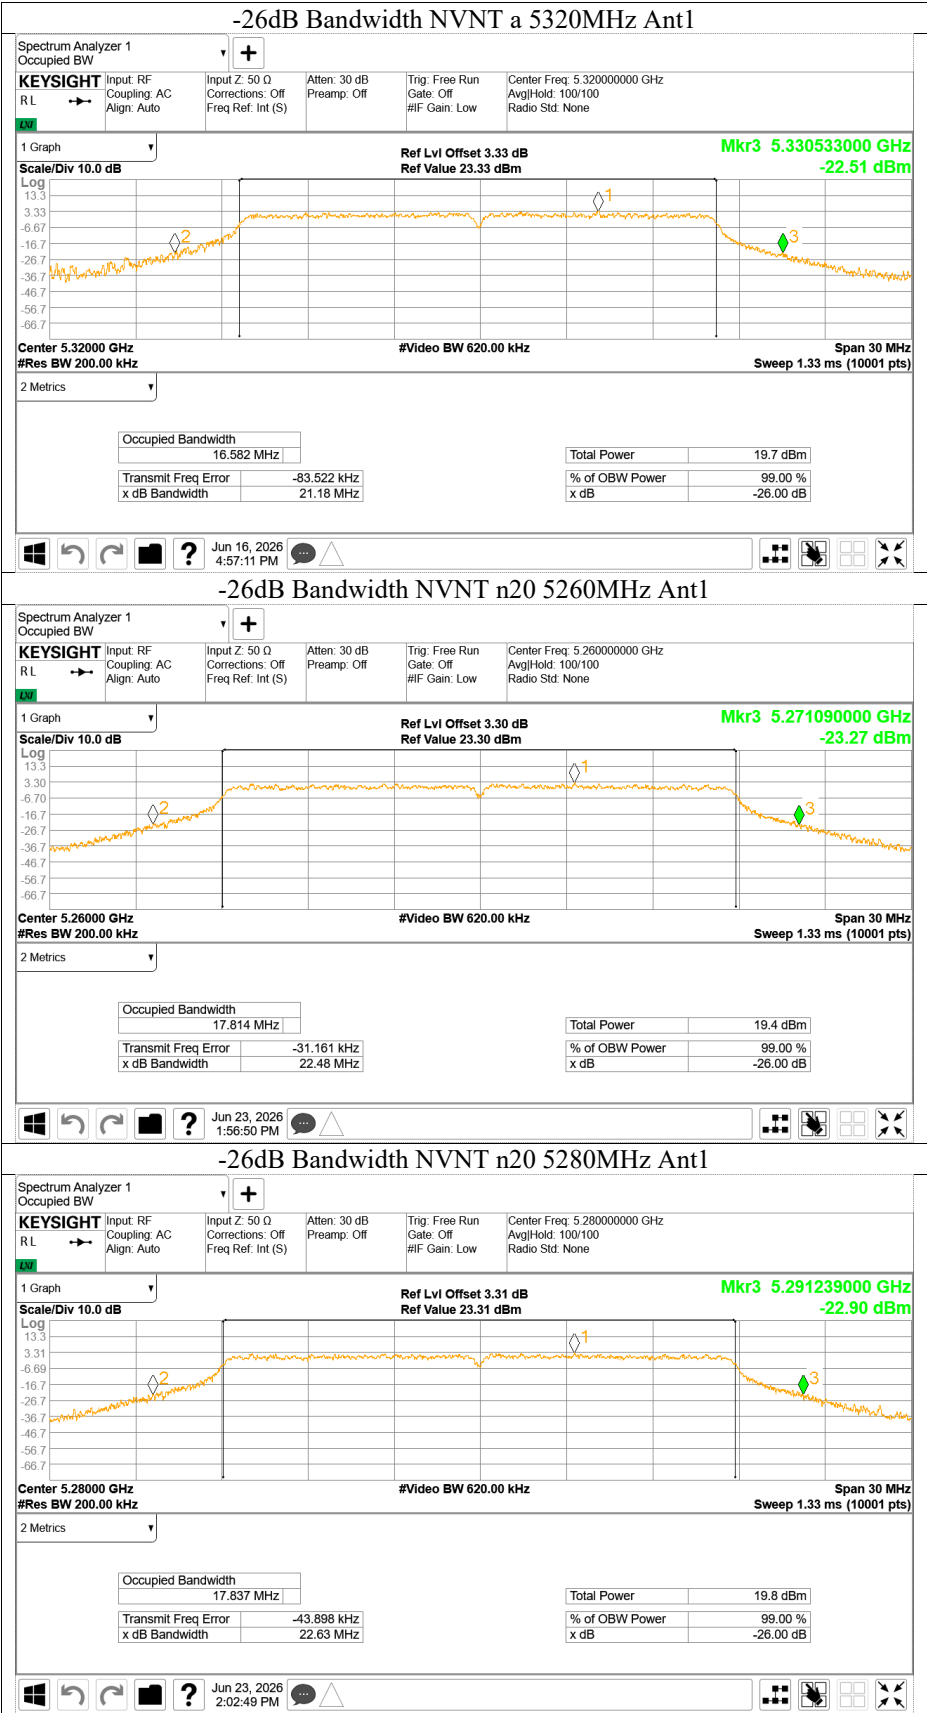


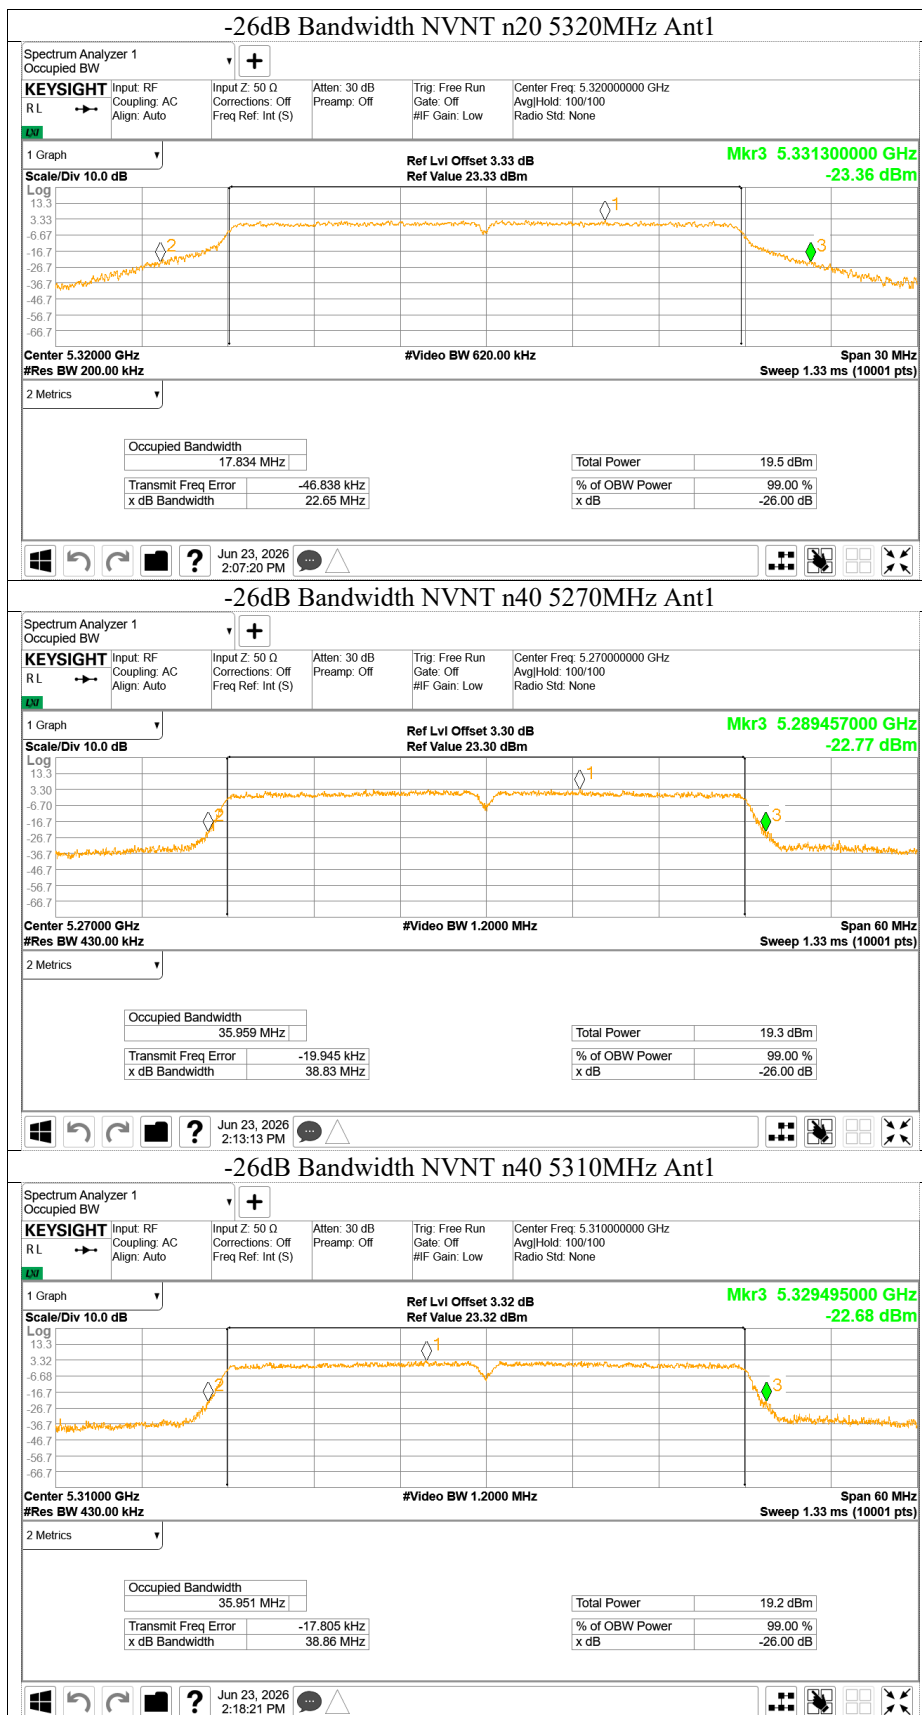


Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT U-NII-2C	a	5500	Ant1	24.99	--	Pass
	a	5600	Ant1	21.213	--	Pass
	a	5700	Ant1	22.821	--	Pass
	a	5720	Ant1	21.231	--	Pass
	a	5720 U-NII-2C	Ant1	15.90	--	Pass
	a	5720 U-NII-3	Ant1	5.40	--	Pass
	n20	5500	Ant1	23.04	--	Pass
	n20	5600	Ant1	22.842	--	Pass
	n20	5700	Ant1	22.923	--	Pass
	n20	5720	Ant1	23.162		
	n20	5720 U-NII-2C	Ant1	16.70	--	Pass
	n20	5720 U-NII-3	Ant1	6.5	--	Pass
	n40	5510	Ant1	38.787	--	Pass
	n40	5590	Ant1	39.066	--	Pass
	n40	5670	Ant1	38.821	--	Pass
	n40	5710	Ant1	38.682	--	Pass
	n40	5710 U-NII-2C	Ant1	34.5	--	Pass
	n40	5710 U-NII-3	Ant1	4.1	--	Pass

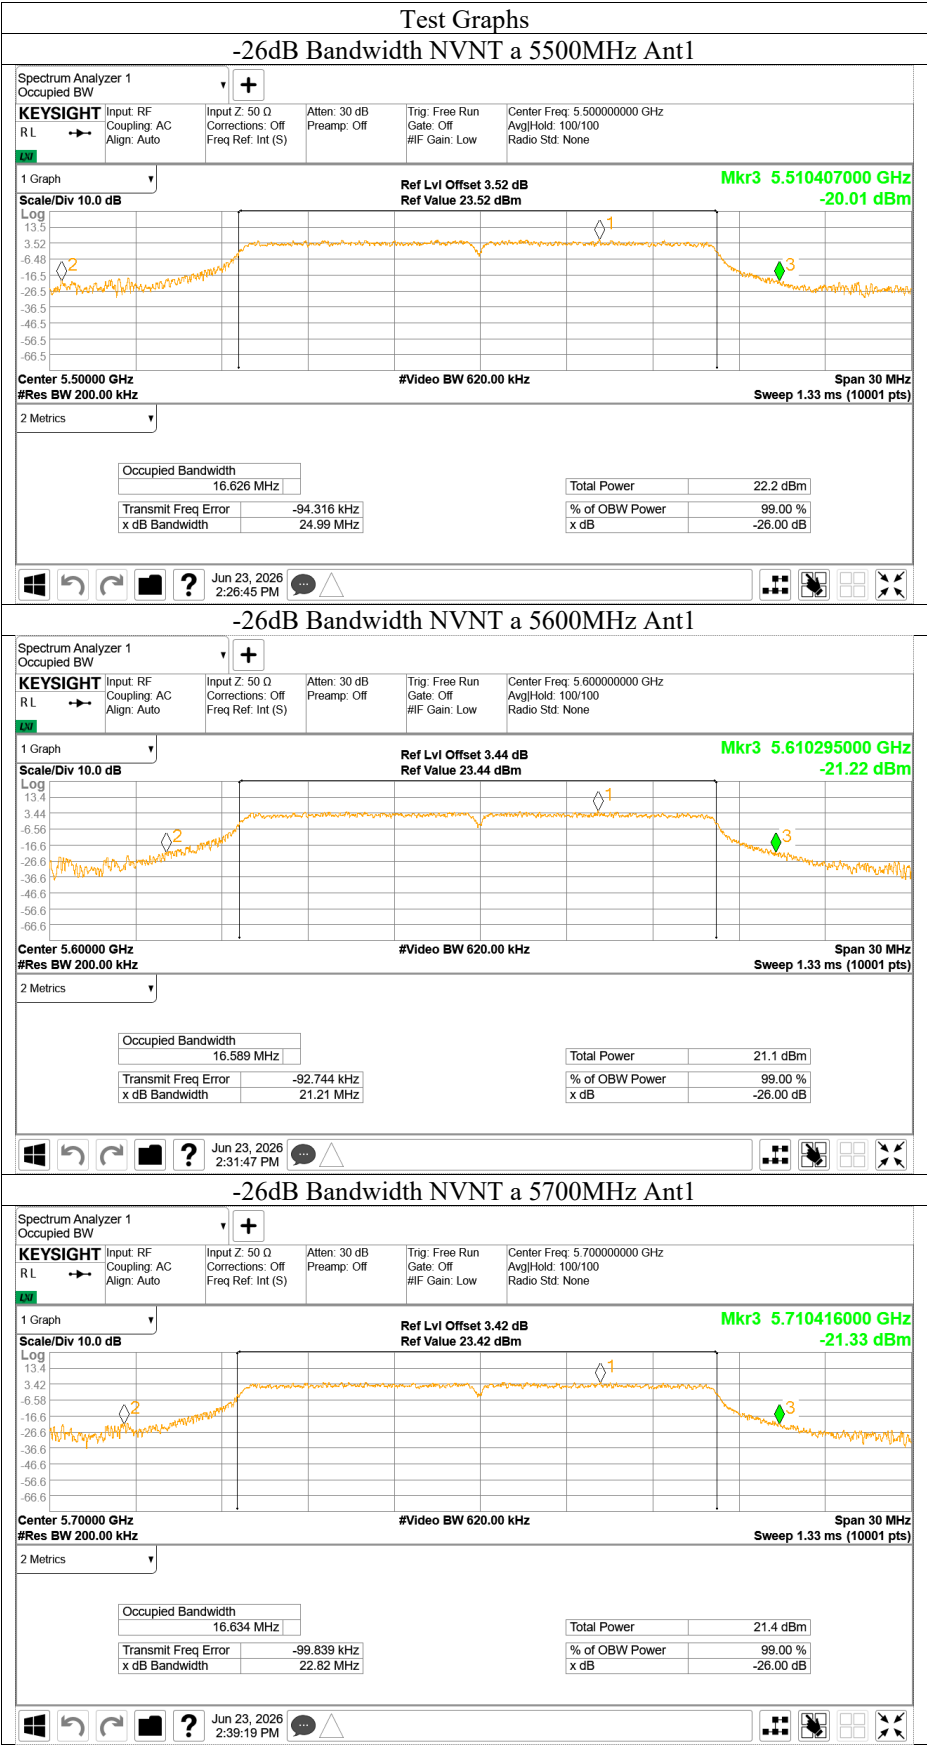

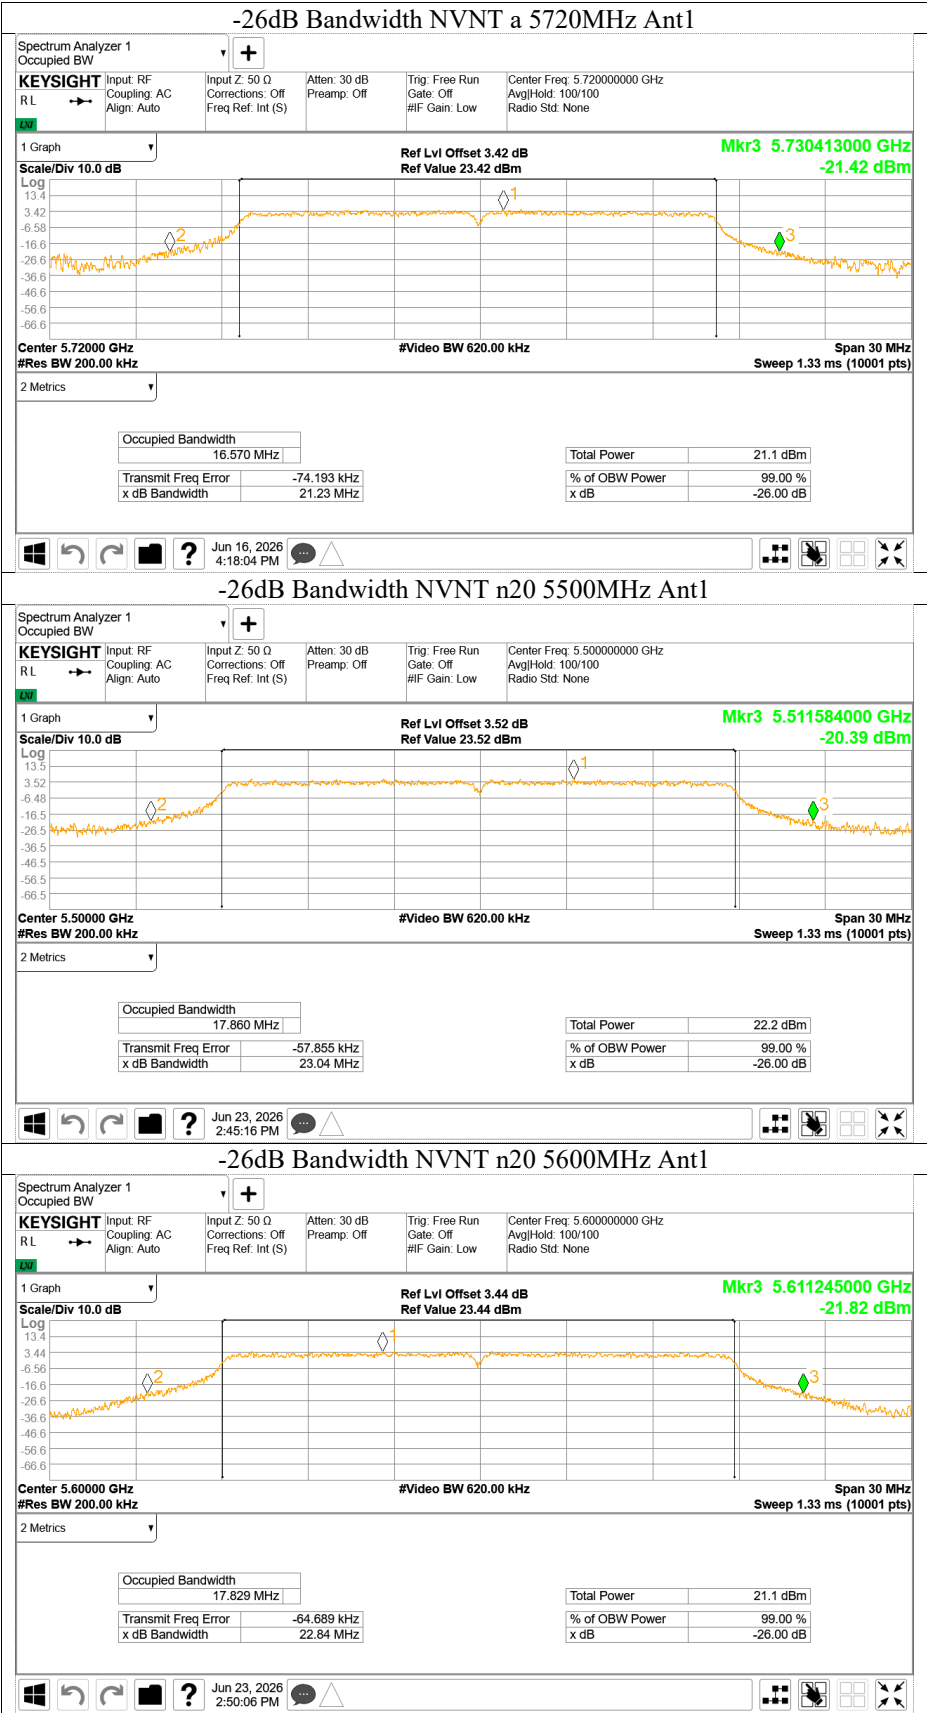

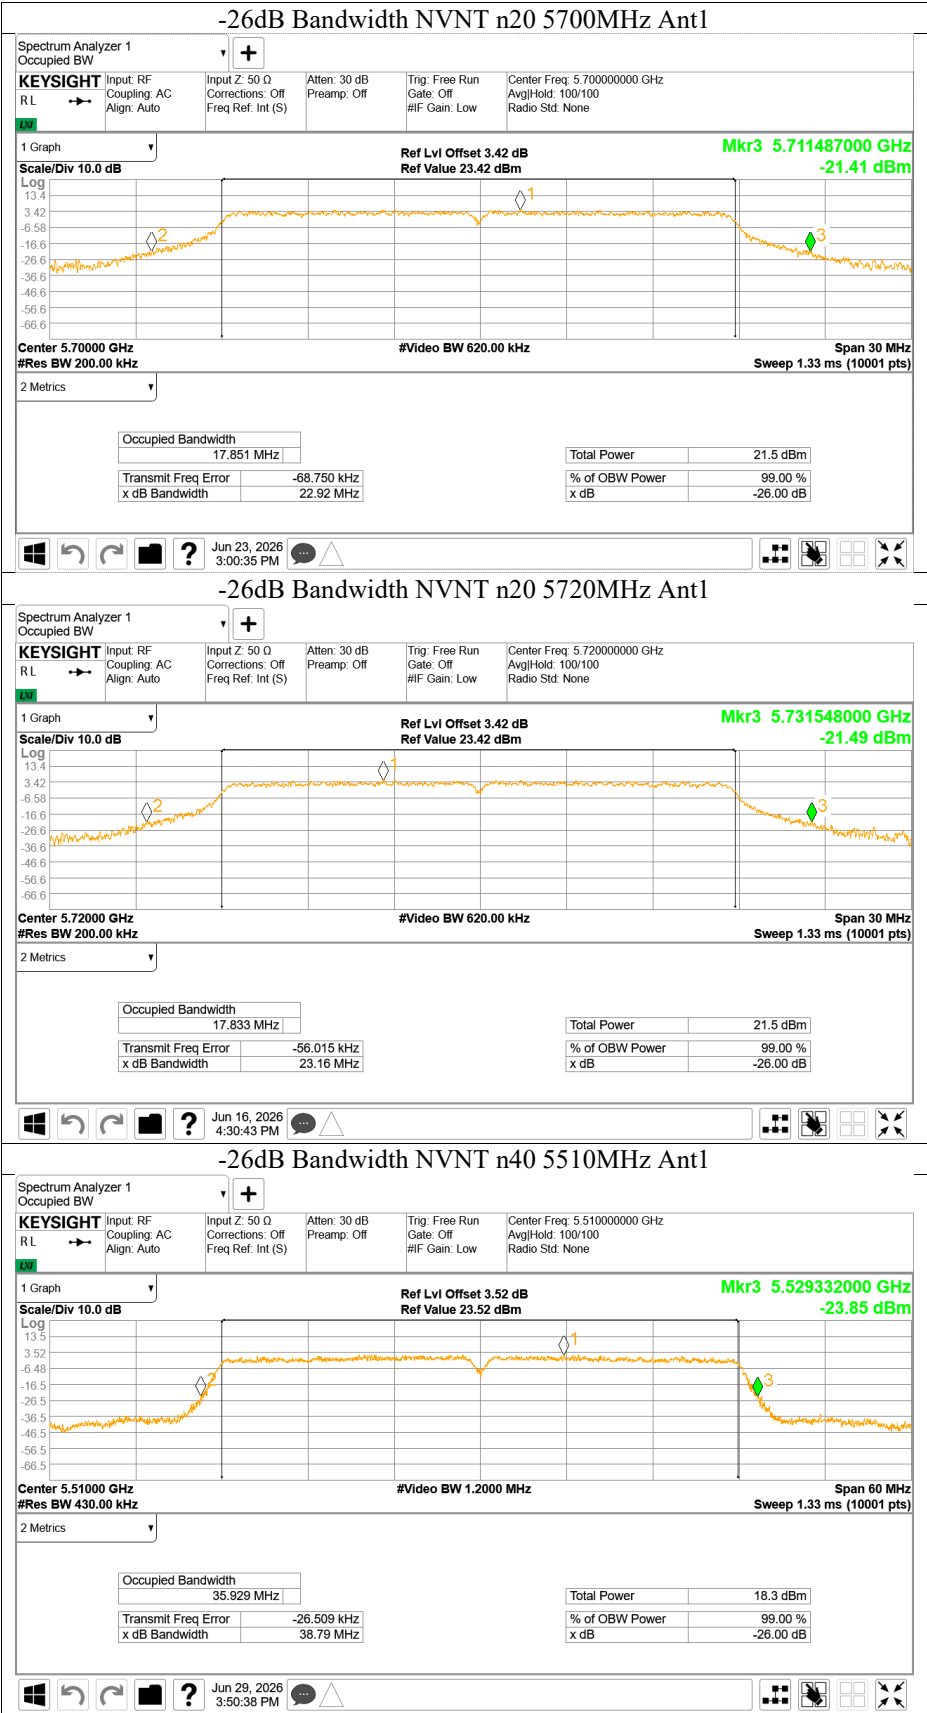


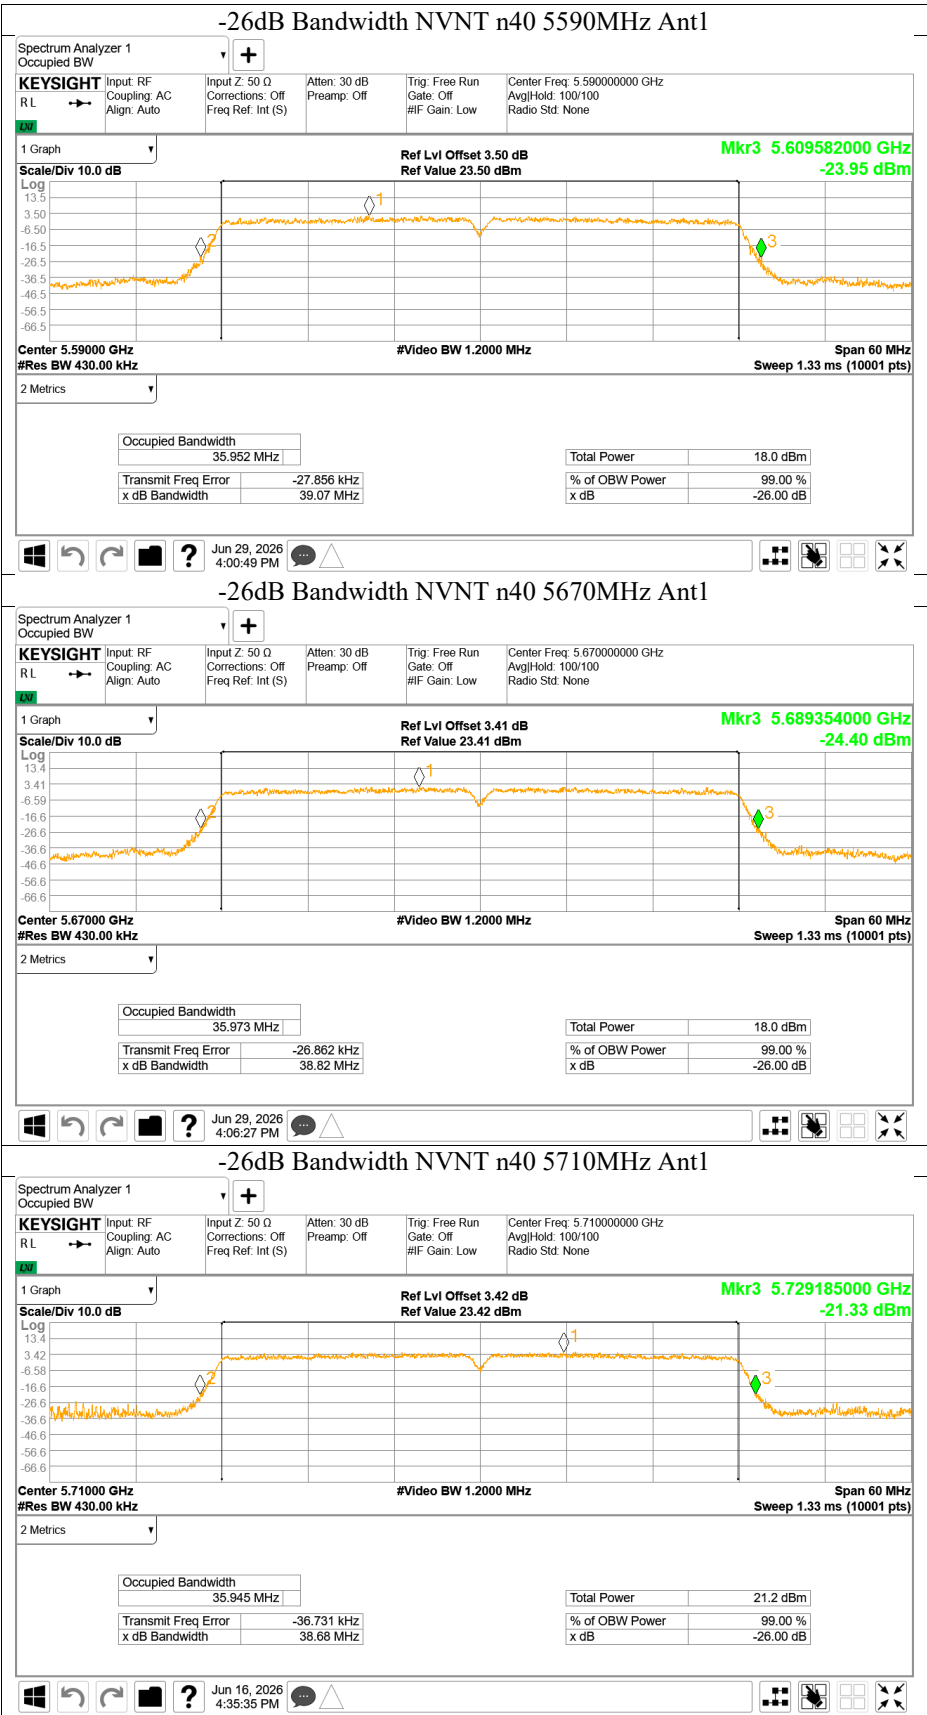





5 -6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6dB Bandwidth	Verdict
NVNT U-NII-3	a	5745	Ant1	16.54	>500KHz	Pass
	a	5785	Ant1	16.554	>500KHz	Pass
	a	5825	Ant1	16.548	>500KHz	Pass
	n20	5745	Ant1	17.791	>500KHz	Pass
	n20	5785	Ant1	17.795	>500KHz	Pass
	n20	5825	Ant1	17.795	>500KHz	Pass
	n40	5755	Ant1	36.347	>500KHz	Pass
	n40	5795	Ant1	36.369	>500KHz	Pass

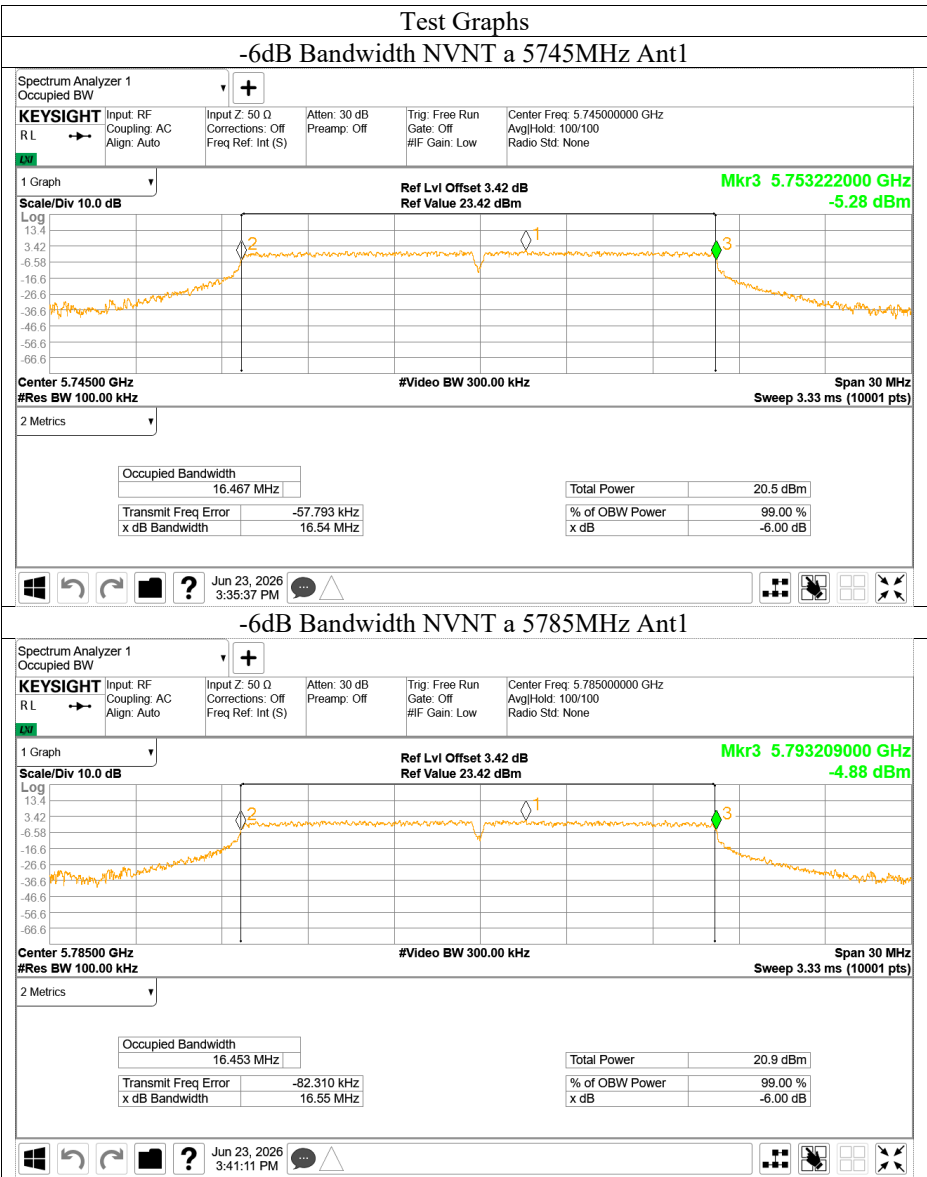

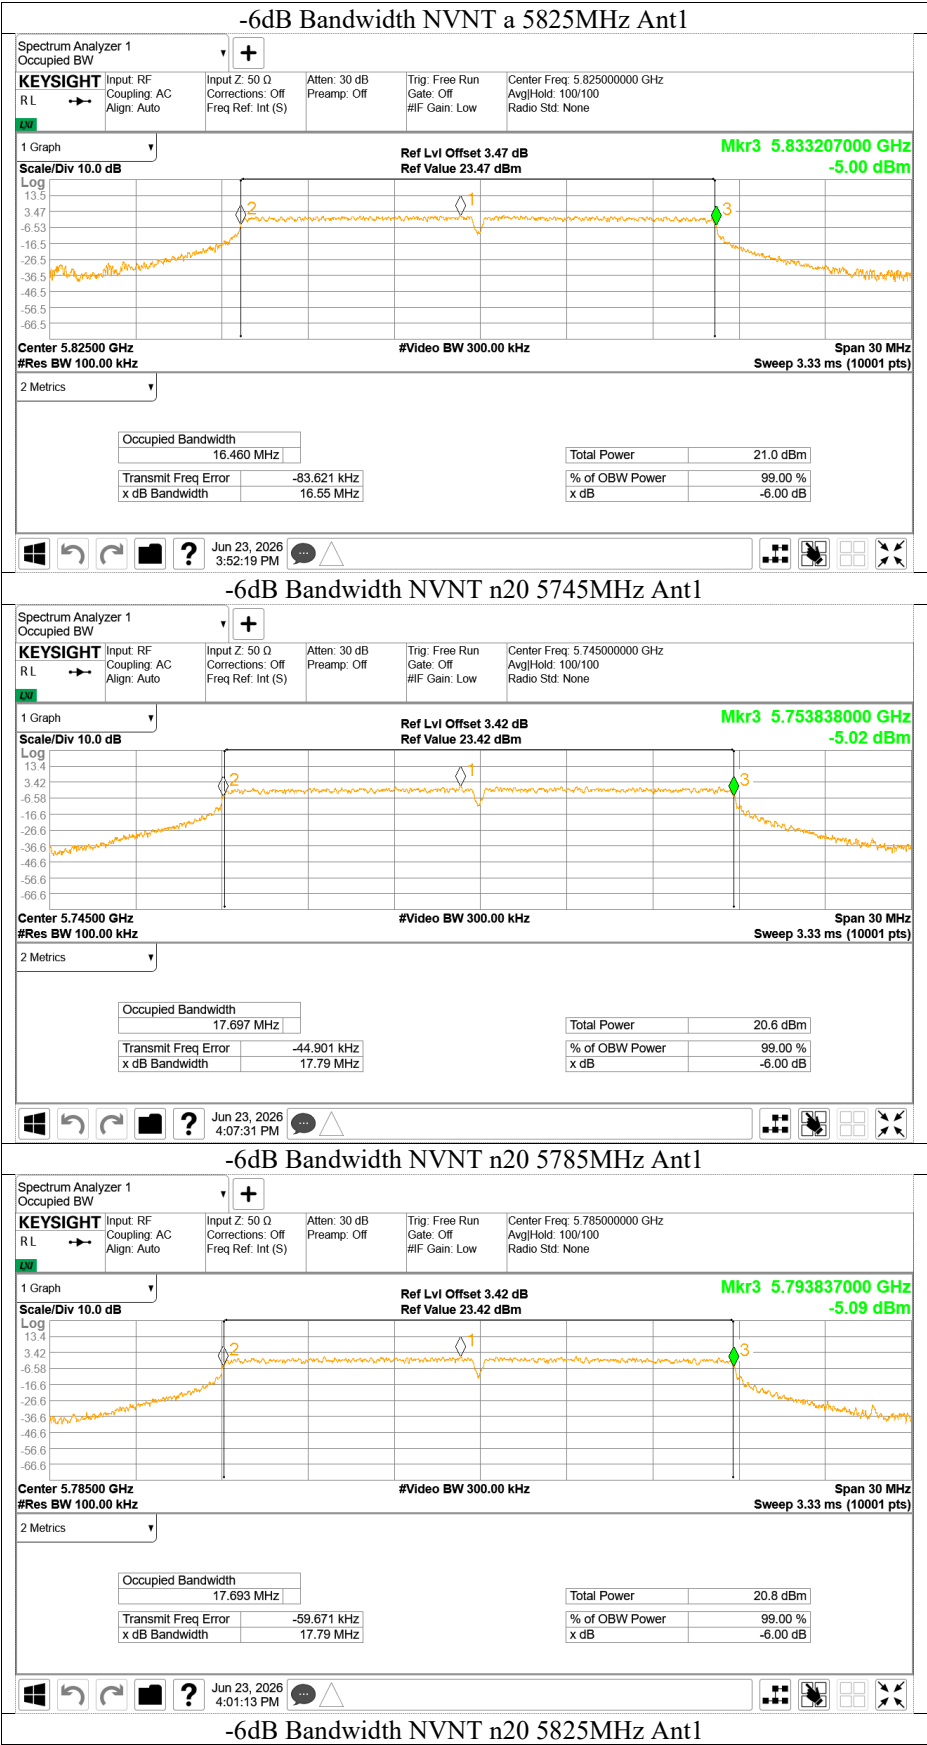


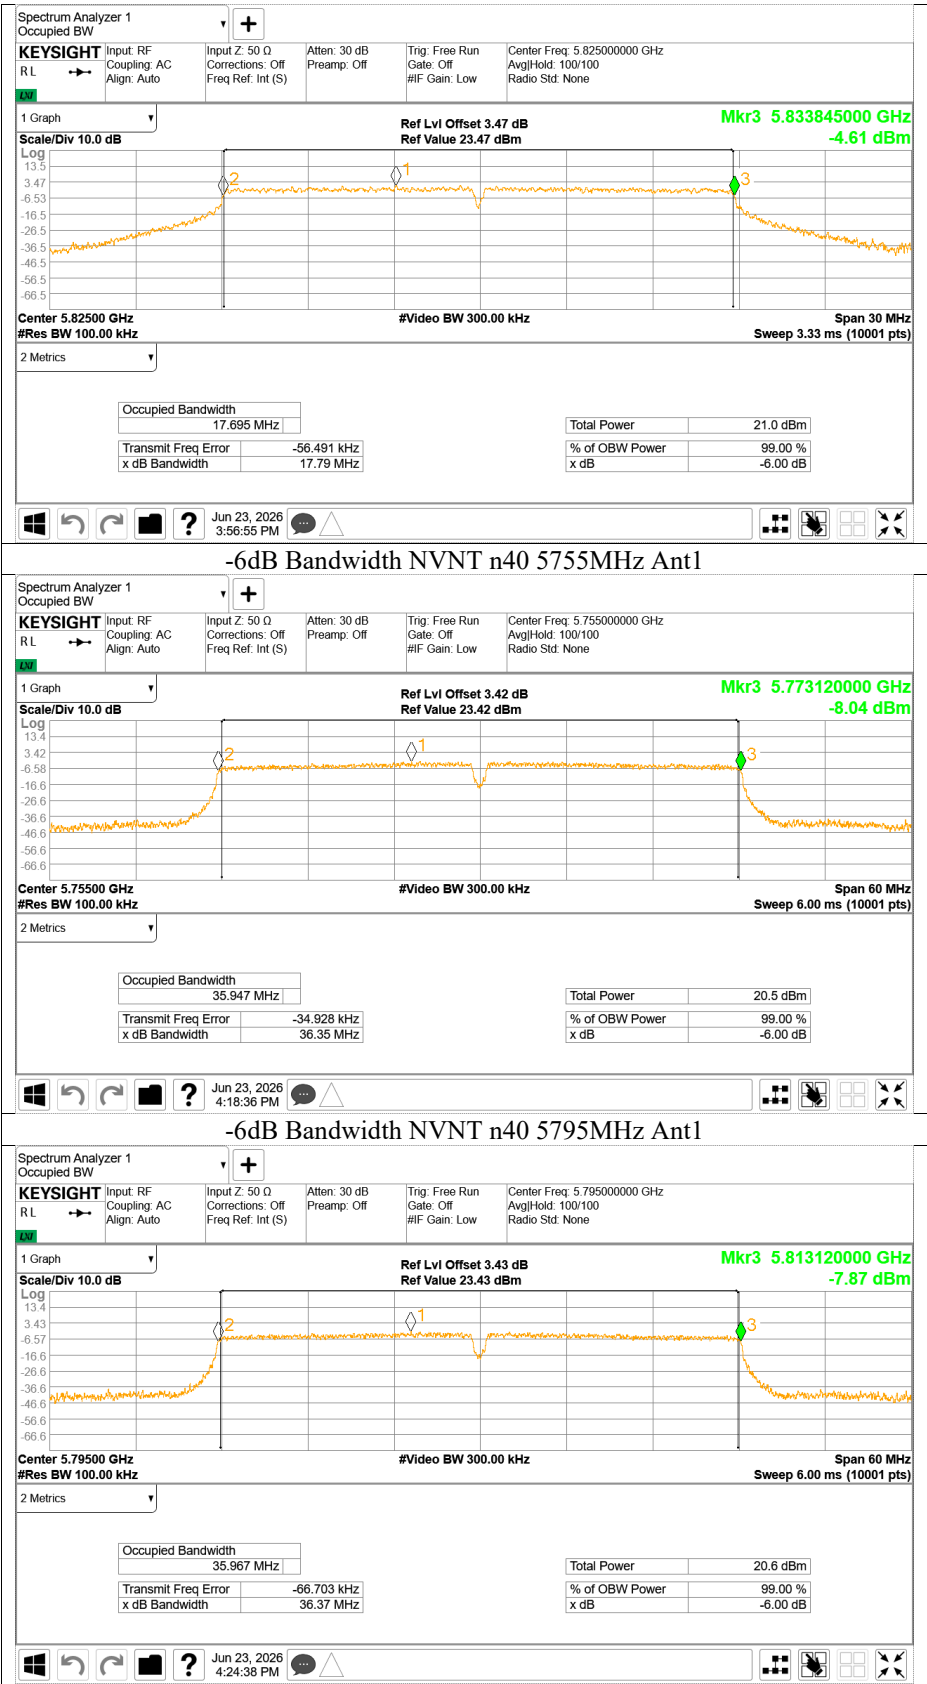





6 99% Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT U-NII-1	a	5180	Ant1	16.607
	a	5200	Ant1	16.59
	a	5240	Ant1	16.601
	n20	5180	Ant1	17.854
	n20	5200	Ant1	17.821
	n20	5240	Ant1	17.818
	n40	5190	Ant1	35.956
	n40	5230	Ant1	35.933

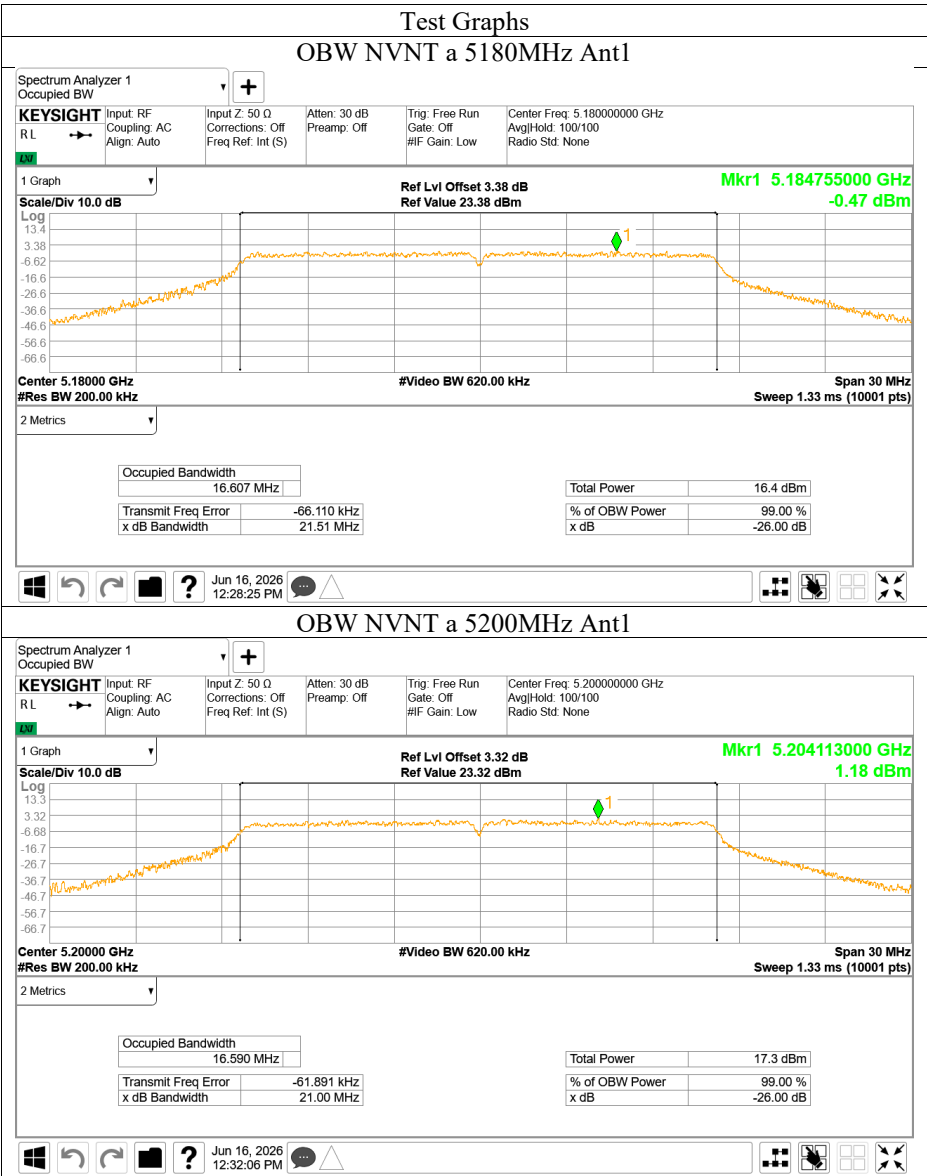


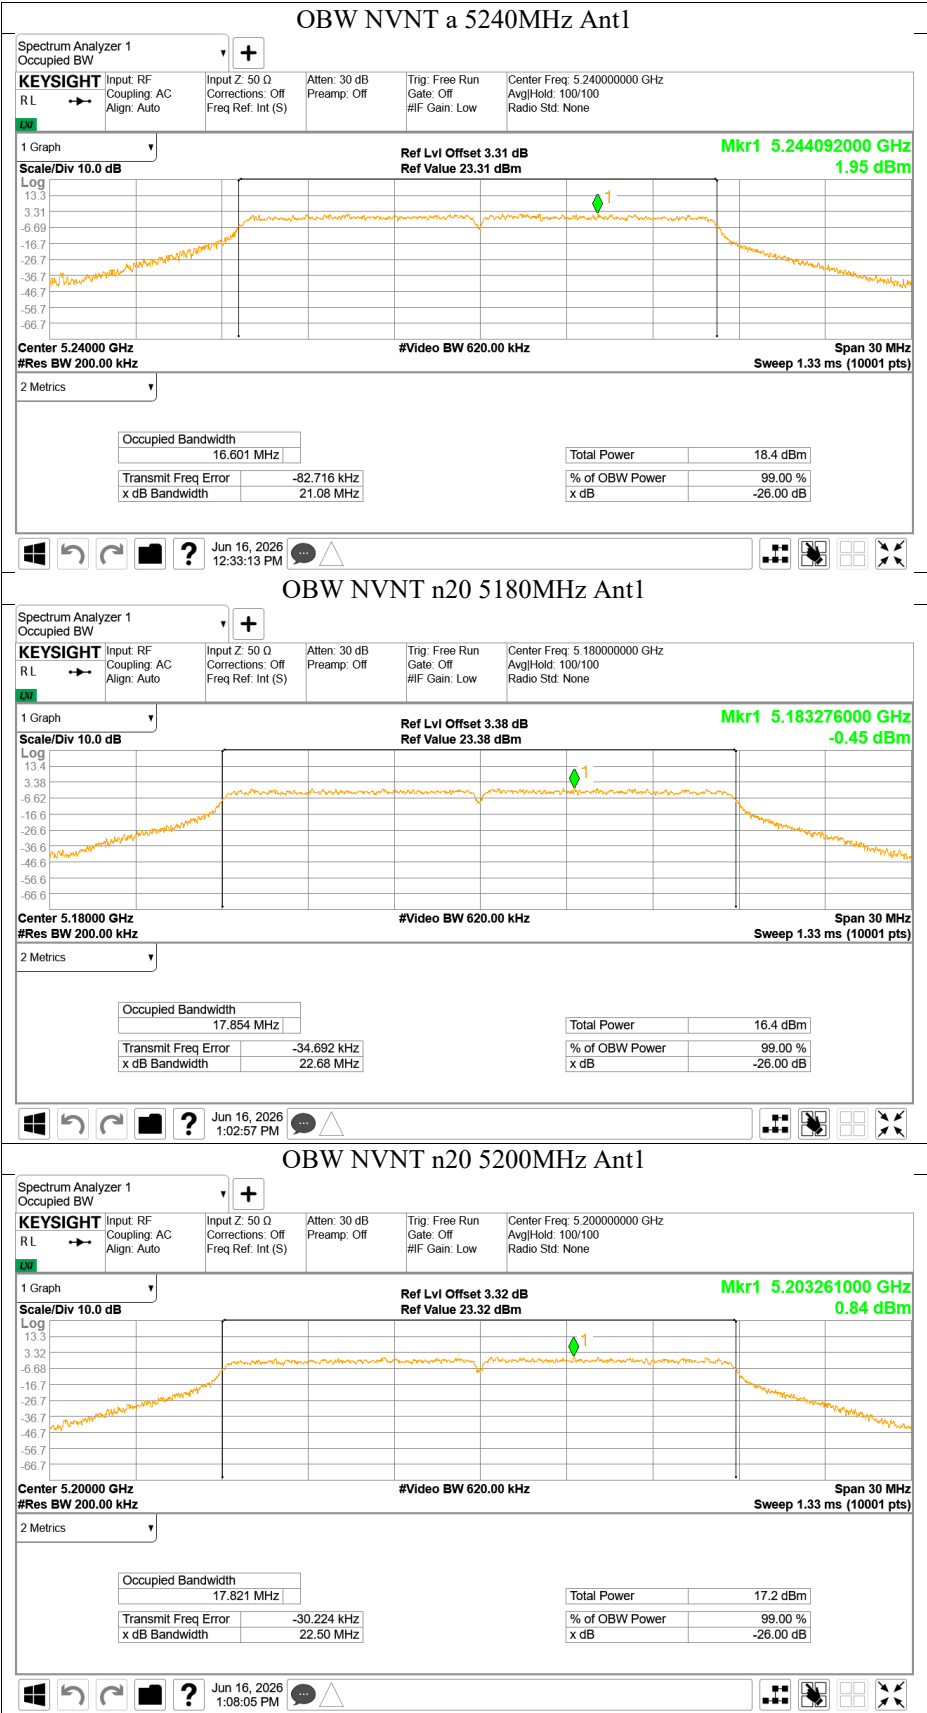


OBW NVNT n20 5240MHz Ant1

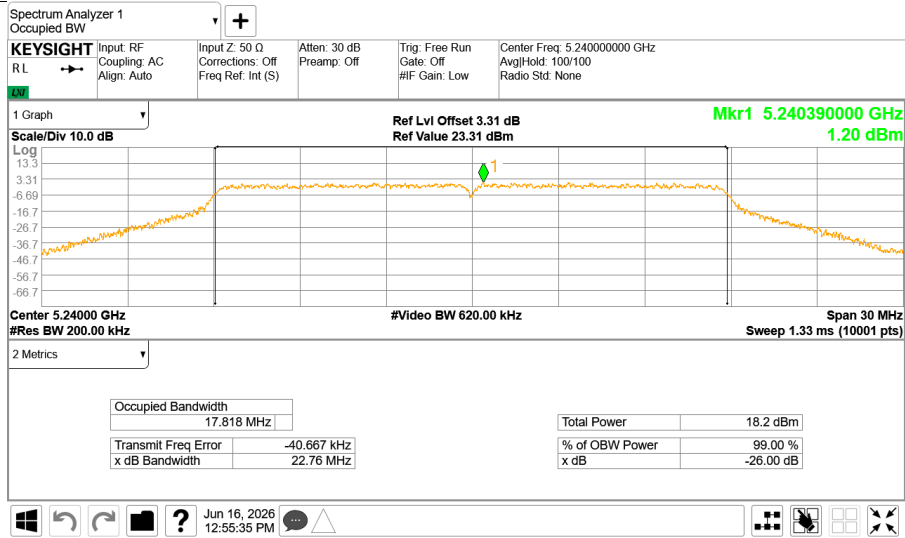

OBW NVNT n40 5190MHz Ant1

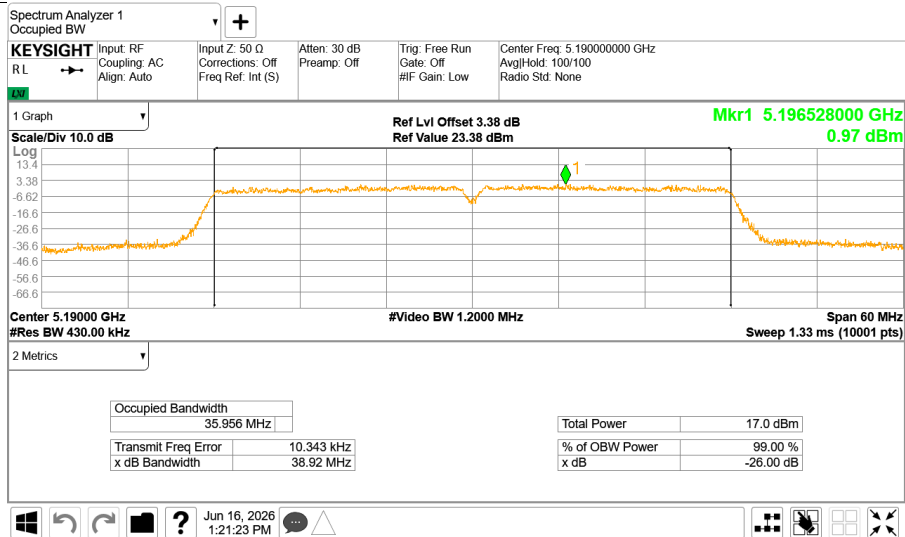



OBW NVNT n40 5230MHz Ant1

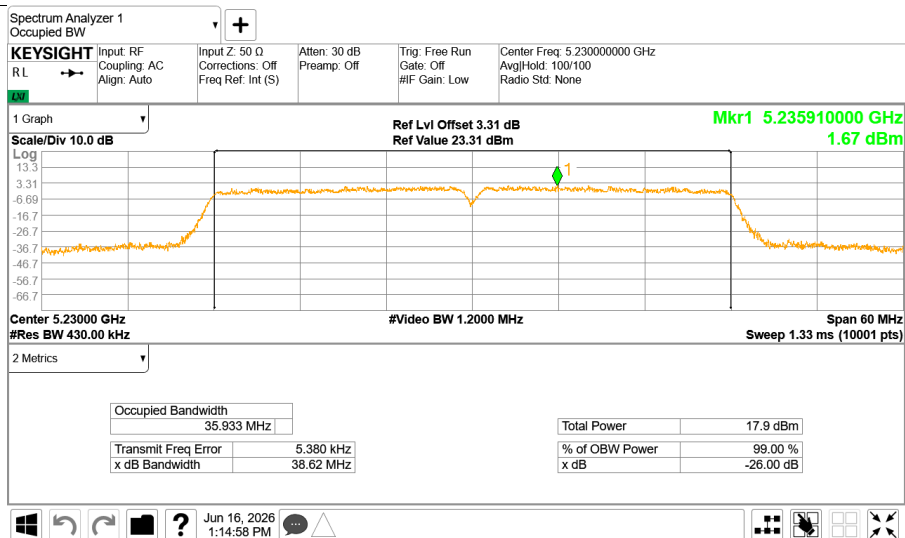





Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT U-NII-2A	a	5260	Ant1	16.586
	a	5280	Ant1	16.578
	a	5320	Ant1	16.596
	n20	5260	Ant1	17.84
	n20	5280	Ant1	17.845
	n20	5320	Ant1	17.834
	n40	5270	Ant1	35.943
	n40	5310	Ant1	35.944

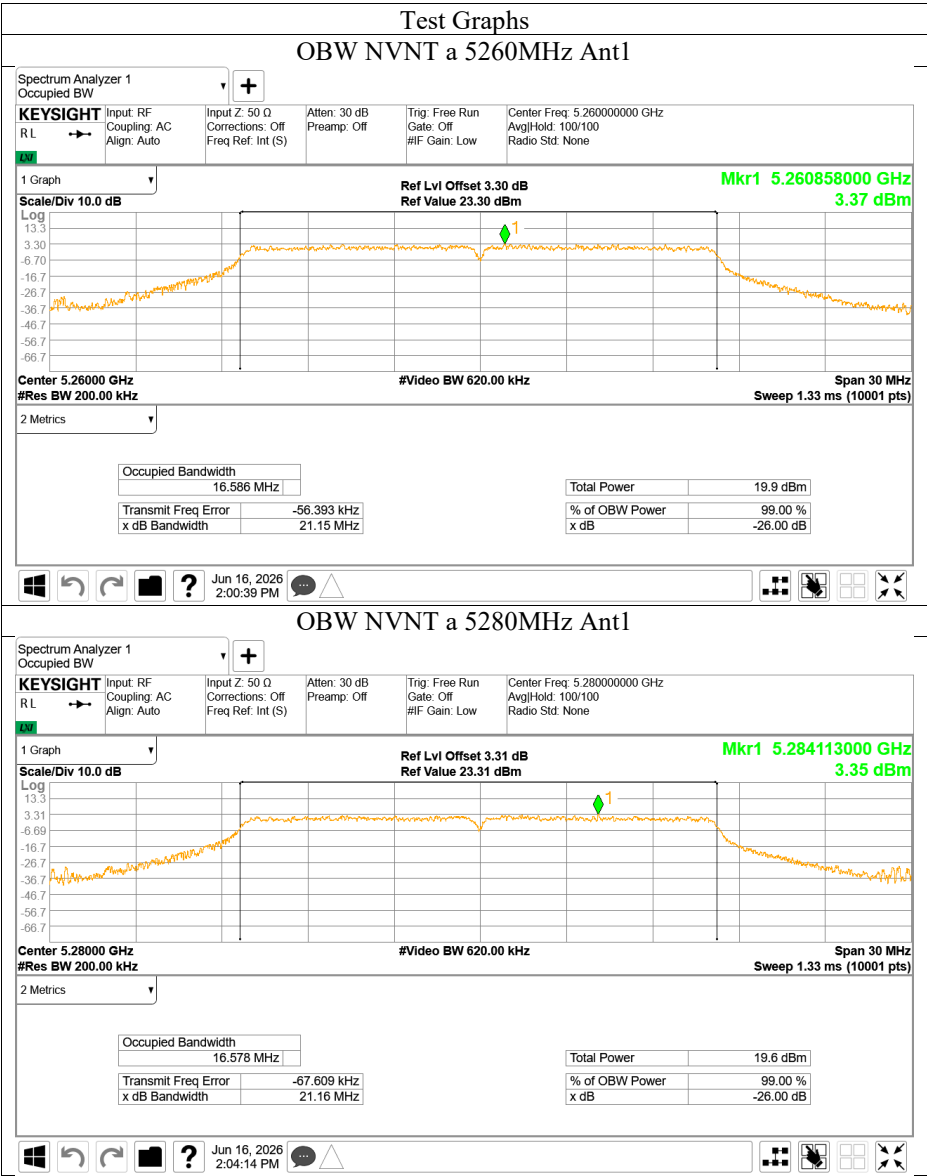


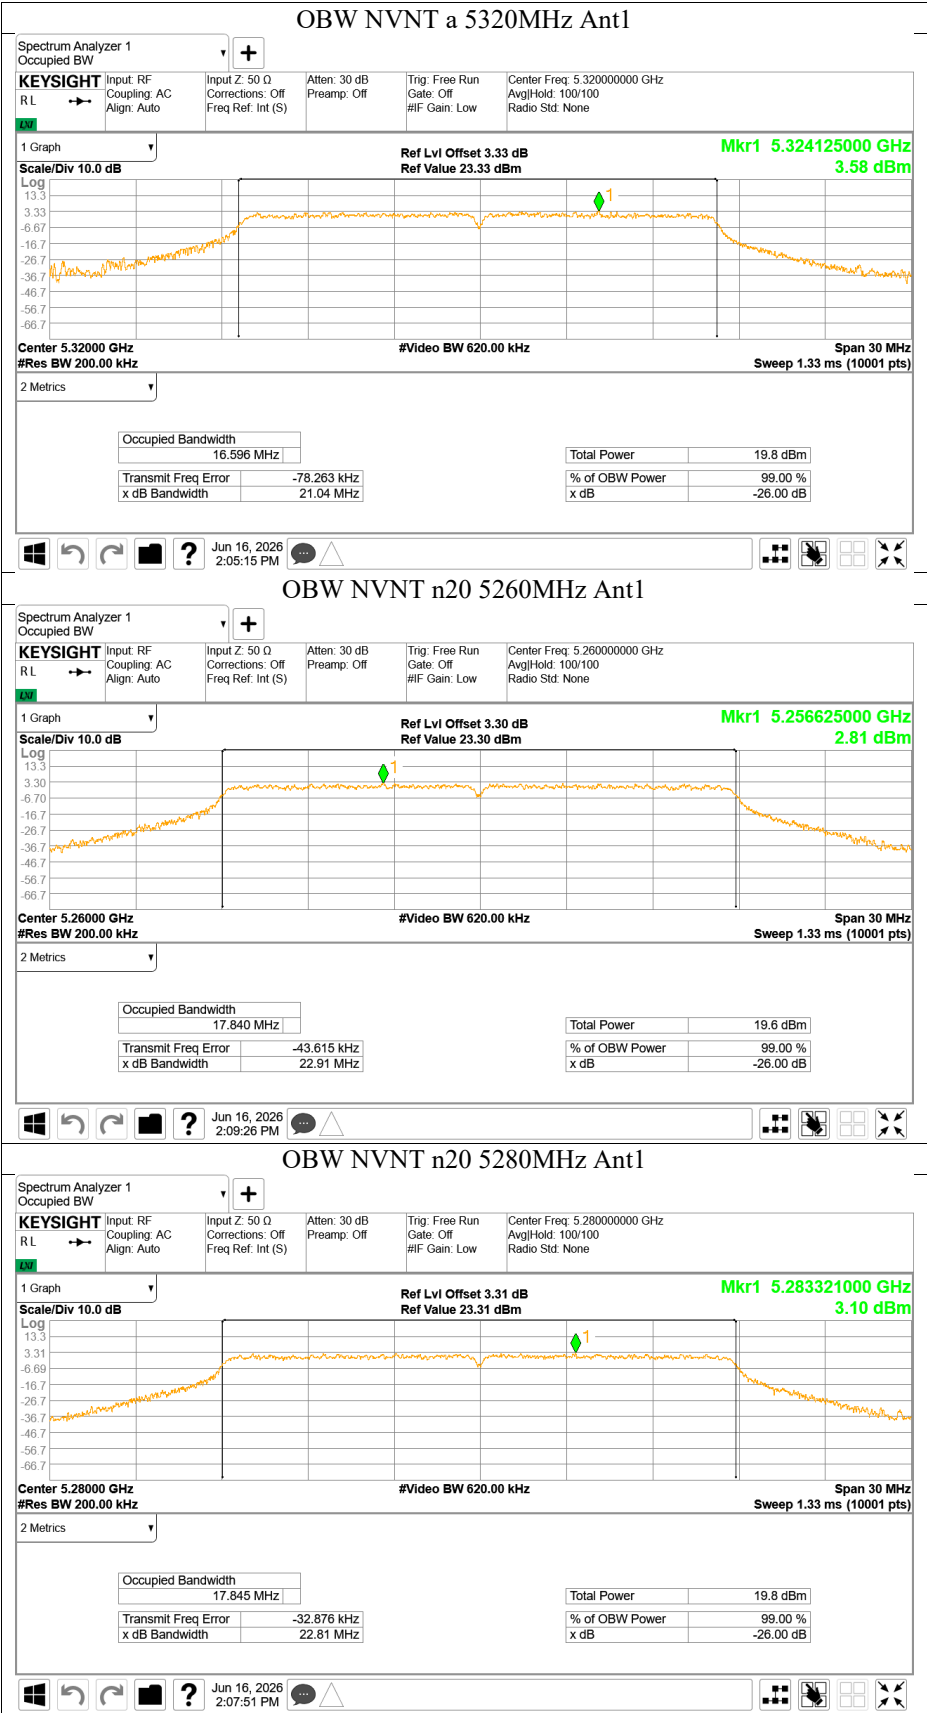


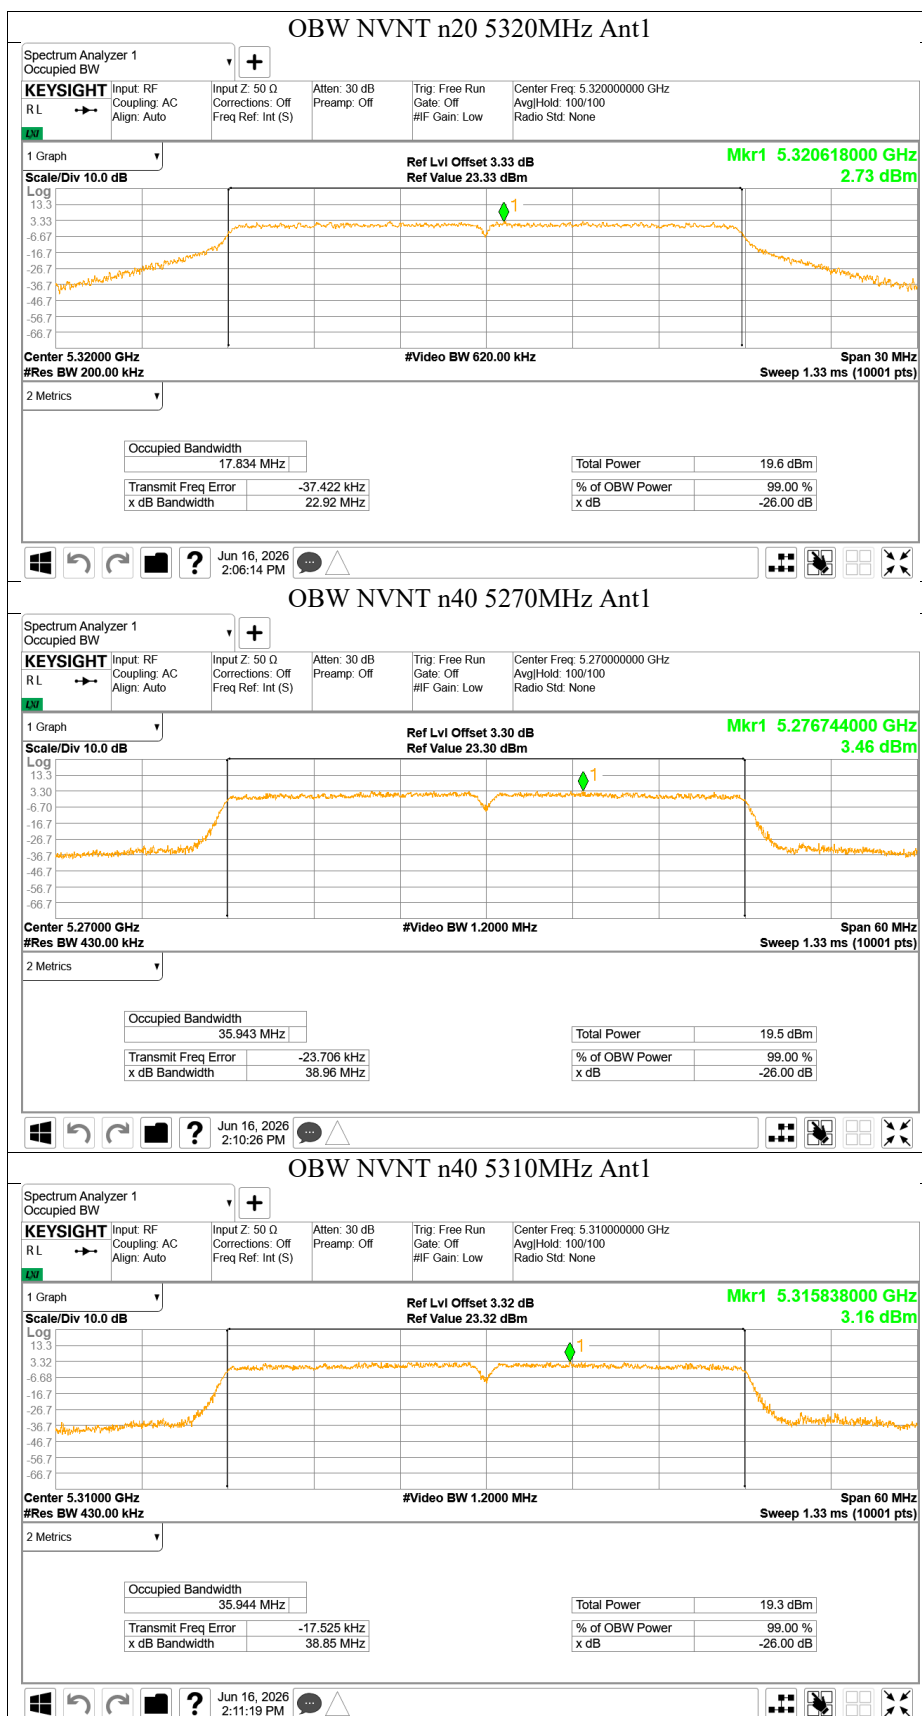


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT U-NII-2C	a	5500	Ant1	16.617
	a	5600	Ant1	16.603
	a	5700	Ant1	16.593
	a	5720	Ant1	16.593
	a U-NII-2C	5720	Ant1	13.373
	a U-NII-3	5720	Ant1	3.22
	n20	5500	Ant1	17.854
	n20	5600	Ant1	17.831
	n20	5700	Ant1	17.849
	n20	5720	Ant1	17.824
	n20 U-NII-2C	5720	Ant1	13.991
	n20 U-NII-3	5720	Ant1	3.833
	n40	5510	Ant1	35.963
	n40	5590	Ant1	35.944
	n40	5670	Ant1	35.968
	n40	5710	Ant1	35.968
	n40 U-NII-2C	5710	Ant1	32.94
	N40 U-NII-3	5710	Ant1	3.008

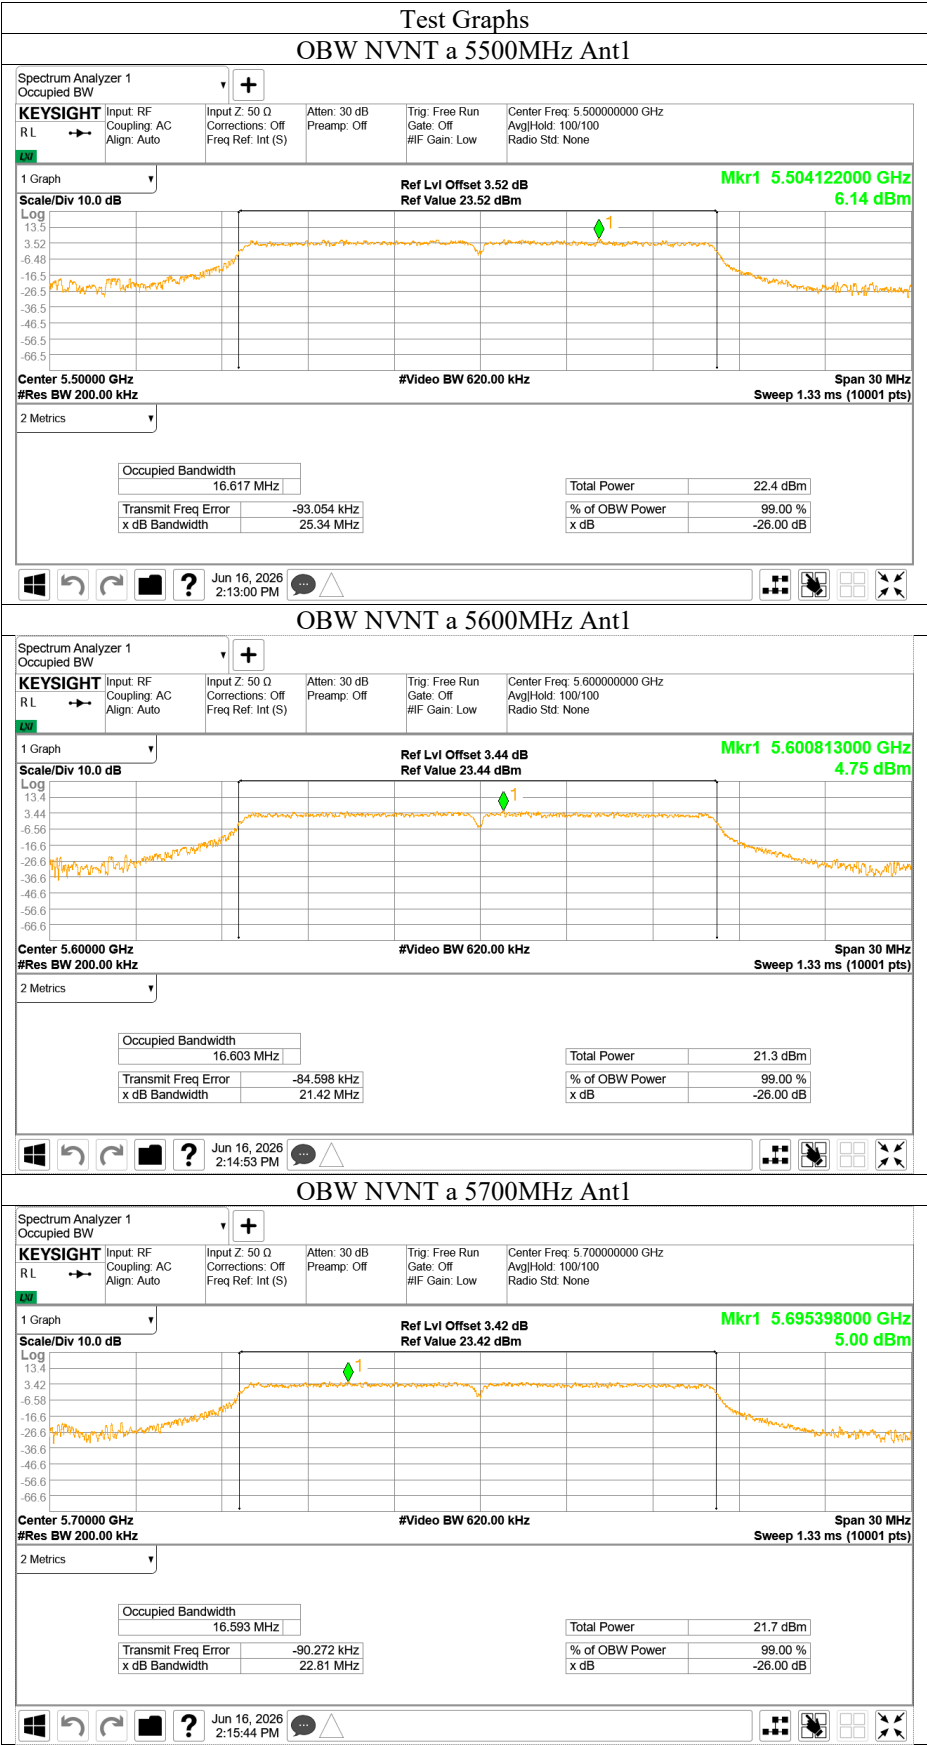

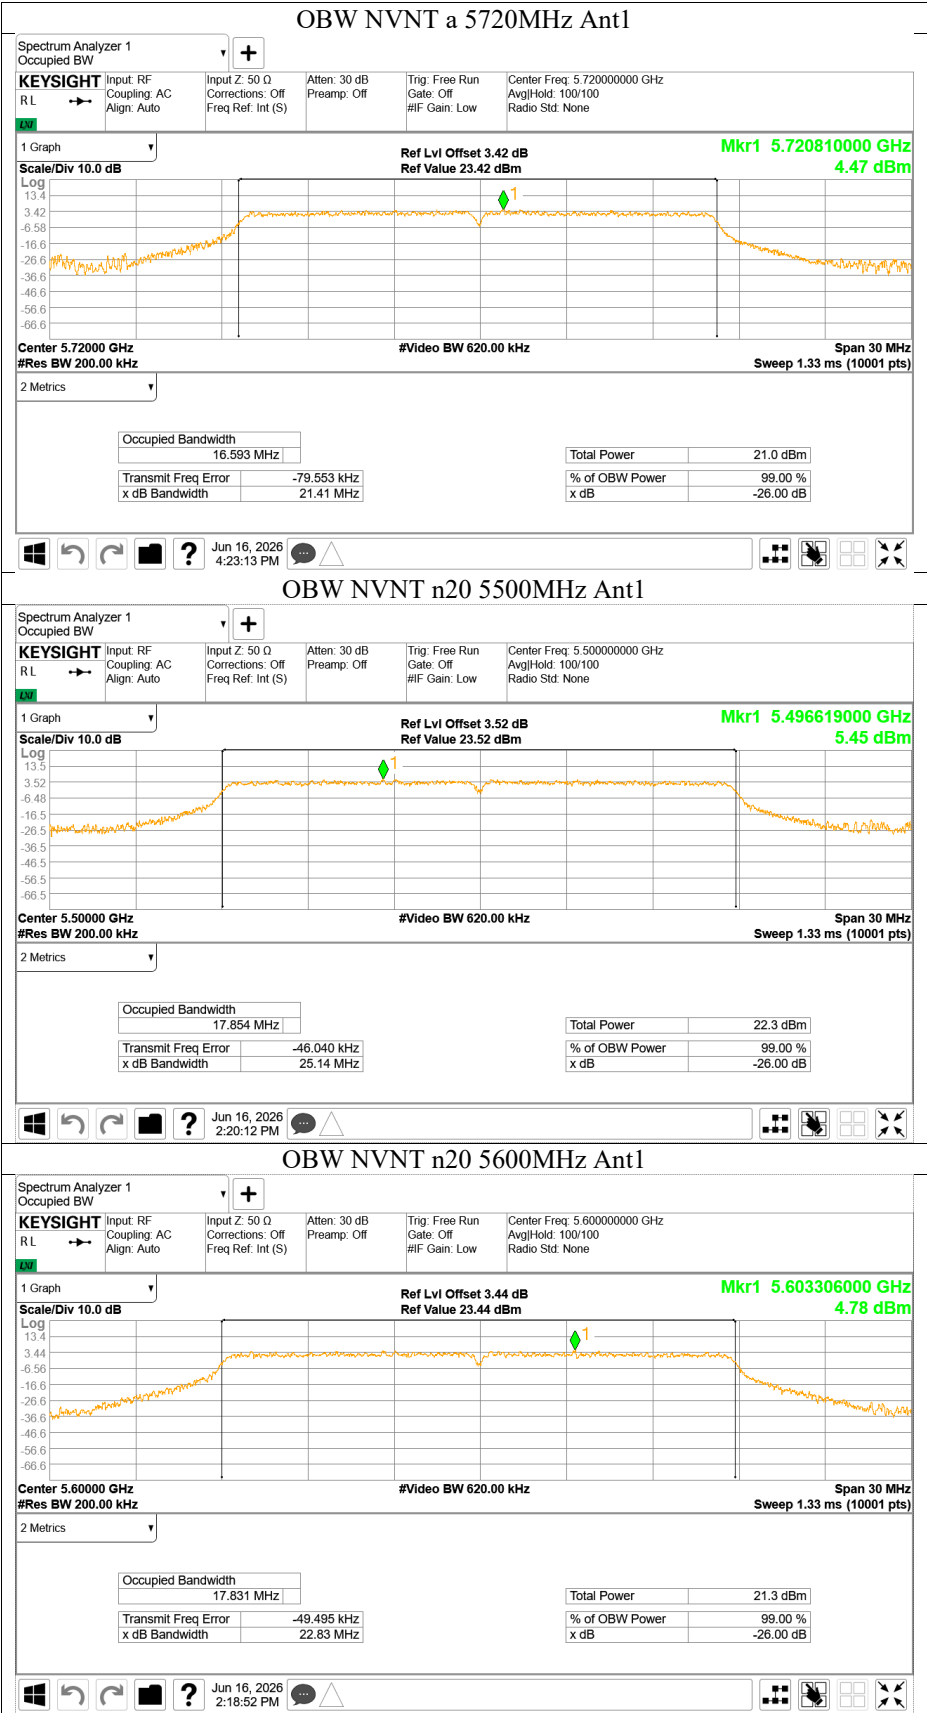


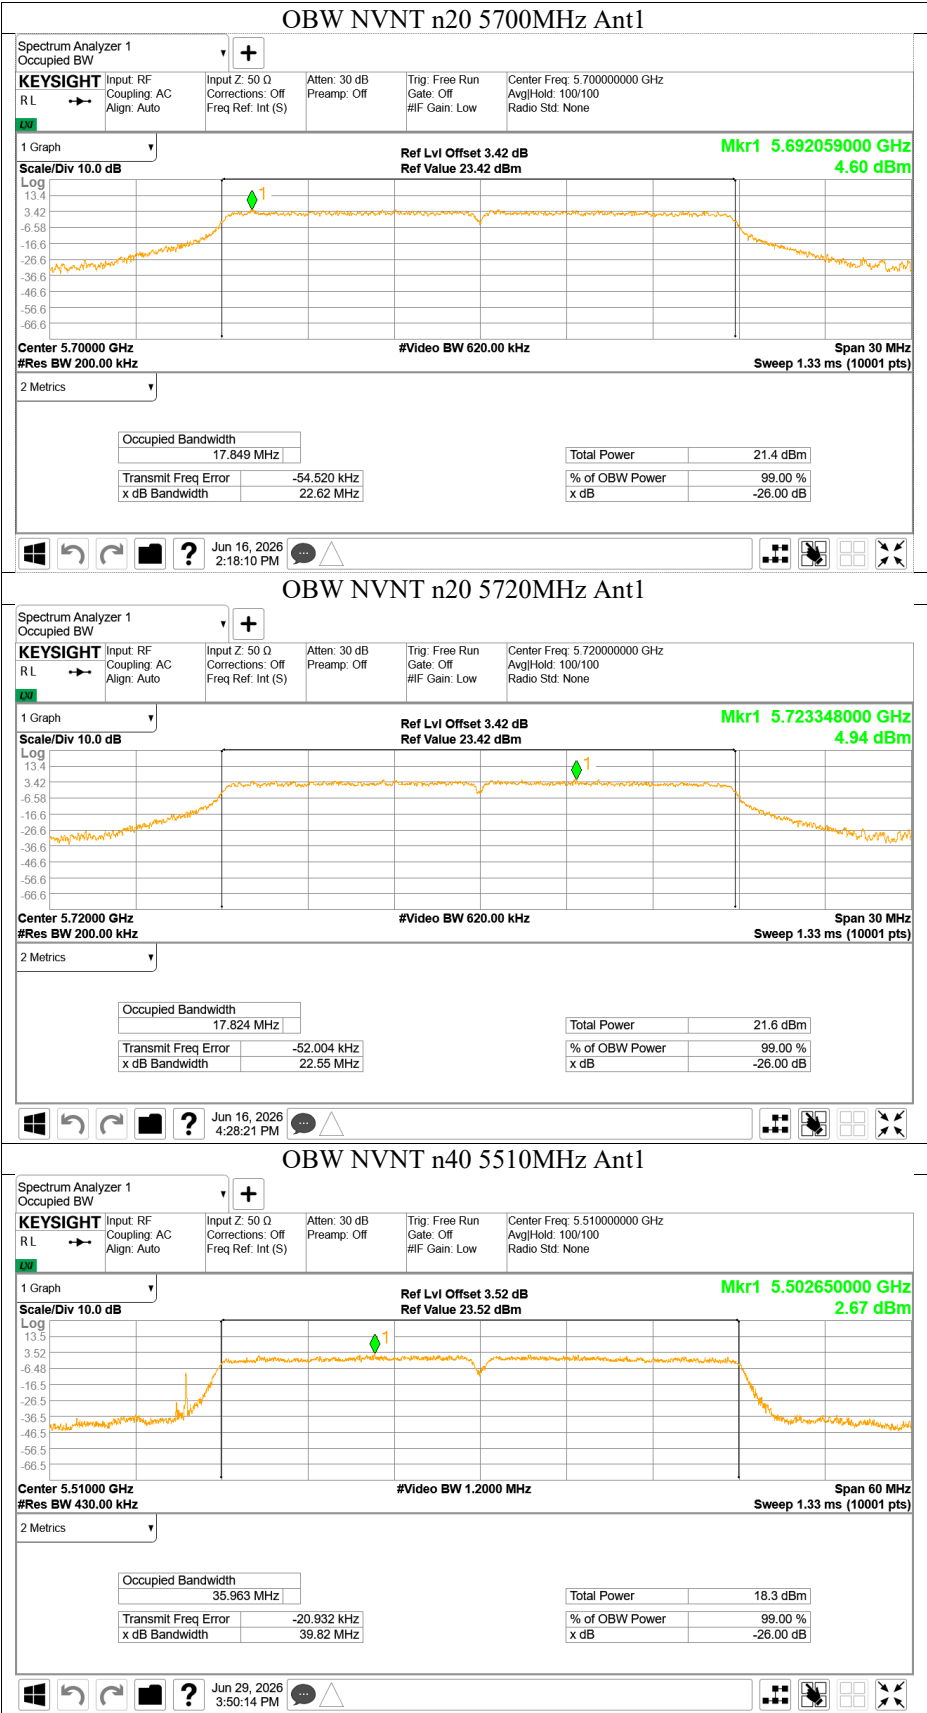


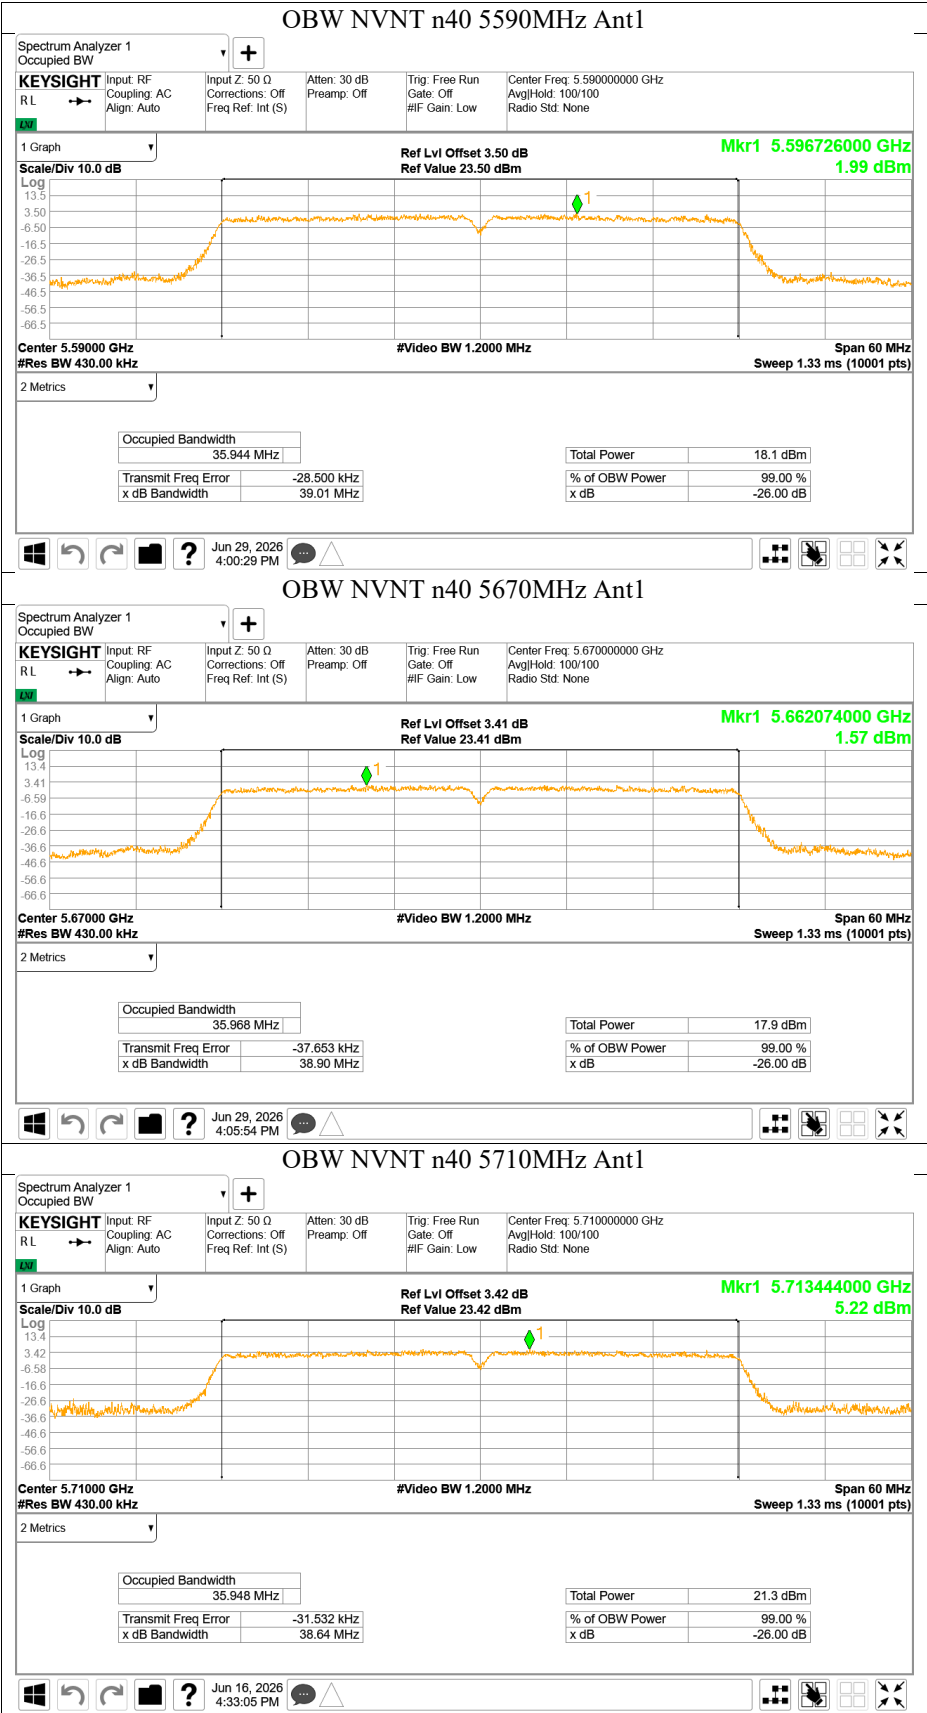




Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT U-NII-3	a	5745	Ant1	16.611
	a	5785	Ant1	16.602
	a	5825	Ant1	16.602
	n20	5745	Ant1	17.852
	n20	5785	Ant1	17.823
	n20	5825	Ant1	17.838
	n40	5755	Ant1	35.919
	n40	5795	Ant1	35.931

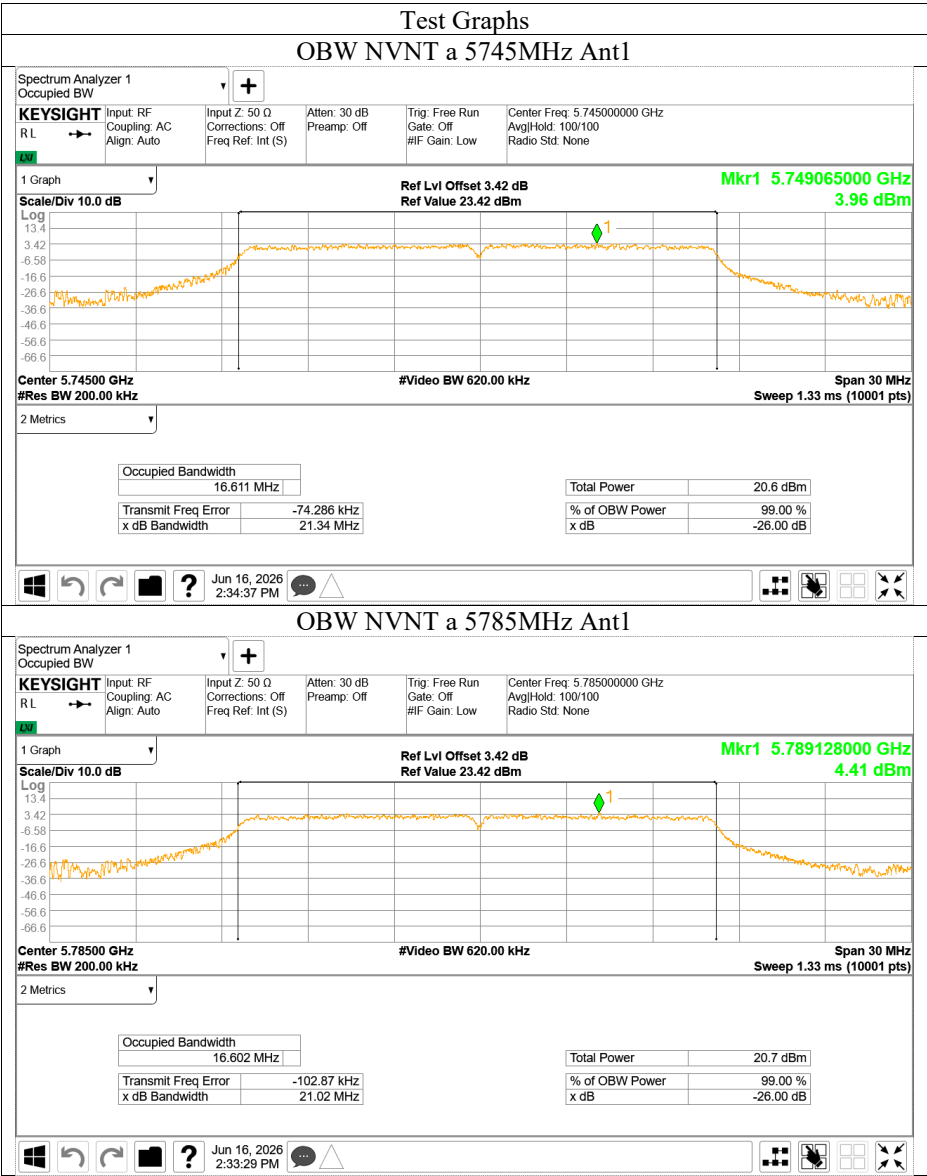

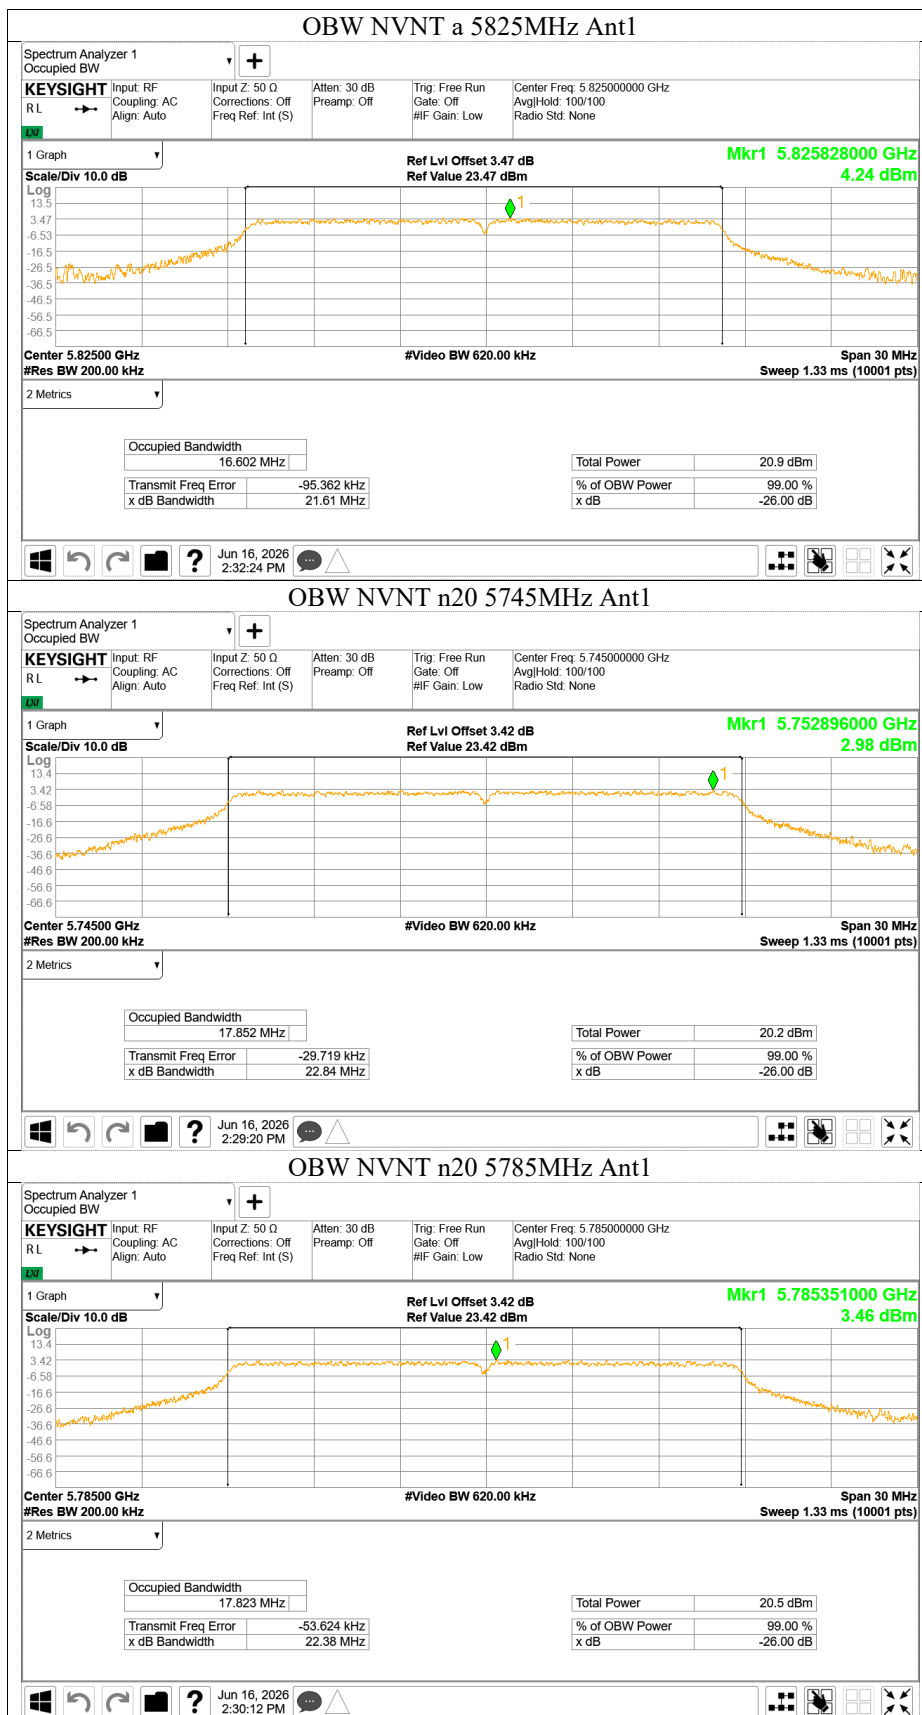

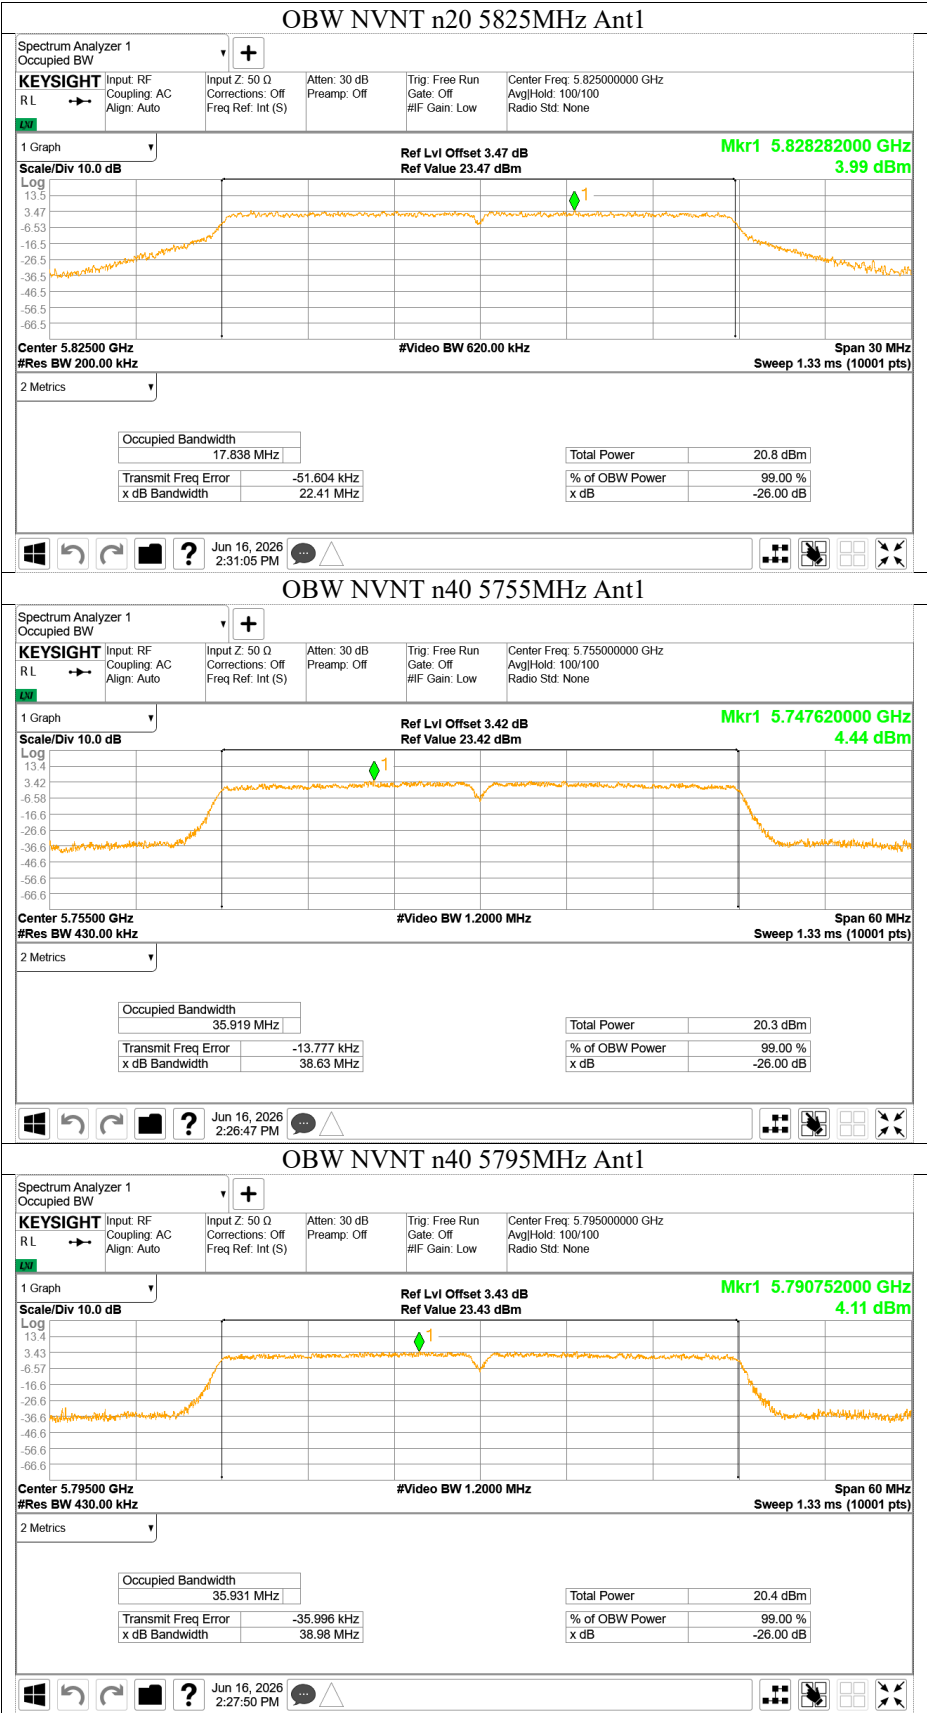

7 Unwanted emission limits for RSS 247 (5150-5250MHz)



Note: n40 5230MHz emissions that falls between the upper edge of the 26 dB bandwidth and 5350MHz below the channel power by at least 26 dB.

8 Frequency Stability

Temperature (°C)	Voltage (DC)	Mode U-NII-1	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Verdict
-30°C	5.0V	a	5180	5179.94	5150-5250	Pass
-20°C	5.0V	a	5180	5179.94	5150-5250	Pass
-10°C	5.0V	a	5180	5179.96	5150-5250	Pass
0°C	5.0V	a	5180	5179.94	5150-5250	Pass
20°C	4.5V	a	5180	5179.96	5150-5250	Pass
20°C	5.0V	a	5180	5179.96	5150-5250	Pass
20°C	5.5V	a	5180	5179.94	5150-5250	Pass
50°C	5.0V	a	5180	5179.94	5150-5250	Pass
-30°C	5.0V	a	5200	5199.96	5150-5250	Pass
-10°C	5.0V	a	5200	5199.96	5150-5250	Pass
0°C	5.0V	a	5200	5199.96	5150-5250	Pass
10°C	5.0V	a	5200	5199.94	5150-5250	Pass
20°C	4.5V	a	5200	5199.96	5150-5250	Pass
20°C	5.0V	a	5200	5199.96	5150-5250	Pass
20°C	5.5V	a	5200	5199.96	5150-5250	Pass
50°C	5.0V	a	5200	5199.96	5150-5250	Pass
-30°C	5.0V	a	5240	5239.96	5150-5250	Pass
-10°C	5.0V	a	5240	5239.96	5150-5250	Pass
0°C	5.0V	a	5240	5239.96	5150-5250	Pass
10°C	5.0V	a	5240	5239.94	5150-5250	Pass
20°C	4.5V	a	5240	5239.96	5150-5250	Pass
20°C	5.0V	a	5240	5239.94	5150-5250	Pass
20°C	5.5V	a	5240	5239.96	5150-5250	Pass
50°C	5.0V	a	5240	5239.94	5150-5250	Pass
-30°C	5.0V	n20	5180	5179.94	5150-5250	Pass
-10°C	5.0V	n20	5180	5179.94	5150-5250	Pass
0°C	5.0V	n20	5180	5179.94	5150-5250	Pass
10°C	5.0V	n20	5180	5179.94	5150-5250	Pass
20°C	4.5V	n20	5180	5179.94	5150-5250	Pass
20°C	5.0V	n20	5180	5179.94	5150-5250	Pass
20°C	5.5V	n20	5180	5179.94	5150-5250	Pass
50°C	5.0V	n20	5180	5179.94	5150-5250	Pass
-30°C	5.0V	n20	5200	5199.94	5150-5250	Pass
-10°C	5.0V	n20	5200	5199.94	5150-5250	Pass
0°C	5.0V	n20	5200	5199.94	5150-5250	Pass
10°C	5.0V	n20	5200	5199.94	5150-5250	Pass
20°C	4.5V	n20	5200	5199.94	5150-5250	Pass
20°C	5.0V	n20	5200	5199.94	5150-5250	Pass
20°C	5.5V	n20	5200	5199.94	5150-5250	Pass
50°C	5.0V	n20	5200	5199.96	5150-5250	Pass
-30°C	5.0V	n20	5240	5239.94	5150-5250	Pass
-10°C	5.0V	n20	5240	5239.94	5150-5250	Pass
0°C	5.0V	n20	5240	5239.94	5150-5250	Pass
10°C	5.0V	n20	5240	5239.94	5150-5250	Pass
20°C	4.5V	n20	5240	5239.96	5150-5250	Pass
20°C	5.0V	n20	5240	5239.94	5150-5250	Pass
20°C	5.5V	n20	5240	5239.96	5150-5250	Pass
50°C	5.0V	n20	5240	5239.94	5150-5250	Pass
-30°C	5.0V	n40	5190	5189.92	5150-5250	Pass
-10°C	5.0V	n40	5190	5189.96	5150-5250	Pass
0°C	5.0V	n40	5190	5189.96	5150-5250	Pass

10°C	5.0V	n40	5190	5189.96	5150-5250	Pass
20°C	4.5V	n40	5190	5189.92	5150-5250	Pass
20°C	5.0V	n40	5190	5189.96	5150-5250	Pass
20°C	5.5V	n40	5190	5189.92	5150-5250	Pass
50°C	5.0V	n40	5190	5189.96	5150-5250	Pass
-30°C	5.0V	n40	5230	5229.92	5150-5250	Pass
-10°C	5.0V	n40	5230	5229.92	5150-5250	Pass
0°C	5.0V	n40	5230	5229.92	5150-5250	Pass
10°C	5.0V	n40	5230	5229.96	5150-5250	Pass
20°C	4.5V	n40	5230	5229.92	5150-5250	Pass
20°C	5.0V	n40	5230	5229.96	5150-5250	Pass
20°C	5.5V	n40	5230	5229.96	5150-5250	Pass
50°C	5.0V	n40	5230	5229.92	5150-5250	Pass

Temperature (°C)	Voltage (DC)	Mode U-NII-2A	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Verdict
-30°C	5.0V	a	5260	5259.96	5250-5350	Pass
-10°C	5.0V	a	5260	5259.96	5250-5350	Pass
0°C	5.0V	a	5260	5259.94	5250-5350	Pass
10°C	5.0V	a	5260	5259.96	5250-5350	Pass
20°C	4.5V	a	5260	5259.96	5250-5350	Pass
20°C	5.0V	a	5260	5259.96	5250-5350	Pass
20°C	5.5V	a	5260	5259.94	5250-5350	Pass
50°C	5.0V	a	5260	5259.94	5250-5350	Pass
-30°C	5.0V	a	5280	5279.92	5250-5350	Pass
-10°C	5.0V	a	5280	5279.94	5250-5350	Pass
0°C	5.0V	a	5280	5279.94	5250-5350	Pass
10°C	5.0V	a	5280	5279.94	5250-5350	Pass
20°C	4.5V	a	5280	5279.92	5250-5350	Pass
20°C	5.0V	a	5280	5279.94	5250-5350	Pass
20°C	5.5V	a	5280	5279.92	5250-5350	Pass
50°C	5.0V	a	5280	5279.94	5250-5350	Pass
-30°C	5.0V	a	5320	5319.94	5250-5350	Pass
-10°C	5.0V	a	5320	5319.94	5250-5350	Pass
0°C	5.0V	a	5320	5319.94	5250-5350	Pass
10°C	5.0V	a	5320	5319.92	5250-5350	Pass
20°C	4.5V	a	5320	5319.92	5250-5350	Pass
20°C	5.0V	a	5320	5319.92	5250-5350	Pass
20°C	5.5V	a	5320	5319.96	5250-5350	Pass
50°C	5.0V	a	5320	5319.94	5250-5350	Pass
-30°C	5.0V	n20	5260	5259.94	5250-5350	Pass
-10°C	5.0V	n20	5260	5259.94	5250-5350	Pass
0°C	5.0V	n20	5260	5259.94	5250-5350	Pass
10°C	5.0V	n20	5260	5259.94	5250-5350	Pass
20°C	4.5V	n20	5260	5259.94	5250-5350	Pass
20°C	5.0V	n20	5260	5259.94	5250-5350	Pass
20°C	5.5V	n20	5260	5259.94	5250-5350	Pass
50°C	5.0V	n20	5260	5259.94	5250-5350	Pass
-30°C	5.0V	n20	5280	5279.94	5250-5350	Pass
-10°C	5.0V	n20	5280	5279.94	5250-5350	Pass
0°C	5.0V	n20	5280	5279.94	5250-5350	Pass
10°C	5.0V	n20	5280	5279.94	5250-5350	Pass
20°C	4.5V	n20	5280	5279.94	5250-5350	Pass
20°C	5.0V	n20	5280	5279.94	5250-5350	Pass
20°C	5.5V	n20	5280	5279.94	5250-5350	Pass

50°C	5.0V	n20	5280	5279.92	5250-5350	Pass
-30°C	5.0V	n20	5320	5319.92	5250-5350	Pass
-10°C	5.0V	n20	5320	5319.94	5250-5350	Pass
0°C	5.0V	n20	5320	5319.94	5250-5350	Pass
10°C	5.0V	n20	5320	5319.94	5250-5350	Pass
20°C	4.5V	n20	5320	5319.94	5250-5350	Pass
20°C	5.0V	n20	5320	5319.94	5250-5350	Pass
20°C	5.5V	n20	5320	5319.92	5250-5350	Pass
50°C	5.0V	n20	5320	5319.94	5250-5350	Pass
-30°C	5.0V	n40	5270	5269.92	5250-5350	Pass
-10°C	5.0V	n40	5270	5269.92	5250-5350	Pass
0°C	5.0V	n40	5270	5269.92	5250-5350	Pass
10°C	5.0V	n40	5270	5269.92	5250-5350	Pass
20°C	4.5V	n40	5270	5269.92	5250-5350	Pass
20°C	5.0V	n40	5270	5269.92	5250-5350	Pass
20°C	5.5V	n40	5270	5269.92	5250-5350	Pass
50°C	5.0V	n40	5270	5269.92	5250-5350	Pass
-30°C	5.0V	n40	5310	5309.92	5250-5350	Pass
-10°C	5.0V	n40	5310	5309.92	5250-5350	Pass
0°C	5.0V	n40	5310	5309.92	5250-5350	Pass
10°C	5.0V	n40	5310	5309.96	5250-5350	Pass
20°C	4.5V	n40	5310	5309.92	5250-5350	Pass
20°C	5.0V	n40	5310	5309.92	5250-5350	Pass
20°C	5.5V	n40	5310	5309.92	5250-5350	Pass
50°C	5.0V	n40	5310	5309.96	5250-5350	Pass

Temperature (°C)	Voltage (DC)	Mode U-NII-2C	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Verdict
-30°C	5.0V	a	5500	5499.94	5470-5725	Pass
-10°C	5.0V	a	5500	5499.92	5470-5725	Pass
0°C	5.0V	a	5500	5499.94	5470-5725	Pass
10°C	5.0V	a	5500	5499.92	5470-5725	Pass
20°C	4.5V	a	5500	5499.92	5470-5725	Pass
20°C	5.0V	a	5500	5499.94	5470-5725	Pass
20°C	5.5V	a	5500	5499.94	5470-5725	Pass
50°C	5.0V	a	5500	5499.94	5470-5725	Pass
-30°C	5.0V	a	5600	5599.94	5470-5725	Pass
-10°C	5.0V	a	5600	5599.94	5470-5725	Pass
0°C	5.0V	a	5600	5599.94	5470-5725	Pass
10°C	5.0V	a	5600	5599.94	5470-5725	Pass
20°C	4.5V	a	5600	5599.94	5470-5725	Pass
20°C	5.0V	a	5600	5599.92	5470-5725	Pass
20°C	5.5V	a	5600	5599.92	5470-5725	Pass
50°C	5.0V	a	5600	5599.94	5470-5725	Pass
-30°C	5.0V	a	5700	5699.92	5470-5725	Pass
-10°C	5.0V	a	5700	5699.94	5470-5725	Pass
0°C	5.0V	a	5700	5699.92	5470-5725	Pass
10°C	5.0V	a	5700	5699.92	5470-5725	Pass
20°C	4.5V	a	5700	5699.92	5470-5725	Pass
20°C	5.0V	a	5700	5699.92	5470-5725	Pass
20°C	5.5V	a	5700	5699.94	5470-5725	Pass
50°C	5.0V	a	5700	5699.94	5470-5725	Pass
-30°C	5.0V	n20	5500	5499.92	5470-5725	Pass

-10°C	5.0V	n20	5500	5499.92	5470-5725	Pass
0°C	5.0V	n20	5500	5499.9	5470-5725	Pass
10°C	5.0V	n20	5500	5499.9	5470-5725	Pass
20°C	4.5V	n20	5500	5499.92	5470-5725	Pass
20°C	5.0V	n20	5500	5499.92	5470-5725	Pass
20°C	5.5V	n20	5500	5499.92	5470-5725	Pass
50°C	5.0V	n20	5500	5499.92	5470-5725	Pass
-30°C	5.0V	n20	5600	5599.9	5470-5725	Pass
-10°C	5.0V	n20	5600	5599.94	5470-5725	Pass
0°C	5.0V	n20	5600	5599.94	5470-5725	Pass
10°C	5.0V	n20	5600	5599.94	5470-5725	Pass
20°C	4.5V	n20	5600	5599.9	5470-5725	Pass
20°C	5.0V	n20	5600	5599.92	5470-5725	Pass
20°C	5.5V	n20	5600	5599.9	5470-5725	Pass
50°C	5.0V	n20	5600	5599.9	5470-5725	Pass
-30°C	5.0V	n20	5700	5699.9	5470-5725	Pass
-10°C	5.0V	n20	5700	5699.9	5470-5725	Pass
0°C	5.0V	n20	5700	5699.9	5470-5725	Pass
10°C	5.0V	n20	5700	5699.9	5470-5725	Pass
20°C	4.5V	n20	5700	5699.9	5470-5725	Pass
20°C	5.0V	n20	5700	5699.9	5470-5725	Pass
20°C	5.5V	n20	5700	5699.92	5470-5725	Pass
50°C	5.0V	n20	5700	5699.92	5470-5725	Pass
-30°C	5.0V	n40	5510	5509.92	5470-5725	Pass
-10°C	5.0V	n40	5510	5509.92	5470-5725	Pass
0°C	5.0V	n40	5510	5509.92	5470-5725	Pass
10°C	5.0V	n40	5510	5509.92	5470-5725	Pass
20°C	4.5V	n40	5510	5509.92	5470-5725	Pass
20°C	5.0V	n40	5510	5509.96	5470-5725	Pass
20°C	5.5V	n40	5510	5509.92	5470-5725	Pass
50°C	5.0V	n40	5510	5509.92	5470-5725	Pass
-30°C	5.0V	n40	5590	5589.92	5470-5725	Pass
-10°C	5.0V	n40	5590	5589.92	5470-5725	Pass
0°C	5.0V	n40	5590	5589.92	5470-5725	Pass
10°C	5.0V	n40	5590	5589.92	5470-5725	Pass
20°C	4.5V	n40	5590	5589.92	5470-5725	Pass
20°C	5.0V	n40	5590	5589.92	5470-5725	Pass
20°C	5.5V	n40	5590	5589.92	5470-5725	Pass
50°C	5.0V	n40	5590	5589.92	5470-5725	Pass
-30°C	5.0V	n40	5670	5669.92	5470-5725	Pass
-10°C	5.0V	n40	5670	5669.92	5470-5725	Pass
0°C	5.0V	n40	5670	5669.92	5470-5725	Pass
10°C	5.0V	n40	5670	5669.92	5470-5725	Pass
20°C	4.5V	n40	5670	5669.92	5470-5725	Pass
20°C	5.0V	n40	5670	5669.92	5470-5725	Pass
20°C	5.5V	n40	5670	5669.92	5470-5725	Pass
50°C	5.0V	n40	5670	5669.92	5470-5725	Pass

Temperature (°C)	Voltage (DC)	Mode U-NII-3	Frequency (MHz)	Measured Frequency (MHz)	Limit (MHz)	Verdict
-30°C	5.0V	a	5745	5744.92	5725-5850	Pass
-10°C	5.0V	a	5745	5744.94	5725-5850	Pass
0°C	5.0V	a	5745	5744.94	5725-5850	Pass
10°C	5.0V	a	5745	5744.94	5725-5850	Pass
20°C	4.5V	a	5745	5744.94	5725-5850	Pass


20°C	5.0V	a	5745	5744.94	5725-5850	Pass
20°C	5.5V	a	5745	5744.94	5725-5850	Pass
50°C	5.0V	a	5745	5744.94	5725-5850	Pass
-30°C	5.0V	a	5785	5784.94	5725-5850	Pass
-10°C	5.0V	a	5785	5784.94	5725-5850	Pass
0°C	5.0V	a	5785	5784.92	5725-5850	Pass
10°C	5.0V	a	5785	5784.94	5725-5850	Pass
20°C	4.5V	a	5785	5784.94	5725-5850	Pass
20°C	5.0V	a	5785	5784.92	5725-5850	Pass
20°C	5.5V	a	5785	5784.94	5725-5850	Pass
50°C	5.0V	a	5785	5784.94	5725-5850	Pass
-30°C	5.0V	a	5825	5824.92	5725-5850	Pass
-10°C	5.0V	a	5825	5824.92	5725-5850	Pass
0°C	5.0V	a	5825	5824.92	5725-5850	Pass
10°C	5.0V	a	5825	5824.92	5725-5850	Pass
20°C	4.5V	a	5825	5824.94	5725-5850	Pass
20°C	5.0V	a	5825	5824.94	5725-5850	Pass
20°C	5.5V	a	5825	5824.94	5725-5850	Pass
50°C	5.0V	a	5825	5824.92	5725-5850	Pass
-30°C	5.0V	n20	5745	5744.92	5725-5850	Pass
-10°C	5.0V	n20	5745	5744.9	5725-5850	Pass
0°C	5.0V	n20	5745	5744.92	5725-5850	Pass
10°C	5.0V	n20	5745	5744.92	5725-5850	Pass
20°C	4.5V	n20	5745	5744.9	5725-5850	Pass
20°C	5.0V	n20	5745	5744.92	5725-5850	Pass
20°C	5.5V	n20	5745	5744.94	5725-5850	Pass
50°C	5.0V	n20	5745	5744.92	5725-5850	Pass
-30°C	5.0V	n20	5785	5784.9	5725-5850	Pass
-10°C	5.0V	n20	5785	5784.9	5725-5850	Pass
0°C	5.0V	n20	5785	5784.92	5725-5850	Pass
10°C	5.0V	n20	5785	5784.92	5725-5850	Pass
20°C	4.5V	n20	5785	5784.9	5725-5850	Pass
20°C	5.0V	n20	5785	5784.92	5725-5850	Pass
20°C	5.5V	n20	5785	5784.9	5725-5850	Pass
50°C	5.0V	n20	5785	5784.92	5725-5850	Pass
-30°C	5.0V	n20	5825	5824.92	5725-5850	Pass
-10°C	5.0V	n20	5825	5824.92	5725-5850	Pass
0°C	5.0V	n20	5825	5824.9	5725-5850	Pass
10°C	5.0V	n20	5825	5824.92	5725-5850	Pass
20°C	4.5V	n20	5825	5824.9	5725-5850	Pass
20°C	5.0V	n20	5825	5824.9	5725-5850	Pass
20°C	5.5V	n20	5825	5824.9	5725-5850	Pass
50°C	5.0V	n20	5825	5824.9	5725-5850	Pass
-30°C	5.0V	n40	5755	5754.92	5725-5850	Pass
-10°C	5.0V	n40	5755	5754.92	5725-5850	Pass
0°C	5.0V	n40	5755	5754.92	5725-5850	Pass
10°C	5.0V	n40	5755	5754.92	5725-5850	Pass
20°C	4.5V	n40	5755	5754.92	5725-5850	Pass
20°C	5.0V	n40	5755	5754.92	5725-5850	Pass
20°C	5.5V	n40	5755	5754.92	5725-5850	Pass
50°C	5.0V	n40	5755	5754.92	5725-5850	Pass
-30°C	5.0V	n40	5795	5794.92	5725-5850	Pass
-10°C	5.0V	n40	5795	5794.92	5725-5850	Pass
0°C	5.0V	n40	5795	5794.92	5725-5850	Pass
10°C	5.0V	n40	5795	5794.92	5725-5850	Pass
20°C	4.5V	n40	5795	5794.92	5725-5850	Pass






20°C	5.0V	n40	5795	5794.92	5725-5850	Pass
20°C	5.5V	n40	5795	5794.92	5725-5850	Pass
50°C	5.0V	n40	5795	5794.92	5725-5850	Pass



9 -26dB Bandwidth test graph for straddle channel

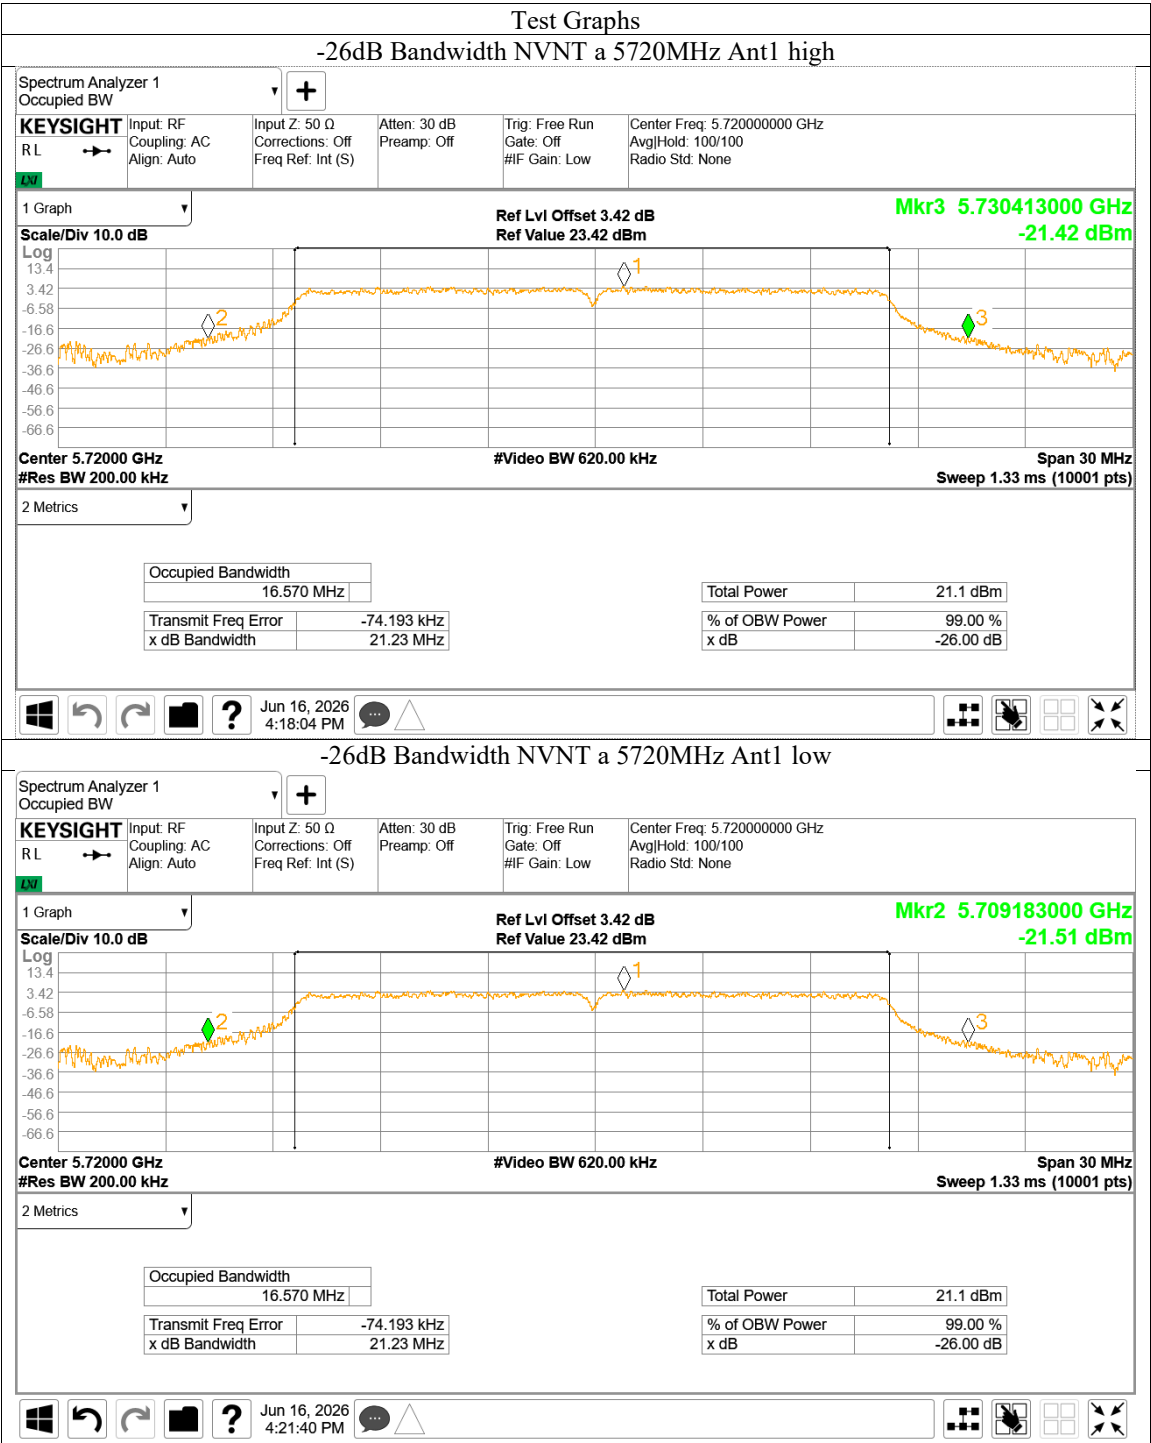


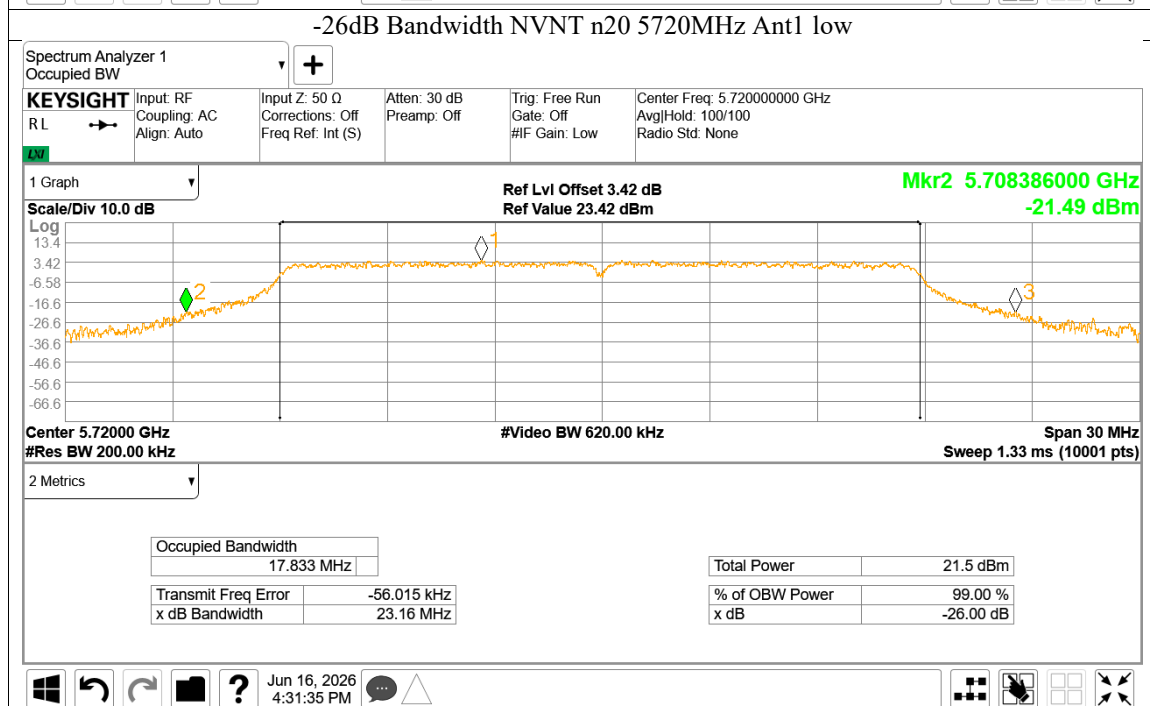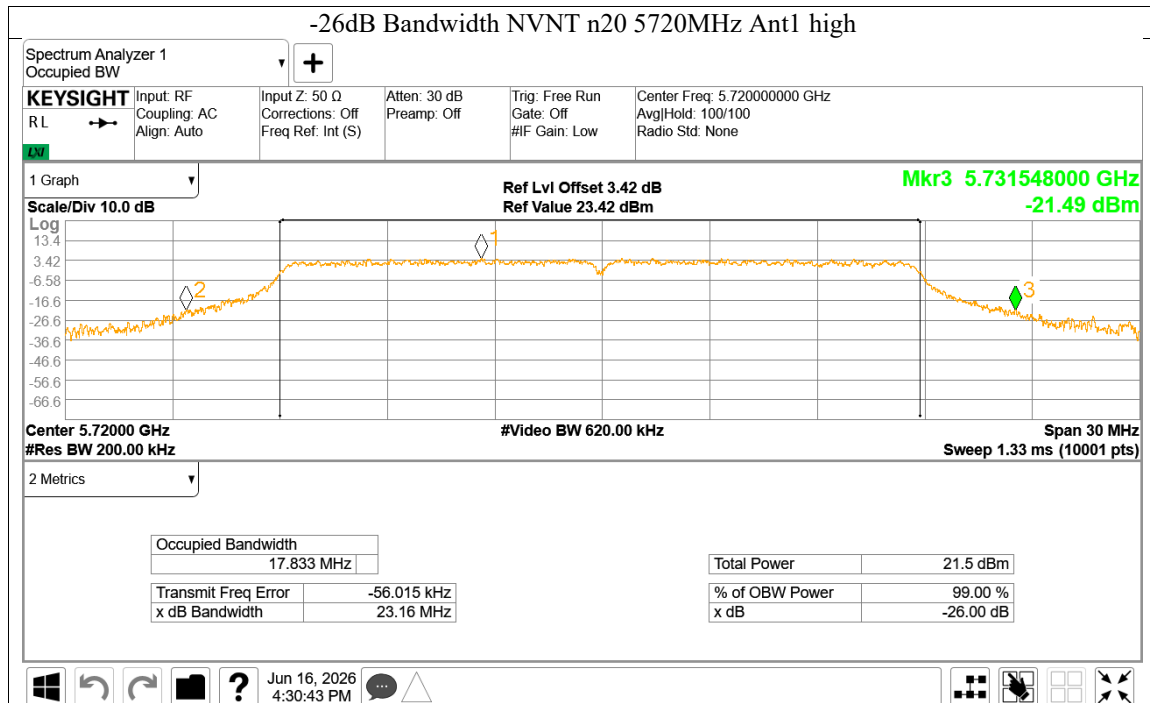


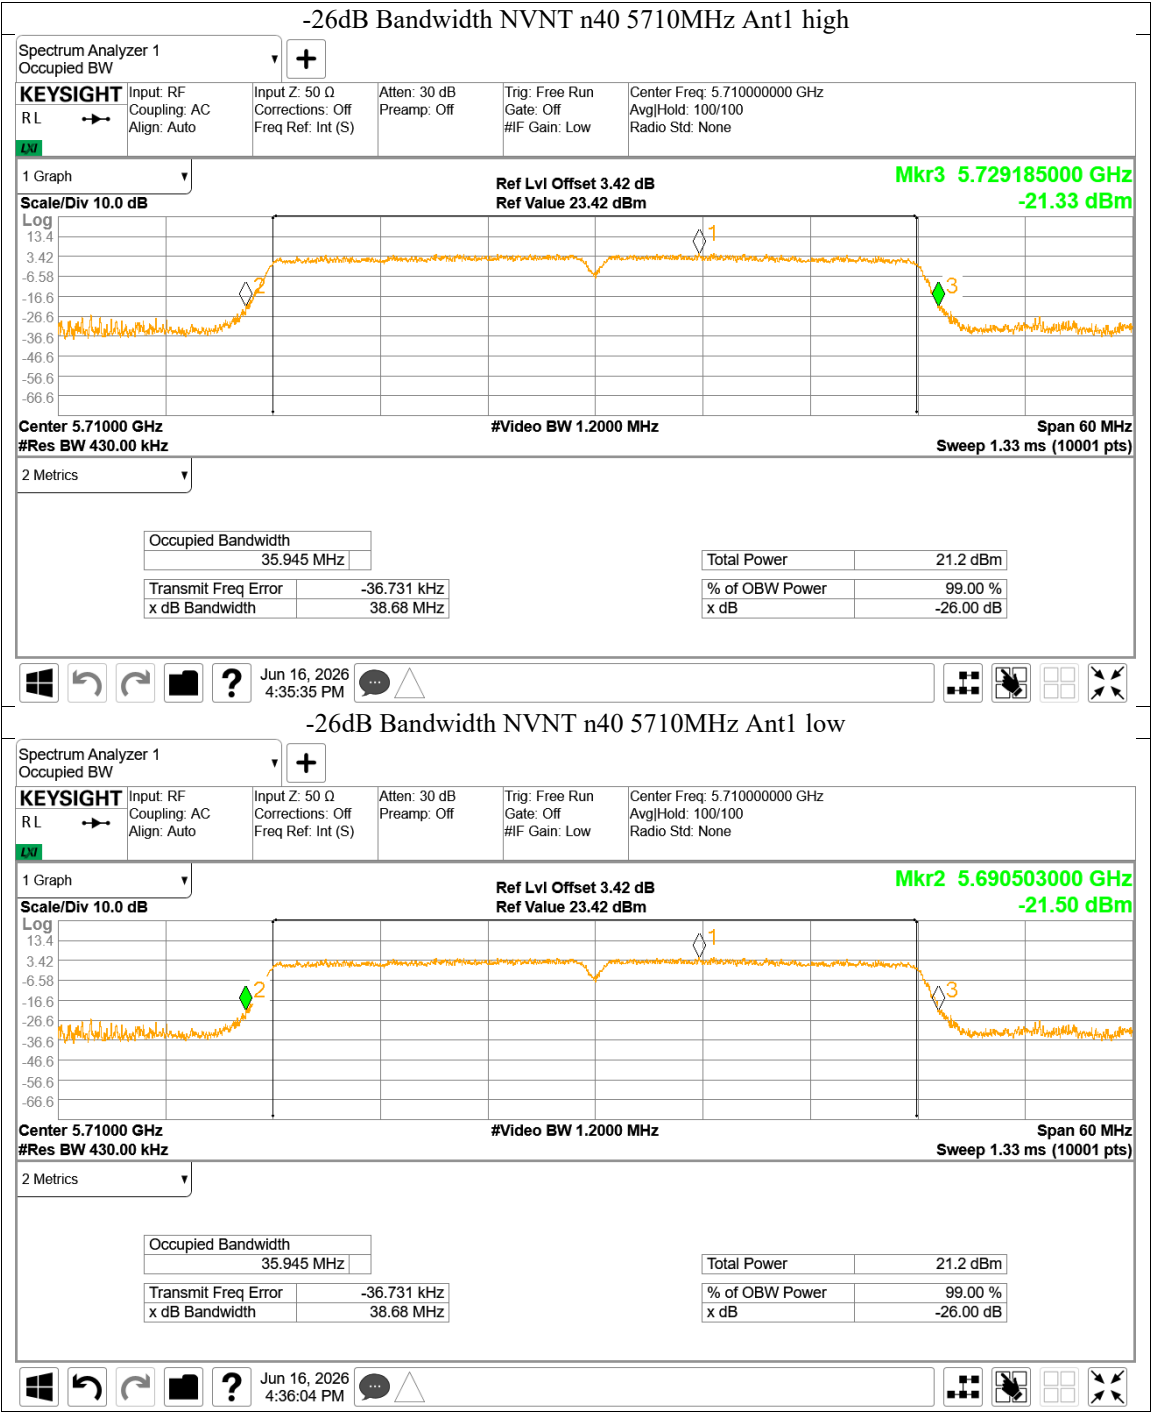




10 99% Bandwidth test graph for straddle channel

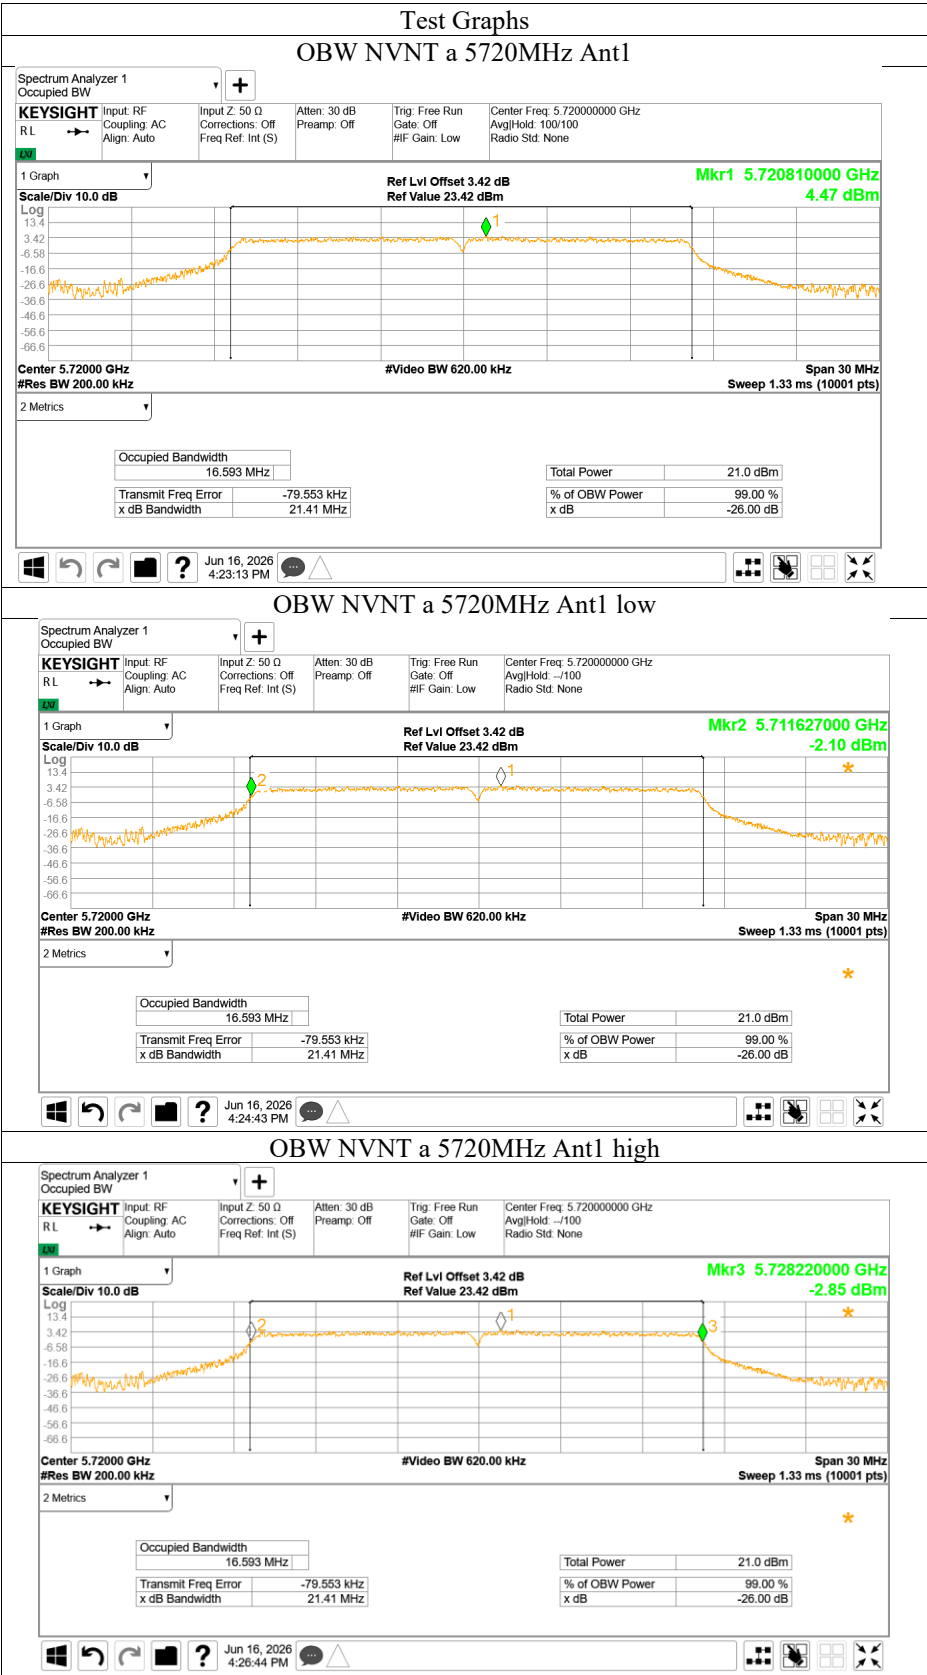

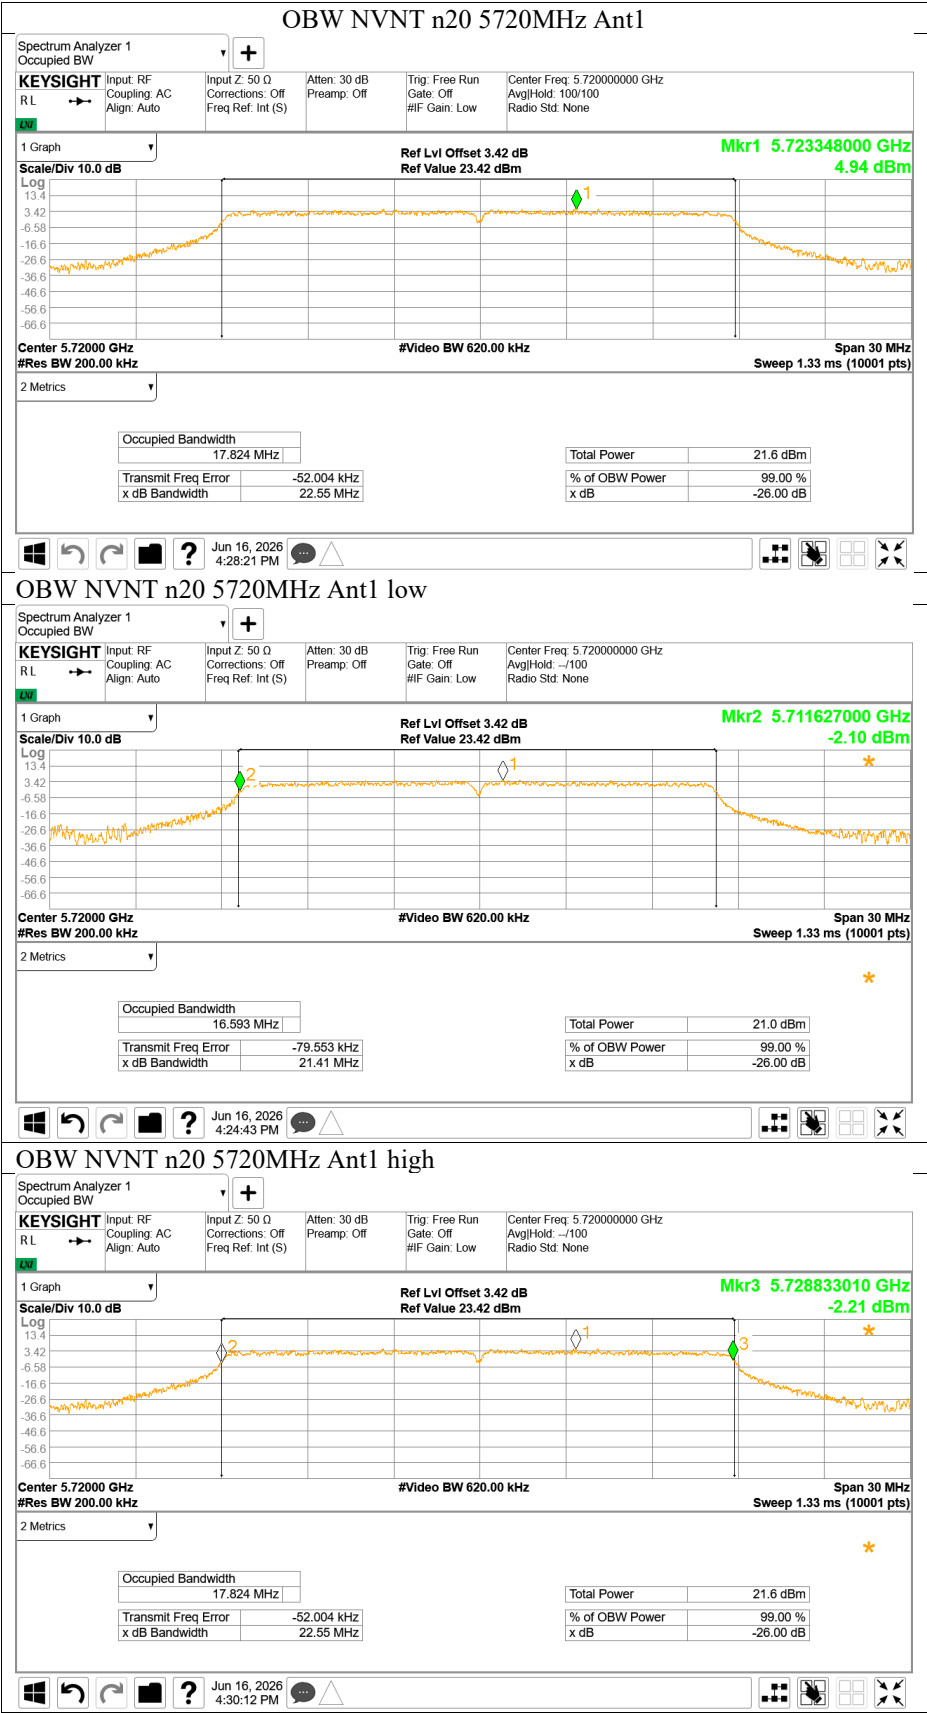

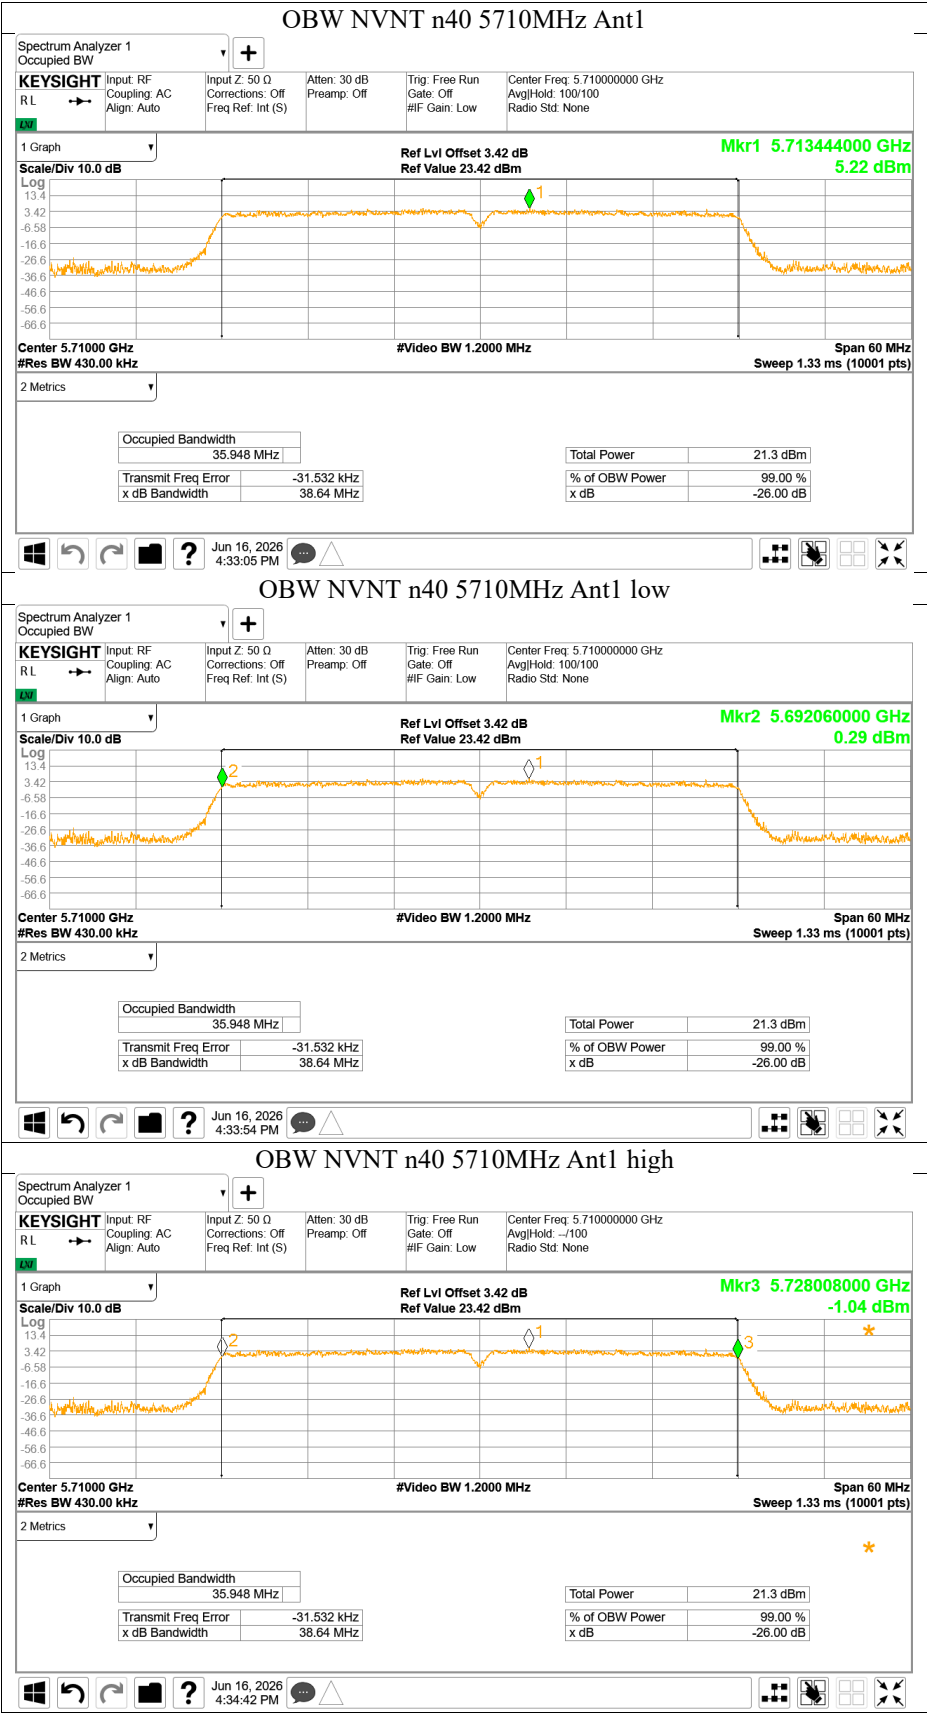

-----End of Test Report-----