

TEST REPORT

Application No.: SUCR2512001242MO

Applicant: Hangzhou Tuya Information Technology Co., Ltd.

Address of Applicant: Room 301,Building 1,Huace Center,Xihu District,Hangzhou City,Zhejiang Province, China

Manufacturer: Hangzhou Tuya Information Technology Co., Ltd.

Address of Manufacturer: Room 301,Building 1,Huace Center,Xihu District,Hangzhou City,Zhejiang Province, China

Equipment Under Test (EUT):

EUT Name: Wi-Fi and Bluetooth Module

Model No.: T3-V-PRO

FCC ID: 2ANDL-T3VPRO

Standard(s) : 47 CFR Part 15, Subpart C 15.247

Date of Receipt: 2025-12-30

Date of Test: 2026-01-14 to 2026-01-16

Date of Issue: 2026-01-19

Test Result:
Pass*

* In the configuration tested, the EUT complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



Revision Record			
Version	Description	Date	Remark
01	Original	2026-01-19	/

Authorized for issue by:			
Tested By		Hayley Zhang	
		Hayley Zhang/Project Engineer	
Approved By		Cedar cheng	
		Cedar Cheng /Reviewer	

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Customer Declaration

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2020) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands		ANSI C63.10 (2020) Section 6.10.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Below 1GHz		ANSI C63.10 (2020) Section 6.4,6.5	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Radiated Spurious Emissions Above 1GHz		ANSI C63.10 (2020) Section 6.6	47 CFR Part 15, Subpart C 15.205 & 15.209	Pass
Conducted Peak Output Power		ANSI C63.10 (2020) Section 11.9.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth		ANSI C63.10 (2020) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density		ANSI C63.10 (2020) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement		ANSI C63.10 (2020) Section 6.10.4	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions		ANSI C63.10 (2020) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass

3 Contents

	Page
1 COVER PAGE	1
2 Test Summary.....	3
3 Contents	4
4 General Information.....	5
4.1 Details of E.U.T.	5
4.2 Environment Parameter.....	5
4.3 Description of Support Units	5
4.4 Measurement Uncertainty & Decision Rule	6
4.5 Test Location	7
4.6 Test Facility.....	7
4.7 Deviation from Standards	7
4.8 Abnormalities from Standard Conditions	7
5 Equipment List	8
6 Radio Spectrum Technical Requirement.....	10
6.1 Antenna Requirement	10
7 Radio Spectrum Matter Test Results	11
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	11
7.2 Radiated Emissions which fall in the restricted bands	15
7.3 Radiated Spurious Emissions Below 1GHz.....	65
7.4 Radiated Spurious Emissions Above 1GHz	69
7.5 Conducted Peak Output Power	89
7.6 Minimum 6dB Bandwidth.....	91
7.7 Power Spectrum Density	92
7.8 Conducted Band Edges Measurement	93
7.9 Conducted Spurious Emissions	95
8 Test Setup Photo	97
9 EUT Constructional Details (EUT Photos).....	97
10 Appendix.....	98

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 5V
Operation Frequency:	802.11b/g/n(HT20)/ax(HE20): 2412MHz to 2462MHz; 802.11n(HT40)/ax(HE40): 2422MHz to 2452MHz
Modulation Type:	802.11b: DSSS (CCK, QPSK, BPSK); 802.11g/n/ax: OFDM/OFDMA (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Number of Channels:	802.11b/g/n(HT20)/ax(HE20): 11; 802.11n(HT40)/ax(HE40): 7
Channel Spacing:	5MHz
Antenna Type:	PCB Antenna
Antenna Gain:	1.72 dBi
Remark:	SISO: 1TX & RX

4.2 Environment Parameter

Environment Parameter	Selected Values During Tests	
Relative Humidity	Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	23-25	5
Note: NV:Normal Voltage LV:Low Extreme Test Voltage HV:High Extreme Test Voltage NT:Normal Temperature LT:Low Extreme Test Temperature HT:High Extreme Test Temperature		

4.3 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Computer	Lenovo	T14	2YK6GR
Router	Smavwave Technology Co.,Ltd	SRT 421	RT421X02211300001

4.4 Measurement Uncertainty & Decision Rule

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	Conduction emission	$\pm 3.0\text{dB}$ (150kHz to 30MHz)
5	RF conducted power	$\pm 0.75\text{dB}$
6	RF power density	$\pm 2.84\text{dB}$
7	Conducted Spurious emissions	$\pm 0.75\text{dB}$
8	RF Radiated power	$\pm 3.13\text{dB}$ (9kHz to 30MHz)
		$\pm 2.6\text{dB}$ (30MHz to 1GHz)
		$\pm 2.7\text{dB}$ (1GHz to 18GHz)
		$\pm 4.8\text{dB}$ (Above 18GHz)
9	Temperature test	$\pm 1^\circ\text{C}$
10	Humidity test	$\pm 3\%$
11	Supply voltages	$\pm 1\%$
12	Time	$\pm 3\%$
Remark: The U_{lab} (lab Uncertainty) is less than $U_{\text{CISPR/ETSI}}$ (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		

4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu)
Pilot Free Trade Zone

No tests were sub-contracted.

Note:

1.SGS is not responsible for wrong test results due to incorrect information (e.g., max. internal working frequency, antenna gain, cable loss, etc) is provided by the applicant. (If applicable).

2.SGS is not responsible for the authenticity, integrity and the validity of the conclusion based on results of the data provided by applicant. (If applicable).

3. Sample source: sent by customer.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.is accredited by the American Association for Laboratory Accreditation (A2LA).

- **FCC (Designation Number: CN1312)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized as an accredited testing laboratory. Test Firm Registration Number:717327

- **ISED (CAB Identifier: CN0120)**

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory.

Company Number: 27594

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Item	Equipment	Manufacturer	Model	Inventory No	Cal Date	Cal. Due Date
Conducted Emission at Mains Terminals						
1	EMI Test Receive	R&S	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
2	LISN	R&S	ENV216	SUWI-01-19-03	5/8/2025	5/7/2026
3	LISN	Schwarzbeck	ENV216	SUWI-01-19-04	5/8/2025	5/7/2026
4	Test Software	Tonscend	JS32-CE_4.0.0.2	SUWI-02-09-05	NCR	NCR
RF Conducted Test						
1	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
2	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-15	11/21/2025	11/20/2026
3	MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	1/14/2026	1/13/2027
4	Signal Generator	ROHDE&SCHWARZ	SMW200A	SUWI-01-07-08	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-08-01	1/14/2026	1/13/2027
6	MXG Vector Signal Generator	ROHDE&SCHWARZ	SMR20	SUWI-01-33-01	11/21/2025	11/20/2026
7	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-13	5/8/2025	5/7/2026
8	Wideband Radio Communication Test Sttion	Anritsu	MT8000A	SUWI-01-34-02	11/21/2025	11/20/2026
9	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	11/21/2025	11/20/2026
10	Power meter	Anritsu	ML2495A	SUWI-01-31-01	11/21/2025	11/20/2026
11	Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	11/21/2025	11/20/2026
12	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
13	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2/13/2025	2/12/2026
14	Temperature Chamber	GIANT FORCE	ICT-017-40-SP-SD	SUWI-01-13-02	5/7/2025	5/6/2026
15	Measurement Software	TST	TST 272 V2.02	SUWI-03-55-03	NCR	NCR
16	RF Control unit	TST	TSCB3023R2	SUWI-02-20-01	NCR	NCR
17	RFCables	Tonscend	NA	SUWI-01-03-01	NCR	NCR
RF Radiated Test						
1	Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	6/3/2023	6/2/2026
2	Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	1/14/2026	1/13/2027
3	Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-09	11/21/2025	11/20/2026
4	Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	1/14/2026	1/13/2027
5	Signal Generator	ROHDE&SCHWARZ	SMW100A	SUWI-01-18-01	1/14/2026	1/13/2027
6	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	9/10/2025	9/9/2027
7	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	5/7/2025	5/6/2027
8	Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	5/7/2025	5/6/2027
9	Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	5/7/2025	5/6/2027
10	Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	1/14/2026	1/13/2027
11	Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	1/14/2026	1/13/2027
12	Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	1/14/2026	1/13/2027

13	Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-26-01	11/21/2025	11/20/2026
14	Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	8/25/2025	8/24/2026
15	Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-09	8/26/2025	8/25/2026
16	Radio Communication Analyzer	StarPoint	SP9500E	SUWI-01-28-02	11/21/2025	11/20/2026
17	Signal Generator	ROHDE&SCHWARZ	SMB100A	SUWI-01-08-01	1/14/2026	1/13/2027
18	DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	1/14/2026	1/13/2027
19	Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2/13/2025	2/12/2026
20	Measurement Software	Tonscend	JS32-RE 4.0.0.0	SUWI-02-09-06	NCR	NCR
21	RF Control unit	Tonscend	JS0806-1	SUWI-02-20-01	NCR	NCR
22	RFCables	Tonscend	NA	SUWI-01-03-02	NCR	NCR

Remark: NCR=No Calibration Requirement.

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement.

The best case gain of the antenna is 1.72 dBi.

Antenna location: Refer to internal photo.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2020) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		
Detector: Peak for pre-scan (9kHz resolution bandwidth) 0.15M to 30MHz		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1021 mbar

7.1.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.1.3 Test Setup Diagram

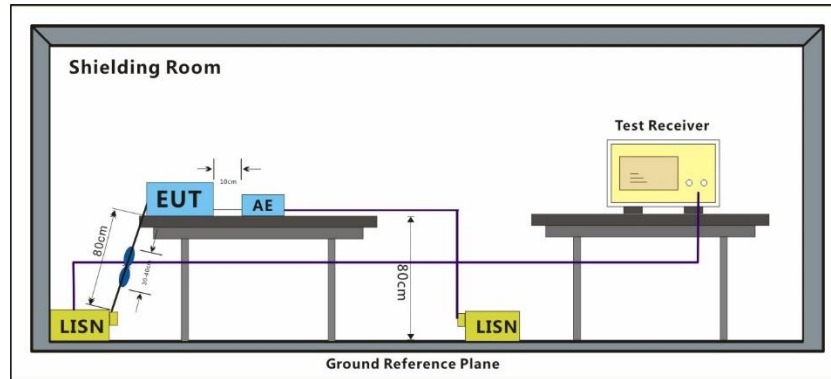


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark : Level=Read Level+ Cable Loss+ LISN Factor

Test Mode: 01; Line: Live line

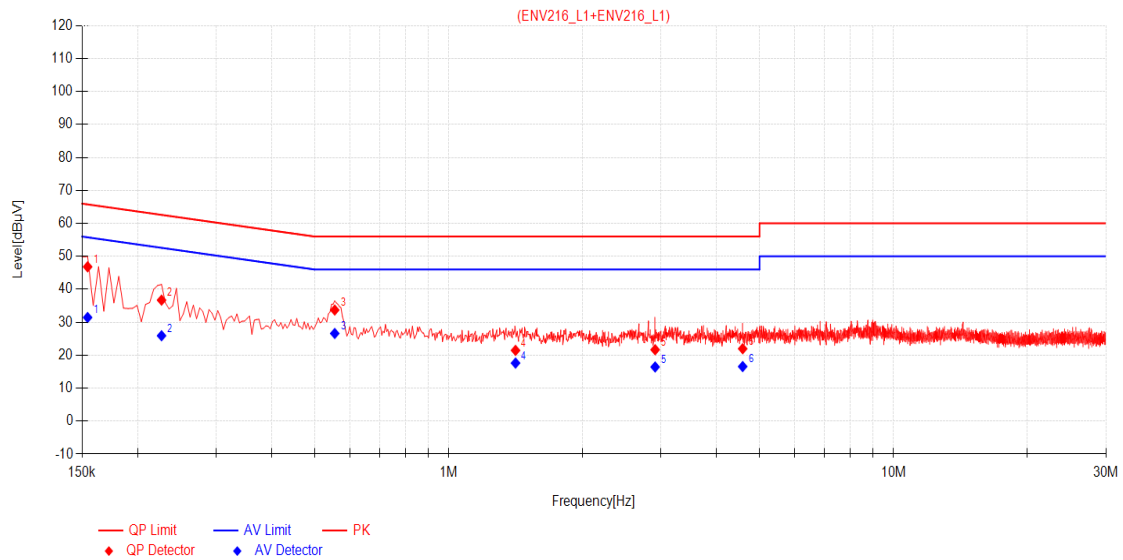

Final Data List											
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1545	9.96	36.87	46.83	65.75	18.92	21.49	31.45	55.75	24.30	PASS
2	0.2265	9.96	26.75	36.71	62.58	25.87	15.95	25.91	52.58	26.67	PASS
3	0.5550	9.94	23.76	33.70	56.00	22.30	16.66	26.60	46.00	19.40	PASS
4	1.4145	9.90	11.56	21.46	56.00	34.54	7.72	17.62	46.00	28.38	PASS
5	2.9130	9.91	11.76	21.67	56.00	34.33	6.53	16.44	46.00	29.56	PASS
6	4.5825	9.90	12.06	21.96	56.00	34.04	6.66	16.56	46.00	29.44	PASS

Test Mode: 01; Line: Neutral Line

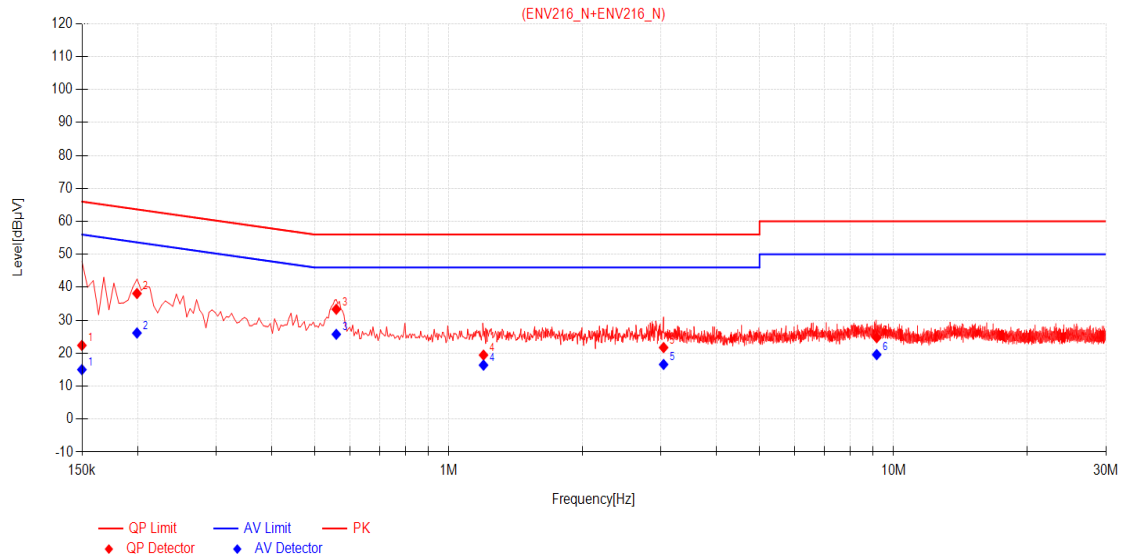

Final Data List											
NO.	Frequency [MHz]	Factor [dB]	QP Reading [dBμV]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Reading [dBμV]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Verdict
1	0.1500	9.95	12.42	22.37	66.00	43.63	5.07	15.02	56.00	40.98	PASS
2	0.1995	9.94	28.17	38.11	63.63	25.52	16.19	26.13	53.63	27.50	PASS
3	0.5595	9.93	23.40	33.33	56.00	22.67	15.81	25.74	46.00	20.26	PASS
4	1.1985	9.95	9.49	19.44	56.00	36.56	6.43	16.38	46.00	29.62	PASS
5	3.0435	9.93	11.78	21.71	56.00	34.29	6.65	16.58	46.00	29.42	PASS
6	9.1680	9.94	14.77	24.71	60.00	35.29	9.63	19.57	50.00	30.43	PASS

7.2 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.10.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 23 °C Humidity: 44 % RH Atmospheric Pressure: 1021 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.2.3 Test Setup Diagram

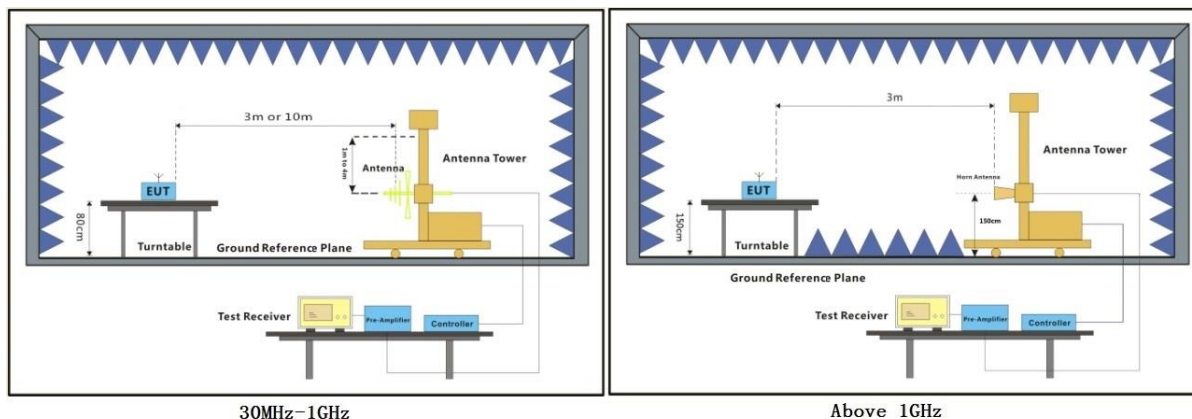


7.2.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11b_TX_CH_01_Horizontal_Peak

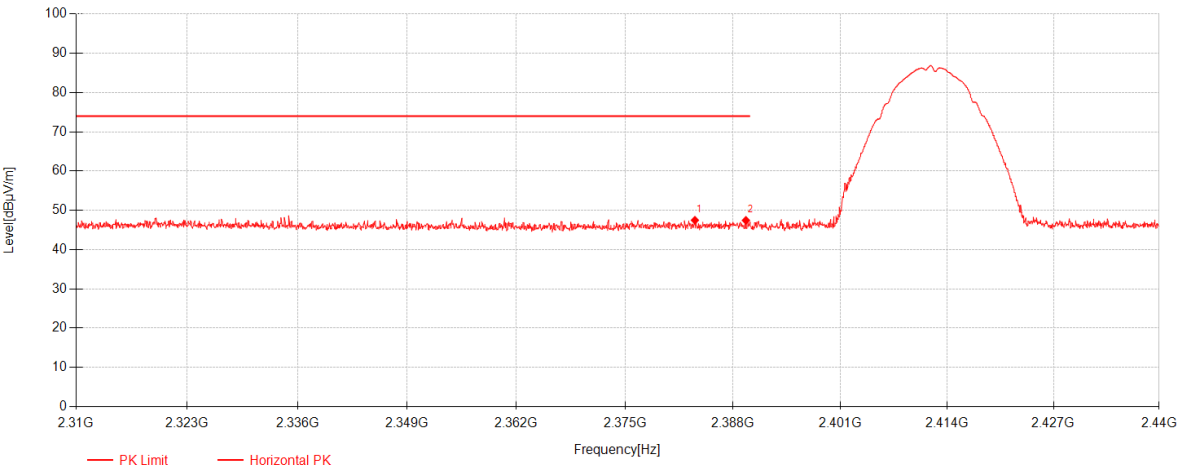


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.4067	44.01	26.99	-23.51	47.49	74.00	26.51	Horizontal
2	2389.56	43.96	27.00	-23.52	47.44	74.00	26.56	Horizontal

11b_TX_CH_01_Horizontal_Average

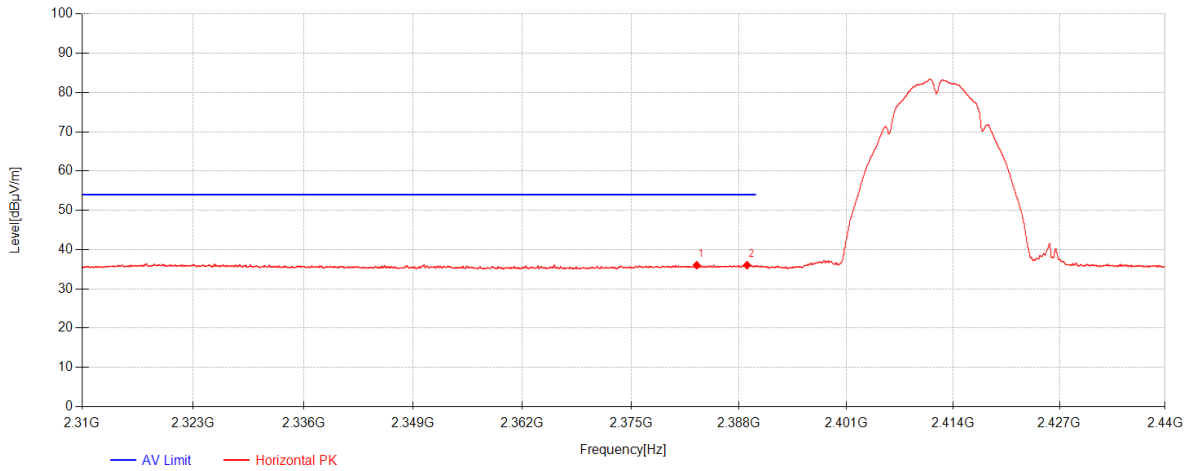


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.8975	32.52	26.99	-23.51	36.00	54.00	18.00	Horizontal
2	2388.975	32.55	27.00	-23.52	36.03	54.00	17.97	Horizontal

11b_TX_CH_01_Vertical_Peak

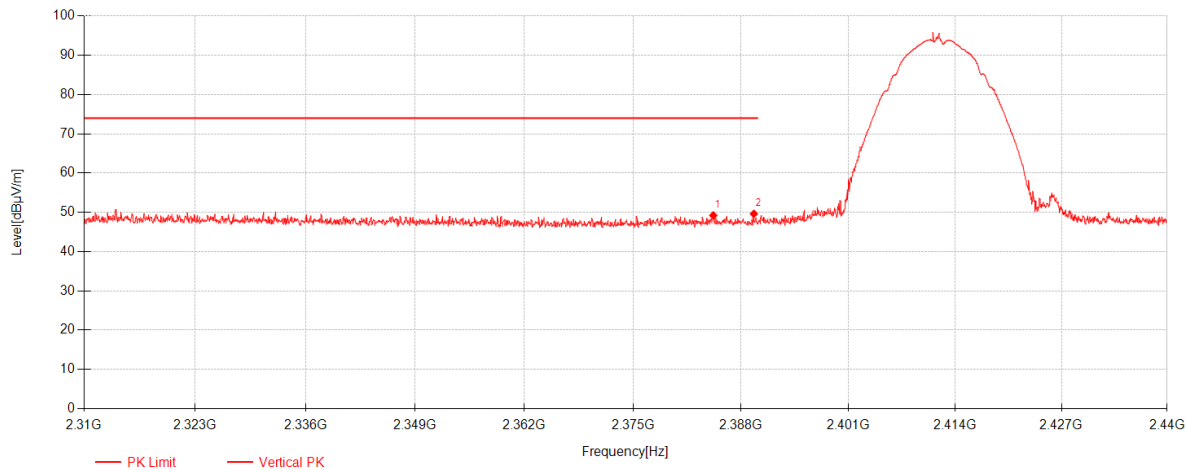


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.6633	45.73	26.99	-23.51	49.21	74.00	24.79	Vertical
2	2389.56	46.14	27.00	-23.52	49.62	74.00	24.38	Vertical

11b_TX_CH_01_Vertical_Average

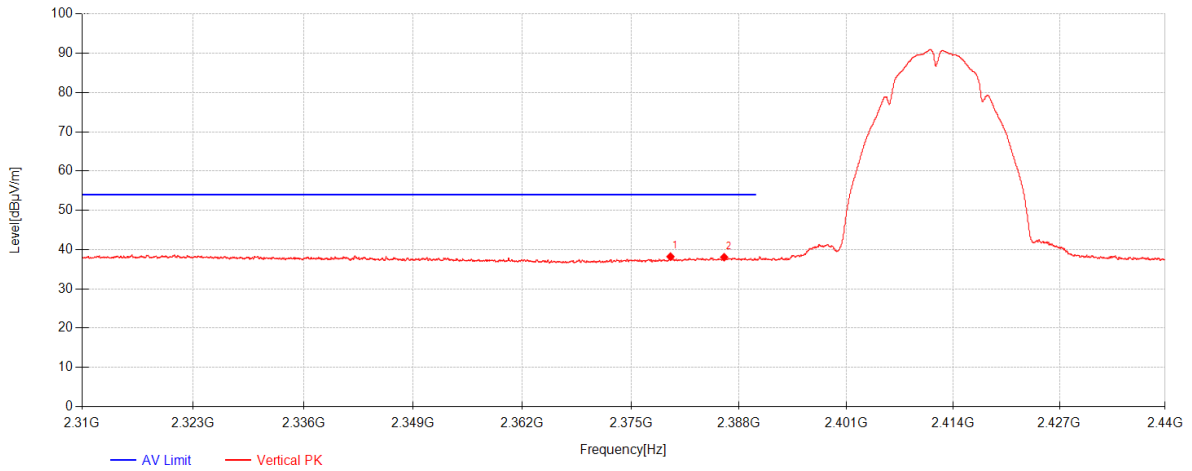


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.745	34.73	26.98	-23.50	38.21	54.00	15.79	Vertical
2	2386.2125	34.58	27.00	-23.51	38.06	54.00	15.94	Vertical

11b_TX_CH_11_Horizontal_Peak

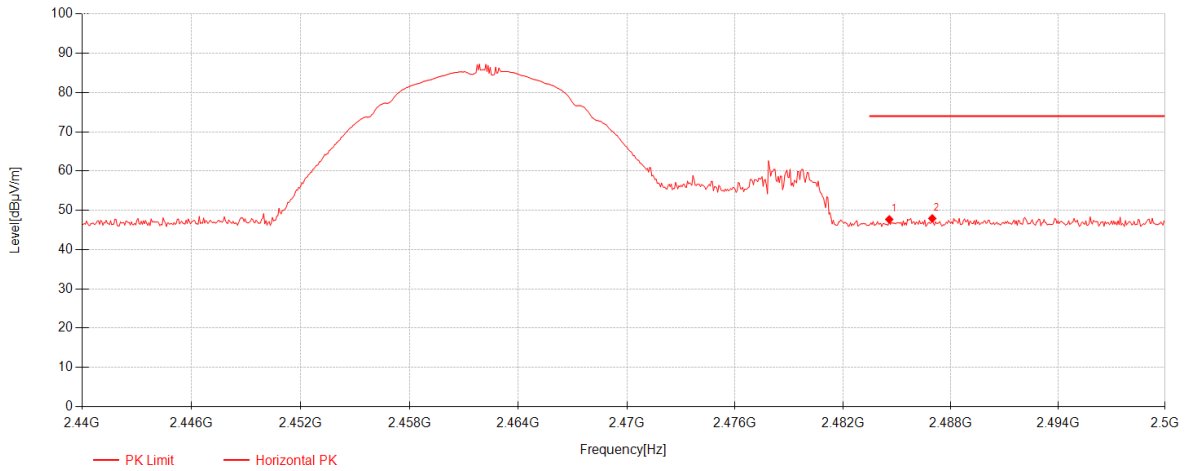


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.58	43.69	27.17	-23.17	47.69	74.00	26.31	Horizontal
2	2486.98	43.92	27.18	-23.16	47.93	74.00	26.07	Horizontal

11b_TX_CH_11_Horizontal_Average

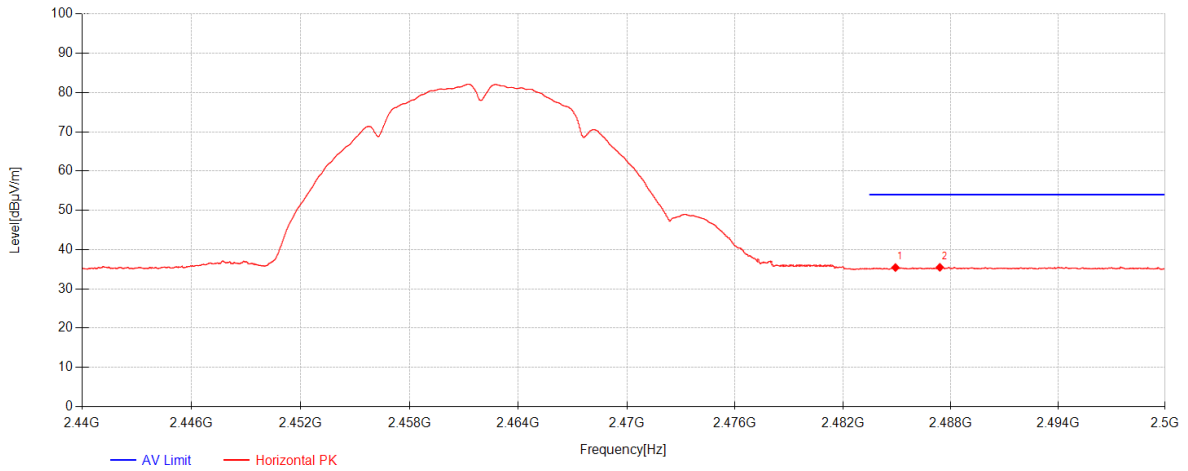

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.925	31.43	27.17	-23.17	35.43	54.00	18.57	Horizontal
2	2487.4	31.48	27.18	-23.16	35.49	54.00	18.51	Horizontal


11b_TX_CH_11_Vertical_Peak

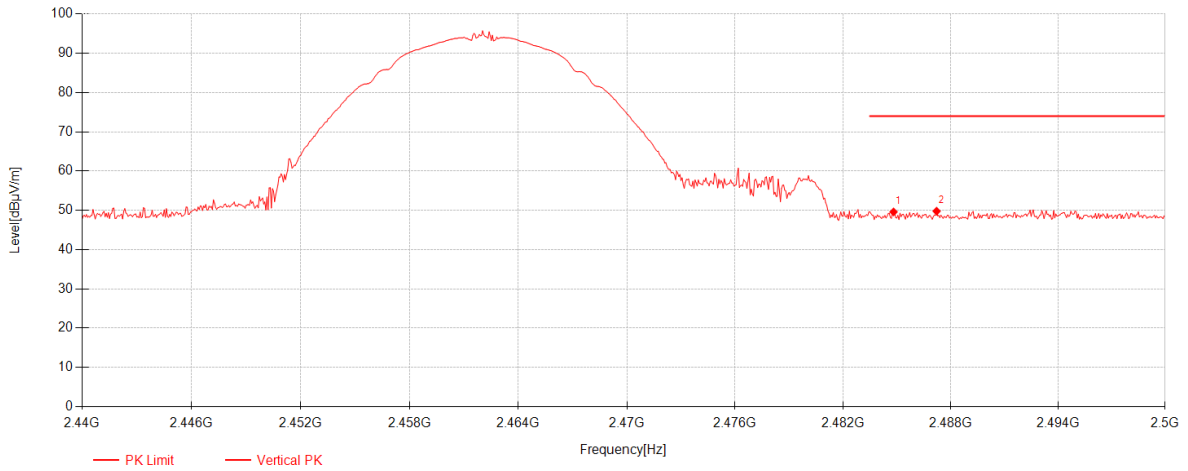

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.82	45.59	27.17	-23.17	49.59	74.00	24.41	Vertical
2	2487.22	45.78	27.18	-23.16	49.79	74.00	24.21	Vertical




11b_TX_CH_11_Vertical_Average

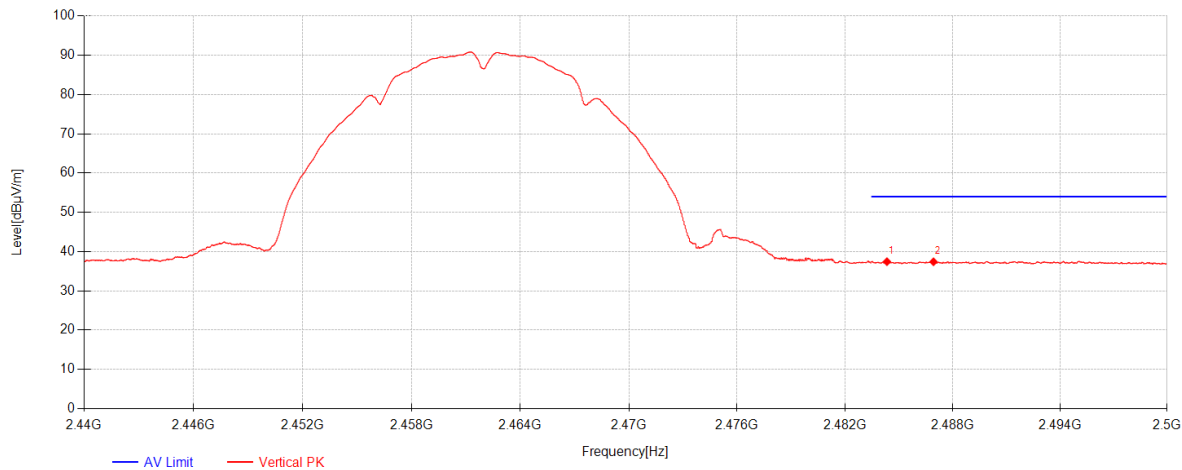


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.34	33.43	27.17	-23.18	37.43	54.00	16.57	Vertical
2	2486.935	33.40	27.18	-23.16	37.41	54.00	16.59	Vertical

11ax(HE20)_TX_CH_01_Horizontal_Peak

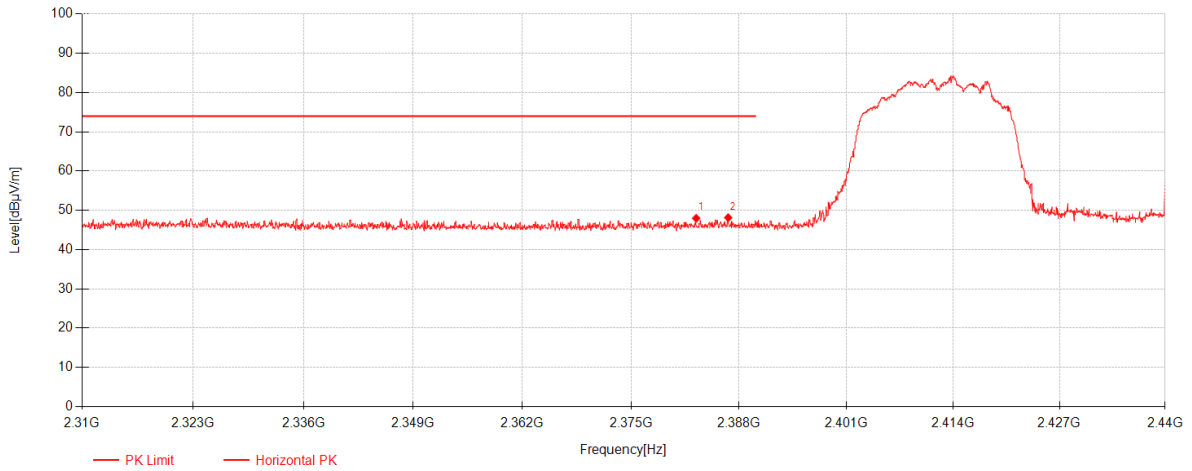


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2382.8433	44.50	26.99	-23.51	47.98	74.00	26.02	Horizontal
2	2386.7	44.67	27.00	-23.51	48.15	74.00	25.85	Horizontal

11ax(HE20)_TX_CH_01_Horizontal_Average

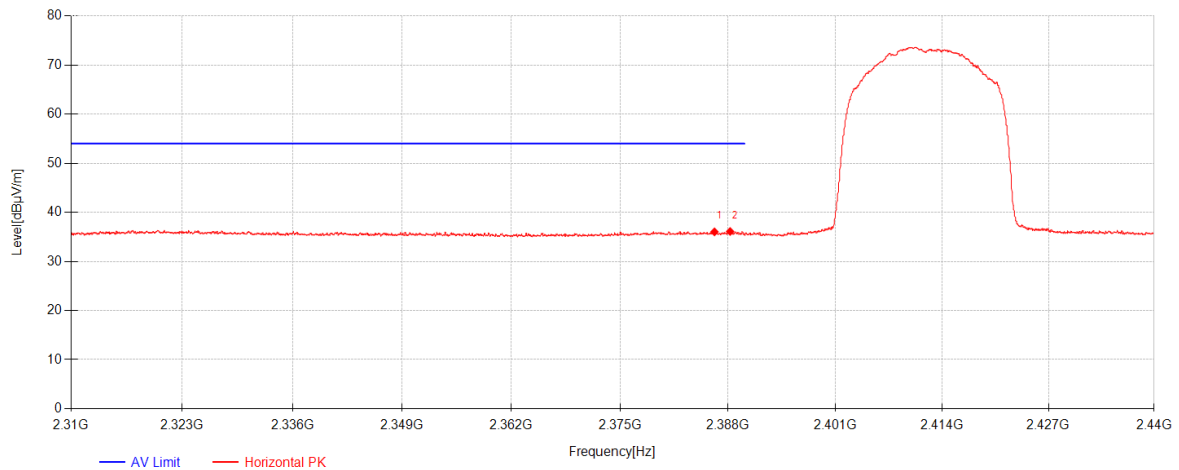


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.375	32.54	27.00	-23.51	36.02	54.00	17.98	Horizontal
2	2388.26	32.62	27.00	-23.51	36.10	54.00	17.90	Horizontal

11ax(HE20)_TX_CH_01_Vertical_Peak

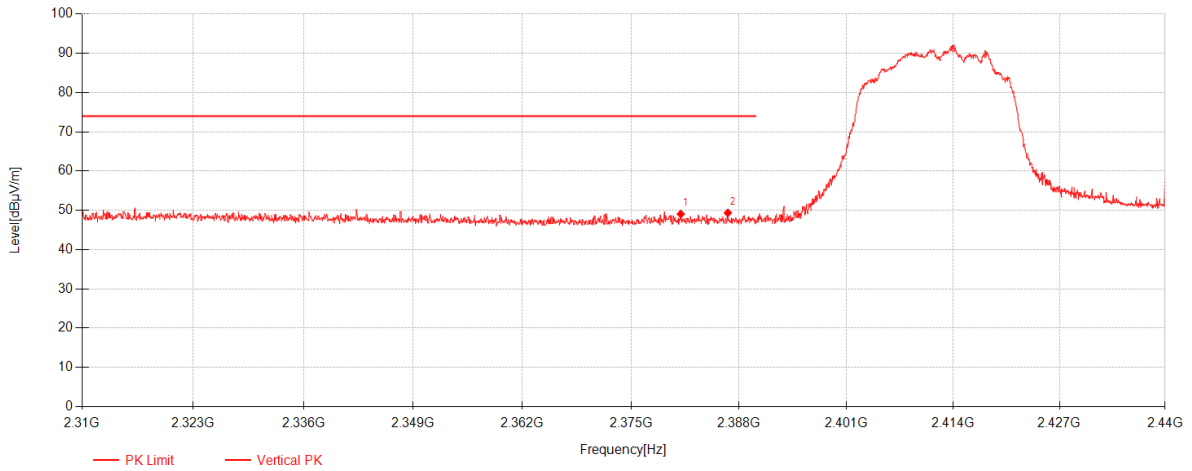

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2380.98	45.57	26.99	-23.51	49.05	74.00	24.95	Vertical
2	2386.6567	45.87	27.00	-23.51	49.35	74.00	24.65	Vertical


11ax(HE20)_TX_CH_01_Veritical_Average

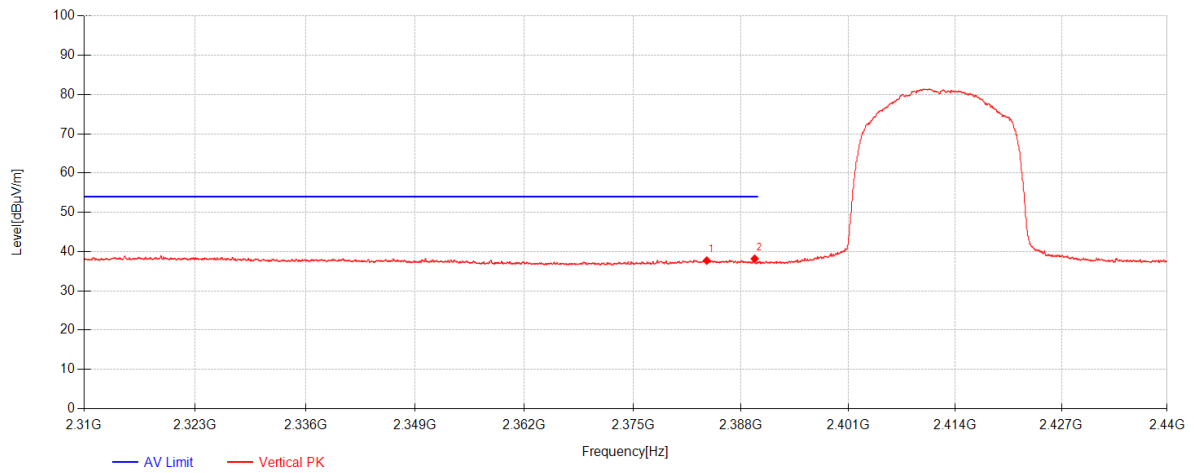

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.8725	34.22	26.99	-23.51	37.70	54.00	16.30	Vertical
2	2389.6575	34.70	27.00	-23.52	38.18	54.00	15.82	Vertical




11ax(HE20)_TX_CH_11_Horizontal_Peak

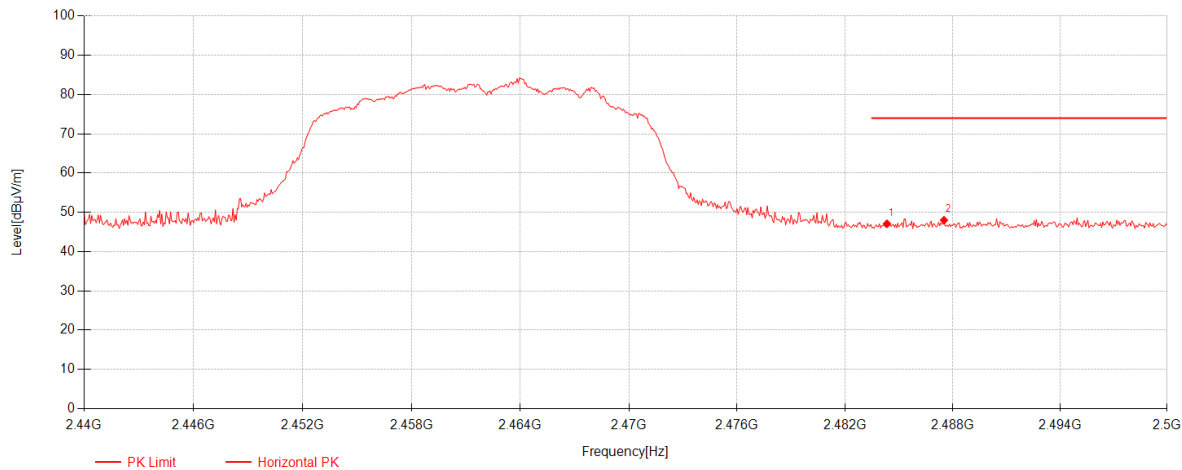


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.34	43.08	27.17	-23.18	47.08	74.00	26.92	Horizontal
2	2487.52	43.99	27.18	-23.16	48.01	74.00	25.99	Horizontal

11ax(HE20)_TX_CH_11_Horizontal_Average

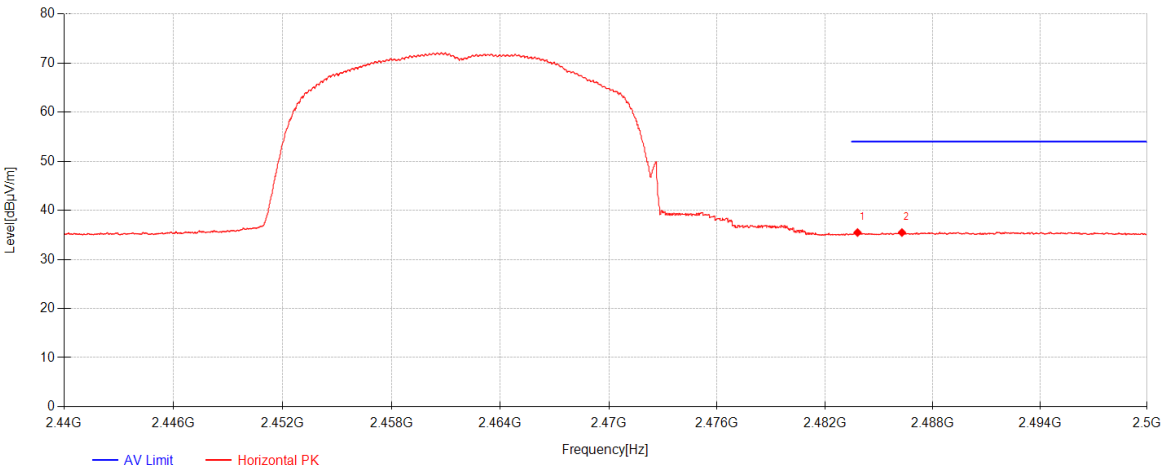


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.815	31.48	27.17	-23.18	35.47	54.00	18.53	Horizontal
2	2486.29	31.46	27.18	-23.17	35.47	54.00	18.53	Horizontal

11ax(HE20)_TX_CH_11_Vertical_Peak

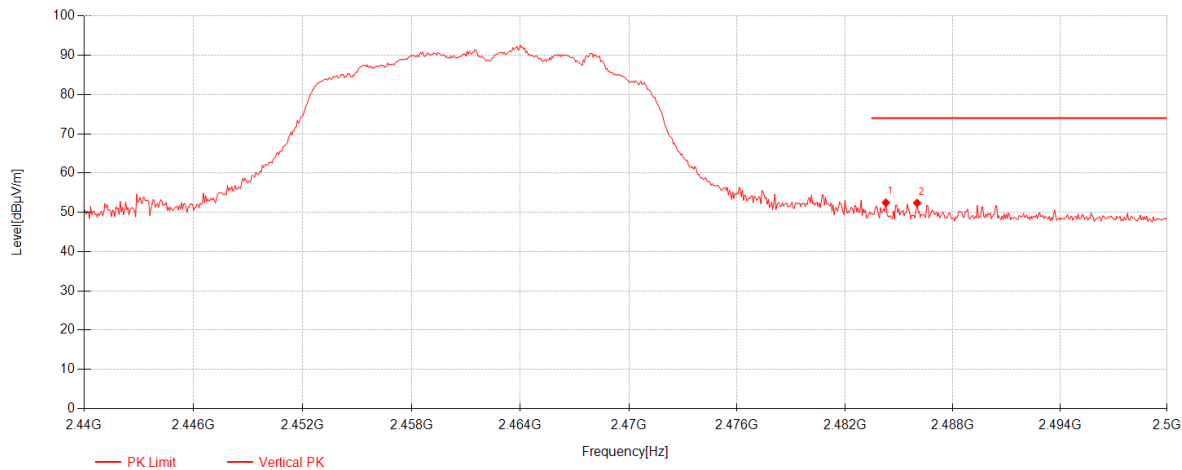


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.28	48.46	27.17	-23.18	52.46	74.00	21.54	Vertical
2	2486.02	48.37	27.17	-23.17	52.38	74.00	21.62	Vertical

11ax(HE20)_TX_CH_11_Veritical_Average

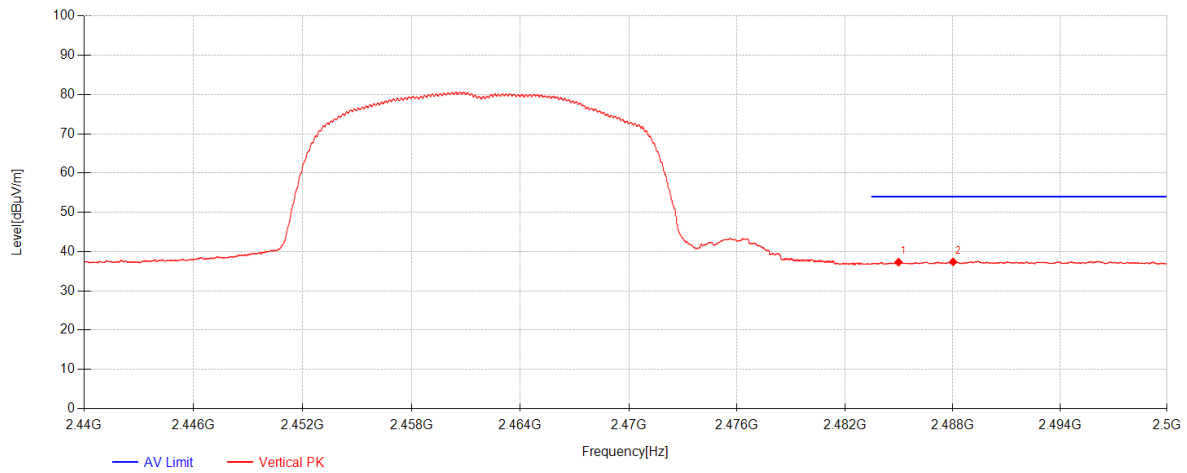


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.985	33.32	27.17	-23.17	37.32	54.00	16.68	Vertical
2	2488.03	33.35	27.18	-23.16	37.37	54.00	16.63	Vertical

11ax(HE40)_TX_CH_03_Horizontal_Peak

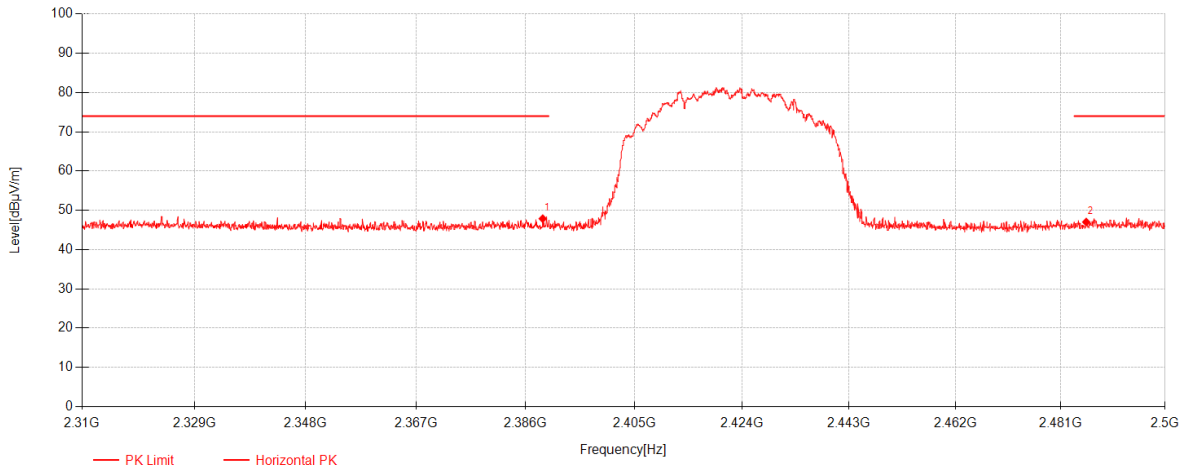


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.9925	44.39	27.00	-23.52	47.87	74.00	26.13	Horizontal
2	2485.655	43.02	27.17	-23.17	47.02	74.00	26.98	Horizontal

11ax(HE40)_TX_CH_03_Horizontal_Average

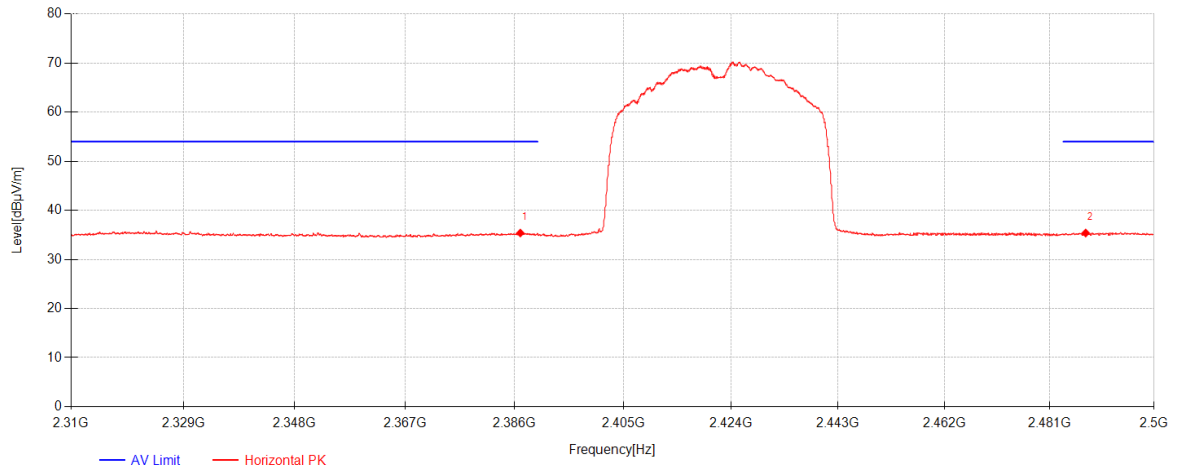


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.9975	31.90	27.00	-23.51	35.38	54.00	18.62	Horizontal
2	2487.555	31.36	27.18	-23.16	35.38	54.00	18.62	Horizontal

11ax(HE40)_TX_CH_03_Vertical_Peak

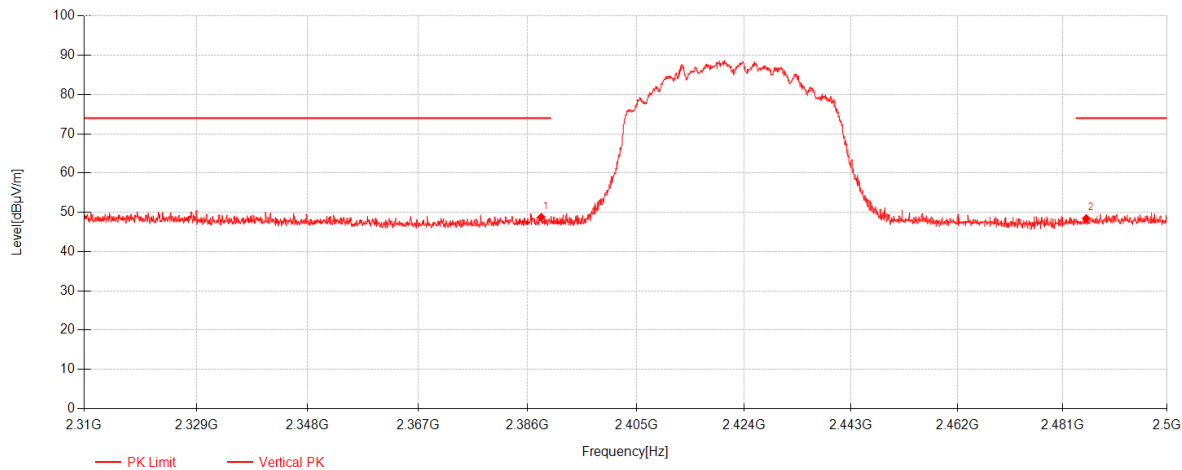


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.375	45.28	27.00	-23.51	48.76	74.00	25.24	Vertical
2	2485.275	44.42	27.17	-23.17	48.42	74.00	25.58	Vertical

11ax(HE40)_TX_CH_03_Vertical_Average

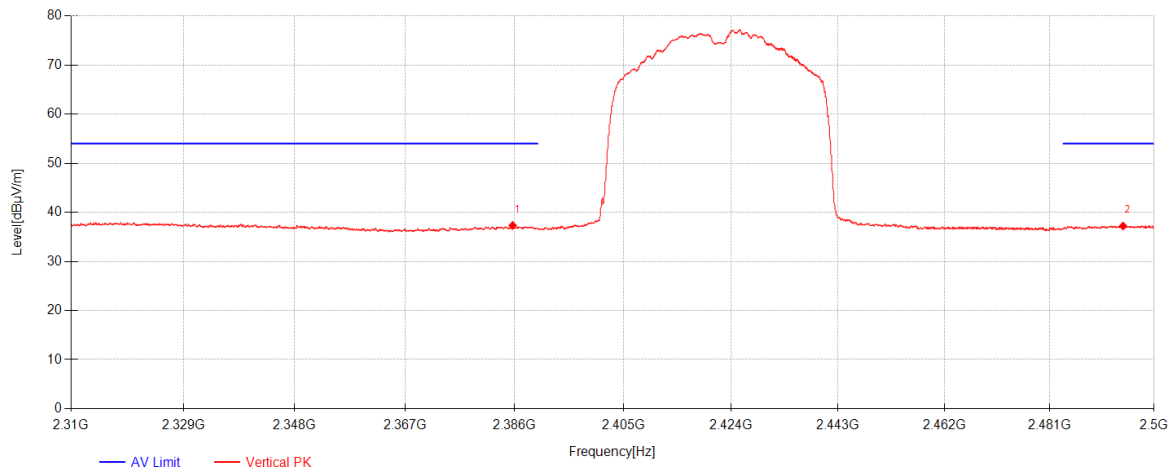


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.6675	33.83	26.99	-23.51	37.31	54.00	16.69	Vertical
2	2494.3475	33.15	27.19	-23.13	37.21	54.00	16.79	Vertical

11ax(HE40)_TX_CH_09_Horizontal_Peak

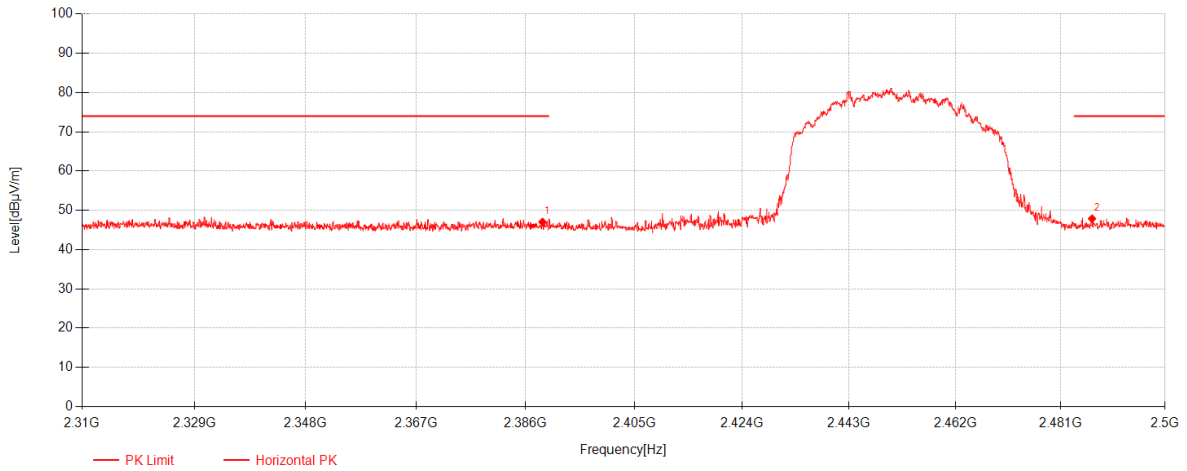

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.945	43.55	27.00	-23.52	47.03	74.00	26.97	Horizontal
2	2486.7	43.86	27.18	-23.17	47.87	74.00	26.13	Horizontal


11ax(HE40)_TX_CH_09_Horizontal_Average

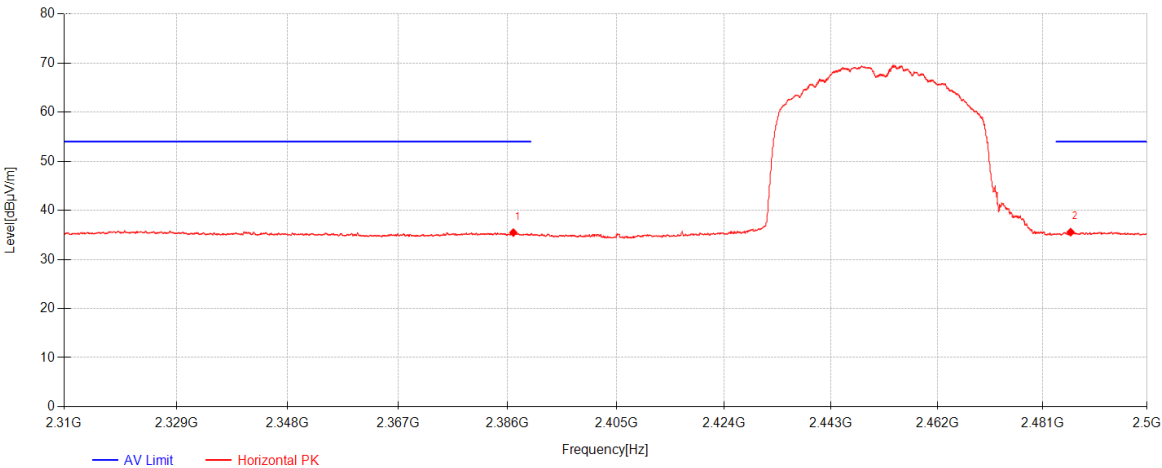

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.9975	31.98	27.00	-23.51	35.46	54.00	18.54	Horizontal
2	2486.0825	31.54	27.17	-23.17	35.55	54.00	18.45	Horizontal




11ax(HE40)_TX_CH_09_Vertical_Peak

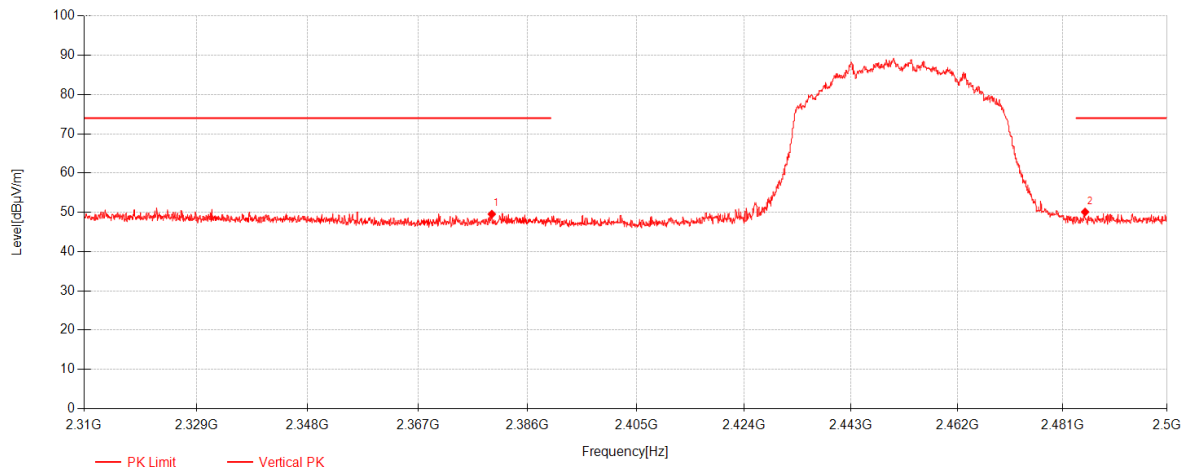

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.7775	46.06	26.98	-23.50	49.54	74.00	24.46	Vertical
2	2485.085	46.09	27.17	-23.17	50.09	74.00	23.91	Vertical


11ax(HE40)_TX_CH_09_Veritical_Average

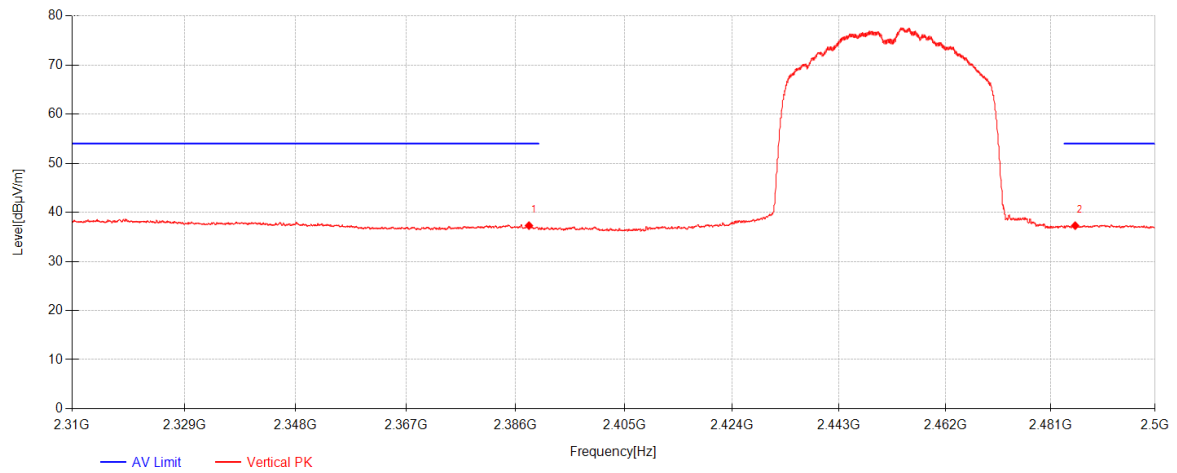

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2388.3275	33.81	27.00	-23.51	37.29	54.00	16.71	Vertical
2	2485.465	33.29	27.17	-23.17	37.29	54.00	16.71	Vertical




11ax(HE20)_RU26_Left_TX_CH_01_Horizontal_Peak

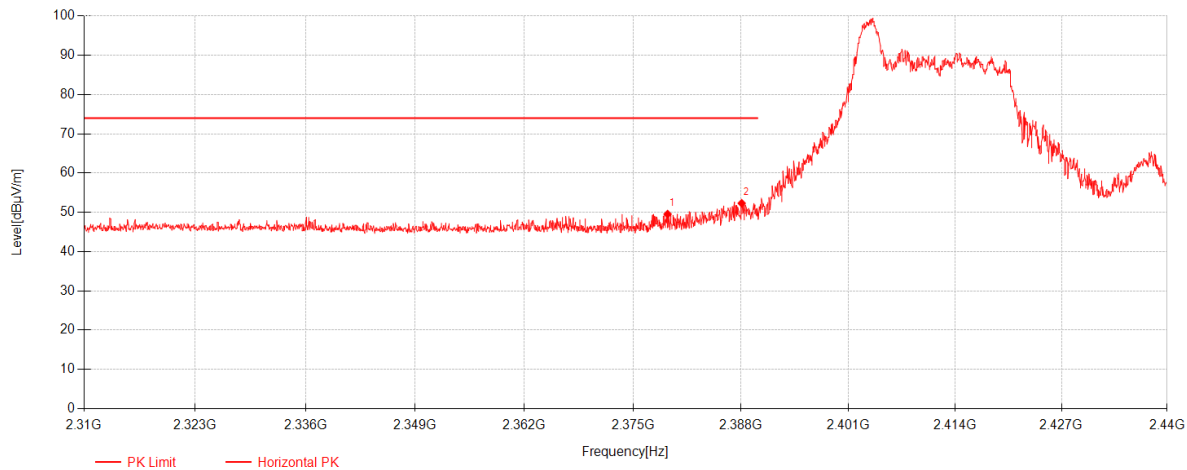


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2379.16	46.06	26.98	-23.50	49.54	74.00	24.46	Horizontal
2	2388.0867	48.83	27.00	-23.51	52.31	74.00	21.69	Horizontal

11ax(HE20)_RU26_Left_TX_CH_01_Horizontal_Average

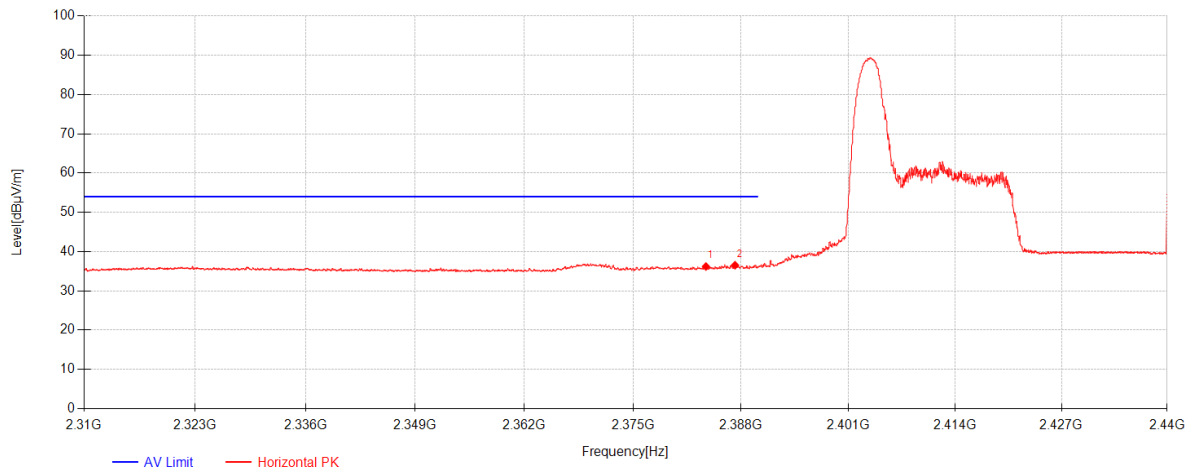


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.775	32.72	26.99	-23.51	36.20	54.00	17.80	Horizontal
2	2387.285	33.05	27.00	-23.51	36.53	54.00	17.47	Horizontal

11ax(HE20)_RU26_Left_TX_CH_01_Vertical_Peak

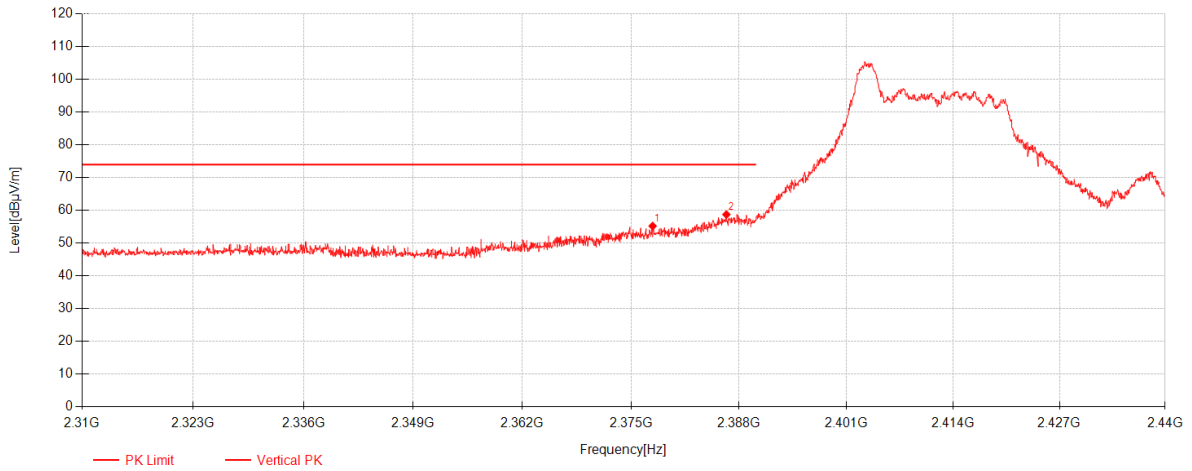


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2377.6	51.72	26.98	-23.50	55.20	74.00	18.80	Vertical
2	2386.4833	55.24	27.00	-23.51	58.72	74.00	15.28	Vertical

11ax(HE20)_RU26_Left_TX_CH_01_Vertical_Average

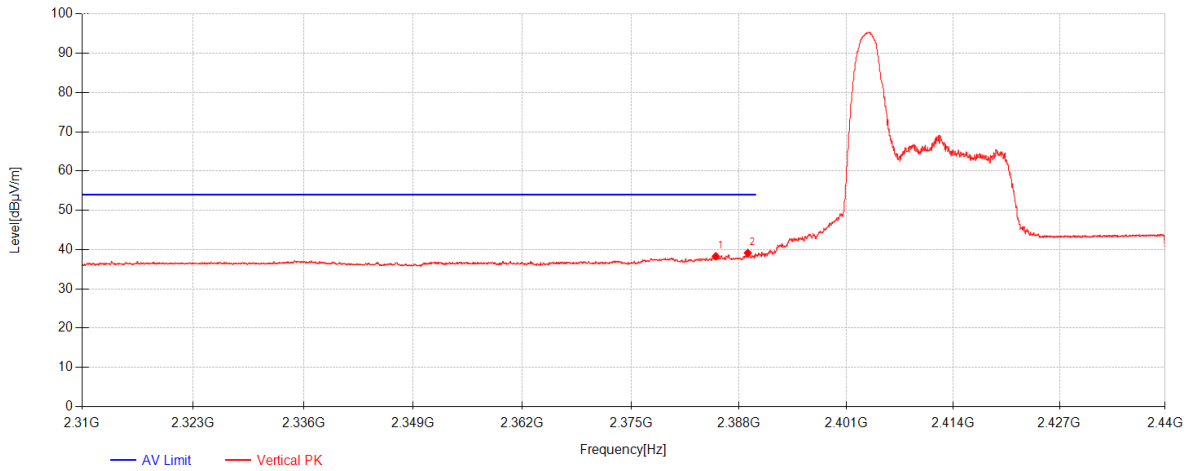


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.205	34.83	26.99	-23.51	38.31	54.00	15.69	Vertical
2	2389.0725	35.66	27.00	-23.52	39.14	54.00	14.86	Vertical

11ax(HE20)_RU26_right_TX_CH_11_Horizontal_Peak

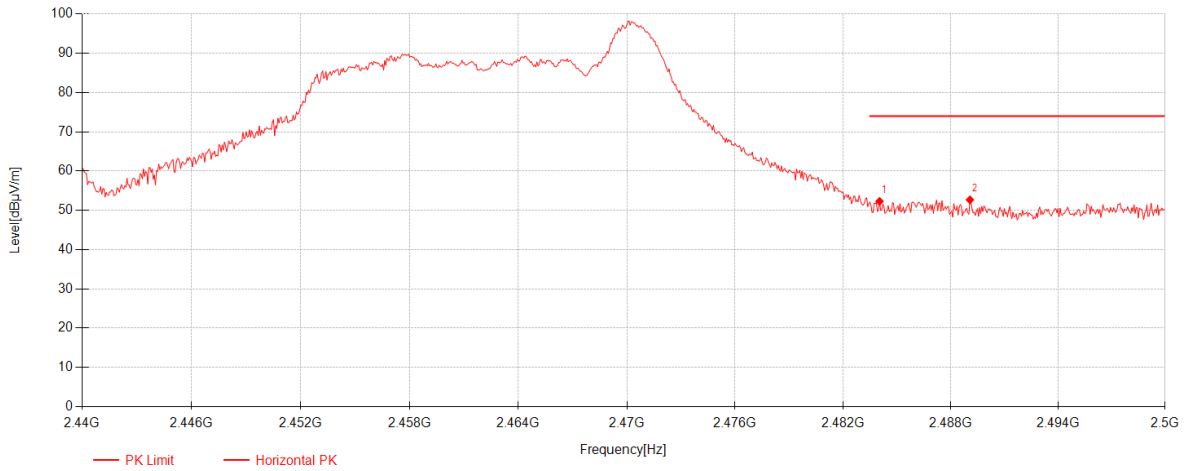


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.04	48.30	27.17	-23.18	52.29	74.00	21.71	Horizontal
2	2489.08	48.66	27.18	-23.16	52.68	74.00	21.32	Horizontal

11ax(HE20)_RU26_right_TX_CH_11_Horizontal_Average

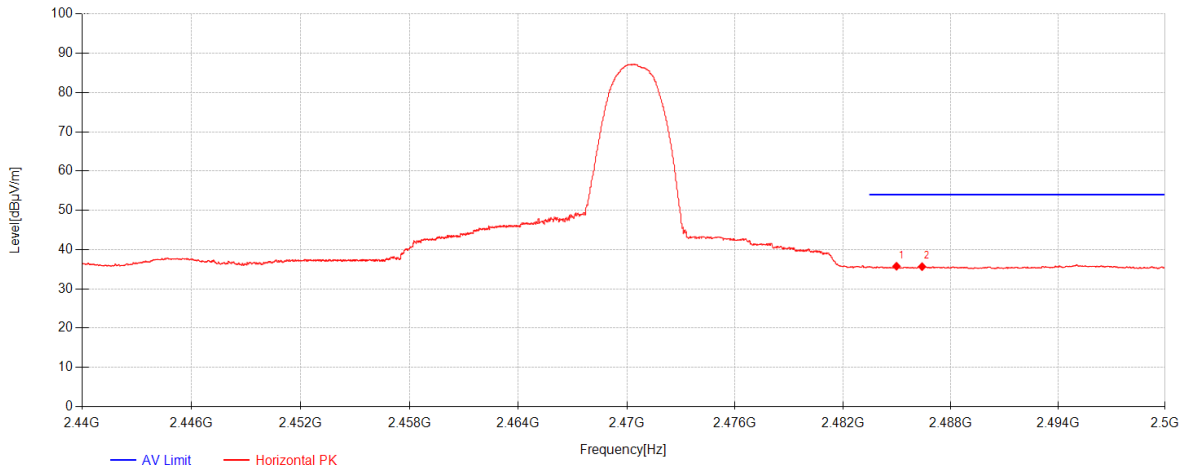


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.985	31.76	27.17	-23.17	35.76	54.00	18.24	Horizontal
2	2486.41	31.65	27.18	-23.17	35.66	54.00	18.34	Horizontal

11ax(HE20)_RU26_right_TX_CH_11_Vertical_Peak

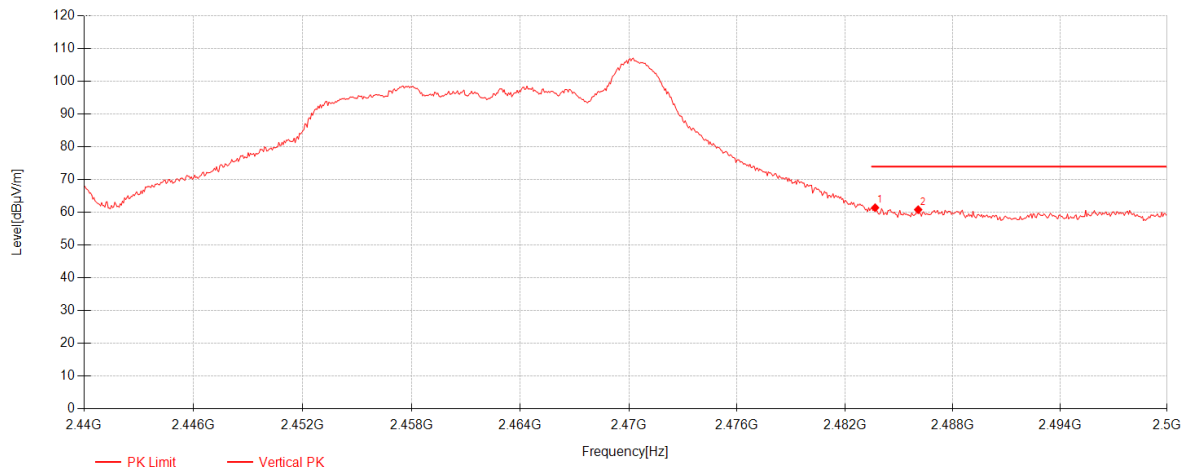


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	57.43	27.17	-23.18	61.42	74.00	12.58	Vertical
2	2486.08	56.81	27.17	-23.17	60.82	74.00	13.18	Vertical

11ax(HE20)_RU26_right_TX_CH_11_Vertical_Average

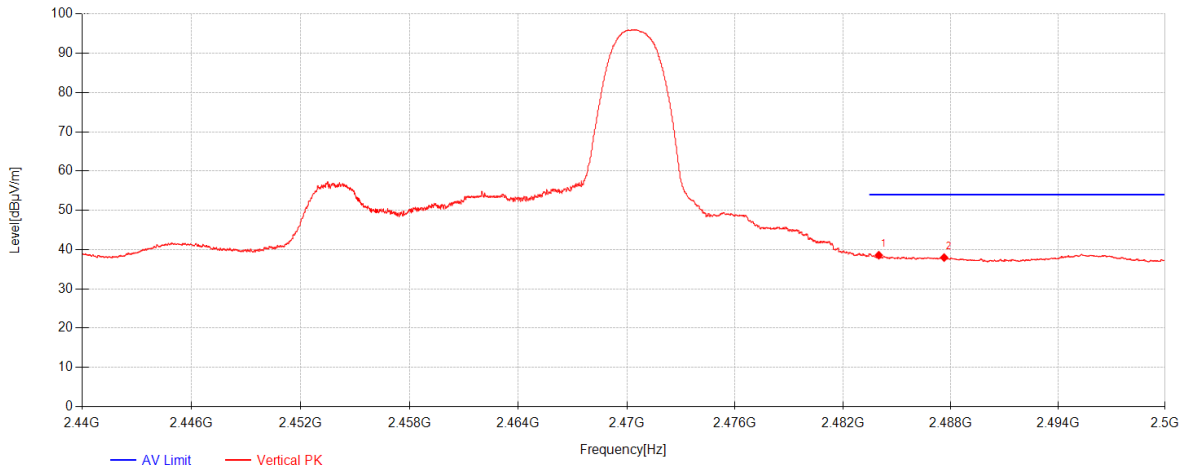

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.995	34.58	27.17	-23.18	38.57	54.00	15.43	Vertical
2	2487.64	33.95	27.18	-23.16	37.97	54.00	16.03	Vertical


11ax(HE20)_RU52_Left_TX_CH_01_Horizontal_Peak

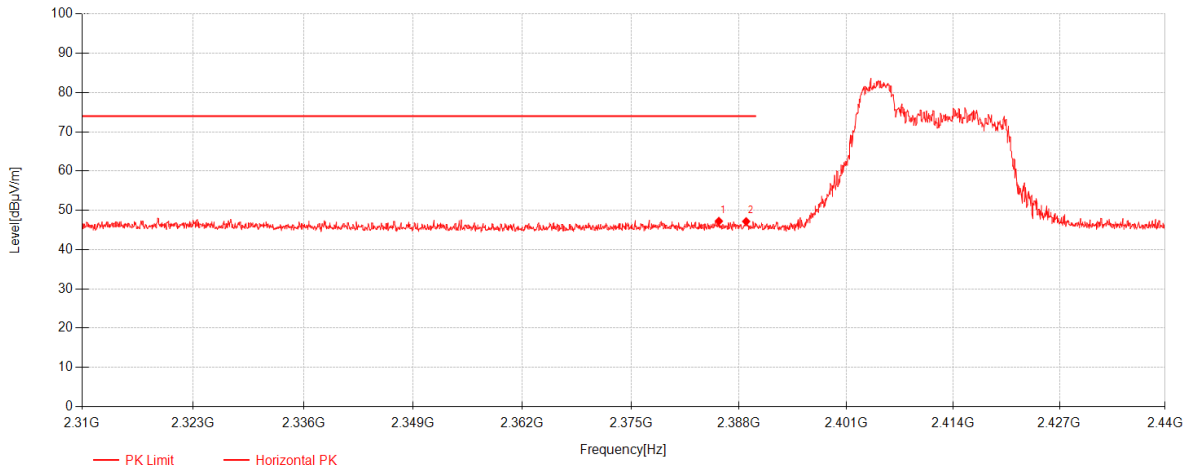

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2385.5733	43.77	26.99	-23.51	47.25	74.00	26.75	Horizontal
2	2388.8667	43.70	27.00	-23.52	47.18	74.00	26.82	Horizontal




11ax(HE20)_RU52_Left_TX_CH_01_Horizontal_Average

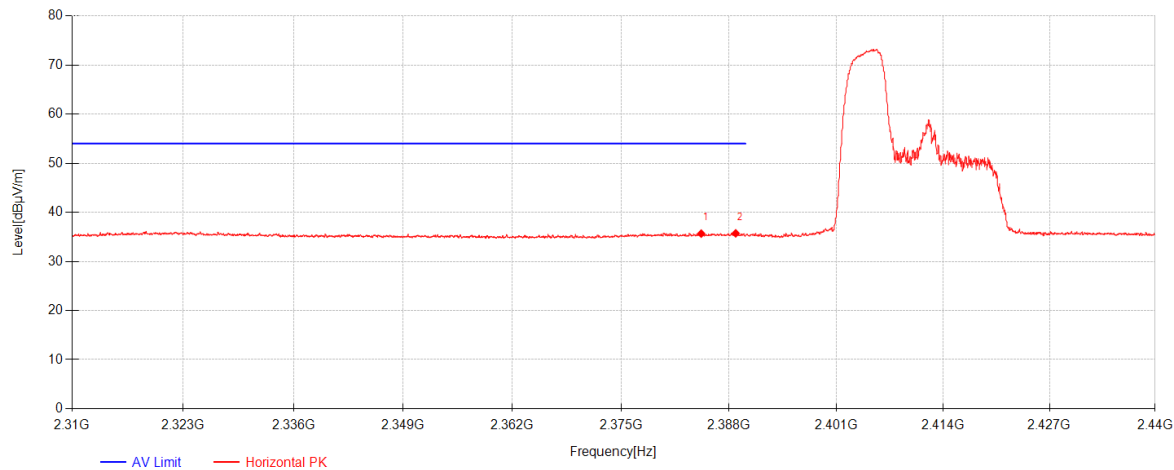

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.6525	32.19	26.99	-23.51	35.67	54.00	18.33	Horizontal
2	2388.8125	32.24	27.00	-23.52	35.72	54.00	18.28	Horizontal




11ax(HE20)_RU52_Left_TX_CH_01_Vertical_Peak

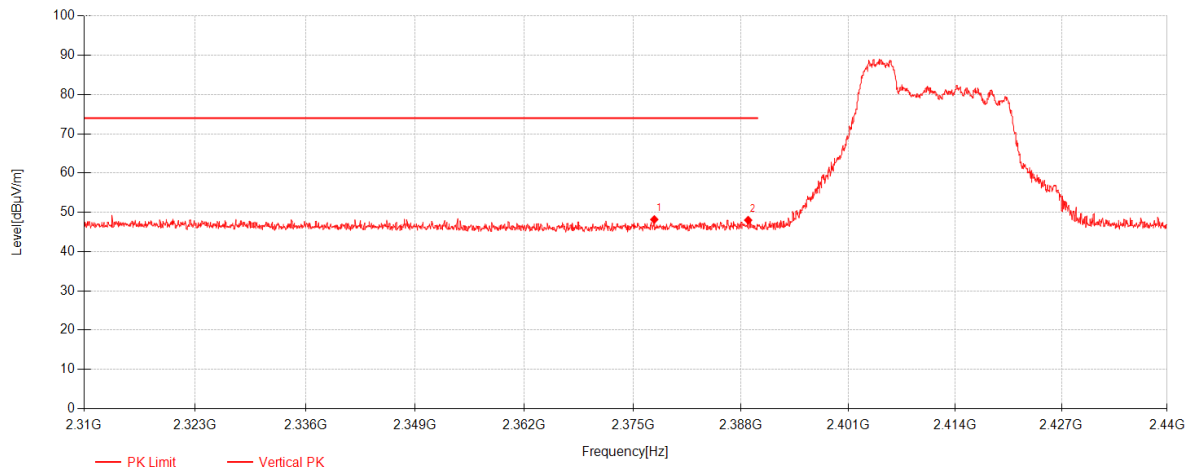


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2377.5567	44.69	26.98	-23.50	48.17	74.00	25.83	Vertical
2	2388.8667	44.52	27.00	-23.52	48.00	74.00	26.00	Vertical

11ax(HE20)_RU52_Left_TX_CH_01_Vertical_Average

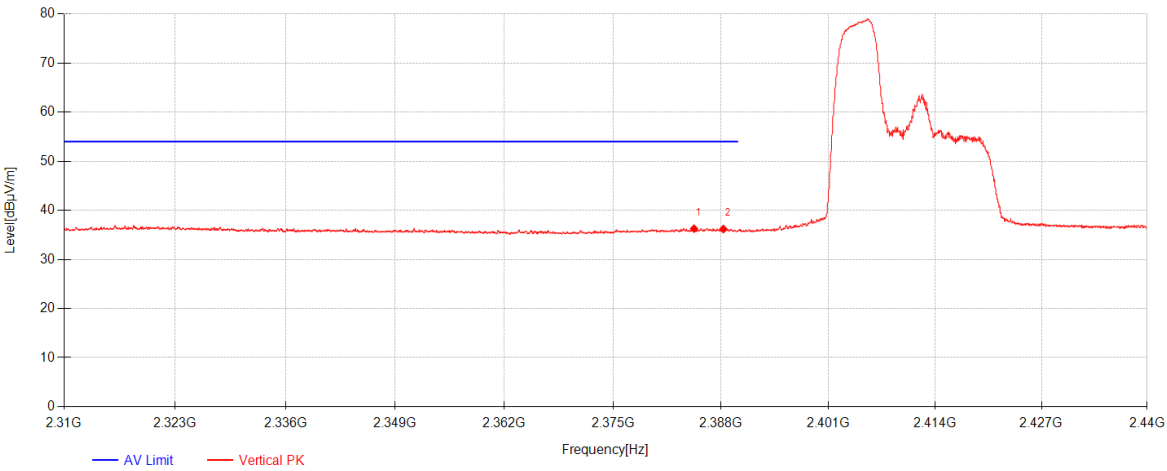


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2384.75	32.79	26.99	-23.51	36.27	54.00	17.73	Vertical
2	2388.2925	32.71	27.00	-23.51	36.19	54.00	17.81	Vertical

11ax(HE20)_RU52_right_TX_CH_11_Horizontal_Peak

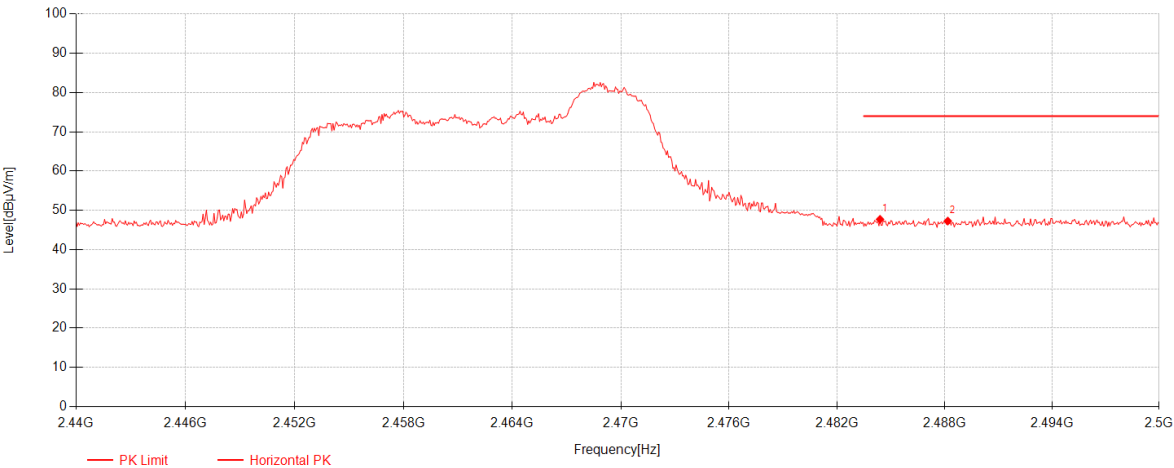


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.4	43.71	27.17	-23.18	47.71	74.00	26.29	Horizontal
2	2488.18	43.25	27.18	-23.16	47.27	74.00	26.73	Horizontal

11ax(HE20)_RU52_right_TX_CH_11_Horizontal_Average

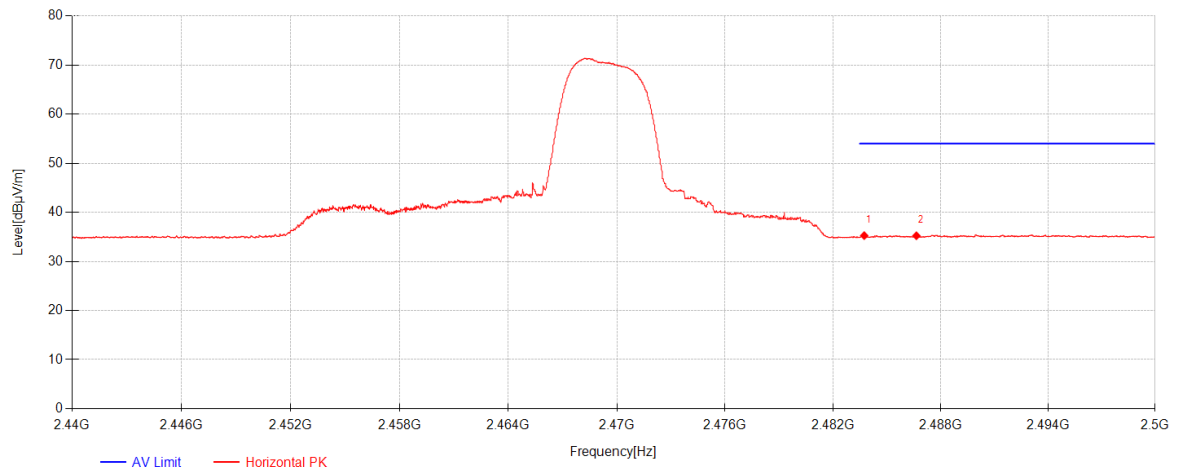


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.74	31.27	27.17	-23.18	35.26	54.00	18.74	Horizontal
2	2486.65	31.22	27.18	-23.17	35.23	54.00	18.77	Horizontal

11ax(HE20)_RU52_right_TX_CH_11_Vertical_Peak

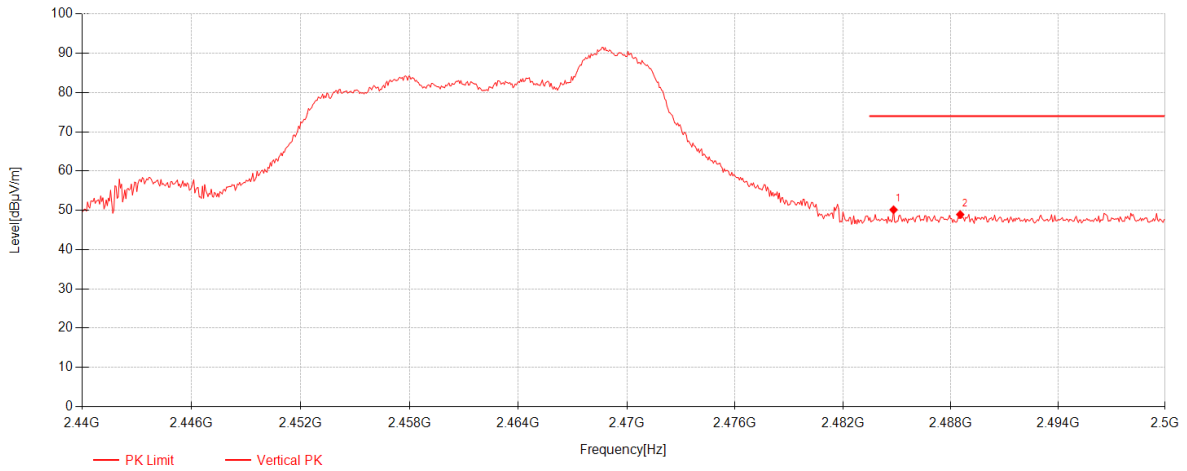


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.82	46.15	27.17	-23.17	50.15	74.00	23.85	Vertical
2	2488.54	44.91	27.18	-23.16	48.93	74.00	25.07	Vertical

11ax(HE20)_RU52_right_TX_CH_11_Vertical_Average

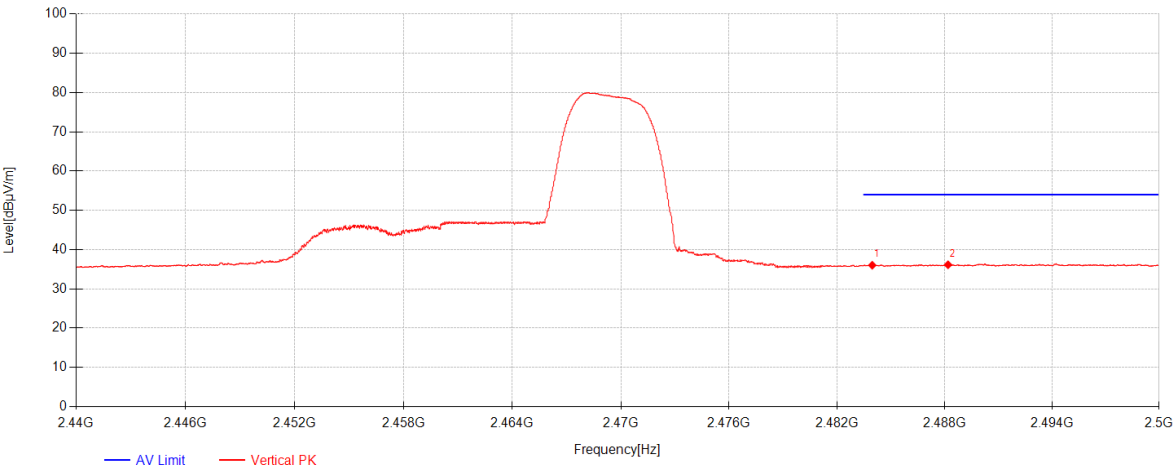


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.965	32.03	27.17	-23.18	36.02	54.00	17.98	Vertical
2	2488.195	32.12	27.18	-23.16	36.14	54.00	17.86	Vertical

11ax(HE20)_RU106_Left_TX_CH_01_Horizontal_Peak

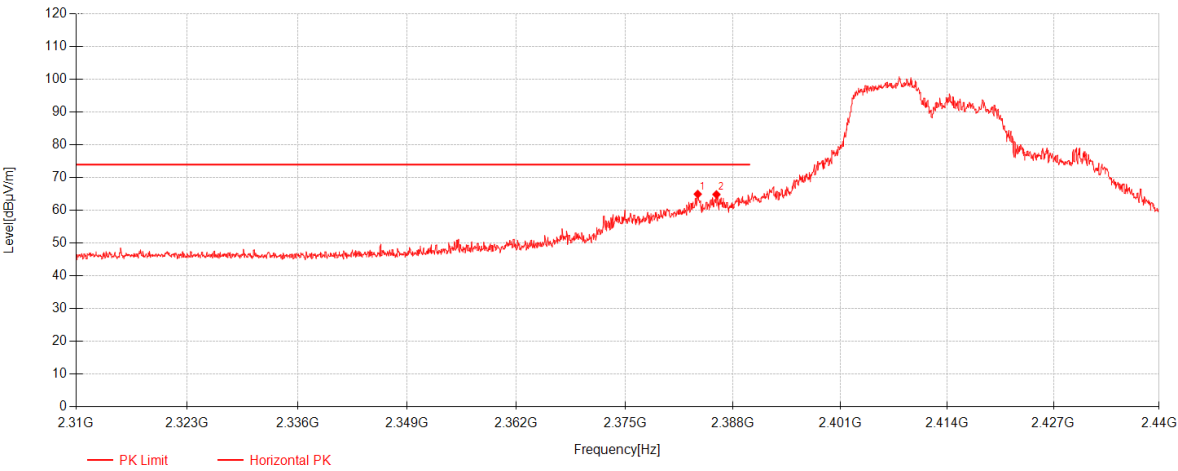


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2383.7533	61.48	26.99	-23.51	64.96	74.00	9.04	Horizontal
2	2386.0067	61.37	26.99	-23.51	64.85	74.00	9.15	Horizontal

11ax(HE20)_RU106_Left_TX_CH_01_Horizontal_Average

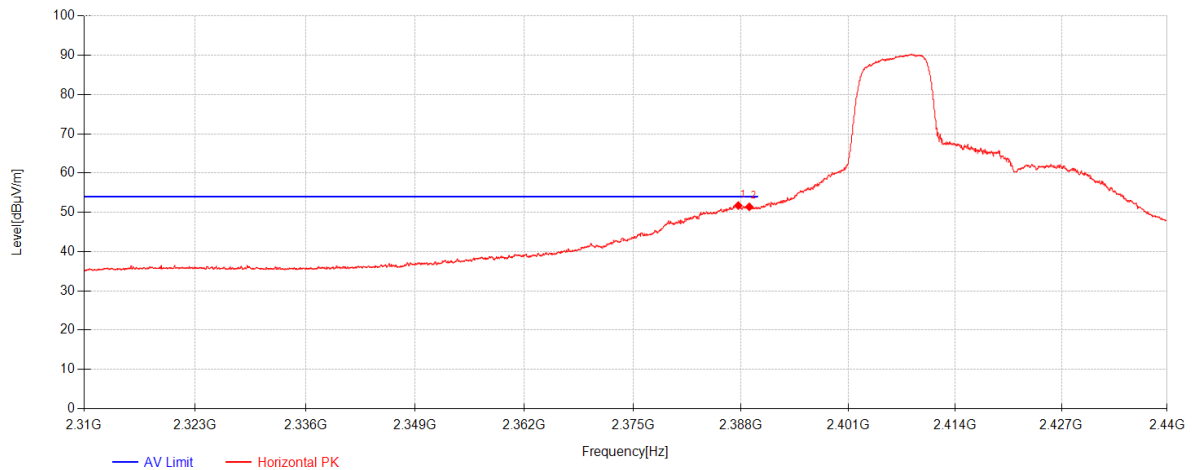

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2387.675	48.25	27.00	-23.51	51.73	54.00	2.27	Horizontal
2	2389.0075	47.93	27.00	-23.52	51.41	54.00	2.59	Horizontal


11ax(HE20)_RU106_Left_TX_CH_01_Vertical_Peak

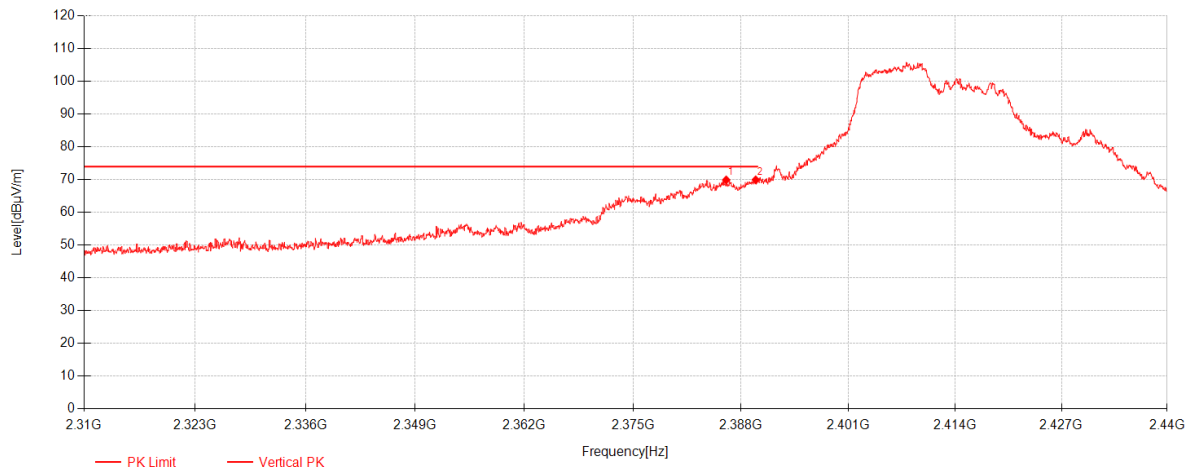

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.2233	66.44	27.00	-23.51	69.92	74.00	4.08	Vertical
2	2389.7767	66.47	27.00	-23.52	69.95	74.00	4.05	Vertical




11ax(HE20)_RU106_Left_TX_CH_01_Vertical_Average

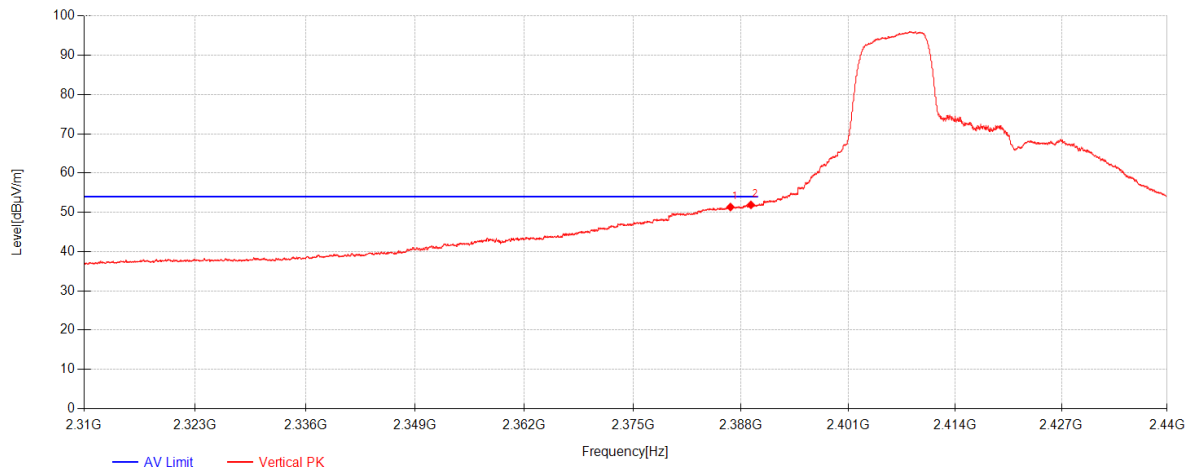

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2386.7325	47.87	27.00	-23.51	51.35	54.00	2.65	Vertical
2	2389.2025	48.42	27.00	-23.52	51.90	54.00	2.10	Vertical


11ax(HE20)_RU106_right_TX_CH_11_Horizontal_Peak

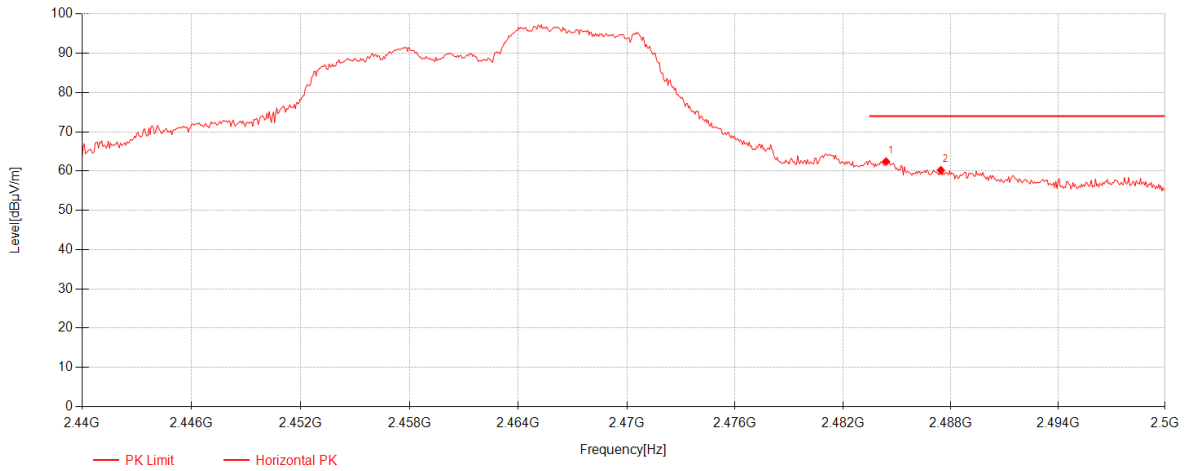

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.4	58.42	27.17	-23.18	62.42	74.00	11.58	Horizontal
2	2487.46	56.20	27.18	-23.16	60.21	74.00	13.79	Horizontal




11ax(HE20)_RU106_right_TX_CH_11_Horizontal_Average

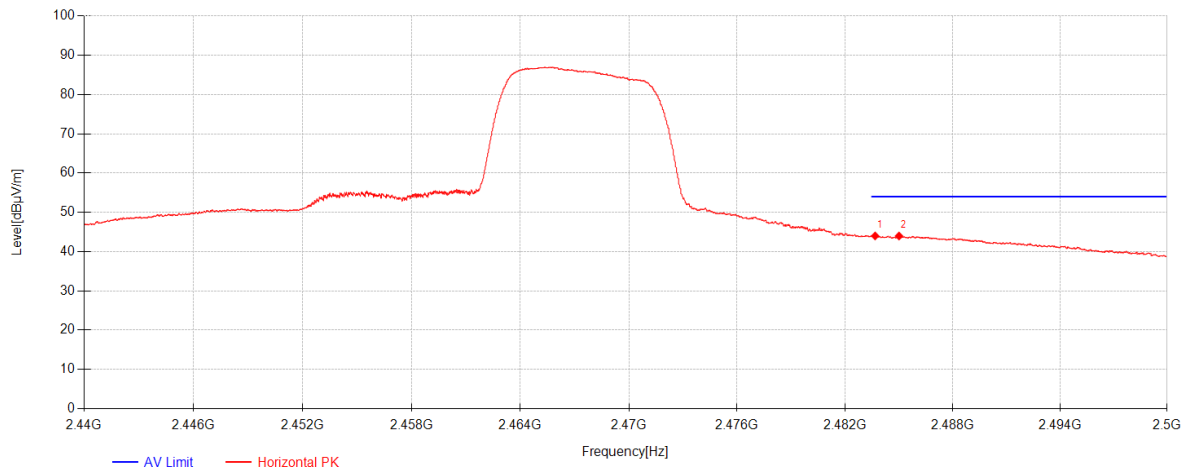

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.68	40.00	27.17	-23.18	43.99	54.00	10.01	Horizontal
2	2485.015	39.97	27.17	-23.17	43.97	54.00	10.03	Horizontal




11ax(HE20)_RU106_right_TX_CH_11_Vertical_Peak

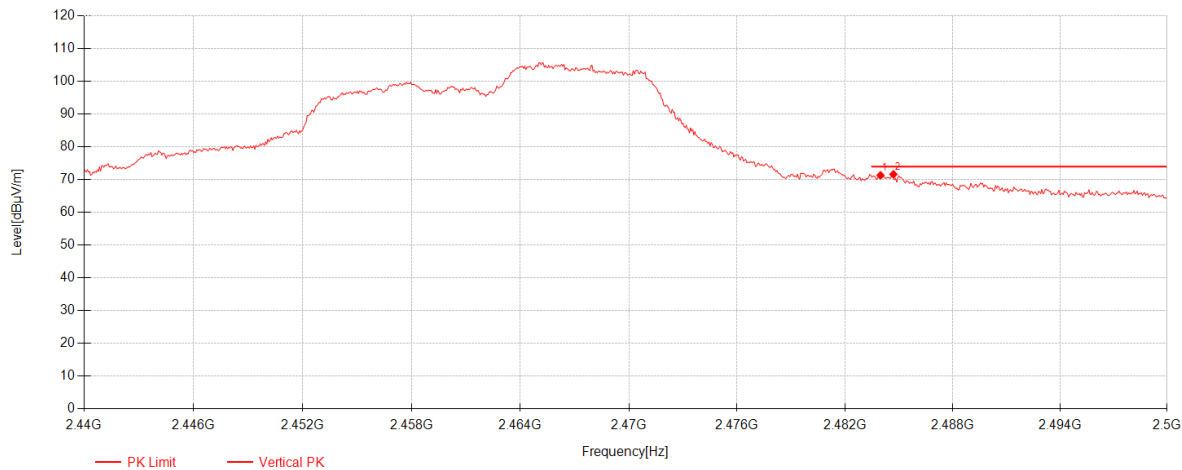

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2483.98	67.33	27.17	-23.18	71.32	74.00	2.68	Vertical
2	2484.7	67.62	27.17	-23.17	71.62	74.00	2.38	Vertical

11ax(HE20)_RU106_right_TX_CH_11_Vertical_Average

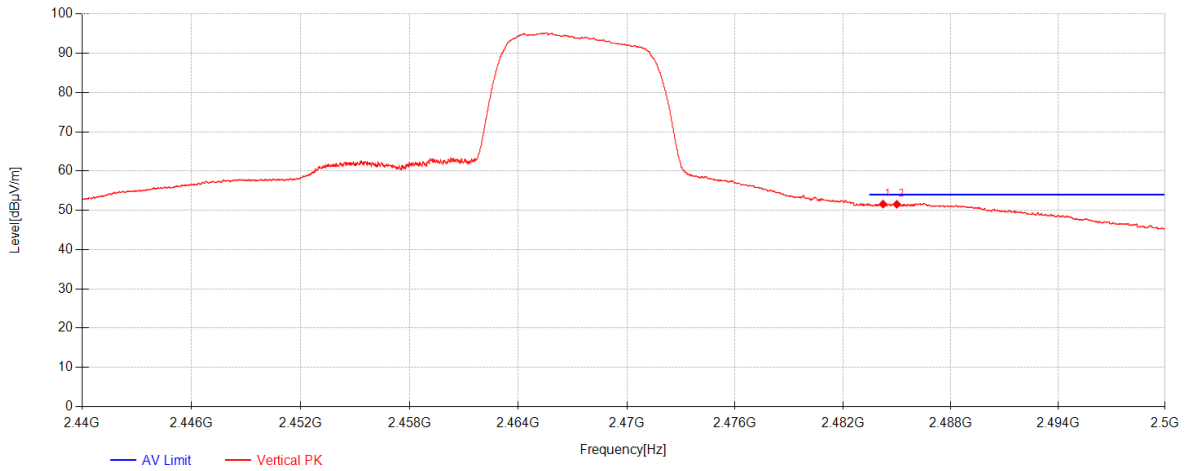

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2484.235	47.58	27.17	-23.18	51.58	54.00	2.42	Vertical
2	2485	47.54	27.17	-23.17	51.54	54.00	2.46	Vertical

7.3 Radiated Spurious Emissions Below 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.4,6.5

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
960-1000	500	3

7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 44 % RH

Atmospheric Pressure: 1021 mbar

7.3.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.3.3 Test Setup Diagram

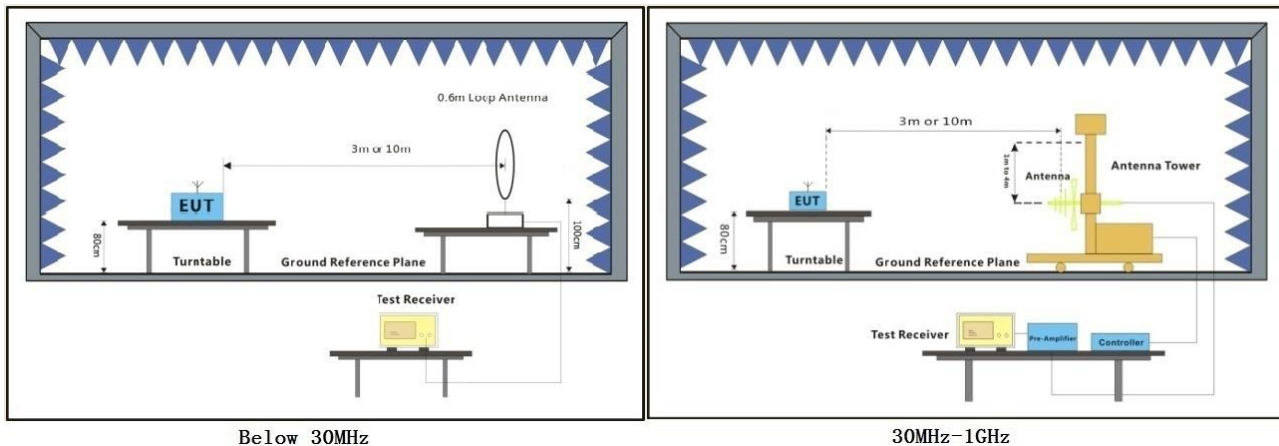

Below 30MHz

30MHz-1GHz


7.3.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using quasi-peak method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark:


- Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
- Scan from 9kHz to 30MHz, the disturbance below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

Test Mode: 01; Polarity: Horizontal

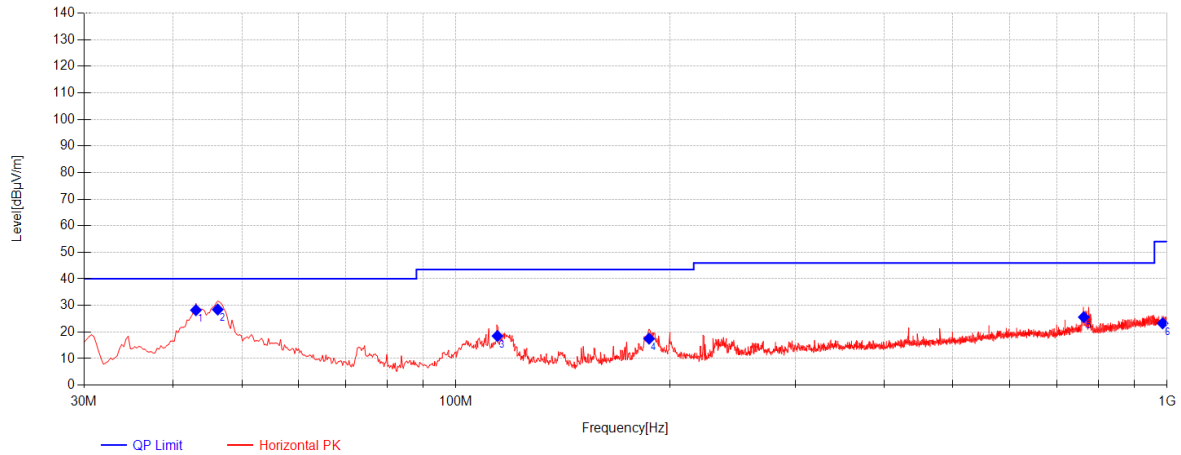

Final Data List									
NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	43.095	13.91	-41.13	28.22	40.00	11.78	102	274	Horizontal
2	46.2475	14.25	-41.06	28.46	40.00	11.54	134	313	Horizontal
3	114.39	11.38	-40.11	18.50	43.50	25.00	127	109	Horizontal
4	186.8975	10.50	-39.34	17.50	43.50	26.00	153	163	Horizontal
5	763.5625	19.80	-35.23	25.59	46.00	20.41	148	259	Horizontal
6	985.6925	21.90	-33.80	23.26	54.00	30.74	115	243	Horizontal

Test Mode: 01; Polarity: Vertical

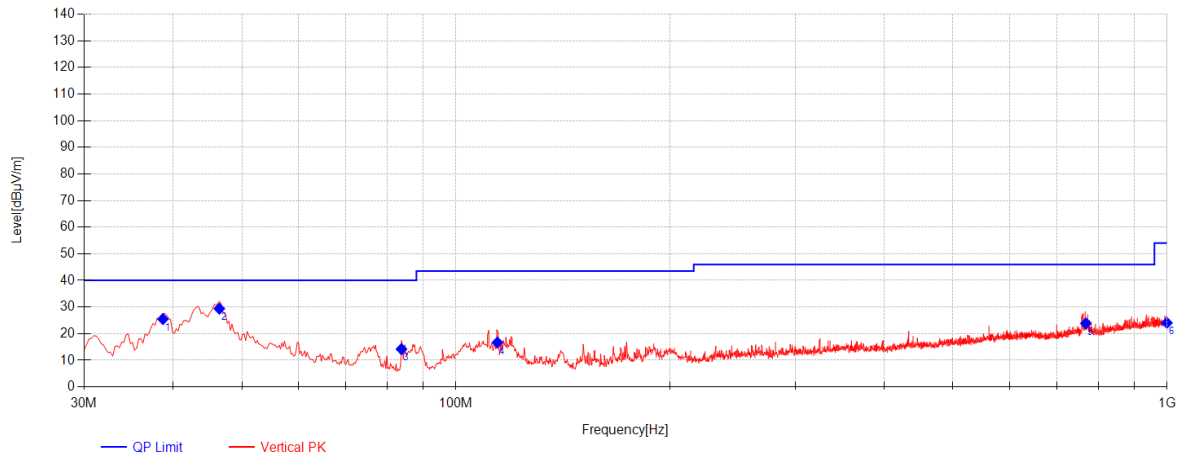

Final Data List									
NO.	Frequency [MHz]	AF [dB/m]	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	38.73	12.57	-41.22	25.48	40.00	14.52	106	185	Vertical
2	46.49	14.20	-41.05	29.38	40.00	10.62	197	57	Vertical
3	83.835	9.15	-40.52	14.20	40.00	25.80	111	244	Vertical
4	114.39	11.38	-40.11	16.67	43.50	26.83	137	260	Vertical
5	768.655	19.73	-35.21	23.87	46.00	22.13	156	79	Vertical
6	999.515	22.00	-33.69	24.06	54.00	29.94	183	192	Vertical

7.4 Radiated Spurious Emissions Above 1GHz

Test Requirement 47 CFR Part 15, Subpart C 15.205 & 15.209

Test Method: ANSI C63.10 (2020) Section 6.6

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
Above 1000	500	3

7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 24 °C


Humidity: 43 % RH

Atmospheric Pressure: 1021 mbar

7.4.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.4.3 Test Setup Diagram

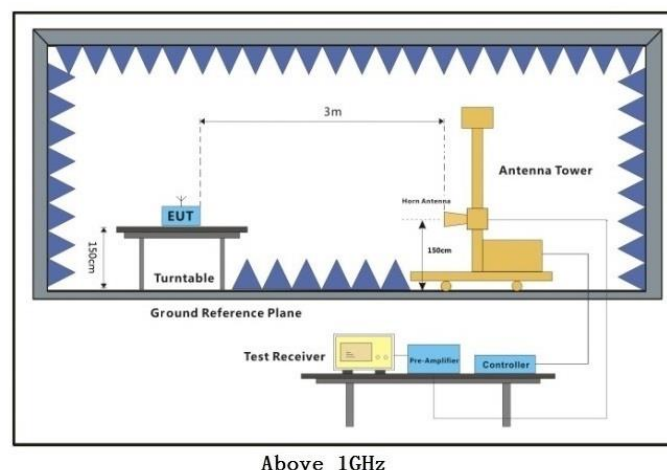


7.4.4 Measurement Procedure and Data

- a. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:


1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 25GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
3. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11b_TX_CH_01_Horizontal

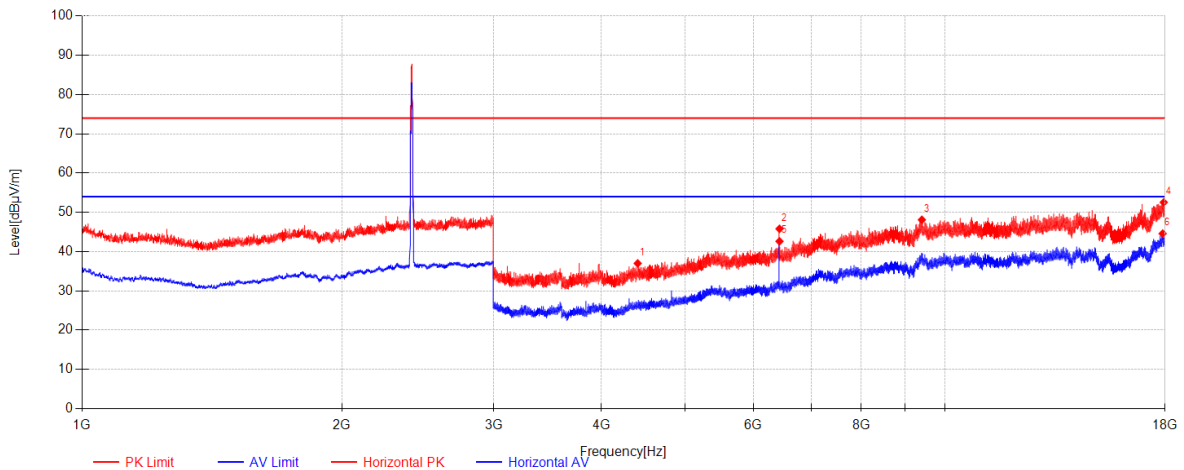


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	4405.5	55.15	29.95	-48.10	37.00	74.00	37.00	Horizontal
2	6432.375	58.31	34.44	-46.95	45.80	74.00	28.20	Horizontal
3	9405.375	53.15	37.97	-43.01	48.10	74.00	25.90	Horizontal
4	17936.25	46.54	44.42	-38.42	52.54	74.00	21.46	Horizontal
5	6432.375	55.13	34.44	-46.95	42.62	54.00	11.38	Horizontal
6	17883.375	38.64	44.10	-38.16	44.58	54.00	9.42	Horizontal

11b_TX_CH_01_Vertical

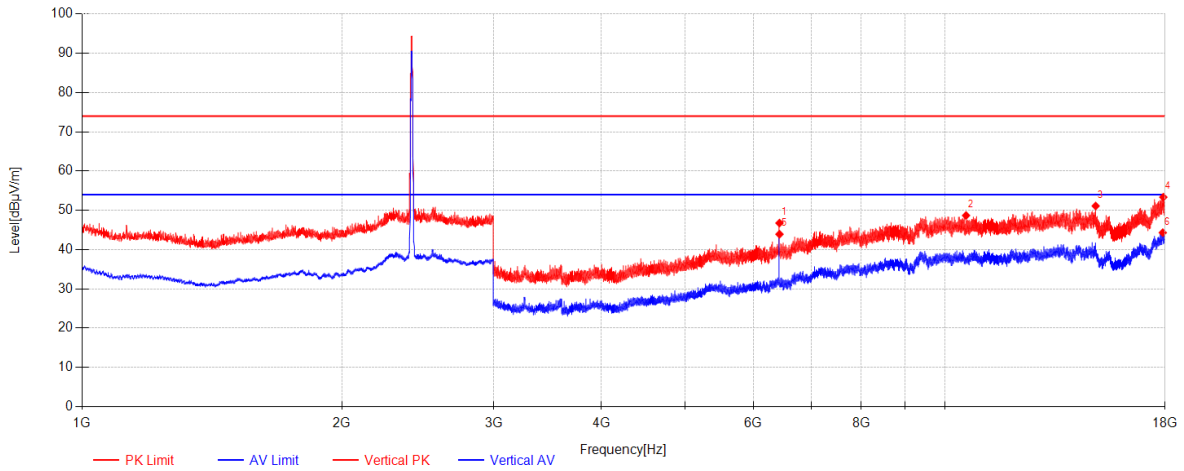


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6431.625	59.27	34.44	-46.95	46.76	74.00	27.24	Vertical
2	10582.125	50.62	39.21	-41.14	48.68	74.00	25.32	Vertical
3	14955	48.62	40.20	-37.72	51.11	74.00	22.89	Vertical
4	17916	47.32	44.30	-38.27	53.35	74.00	20.65	Vertical
5	6432.375	56.43	34.44	-46.95	43.92	54.00	10.08	Vertical
6	17890.5	38.32	44.14	-38.15	44.31	54.00	9.69	Vertical

11b_TX_CH_06_Horizontal

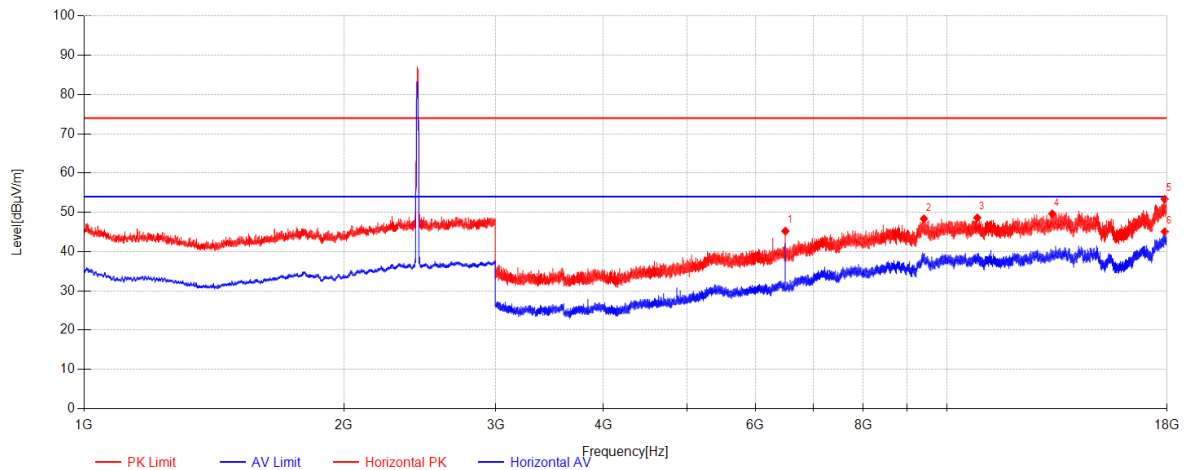


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6498.75	57.51	34.70	-46.99	45.22	74.00	28.78	Horizontal
2	9405.375	53.42	37.97	-43.01	48.37	74.00	25.63	Horizontal
3	10845	49.61	39.39	-40.40	48.60	74.00	25.40	Horizontal
4	13249.5	49.33	39.17	-38.89	49.61	74.00	24.39	Horizontal
5	17881.125	47.44	44.09	-38.16	53.37	74.00	20.63	Horizontal
6	17889.75	39.10	44.14	-38.15	45.08	54.00	8.92	Horizontal

11b_TX_CH_06_Vertical

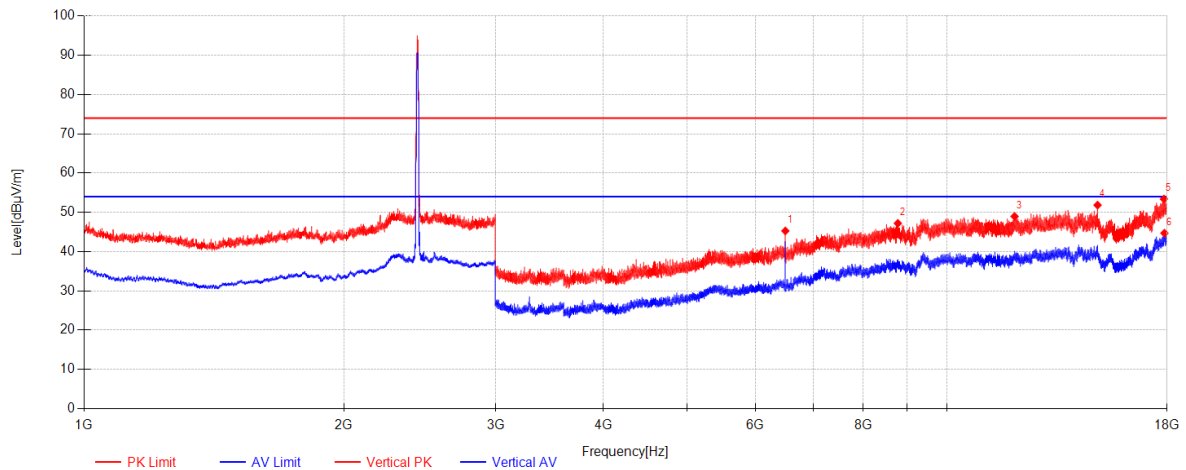


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6499.125	57.55	34.70	-46.99	45.26	74.00	28.74	Vertical
2	8773.5	54.07	37.15	-44.02	47.20	74.00	26.80	Vertical
3	11981.625	49.08	39.40	-39.52	48.96	74.00	25.04	Vertical
4	14952.375	49.34	40.20	-37.70	51.84	74.00	22.16	Vertical
5	17848.875	47.68	43.89	-38.17	53.40	74.00	20.60	Vertical
6	17872.5	38.83	44.04	-38.16	44.70	54.00	9.30	Vertical

11b_TX_CH_11_Horizontal

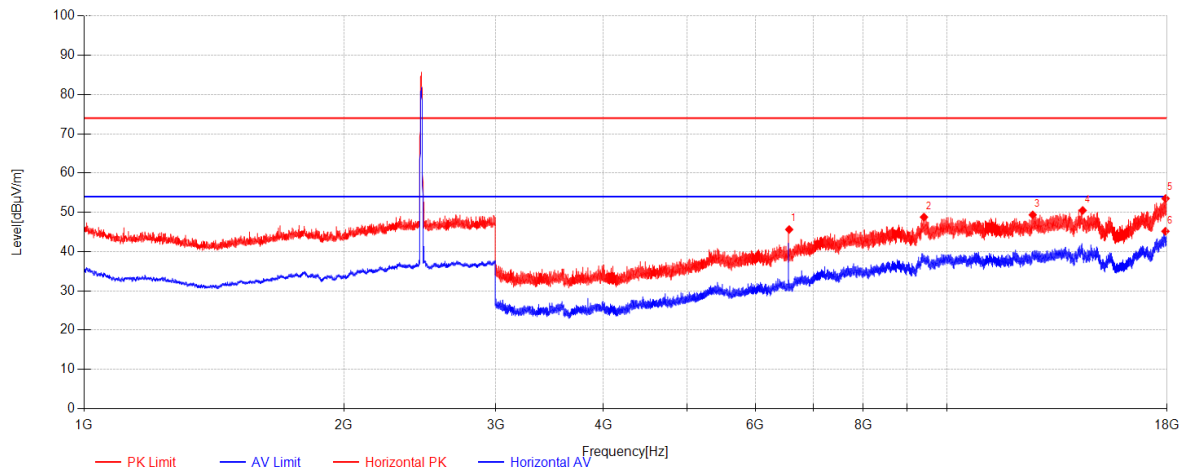


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6565.5	57.84	34.80	-47.03	45.62	74.00	28.38	Horizontal
2	9408.75	53.80	37.97	-42.99	48.78	74.00	25.22	Horizontal
3	12576.375	49.51	39.05	-39.20	49.36	74.00	24.64	Horizontal
4	14368.125	48.75	40.26	-38.53	50.48	74.00	23.52	Horizontal
5	17928.375	47.51	44.37	-38.36	53.52	74.00	20.48	Horizontal
6	17919.375	39.15	44.32	-38.30	45.17	54.00	8.83	Horizontal

11b_TX_CH_11_Vertical

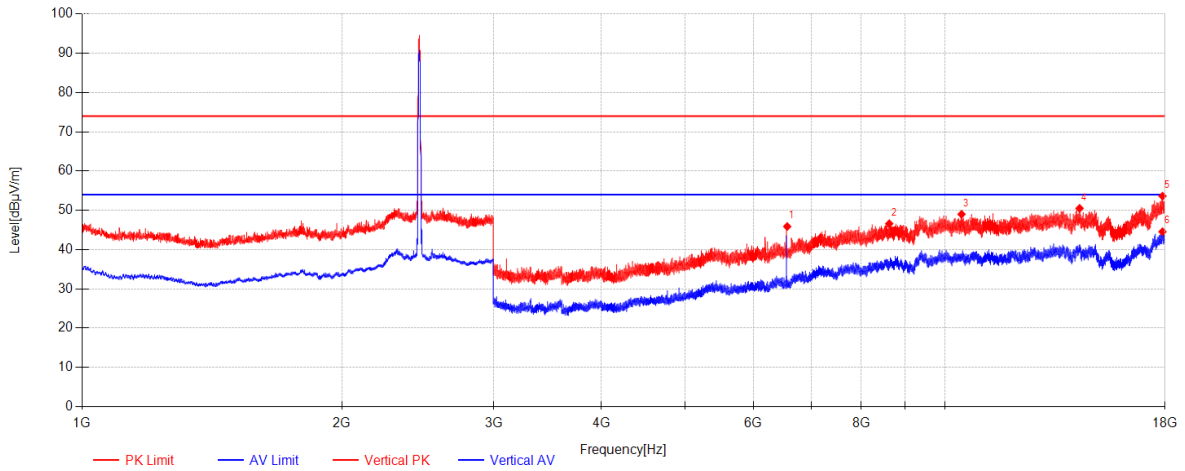


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6565.125	58.10	34.80	-47.03	45.88	74.00	28.12	Vertical
2	8621.625	53.62	36.98	-44.00	46.60	74.00	27.40	Vertical
3	10456.125	50.79	39.12	-40.91	49.00	74.00	25.00	Vertical
4	14326.875	48.71	40.27	-38.46	50.51	74.00	23.49	Vertical
5	17878.5	47.71	44.07	-38.16	53.62	74.00	20.38	Vertical
6	17875.875	38.66	44.06	-38.16	44.56	54.00	9.44	Vertical

11ax(HE20)_TX_CH_01_Horizontal

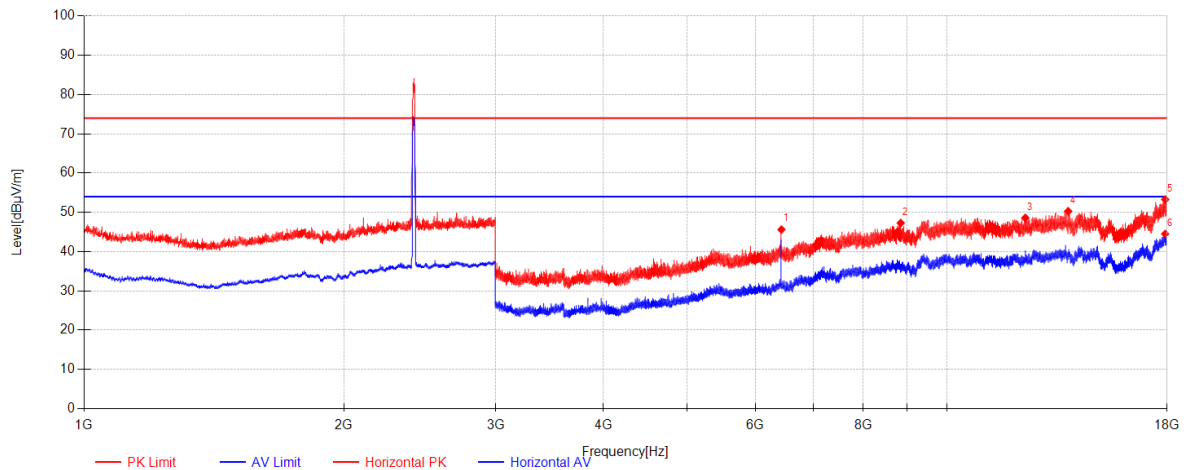


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6431.625	58.12	34.44	-46.95	45.61	74.00	28.39	Horizontal
2	8842.125	54.05	37.23	-44.01	47.27	74.00	26.73	Horizontal
3	12330.375	49.07	39.20	-39.68	48.59	74.00	25.41	Horizontal
4	13824	49.19	40.04	-38.94	50.28	74.00	23.72	Horizontal
5	17909.625	47.22	44.26	-38.22	53.26	74.00	20.74	Horizontal
6	17905.5	38.45	44.23	-38.19	44.49	54.00	9.51	Horizontal

11ax(HE20)_TX_CH_01_Vertical

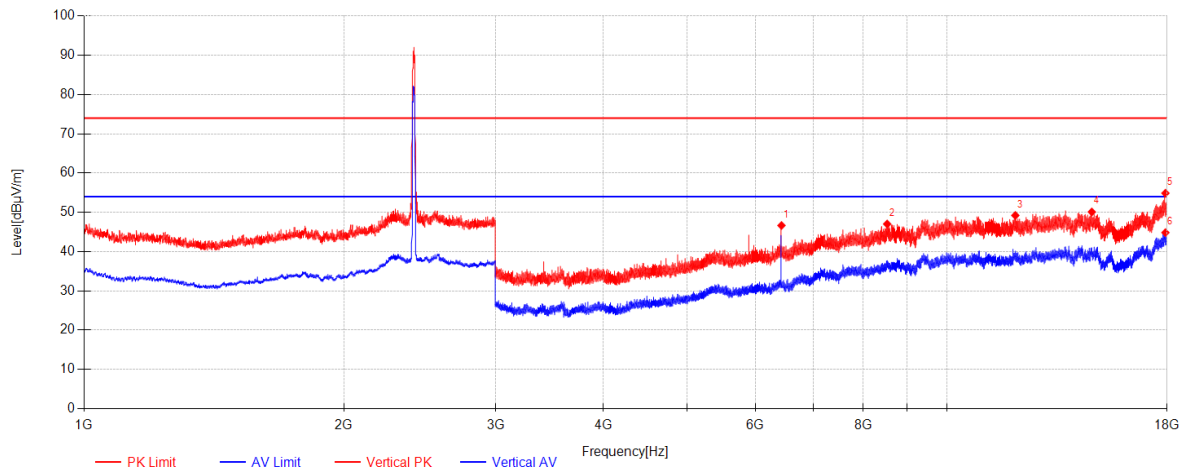


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6432	59.16	34.44	-46.95	46.65	74.00	27.35	Vertical
2	8527.5	54.34	36.88	-44.19	47.03	74.00	26.97	Vertical
3	12005.25	49.24	39.40	-39.43	49.21	74.00	24.79	Vertical
4	14724.375	46.59	40.23	-36.72	50.10	74.00	23.90	Vertical
5	17919.75	48.86	44.32	-38.30	54.88	74.00	19.12	Vertical
6	17920.125	38.82	44.32	-38.30	44.84	54.00	9.16	Vertical

11ax(HE20)_TX_CH_06_Horizontal

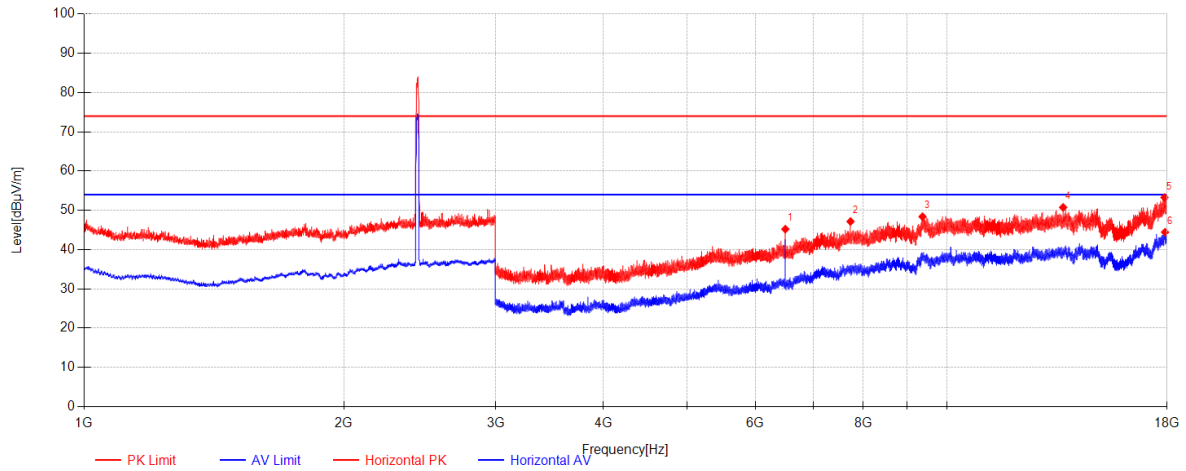


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6498.75	57.50	34.70	-46.99	45.21	74.00	28.79	Horizontal
2	7733.25	55.92	36.35	-45.11	47.16	74.00	26.84	Horizontal
3	9371.25	53.47	37.92	-43.00	48.39	74.00	25.61	Horizontal
4	13639.125	49.62	39.76	-38.63	50.75	74.00	23.25	Horizontal
5	17874.375	47.38	44.05	-38.16	53.27	74.00	20.73	Horizontal
6	17902.125	38.38	44.21	-38.17	44.43	54.00	9.57	Horizontal

11ax(HE20)_TX_CH_06_Vertical

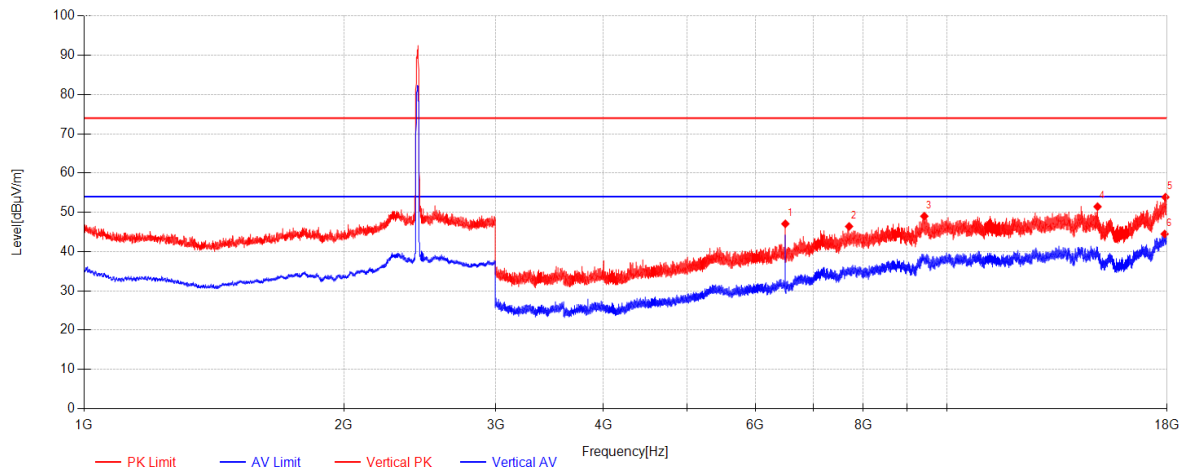


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6498.75	59.37	34.70	-46.99	47.08	74.00	26.92	Vertical
2	7703.625	55.25	36.36	-45.20	46.41	74.00	27.59	Vertical
3	9417	53.96	37.98	-42.93	49.01	74.00	24.99	Vertical
4	14952.375	48.94	40.20	-37.70	51.44	74.00	22.56	Vertical
5	17921.25	47.83	44.33	-38.31	53.85	74.00	20.15	Vertical
6	17884.125	38.53	44.10	-38.16	44.48	54.00	9.52	Vertical

11ax(HE20)_TX_CH_11_Horizontal

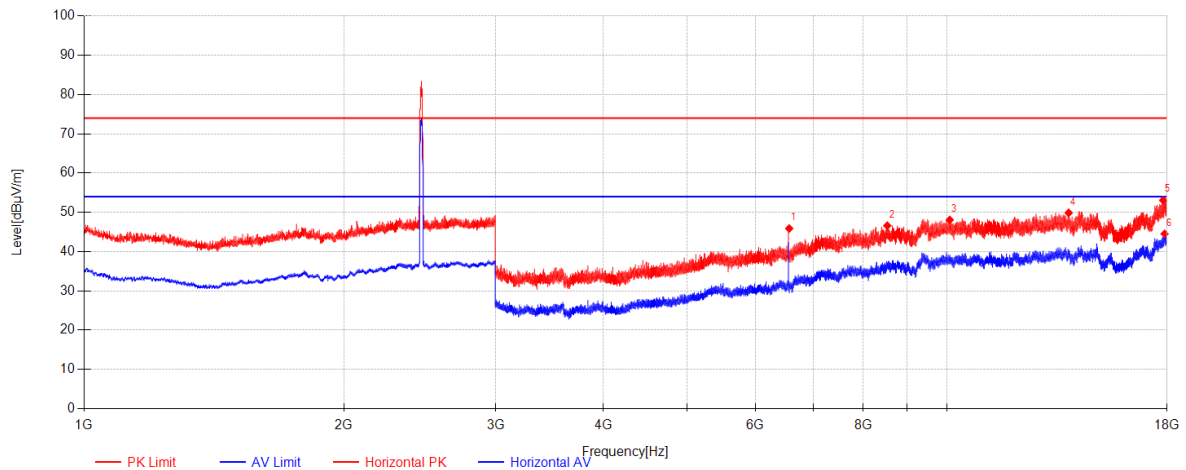


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6565.5	58.10	34.80	-47.03	45.88	74.00	28.12	Horizontal
2	8529.75	53.91	36.88	-44.19	46.60	74.00	27.40	Horizontal
3	10077	51.05	38.85	-41.83	48.07	74.00	25.93	Horizontal
4	13842.375	48.70	40.06	-38.89	49.87	74.00	24.13	Horizontal
5	17812.125	47.60	43.67	-38.19	53.09	74.00	20.91	Horizontal
6	17880.375	38.60	44.08	-38.16	44.52	54.00	9.48	Horizontal

11ax(HE20)_TX_CH_11_Vertical

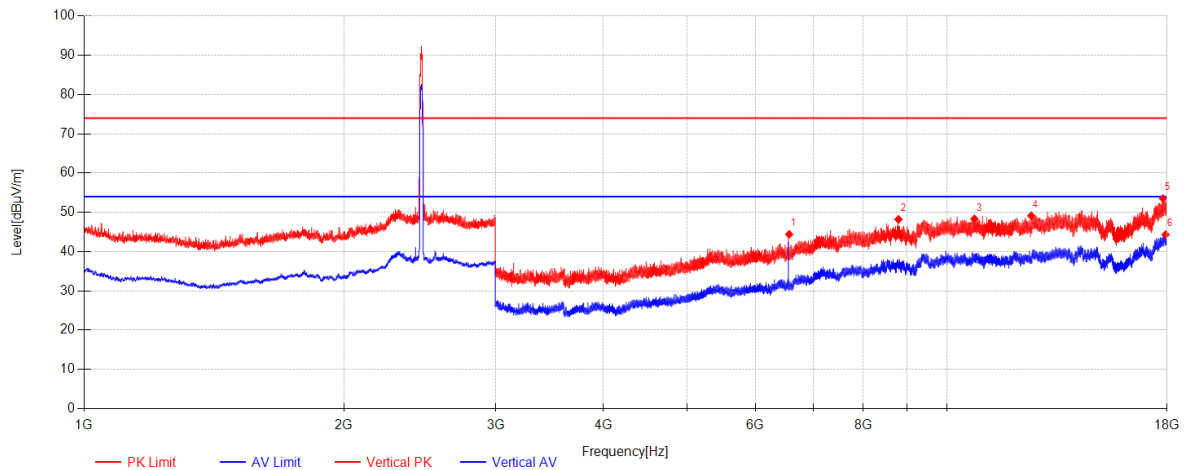


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6565.5	56.62	34.80	-47.03	44.40	74.00	29.60	Vertical
2	8788.875	55.04	37.17	-44.00	48.20	74.00	25.80	Vertical
3	10763.625	49.81	39.33	-40.83	48.32	74.00	25.68	Vertical
4	12525.75	49.68	39.08	-39.66	49.11	74.00	24.89	Vertical
5	17804.25	48.09	43.63	-38.19	53.53	74.00	20.47	Vertical
6	17925.375	38.32	44.35	-38.34	44.33	54.00	9.67	Vertical

11ax(HE40)_TX_CH_03_Horizontal

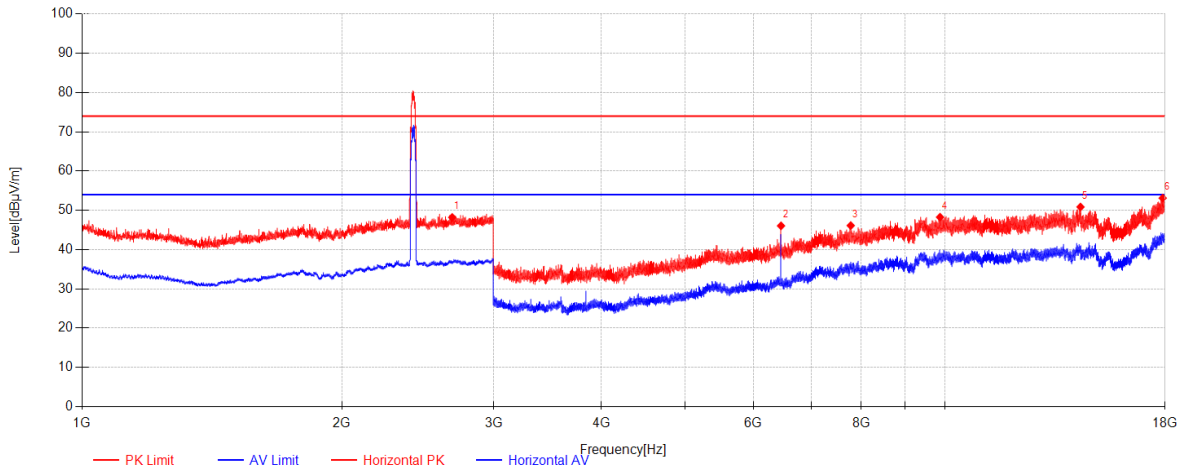


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	2685.3333	43.74	27.53	-23.06	48.21	74.00	25.79	Horizontal
2	6458.625	58.48	34.54	-46.97	46.06	74.00	27.94	Horizontal
3	7779	54.75	36.34	-44.97	46.12	74.00	27.88	Horizontal
4	9871.875	51.77	38.62	-42.14	48.26	74.00	25.74	Horizontal
5	14362.5	49.12	40.26	-38.52	50.86	74.00	23.14	Horizontal
6	17884.5	47.17	44.11	-38.16	53.12	74.00	20.88	Horizontal

11ax(HE40)_TX_CH_03_Vertical

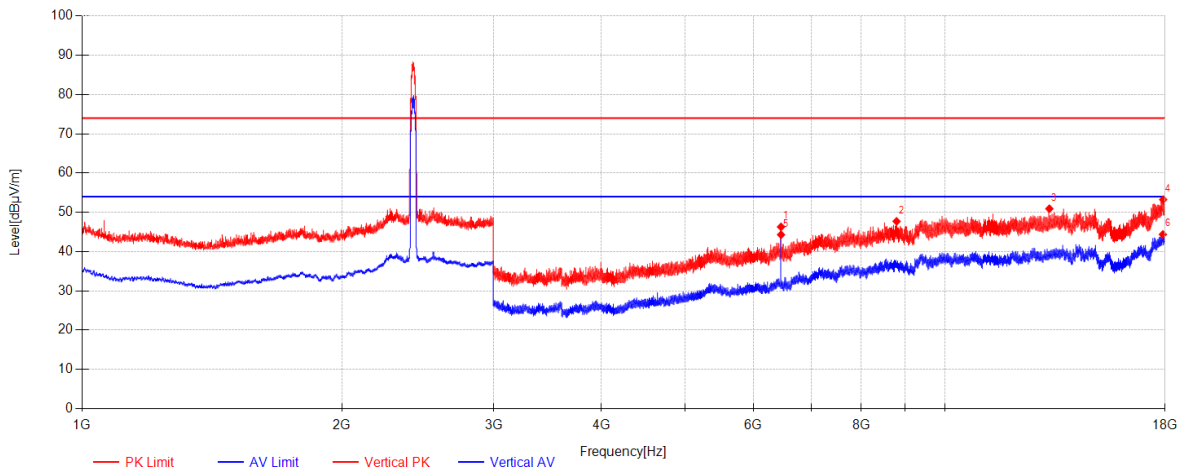


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6458.625	58.71	34.54	-46.97	46.29	74.00	27.71	Vertical
2	8791.875	54.53	37.17	-44.00	47.70	74.00	26.30	Vertical
3	13216.125	50.56	39.12	-38.76	50.92	74.00	23.08	Vertical
4	17908.5	47.20	44.25	-38.21	53.24	74.00	20.76	Vertical
5	6459	56.72	34.54	-46.97	44.30	54.00	9.70	Vertical
6	17894.25	38.35	44.17	-38.15	44.36	54.00	9.64	Vertical

11ax(HE40)_TX_CH_06_Horizontal

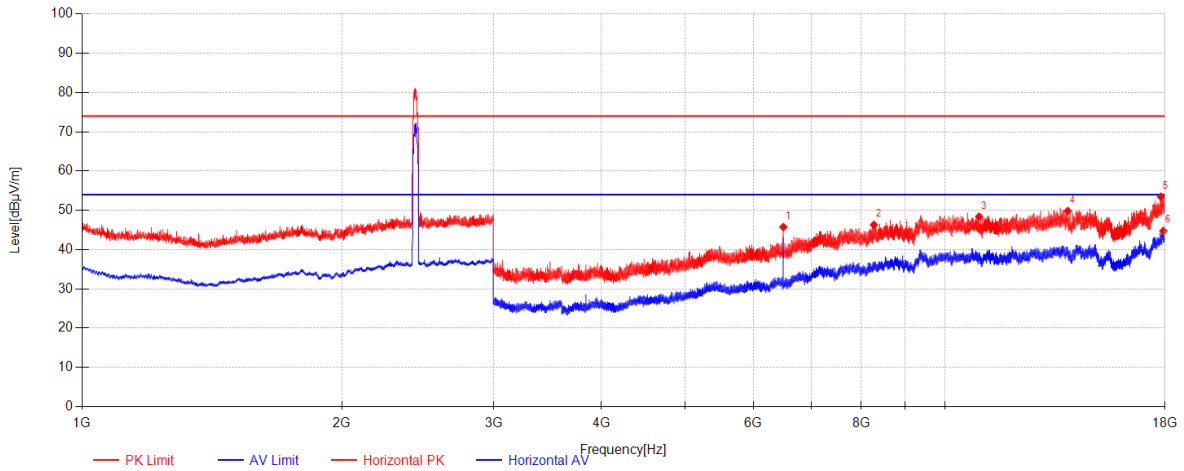


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6498.75	58.04	34.70	-46.99	45.75	74.00	28.25	Horizontal
2	8275.125	54.15	36.60	-44.46	46.29	74.00	27.71	Horizontal
3	10956.375	49.31	39.47	-40.40	48.38	74.00	25.62	Horizontal
4	13884	48.48	40.13	-38.77	49.83	74.00	24.17	Horizontal
5	17803.125	48.03	43.62	-38.19	53.46	74.00	20.54	Horizontal
6	17916.75	38.74	44.30	-38.28	44.76	54.00	9.24	Horizontal

11ax(HE40)_TX_CH_06_Vertical

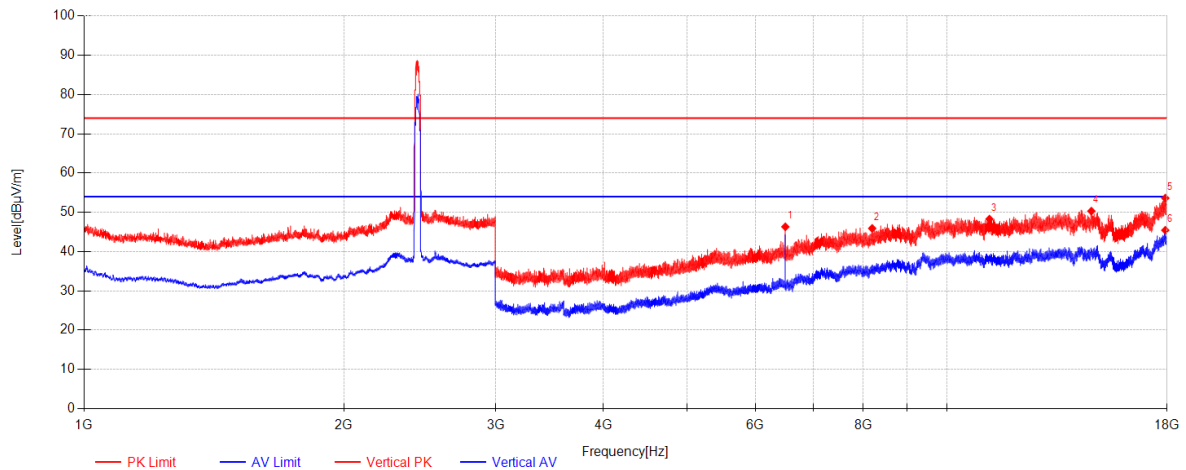


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6498.75	58.60	34.70	-46.99	46.31	74.00	27.69	Vertical
2	8193.375	53.62	36.51	-44.22	45.91	74.00	28.09	Vertical
3	11204.25	49.15	39.48	-40.35	48.28	74.00	25.72	Vertical
4	14706	46.77	40.23	-36.69	50.31	74.00	23.69	Vertical
5	17915.25	47.59	44.29	-38.26	53.62	74.00	20.38	Vertical
6	17913.375	39.41	44.28	-38.25	45.44	54.00	8.56	Vertical

11ax(HE40)_TX_CH_09_Horizontal

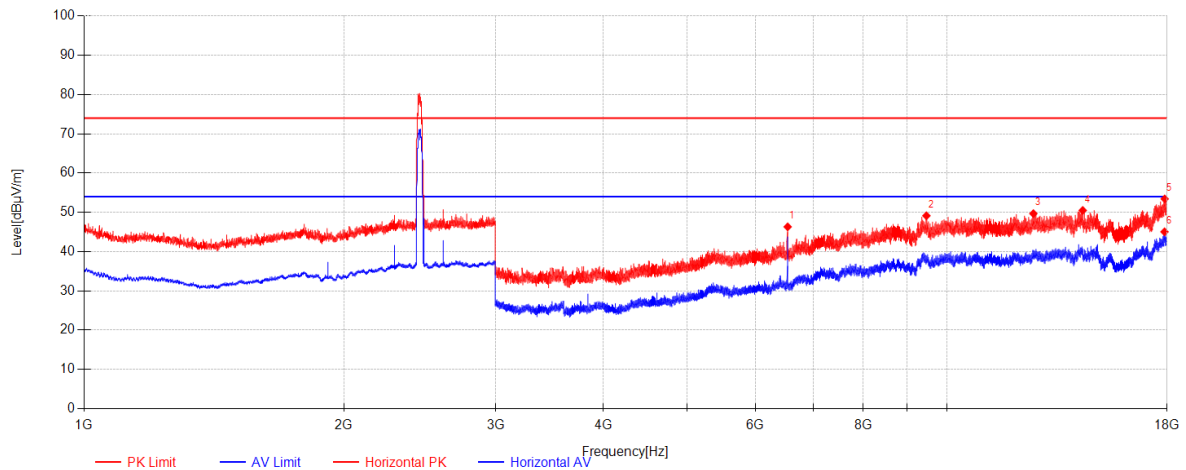

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6538.5	58.56	34.76	-47.01	46.31	74.00	27.69	Horizontal
2	9469.125	53.65	38.06	-42.58	49.13	74.00	24.87	Horizontal
3	12598.5	49.64	39.04	-39.00	49.68	74.00	24.32	Horizontal
4	14371.875	48.76	40.26	-38.54	50.49	74.00	23.51	Horizontal
5	17885.625	47.46	44.11	-38.16	53.42	74.00	20.58	Horizontal
6	17876.25	39.14	44.06	-38.16	45.04	54.00	8.96	Horizontal

11ax(HE40)_TX_CH_09_Vertical

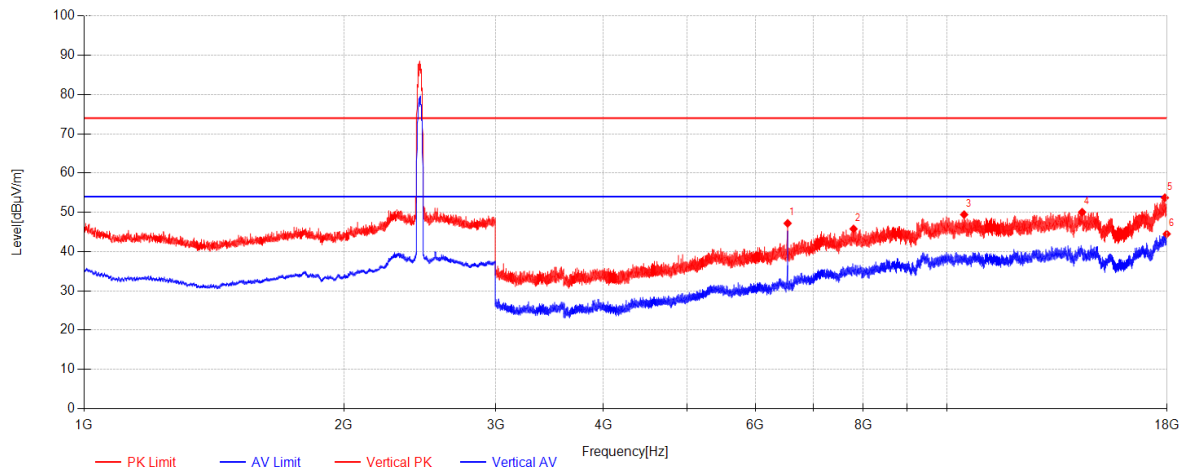

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	6538.5	59.45	34.76	-47.01	47.20	74.00	26.80	Vertical
2	7796.625	54.36	36.34	-44.92	45.78	74.00	28.22	Vertical
3	10472.625	51.10	39.13	-40.81	49.42	74.00	24.58	Vertical
4	14347.875	48.27	40.27	-38.50	50.04	74.00	23.96	Vertical
5	17894.25	47.71	44.17	-38.15	53.72	74.00	20.28	Vertical
6	17982	38.55	44.69	-38.77	44.48	54.00	9.52	Vertical

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2020) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 45 % RH

Atmospheric Pressure: 1021 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

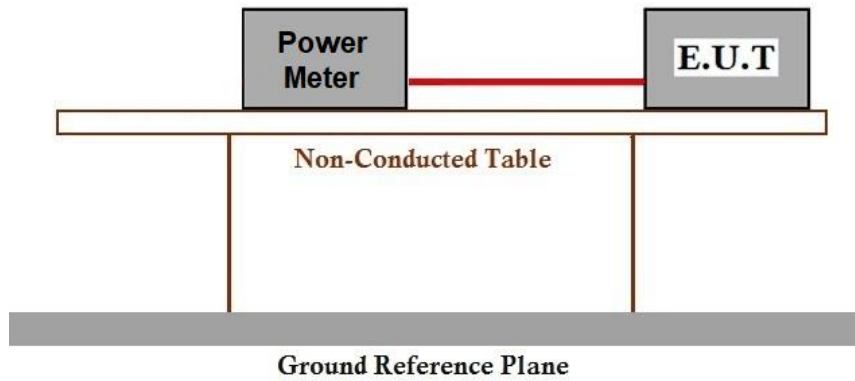

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)

Test Method: ANSI C63.10 (2020) Section 11.8.1

Limit: ≥ 500 kHz

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 45 % RH

Atmospheric Pressure: 1021 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

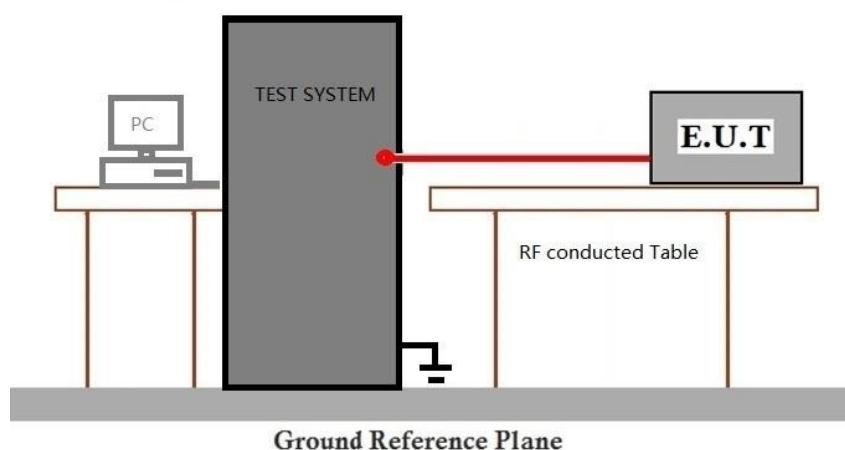

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)

Test Method: ANSI C63.10 (2020) Section 11.10.2

Limit:

≤8dBm in any 3 kHz band during any time interval of continuous transmission

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 45 % RH

Atmospheric Pressure: 1021 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

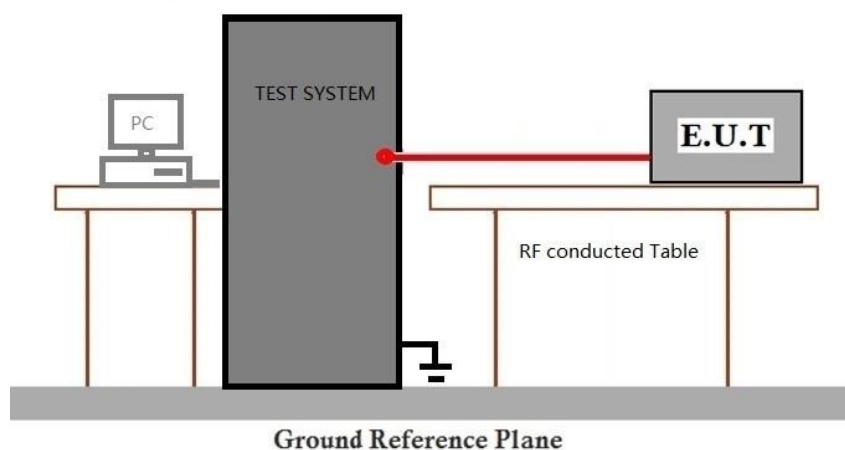

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 45 % RH

Atmospheric Pressure: 1021 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

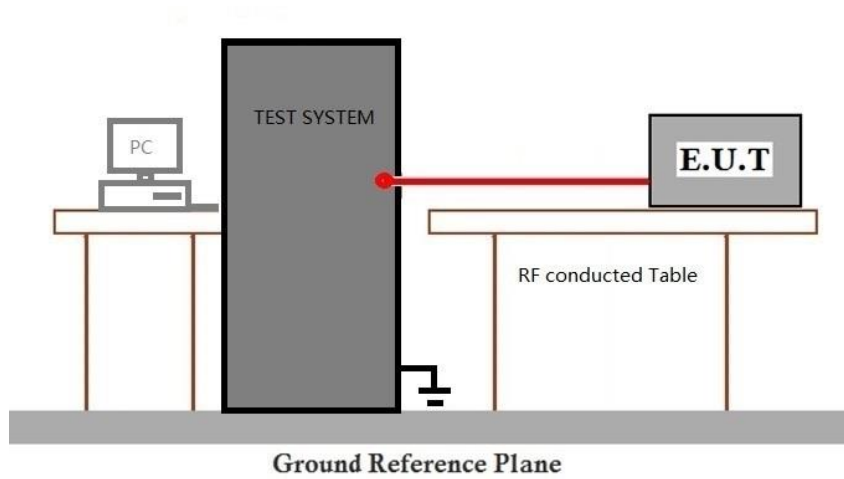

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2020) Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 23 °C


Humidity: 45 % RH

Atmospheric Pressure: 1021 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	01	TX mode_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40); data rate @ 8Mbps is the worst case of IEEE 802.11ax(HE20); data rate @ 16Mbps is the worst case of IEEE 802.11ax(HE40), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

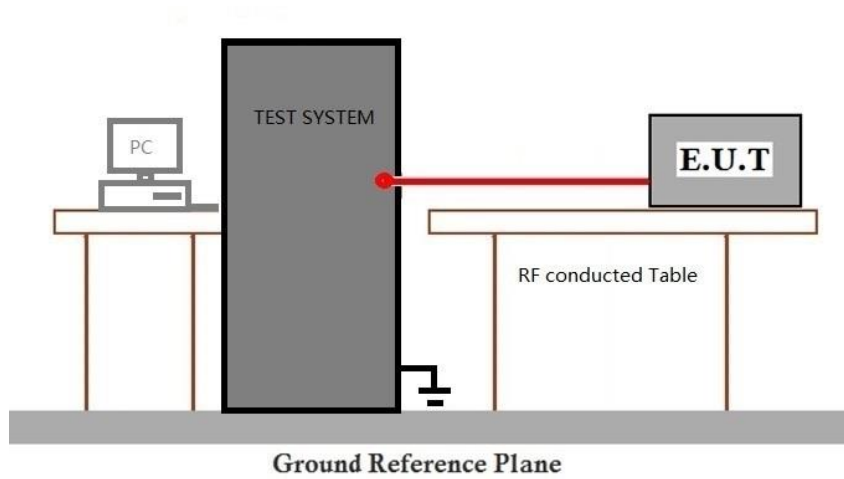

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details



Report No.: SUCR251200124202

Page: 97 of 160

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for SUCR2512001242MO

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - External Photos for SUCR2512001242MO and Appendix - Internal Photos for SUCR2512001242MO



10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	8.387	8.477	98.94	0.05	0.04
802.11g	SISO	2412	/	/	1.393	1.410	98.79	0.05	0.03
802.11n (HT20)	SISO	2412	/	/	0.166	0.170	97.65	0.10	0.04
802.11n (HT40)	SISO	2422	/	/	0.100	0.104	96.15	0.17	0.09
802.11ax (HEW20)	SISO	2412	SU	/	0.160	0.169	94.67	0.24	0.08
802.11ax (HEW40)	SISO	2422	SU	/	0.102	0.111	91.89	0.37	0.06

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	13.954	/	Pass
		2437	/	/	1	13.907	/	Pass
		2462	/	/	1	17.803	/	Pass
802.11g	SISO	2412	/	/	1	17.855	/	Pass
		2437	/	/	1	17.885	/	Pass
		2462	/	/	1	17.723	/	Pass
802.11n (HT20)	SISO	2412	/	/	1	18.319	/	Pass
		2437	/	/	1	18.333	/	Pass
		2462	/	/	1	18.284	/	Pass
802.11n (HT40)	SISO	2422	/	/	1	35.019	/	Pass
		2437	/	/	1	35.177	/	Pass
		2452	/	/	1	35.061	/	Pass
802.11ax (HEW20)	SISO	2412	SU	/	1	18.664	/	Pass
		2437	SU	/	1	18.683	/	Pass
		2462	SU	/	1	18.624	/	Pass
802.11ax (HEW40)	SISO	2422	SU	/	1	37.091	/	Pass
		2437	SU	/	1	37.296	/	Pass
		2452	SU	/	1	37.108	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	9.222	≥ 0.5	Pass
		2437	/	/	1	9.171	≥ 0.5	Pass
		2462	/	/	1	9.158	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	15.079	≥ 0.5	Pass
		2437	/	/	1	15.238	≥ 0.5	Pass
		2462	/	/	1	15.134	≥ 0.5	Pass
802.11n (HT20)	SISO	2412	/	/	1	16.371	≥ 0.5	Pass
		2437	/	/	1	17.068	≥ 0.5	Pass
		2462	/	/	1	16.155	≥ 0.5	Pass
802.11n (HT40)	SISO	2422	/	/	1	26.847	≥ 0.5	Pass
		2437	/	/	1	27.050	≥ 0.5	Pass
		2452	/	/	1	26.975	≥ 0.5	Pass
802.11ax (HEW20)	SISO	2412	SU	/	1	14.394	≥ 0.5	Pass
		2437	SU	/	1	14.446	≥ 0.5	Pass
		2462	SU	/	1	13.973	≥ 0.5	Pass
802.11ax	SISO	2422	SU	/	1	25.885	≥ 0.5	Pass




Report No.: SUCR251200124202

Page: 100 of 160


(HEW40)		2437	SU	/	1	26.489	≥ 0.5	Pass
		2452	SU	/	1	26.405	≥ 0.5	Pass

2.2 Test Graph


2.2.1 OBW

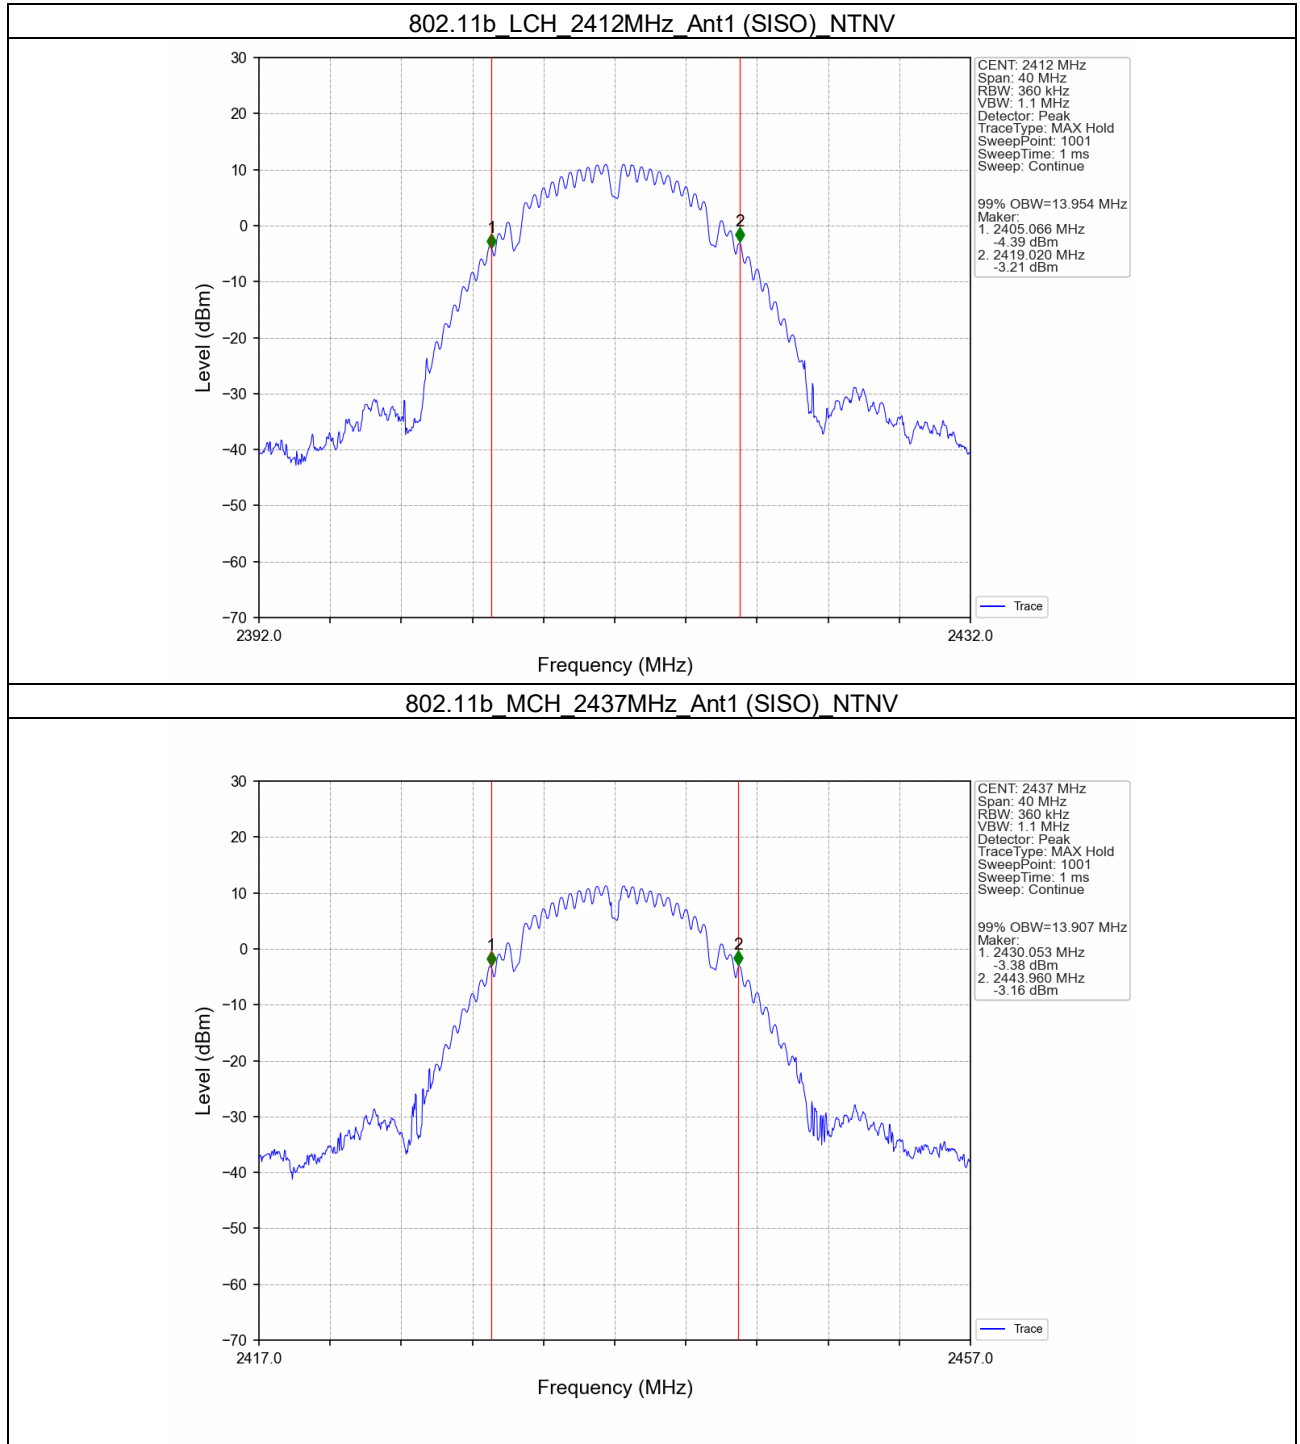


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

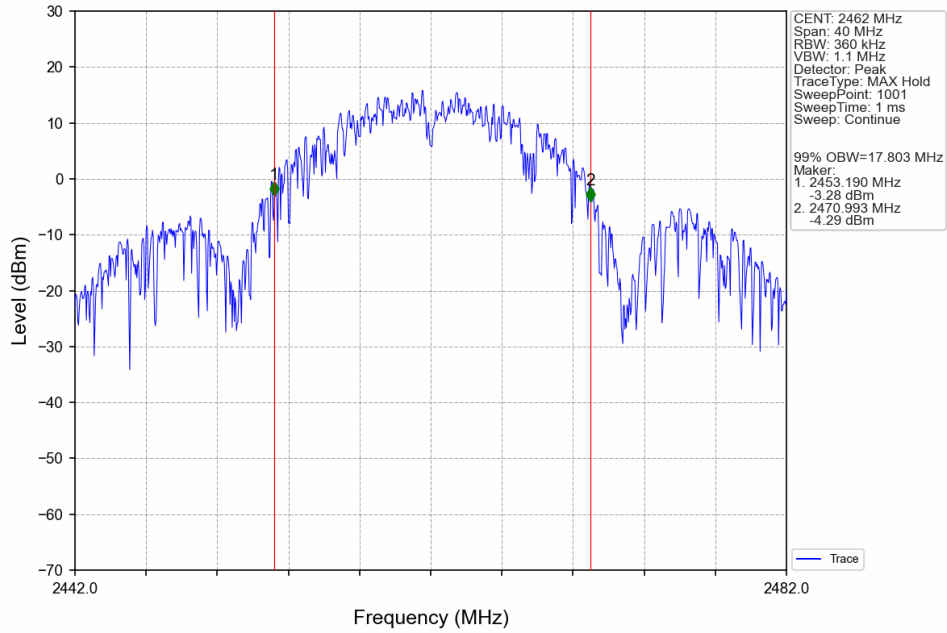


802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

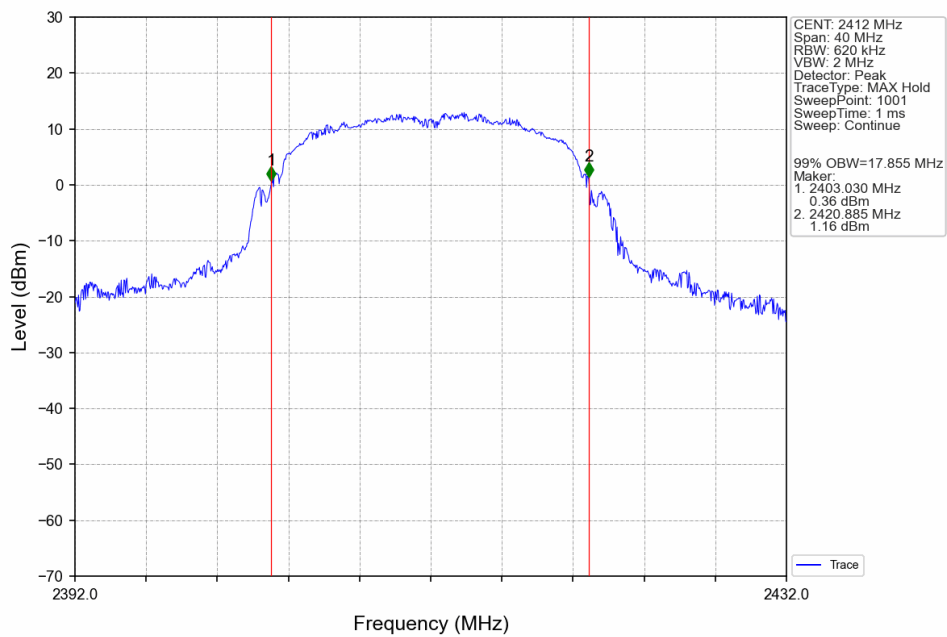


802.11g MCH 2437MHz_Ant1 (SISO) NTN

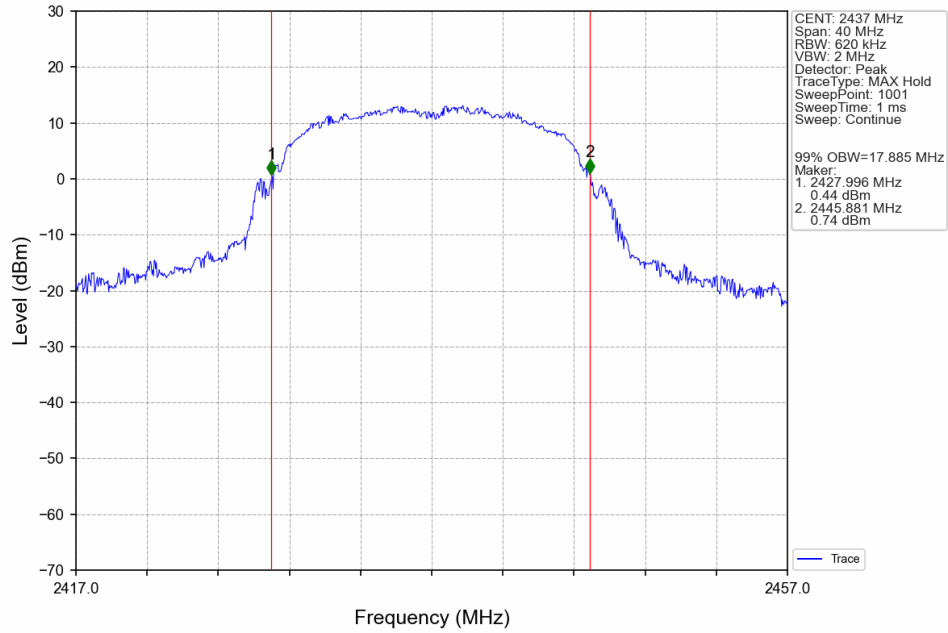


802.11g HCH 2462MHz_Ant1 (SISO) NTN

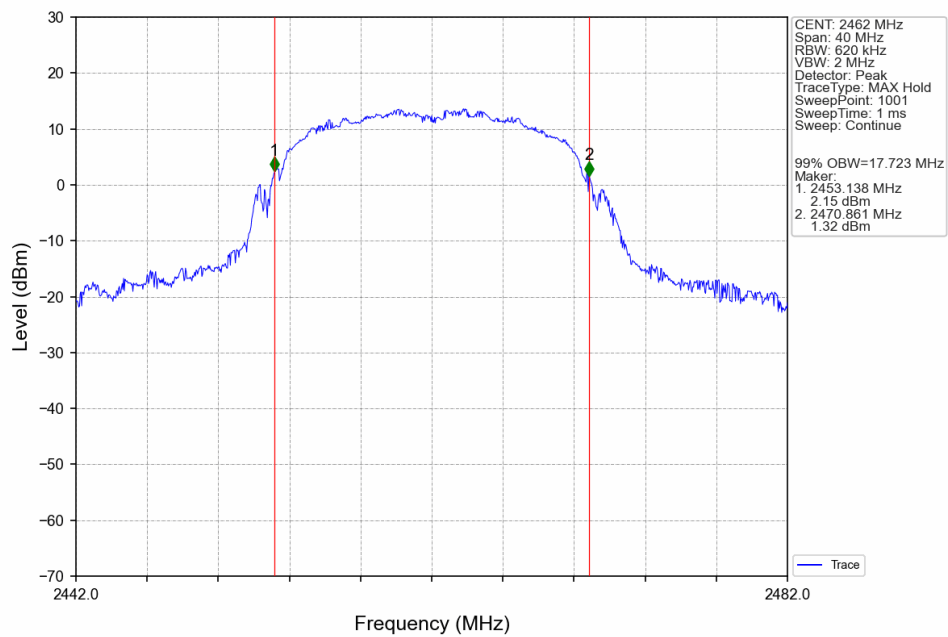


802.11n(HT20) LCH_2412MHz_Ant1 (SISO) NTN

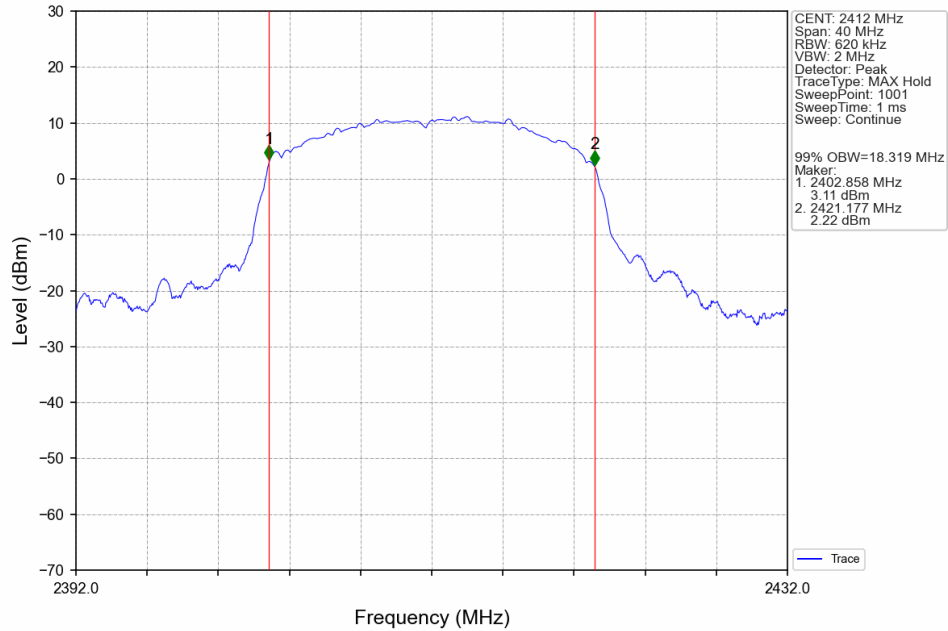


802.11n(HT20) MCH_2437MHz_Ant1 (SISO) NTN

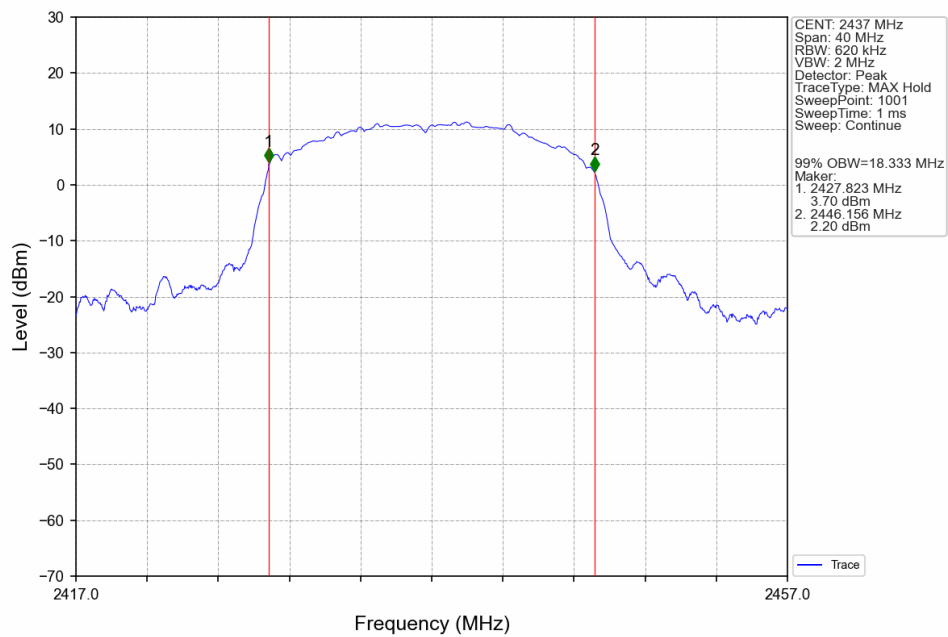


802.11n(HT20) HCH 2462MHz Ant1 (SISO) NTN

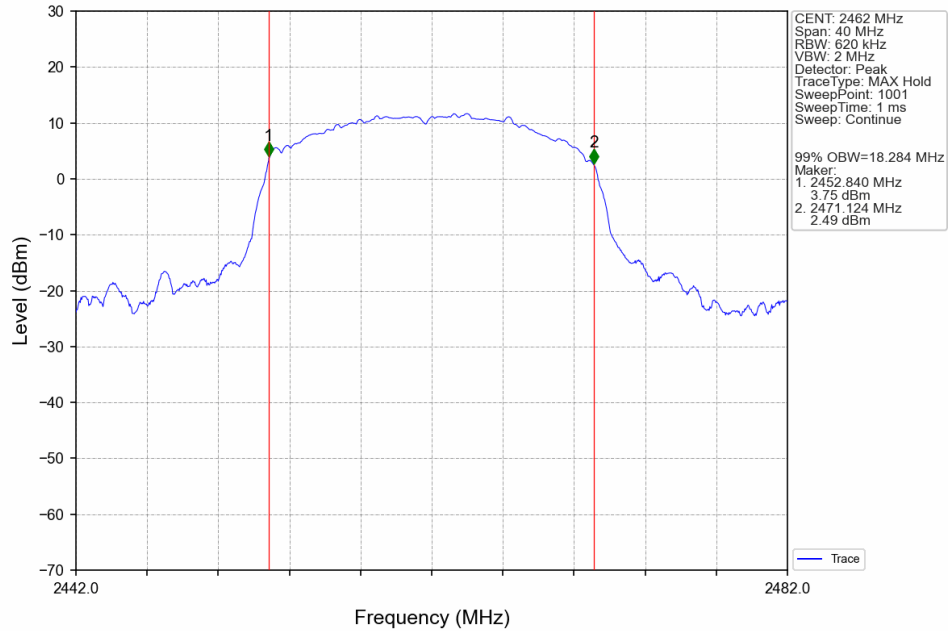


802.11n(HT40) LCH 2422MHz Ant1 (SISO) NTN

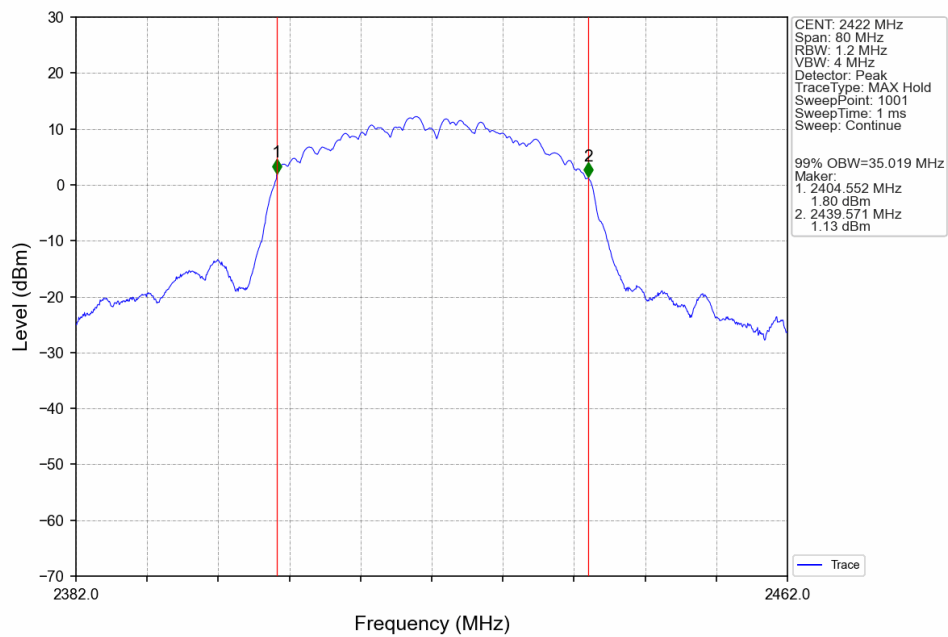


802.11n(HT40) MCH_2437MHz_Ant1 (SISO) NTN

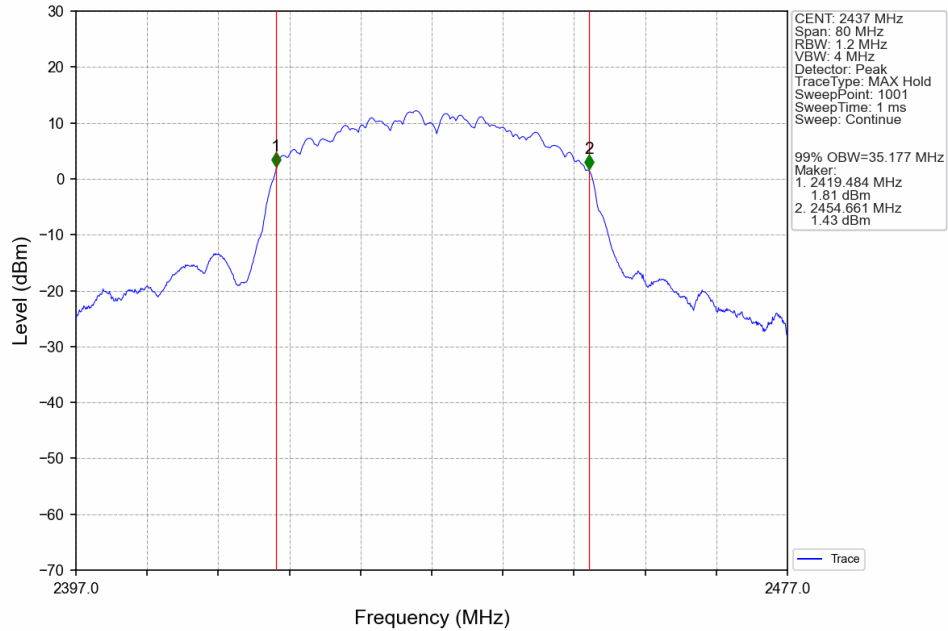


802.11n(HT40) HCH_2452MHz_Ant1 (SISO) NTN

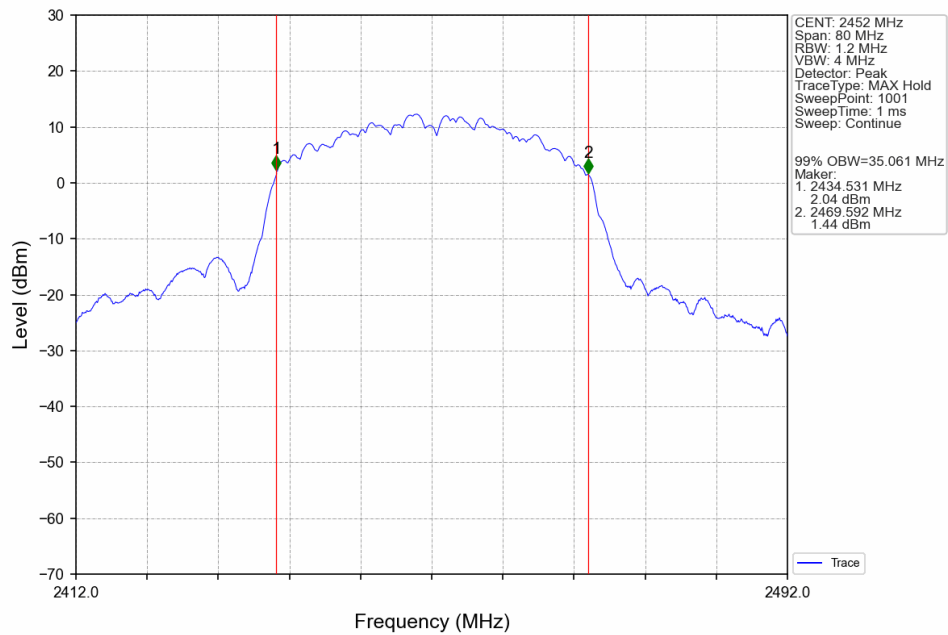


802.11ax(HEW20) LCH 2412MHz SU / Ant1 (SISO) NTN

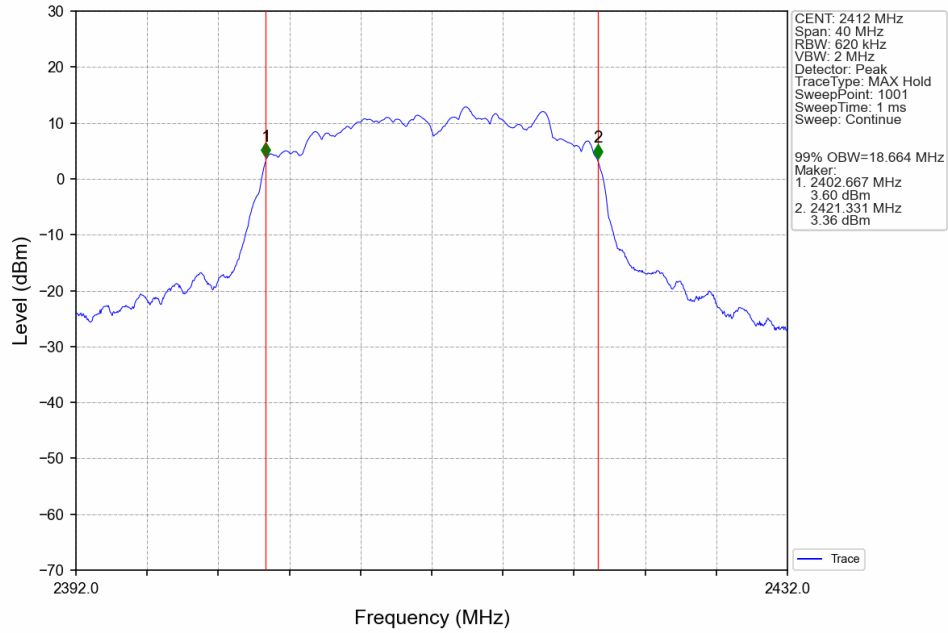


802.11ax(HEW20) MCH 2437MHz SU / Ant1 (SISO) NTN

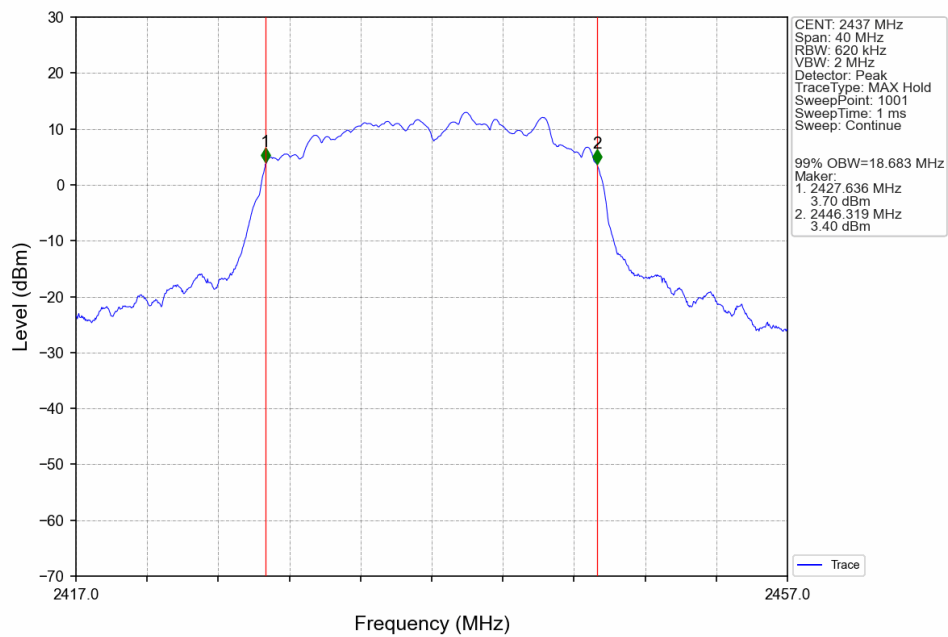


802.11ax(HEW20) HCH 2462MHz SU / Ant1 (SISO) NTNV

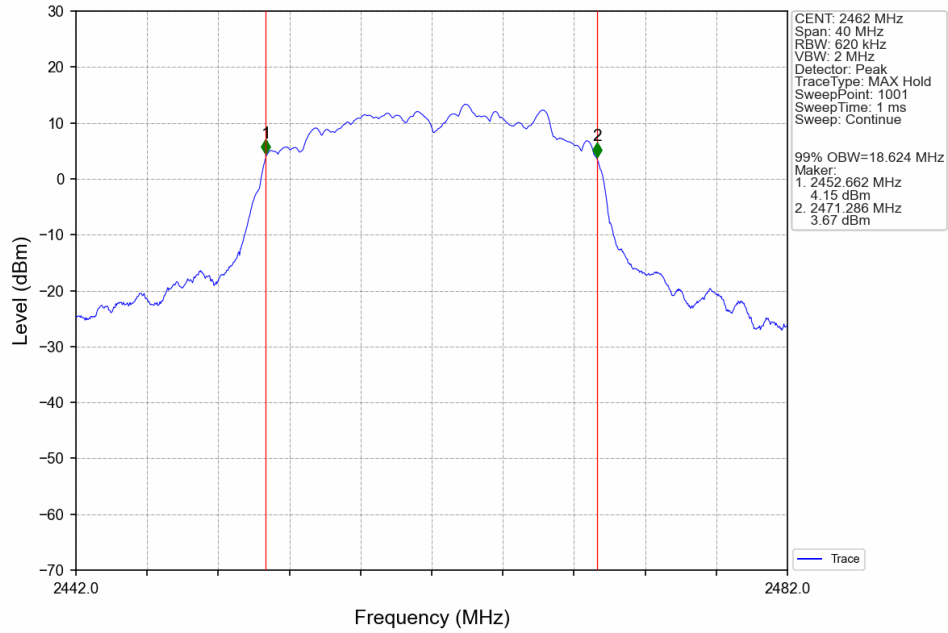


802.11ax(HEW40) LCH 2422MHz SU / Ant1 (SISO) NTNV

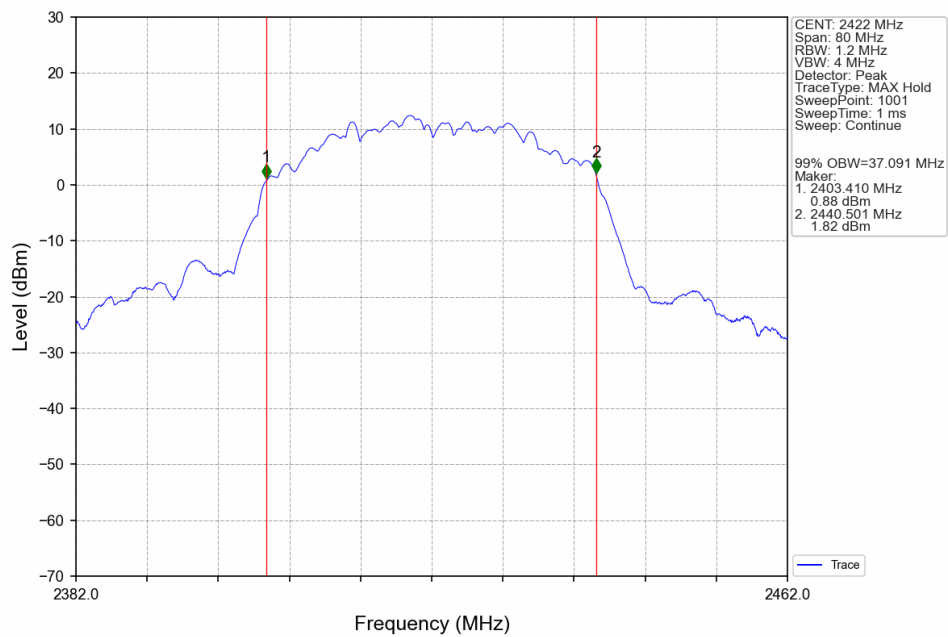


802.11ax(HEW40) MCH 2437MHz SU / Ant1 (SISO) NTN

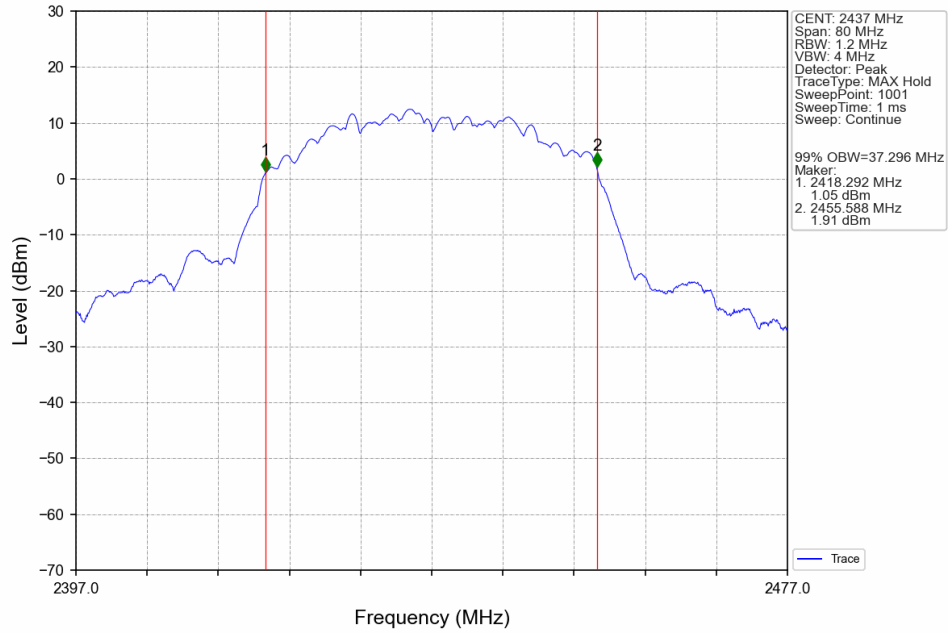


802.11ax(HEW40) HCH 2452MHz SU / Ant1 (SISO) NTN

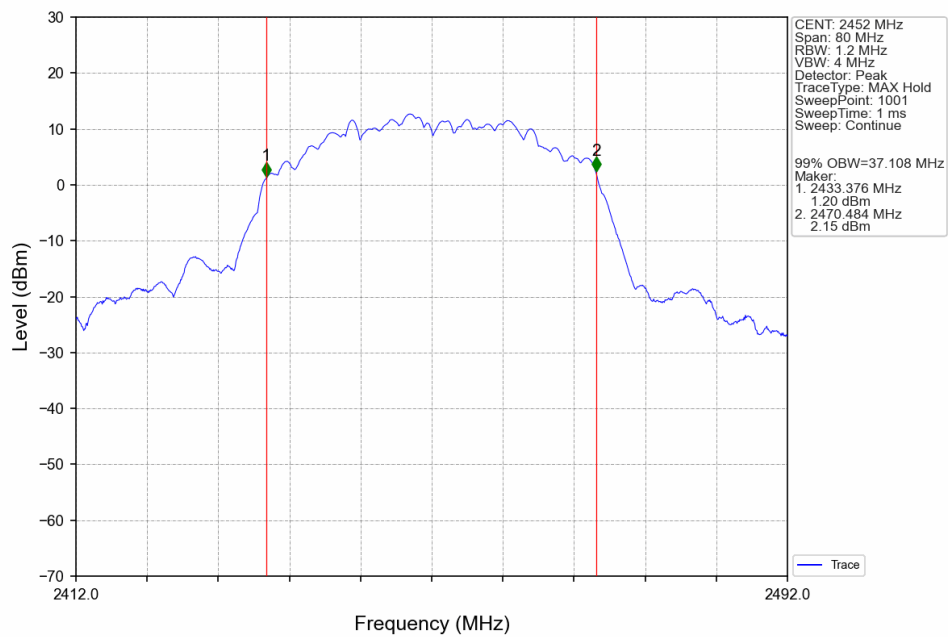


2.2.2 6dB BW

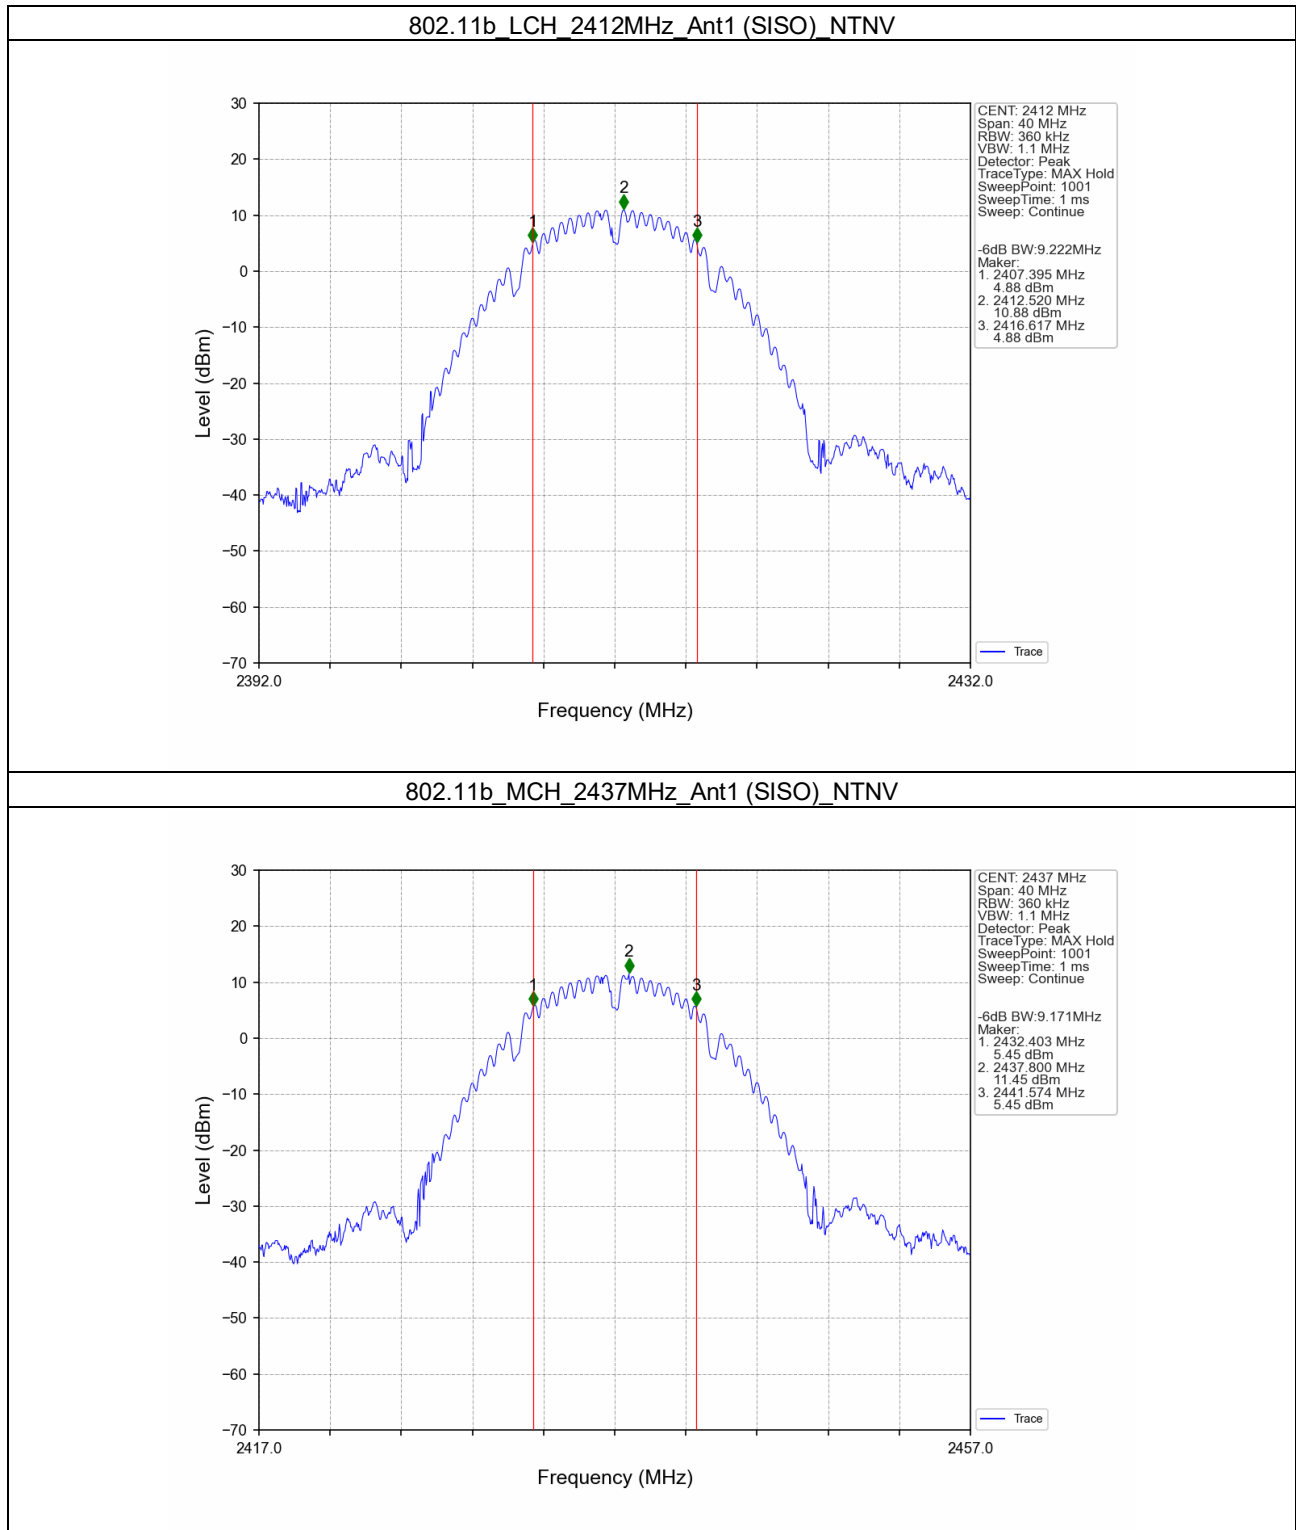


802.11b HCH 2462MHz_Ant1 (SISO)_NTNV

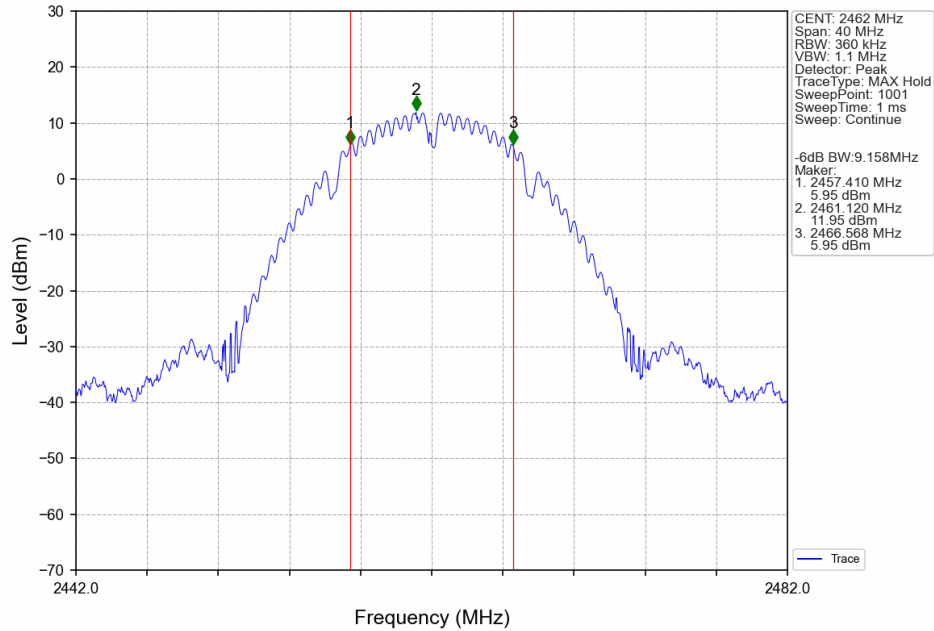

802.11g LCH 2412MHz_Ant1 (SISO)_NTNV

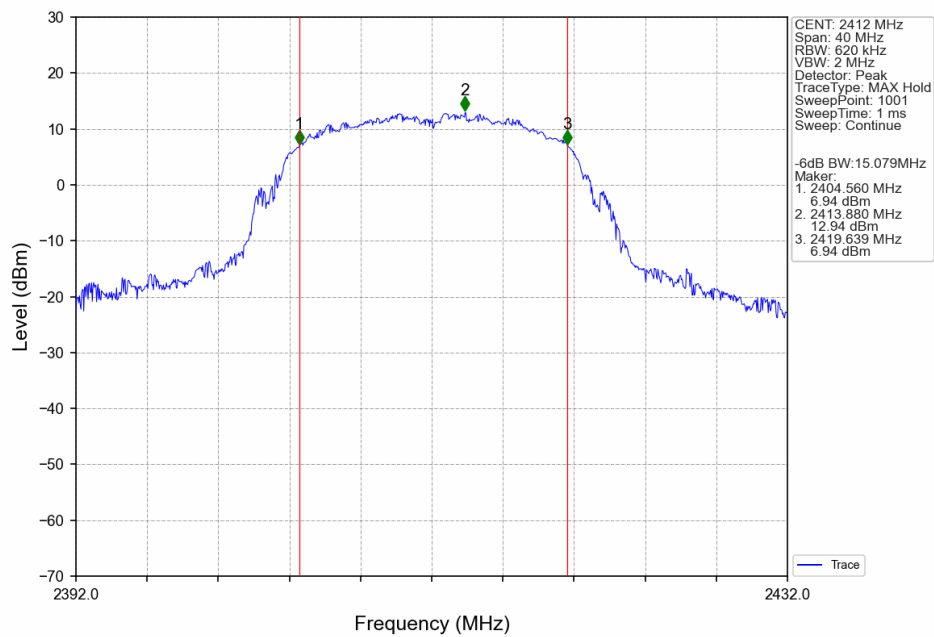

802.11g MCH 2437MHz_Ant1 (SISO)_NTNV

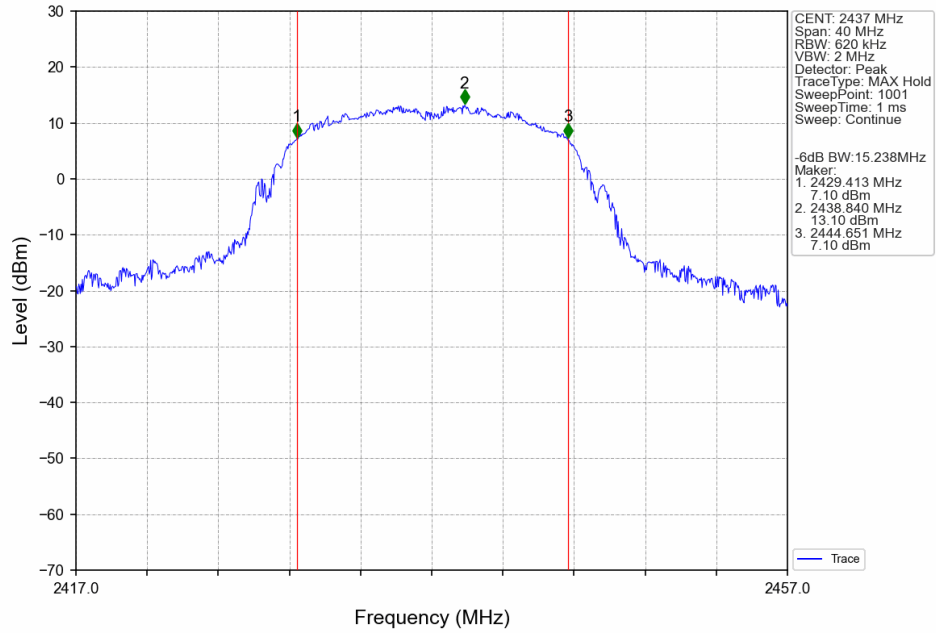

802.11g HCH 2462MHz_Ant1 (SISO)_NTNV

