



FCC RF Test Report

APPLICANT : Hangzhou Tuya Information Technology Co., Ltd
EQUIPMENT : Wi-Fi and Bluetooth Module
MODEL NAME : T7-U
FCC ID : 2ANDL-T7U
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 03, 2026 ~ Mar. 25, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	7
2.3 Connection Diagram of Test System.....	8
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	9
3 TEST RESULT	10
3.1 6dB and 99% Bandwidth Measurement	10
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	28
3.6 AC Conducted Emission Measurement.....	32
3.7 Antenna Requirements.....	34
4 LIST OF MEASURING EQUIPMENT	35
5 MEASUREMENT UNCERTAINTY	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR613010B	Rev. 01	Initial issue of report	Mar. 27, 2026



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Conducted Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 4.14 dB at 4874.00 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.36 dB at 0.158 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Hangzhou Tuya Information Technology Co., Ltd

Room 301,Building 1,Huace Center,Xihu District,Hangzhou City,Zhejiang Province, China

1.2 Manufacturer

Hangzhou Tuya Information Technology Co., Ltd

Room 301,Building 1,Huace Center,Xihu District,Hangzhou City,Zhejiang Province, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wi-Fi and Bluetooth Module
Model Name	T7-U
FCC ID	2ANDL-T7U
IMEI Code	Conducted: #1 Conduction: #3 Radiation: #2
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 19.05 dBm (0.0804 W) 802.11g : 25.06 dBm (0.3206 W) 802.11n HT20 : 23.34 dBm (0.2158 W) 802.11n HT40 : 20.51 dBm (0.1125 W) 802.11ax HE20 : 23.55 dBm (0.2265 W)
99% Occupied Bandwidth	802.11b : 13.63MHz 802.11g : 13.75MHz 802.11n HT40 : 27.65MHz 802.11ax HE20 : 13.83MHz
Antenna Type / Gain	PCB Antenna type with gain 0.88 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Note:

1. For 802.11n/11ax 20MHz mode, the whole testing have assessed only 802.11ax HE20 by referring to the higher output power.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power, the full RU power/PSD > partial RU, therefore the full RU perform full, and partial RU verify bandedge/spurious.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS CO01-KS 03CH05-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH05-KS	AUDIX	E3	210616
3.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2020+Cor.1-2023

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :BT Link + WLAN Link(2.4G) + USB Cable (Charging From NB)

2.3 Connection Diagram of Test System

AC Conducted Emission:

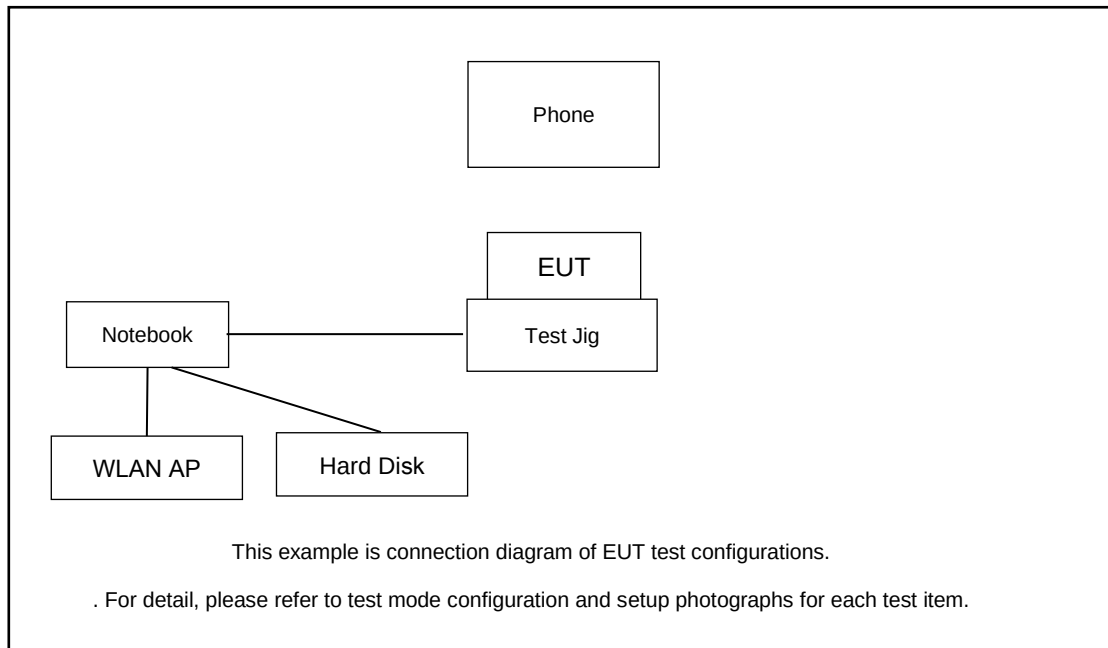

Radiated Emission:

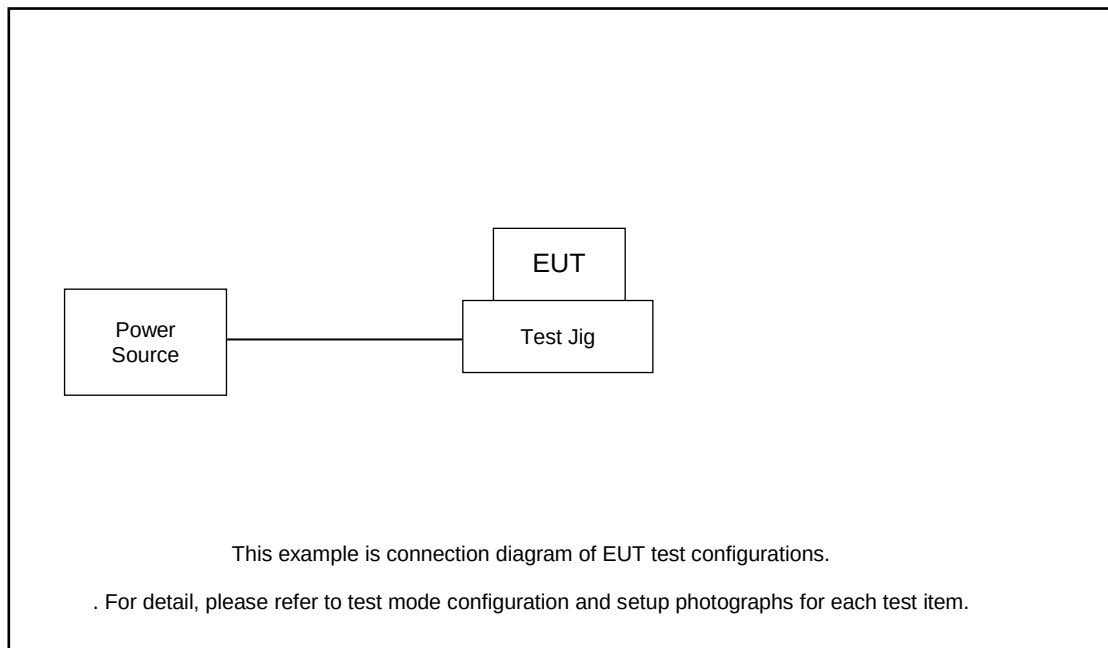

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Phone	MOTO	XT1952-1	N/A	N/A	N/A
2.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
4.	Hard Disk	WD	C6B	N/A	N/A	N/A
5.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 0.5 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 0.5 + 10 = 10.50 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.8.1 for 6dB BW and 6.9.3 for 99% occupied bandwidth measurements
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth (VBW) $\geq 3 \times \text{RBW}$. Detector = Peak. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) approximately three times the RBW.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

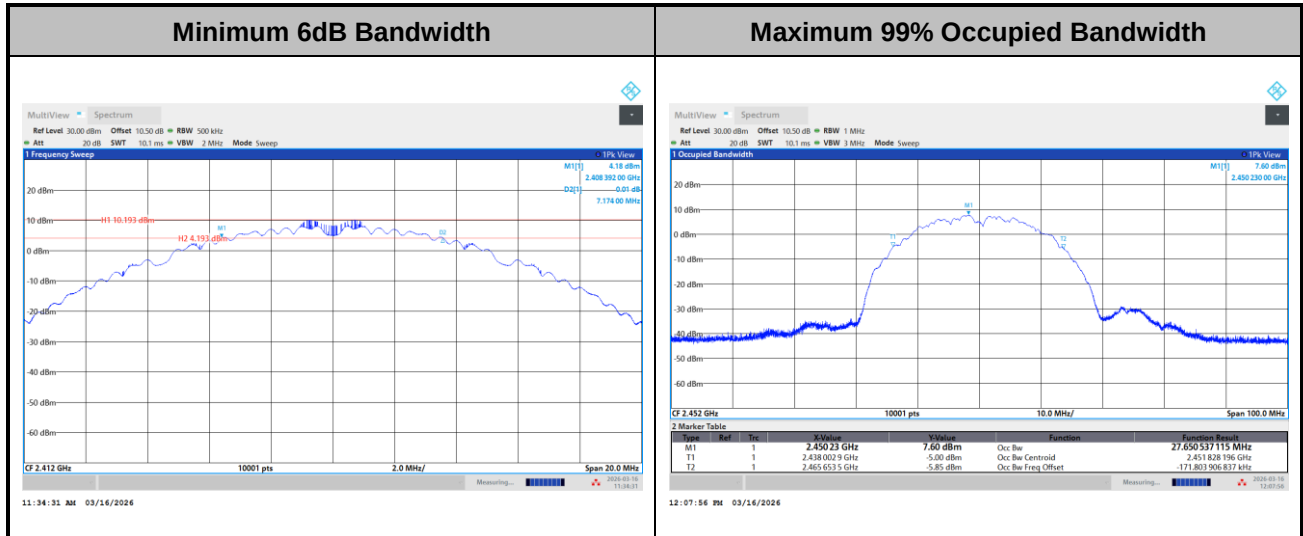

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2020 clause 11.9.1.2 PKPM1 Peak power meter or ANSI C63.10-2020 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

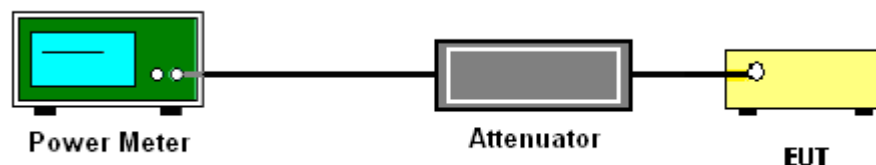

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2020 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

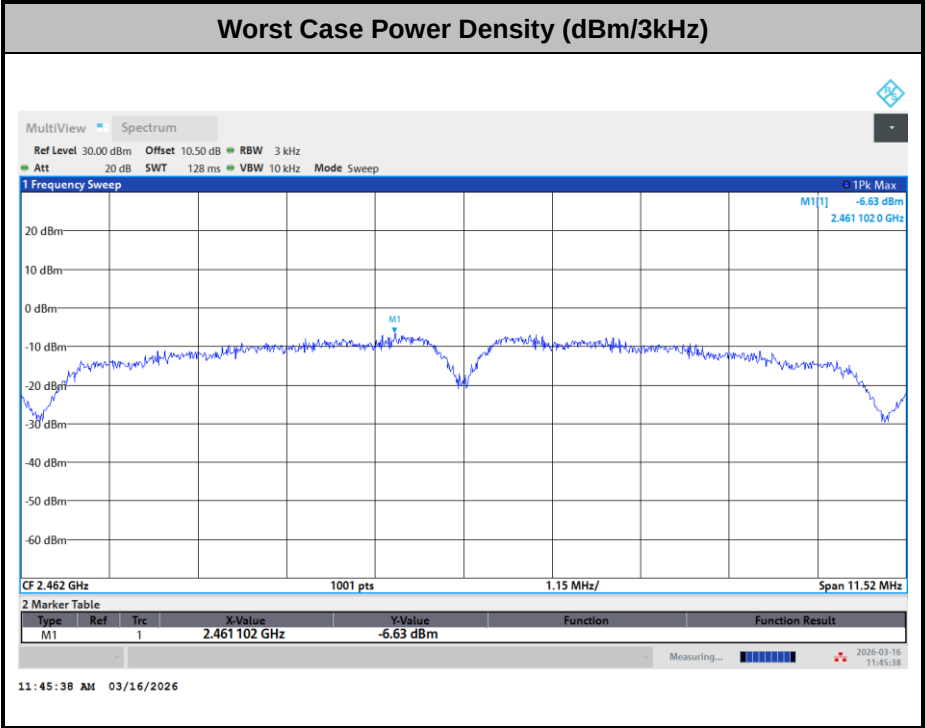

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2020 clause 11.11.3
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	Smile Wang	Temperature :	19~21°C
		Relative Humidity :	44~46%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

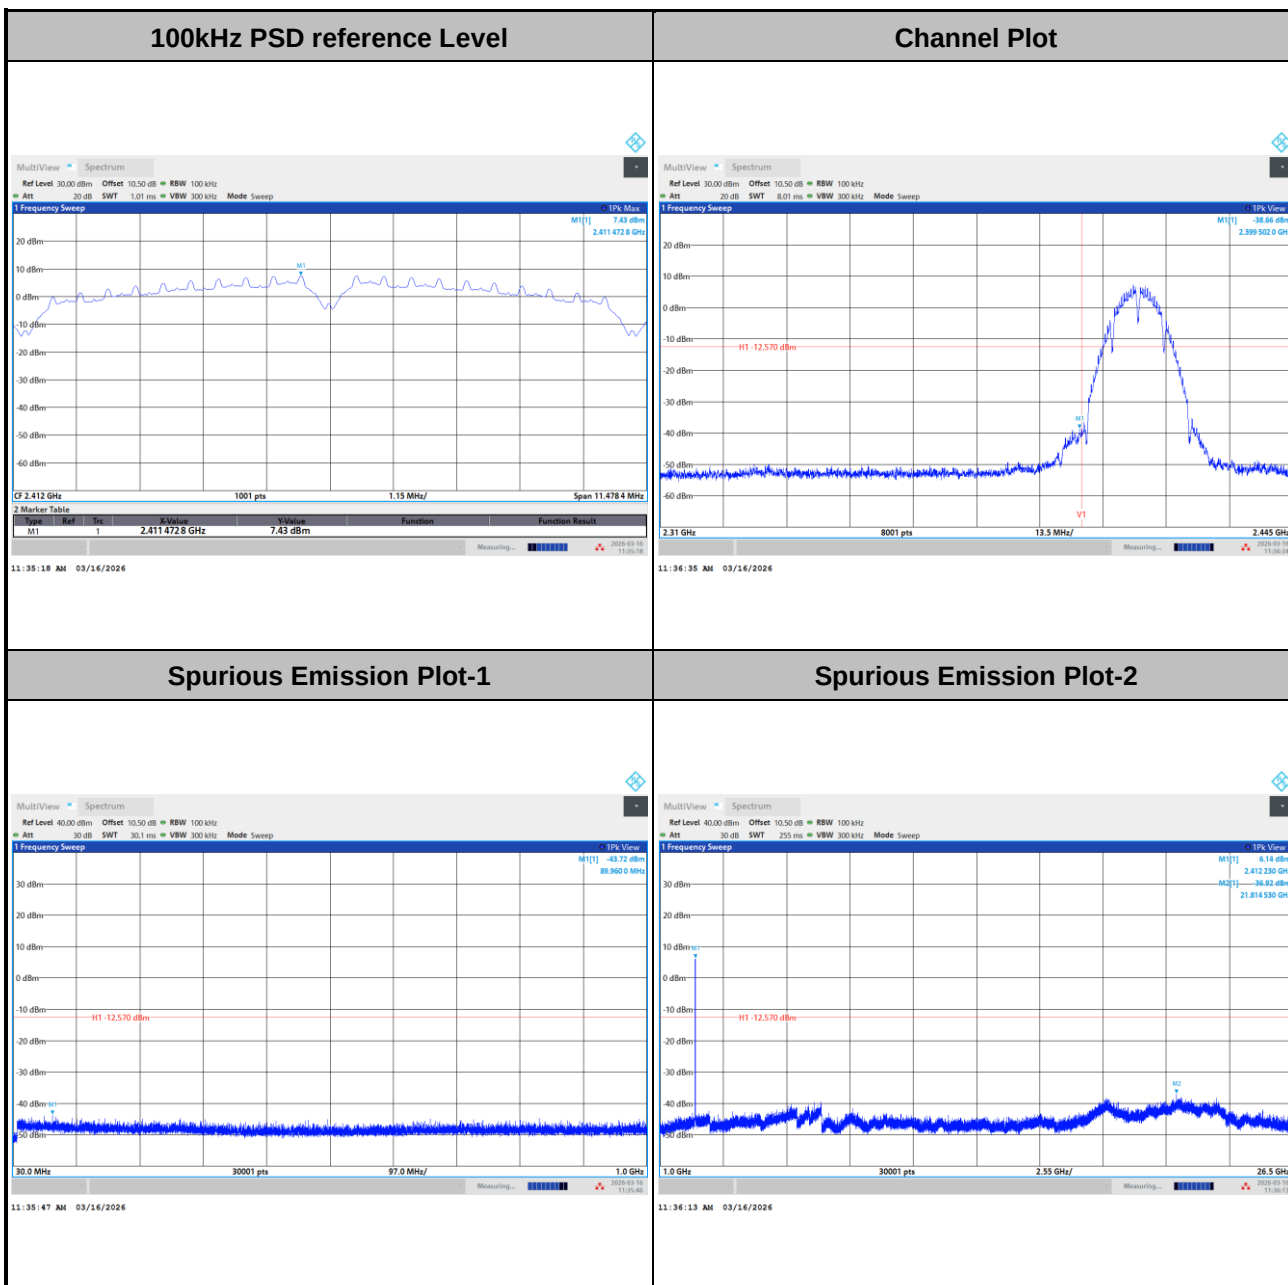




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

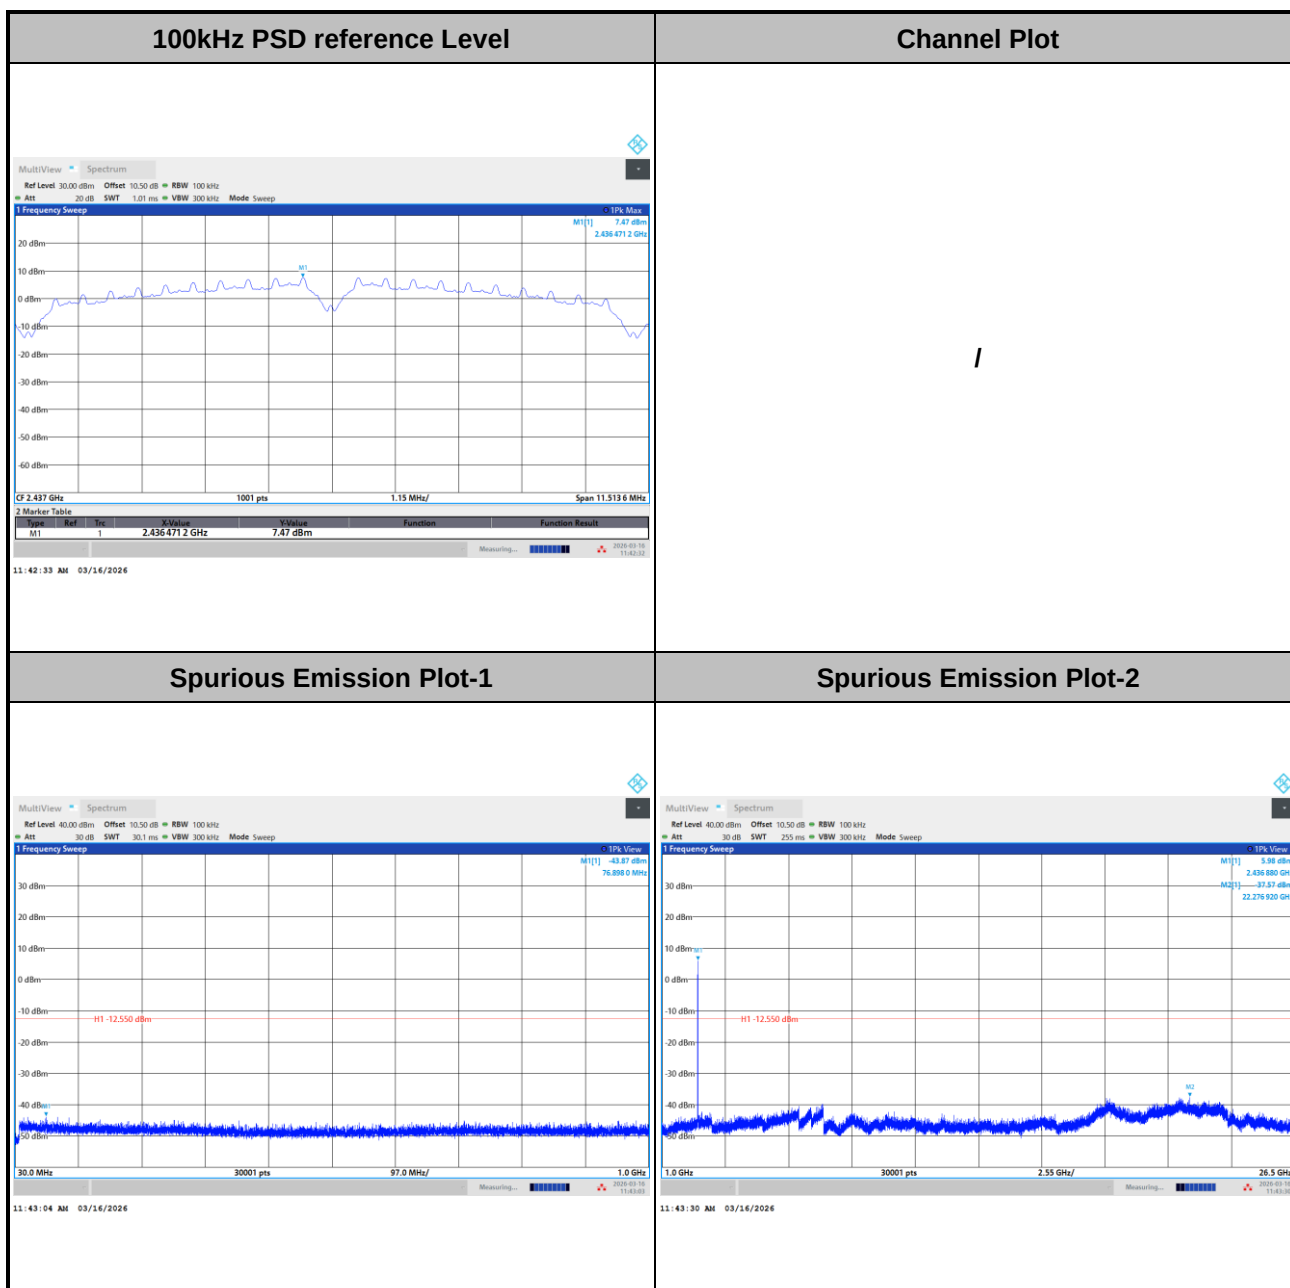




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

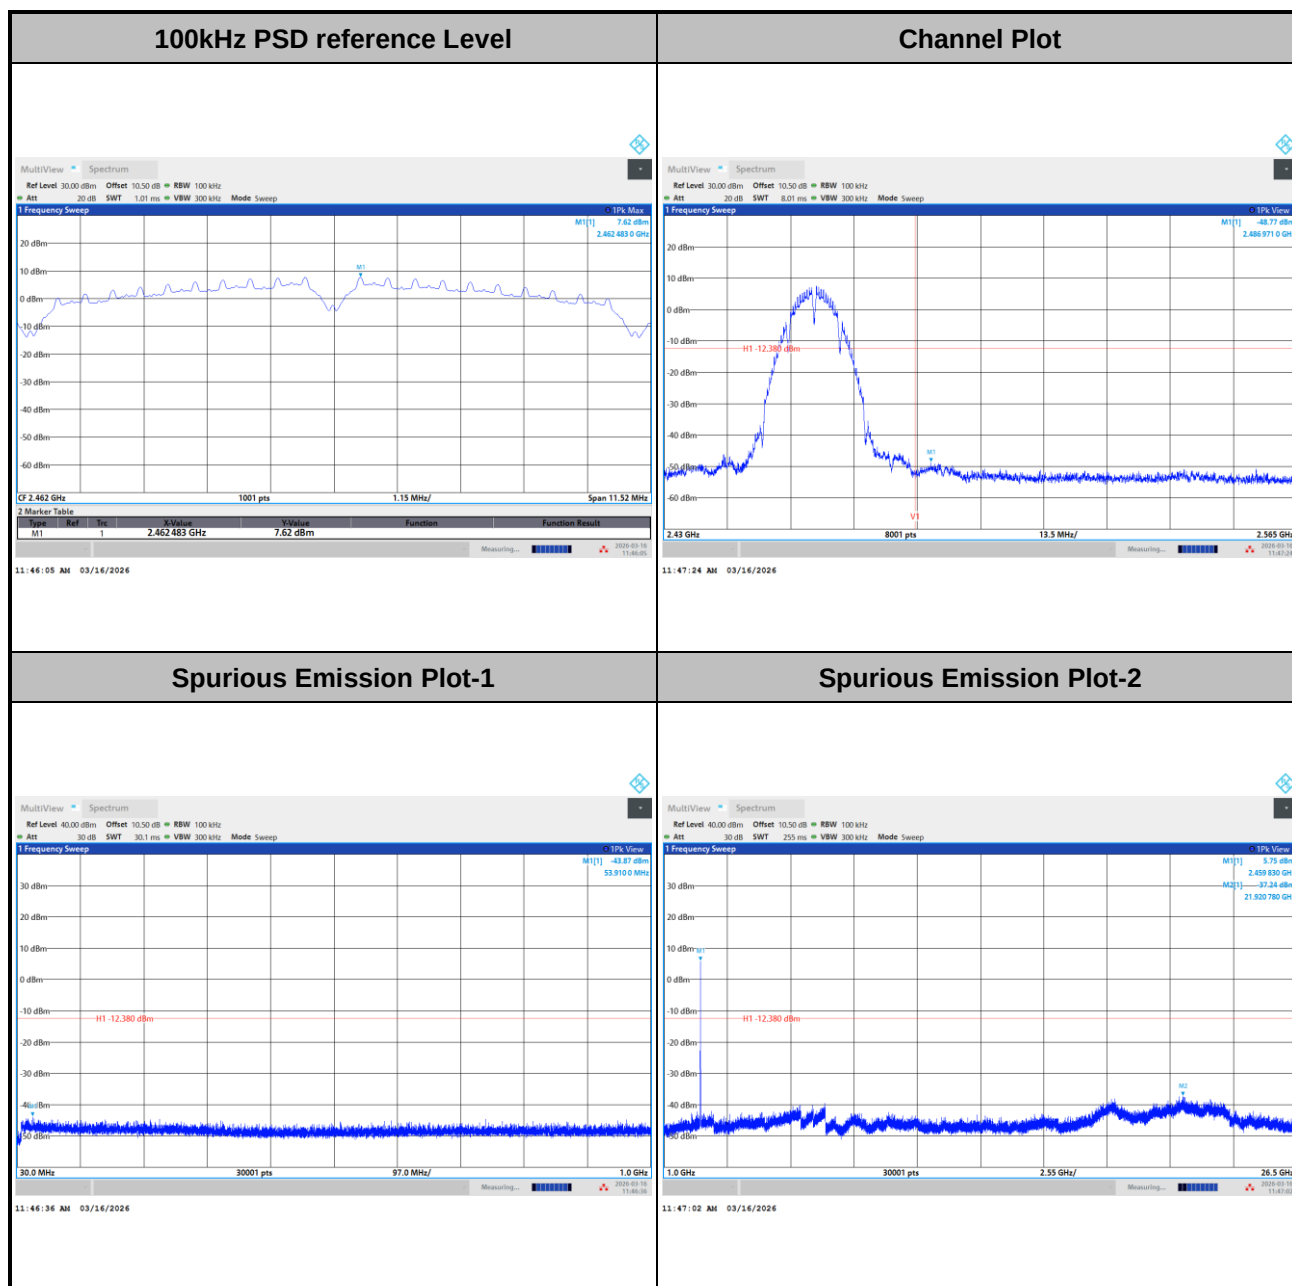




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----

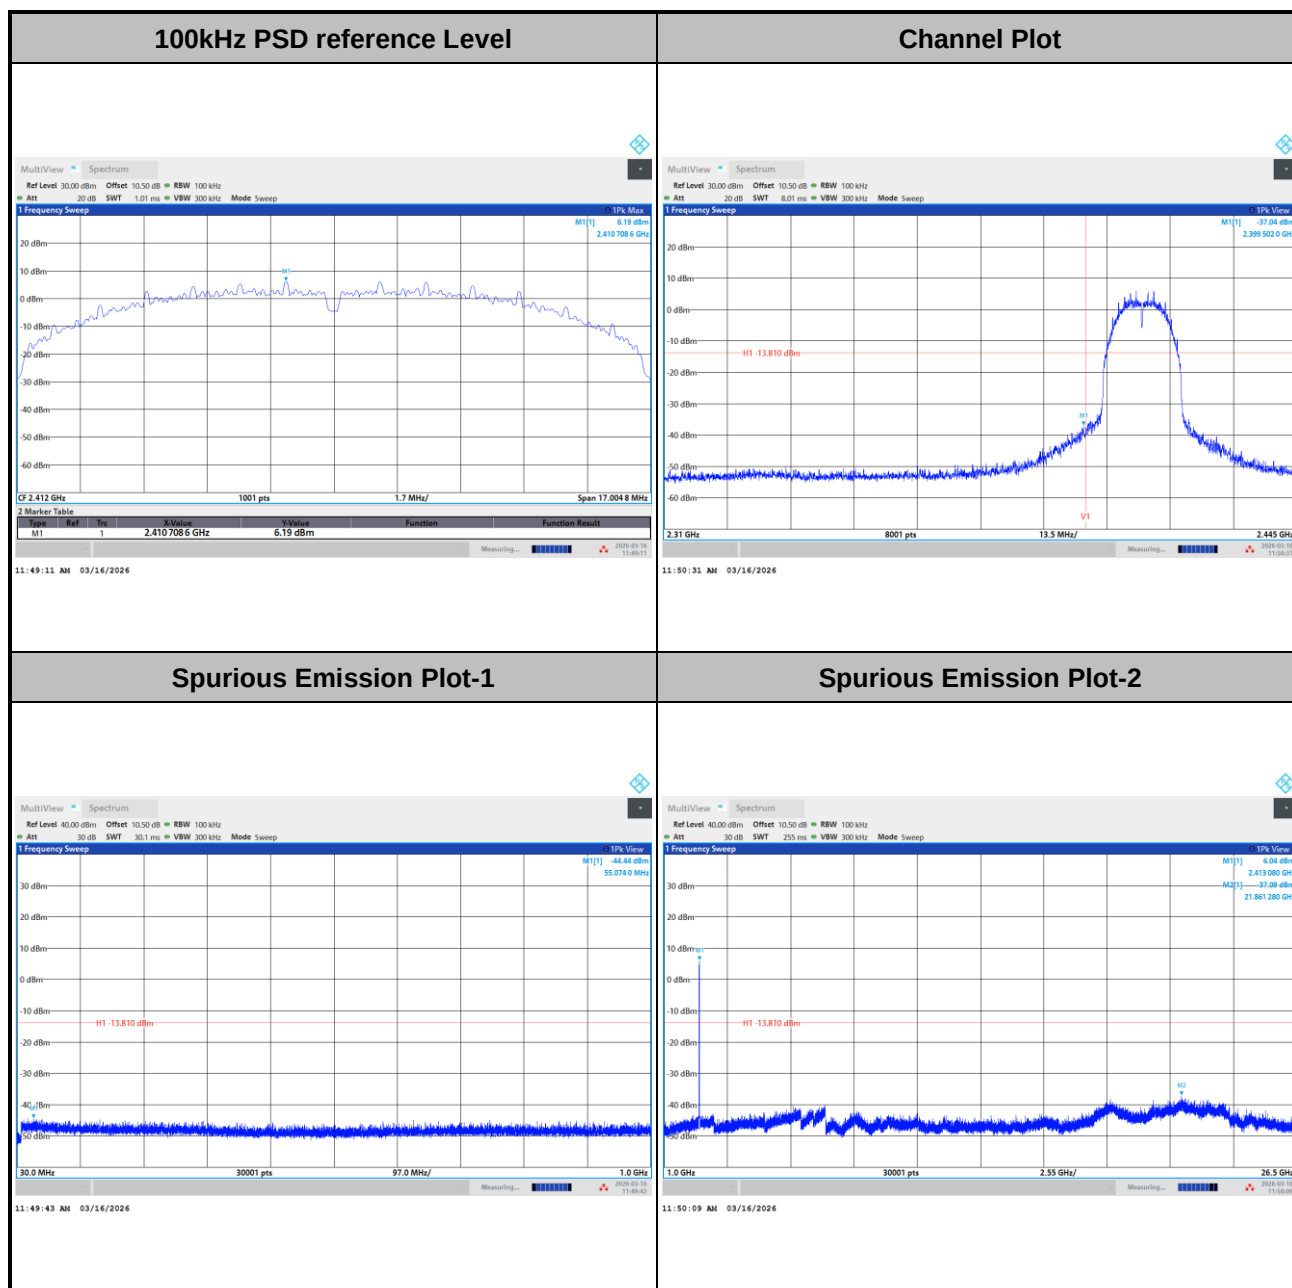




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

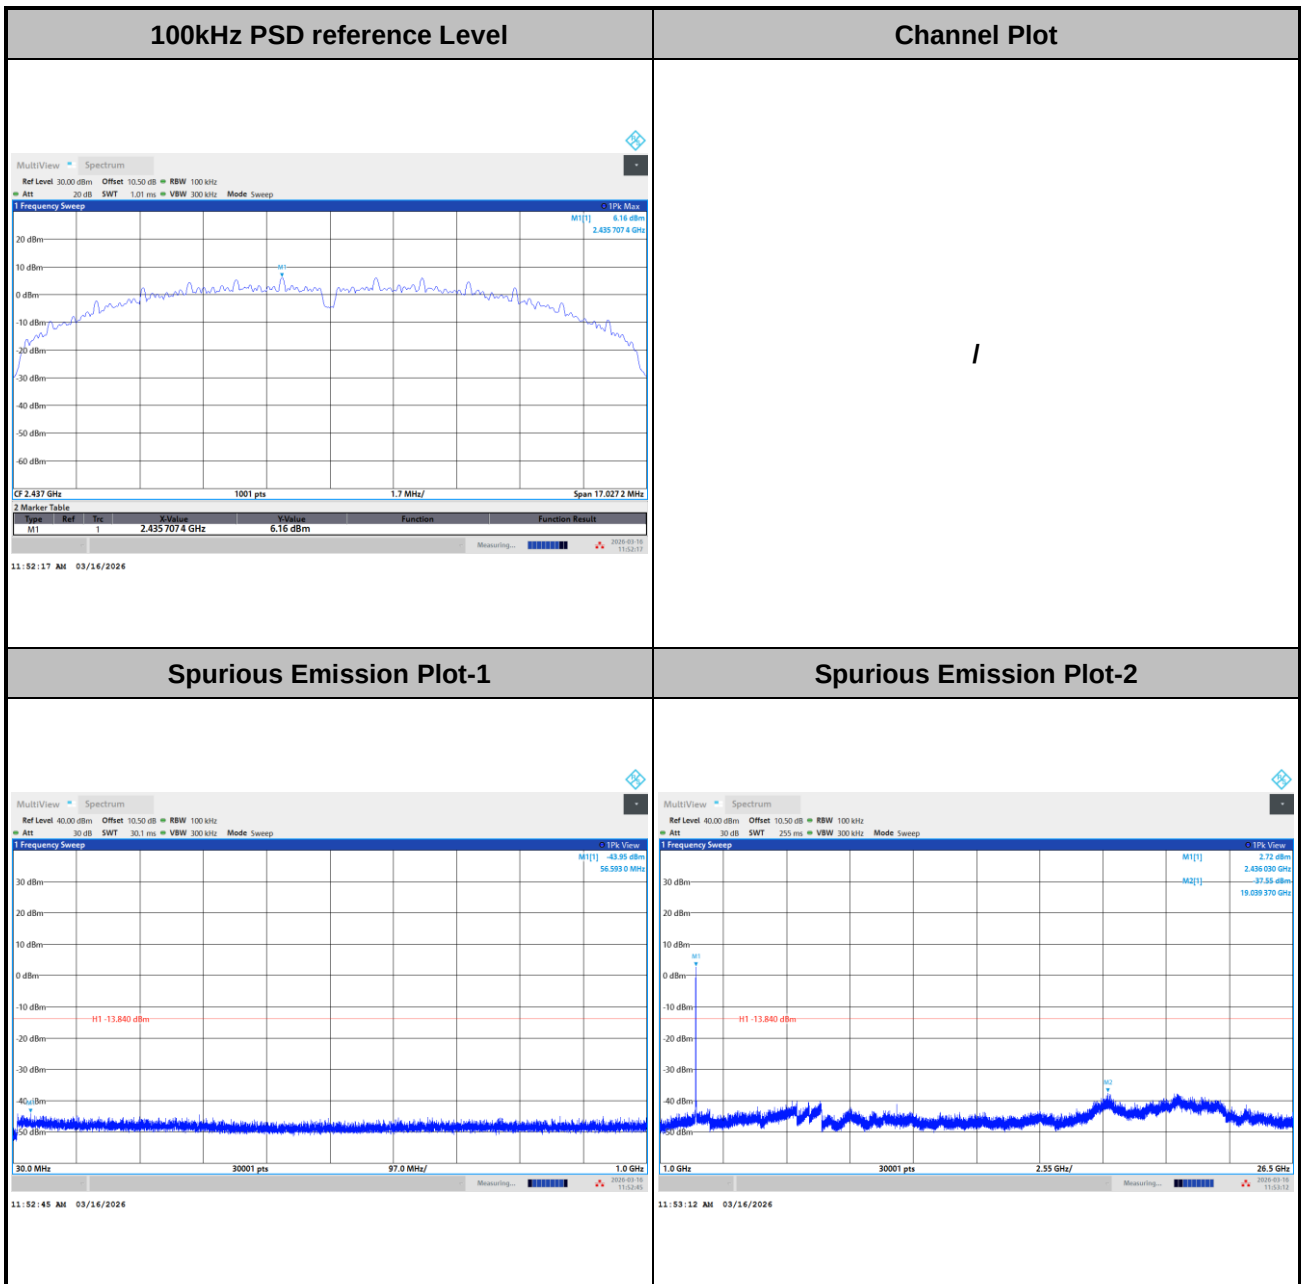




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

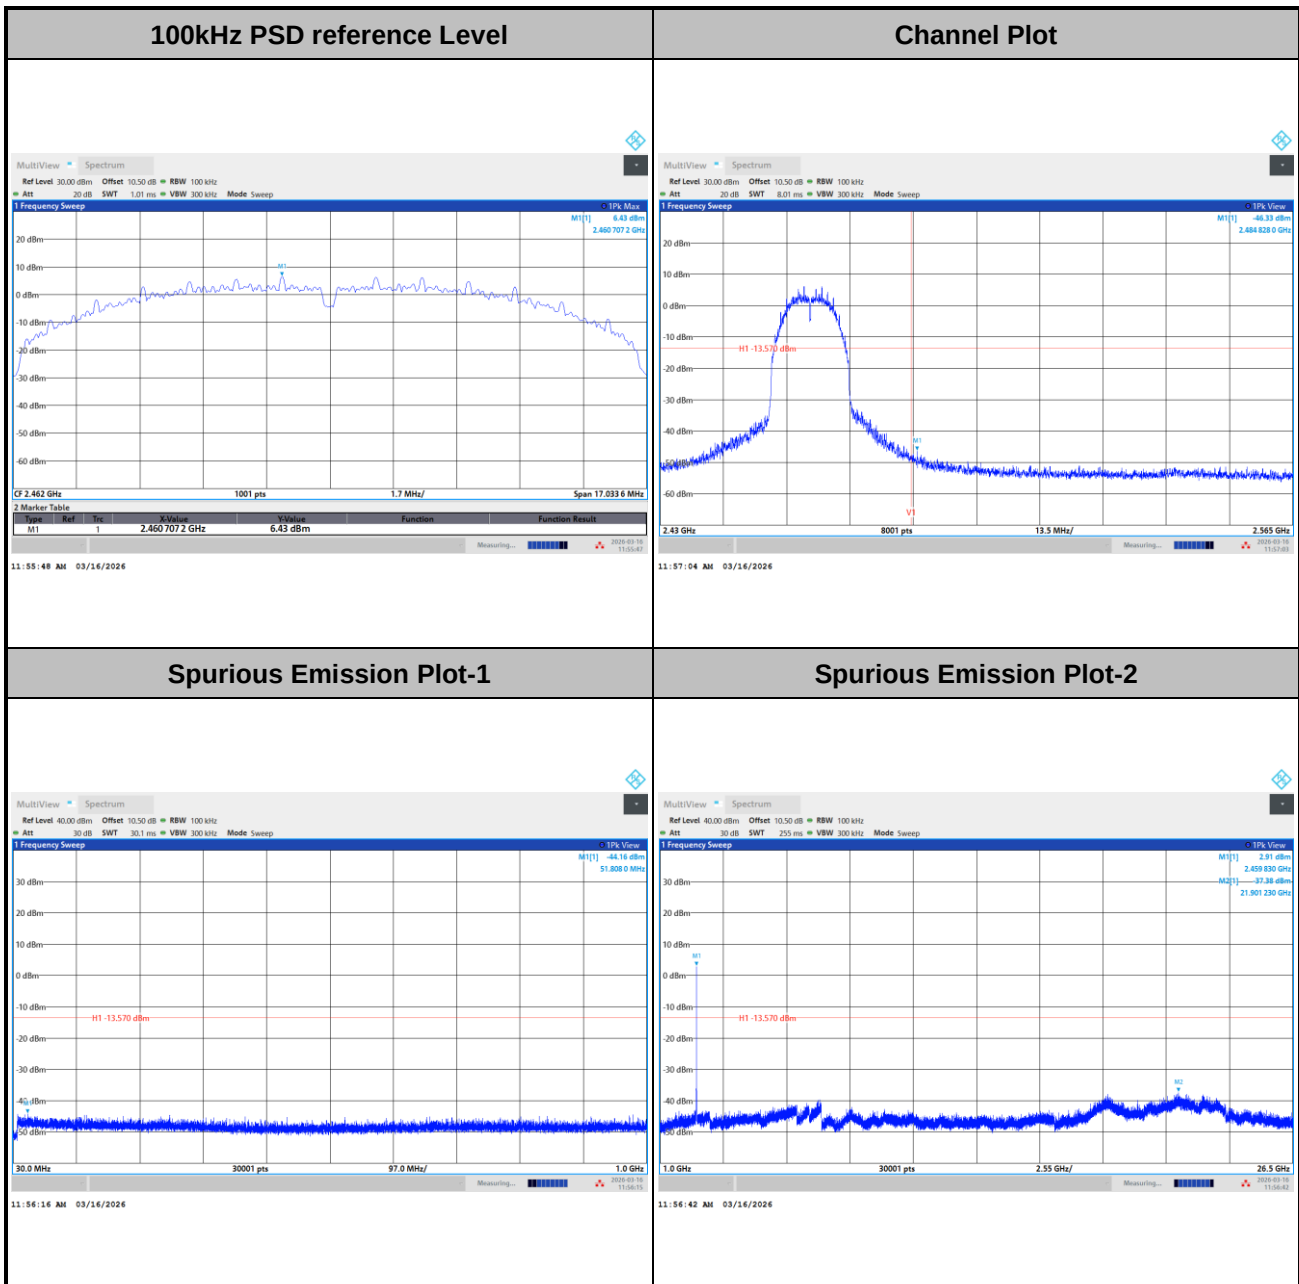




Test Mode :	802.11ax HE20	Test Channel :	01
-------------	---------------	----------------	----

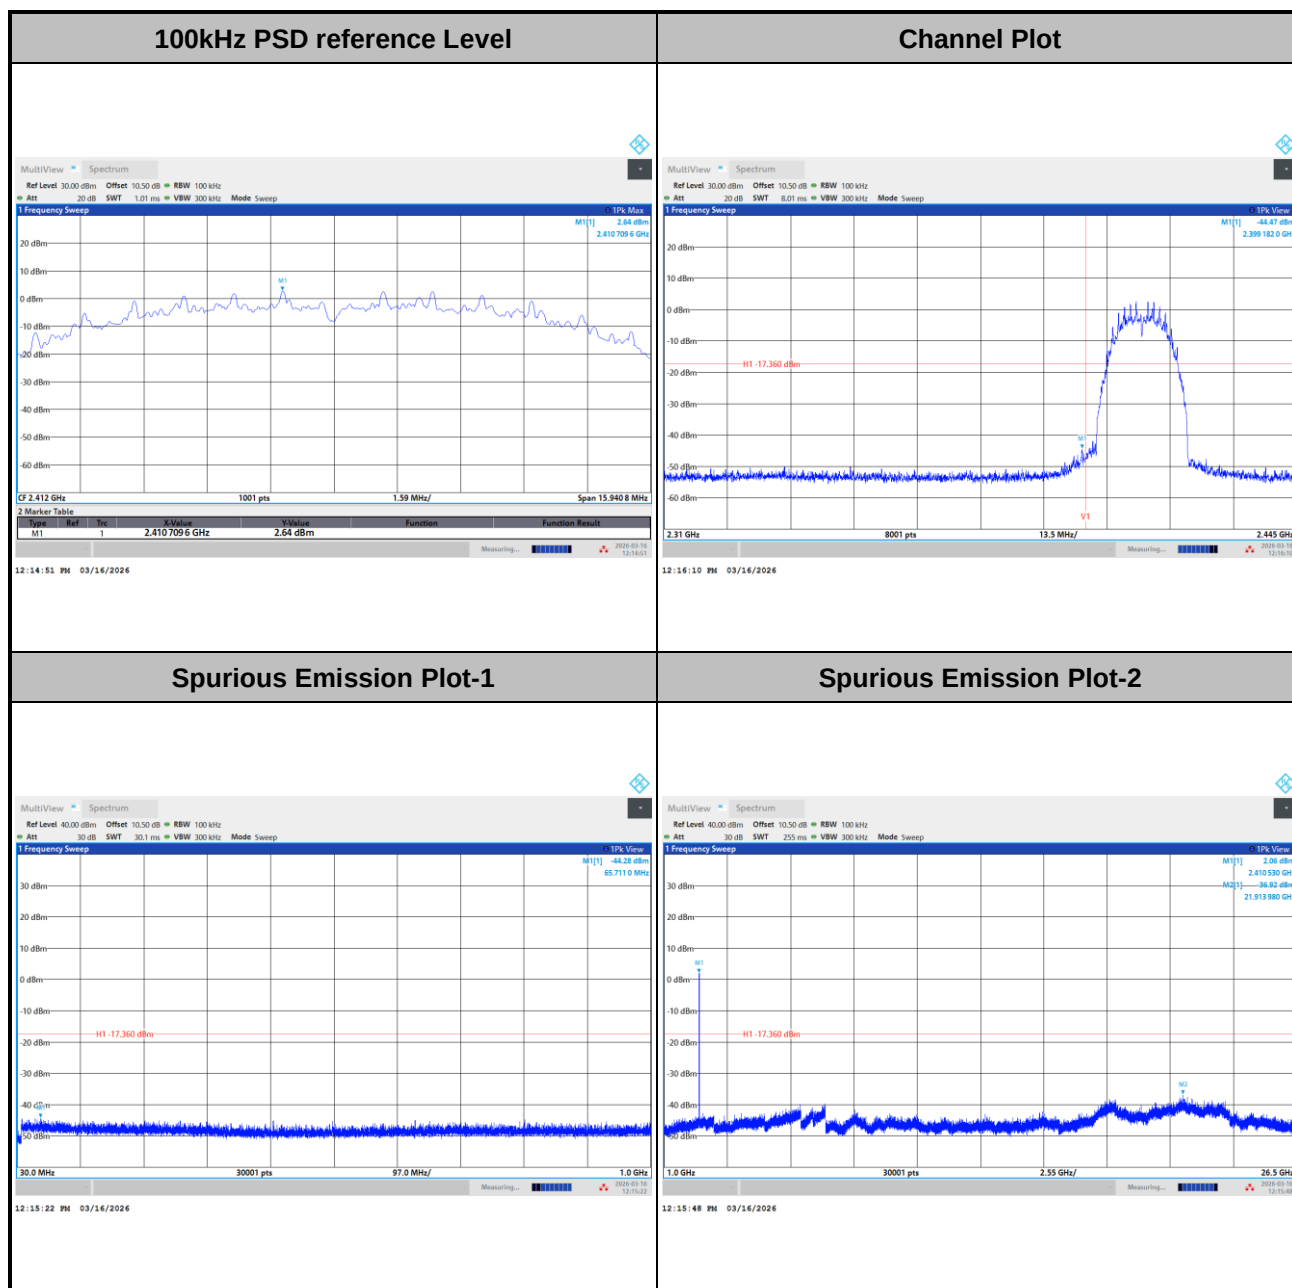




Test Mode :	802.11ax HE20	Test Channel :	06
-------------	---------------	----------------	----

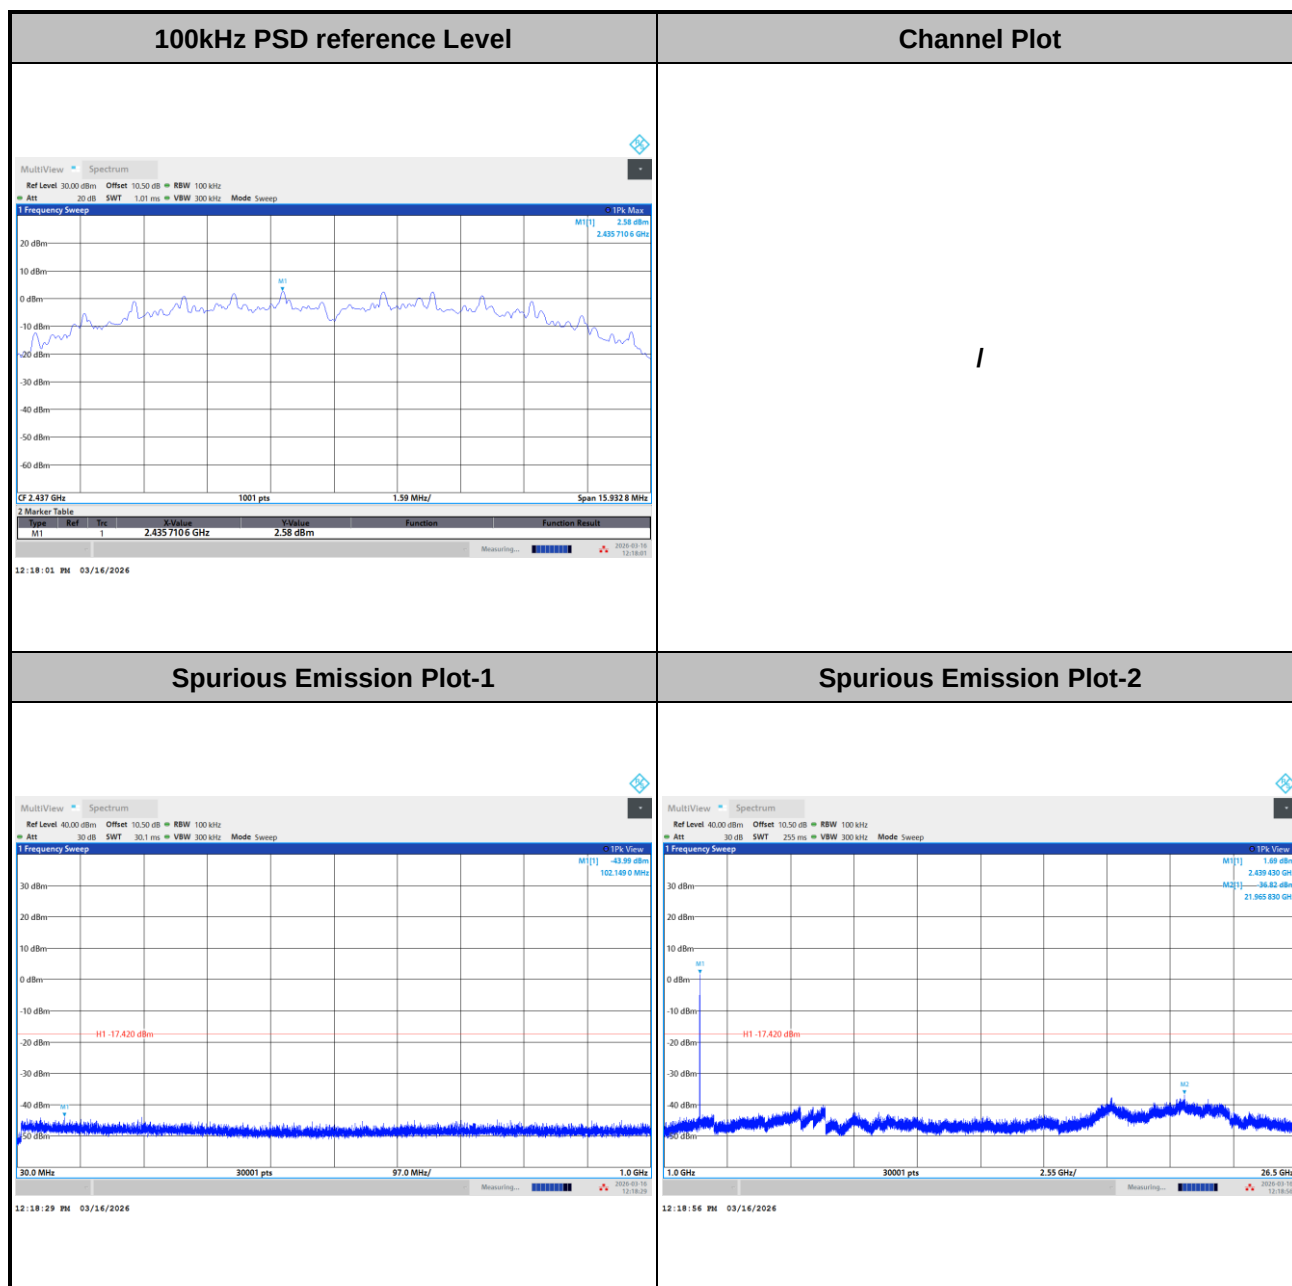




Test Mode :	802.11ax HE20	Test Channel :	11
-------------	---------------	----------------	----

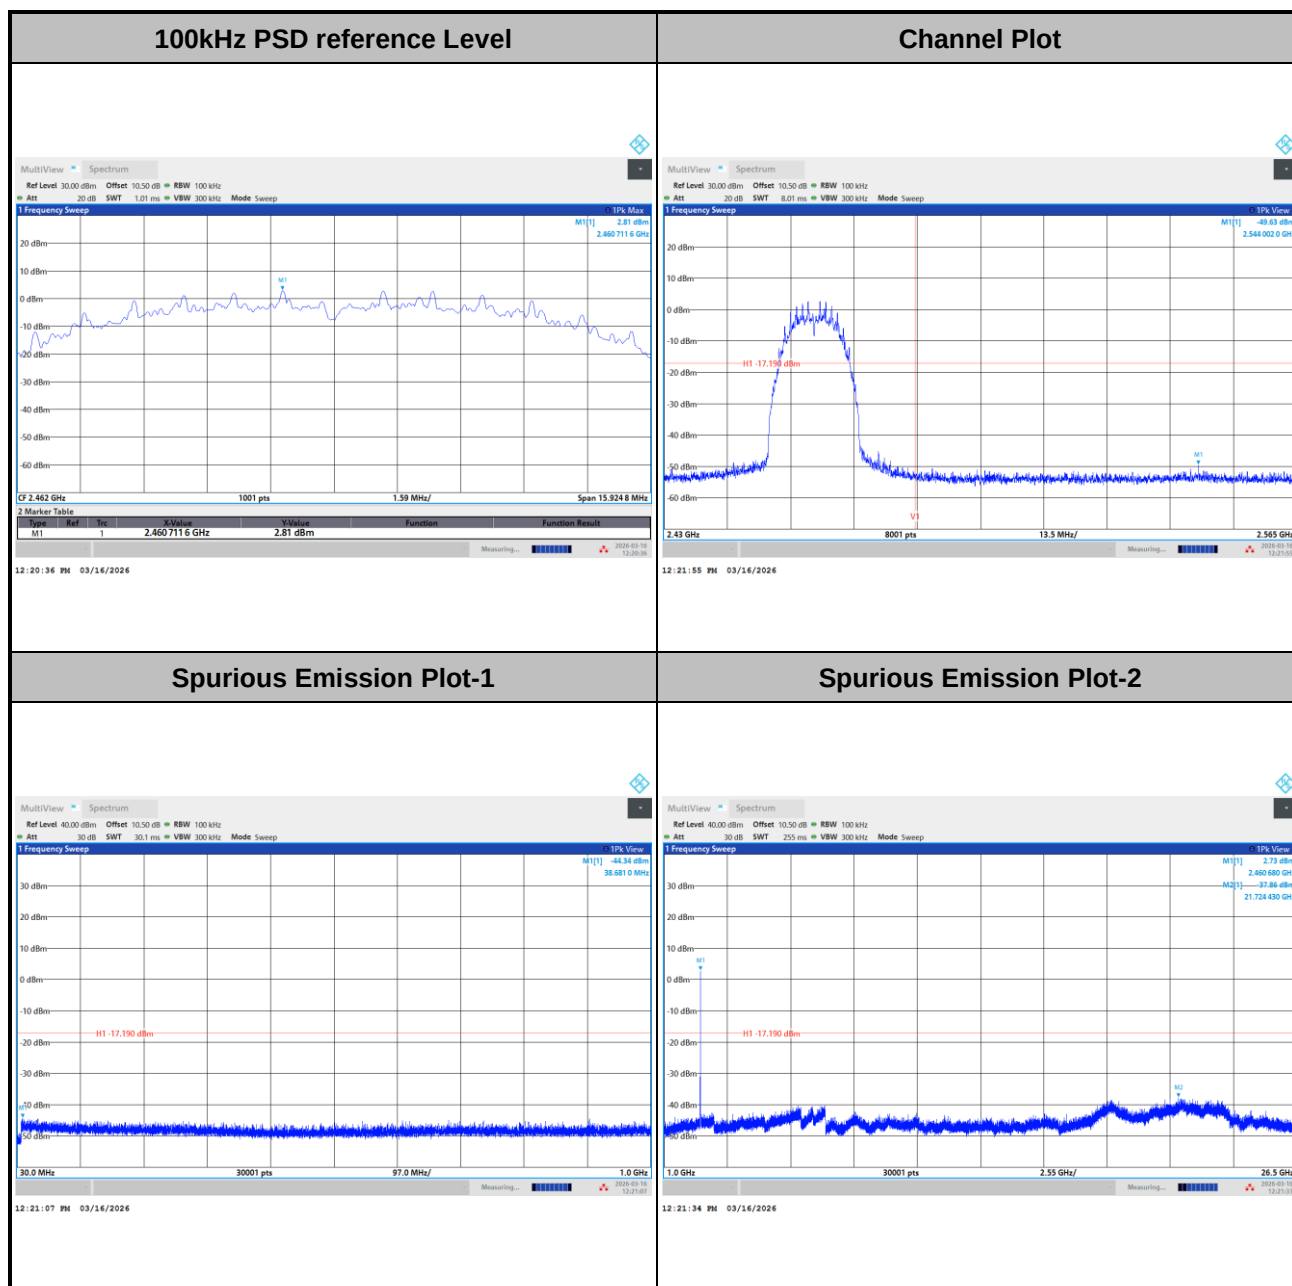




Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

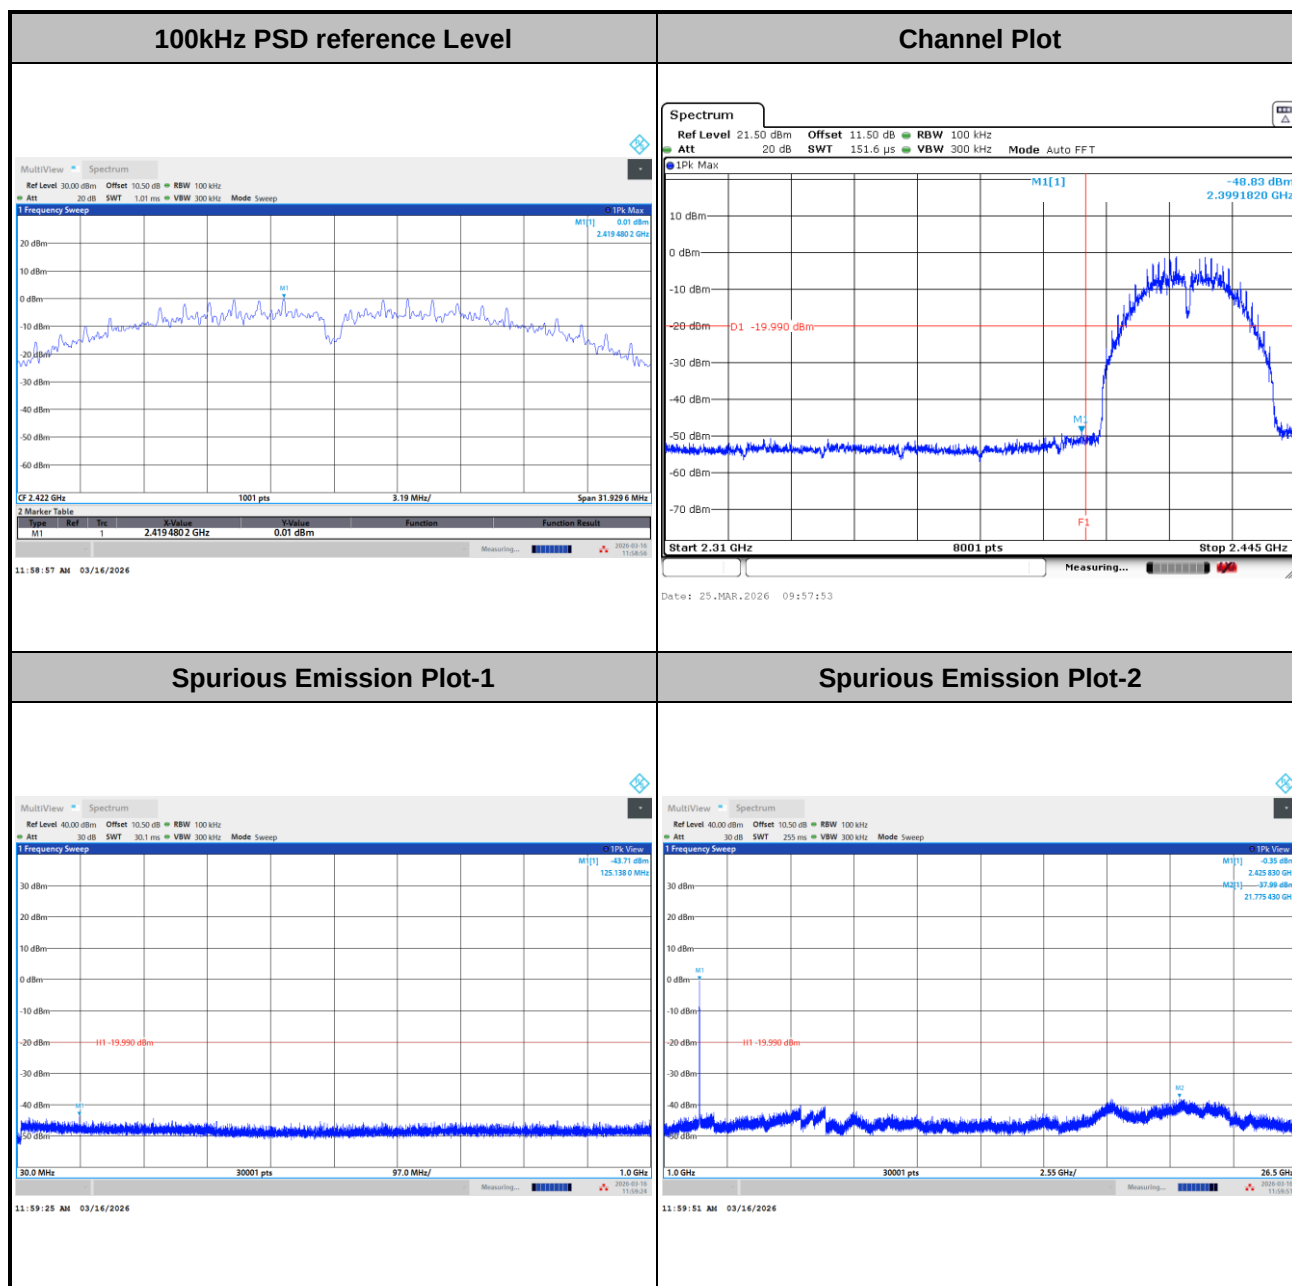




Test Mode :	802.11n HT40	Test Channel :	06
-------------	--------------	----------------	----

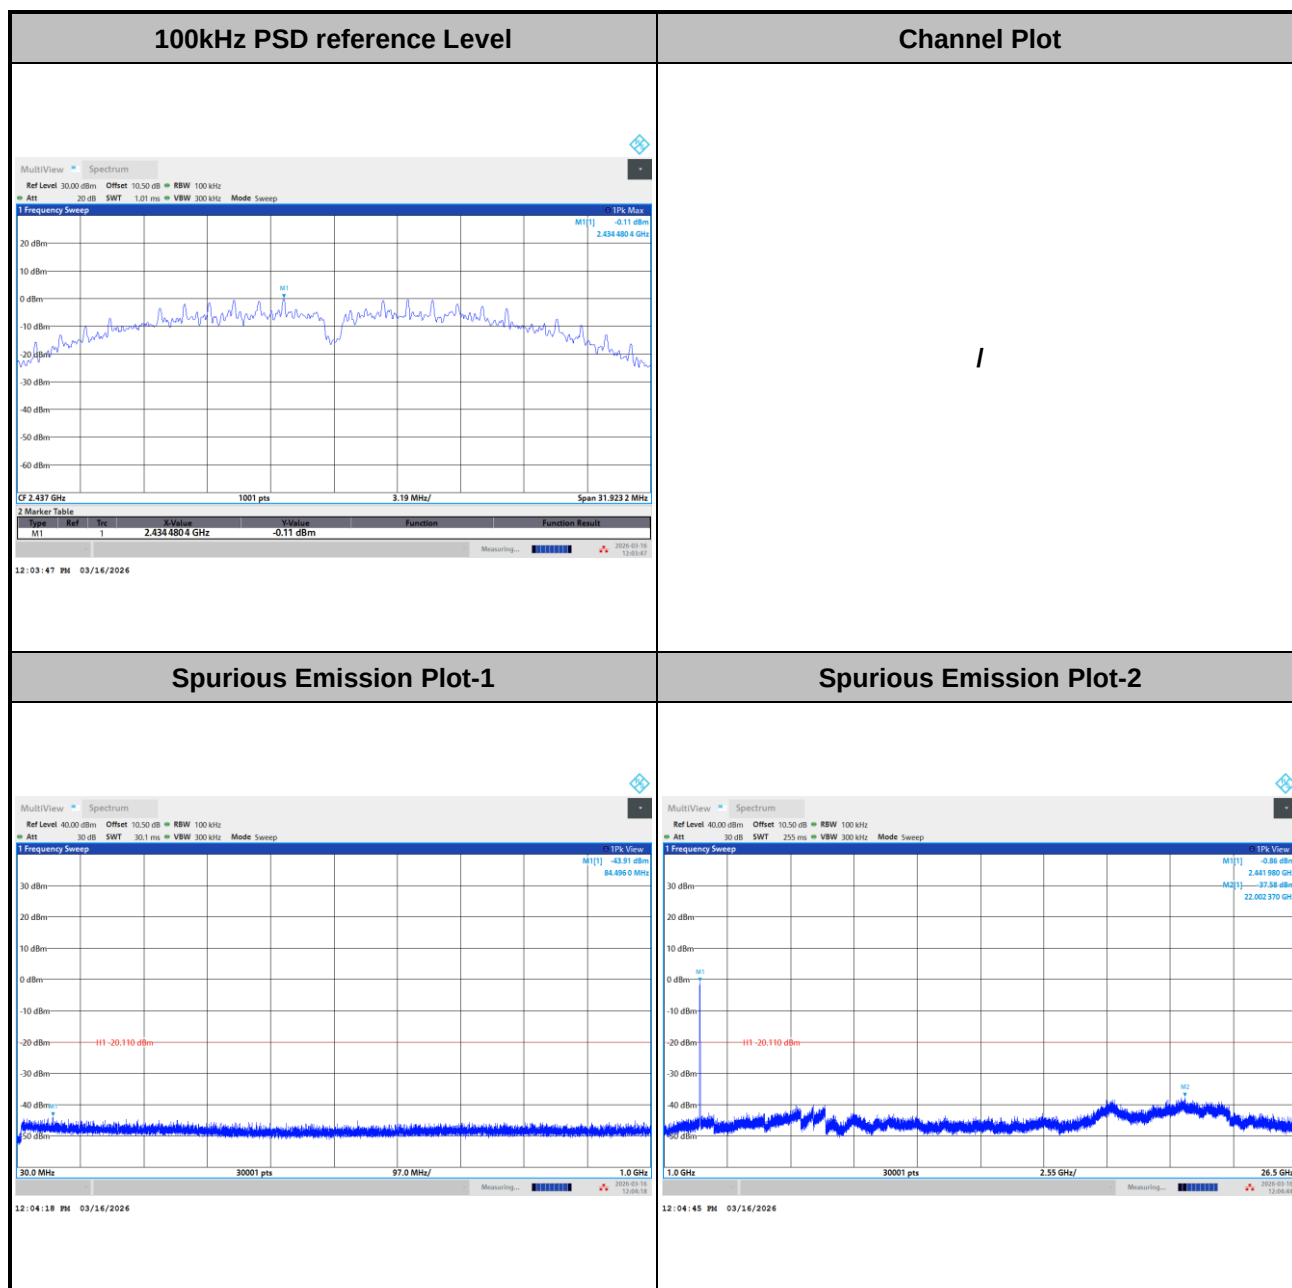



Test Mode :	802.11n HT40	Test Channel :	09
-------------	--------------	----------------	----

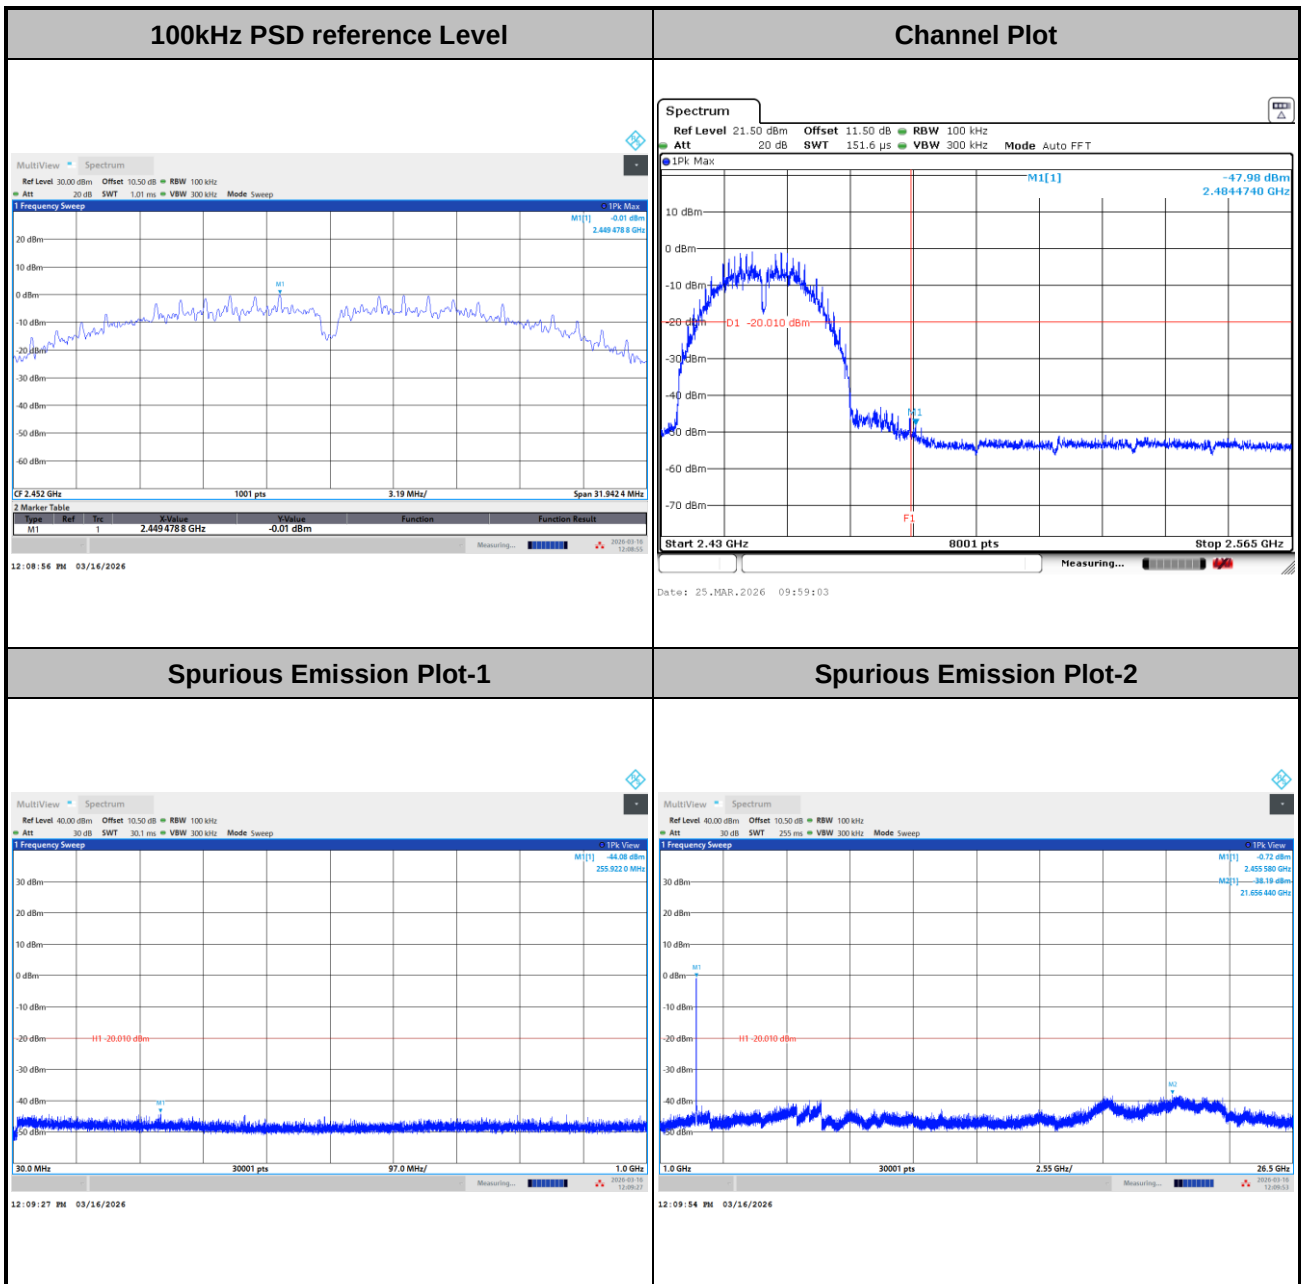

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

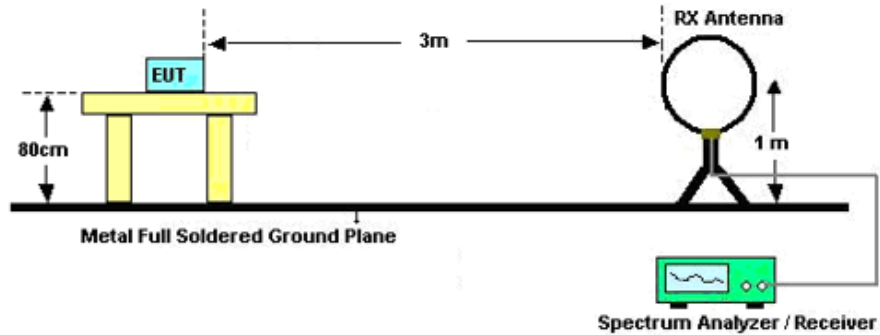

For radiated emissions from 30MHz to 1GHz

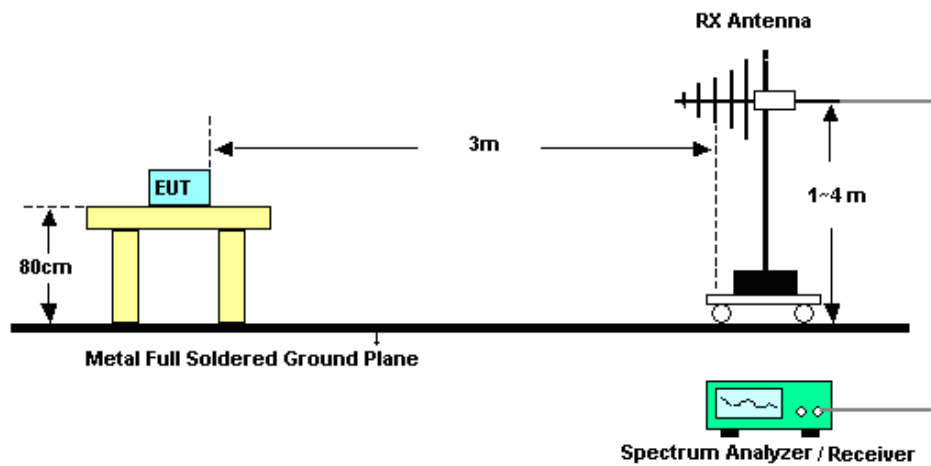

For radiated emissions above 1GHz

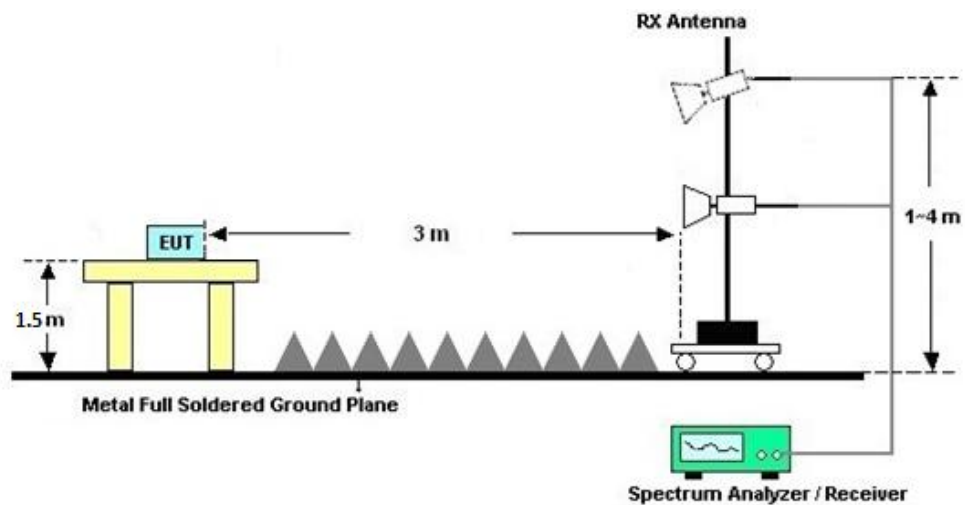



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

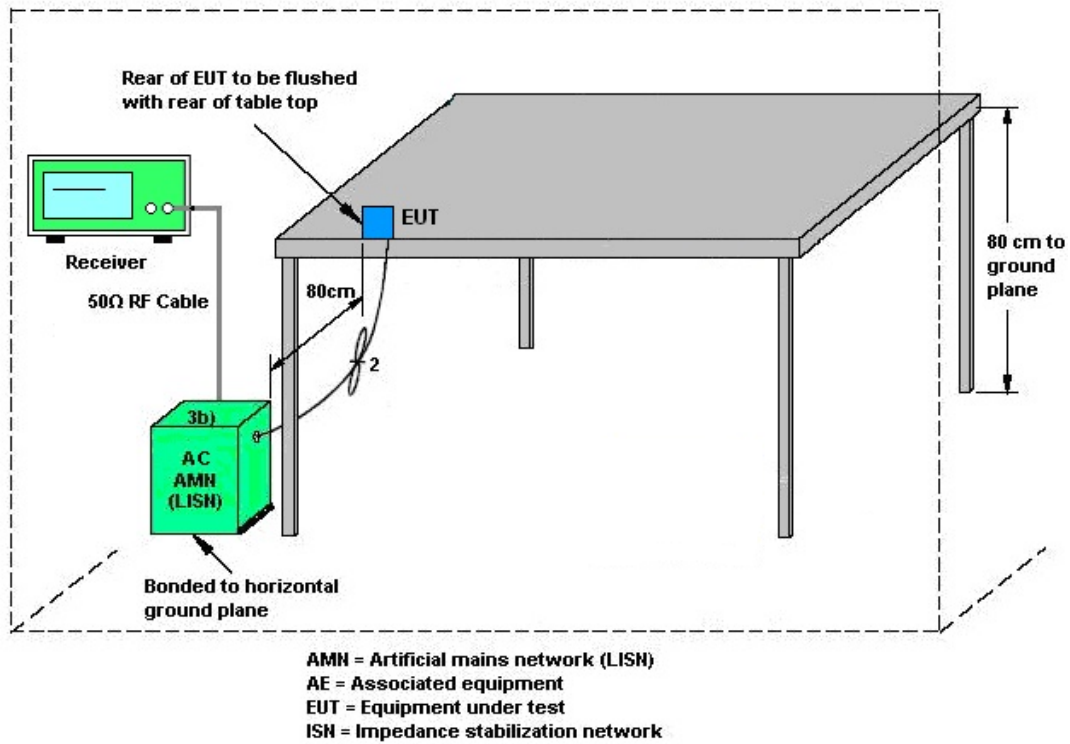

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290151	3Hz~8.5GHz;Max 30dBm	Jul. 02, 2025	Mar. 03, 2026~Mar. 04, 2026	Jul. 01, 2026	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44G,MAX 30dB	Oct. 10, 2025	Mar. 03, 2026~Mar. 04, 2026	Oct. 10, 2026	Radiation (03CH05-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Mar. 03, 2026~Mar. 04, 2026	Aug. 09, 2026	Radiation (03CH05-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Mar. 03, 2026~Mar. 04, 2026	Mar. 23, 2026	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218642	1GHz~18GHz	Apr. 14, 2025	Mar. 03, 2026~Mar. 04, 2026	Apr. 13, 2026	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101115	18GHz~40GHz	Oct. 18, 2025	Mar. 03, 2026~Mar. 04, 2026	Oct. 19, 2026	Radiation (03CH05-KS)
Amplifier	SONOMA	310N	380827	9KHz~1GHz	Jul. 03, 2025	Mar. 03, 2026~Mar. 04, 2026	Jul. 02, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM18G40GA	060851	18~40GHz	Dec. 26, 2025	Mar. 03, 2026~Mar. 04, 2026	Dec. 25, 2026	Radiation (03CH05-KS)
high gain Amplifier	EM	EM01G18GA	060843	1Ghz~18Ghz	Dec. 25, 2025	Mar. 03, 2026~Mar. 04, 2026	Dec. 24, 2026	Radiation (03CH05-KS)
Amplifier	EM	EM01G18GA	060833	1Ghz~18Ghz	Dec. 25, 2025	Mar. 03, 2026~Mar. 04, 2026	Dec. 24, 2026	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 03, 2026~Mar. 04, 2026	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 03, 2026~Mar. 04, 2026	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 03, 2026~Mar. 04, 2026	NCR	Radiation (03CH05-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Mar. 16, 2026~Mar. 25, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Dec. 25, 2025	Mar. 16, 2026~Mar. 25, 2026	Dec. 24, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Dec. 25, 2025	Mar. 16, 2026~Mar. 25, 2026	Dec. 24, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	Apr. 16, 2025	Mar. 07, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Mar. 07, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz, Max AC 0~240/0~63Hz/16A	Oct. 10, 2025	Mar. 07, 2026	Oct. 09, 2026	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Mar. 07, 2026	Apr. 15, 2026	Conduction (CO01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.00 dB
Occupied Channel Bandwidth	±0.384%
Conducted Power	±0.90 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.38ppm

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.30 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.36 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jiang Jun	Temperature:	21~25	°C
Test Date:	2026/3/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant1		
11b	1Mbps	1	1	2412	13.56	7.17	0.50	Pass
11b	1Mbps	1	6	2437	13.56	7.20	0.50	Pass
11b	1Mbps	1	11	2462	13.63	7.20	0.50	Pass
11g	6Mbps	1	1	2412	13.75	10.63	0.50	Pass
11g	6Mbps	1	6	2437	13.74	10.64	0.50	Pass
11g	6Mbps	1	11	2462	13.75	10.65	0.50	Pass
HT40	MCS0	1	3	2422	27.65	19.96	0.50	Pass
HT40	MCS0	1	6	2437	27.64	19.95	0.50	Pass
HT40	MCS0	1	9	2452	27.65	19.96	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	18.95	30.00	0.88	19.83	36.00	Pass
11b	1Mbps	1	6	2437	19.05	30.00	0.88	19.93	36.00	Pass
11b	1Mbps	1	11	2462	18.83	30.00	0.88	19.71	36.00	Pass
11g	6Mbps	1	1	2412	25.03	30.00	0.88	25.91	36.00	Pass
11g	6Mbps	1	6	2437	25.04	30.00	0.88	25.92	36.00	Pass
11g	6Mbps	1	11	2462	25.06	30.00	0.88	25.94	36.00	Pass
HT20	MCS0	1	1	2412	23.34	30.00	0.88	24.22	36.00	Pass
HT20	MCS0	1	6	2437	23.19	30.00	0.88	24.07	36.00	Pass
HT20	MCS0	1	11	2462	23.34	30.00	0.88	24.22	36.00	Pass
HT40	MCS0	1	3	2422	20.51	30.00	0.88	21.39	36.00	Pass
HT40	MCS0	1	6	2437	20.32	30.00	0.88	21.20	36.00	Pass
HT40	MCS0	1	9	2452	20.12	30.00	0.88	21.00	36.00	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant1	Ant1	Ant1	Ant1	Ant1	
HE20	MCS0	1	1	2412	Full	23.44	30.00	0.88	24.32	36.00	Pass
HE20	MCS0	1	1	2412	26/0	22.89	30.00	0.88	23.77	36.00	Pass
HE20	MCS0	1	1	2412	52/37	19.52	30.00	0.88	20.40	36.00	Pass
HE20	MCS0	1	1	2412	106/53	20.97	30.00	0.88	21.85	36.00	Pass
HE20	MCS0	1	6	2437	Full	23.36	30.00	0.88	24.24	36.00	Pass
HE20	MCS0	1	6	2437	26/0	21.69	30.00	0.88	22.57	36.00	Pass
HE20	MCS0	1	6	2437	52/37	19.29	30.00	0.88	20.17	36.00	Pass
HE20	MCS0	1	6	2437	106/53	20.87	30.00	0.88	21.75	36.00	Pass
HE20	MCS0	1	11	2462	Full	23.55	30.00	0.88	24.43	36.00	Pass
HE20	MCS0	1	11	2462	26/8	21.67	30.00	0.88	22.55	36.00	Pass
HE20	MCS0	1	11	2462	52/40	20.54	30.00	0.88	21.42	36.00	Pass
HE20	MCS0	1	11	2462	106/54	20.85	30.00	0.88	21.73	36.00	Pass

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config.	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant1		
HE20	MCS0	1	1	2412	Full	13.83	9.96	0.50	Pass
HE20	MCS0	1	6	2437	Full	13.83	9.96	0.50	Pass
HE20	MCS0	1	11	2462	Full	13.83	9.95	0.50	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant1	Ant1	Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	0.09	16.61	30.00	0.88	17.49	36.00	Pass
11b	1Mbps	1	6	2437	0.09	16.73	30.00	0.88	17.61	36.00	Pass
11b	1Mbps	1	11	2462	0.09	16.46	30.00	0.88	17.34	36.00	Pass
11g	6Mbps	1	1	2412	0.07	15.91	30.00	0.88	16.79	36.00	Pass
11g	6Mbps	1	6	2437	0.07	15.78	30.00	0.88	16.66	36.00	Pass
11g	6Mbps	1	11	2462	0.07	15.89	30.00	0.88	16.77	36.00	Pass
HT20	MCS0	1	1	2412	0.19	14.60	30.00	0.88	15.48	36.00	Pass
HT20	MCS0	1	6	2437	0.19	14.53	30.00	0.88	15.41	36.00	Pass
HT20	MCS0	1	11	2462	0.19	14.70	30.00	0.88	15.58	36.00	Pass
HT40	MCS0	1	3	2422	0.30	11.34	30.00	0.88	12.22	36.00	Pass
HT40	MCS0	1	6	2437	0.30	11.21	30.00	0.88	12.09	36.00	Pass
HT40	MCS0	1	9	2452	0.30	11.21	30.00	0.88	12.09	36.00	Pass

TEST RESULTS DATA
Average Output Power

2.4GHz Band Single Antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Duty Factor (dB)		Average Conducted Power with duty factor (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
						Ant1	Ant7	Ant1	Ant1	Ant1	Ant1	Ant1	
HE20	MCS0	1	1	2412	Full	0.19	0.09	14.74	30.00	0.88	15.62	36.00	Pass
HE20	MCS0	1	1	2412	26/0	0.04	0.36	7.67	30.00	0.88	8.55	36.00	Pass
HE20	MCS0	1	1	2412	52/37	0.04	0.32	6.05	30.00	0.88	6.93	36.00	Pass
HE20	MCS0	1	1	2412	106/53	0.06	0.27	10.02	30.00	0.88	10.90	36.00	Pass
HE20	MCS0	1	6	2437	Full	0.19	0.09	14.67	30.00	0.88	15.55	36.00	Pass
HE20	MCS0	1	6	2437	26/0	0.04	0.36	6.45	30.00	0.88	7.33	36.00	Pass
HE20	MCS0	1	6	2437	52/37	0.04	0.32	5.83	30.00	0.88	6.71	36.00	Pass
HE20	MCS0	1	6	2437	106/53	0.06	0.27	9.97	30.00	0.88	10.85	36.00	Pass
HE20	MCS0	1	11	2462	Full	0.19	0.09	14.85	30.00	0.88	15.73	36.00	Pass
HE20	MCS0	1	11	2462	26/8	0.04	0.36	6.32	30.00	0.88	7.20	36.00	Pass
HE20	MCS0	1	11	2462	52/40	0.04	0.32	6.96	30.00	0.88	7.84	36.00	Pass
HE20	MCS0	1	11	2462	106/54	0.06	0.27	9.83	30.00	0.88	10.71	36.00	Pass

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant1	Ant1	Ant1	
11b	1Mbps	1	1	2412	-6.72	0.88	8.00	Pass
11b	1Mbps	1	6	2437	-6.81	0.88	8.00	Pass
11b	1Mbps	1	11	2462	-6.63	0.88	8.00	Pass
11g	6Mbps	1	1	2412	-8.57	0.88	8.00	Pass
11g	6Mbps	1	6	2437	-8.58	0.88	8.00	Pass
11g	6Mbps	1	11	2462	-8.29	0.88	8.00	Pass
HT40	MCS0	1	3	2422	-10.73	0.88	8.00	Pass
HT40	MCS0	1	6	2437	-10.78	0.88	8.00	Pass
HT40	MCS0	1	9	2452	-10.96	0.88	8.00	Pass


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
						Ant1	Ant1	Ant1	
HE20	MCS0	1	1	2412	Full	-11.67	0.88	8.00	Pass
HE20	MCS0	1	1	2412	26/0	-11.68	0.88	8.00	Pass
HE20	MCS0	1	1	2412	52/37	-11.96	0.88	8.00	Pass
HE20	MCS0	1	1	2412	106/53	-11.90	0.88	8.00	Pass
HE20	MCS0	1	6	2437	Full	-11.74	0.88	8.00	Pass
HE20	MCS0	1	6	2437	26/0	-11.84	0.88	8.00	Pass
HE20	MCS0	1	6	2437	52/37	-12.30	0.88	8.00	Pass
HE20	MCS0	1	6	2437	106/53	-12.02	0.88	8.00	Pass
HE20	MCS0	1	11	2462	Full	-11.51	0.88	8.00	Pass
HE20	MCS0	1	11	2462	26/8	-11.64	0.88	8.00	Pass
HE20	MCS0	1	11	2462	52/40	-12.35	0.88	8.00	Pass
HE20	MCS0	1	11	2462	106/54	-11.96	0.88	8.00	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

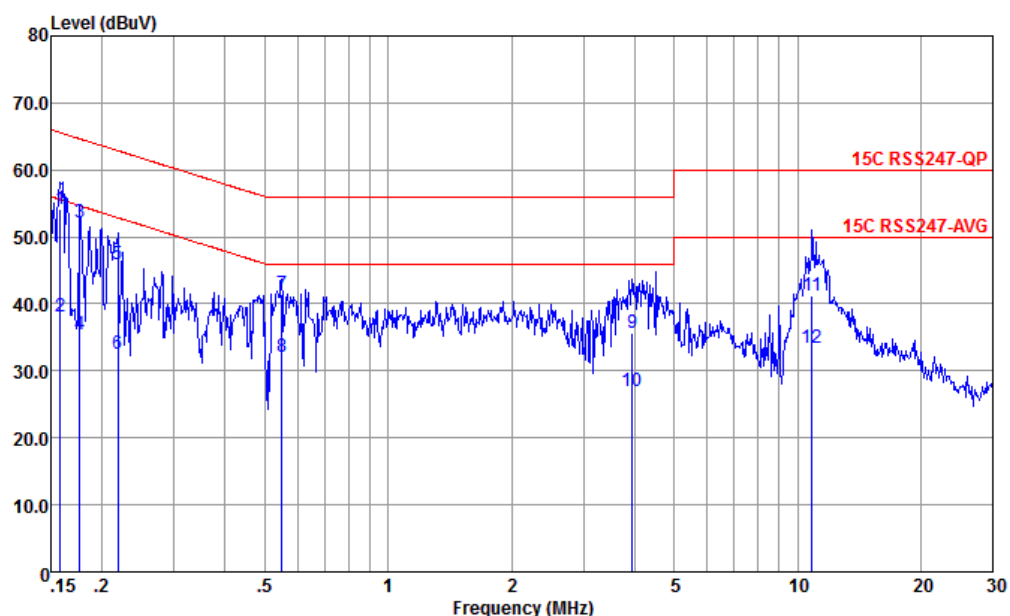


Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-L 2025 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.158	54.20	-11.36	65.56	34.20	9.55	10.45	QP
2	0.158	38.20	-17.36	55.56	18.20	9.55	10.45	Average
3	0.177	52.21	-12.43	64.64	32.20	9.55	10.46	QP
4	0.177	35.51	-19.13	54.64	15.50	9.55	10.46	Average
5	0.219	45.85	-17.03	62.88	25.81	9.58	10.46	QP
6	0.219	32.55	-20.33	52.88	12.51	9.58	10.46	Average
7	0.549	41.48	-14.52	56.00	21.50	9.59	10.39	QP
8	0.549	32.18	-13.82	46.00	12.20	9.59	10.39	Average
9	3.943	35.72	-20.28	56.00	15.90	9.61	10.21	QP
10	3.943	27.02	-18.98	46.00	7.20	9.61	10.21	Average
11	10.847	41.30	-18.70	60.00	21.21	9.85	10.24	QP
12	10.847	33.40	-16.60	50.00	13.31	9.85	10.24	Average



Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38 ~ 40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

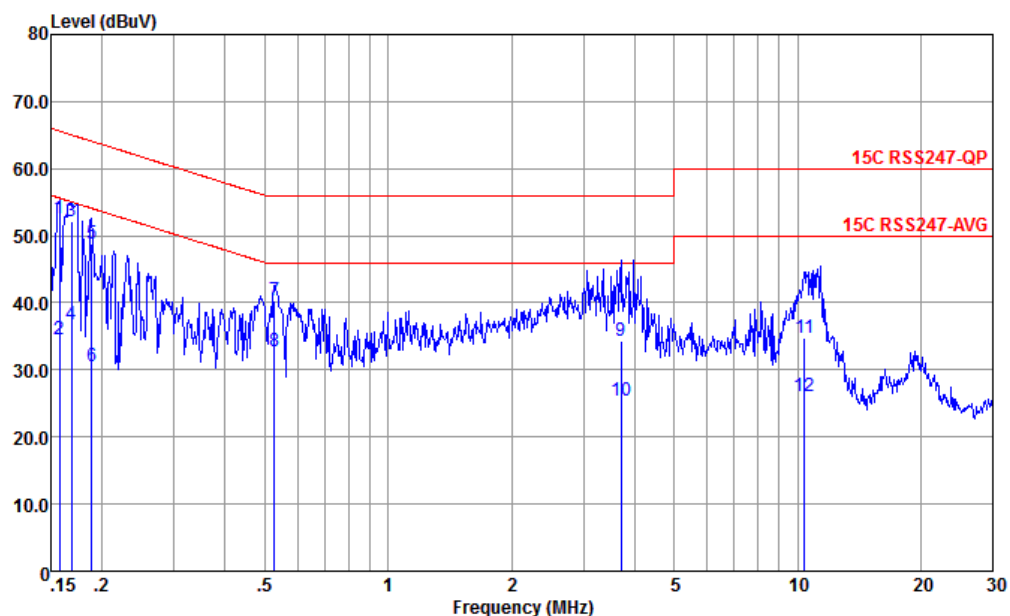

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.157	52.50	-13.10	65.60	32.50	9.55	10.45	QP
2	0.157	34.50	-21.10	55.60	14.50	9.55	10.45	Average
3 *	0.169	52.20	-12.83	65.03	32.21	9.54	10.45	QP
4	0.169	36.80	-18.23	55.03	16.81	9.54	10.45	Average
5	0.188	48.84	-15.27	64.11	28.80	9.58	10.46	QP
6	0.188	30.54	-23.57	54.11	10.50	9.58	10.46	Average
7	0.527	40.36	-15.64	56.00	20.20	9.76	10.40	QP
8	0.527	32.76	-13.24	46.00	12.60	9.76	10.40	Average
9	3.700	34.35	-21.65	56.00	14.51	9.63	10.21	QP
10	3.700	25.45	-20.55	46.00	5.61	9.63	10.21	Average
11	10.397	34.73	-25.27	60.00	14.80	9.69	10.24	QP
12	10.397	26.13	-23.87	50.00	6.20	9.69	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 7	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 8	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 9	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 10	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 11	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 12	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 13	2400-2483.5	1	802.11ax HE20	01	2412	MCS0	-	-
Mode 14	2400-2483.5	1	802.11ax HE20	06	2437	MCS0	-	-
Mode 15	2400-2483.5	1	802.11ax HE20	11	2462	MCS0	-	-
Mode 16	2400-2483.5	1	802.11n HT40	3	2422	MCS0	-	-
Mode 17	2400-2483.5	1	802.11n HT40	6	2437	MCS0	-	-
Mode 18	2400-2483.5	1	802.11n HT40	9	2452	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
7	802.11b	01	2389.95	43.93	54.00	-10.07	H	AVERAGE	Pass	Band Edge
7	802.11b	01	4824.00	46.60	54.00	-7.40	V	AVERAGE	Pass	Harmonic
8	802.11b	06	-	-	-	-	-	-	-	Band Edge
8	802.11b	06	4874.00	49.86	54.00	-4.14	H	AVERAGE	Pass	Harmonic
9	802.11b	11	2487.40	43.05	54.00	-10.95	H	AVERAGE	Pass	Band Edge
9	802.11b	11	4924.00	48.01	54.00	-5.99	H	AVERAGE	Pass	Harmonic
10	802.11g	01	2359.01	42.49	54.00	-11.51	H	AVERAGE	Pass	Band Edge
10	802.11g	01	6432.00	49.78	78.62	-28.84	V	Peak	Pass	Harmonic
11	802.11g	06	-	-	-	-	-	-	-	Band Edge
11	802.11g	06	4874.00	46.95	74.00	-27.05	H	PEAK	Pass	Harmonic
12	802.11g	11	2483.50	43.59	54.00	-10.41	H	AVERAGE	Pass	Band Edge
12	802.11g	11	4924.00	44.41	74.00	-29.59	H	PEAK	Pass	Harmonic
13	802.11ax HE20	01	2388.91	46.98	54.00	-7.02	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	01	6432.00	49.40	73.59	-24.19	V	PEAK	Pass	Harmonic
14	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	06	6498.00	51.18	74.33	-23.15	V	PEAK	Pass	Harmonic
15	802.11ax HE20	11	2485.54	47.18	54.00	-6.82	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	11	6565.00	49.91	72.54	-22.63	V	PEAK	Pass	Harmonic
16	802.11n HT40	3	2366.68	45.19	54.00	-8.81	H	AVERAGE	Pass	Band Edge
16	802.11n HT40	3	6459.00	50.64	72.90	-22.26	V	Peak	Pass	Harmonic
17	802.11n HT40	6	2369.54	45.80	54.00	-8.20	H	AVERAGE	Pass	Band Edge
17	802.11n HT40	6	6499.50	50.12	77.96	-27.84	V	Peak	Pass	Harmonic
18	802.11n HT40	9	2378.38	45.86	54.00	-8.14	H	AVERAGE	Pass	Band Edge
18	802.11n HT40	9	6538.50	49.36	76.44	-27.08	V	Peak	Pass	Harmonic

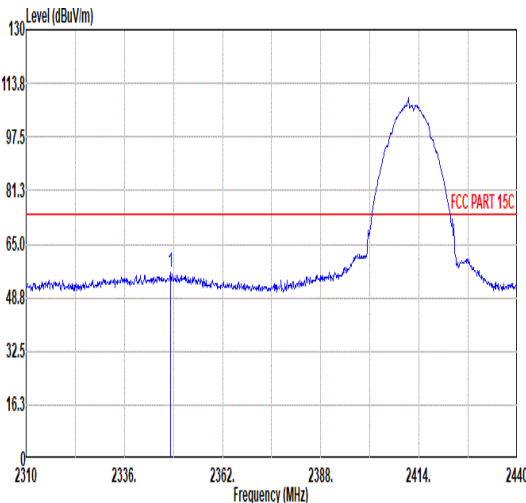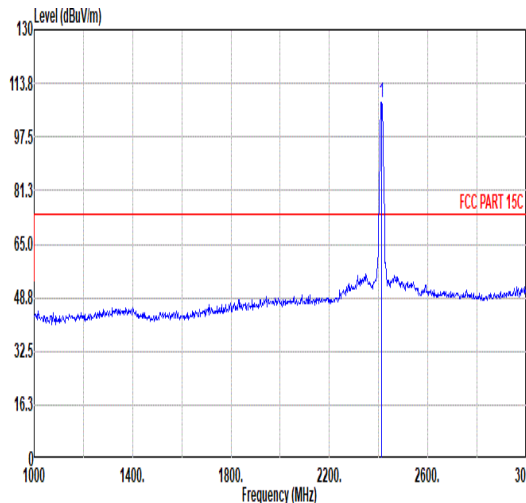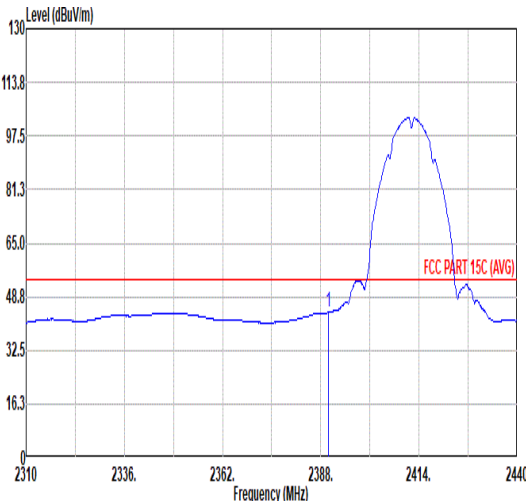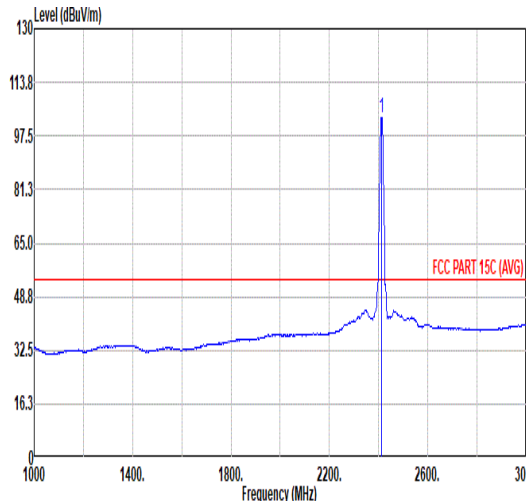

Mode	7																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2348.22</td><td>56.25</td><td>74.00</td><td>-17.75</td><td>48.20</td><td>31.60</td><td>7.10</td><td>36.65</td><td>6.00</td><td>100 103 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2348.22	56.25	74.00	-17.75	48.20	31.60	7.10	36.65	6.00	100 103 PEAK	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.93</td><td>-----</td><td>-----</td><td>99.26</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100 103 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.93	-----	-----	99.26	32.05	7.20	36.58	6.00	100 103 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2348.22	56.25	74.00	-17.75	48.20	31.60	7.10	36.65	6.00	100 103 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	107.93	-----	-----	99.26	32.05	7.20	36.58	6.00	100 103 PEAK																																																																																
Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>35.44</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>100 103 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.93	54.00	-10.07	35.44	31.92	7.16	36.59	6.00	100 103 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.21</td><td>-----</td><td>-----</td><td>94.54</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>100 103 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.21	-----	-----	94.54	32.05	7.20	36.58	6.00	100 103 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	43.93	54.00	-10.07	35.44	31.92	7.16	36.59	6.00	100 103 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	103.21	-----	-----	94.54	32.05	7.20	36.58	6.00	100 103 AVERAGE																																																																																

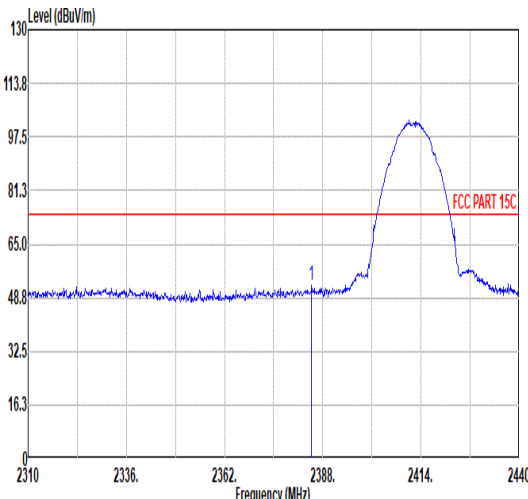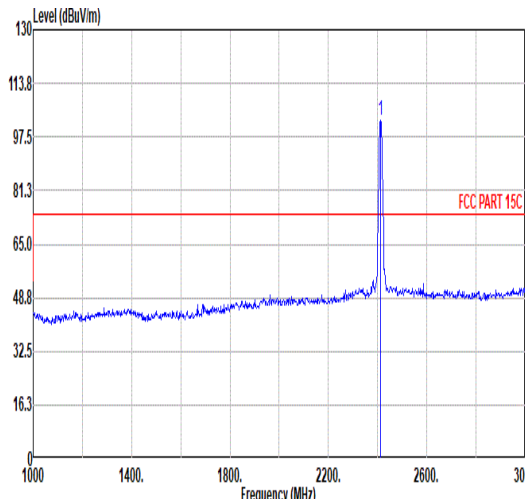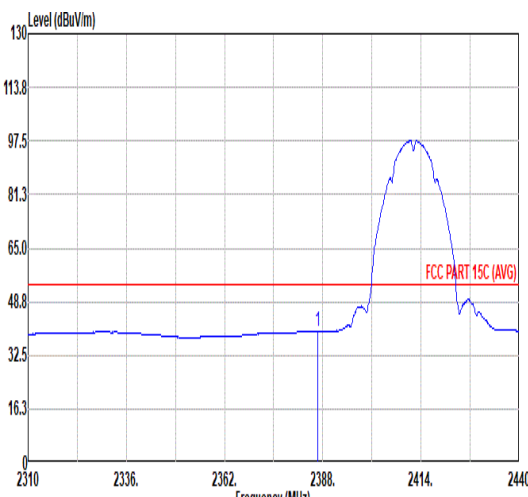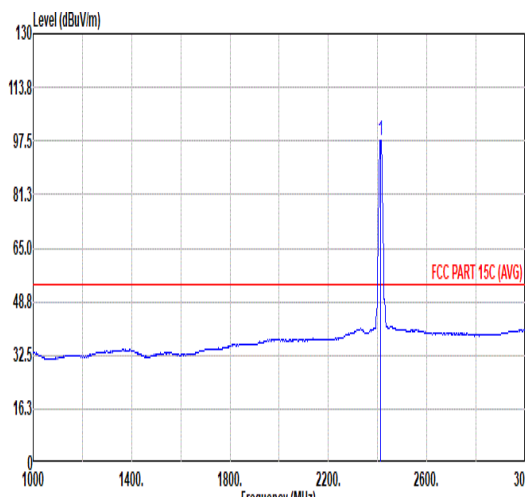



Mode	7																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.01</td><td>52.58</td><td>74.00</td><td>-21.42</td><td>44.14</td><td>31.88</td><td>7.16</td><td>36.60</td><td>6.00</td><td>306 136 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.01	52.58	74.00	-21.42	44.14	31.88	7.16	36.60	6.00	306 136 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.37</td><td>-----</td><td>93.70</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>306</td><td>136 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.37	-----	93.70	32.05	7.20	36.58	6.00	306	136 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2385.01	52.58	74.00	-21.42	44.14	31.88	7.16	36.60	6.00	306 136 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	102.37	-----	93.70	32.05	7.20	36.58	6.00	306	136 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>39.87</td><td>54.00</td><td>-14.13</td><td>31.42</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>306 136 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	39.87	54.00	-14.13	31.42	31.89	7.16	36.60	6.00	306 136 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.77</td><td>-----</td><td>89.10</td><td>32.05</td><td>7.20</td><td>36.58</td><td>6.00</td><td>306</td><td>136 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.77	-----	89.10	32.05	7.20	36.58	6.00	306	136 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2386.57	39.87	54.00	-14.13	31.42	31.89	7.16	36.60	6.00	306 136 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	97.77	-----	89.10	32.05	7.20	36.58	6.00	306	136 AVERAGE																																																																																									



Mode	7																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																					
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>68.75</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>264</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>65.67</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>100</td><td>264</td><td>AVERAGE</td></tr><tr><td>3</td><td>6432.00</td><td>53.61</td><td>88.74</td><td>-35.13</td><td>71.12</td><td>35.50</td><td>12.14</td><td>65.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	48.62	74.00	-25.38	68.75	33.80	10.29	64.22	0.00	100	264	PEAK	2	4824.00	45.54	54.00	-8.46	65.67	33.80	10.29	64.22	0.00	100	264	AVERAGE	3	6432.00	53.61	88.74	-35.13	71.12	35.50	12.14	65.15	0.00	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>49.77</td><td>74.00</td><td>-24.23</td><td>69.90</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>341</td><td>153</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>46.60</td><td>54.00</td><td>-7.40</td><td>66.73</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>341</td><td>153</td><td>AVERAGE</td></tr><tr><td>3</td><td>6432.00</td><td>50.11</td><td>81.06</td><td>-30.95</td><td>67.62</td><td>35.50</td><td>12.14</td><td>65.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	49.77	74.00	-24.23	69.90	33.80	10.29	64.22	0.00	341	153	PEAK	2	4824.00	46.60	54.00	-7.40	66.73	33.80	10.29	64.22	0.00	341	153	AVERAGE	3	6432.00	50.11	81.06	-30.95	67.62	35.50	12.14	65.15	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																		
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4824.00	48.62	74.00	-25.38	68.75	33.80	10.29	64.22	0.00	100	264	PEAK																																																																																																																																																
2	4824.00	45.54	54.00	-8.46	65.67	33.80	10.29	64.22	0.00	100	264	AVERAGE																																																																																																																																																
3	6432.00	53.61	88.74	-35.13	71.12	35.50	12.14	65.15	0.00	---	---	Peak																																																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4824.00	49.77	74.00	-24.23	69.90	33.80	10.29	64.22	0.00	341	153	PEAK																																																																																																																																																
2	4824.00	46.60	54.00	-7.40	66.73	33.80	10.29	64.22	0.00	341	153	AVERAGE																																																																																																																																																
3	6432.00	50.11	81.06	-30.95	67.62	35.50	12.14	65.15	0.00	---	---	Peak																																																																																																																																																

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

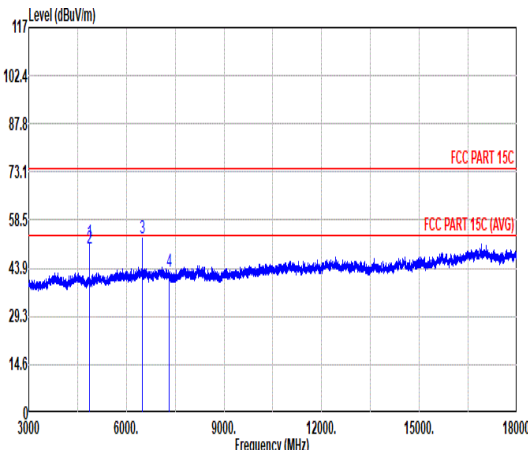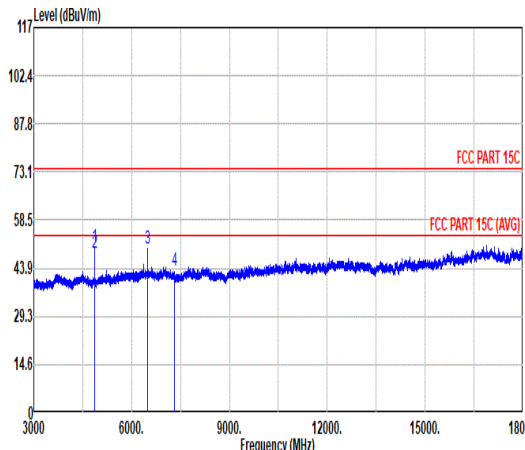

Mode	8																																																																																																																																																														
	Harmonic																																																																																																																																																														
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																														
ANT	1																																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																																								
Peak Avg																																																																																																																																																															
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>51.48</td><td>74.00</td><td>-22.52</td><td>71.56</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>126 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>49.86</td><td>54.00</td><td>-4.14</td><td>69.94</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>100</td><td>126 AVERAGE</td></tr><tr><td>3</td><td>6499.50</td><td>52.96</td><td>85.82</td><td>-32.86</td><td>70.50</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>60.64</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	51.48	74.00	-22.52	71.56	33.85	10.34	64.27	0.00	100	126 PEAK	2	4874.00	49.86	54.00	-4.14	69.94	33.85	10.34	64.27	0.00	100	126 AVERAGE	3	6499.50	52.96	85.82	-32.86	70.50	35.50	12.16	65.20	0.00	---	---	Peak	4	7311.00	42.90	74.00	-31.10	60.64	35.58	12.78	66.10	0.00	---	---	PEAK	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>50.28</td><td>74.00</td><td>-23.72</td><td>70.36</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>312</td><td>140 PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>48.37</td><td>54.00</td><td>-5.63</td><td>68.45</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>312</td><td>140 AVERAGE</td></tr><tr><td>3</td><td>6499.50</td><td>49.82</td><td>82.01</td><td>-32.19</td><td>67.36</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7311.00</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>61.05</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	50.28	74.00	-23.72	70.36	33.85	10.34	64.27	0.00	312	140 PEAK	2	4874.00	48.37	54.00	-5.63	68.45	33.85	10.34	64.27	0.00	312	140 AVERAGE	3	6499.50	49.82	82.01	-32.19	67.36	35.50	12.16	65.20	0.00	---	---	Peak	4	7311.00	43.31	74.00	-30.69	61.05	35.58	12.78	66.10	0.00	---	---
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																					
1	4874.00	51.48	74.00	-22.52	71.56	33.85	10.34	64.27	0.00	100	126 PEAK																																																																																																																																																				
2	4874.00	49.86	54.00	-4.14	69.94	33.85	10.34	64.27	0.00	100	126 AVERAGE																																																																																																																																																				
3	6499.50	52.96	85.82	-32.86	70.50	35.50	12.16	65.20	0.00	---	---	Peak																																																																																																																																																			
4	7311.00	42.90	74.00	-31.10	60.64	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																			
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																					
1	4874.00	50.28	74.00	-23.72	70.36	33.85	10.34	64.27	0.00	312	140 PEAK																																																																																																																																																				
2	4874.00	48.37	54.00	-5.63	68.45	33.85	10.34	64.27	0.00	312	140 AVERAGE																																																																																																																																																				
3	6499.50	49.82	82.01	-32.19	67.36	35.50	12.16	65.20	0.00	---	---	Peak																																																																																																																																																			
4	7311.00	43.31	74.00	-30.69	61.05	35.58	12.78	66.10	0.00	---	---	PEAK																																																																																																																																																			

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB





Mode	9																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.90</td><td>54.56</td><td>74.00</td><td>-19.44</td><td>45.53</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100 103 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.90	54.56	74.00	-19.44	45.53	32.27	7.33	36.57	6.00	100 103 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.92</td><td>-----</td><td>98.98</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>103 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.92	-----	98.98	32.22	7.29	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2485.90	54.56	74.00	-19.44	45.53	32.27	7.33	36.57	6.00	100 103 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	107.92	-----	98.98	32.22	7.29	36.57	6.00	100	103 PEAK																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.40</td><td>43.05</td><td>54.00</td><td>-10.95</td><td>34.01</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>100 103 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.40	43.05	54.00	-10.95	34.01	32.27	7.34	36.57	6.00	100 103 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.50</td><td>-----</td><td>94.54</td><td>32.23</td><td>7.30</td><td>36.57</td><td>6.00</td><td>100</td><td>103 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.50	-----	94.54	32.23	7.30	36.57	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2487.40	43.05	54.00	-10.95	34.01	32.27	7.34	36.57	6.00	100 103 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	103.50	-----	94.54	32.23	7.30	36.57	6.00	100	103 AVERAGE																																																																																							







Mode	9																																																										
	Band Edge																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																										
ANT	1																																																										
Pol.	Vertical						Fundamental																																																				
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.38</td><td>51.97</td><td>74.00</td><td>-22.03</td><td>42.93</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>305</td><td>133 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.38	51.97	74.00	-22.03	42.93	32.27	7.34	36.57	6.00	305
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2486.38	51.97	74.00	-22.03	42.93	32.27	7.34	36.57	6.00	305	133 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.46</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>30.85</td><td>32.27</td><td>7.34</td><td>36.57</td><td>6.00</td><td>305</td><td>133 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.46	39.89	54.00	-14.11	30.85	32.27	7.34	36.57	6.00	305
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2487.46	39.89	54.00	-14.11	30.85	32.27	7.34	36.57	6.00	305	133 AVERAGE																																																
Peak																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.86</td><td>-----</td><td>-----</td><td>93.92</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>305</td><td>133 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	102.86	-----	-----	93.92	32.22	7.29	36.57	6.00	305
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2462.00	102.86	-----	-----	93.92	32.22	7.29	36.57	6.00	305	133 PEAK																																																
Avg																																																											
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.01</td><td>-----</td><td>-----</td><td>89.07</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>305</td><td>133 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	98.01	-----	-----	89.07	32.22	7.29	36.57	6.00	305
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																
1	2462.00	98.01	-----	-----	89.07	32.22	7.29	36.57	6.00	305	133 AVERAGE																																																

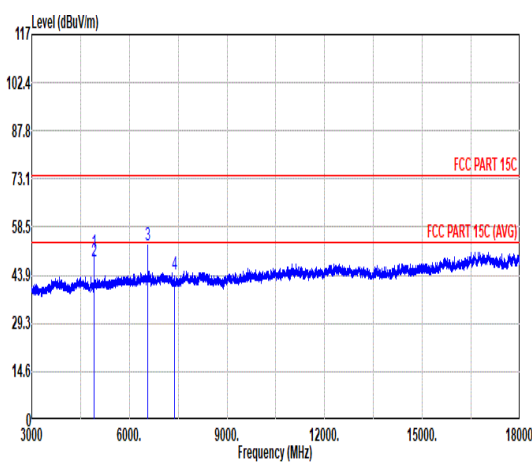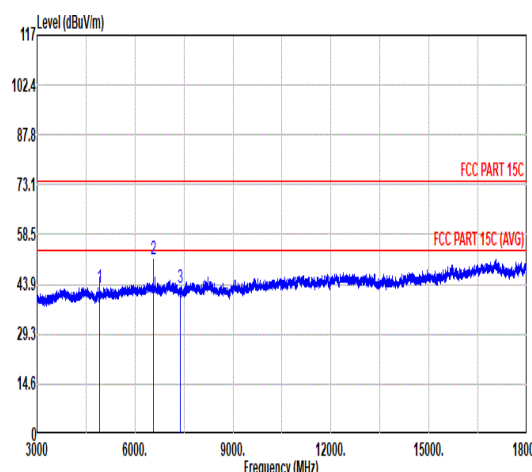





Mode	9																																																																																													
	Harmonic																																																																																													
	2400-2483.5_802.11b_CH11_2462MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>50.89</td><td>74.00</td><td>-23.11</td><td>70.89</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>221 PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>48.01</td><td>54.00</td><td>-5.99</td><td>68.01</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>100</td><td>221 AVERAGE</td></tr><tr><td>3</td><td>6565.50</td><td>53.10</td><td>85.99</td><td>-32.89</td><td>70.59</td><td>35.57</td><td>12.19</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>7386.00</td><td>44.04</td><td>74.00</td><td>-29.96</td><td>61.81</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	50.89	74.00	-23.11	70.89	33.90	10.40	64.30	0.00	100	221 PEAK	2	4924.00	48.01	54.00	-5.99	68.01	33.90	10.40	64.30	0.00	100	221 AVERAGE	3	6565.50	53.10	85.99	-32.89	70.59	35.57	12.19	65.25	0.00	---	---	Peak	4	7386.00	44.04	74.00	-29.96	61.81	35.57	12.88	66.22	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																					
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	4924.00	50.89	74.00	-23.11	70.89	33.90	10.40	64.30	0.00	100	221 PEAK																																																																																			
2	4924.00	48.01	54.00	-5.99	68.01	33.90	10.40	64.30	0.00	100	221 AVERAGE																																																																																			
3	6565.50	53.10	85.99	-32.89	70.59	35.57	12.19	65.25	0.00	---	---	Peak																																																																																		
4	7386.00	44.04	74.00	-29.96	61.81	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																		
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.80</td><td>74.00</td><td>-31.20</td><td>62.80</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>51.01</td><td>81.81</td><td>-30.80</td><td>68.50</td><td>35.57</td><td>12.19</td><td>65.25</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.66</td><td>74.00</td><td>-31.34</td><td>60.43</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.80	74.00	-31.20	62.80	33.90	10.40	64.30	0.00	---	---	PEAK	2	6565.50	51.01	81.81	-30.80	68.50	35.57	12.19	65.25	0.00	---	---	Peak	3	7386.00	42.66	74.00	-31.34	60.43	35.57	12.88	66.22	0.00	---	---	PEAK											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																			
1	4924.00	42.80	74.00	-31.20	62.80	33.90	10.40	64.30	0.00	---	---	PEAK																																																																																		
2	6565.50	51.01	81.81	-30.80	68.50	35.57	12.19	65.25	0.00	---	---	Peak																																																																																		
3	7386.00	42.66	74.00	-31.34	60.43	35.57	12.88	66.22	0.00	---	---	PEAK																																																																																		

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

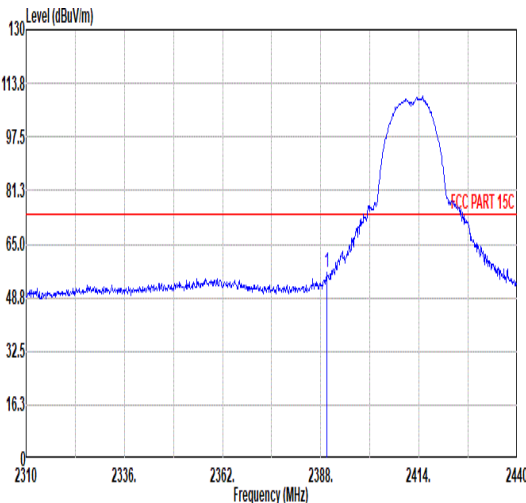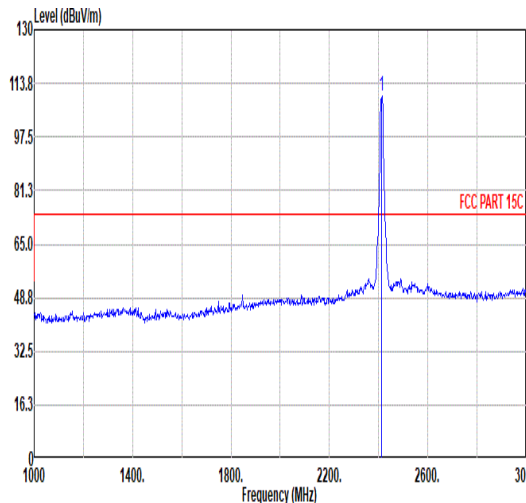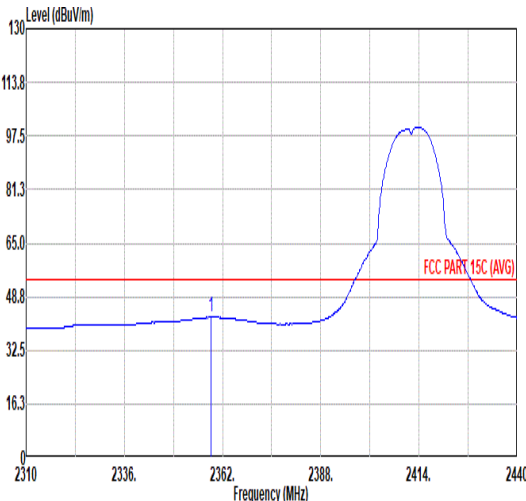
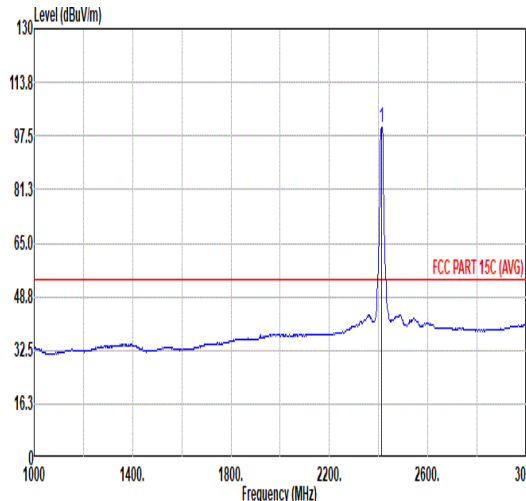


Mode	10																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>56.53</td><td>74.00</td><td>-17.47</td><td>48.04</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>127 113 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	56.53	74.00	-17.47	48.04	31.92	7.16	36.59	6.00	127 113 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.81</td><td>-----</td><td>-----</td><td>101.12</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>127 113 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.81	-----	-----	101.12	32.06	7.21	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.69	56.53	74.00	-17.47	48.04	31.92	7.16	36.59	6.00	127 113 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	109.81	-----	-----	101.12	32.06	7.21	36.58	6.00	127 113 PEAK																																																																																							
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2359.01</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>34.35</td><td>31.67</td><td>7.11</td><td>36.64</td><td>6.00</td><td>127 113 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2359.01	42.49	54.00	-11.51	34.35	31.67	7.11	36.64	6.00	127 113 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.19</td><td>-----</td><td>-----</td><td>91.50</td><td>32.06</td><td>7.21</td><td>36.58</td><td>6.00</td><td>127 113 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.19	-----	-----	91.50	32.06	7.21	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2359.01	42.49	54.00	-11.51	34.35	31.67	7.11	36.64	6.00	127 113 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	100.19	-----	-----	91.50	32.06	7.21	36.58	6.00	127 113 AVERAGE																																																																																							

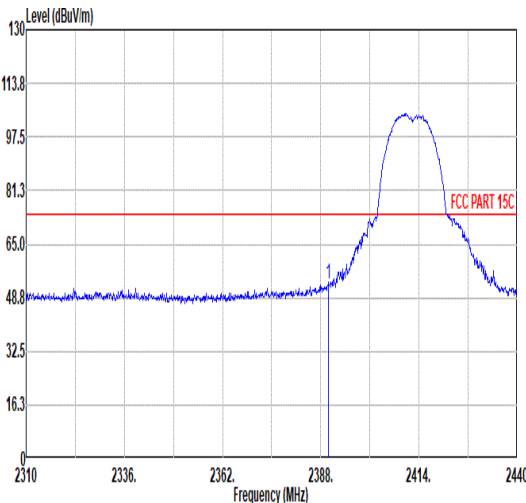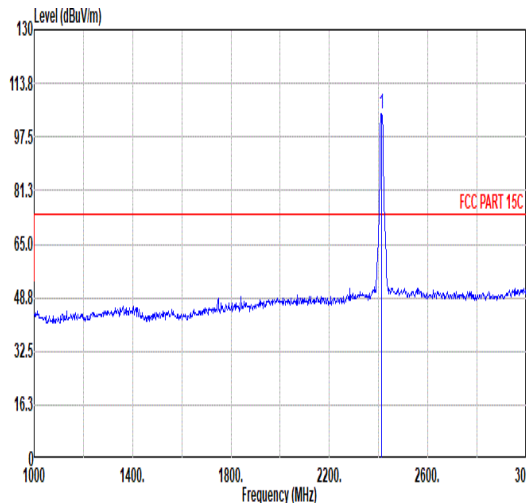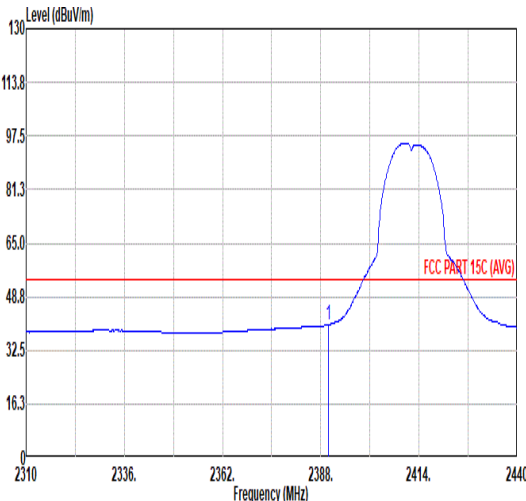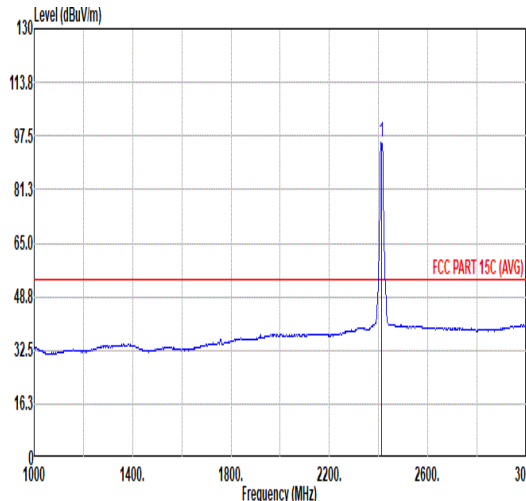

Mode	10																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical					Fundamental																																																																																											
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>53.00</td><td>74.00</td><td>-21.00</td><td>44.51</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>306 136 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	53.00	74.00	-21.00	44.51	31.92	7.16	36.59	6.00	306 136 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.62</td><td>-----</td><td>-----</td><td>95.96</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>306 136 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.62	-----	-----	95.96	32.04	7.20	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	53.00	74.00	-21.00	44.51	31.92	7.16	36.59	6.00	306 136 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	104.62	-----	-----	95.96	32.04	7.20	36.58	6.00	306 136 PEAK																																																																																							
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>40.25</td><td>54.00</td><td>-13.75</td><td>31.76</td><td>31.92</td><td>7.16</td><td>36.59</td><td>6.00</td><td>306 136 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	40.25	54.00	-13.75	31.76	31.92	7.16	36.59	6.00	306 136 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.45</td><td>-----</td><td>-----</td><td>86.79</td><td>32.04</td><td>7.20</td><td>36.58</td><td>6.00</td><td>306 136 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	95.45	-----	-----	86.79	32.04	7.20	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	40.25	54.00	-13.75	31.76	31.92	7.16	36.59	6.00	306 136 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	95.45	-----	-----	86.79	32.04	7.20	36.58	6.00	306 136 AVERAGE																																																																																							

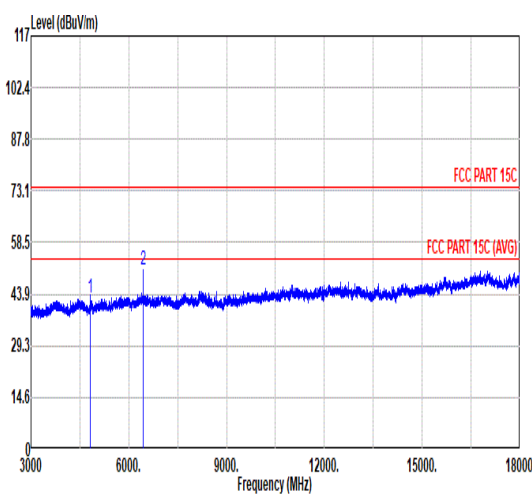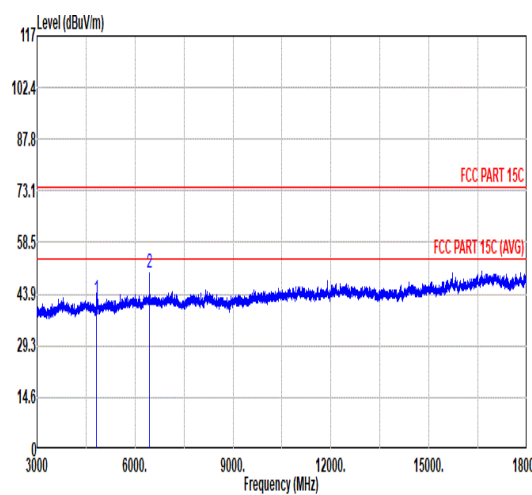

Mode	10																																																																							
	Harmonic																																																																							
	2400-2483.5_802.11g_CH01_2412MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal											Vertical																																																												
Peak Avg																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>63.17</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>50.99</td><td>86.32</td><td>-35.33</td><td>68.50</td><td>35.50</td><td>12.14</td><td>65.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	43.04	74.00	-30.96	63.17	33.80	10.29	64.22	0.00	---	---	PEAK	2	6432.00	50.99	86.32	-35.33	68.50	35.50	12.14	65.15	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	4824.00	43.04	74.00	-30.96	63.17	33.80	10.29	64.22	0.00	---	---	PEAK																																																												
2	6432.00	50.99	86.32	-35.33	68.50	35.50	12.14	65.15	0.00	---	---	Peak																																																												
																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.26</td><td>74.00</td><td>-31.74</td><td>62.39</td><td>33.80</td><td>10.29</td><td>64.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>49.78</td><td>78.62</td><td>-28.84</td><td>67.29</td><td>35.50</td><td>12.14</td><td>65.15</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	42.26	74.00	-31.74	62.39	33.80	10.29	64.22	0.00	---	---	PEAK	2	6432.00	49.78	78.62	-28.84	67.29	35.50	12.14	65.15	0.00	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																														
1	4824.00	42.26	74.00	-31.74	62.39	33.80	10.29	64.22	0.00	---	---	PEAK																																																												
2	6432.00	49.78	78.62	-28.84	67.29	35.50	12.14	65.15	0.00	---	---	Peak																																																												





Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB







		11																																																																																				
Mode		Harmonic																																																																																				
		2400-2483.5_802.11g_CH06_2437MHz																																																																																				
ANT		1																																																																																				
Pol.		Horizontal																																																																																				
Peak Avg																																																																																						
		<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>46.95</td><td>74.00</td><td>-27.05</td><td>67.03</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>51.30</td><td>85.20</td><td>-33.90</td><td>68.84</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>61.21</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	46.95	74.00	-27.05	67.03	33.85	10.34	64.27	0.00	---	---	PEAK	2	6499.50	51.30	85.20	-33.90	68.84	35.50	12.16	65.20	0.00	---	---	Peak	3	7311.00	43.47	74.00	-30.53	61.21	35.58	12.78	66.10	0.00	---	---	PEAK
				Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																												
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	4874.00	46.95	74.00	-27.05	67.03	33.85	10.34	64.27	0.00	---	---	PEAK																																																																										
2	6499.50	51.30	85.20	-33.90	68.84	35.50	12.16	65.20	0.00	---	---	Peak																																																																										
3	7311.00	43.47	74.00	-30.53	61.21	35.58	12.78	66.10	0.00	---	---	PEAK																																																																										
<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.59</td><td>74.00</td><td>-29.41</td><td>64.67</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>49.46</td><td>79.30</td><td>-29.84</td><td>67.00</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>60.64</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	44.59	74.00	-29.41	64.67	33.85	10.34	64.27	0.00	---	---	PEAK	2	6499.50	49.46	79.30	-29.84	67.00	35.50	12.16	65.20	0.00	---	---	Peak	3	7311.00	42.90	74.00	-31.10	60.64	35.58	12.78	66.10	0.00	---	---	PEAK		
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																												
1	4874.00	44.59	74.00	-29.41	64.67	33.85	10.34	64.27	0.00	---	---	PEAK																																																																										
2	6499.50	49.46	79.30	-29.84	67.00	35.50	12.16	65.20	0.00	---	---	Peak																																																																										
3	7311.00	42.90	74.00	-31.10	60.64	35.58	12.78	66.10	0.00	---	---	PEAK																																																																										
		Vertical																																																																																				

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

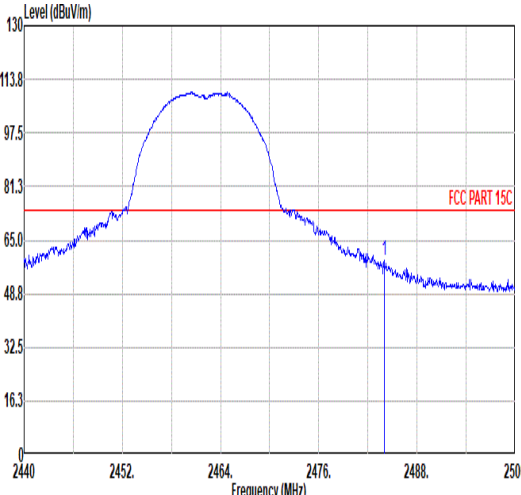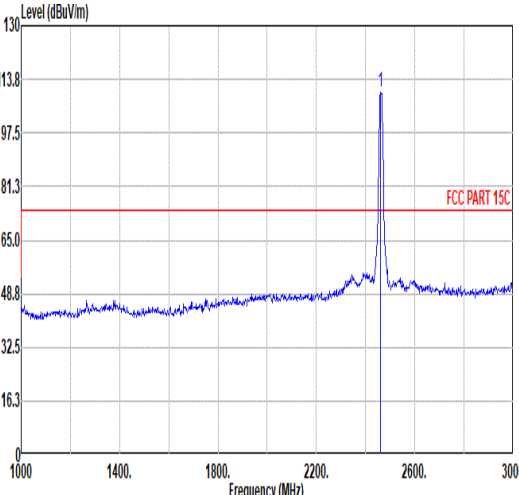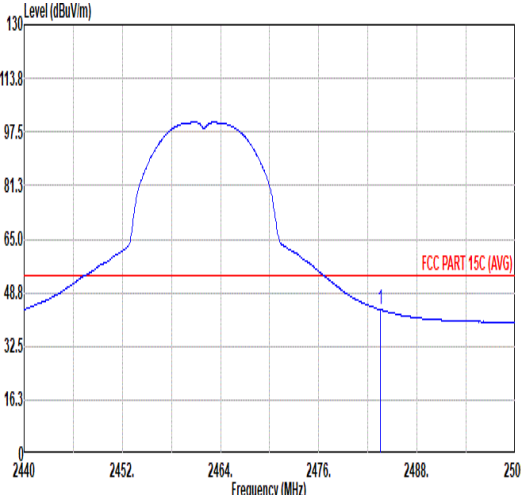
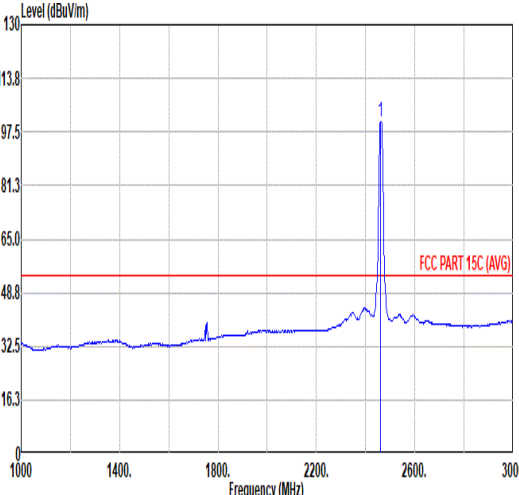


Mode	12																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.98</td><td>58.74</td><td>74.00</td><td>-15.26</td><td>49.71</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>109 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.98	58.74	74.00	-15.26	49.71	32.27	7.33	36.57	6.00	100	109 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>109.66</td><td>-----</td><td>-----</td><td>100.72</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>109 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	109.66	-----	-----	100.72	32.22	7.29	36.57	6.00	100	109 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.98	58.74	74.00	-15.26	49.71	32.27	7.33	36.57	6.00	100	109 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	109.66	-----	-----	100.72	32.22	7.29	36.57	6.00	100	109 PEAK																																																																																											
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>34.56</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>100</td><td>109 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.59	54.00	-10.41	34.56	32.27	7.33	36.57	6.00	100	109 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.60</td><td>-----</td><td>-----</td><td>91.66</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>100</td><td>109 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.60	-----	-----	91.66	32.22	7.29	36.57	6.00	100	109 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.50	43.59	54.00	-10.41	34.56	32.27	7.33	36.57	6.00	100	109 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	100.60	-----	-----	91.66	32.22	7.29	36.57	6.00	100	109 AVERAGE																																																																																											

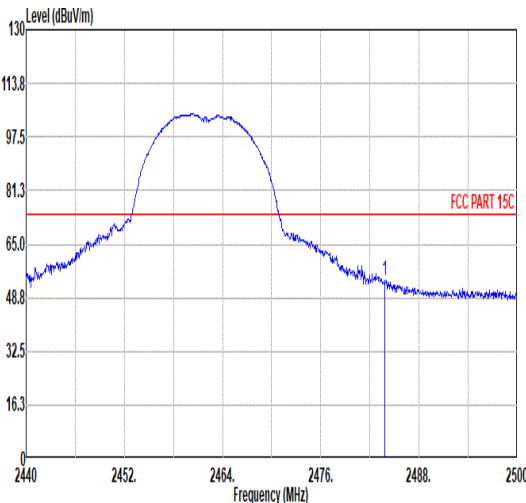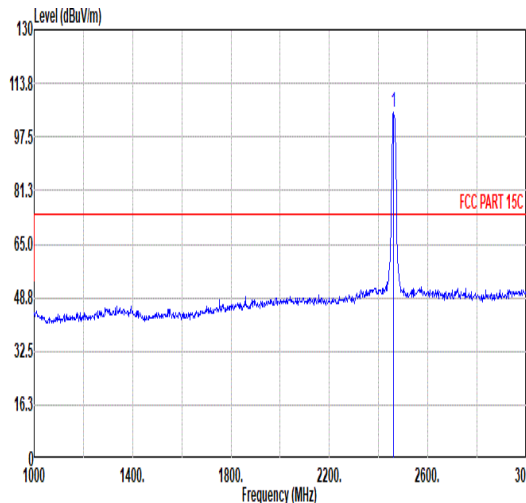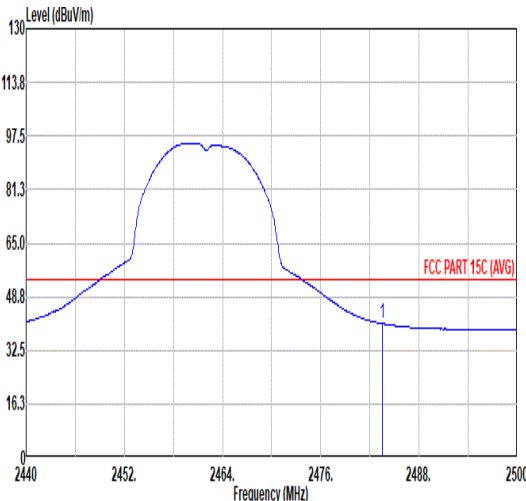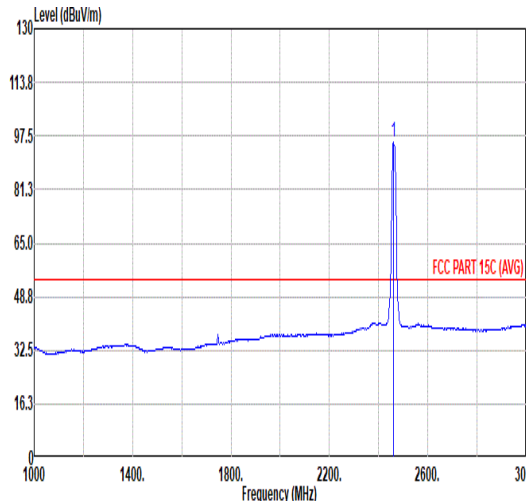





Mode	12																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>53.90</td><td>74.00</td><td>-20.10</td><td>44.87</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>305</td><td>142</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	53.90	74.00	-20.10	44.87	32.27	7.33	36.57	6.00	305	142	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.75</td><td>-----</td><td>-----</td><td>95.81</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>305</td><td>142</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.75	-----	-----	95.81	32.22	7.29	36.57	6.00	305	142
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.86	53.90	74.00	-20.10	44.87	32.27	7.33	36.57	6.00	305	142	PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	104.75	-----	-----	95.81	32.22	7.29	36.57	6.00	305	142	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>40.62</td><td>54.00</td><td>-13.38</td><td>31.59</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>305</td><td>142</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	40.62	54.00	-13.38	31.59	32.27	7.33	36.57	6.00	305	142	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.52</td><td>-----</td><td>-----</td><td>86.58</td><td>32.22</td><td>7.29</td><td>36.57</td><td>6.00</td><td>305</td><td>142</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.52	-----	-----	86.58	32.22	7.29	36.57	6.00	305	142
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	40.62	54.00	-13.38	31.59	32.27	7.33	36.57	6.00	305	142	AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	95.52	-----	-----	86.58	32.22	7.29	36.57	6.00	305	142	AVERAGE																																																																																							

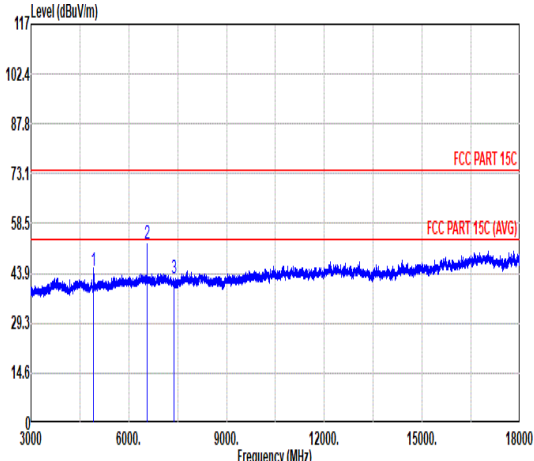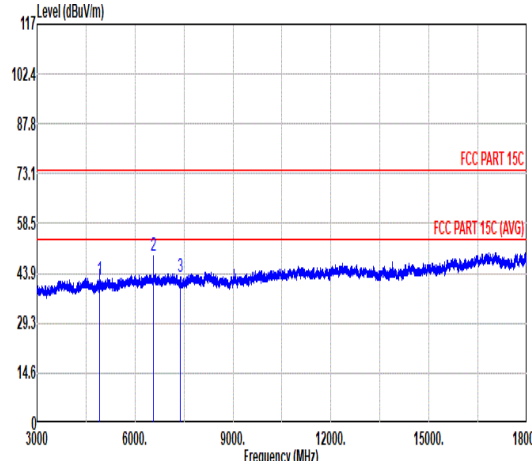





Mode	12																																																																																																																																																												
	Harmonic																																																																																																																																																												
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																												
ANT	1																																																																																																																																																												
Pol.	Horizontal										Vertical																																																																																																																																																		
Peak Avg																																																																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>44.41</td><td>74.00</td><td>-29.59</td><td>64.41</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>52.48</td><td>83.65</td><td>-31.17</td><td>69.97</td><td>35.57</td><td>12.19</td><td>65.25</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.36</td><td>74.00</td><td>-31.64</td><td>60.13</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	44.41	74.00	-29.59	64.41	33.90	10.40	64.30	0.00	---	--- PEAK	2	6565.50	52.48	83.65	-31.17	69.97	35.57	12.19	65.25	0.00	---	--- Peak	3	7386.00	42.36	74.00	-31.64	60.13	35.57	12.88	66.22	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.10</td><td>74.00</td><td>-31.90</td><td>62.10</td><td>33.90</td><td>10.40</td><td>64.30</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>49.09</td><td>81.39</td><td>-32.30</td><td>66.58</td><td>35.57</td><td>12.19</td><td>65.25</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>60.66</td><td>35.57</td><td>12.88</td><td>66.22</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	42.10	74.00	-31.90	62.10	33.90	10.40	64.30	0.00	---	--- PEAK	2	6565.50	49.09	81.39	-32.30	66.58	35.57	12.19	65.25	0.00	---	--- Peak	3	7386.00	42.89	74.00	-31.11	60.66	35.57	12.88	66.22	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4924.00	44.41	74.00	-29.59	64.41	33.90	10.40	64.30	0.00	---	--- PEAK																																																																																																																																																		
2	6565.50	52.48	83.65	-31.17	69.97	35.57	12.19	65.25	0.00	---	--- Peak																																																																																																																																																		
3	7386.00	42.36	74.00	-31.64	60.13	35.57	12.88	66.22	0.00	---	--- PEAK																																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4924.00	42.10	74.00	-31.90	62.10	33.90	10.40	64.30	0.00	---	--- PEAK																																																																																																																																																		
2	6565.50	49.09	81.39	-32.30	66.58	35.57	12.19	65.25	0.00	---	--- Peak																																																																																																																																																		
3	7386.00	42.89	74.00	-31.11	60.66	35.57	12.88	66.22	0.00	---	--- PEAK																																																																																																																																																		

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

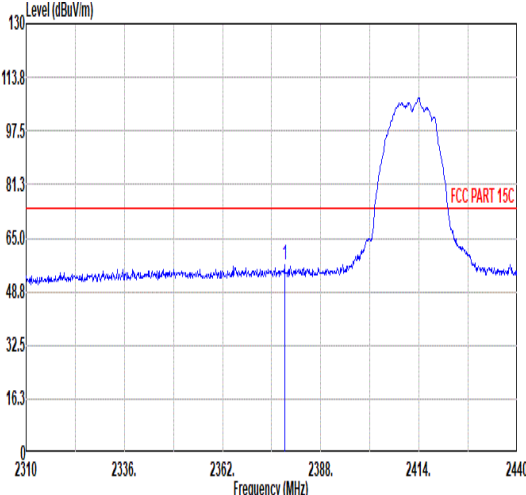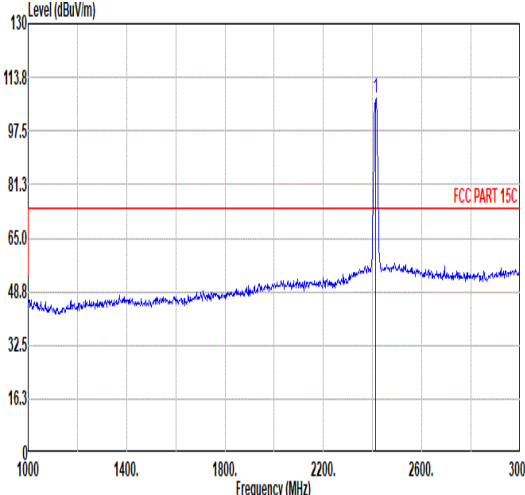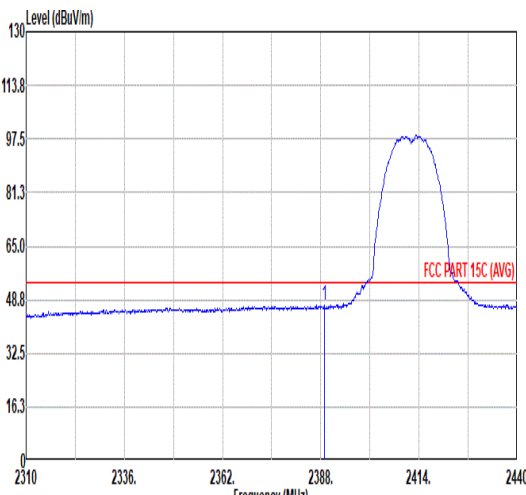
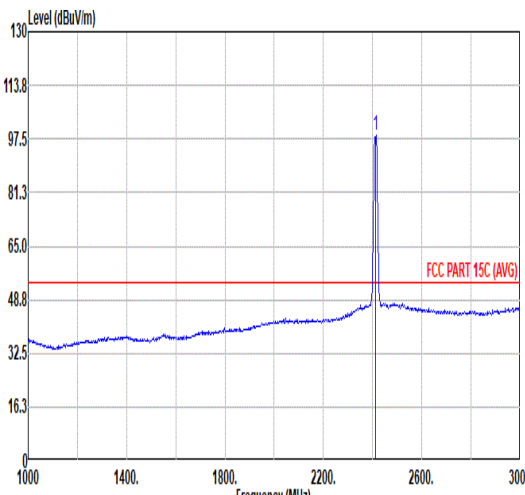


Mode	13																																																																																																																							
	Band Edge																																																																																																																							
	2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2378.38</td><td>57.10</td><td>74.00</td><td>-16.90</td><td>47.69</td><td>32.17</td><td>7.94</td><td>36.70</td><td>6.00</td><td>129</td><td>56 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2378.38	57.10	74.00	-16.90	47.69	32.17	7.94	36.70	6.00	129	56 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>107.68</td><td>-----</td><td>-----</td><td>97.92</td><td>32.47</td><td>8.00</td><td>36.71</td><td>6.00</td><td>129</td><td>56 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	107.68	-----	-----	97.92	32.47	8.00	36.71	6.00	129	56 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2378.38	57.10	74.00	-16.90	47.69	32.17	7.94	36.70	6.00	129	56 PEAK																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2412.00	107.68	-----	-----	97.92	32.47	8.00	36.71	6.00	129	56 PEAK																																																																																																													
Avg																																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2388.91</td><td>46.98</td><td>54.00</td><td>-7.02</td><td>37.50</td><td>32.23</td><td>7.96</td><td>36.71</td><td>6.00</td><td>129</td><td>56 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2388.91	46.98	54.00	-7.02	37.50	32.23	7.96	36.71	6.00	129	56 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>98.40</td><td>-----</td><td>-----</td><td>88.64</td><td>32.47</td><td>8.00</td><td>36.71</td><td>6.00</td><td>129</td><td>56 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	98.40	-----	-----	88.64	32.47	8.00	36.71	6.00	129	56 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2388.91	46.98	54.00	-7.02	37.50	32.23	7.96	36.71	6.00	129	56 AVERAGE																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																														
1	2412.00	98.40	-----	-----	88.64	32.47	8.00	36.71	6.00	129	56 AVERAGE																																																																																																													

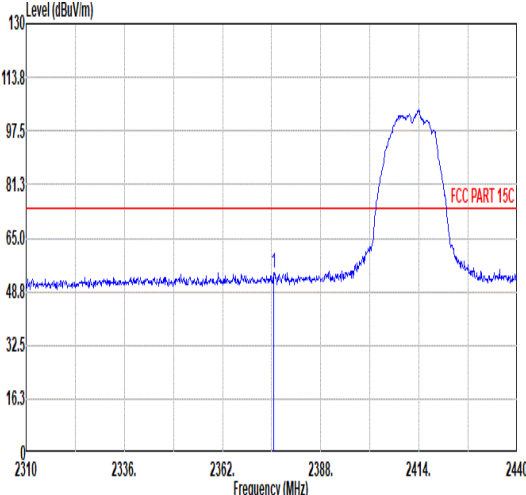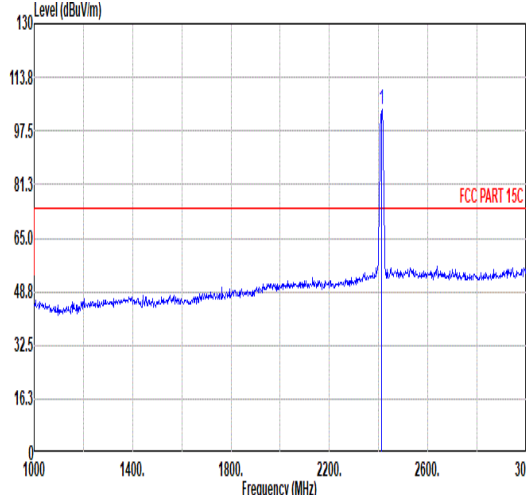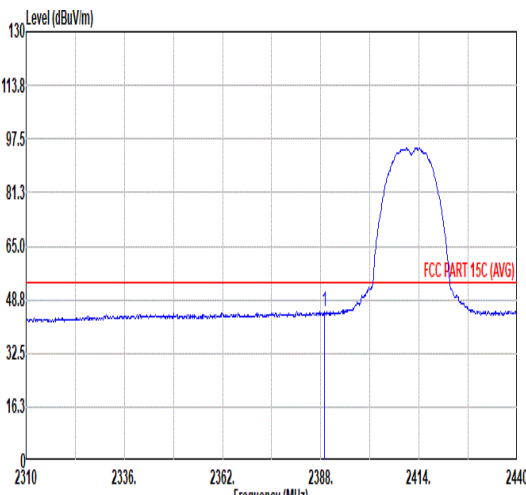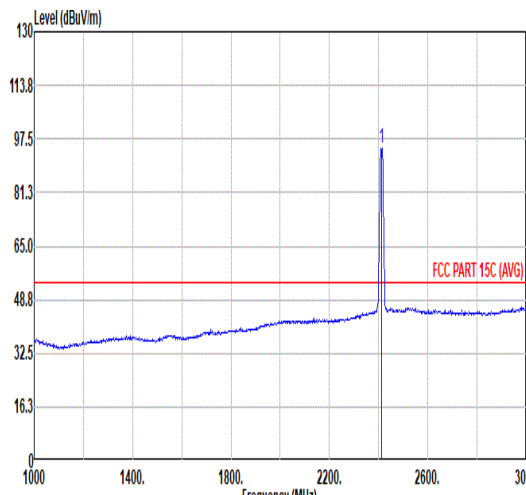



Mode	13																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.52</td><td>54.66</td><td>74.00</td><td>-19.34</td><td>45.27</td><td>32.15</td><td>7.94</td><td>36.70</td><td>6.00</td><td>344 91 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.52	54.66	74.00	-19.34	45.27	32.15	7.94	36.70	6.00	344 91 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>103.96</td><td>-----</td><td>-----</td><td>94.20</td><td>32.47</td><td>8.00</td><td>36.71</td><td>6.00</td><td>344 91 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.96	-----	-----	94.20	32.47	8.00	36.71	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2375.52	54.66	74.00	-19.34	45.27	32.15	7.94	36.70	6.00	344 91 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	103.96	-----	-----	94.20	32.47	8.00	36.71	6.00	344 91 PEAK																																																																																																			
Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>35.84</td><td>32.23</td><td>7.96</td><td>36.71</td><td>6.00</td><td>344 91 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	45.32	54.00	-8.68	35.84	32.23	7.96	36.71	6.00	344 91 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>94.79</td><td>-----</td><td>-----</td><td>85.03</td><td>32.47</td><td>8.00</td><td>36.71</td><td>6.00</td><td>344 91 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	94.79	-----	-----	85.03	32.47	8.00	36.71	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2388.91	45.32	54.00	-8.68	35.84	32.23	7.96	36.71	6.00	344 91 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2412.00	94.79	-----	-----	85.03	32.47	8.00	36.71	6.00	344 91 AVERAGE																																																																																																			

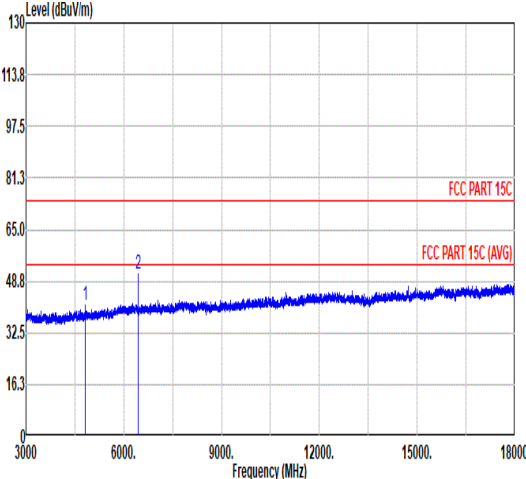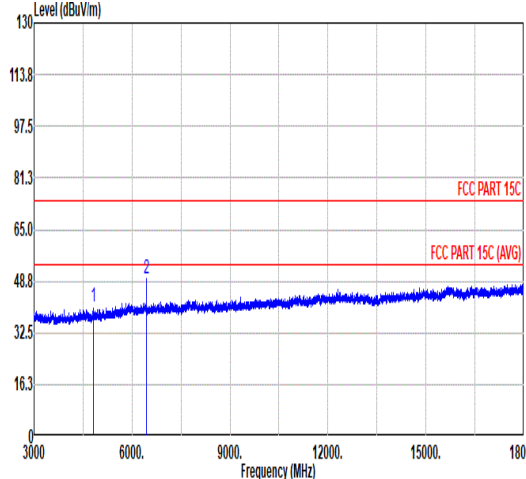

Mode	13																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11ax HE20_CH01_2412MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.21</td><td>74.00</td><td>-32.79</td><td>61.10</td><td>33.95</td><td>11.40</td><td>65.24</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>50.92</td><td>77.78</td><td>-26.86</td><td>67.91</td><td>35.54</td><td>13.21</td><td>65.74</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.21	74.00	-32.79	61.10	33.95	11.40	65.24	0.00	---	PEAK	2	6432.00	50.92	77.78	-26.86	67.91	35.54	13.21	65.74	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>60.48</td><td>33.95</td><td>11.40</td><td>65.24</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>49.40</td><td>73.59</td><td>-24.19</td><td>66.39</td><td>35.54</td><td>13.21</td><td>65.74</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	40.59	74.00	-33.41	60.48	33.95	11.40	65.24	0.00	---	PEAK	2	6432.00	49.40	73.59	-24.19	66.39	35.54	13.21	65.74	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4824.00	41.21	74.00	-32.79	61.10	33.95	11.40	65.24	0.00	---	PEAK																																																																																																																			
2	6432.00	50.92	77.78	-26.86	67.91	35.54	13.21	65.74	0.00	---	PEAK																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4824.00	40.59	74.00	-33.41	60.48	33.95	11.40	65.24	0.00	---	PEAK																																																																																																																			
2	6432.00	49.40	73.59	-24.19	66.39	35.54	13.21	65.74	0.00	---	PEAK																																																																																																																			





Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

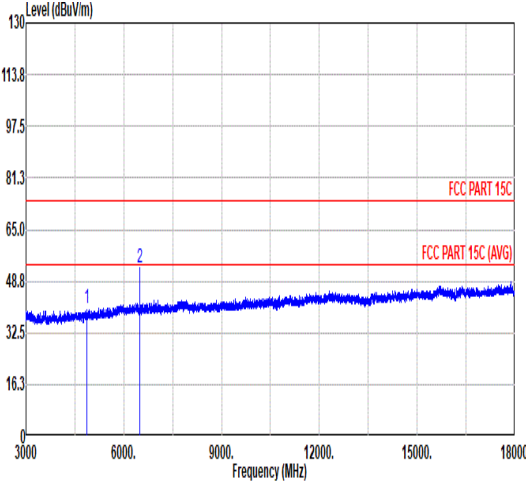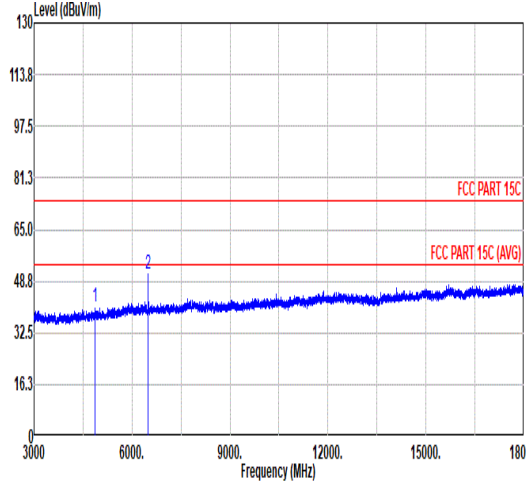

Mode	14																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11ax HE20_CH06_2437MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal						Vertical																																																													
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>60.26</td><td>33.90</td><td>11.47</td><td>65.28</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6498.00</td><td>52.90</td><td>78.73</td><td>-25.83</td><td>69.95</td><td>35.50</td><td>13.26</td><td>65.81</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.35	74.00	-33.65	60.26	33.90	11.47	65.28	0.00	---	PEAK	2	6498.00	52.90	78.73	-25.83	69.95	35.50	13.26	65.81	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4874.00	40.35	74.00	-33.65	60.26	33.90	11.47	65.28	0.00	---	PEAK																																																									
2	6498.00	52.90	78.73	-25.83	69.95	35.50	13.26	65.81	0.00	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.66</td><td>74.00</td><td>-33.34</td><td>60.57</td><td>33.90</td><td>11.47</td><td>65.28</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6498.00</td><td>51.18</td><td>74.33</td><td>-23.15</td><td>68.23</td><td>35.50</td><td>13.26</td><td>65.81</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.66	74.00	-33.34	60.57	33.90	11.47	65.28	0.00	---	PEAK	2	6498.00	51.18	74.33	-23.15	68.23	35.50	13.26	65.81	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4874.00	40.66	74.00	-33.34	60.57	33.90	11.47	65.28	0.00	---	PEAK																																																									
2	6498.00	51.18	74.33	-23.15	68.23	35.50	13.26	65.81	0.00	---	PEAK																																																									

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

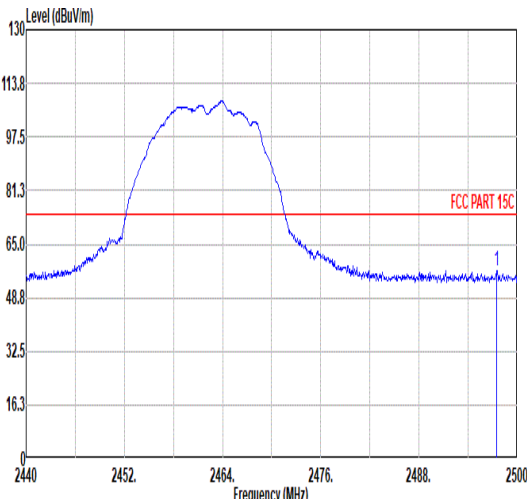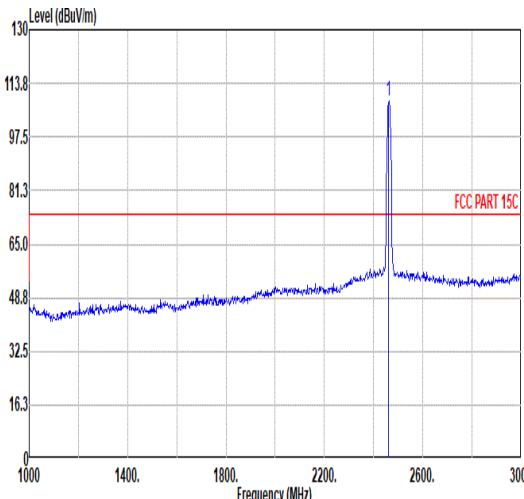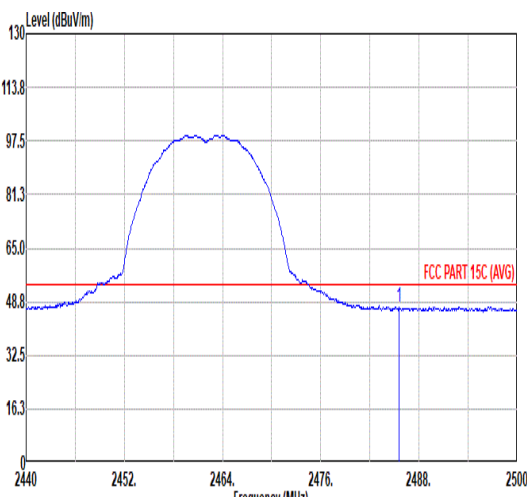
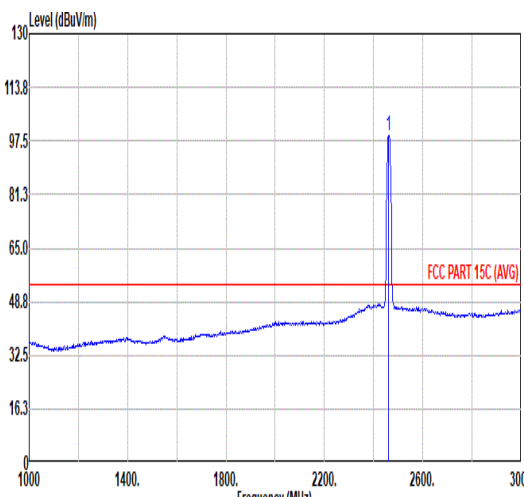


Mode	15																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.48</td><td>56.99</td><td>74.00</td><td>-17.01</td><td>47.17</td><td>32.43</td><td>8.12</td><td>36.73</td><td>6.00</td><td>156</td><td>27 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.48	56.99	74.00	-17.01	47.17	32.43	8.12	36.73	6.00	156	27 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.41</td><td>-----</td><td>-----</td><td>98.30</td><td>32.76</td><td>8.07</td><td>36.72</td><td>6.00</td><td>156</td><td>27 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.41	-----	-----	98.30	32.76	8.07	36.72	6.00	156	27 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2497.48	56.99	74.00	-17.01	47.17	32.43	8.12	36.73	6.00	156	27 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	108.41	-----	-----	98.30	32.76	8.07	36.72	6.00	156	27 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.54</td><td>47.18</td><td>54.00</td><td>-6.82</td><td>37.27</td><td>32.54</td><td>8.10</td><td>36.73</td><td>6.00</td><td>156</td><td>27 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.54	47.18	54.00	-6.82	37.27	32.54	8.10	36.73	6.00	156	27 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.29</td><td>-----</td><td>-----</td><td>89.18</td><td>32.76</td><td>8.07</td><td>36.72</td><td>6.00</td><td>156</td><td>27 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.29	-----	-----	89.18	32.76	8.07	36.72	6.00	156	27 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2485.54	47.18	54.00	-6.82	37.27	32.54	8.10	36.73	6.00	156	27 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	99.29	-----	-----	89.18	32.76	8.07	36.72	6.00	156	27 AVERAGE																																																																																										







Mode	15																																																						
	Band Edge																																																						
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.86</td><td>55.34</td><td>74.00</td><td>-18.66</td><td>45.41</td><td>32.56</td><td>8.10</td><td>36.73</td><td>6.00</td><td>300</td><td>37 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.86	55.34	74.00	-18.66	45.41	32.56	8.10	36.73	6.00	300	37 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 2483.86	55.34	74.00	-18.66	45.41	32.56	8.10	36.73	6.00	300	37 PEAK																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>99.87</td><td>-----</td><td>-----</td><td>89.76</td><td>32.76</td><td>8.07</td><td>36.72</td><td>6.00</td><td>300</td><td>37 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	99.87	-----	-----	89.76	32.76	8.07	36.72	6.00	300	37 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 2462.00	99.87	-----	-----	89.76	32.76	8.07	36.72	6.00	300	37 PEAK																																													
Avg																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.80</td><td>45.27</td><td>54.00</td><td>-8.73</td><td>35.34</td><td>32.56</td><td>8.10</td><td>36.73</td><td>6.00</td><td>300</td><td>37 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.80	45.27	54.00	-8.73	35.34	32.56	8.10	36.73	6.00	300	37 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 2483.80	45.27	54.00	-8.73	35.34	32.56	8.10	36.73	6.00	300	37 AVERAGE																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>90.93</td><td>-----</td><td>-----</td><td>80.78</td><td>32.80</td><td>8.07</td><td>36.72</td><td>6.00</td><td>300</td><td>37 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	90.93	-----	-----	80.78	32.80	8.07	36.72	6.00	300	37 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 2462.00	90.93	-----	-----	80.78	32.80	8.07	36.72	6.00	300	37 AVERAGE																																													

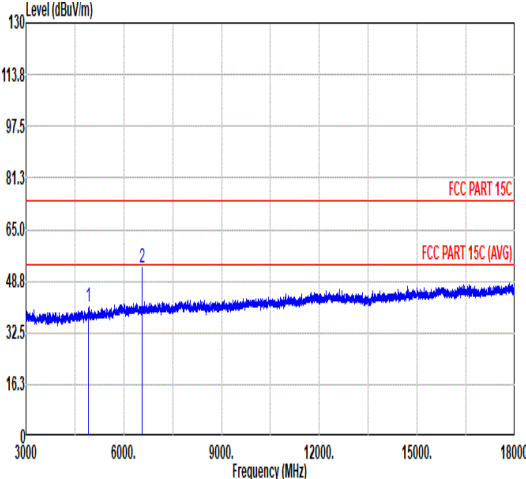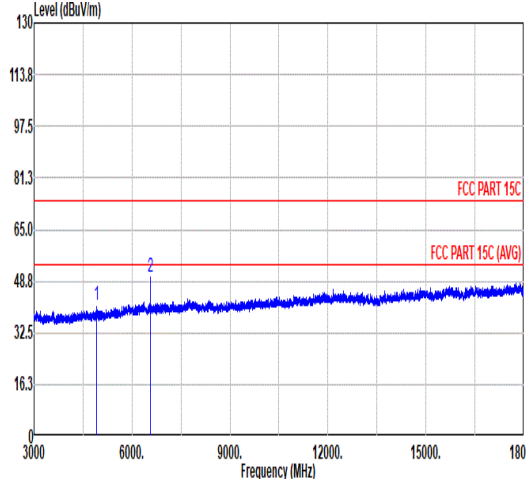

Mode	15																																																																																																																														
	Harmonic																																																																																																																														
	2400-2483.5_802.11ax HE20_CH11_2462MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>60.51</td><td>33.90</td><td>11.54</td><td>65.32</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6565.00</td><td>52.77</td><td>78.07</td><td>-25.30</td><td>69.70</td><td>35.53</td><td>13.31</td><td>65.77</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.63	74.00	-33.37	60.51	33.90	11.54	65.32	0.00	---	PEAK	2	6565.00	52.77	78.07	-25.30	69.70	35.53	13.31	65.77	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.23</td><td>74.00</td><td>-32.77</td><td>61.11</td><td>33.90</td><td>11.54</td><td>65.32</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6565.00</td><td>49.91</td><td>72.54</td><td>-22.63</td><td>66.84</td><td>35.53</td><td>13.31</td><td>65.77</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	41.23	74.00	-32.77	61.11	33.90	11.54	65.32	0.00	---	PEAK	2	6565.00	49.91	72.54	-22.63	66.84	35.53	13.31	65.77	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	4924.00	40.63	74.00	-33.37	60.51	33.90	11.54	65.32	0.00	---	PEAK																																																																																																																				
2	6565.00	52.77	78.07	-25.30	69.70	35.53	13.31	65.77	0.00	---	PEAK																																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																				
1	4924.00	41.23	74.00	-32.77	61.11	33.90	11.54	65.32	0.00	---	PEAK																																																																																																																				
2	6565.00	49.91	72.54	-22.63	66.84	35.53	13.31	65.77	0.00	---	PEAK																																																																																																																				

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

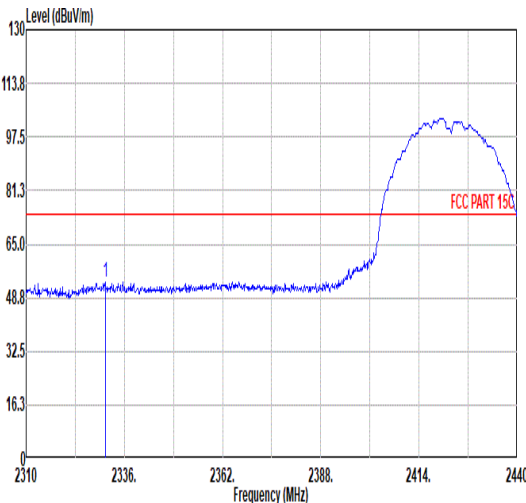
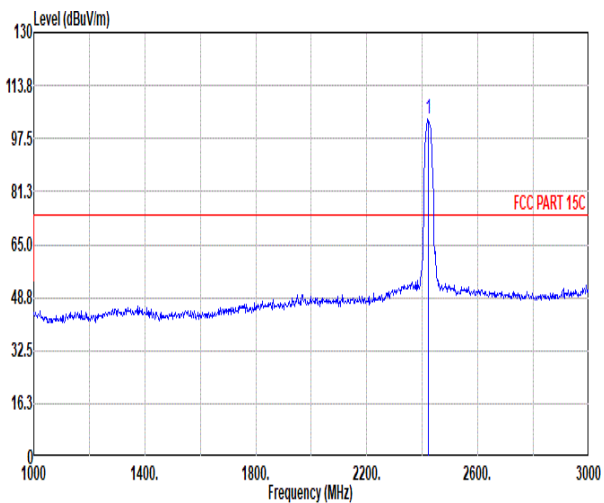
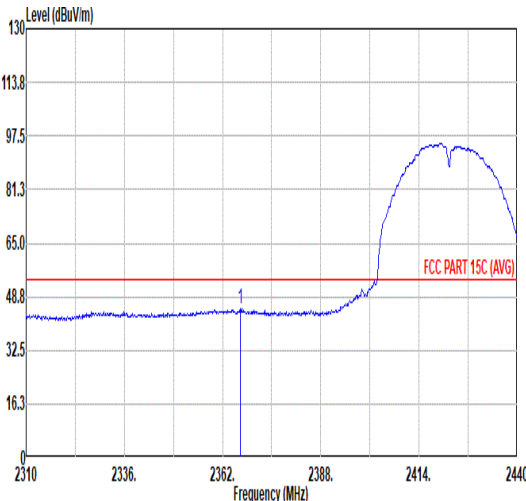
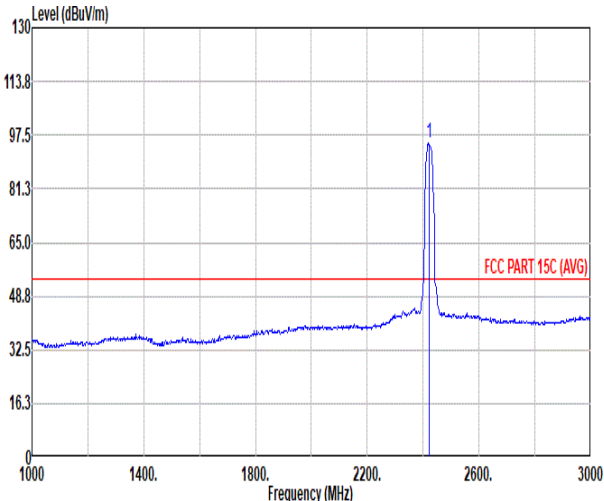


Mode	16																																																																																																																							
	Band Edge - L																																																																																																																							
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																																							
ANT	1																																																																																																																							
Pol.	Horizontal						Fundamental																																																																																																																	
Peak																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2330.93</td><td>53.66</td><td>74.00</td><td>-20.34</td><td>45.71</td><td>31.56</td><td>7.07</td><td>36.68</td><td>6.00</td><td>186</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>75 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2330.93	53.66	74.00	-20.34	45.71	31.56	7.07	36.68	6.00	186											75 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>103.53</td><td>-----</td><td>-----</td><td>94.81</td><td>32.08</td><td>7.22</td><td>36.58</td><td>6.00</td><td>186</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>75 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	103.53	-----	-----	94.81	32.08	7.22	36.58	6.00	186										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2330.93	53.66	74.00	-20.34	45.71	31.56	7.07	36.68	6.00	186																																																																																																														
										75 PEAK																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2422.00	103.53	-----	-----	94.81	32.08	7.22	36.58	6.00	186																																																																																																														
										75 PEAK																																																																																																														
Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2366.68</td><td>45.19</td><td>54.00</td><td>-8.81</td><td>36.96</td><td>31.73</td><td>7.13</td><td>36.63</td><td>6.00</td><td>186</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>75 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2366.68	45.19	54.00	-8.81	36.96	31.73	7.13	36.63	6.00	186											75 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>95.31</td><td>-----</td><td>-----</td><td>86.59</td><td>32.08</td><td>7.22</td><td>36.58</td><td>6.00</td><td>186</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>75 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	95.31	-----	-----	86.59	32.08	7.22	36.58	6.00	186										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2366.68	45.19	54.00	-8.81	36.96	31.73	7.13	36.63	6.00	186																																																																																																														
										75 AVERAGE																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	2422.00	95.31	-----	-----	86.59	32.08	7.22	36.58	6.00	186																																																																																																														
										75 AVERAGE																																																																																																														





Mode	16																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																							
ANT	1																																																							
Pol.	Horizontal										Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.38</td><td>52.47</td><td>74.00</td><td>-21.53</td><td>43.42</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>186</td><td>75 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.38	52.47	74.00	-21.53	43.42	32.28	7.34	36.57	6.00	186	75 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2489.38	52.47	74.00	-21.53	43.42	32.28	7.34	36.57	6.00	186	75 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.50</td><td>43.36</td><td>54.00</td><td>-10.64</td><td>34.30</td><td>32.28</td><td>7.35</td><td>36.57</td><td>6.00</td><td>186</td><td>75 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.50	43.36	54.00	-10.64	34.30	32.28	7.35	36.57	6.00	186	75 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2492.50	43.36	54.00	-10.64	34.30	32.28	7.35	36.57	6.00	186	75 AVERAGE																																													

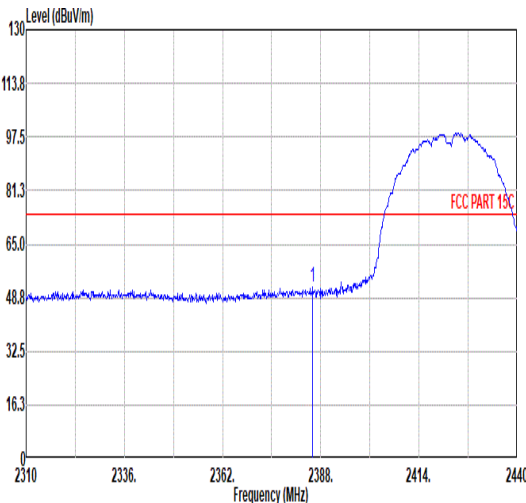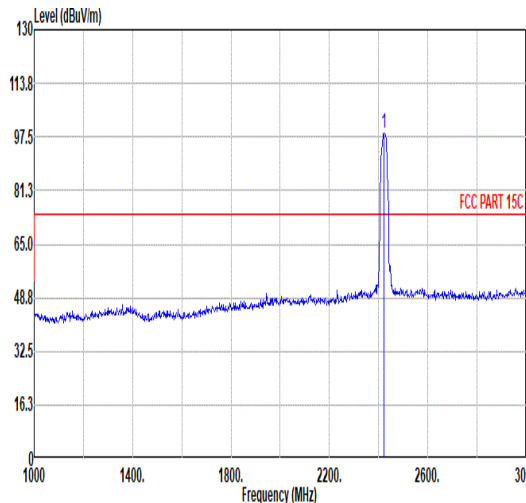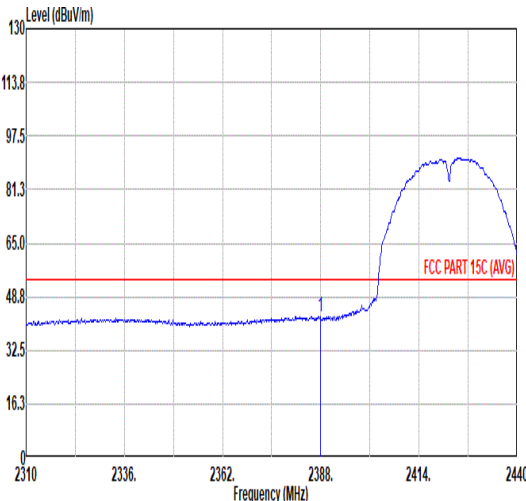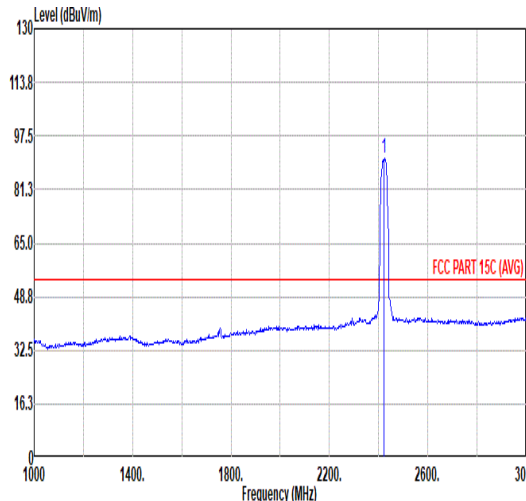

Mode	16																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.92</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>43.33</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>308 134 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2385.92	51.78	74.00	-22.22	43.33	31.89	7.16	36.60	6.00	308 134 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.78</td><td>-----</td><td>-----</td><td>90.04</td><td>32.10</td><td>7.22</td><td>36.58</td><td>6.00</td><td>308 134 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.78	-----	-----	90.04	32.10	7.22	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2385.92	51.78	74.00	-22.22	43.33	31.89	7.16	36.60	6.00	308 134 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	98.78	-----	-----	90.04	32.10	7.22	36.58	6.00	308 134 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.87</td><td>42.87</td><td>54.00</td><td>-11.13</td><td>34.41</td><td>31.90</td><td>7.16</td><td>36.60</td><td>6.00</td><td>308 134 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	42.87	54.00	-11.13	34.41	31.90	7.16	36.60	6.00	308 134 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>98.62</td><td>-----</td><td>-----</td><td>81.88</td><td>32.10</td><td>7.22</td><td>36.58</td><td>6.00</td><td>308 134 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	98.62	-----	-----	81.88	32.10	7.22	36.58	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2387.87	42.87	54.00	-11.13	34.41	31.90	7.16	36.60	6.00	308 134 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	98.62	-----	-----	81.88	32.10	7.22	36.58	6.00	308 134 AVERAGE																																																																																									

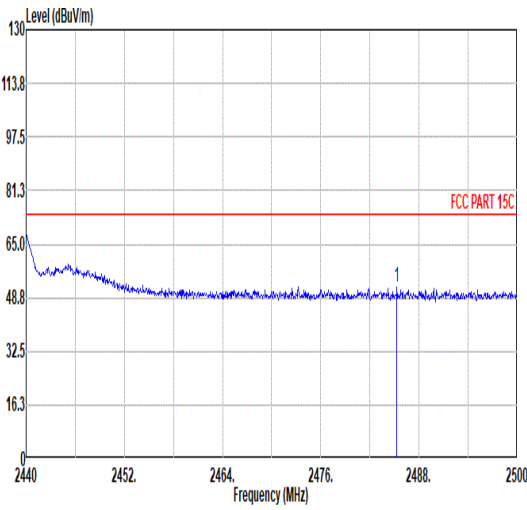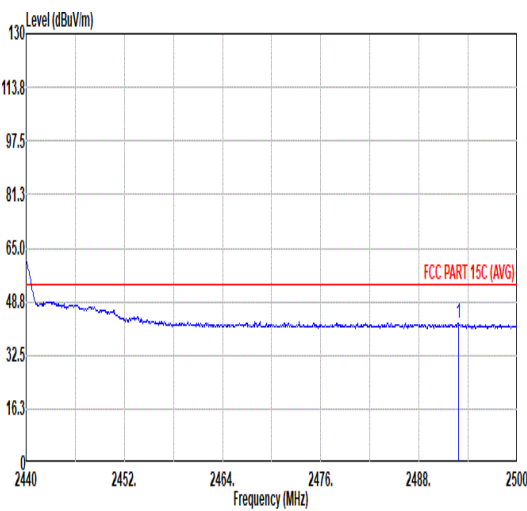





Mode	16																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																					
ANT	1																																																					
Pol.	Vertical					Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.30</td><td>51.93</td><td>74.00</td><td>-22.07</td><td>42.90</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>308 134 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.30	51.93	74.00	-22.07	42.90	32.27	7.33	36.57	6.00	308 134 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2485.30	51.93	74.00	-22.07	42.90	32.27	7.33	36.57	6.00	308 134 PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2492.00</td><td>42.22</td><td>54.00</td><td>-11.78</td><td>33.15</td><td>32.29</td><td>7.35</td><td>36.57</td><td>6.00</td><td>308 134 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2492.00	42.22	54.00	-11.78	33.15	32.29	7.35	36.57	6.00	308 134 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2492.00	42.22	54.00	-11.78	33.15	32.29	7.35	36.57	6.00	308 134 AVERAGE																																												



Mode	16																																																																																
	Harmonic																																																																																
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>61.75</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6459.00</td><td>50.74</td><td>80.52</td><td>-29.78</td><td>68.26</td><td>35.50</td><td>12.15</td><td>65.17</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7266.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>61.18</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.62	74.00	-32.38	61.75	33.80	10.31	64.24	0.00	---	PEAK	2	6459.00	50.74	80.52	-29.78	68.26	35.50	12.15	65.17	0.00	---	Peak	3	7266.00	43.46	74.00	-30.54	61.18	35.60	12.71	66.03	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4844.00	41.62	74.00	-32.38	61.75	33.80	10.31	64.24	0.00	---	PEAK																																																																						
2	6459.00	50.74	80.52	-29.78	68.26	35.50	12.15	65.17	0.00	---	Peak																																																																						
3	7266.00	43.46	74.00	-30.54	61.18	35.60	12.71	66.03	0.00	---	PEAK																																																																						
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>42.04</td><td>74.00</td><td>-31.96</td><td>62.17</td><td>33.80</td><td>10.31</td><td>64.24</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6459.00</td><td>50.64</td><td>72.90</td><td>-22.26</td><td>68.16</td><td>35.50</td><td>12.15</td><td>65.17</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7266.00</td><td>42.90</td><td>74.00</td><td>-31.10</td><td>60.62</td><td>35.60</td><td>12.71</td><td>66.03</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	42.04	74.00	-31.96	62.17	33.80	10.31	64.24	0.00	---	PEAK	2	6459.00	50.64	72.90	-22.26	68.16	35.50	12.15	65.17	0.00	---	Peak	3	7266.00	42.90	74.00	-31.10	60.62	35.60	12.71	66.03	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4844.00	42.04	74.00	-31.96	62.17	33.80	10.31	64.24	0.00	---	PEAK																																																																						
2	6459.00	50.64	72.90	-22.26	68.16	35.50	12.15	65.17	0.00	---	Peak																																																																						
3	7266.00	42.90	74.00	-31.10	60.62	35.60	12.71	66.03	0.00	---	PEAK																																																																						

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

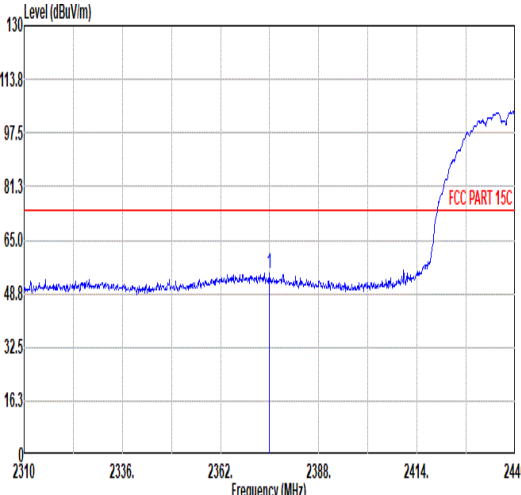
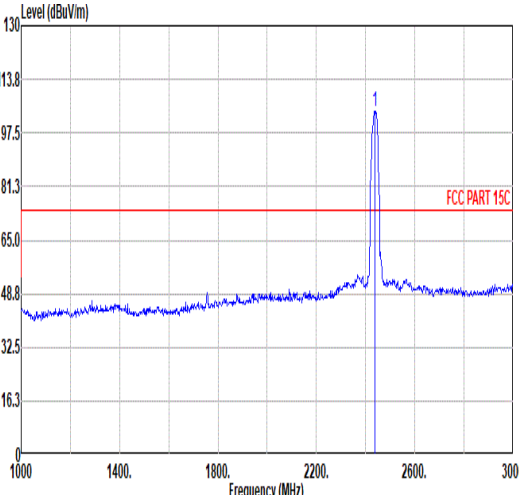
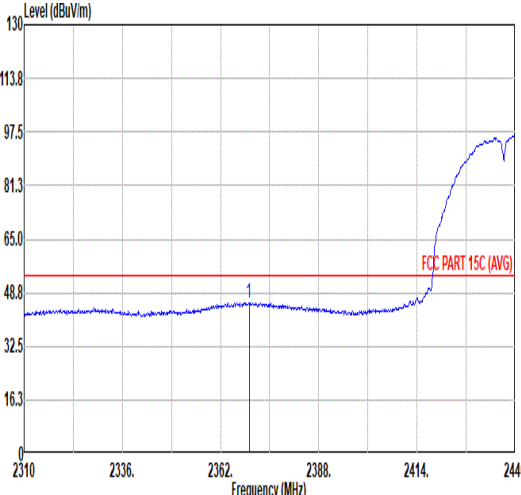
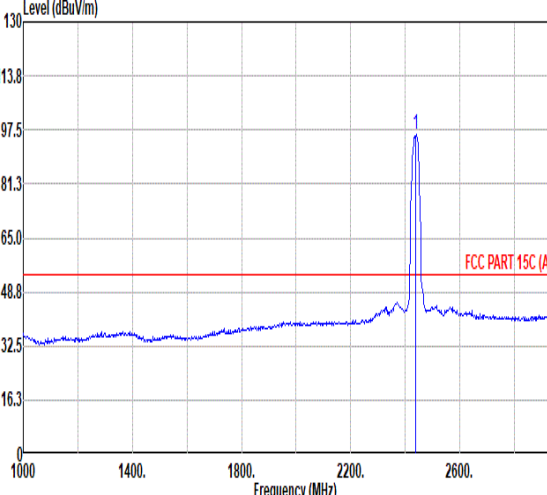


Mode	17																																																																																																																		
	Band Edge - L																																																																																																																		
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Horizontal						Fundamental																																																																																																												
Peak																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2375.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>46.86</td><td>31.80</td><td>7.14</td><td>36.62</td><td>6.00</td><td>110</td><td>121 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2375.00	55.18	74.00	-18.82	46.86	31.80	7.14	36.62	6.00	110	121 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>104.17</td><td>-----</td><td>-----</td><td>95.35</td><td>32.15</td><td>7.25</td><td>36.58</td><td>6.00</td><td>110</td><td>121 PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	104.17	-----	-----	95.35	32.15	7.25	36.58	6.00	110
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2375.00	55.18	74.00	-18.82	46.86	31.80	7.14	36.62	6.00	110	121 PEAK																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2437.00	104.17	-----	-----	95.35	32.15	7.25	36.58	6.00	110	121 PEAK																																																																																																								
Avg																																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2369.54</td><td>45.80</td><td>54.00</td><td>-8.20</td><td>37.53</td><td>31.76</td><td>7.13</td><td>36.62</td><td>6.00</td><td>110</td><td>121 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2369.54	45.80	54.00	-8.20	37.53	31.76	7.13	36.62	6.00	110	121 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>96.06</td><td>-----</td><td>-----</td><td>87.23</td><td>32.16</td><td>7.25</td><td>36.58</td><td>6.00</td><td>110</td><td>121 AVERAGE</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	96.06	-----	-----	87.23	32.16	7.25	36.58	6.00	110
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2369.54	45.80	54.00	-8.20	37.53	31.76	7.13	36.62	6.00	110	121 AVERAGE																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	2437.00	96.06	-----	-----	87.23	32.16	7.25	36.58	6.00	110	121 AVERAGE																																																																																																								



Mode	17																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																						
ANT	1																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.64</td><td>53.63</td><td>74.00</td><td>-20.37</td><td>44.54</td><td>32.30</td><td>7.36</td><td>36.57</td><td>6.00</td><td>110</td><td>121</td><td>PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2499.64	53.63	74.00	-20.37	44.54	32.30	7.36	36.57	6.00	110	121	PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2499.64	53.63	74.00	-20.37	44.54	32.30	7.36	36.57	6.00	110	121	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>35.83</td><td>32.30</td><td>7.36</td><td>36.57</td><td>6.00</td><td>110</td><td>121</td><td>AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2498.00	44.92	54.00	-9.08	35.83	32.30	7.36	36.57	6.00	110	121	AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2498.00	44.92	54.00	-9.08	35.83	32.30	7.36	36.57	6.00	110	121	AVERAGE																																											

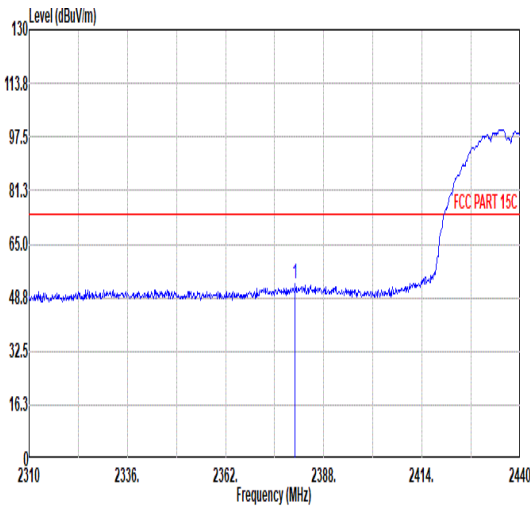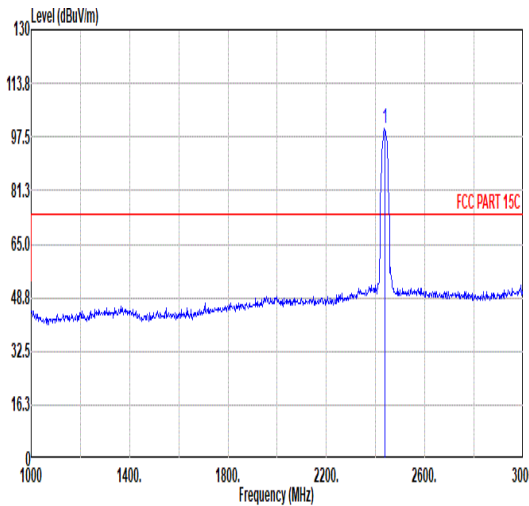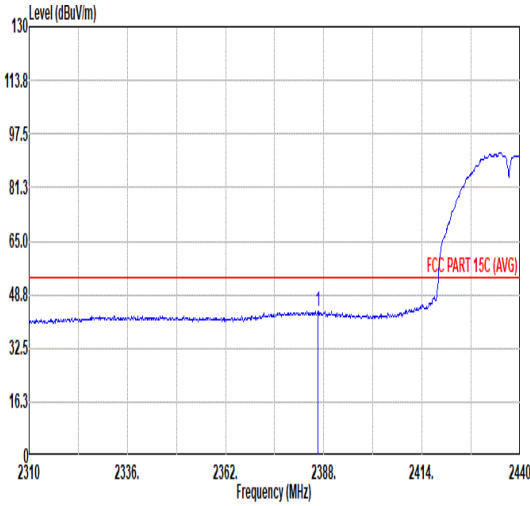
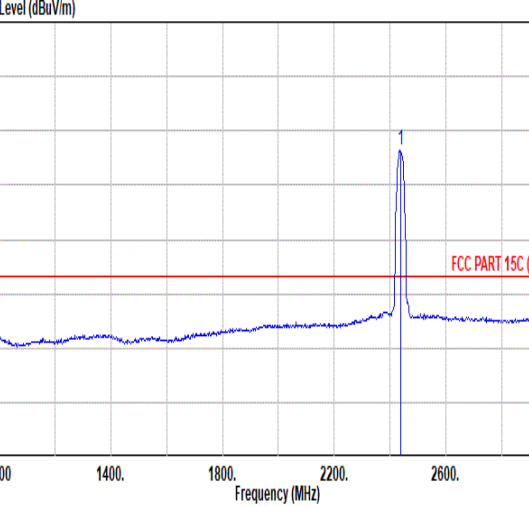


Mode	17																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.46</td><td>53.14</td><td>74.00</td><td>-20.86</td><td>44.76</td><td>31.84</td><td>7.15</td><td>36.61</td><td>6.00</td><td>312 145 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.46	53.14	74.00	-20.86	44.76	31.84	7.15	36.61	6.00	312 145 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>99.97</td><td>-----</td><td>-----</td><td>91.17</td><td>32.14</td><td>7.24</td><td>36.58</td><td>6.00</td><td>312 145 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	99.97	-----	-----	91.17	32.14	7.24	36.58	6.00	312 145 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2388.46	53.14	74.00	-20.86	44.76	31.84	7.15	36.61	6.00	312 145 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2437.00	99.97	-----	-----	91.17	32.14	7.24	36.58	6.00	312 145 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.44</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>35.14</td><td>31.89</td><td>7.16</td><td>36.60</td><td>6.00</td><td>312 145 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2386.44	43.59	54.00	-10.41	35.14	31.89	7.16	36.60	6.00	312 145 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>91.79</td><td>-----</td><td>-----</td><td>82.99</td><td>32.14</td><td>7.24</td><td>36.58</td><td>6.00</td><td>312 145 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2437.00	91.79	-----	-----	82.99	32.14	7.24	36.58	6.00	312 145 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2386.44	43.59	54.00	-10.41	35.14	31.89	7.16	36.60	6.00	312 145 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	2437.00	91.79	-----	-----	82.99	32.14	7.24	36.58	6.00	312 145 AVERAGE																																																																																									







Mode	17																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH6_2437MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.30</td><td>52.01</td><td>74.00</td><td>-21.99</td><td>42.96</td><td>32.28</td><td>7.34</td><td>36.57</td><td>6.00</td><td>312 145 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.30	52.01	74.00	-21.99	42.96	32.28	7.34	36.57	6.00	312 145 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2488.30	52.01	74.00	-21.99	42.96	32.28	7.34	36.57	6.00	312 145 PEAK																																				
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.18</td><td>42.34</td><td>54.00</td><td>-11.66</td><td>33.31</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>312 145 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.18	42.34	54.00	-11.66	33.31	32.27	7.33	36.57	6.00	312 145 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2485.18	42.34	54.00	-11.66	33.31	32.27	7.33	36.57	6.00	312 145 AVERAGE																																				

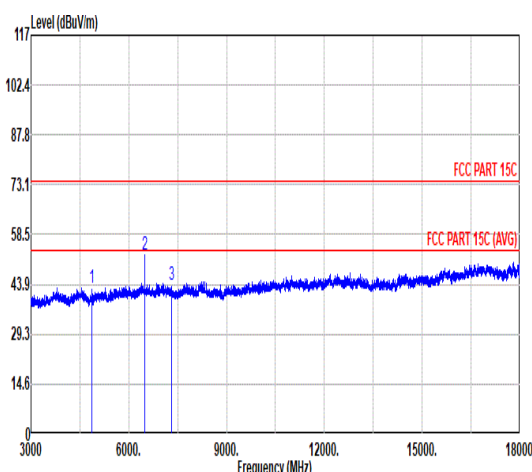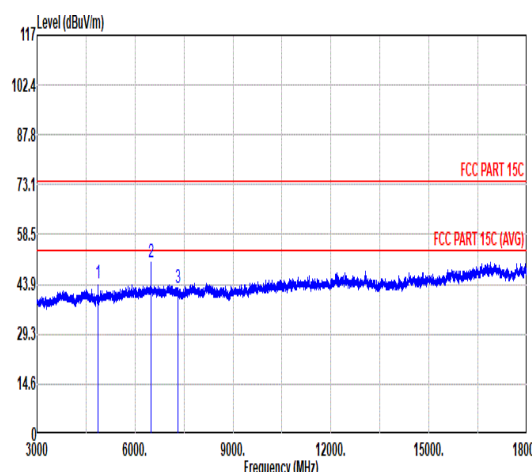

Mode	17																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																																																																							
ANT	1																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																								
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.76</td><td>74.00</td><td>-31.24</td><td>62.84</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>52.43</td><td>80.79</td><td>-28.36</td><td>69.97</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7311.00</td><td>43.69</td><td>74.00</td><td>-30.31</td><td>61.43</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>								Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	42.76	74.00	-31.24	62.84	33.85	10.34	64.27	0.00	---	--- PEAK	2	6499.50	52.43	80.79	-28.36	69.97	35.50	12.16	65.20	0.00	---	--- Peak	3	7311.00	43.69	74.00	-30.31	61.43	35.58	12.78	66.10	0.00	---	--- PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>44.00</td><td>74.00</td><td>-30.00</td><td>64.08</td><td>33.85</td><td>10.34</td><td>64.27</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>50.12</td><td>77.96</td><td>-27.84</td><td>67.66</td><td>35.50</td><td>12.16</td><td>65.20</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7311.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>60.41</td><td>35.58</td><td>12.78</td><td>66.10</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	44.00	74.00	-30.00	64.08	33.85	10.34	64.27	0.00	---	--- PEAK	2	6499.50	50.12	77.96	-27.84	67.66	35.50	12.16	65.20	0.00	---	--- Peak	3	7311.00	42.67	74.00	-31.33	60.41	35.58	12.78	66.10	0.00	---
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4874.00	42.76	74.00	-31.24	62.84	33.85	10.34	64.27	0.00	---	--- PEAK																																																																																																																																													
2	6499.50	52.43	80.79	-28.36	69.97	35.50	12.16	65.20	0.00	---	--- Peak																																																																																																																																													
3	7311.00	43.69	74.00	-30.31	61.43	35.58	12.78	66.10	0.00	---	--- PEAK																																																																																																																																													
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																														
1	4874.00	44.00	74.00	-30.00	64.08	33.85	10.34	64.27	0.00	---	--- PEAK																																																																																																																																													
2	6499.50	50.12	77.96	-27.84	67.66	35.50	12.16	65.20	0.00	---	--- Peak																																																																																																																																													
3	7311.00	42.67	74.00	-31.33	60.41	35.58	12.78	66.10	0.00	---	--- PEAK																																																																																																																																													

Note: The non-restricted frequency which limit is 100kHz-PSD down 20dB

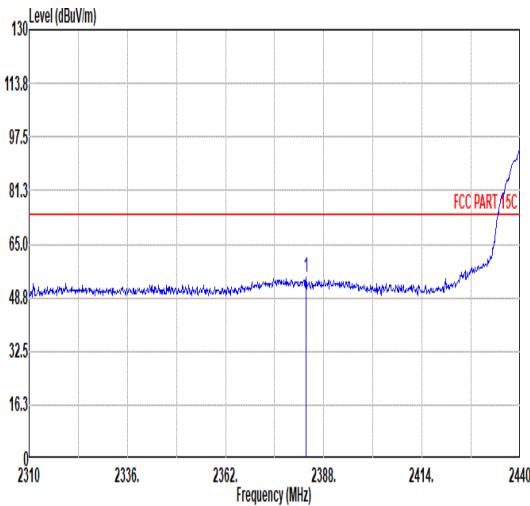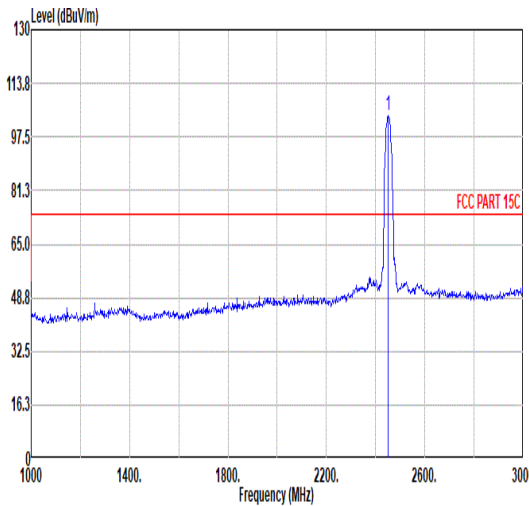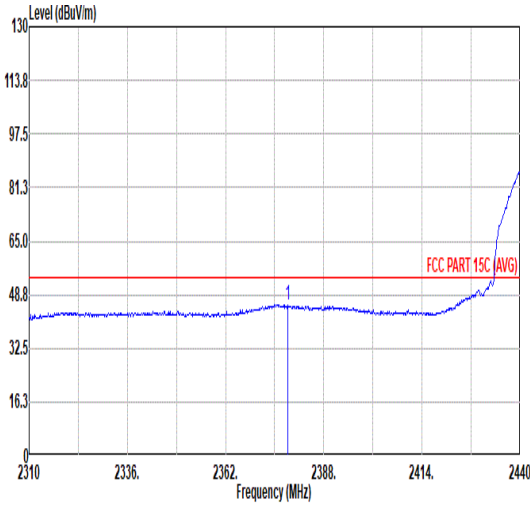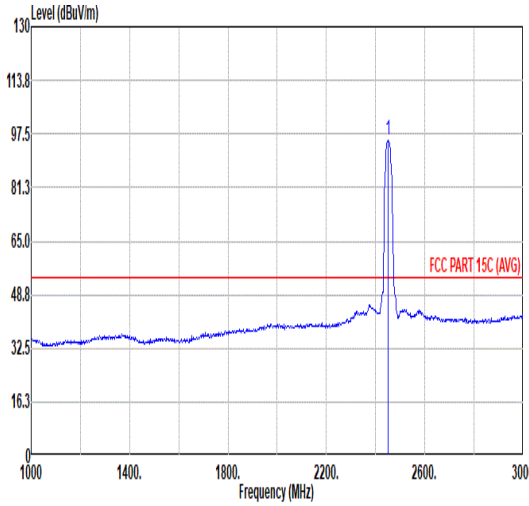

Mode	18																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.32</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>46.49</td><td>31.87</td><td>7.15</td><td>36.60</td><td>6.00</td><td>145 120 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.32	54.91	74.00	-19.09	46.49	31.87	7.15	36.60	6.00	145 120 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>104.08</td><td>-----</td><td>-----</td><td>95.19</td><td>32.20</td><td>7.27</td><td>36.58</td><td>6.00</td><td>145 120 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	104.08	-----	-----	95.19	32.20	7.27	36.58	6.00	145 120 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2383.32	54.91	74.00	-19.09	46.49	31.87	7.15	36.60	6.00	145 120 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	104.08	-----	-----	95.19	32.20	7.27	36.58	6.00	145 120 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2378.38</td><td>45.86</td><td>54.00</td><td>-8.14</td><td>37.49</td><td>31.83</td><td>7.15</td><td>36.61</td><td>6.00</td><td>145 120 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2378.38	45.86	54.00	-8.14	37.49	31.83	7.15	36.61	6.00	145 120 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>95.77</td><td>-----</td><td>-----</td><td>86.88</td><td>32.20</td><td>7.27</td><td>36.58</td><td>6.00</td><td>145 120 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.77	-----	-----	86.88	32.20	7.27	36.58	6.00	145 120 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2378.38	45.86	54.00	-8.14	37.49	31.83	7.15	36.61	6.00	145 120 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	95.77	-----	-----	86.88	32.20	7.27	36.58	6.00	145 120 AVERAGE																																																																																									



Mode	18																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH9_2452MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>45.32</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>145 120 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	54.35	74.00	-19.65	45.32	32.27	7.33	36.57	6.00	145 120 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.50	54.35	74.00	-19.65	45.32	32.27	7.33	36.57	6.00	145 120 PEAK																																				
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>35.70</td><td>32.27</td><td>7.33</td><td>36.57</td><td>6.00</td><td>145 120 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	44.73	54.00	-9.27	35.70	32.27	7.33	36.57	6.00	145 120 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.56	44.73	54.00	-9.27	35.70	32.27	7.33	36.57	6.00	145 120 AVERAGE																																				