



EMC-TRF-01 Rev 1.0

Report No.: GZCR220700092503

Page: 1 of 216

FCC ID: 2ANDR-AC0022022

## TEST REPORT

**Application No.:** GZCR2207000925AT  
**Applicant:** SZ DJI Osmo Technology Co., Ltd.  
**Address of Applicant:** 4F, Jingkou Community Comprehensive Service Building, No. 83 Bishui Road North, Guangming Street, Guangming District, Shenzhen, China  
**Manufacturer:** SZ DJI Osmo Technology Co., Ltd.  
**Address of Manufacturer:** 4F, Jingkou Community Comprehensive Service Building, No. 83 Bishui Road North, Guangming Street, Guangming District, Shenzhen, China  
**Factory:** SZ DJI Ronin Technology Co., Ltd.  
**Address of Factory:** Floor 4-5, Block 13, Area 7, Baiwangxin Industrial Park, Songbai Rd, Nanshan District, Shenzhen City, Guangdong Province, P. R. China

**Equipment Under Test (EUT):**

**EUT Name:** Osmo Action 3  
**Model No.:** AC002  
**Trade Mark:** DJI  
**Standard(s):** 47 CFR Part 15, Subpart E 15.407  
**Date of Receipt:** 2022-07-14  
**Date of Test:** 2022-07-15 to 2022-07-22  
**Date of Issue:** 2022-07-26

|                     |              |
|---------------------|--------------|
| <b>Test Result:</b> | <b>Pass*</b> |
|---------------------|--------------|

\* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian  
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kexu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.ssgsgroup.com.cn  
Guangzhou Branch Testing Service EMC Laboratory. 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2022-07-26 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                         |  |                                                                                     |  |  |
|-------------------------|--|-------------------------------------------------------------------------------------|--|--|
| Authorized for issue by |  |                                                                                     |  |  |
|                         |  |  |  |  |
|                         |  | Curry Wu/Project Engineer                                                           |  |  |
|                         |  |  |  |  |
|                         |  | Ricky Liu/Reviewer                                                                  |  |  |

## 2 Test Summary

| Radio Spectrum Technical Requirement |                                  |        |                                      |        |
|--------------------------------------|----------------------------------|--------|--------------------------------------|--------|
| Item                                 | Standard                         | Method | Requirement                          | Result |
| Antenna Requirement                  | 47 CFR Part 15, Subpart E 15.407 | N/A    | 47 CFR Part 15, Subpart C 15.203     | Pass   |
| Transmission in the Absence of Data  |                                  | N/A    | 47 CFR Part 15, Subpart C 15.407 (c) | Pass   |

| Radio Spectrum Matter Part                            |                                  |                                 |                                                |        |
|-------------------------------------------------------|----------------------------------|---------------------------------|------------------------------------------------|--------|
| Item                                                  | Standard                         | Method                          | Requirement                                    | Result |
| Conducted Emissions at AC Power Line (150kHz-30MHz)   | 47 CFR Part 15, Subpart E 15.407 | ANSI C63.10 (2013) Section 6.2  | 47 CFR Part 15, Subpart C 15.207 & 15.407 b(6) | Pass   |
| Duty Cycle                                            |                                  | ANSI C63.10 (2013) Section 12.2 | KDB 789033 D02 v02r01 II B 1                   | Pass   |
| 99% Bandwidth                                         |                                  | KDB 789033 II D                 | N/A                                            | Pass   |
| 26dB Emission bandwidth                               |                                  | KDB 789033 D02 II C 1           | 47 CFR Part 15, Subpart C 15.407 (a)           | Pass   |
| Minimum 6 dB bandwidth (5.725-5.85 GHz band )         |                                  | KDB 789033 D02 II C 2           | 47 CFR Part 15, Subpart C 15.407 (e)           | Pass   |
| Maximum Conducted output power                        |                                  | KDB 789033 D02 II E             | 47 CFR Part 15, Subpart C 15.407 (a)           | Pass   |
| Peak Power spectrum density                           |                                  | KDB 789033 D02 II F             | 47 CFR Part 15, Subpart C 15.407 (a)           | Pass   |
| Radiated Emissions which fall in the restricted bands |                                  | KDB 789033 D02 II G             | 47 CFR Part 15, Subpart C 15.209 & 15.407(b)   | Pass   |
| Radiated Emissions (above 1GHz)                       |                                  | KDB 789033 D02 II G             | 47 CFR Part 15, Subpart C 15.209 & 15.407(b)   | Pass   |
| Radiated Emissions (below 1GHz)                       |                                  | KDB 789033 D02 II G             | 47 CFR Part 15, Subpart C 15.209 & 15.407(b)   | Pass   |
| Frequency Stability                                   |                                  | ANSI C63.10 (2013) Section 6.8  | 47 CFR Part 15, Subpart C 15.407 (g)           | Pass   |

### Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

### 3 Contents

|                                                               | Page      |
|---------------------------------------------------------------|-----------|
| <b>1 Cover Page .....</b>                                     | <b>1</b>  |
| <b>2 Test Summary.....</b>                                    | <b>3</b>  |
| <b>3 Contents .....</b>                                       | <b>4</b>  |
| <b>4 General Information.....</b>                             | <b>6</b>  |
| 4.1 Details of E.U.T. ....                                    | 6         |
| 4.2 Description of Support Units.....                         | 6         |
| 4.3 Measurement Uncertainty .....                             | 7         |
| 4.4 Test Location .....                                       | 8         |
| 4.5 Test Facility.....                                        | 8         |
| 4.6 Deviation from Standards.....                             | 9         |
| 4.7 Abnormalities from Standard Conditions.....               | 9         |
| <b>5 Equipment List .....</b>                                 | <b>10</b> |
| <b>6 Radio Spectrum Technical Requirement.....</b>            | <b>15</b> |
| 6.1 Antenna Requirement .....                                 | 15        |
| 6.1.1 Test Requirement: .....                                 | 15        |
| 6.1.2 Conclusion .....                                        | 15        |
| 6.2 Transmission in the Absence of Data .....                 | 16        |
| 6.2.1 Test Requirement: .....                                 | 16        |
| 6.2.2 Conclusion .....                                        | 16        |
| <b>7 Radio Spectrum Matter Test Results.....</b>              | <b>17</b> |
| 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz) ..... | 17        |
| 7.1.1 E.U.T. Operation .....                                  | 17        |
| 7.1.2 Test Mode Description .....                             | 17        |
| 7.1.3 Test Setup Diagram .....                                | 18        |
| 7.1.4 Measurement Procedure and Data.....                     | 18        |
| 7.2 Duty Cycle .....                                          | 21        |
| 7.2.1 E.U.T. Operation .....                                  | 21        |
| 7.2.2 Test Mode Description .....                             | 21        |
| 7.2.3 Test Setup Diagram .....                                | 22        |
| 7.2.4 Measurement Procedure and Data.....                     | 22        |
| 7.3 99% Bandwidth .....                                       | 23        |
| 7.3.1 E.U.T. Operation .....                                  | 23        |
| 7.3.2 Test Mode Description .....                             | 23        |
| 7.3.3 Test Setup Diagram .....                                | 24        |
| 7.3.4 Measurement Procedure and Data.....                     | 24        |
| 7.4 26dB Emission bandwidth .....                             | 25        |
| 7.4.1 E.U.T. Operation .....                                  | 25        |
| 7.4.2 Test Mode Description .....                             | 25        |
| 7.4.3 Test Setup Diagram .....                                | 25        |
| 7.4.4 Measurement Procedure and Data.....                     | 25        |
| 7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band ) .....       | 26        |
| 7.5.1 E.U.T. Operation .....                                  | 26        |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



|        |                                                             |     |
|--------|-------------------------------------------------------------|-----|
| 7.5.2  | Test Mode Description .....                                 | 26  |
| 7.5.3  | Test Setup Diagram .....                                    | 26  |
| 7.5.4  | Measurement Procedure and Data.....                         | 26  |
| 7.6    | Maximum Conducted output power .....                        | 27  |
| 7.6.1  | E.U.T. Operation .....                                      | 27  |
| 7.6.2  | Test Mode Description .....                                 | 27  |
| 7.6.3  | Test Setup Diagram .....                                    | 28  |
| 7.6.4  | Measurement Procedure and Data.....                         | 28  |
| 7.7    | Peak Power spectrum density .....                           | 29  |
| 7.7.1  | E.U.T. Operation .....                                      | 29  |
| 7.7.2  | Test Mode Description .....                                 | 29  |
| 7.7.3  | Test Setup Diagram .....                                    | 30  |
| 7.7.4  | Measurement Procedure and Data.....                         | 30  |
| 7.8    | Radiated Emissions which fall in the restricted bands ..... | 31  |
| 7.8.1  | E.U.T. Operation .....                                      | 32  |
| 7.8.2  | Test Mode Description .....                                 | 32  |
| 7.8.3  | Test Setup Diagram .....                                    | 33  |
| 7.8.4  | Measurement Procedure and Data.....                         | 33  |
| 7.9    | Radiated Emissions (above 1GHz).....                        | 78  |
| 7.9.1  | E.U.T. Operation .....                                      | 78  |
| 7.9.2  | Test Mode Description .....                                 | 78  |
| 7.9.3  | Test Setup Diagram .....                                    | 79  |
| 7.9.4  | Measurement Procedure and Data.....                         | 80  |
| 7.10   | Radiated Emissions (below 1GHz) .....                       | 137 |
| 7.10.1 | E.U.T. Operation.....                                       | 137 |
| 7.10.2 | Test Mode Description .....                                 | 137 |
| 7.10.3 | Test Setup Diagram .....                                    | 138 |
| 7.10.4 | Measurement Procedure and Data.....                         | 139 |
| 7.11   | Frequency Stability.....                                    | 143 |
| 7.11.1 | E.U.T. Operation.....                                       | 143 |
| 7.11.2 | Test Mode Description .....                                 | 143 |
| 7.11.3 | Test Setup Diagram .....                                    | 144 |
| 7.11.4 | Measurement Procedure and Data.....                         | 144 |
| 8      | Test Setup Photo .....                                      | 145 |
| 9      | EUT Constructional Details (EUT Photos).....                | 145 |
| 10     | Appendix.....                                               | 146 |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

## 4 General Information

### 4.1 Details of E.U.T.

|                              |                                                                                                                                                                                 |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power supply:                | Battery information<br>Model: BCX202-1770-3.85<br>Rated Capacity: 1770mAh 6.81Wh                                                                                                |
| Operation Frequency (20MHz): | U-NII-1: 5180-5240MHz; U-NII-3: 5745-5825MHz                                                                                                                                    |
| Operation Frequency (40MHz): | U-NII-1: 5190-5230MHz; U-NII-3: 5755-5795MHz                                                                                                                                    |
| Operation Frequency (80MHz): | U-NII-1: 5210MHz; U-NII-3: 5775MHz                                                                                                                                              |
| Modulation Type:             | 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK);<br>802.11n: OFDM (BPSK, QPSK, 16QAM, 64QAM);<br>802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)<br>802.11a/n(HT20)/ac(HT20): 20MHz; |
| Channel Spacing:             | 802.11n(HT40)/ac(HT40): 40MHz;<br>802.11ac(HT80): 80MHz                                                                                                                         |
| DFS Function:                | Without DFS function                                                                                                                                                            |
| TPC Function:                | Without TPC function                                                                                                                                                            |
| Antenna Type:                | Integral Antenna                                                                                                                                                                |
| Antenna Gain:                | U-NII-1: 0dBi declared by applicant<br>U-NII-3: -2.5dBi declared by applicant                                                                                                   |

### 4.2 Description of Support Units

| Description  | Manufacturer | Model No. | Serial No.     |
|--------------|--------------|-----------|----------------|
| Adapter      | DJI          | PD-30CN   | 5CQHK26181002M |
| Type-C Cable | DJI          | N/A       | N/A            |

### 4.3 Measurement Uncertainty

| Test Item                                                                                                                                                                                                                                                                                                                                                                                           | Measurement Uncertainty                                                                       |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| Conducted Emissions at AC Power Line (150kHz-30MHz)                                                                                                                                                                                                                                                                                                                                                 | ±2.76dB                                                                                       |
| Duty Cycle                                                                                                                                                                                                                                                                                                                                                                                          | ± 0.37%                                                                                       |
| 99% Bandwidth                                                                                                                                                                                                                                                                                                                                                                                       | ± 3%                                                                                          |
| 26dB Emission bandwidth                                                                                                                                                                                                                                                                                                                                                                             | ± 3%                                                                                          |
| Minimum 6 dB bandwidth (5.725-5.85 GHz band )                                                                                                                                                                                                                                                                                                                                                       | ± 3%                                                                                          |
| Maximum Conducted output power                                                                                                                                                                                                                                                                                                                                                                      | ± 0.75dB                                                                                      |
| Peak Power spectrum density                                                                                                                                                                                                                                                                                                                                                                         | ± 2.84dB                                                                                      |
| Radiated Emissions which fall in the restricted bands                                                                                                                                                                                                                                                                                                                                               | ±5.00dB (30MHz-1GHz; 3m); ± 5.12dB (1GHz-6GHz); ± 5.38dB (6GHz-18GHz); ± 5.61dB (18GHz-40GHz) |
| Radiated Emissions (above 1GHz)                                                                                                                                                                                                                                                                                                                                                                     | ± 5.12dB (1GHz-6GHz); ± 5.38dB (6GHz-18GHz); ± 5.61dB (18GHz-40GHz)                           |
| Radiated Emissions (below 1GHz)                                                                                                                                                                                                                                                                                                                                                                     | ±5.00dB (30MHz-1GHz; 3m); ±4.38dB (30MHz-1GHz; 10m);                                          |
| Frequency Stability                                                                                                                                                                                                                                                                                                                                                                                 | ± 7.25 x 10 <sup>-8</sup>                                                                     |
| <p>Remark:</p> <p>The U<sub>lab</sub> (lab Uncertainty) is less than U<sub>CISPR</sub> (CISPR Uncertainty), so the test results</p> <ul style="list-style-type: none"> <li>– compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;</li> <li>– non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.</li> </ul> |                                                                                               |

#### 4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,  
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,  
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

#### 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm(Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.





#### 4.6 Deviation from Standards

None

#### 4.7 Abnormalities from Standard Conditions

None

## 5 Equipment List

| Conducted Emissions at AC Power Line (150kHz-30MHz) |                   |                |              |            |              |
|-----------------------------------------------------|-------------------|----------------|--------------|------------|--------------|
| Equipment                                           | Manufacturer      | Model No       | Inventory No | Cal Date   | Cal Due Date |
| Shielding Room                                      | ChangZhou ZhongYu | 8m x 3m x 3.8m | EMC0306      | N/A        | N/A          |
| Two-Line V-Network                                  | Rohde & Schwarz   | ENV216         | EMC0118      | 2021-12-23 | 2022-12-22   |
| Two-Line V-Network-GZ                               | Rohde & Schwarz   | ENV216         | EMC2135      | 2021-09-24 | 2022-09-23   |
| Coaxial Cable                                       | HangTianXing      | 2m             | EMC0107      | 2020-09-09 | 2022-09-08   |
| Test Software E3c                                   | Audix             | Ver. 5.4.1221b | GZE100-62    | N/A        | N/A          |
| EMI Test Receiver(9kHz-3.6GHz)                      | Rohde & Schwarz   | ESR3           | EMC2221      | 2022-05-20 | 2023-05-19   |

| Duty Cycle                               |                      |             |              |            |              |
|------------------------------------------|----------------------|-------------|--------------|------------|--------------|
| Equipment                                | Manufacturer         | Model No    | Inventory No | Cal Date   | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz)         | Agilent Technologies | N9020A      | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight             | E4438C      | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal Generator(9kHz-3GHz)   | Agilent Technologies | N5171B      | SEM006-04    | 2022-06-21 | 2023-06-20   |
| Power Meter (U2021XA_Ch2)                | Agilent Technologies | U2021XA_Ch2 | SEM009-02    | 2022-05-16 | 2023-05-15   |
| Power Meter (U2021XA_Ch3)                | Agilent Technologies | U2021XA_Ch3 | SEM009-03    | 2022-05-16 | 2023-05-15   |
| EXA Signal Analyzer(10Hz-44GHz)          | Agilent Technologies | N9010A      | EMC2138      | 2021-09-16 | 2022-09-15   |
| 6dB Attenuator                           | HP                   | 8491A       | EMC2062      | 2022-03-29 | 2023-03-28   |
| MI CABLE                                 | SGS-EMC              | 0.8M        | EMC2136      | 2021-11-01 | 2023-11-01   |
| MI CABLE                                 | SGS-EMC              | 0.8M        | EMC2137      | 2021-11-01 | 2023-11-01   |
| Test Software                            | TST                  | V2.0        | GZE100-78    | N/A        | N/A          |

| 99% Bandwidth                            |                      |          |              |            |              |
|------------------------------------------|----------------------|----------|--------------|------------|--------------|
| Equipment                                | Manufacturer         | Model No | Inventory No | Cal Date   | Cal Due Date |
| MXA Signal Analyzer(10Hz-8.4GHz)         | Agilent Technologies | N9020A   | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal Generator(250kHz-6GHz) | Keysight             | E4438C   | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal Generator(9kHz-3GHz)   | Agilent Technologies | N5171B   | SEM006-04    | 2022-06-21 | 2023-06-20   |



|                                    |                         |             |           |            |            |
|------------------------------------|-------------------------|-------------|-----------|------------|------------|
| Power Meter<br>(U2021XA_Ch2)       | Agilent<br>Technologies | U2021XA_Ch2 | SEM009-02 | 2022-05-16 | 2023-05-15 |
| Power Meter<br>(U2021XA_Ch3)       | Agilent<br>Technologies | U2021XA_Ch3 | SEM009-03 | 2022-05-16 | 2023-05-15 |
| EXA Signal<br>Analyzer(10Hz-44GHz) | Agilent<br>Technologies | N9010A      | EMC2138   | 2021-09-16 | 2022-09-15 |
| 6dB Attenuator                     | HP                      | 8491A       | EMC2062   | 2022-03-29 | 2023-03-28 |
| MI CABLE                           | SGS-EMC                 | 0.8M        | EMC2136   | 2021-11-01 | 2023-11-01 |
| MI CABLE                           | SGS-EMC                 | 0.8M        | EMC2137   | 2021-11-01 | 2023-11-01 |
| Test Software                      | TST                     | V2.0        | GZE100-78 | N/A        | N/A        |

**26dB Emission bandwidth**

| Equipment                                       | Manufacturer            | Model No    | Inventory No | Cal Date   | Cal Due Date |
|-------------------------------------------------|-------------------------|-------------|--------------|------------|--------------|
| MXA Signal<br>Analyzer(10Hz-8.4GHz)             | Agilent<br>Technologies | N9020A      | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal<br>Generator(250kHz-<br>6GHz) | Keysight                | E4438C      | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal<br>Generator(9kHz-3GHz)       | Agilent<br>Technologies | N5171B      | SEM006-04    | 2022-06-21 | 2023-06-20   |
| Power Meter<br>(U2021XA_Ch2)                    | Agilent<br>Technologies | U2021XA_Ch2 | SEM009-02    | 2022-05-16 | 2023-05-15   |
| Power Meter<br>(U2021XA_Ch3)                    | Agilent<br>Technologies | U2021XA_Ch3 | SEM009-03    | 2022-05-16 | 2023-05-15   |
| EXA Signal<br>Analyzer(10Hz-44GHz)              | Agilent<br>Technologies | N9010A      | EMC2138      | 2021-09-16 | 2022-09-15   |
| 6dB Attenuator                                  | HP                      | 8491A       | EMC2062      | 2022-03-29 | 2023-03-28   |
| MI CABLE                                        | SGS-EMC                 | 0.8M        | EMC2136      | 2021-11-01 | 2023-11-01   |
| MI CABLE                                        | SGS-EMC                 | 0.8M        | EMC2137      | 2021-11-01 | 2023-11-01   |
| Test Software                                   | TST                     | V2.0        | GZE100-78    | N/A        | N/A          |

**Minimum 6 dB bandwidth (5.725-5.85 GHz band )**

| Equipment                                       | Manufacturer            | Model No    | Inventory No | Cal Date   | Cal Due Date |
|-------------------------------------------------|-------------------------|-------------|--------------|------------|--------------|
| MXA Signal<br>Analyzer(10Hz-8.4GHz)             | Agilent<br>Technologies | N9020A      | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal<br>Generator(250kHz-<br>6GHz) | Keysight                | E4438C      | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal<br>Generator(9kHz-3GHz)       | Agilent<br>Technologies | N5171B      | SEM006-04    | 2022-06-21 | 2023-06-20   |
| Power Meter<br>(U2021XA_Ch2)                    | Agilent<br>Technologies | U2021XA_Ch2 | SEM009-02    | 2022-05-16 | 2023-05-15   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn  
Guangzhou Branch Testing Laboratory, EEC Laboratory, 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

|                                    |                         |             |           |            |            |
|------------------------------------|-------------------------|-------------|-----------|------------|------------|
| Power Meter<br>(U2021XA_Ch3)       | Agilent<br>Technologies | U2021XA_Ch3 | SEM009-03 | 2022-05-16 | 2023-05-15 |
| EXA Signal<br>Analyzer(10Hz-44GHz) | Agilent<br>Technologies | N9010A      | EMC2138   | 2021-09-16 | 2022-09-15 |
| 6dB Attenuator                     | HP                      | 8491A       | EMC2062   | 2022-03-29 | 2023-03-28 |
| MI CABLE                           | SGS-EMC                 | 0.8M        | EMC2136   | 2021-11-01 | 2023-11-01 |
| MI CABLE                           | SGS-EMC                 | 0.8M        | EMC2137   | 2021-11-01 | 2023-11-01 |
| Test Software                      | TST                     | V2.0        | GZE100-78 | N/A        | N/A        |

| Maximum Conducted output power                  |                         |             |              |            |              |
|-------------------------------------------------|-------------------------|-------------|--------------|------------|--------------|
| Equipment                                       | Manufacturer            | Model No    | Inventory No | Cal Date   | Cal Due Date |
| MXA Signal<br>Analyzer(10Hz-8.4GHz)             | Agilent<br>Technologies | N9020A      | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal<br>Generator(250kHz-<br>6GHz) | Keysight                | E4438C      | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal<br>Generator(9kHz-3GHz)       | Agilent<br>Technologies | N5171B      | SEM006-04    | 2022-06-21 | 2023-06-20   |
| Power Meter<br>(U2021XA_Ch2)                    | Agilent<br>Technologies | U2021XA_Ch2 | SEM009-02    | 2022-05-16 | 2023-05-15   |
| Power Meter<br>(U2021XA_Ch3)                    | Agilent<br>Technologies | U2021XA_Ch3 | SEM009-03    | 2022-05-16 | 2023-05-15   |
| EXA Signal<br>Analyzer(10Hz-44GHz)              | Agilent<br>Technologies | N9010A      | EMC2138      | 2021-09-16 | 2022-09-15   |
| 6dB Attenuator                                  | HP                      | 8491A       | EMC2062      | 2022-03-29 | 2023-03-28   |
| MI CABLE                                        | SGS-EMC                 | 0.8M        | EMC2136      | 2021-11-01 | 2023-11-01   |
| MI CABLE                                        | SGS-EMC                 | 0.8M        | EMC2137      | 2021-11-01 | 2023-11-01   |
| Test Software                                   | TST                     | V2.0        | GZE100-78    | N/A        | N/A          |

| Peak Power spectrum density                     |                         |             |              |            |              |
|-------------------------------------------------|-------------------------|-------------|--------------|------------|--------------|
| Equipment                                       | Manufacturer            | Model No    | Inventory No | Cal Date   | Cal Due Date |
| MXA Signal<br>Analyzer(10Hz-8.4GHz)             | Agilent<br>Technologies | N9020A      | SEM004-10    | 2022-03-03 | 2023-03-02   |
| ESG Vector Signal<br>Generator(250kHz-<br>6GHz) | Keysight                | E4438C      | SEM006-03    | 2022-03-03 | 2023-03-02   |
| EXG Analog Signal<br>Generator(9kHz-3GHz)       | Agilent<br>Technologies | N5171B      | SEM006-04    | 2022-06-21 | 2023-06-20   |
| Power Meter<br>(U2021XA_Ch2)                    | Agilent<br>Technologies | U2021XA_Ch2 | SEM009-02    | 2022-05-16 | 2023-05-15   |
| Power Meter<br>(U2021XA_Ch3)                    | Agilent<br>Technologies | U2021XA_Ch3 | SEM009-03    | 2022-05-16 | 2023-05-15   |





|                                 |                      |        |           |            |            |
|---------------------------------|----------------------|--------|-----------|------------|------------|
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A | EMC2138   | 2021-09-16 | 2022-09-15 |
| 6dB Attenuator                  | HP                   | 8491A  | EMC2062   | 2022-03-29 | 2023-03-28 |
| MI CABLE                        | SGS-EMC              | 0.8M   | EMC2136   | 2021-11-01 | 2023-11-01 |
| MI CABLE                        | SGS-EMC              | 0.8M   | EMC2137   | 2021-11-01 | 2023-11-01 |
| Test Software                   | TST                  | V2.0   | GZE100-78 | N/A        | N/A        |

| Radiated Emissions which fall in the restricted bands |                                |               |              |            |              |
|-------------------------------------------------------|--------------------------------|---------------|--------------|------------|--------------|
| Equipment                                             | Manufacturer                   | Model No      | Inventory No | Cal Date   | Cal Due Date |
| EMI Test Receiver(20Hz-26.5GHz)                       | Rohde & Schwarz                | ESIB26        | EMC0522      | 2021-12-17 | 2022-12-16   |
| Chamber cable(Above 1GHz)                             | Scoflex                        | KMKM-8.0m     | EMC0545      | 2020-09-09 | 2022-09-08   |
| Horn Antenna(1GHz-18GHz)                              | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120D    | EMC2026      | 2019-09-25 | 2022-09-24   |
| 1GHz-26.5 GHz Pre-Amplifier                           | Agilent                        | 8449B         | EMC0521      | 2021-12-17 | 2022-12-16   |
| 966 Anechoic Chamber                                  | C.R.T                          | 9m x 6m x 6m  | EMC2142      | 2020-12-20 | 2023-12-19   |
| MXE EMI Receiver(10Hz-8.4GHz)                         | Keysight                       | N9038A        | EMC2139      | 2021-11-01 | 2022-10-31   |
| EXA Signal Analyzer(10Hz-44GHz)                       | Keysight                       | N9010A        | EMC2138      | 2021-09-16 | 2022-09-15   |
| Test Software E3                                      | Audix                          | Ver.6.120110a | GZE100-61    | N/A        | N/A          |
| Notch Filter (5150-5880)                              | Mico-Tronics                   | BRM50716      | EMC2168      | 2021-07-29 | 2022-07-28   |
| Horn Antenna(14-40GHz)                                | SCHWARZBECK                    | BBHA 9170     | EMC2041      | 2020-06-28 | 2023-06-27   |
| Microwave Broadband Preampfier (18-40GHz)             | SCHWARZBECK                    | BBV 9721      | EMC2172      | 2021-08-30 | 2022-08-29   |

| Radiated Emissions (above 1GHz) |                                |              |              |            |              |
|---------------------------------|--------------------------------|--------------|--------------|------------|--------------|
| Equipment                       | Manufacturer                   | Model No     | Inventory No | Cal Date   | Cal Due Date |
| Chamber cable(Above 1GHz)       | Scoflex                        | KMKM-8.0m    | EMC0545      | 2020-09-09 | 2022-09-08   |
| Horn Antenna(1GHz-18GHz)        | SCHWARZBECK<br>MESS-ELEKTRONIK | BBHA 9120D   | EMC2026      | 2019-09-25 | 2022-09-24   |
| 1GHz-26.5 GHz Pre-Amplifier     | Agilent                        | 8449B        | EMC0521      | 2021-12-17 | 2022-12-16   |
| 2.4GHz Filter                   | Micro-Tronics                  | BRM 50702    | EMC2069      | 2021-12-17 | 2022-12-16   |
| 966 Anechoic Chamber            | C.R.T                          | 9m x 6m x 6m | EMC2142      | 2020-12-20 | 2023-12-19   |



|                                             |              |               |           |            |            |
|---------------------------------------------|--------------|---------------|-----------|------------|------------|
| EXA Signal Analyzer(10Hz-44GHz)             | Keysight     | N9010A        | EMC2138   | 2021-09-16 | 2022-09-15 |
| Test Software E3                            | Audix        | Ver.6.120110a | GZE100-61 | N/A        | N/A        |
| Notch Filter (5150-5880)                    | Mico-Tronics | BRM50716      | EMC2168   | 2021-07-29 | 2022-07-28 |
| Horn Antenna(14-40GHz)                      | SCHWARZBECK  | BBHA 9170     | EMC2041   | 2020-06-28 | 2023-06-27 |
| Microwave Broadband Preamplifier (18-40GHz) | SCHWARZBECK  | BBV 9721      | EMC2172   | 2021-08-30 | 2022-08-29 |

**Radiated Emissions (below 1GHz)**

| Equipment                                | Manufacturer                   | Model No      | Inventory No | Cal Date   | Cal Due Date |
|------------------------------------------|--------------------------------|---------------|--------------|------------|--------------|
| Chamber cable                            | HangTianXing                   | N/A           | EMC0542      | 2020-09-09 | 2022-09-08   |
| Trilog Broadband Antenna(25MHz-1GHz)-Lab | SCHWARZBECK<br>MESS-ELEKTRONIK | VULB 9168     | EMC2174      | 2022-06-19 | 2025-06-18   |
| Amplifier(9kHz-1.3GHz)                   | HP                             | 8447F         | EMC2065      | 2022-06-21 | 2023-06-20   |
| Active Loop Antenna-RED                  | ETS-Lindgren                   | 6502          | EMC2190      | 2022-04-06 | 2024-04-05   |
| 10m Semi-Anechoic Chamber                | ETS                            | N/A           | EMC0530      | 2019-10-20 | 2022-10-19   |
| Test Software E3                         | Audix                          | Ver.6.120110a | GZE100-61    | N/A        | N/A          |
| EMI Test Receiver(1Hz-8GHz)              | Rohde & Schwarz                | ESW8          | EMC2220      | 2022-05-20 | 2023-05-19   |

**Frequency Stability**

| Equipment                       | Manufacturer         | Model No | Inventory No | Cal Date   | Cal Due Date |
|---------------------------------|----------------------|----------|--------------|------------|--------------|
| EXA Signal Analyzer(10Hz-44GHz) | Agilent Technologies | N9010A   | EMC2138      | 2021-09-16 | 2022-09-15   |
| 6dB Attenuator                  | HP                   | 8491A    | EMC2062      | 2022-03-29 | 2024-03-28   |
| MI CABLE                        | SGS-EMC              | 0.8M     | EMC2136      | 2021-11-01 | 2023-11-01   |
| Test Software                   | TST                  | V2.0     | GZE100-78    | N/A        | N/A          |
| Temperature Chamber             | GZ GongWen Co.Ltd.   | GDJW-100 | EMC0039      | 2022-07-03 | 2023-07-02   |

**General used equipment**

| Equipment | Manufacturer | Model No | Inventory No | Cal Date   | Cal Due Date |
|-----------|--------------|----------|--------------|------------|--------------|
| DMM       | Fluke        | 73       | EMC0006      | 2022-07-05 | 2023-07-04   |
| DMM       | Fluke        | 73       | EMC0007      | 2022-07-05 | 2023-07-04   |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

## 6 Radio Spectrum Technical Requirement

### 6.1 Antenna Requirement

#### 6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

#### 6.1.2 Conclusion

15.203 Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of 15.211, 15.213, 15.217, 15.219, 15.221, or 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna 1: U-NII-1: 0dBi, U-NII-3: -2.5dBi

Antenna location: Refer to internal photo.

## 6.2 Transmission in the Absence of Data

### 6.2.1 Test Requirement:

47 CFR Part 15, Subpart C 15.407 (c)

### 6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

WIFI chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.



## 7 Radio Spectrum Matter Test Results

### 7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & 15.407 b(6)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

| Frequency of emission(MHz) | Conducted limit(dBμV) |           |
|----------------------------|-----------------------|-----------|
|                            | Quasi-peak            | Average   |
| 0.15-0.5                   | 66 to 56*             | 56 to 46* |
| 0.5-5                      | 56                    | 46        |
| 5-30                       | 60                    | 50        |

\*Decreases with the logarithm of the frequency.

#### 7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 23.1 °C

Humidity: 53.3 % RH

Atmospheric Pressure: 1003 mbar

#### 7.1.2 Test Mode Description

Pre-scan / Mode  
Final test Code Description

Pre-scan 08 Charge + TX mode (U-NII-1)\_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.


Final test 09 Charge + TX mode (U-NII-3)\_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

### 7.1.3 Test Setup Diagram

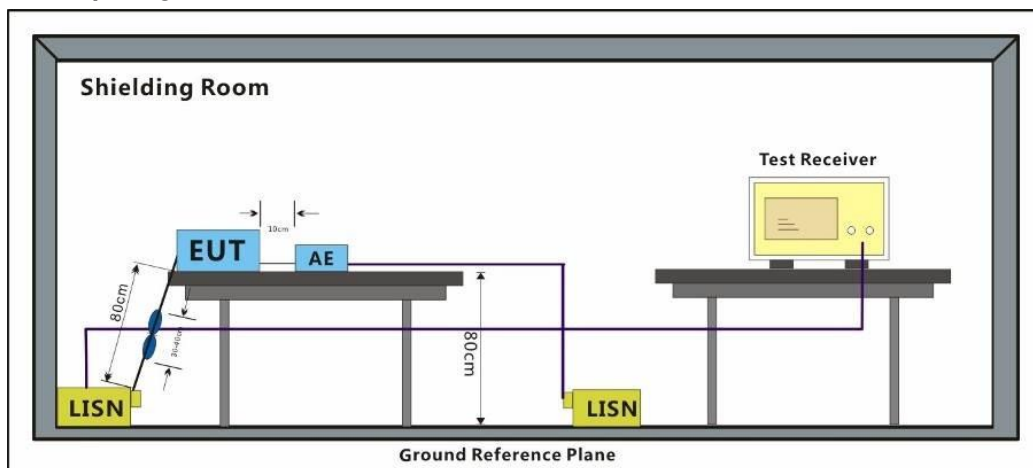


### 7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Test Mode: 09; Line: Live line

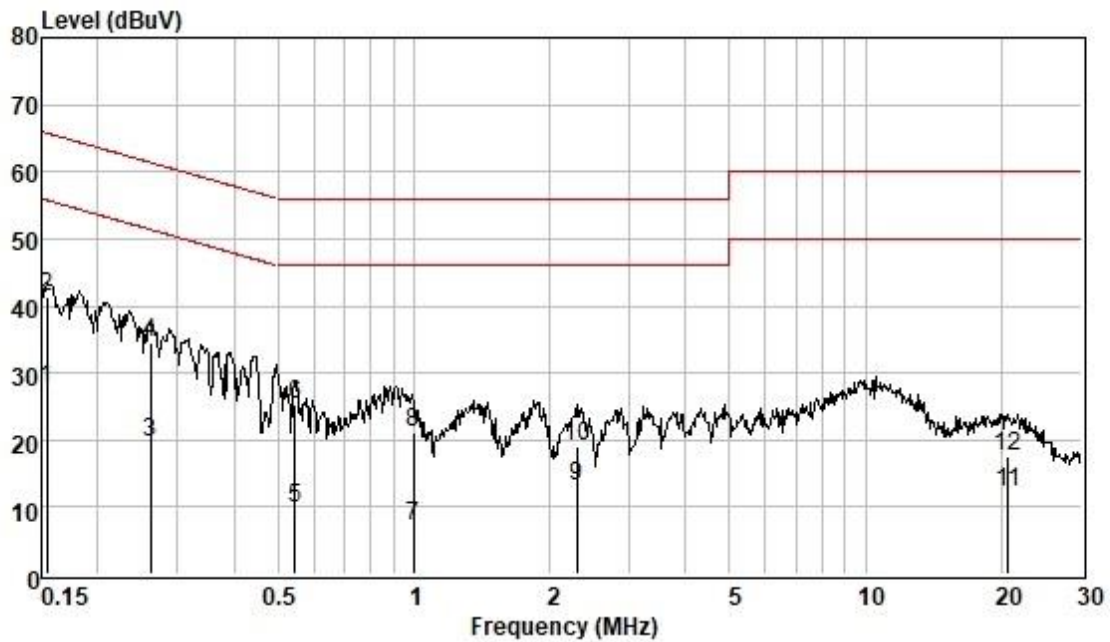


Pol : LINE  
Mode :  
Model :

|    | Frequency<br>MHz | Read<br>Level<br>dBuV | Cable<br>Loss<br>dB | LISN<br>Factor<br>dB | Measured<br>Level<br>dBuV | Limit<br>Line<br>dBuV | Over<br>Limit<br>dB | Remark  |
|----|------------------|-----------------------|---------------------|----------------------|---------------------------|-----------------------|---------------------|---------|
| 1  | 0.154            | 18.05                 | 0.06                | 9.54                 | 27.65                     | 55.78                 | -28.13              | Average |
| 2  | 0.154            | 31.61                 | 0.06                | 9.54                 | 41.21                     | 65.78                 | -24.57              | QP      |
| 3  | 0.262            | 10.09                 | 0.06                | 9.57                 | 19.72                     | 51.38                 | -31.66              | Average |
| 4  | 0.262            | 24.93                 | 0.06                | 9.57                 | 34.56                     | 61.38                 | -26.82              | QP      |
| 5  | 0.546            | 0.11                  | 0.07                | 9.59                 | 9.77                      | 46.00                 | -36.23              | Average |
| 6  | 0.546            | 15.48                 | 0.07                | 9.59                 | 25.14                     | 56.00                 | -30.86              | QP      |
| 7  | 1.000            | -2.49                 | 0.07                | 9.60                 | 7.18                      | 46.00                 | -38.82              | Average |
| 8  | 1.000            | 11.51                 | 0.07                | 9.60                 | 21.18                     | 56.00                 | -34.82              | QP      |
| 9  | 2.297            | 3.22                  | 0.13                | 9.60                 | 12.95                     | 46.00                 | -33.05              | Average |
| 10 | 2.297            | 9.45                  | 0.13                | 9.60                 | 19.18                     | 56.00                 | -36.82              | QP      |
| 11 | 20.704           | 2.07                  | 0.37                | 9.83                 | 12.27                     | 50.00                 | -37.73              | Average |
| 12 | 20.704           | 7.22                  | 0.37                | 9.83                 | 17.42                     | 60.00                 | -42.58              | QP      |



Test Mode: 09; Line: Neutral Line

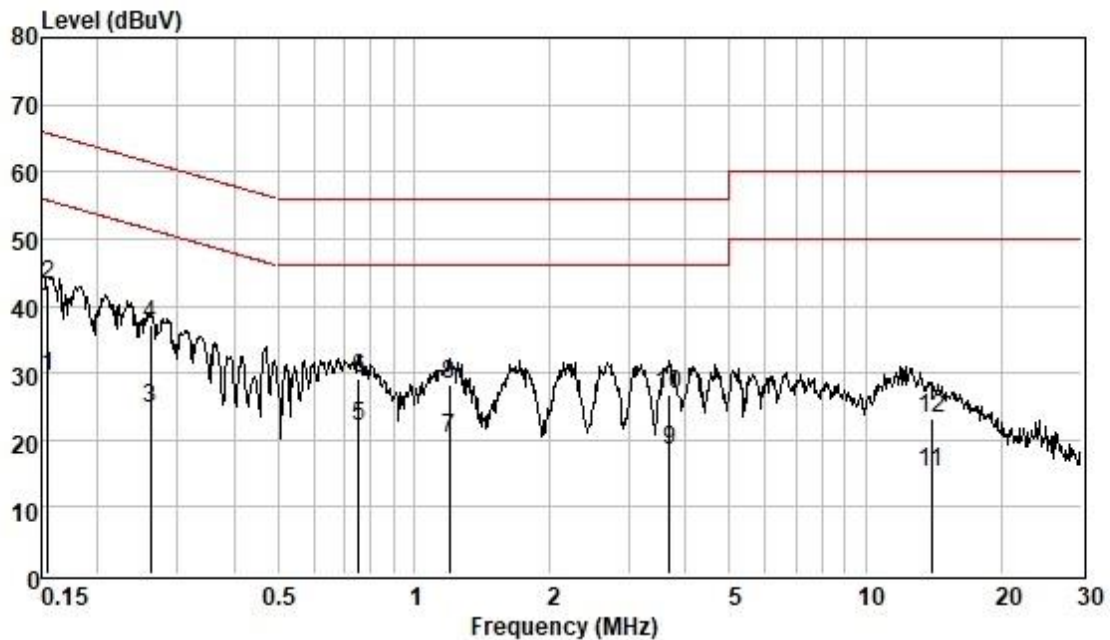

Pol : NEUTRAL  
Mode :  
Model :

|    | Freque | Read  | Cable | LISN   | Measured | Limit | Over   | Remark  |
|----|--------|-------|-------|--------|----------|-------|--------|---------|
|    | nc     | Level | Loss  | Factor | Level    | Line  | Limit  |         |
|    | MHz    | dBuV  | dB    | dB     | dBuV     | dBuV  | dB     |         |
| 1  | 0.155  | 19.78 | 0.06  | 9.53   | 29.37    | 55.74 | -26.37 | Average |
| 2  | 0.155  | 33.40 | 0.06  | 9.53   | 42.99    | 65.74 | -22.75 | QP      |
| 3  | 0.262  | 14.98 | 0.06  | 9.56   | 24.60    | 51.38 | -26.78 | Average |
| 4  | 0.262  | 27.56 | 0.06  | 9.56   | 37.18    | 61.38 | -24.20 | QP      |
| 5  | 0.755  | 12.30 | 0.07  | 9.59   | 21.96    | 46.00 | -24.04 | Average |
| 6  | 0.755  | 19.54 | 0.07  | 9.59   | 29.20    | 56.00 | -26.80 | QP      |
| 7  | 1.197  | 10.42 | 0.08  | 9.59   | 20.09    | 46.00 | -25.91 | Average |
| 8  | 1.197  | 18.67 | 0.08  | 9.59   | 28.34    | 56.00 | -27.66 | QP      |
| 9  | 3.681  | 8.69  | 0.16  | 9.62   | 18.47    | 46.00 | -27.53 | Average |
| 10 | 3.681  | 17.11 | 0.16  | 9.62   | 26.89    | 56.00 | -29.11 | QP      |
| 11 | 13.989 | 4.97  | 0.30  | 9.85   | 15.12    | 50.00 | -34.88 | Average |
| 12 | 13.989 | 12.98 | 0.30  | 9.85   | 23.13    | 60.00 | -36.87 | QP      |



## 7.2 Duty Cycle

Test Requirement

KDB 789033 D02 v02r01 II B 1

Test Method:

ANSI C63.10 (2013) Section 12.2

### 7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 21.2 °C


Humidity: 52.8 % RH

Atmospheric Pressure: 1003 mbar

### 7.2.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------------------|--------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 06           | <p>TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.</p> |
| Final test               | 07           | <p>TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.</p> |

### 7.2.3 Test Setup Diagram

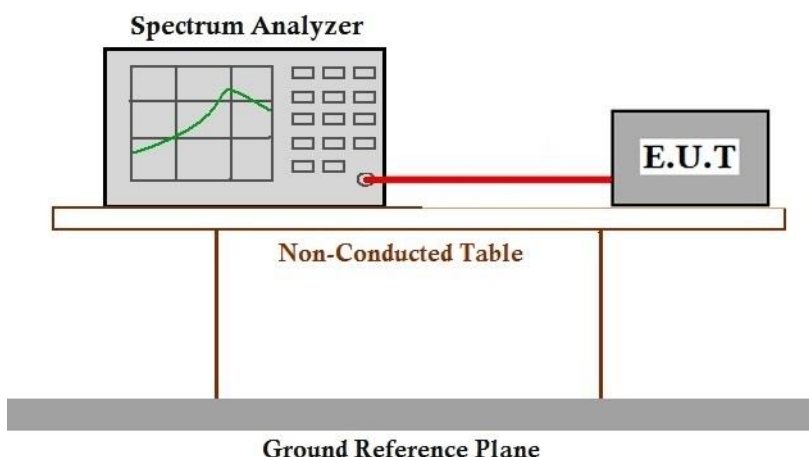

### 7.2.4 Measurement Procedure and Data

Please Refer to Appendix for Details

### 7.3 99% Bandwidth

Test Requirement N/A  
 Test Method: KDB 789033 II D


#### 7.3.1 E.U.T. Operation

Operating Environment:  
 Temperature: 21.2 °C Humidity: 52.8 % RH Atmospheric Pressure: 1003 mbar

#### 7.3.2 Test Mode Description

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 06           | TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |
| Final test               | 07           | TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

### 7.3.3 Test Setup Diagram

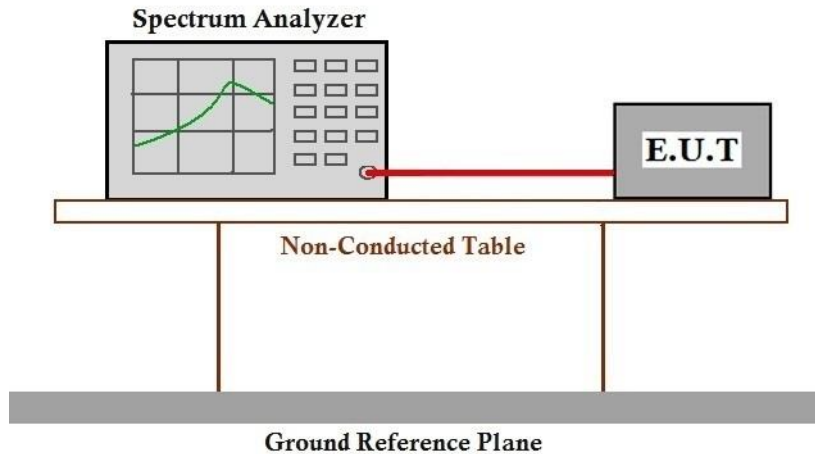

### 7.3.4 Measurement Procedure and Data

Please Refer to Appendix for Details



**7.4 26dB Emission bandwidth**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)  
Test Method: KDB 789033 D02 II C 1


**7.4.1 E.U.T. Operation**

Operating Environment:

Temperature: 21.2 °C Humidity: 52.8 % RH Atmospheric Pressure: 1003 mbar

**7.4.2 Test Mode Description**

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|--------------------------|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test               | 06           | TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |

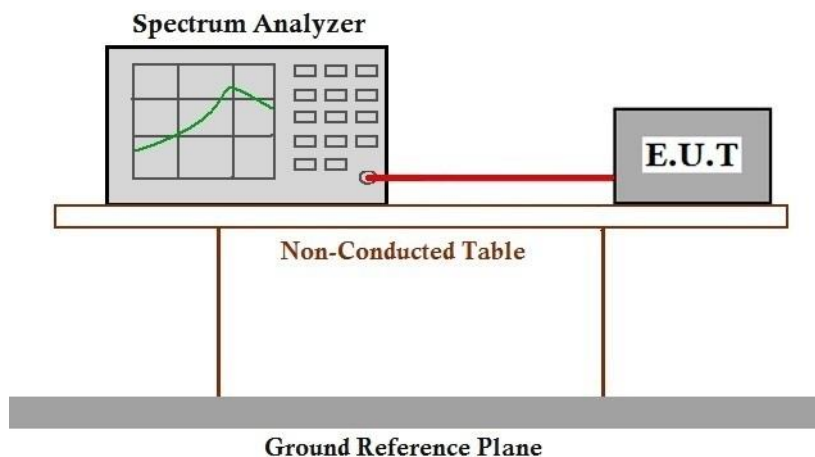**7.4.3 Test Setup Diagram****7.4.4 Measurement Procedure and Data**

Please Refer to Appendix for Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch  
Inspection & Testing Services

No.198 Kezhu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn  
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

**7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band )**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

| Frequency band(MHz) | Limit    |
|---------------------|----------|
| 5725-5850           | ≥500 kHz |

**7.5.1 E.U.T. Operation**

Operating Environment:

Temperature: 21.2 °C

Humidity: 52.8 % RH


Atmospheric Pressure: 1003 mbar

**7.5.2 Test Mode Description**

| Pre-scan / | Mode | Description |
|------------|------|-------------|
| Final test | Code |             |

Final test 07

TX mode (U-NII-3)\_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

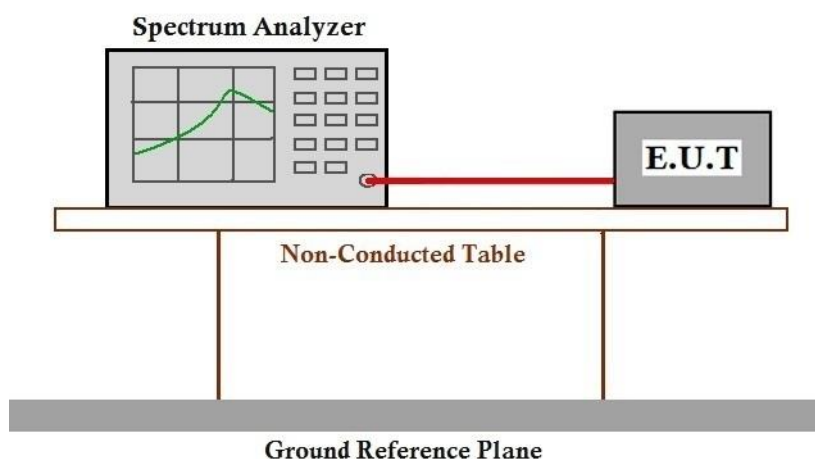**7.5.3 Test Setup Diagram****7.5.4 Measurement Procedure and Data**

Please Refer to Appendix for Details

**7.6 Maximum Conducted output power**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

| Frequency band(MHz) | Limit                                                                                                                                                                                                                                   |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5150-5250           | ≤1W(30dBm) for master device                                                                                                                                                                                                            |
|                     | ≤250mW(24dBm) for client device                                                                                                                                                                                                         |
| 5250-5350           | ≤250mW(24dBm) for client device or 11dBm+10logB*                                                                                                                                                                                        |
| 5470-5725           | ≤250mW(24dBm) for client device or 11dBm+10logB*                                                                                                                                                                                        |
| 5725-5850           | ≤1W(30dBm)                                                                                                                                                                                                                              |
| Remark:             | <p>* Where B is the 26dB emission bandwidth in MHz.</p> <p>The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.</p> |

**7.6.1 E.U.T. Operation**

Operating Environment:

Temperature: 21.2 °C Humidity: 52.8 % RH Atmospheric Pressure: 1003 mbar

**7.6.2 Test Mode Description**

| Pre-scan /<br>Final test | Mode<br>Code | Description |
|--------------------------|--------------|-------------|
|--------------------------|--------------|-------------|

Final test 06

TX mode (U-NII-1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

Final test 07


TX mode (U-NII-3)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

### 7.6.3 Test Setup Diagram

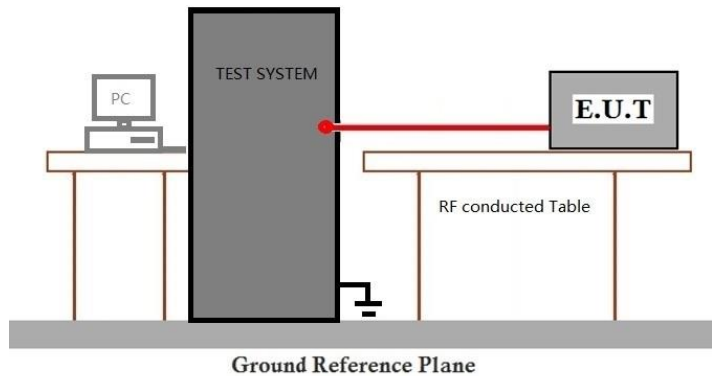

### 7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details



**7.7 Peak Power spectrum density**

Test Requirement 47 CFR Part 15, Subpart C 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

| Frequency band(MHz) | Limit                                                                                                                                                    |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| 5150-5250           | ≤17dBm in 1MHz for master device                                                                                                                         |
|                     | ≤11dBm in 1MHz for client device                                                                                                                         |
| 5250-5350           | ≤11dBm in 1MHz for client device                                                                                                                         |
| 5470-5725           | ≤11dBm in 1MHz for client device                                                                                                                         |
| 5725-5850           | ≤30dBm in 500 kHz                                                                                                                                        |
| Remark:             | The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. |

**7.7.1 E.U.T. Operation**

Operating Environment:

Temperature: 21.2 °C

Humidity: 52.8 % RH

Atmospheric Pressure: 1003 mbar


**7.7.2 Test Mode Description**

| Pre-scan / | Mode | Description |
|------------|------|-------------|
| Final test | Code |             |

|            |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test | 06 | TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |
|------------|----|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|            |    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Final test | 07 | TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |
|------------|----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 7.7.3 Test Setup Diagram

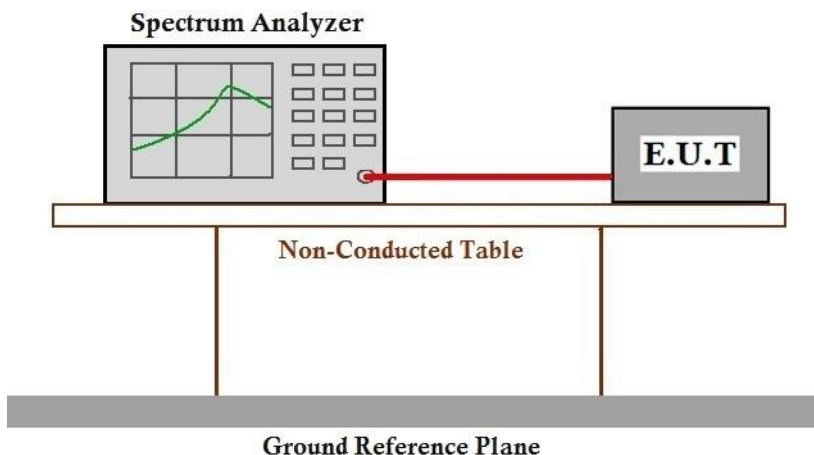

### 7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

**7.8 Radiated Emissions which fall in the restricted bands**

Test Requirement 47 CFR Part 15, Subpart C 15.209 &amp; 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

\*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**7.8.1 E.U.T. Operation**

Operating Environment:


Temperature: 22.5 °C Humidity: 52.7 % RH Atmospheric Pressure: 1003 mbar

**7.8.2 Test Mode Description**

| Pre-scan /<br>Final test | Mode<br>Code | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Pre-scan                 | 06           | TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.                       |
| Pre-scan                 | 07           | TX mode (U-NII-3)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.                       |
| Final test               | 08           | Charge + TX mode (U-NII-1)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |
| Final test               | 09           | Charge + TX mode (U-NII-3)_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report. |



### 7.8.3 Test Setup Diagram

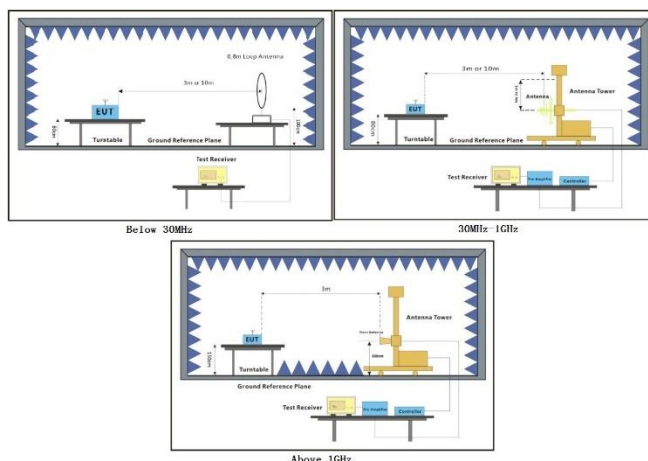


### 7.8.4 Measurement Procedure and Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the Highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.

Remark: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

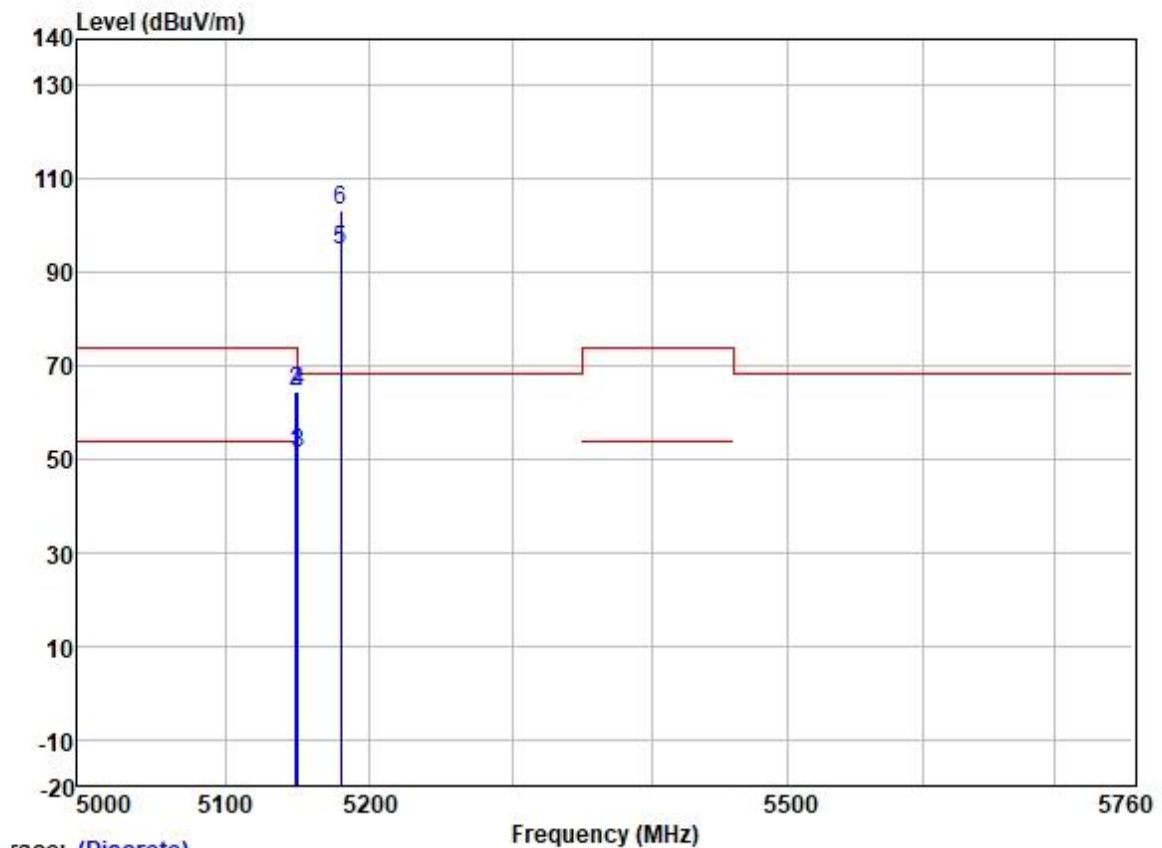

race: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5148.357 | 50.61  | 31.72   | 5.62  | 36.86  | 51.09  | 54.00  | -2.91     | HORIZONTAL Average |
| 2   | 5148.757 | 64.01  | 31.72   | 5.62  | 36.86  | 64.49  | 74.00  | -9.51     | HORIZONTAL Peak    |
| 3   | 5149.980 | 50.63  | 31.72   | 5.62  | 36.86  | 51.11  | 54.00  | -2.89     | HORIZONTAL Average |
| 4   | 5149.980 | 64.02  | 31.72   | 5.62  | 36.86  | 64.50  | 74.00  | -9.50     | HORIZONTAL Peak    |
| 5   | 5180.000 | 94.16  | 31.73   | 5.61  | 36.87  | 94.63  | -----  | -----     | HORIZONTAL Average |
| 6 * | 5180.000 | 102.99 | 31.73   | 5.61  | 36.87  | 103.46 | 68.20  | 35.26     | HORIZONTAL Peak    |

Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

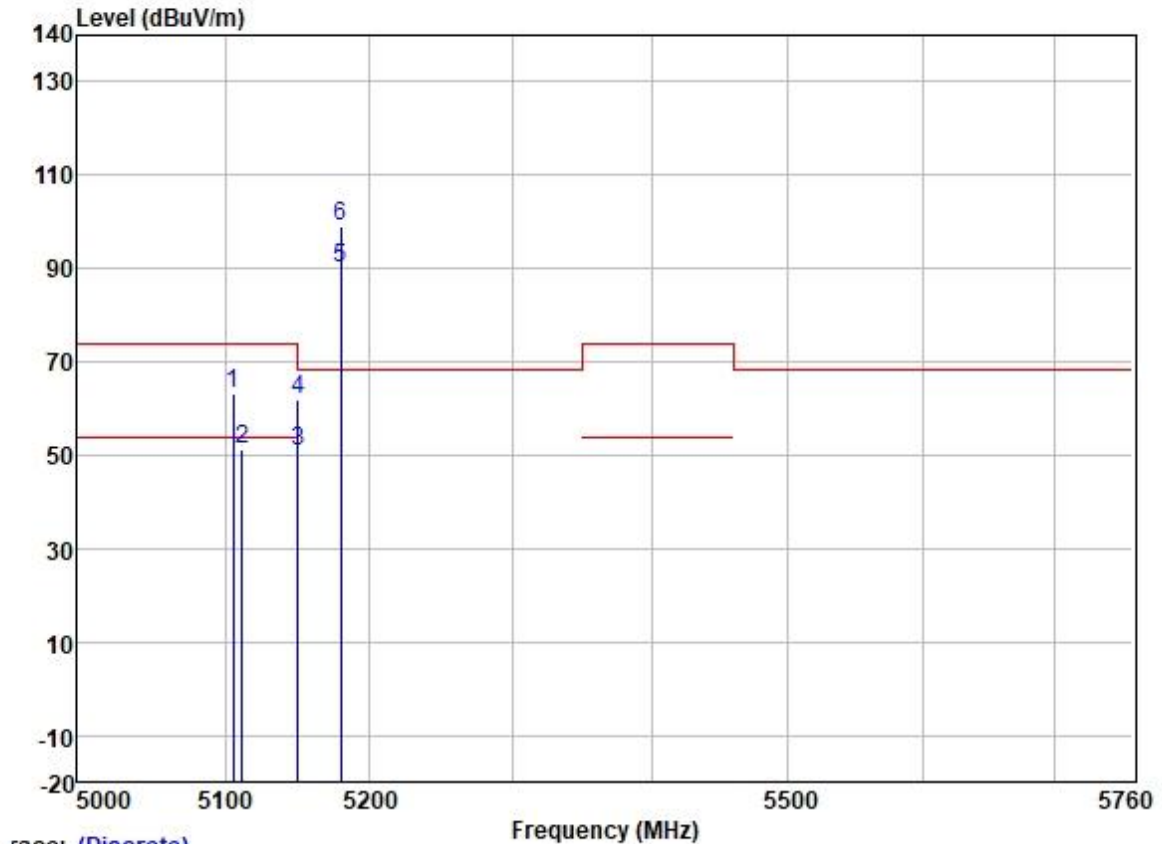


Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Level  | Limit  | Over   |           |         |
|-----|----------|-------|---------|-------|--------|--------|--------|--------|-----------|---------|
|     | MHz      | Level | Factor  | Loss  | Factor | dBuV/m | Line   | Limit  | Pol/Phase | Remark  |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |         |
| 1   | 5105.351 | 62.78 | 31.72   | 5.65  | 36.86  | 63.29  | 74.00  | -10.71 | VERTICAL  | Peak    |
| 2   | 5111.997 | 50.57 | 31.72   | 5.65  | 36.86  | 51.08  | 54.00  | -2.92  | VERTICAL  | Average |
| 3   | 5149.980 | 50.21 | 31.72   | 5.62  | 36.86  | 50.69  | 54.00  | -3.31  | VERTICAL  | Average |
| 4   | 5149.980 | 61.38 | 31.72   | 5.62  | 36.86  | 61.86  | 74.00  | -12.14 | VERTICAL  | Peak    |
| 5   | 5180.000 | 89.62 | 31.73   | 5.61  | 36.87  | 90.09  | -----  | -----  | VERTICAL  | Average |
| 6 * | 5180.000 | 98.60 | 31.73   | 5.61  | 36.87  | 99.07  | 68.20  | 30.87  | VERTICAL  | Peak    |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: High

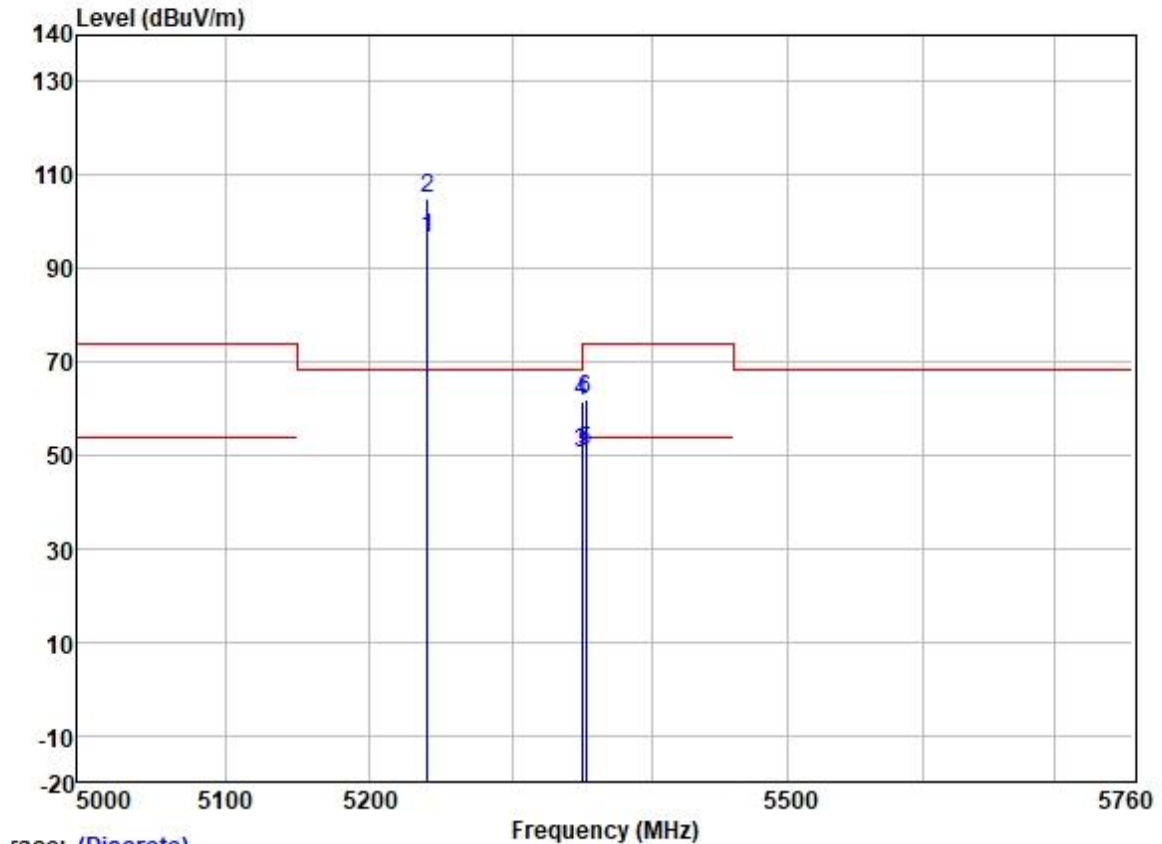

|     | Freq     | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |         |
|-----|----------|-------------|--------|--------|--------|--------|--------|--------|------------|---------|
|     | MHz      | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark  |
|     | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |         |
| 1   | 5240.000 | 95.80       | 31.75  | 5.74   | 36.87  | 96.42  | -----  | -----  | HORIZONTAL | Average |
| 2 * | 5240.000 | 104.32      | 31.75  | 5.74   | 36.87  | 104.94 | 68.20  | 36.74  | HORIZONTAL | Peak    |
| 3   | 5350.020 | 49.38       | 31.77  | 6.05   | 36.88  | 50.32  | 54.00  | -3.68  | HORIZONTAL | Average |
| 4   | 5350.020 | 60.42       | 31.77  | 6.05   | 36.88  | 61.36  | 74.00  | -12.64 | HORIZONTAL | Peak    |
| 5   | 5352.345 | 49.90       | 31.77  | 6.05   | 36.88  | 50.84  | 54.00  | -3.16  | HORIZONTAL | Average |
| 6   | 5352.345 | 61.18       | 31.77  | 6.05   | 36.88  | 62.12  | 74.00  | -11.88 | HORIZONTAL | Peak    |




Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: High

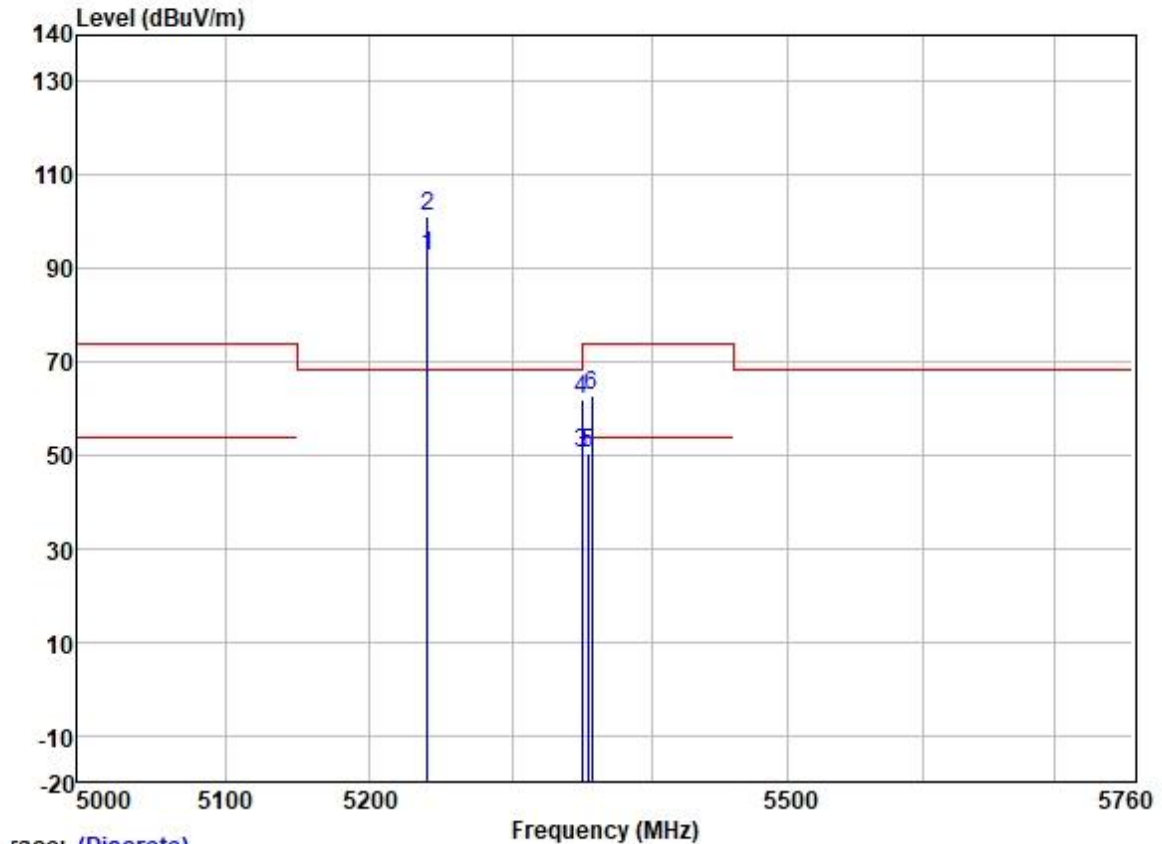

Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over  |                 |         |
|-----|----------|--------|---------|-------|--------|--------|-------|-----------------|---------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase       | Remark  |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dB    |                 |         |
| 1   | 5240.000 | 92.17  | 31.75   | 5.74  | 36.87  | 92.79  | ----- | VERTICAL        | Average |
| 2 * | 5240.000 | 100.43 | 31.75   | 5.74  | 36.87  | 101.05 | 68.20 | 32.85 VERTICAL  | Peak    |
| 3   | 5350.020 | 49.48  | 31.77   | 6.05  | 36.88  | 50.42  | 54.00 | -3.58 VERTICAL  | Average |
| 4   | 5350.020 | 60.92  | 31.77   | 6.05  | 36.88  | 61.86  | 74.00 | -12.14 VERTICAL | Peak    |
| 5   | 5354.045 | 49.54  | 31.77   | 6.05  | 36.88  | 50.48  | 54.00 | -3.52 VERTICAL  | Average |
| 6   | 5356.596 | 61.65  | 31.78   | 6.03  | 36.88  | 62.58  | 74.00 | -11.42 VERTICAL | Peak    |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

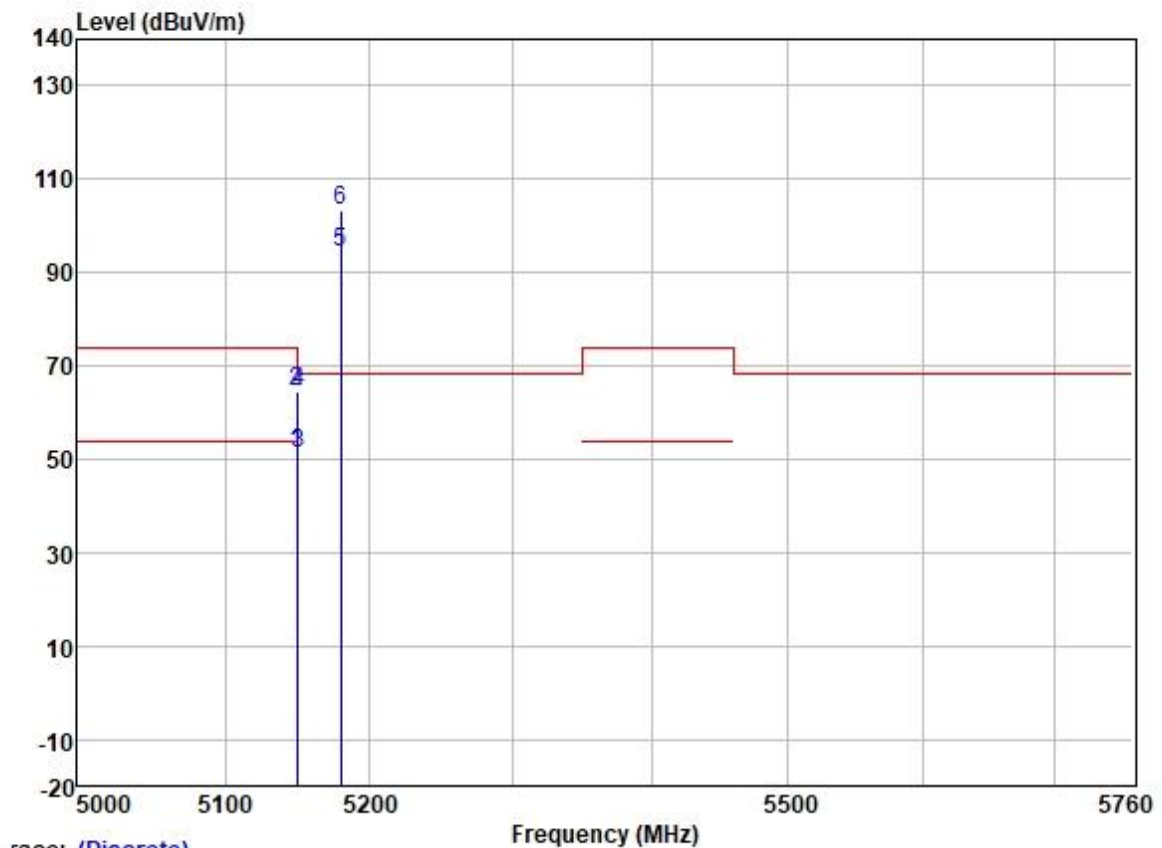

Trace: (Discrete)

|     | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level  | Limit  | Over Limit | Pol/Phase  | Remark  |
|-----|----------|------------|----------------|------------|---------------|--------|--------|------------|------------|---------|
|     | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m | dBuV/m | dB         |            |         |
| 1   | 5149.257 | 50.91      | 31.72          | 5.62       | 36.86         | 51.39  | 54.00  | -2.61      | HORIZONTAL | Average |
| 2   | 5149.257 | 63.99      | 31.72          | 5.62       | 36.86         | 64.47  | 74.00  | -9.53      | HORIZONTAL | Peak    |
| 3   | 5149.980 | 50.90      | 31.72          | 5.62       | 36.86         | 51.38  | 54.00  | -2.62      | HORIZONTAL | Average |
| 4   | 5149.980 | 64.08      | 31.72          | 5.62       | 36.86         | 64.56  | 74.00  | -9.44      | HORIZONTAL | Peak    |
| 5   | 5180.000 | 93.74      | 31.73          | 5.61       | 36.87         | 94.21  | -----  | -----      | HORIZONTAL | Average |
| 6 * | 5180.000 | 102.65     | 31.73          | 5.61       | 36.87         | 103.12 | 68.20  | 34.92      | HORIZONTAL | Peak    |


Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

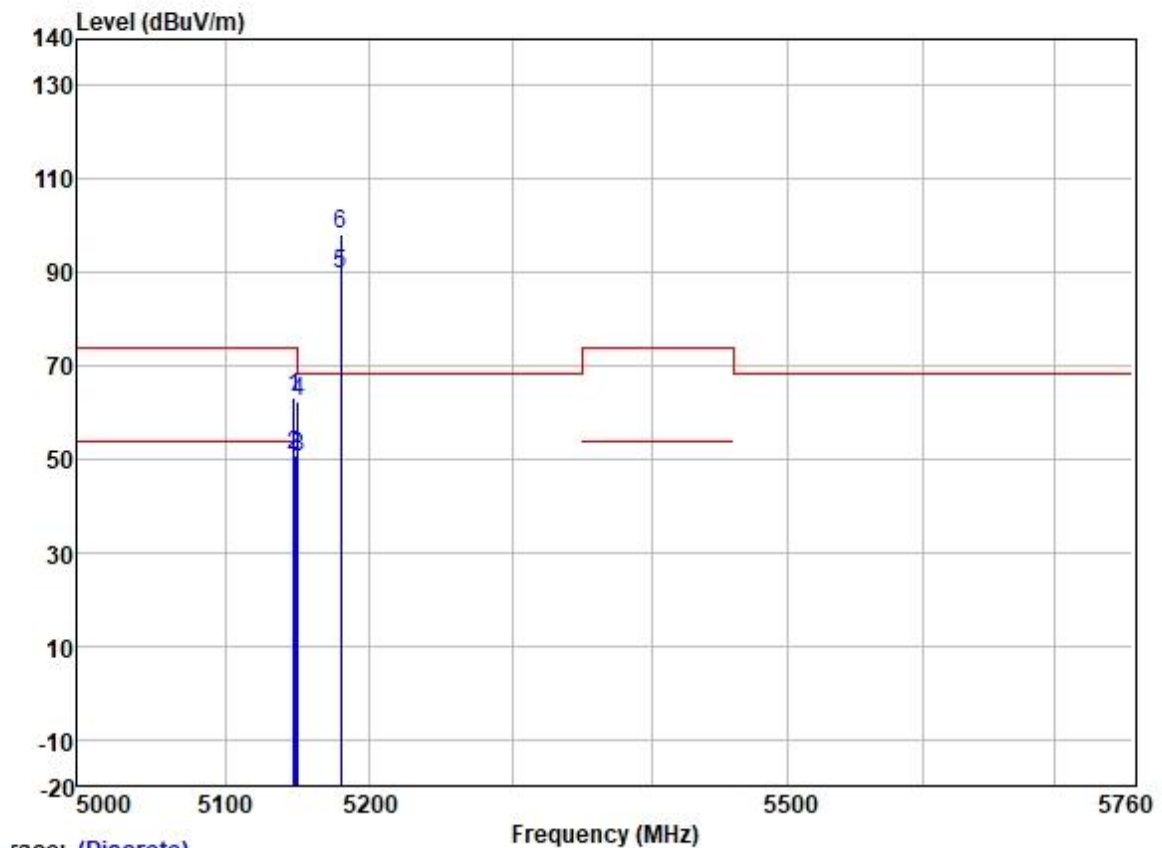

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5147.158 | 62.92 | 31.72   | 5.62  | 36.86  | 63.40  | 74.00  | -10.60    | VERTICAL Peak    |
| 2   | 5148.257 | 50.37 | 31.72   | 5.62  | 36.86  | 50.85  | 54.00  | -3.15     | VERTICAL Average |
| 3   | 5149.980 | 50.11 | 31.72   | 5.62  | 36.86  | 50.59  | 54.00  | -3.41     | VERTICAL Average |
| 4   | 5149.980 | 61.71 | 31.72   | 5.62  | 36.86  | 62.19  | 74.00  | -11.81    | VERTICAL Peak    |
| 5   | 5180.000 | 89.31 | 31.73   | 5.61  | 36.87  | 89.78  | -----  | -----     | VERTICAL Average |
| 6 * | 5180.000 | 97.90 | 31.73   | 5.61  | 36.87  | 98.37  | 68.20  | 30.17     | VERTICAL Peak    |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: High

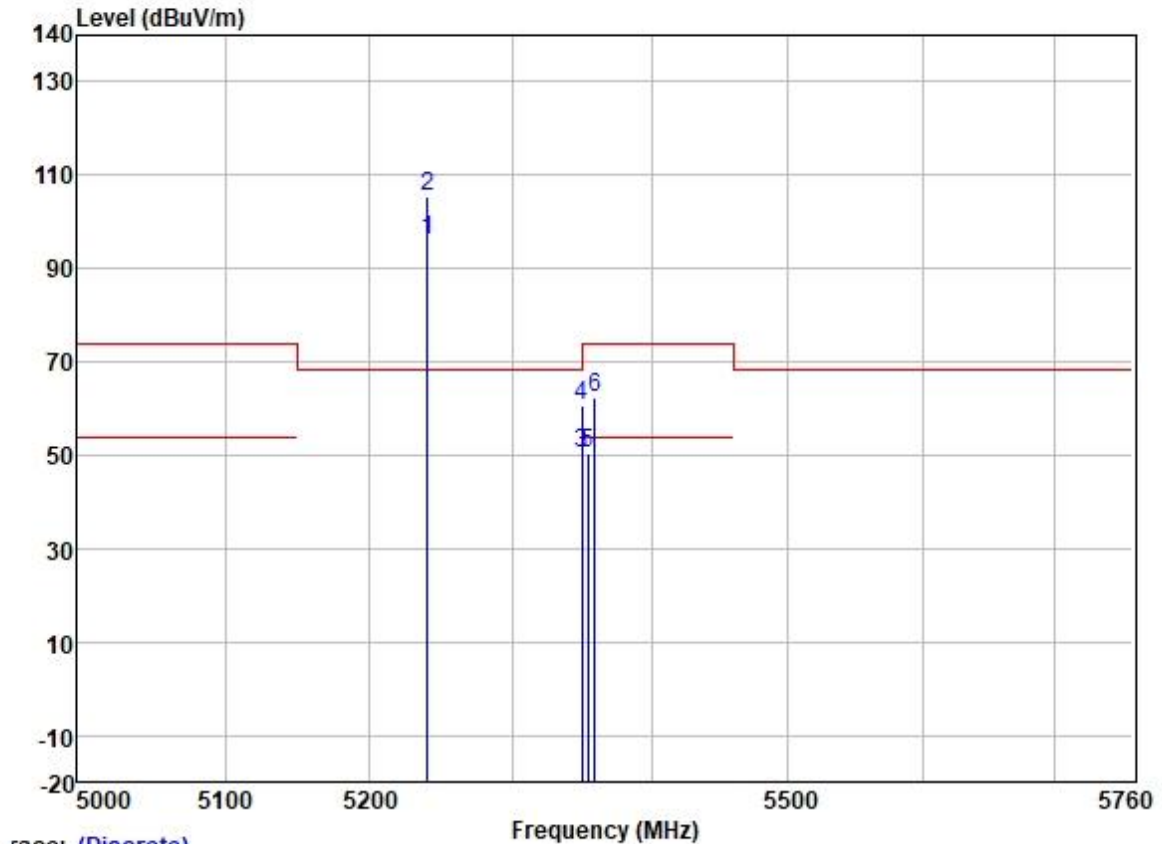


Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5240.000 | 95.52  | 31.75   | 5.74  | 36.87  | 96.14  | -----  | -----     | HORIZONTAL Average |
| 2 * | 5240.000 | 104.63 | 31.75   | 5.74  | 36.87  | 105.25 | 68.20  | 37.05     | HORIZONTAL Peak    |
| 3   | 5350.020 | 49.27  | 31.77   | 6.05  | 36.88  | 50.21  | 54.00  | -3.79     | HORIZONTAL Average |
| 4   | 5350.020 | 59.91  | 31.77   | 6.05  | 36.88  | 60.85  | 74.00  | -13.15    | HORIZONTAL Peak    |
| 5   | 5354.329 | 49.53  | 31.78   | 6.03  | 36.88  | 50.46  | 54.00  | -3.54     | HORIZONTAL Average |
| 6   | 5358.865 | 61.32  | 31.78   | 6.03  | 36.88  | 62.25  | 74.00  | -11.75    | HORIZONTAL Peak    |




Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

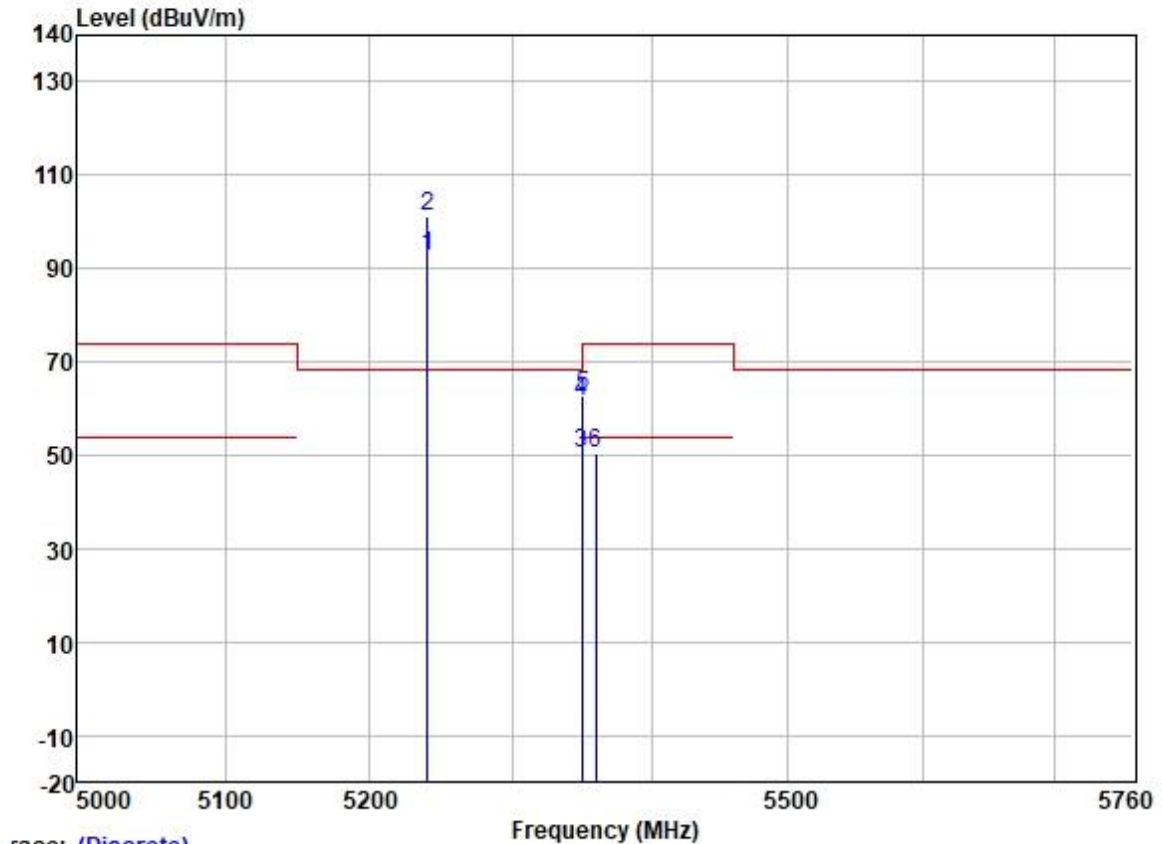

Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5240.000 | 91.90  | 31.75   | 5.74  | 36.87  | 92.52  | -----  | -----     | VERTICAL Average |
| 2 * | 5240.000 | 100.51 | 31.75   | 5.74  | 36.87  | 101.13 | 68.20  | 32.93     | VERTICAL Peak    |
| 3   | 5350.020 | 49.34  | 31.77   | 6.05  | 36.88  | 50.28  | 54.00  | -3.72     | VERTICAL Average |
| 4   | 5350.020 | 60.56  | 31.77   | 6.05  | 36.88  | 61.50  | 74.00  | -12.50    | VERTICAL Peak    |
| 5   | 5350.787 | 62.01  | 31.77   | 6.05  | 36.88  | 62.95  | 74.00  | -11.05    | VERTICAL Peak    |
| 6   | 5359.433 | 49.68  | 31.78   | 6.03  | 36.88  | 50.61  | 54.00  | -3.39     | VERTICAL Average |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

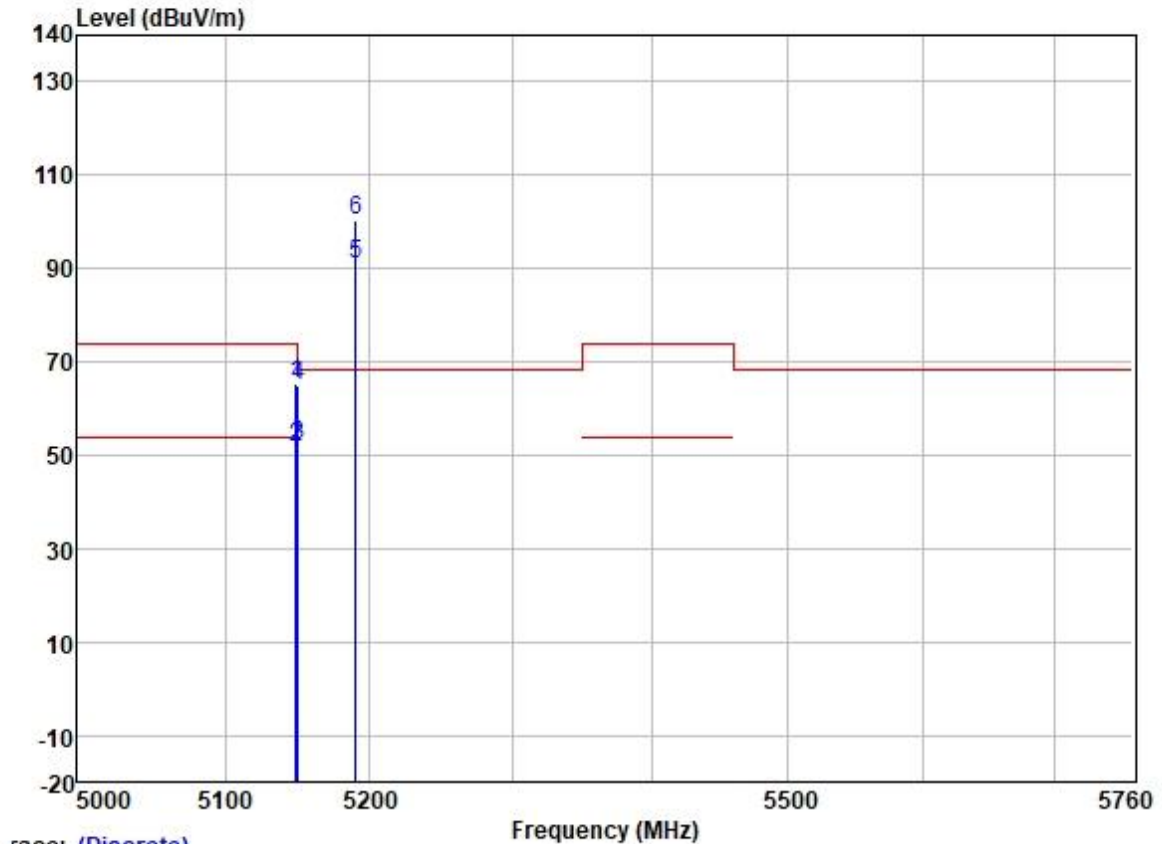

Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5148.982 | 64.94 | 31.72   | 5.62  | 36.86  | 65.42  | 74.00  | -8.58     | HORIZONTAL Peak    |
| 2   | 5149.461 | 51.27 | 31.72   | 5.62  | 36.86  | 51.75  | 54.00  | -2.25     | HORIZONTAL Average |
| 3   | 5149.980 | 51.46 | 31.72   | 5.62  | 36.86  | 51.94  | 54.00  | -2.06     | HORIZONTAL Average |
| 4   | 5149.980 | 64.39 | 31.72   | 5.62  | 36.86  | 64.87  | 74.00  | -9.13     | HORIZONTAL Peak    |
| 5   | 5190.000 | 90.64 | 31.73   | 5.60  | 36.87  | 91.10  | -----  | -----     | HORIZONTAL Average |
| 6 * | 5190.000 | 99.65 | 31.73   | 5.60  | 36.87  | 100.11 | 68.20  | 31.91     | HORIZONTAL Peak    |

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

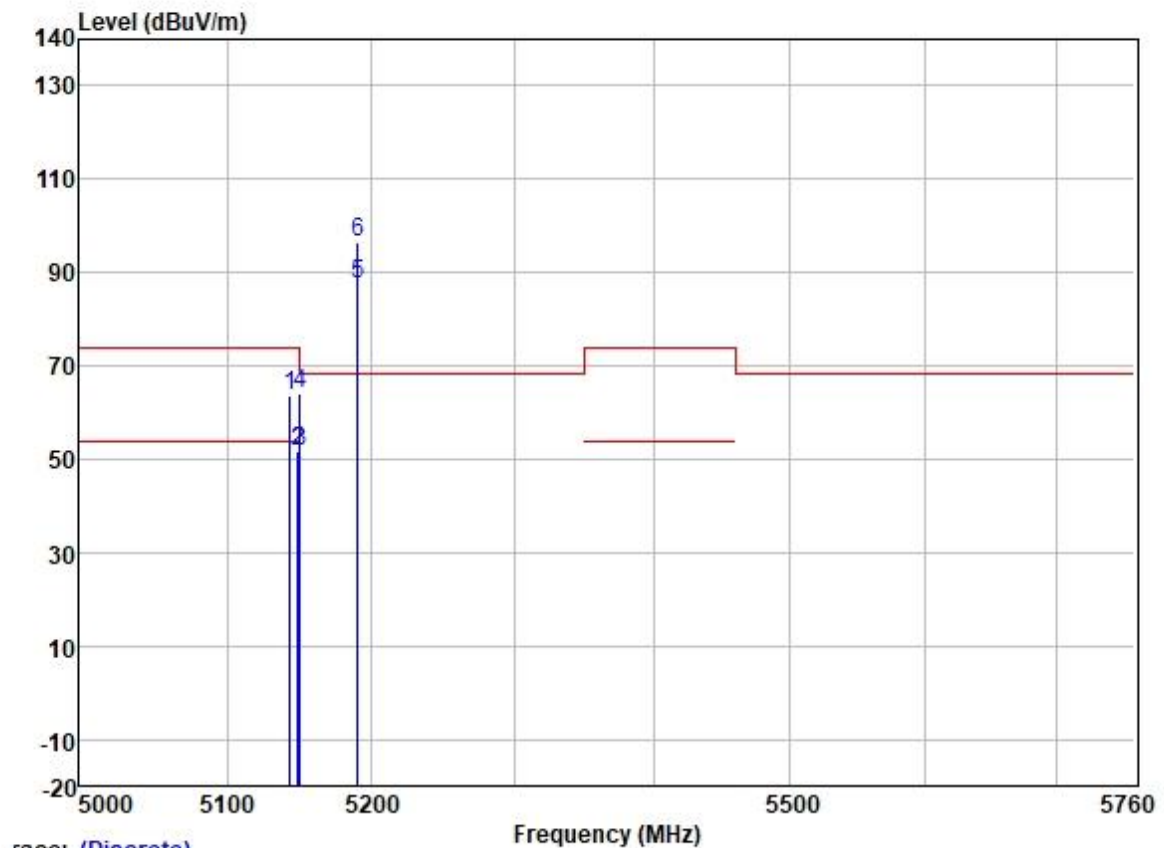


Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5143.357 | 63.08 | 31.72   | 5.62  | 36.86  | 63.56  | 74.00  | -10.44    | VERTICAL Peak    |
| 2   | 5148.863 | 51.10 | 31.72   | 5.62  | 36.86  | 51.58  | 54.00  | -2.42     | VERTICAL Average |
| 3   | 5149.980 | 51.32 | 31.72   | 5.62  | 36.86  | 51.80  | 54.00  | -2.20     | VERTICAL Average |
| 4   | 5149.980 | 63.37 | 31.72   | 5.62  | 36.86  | 63.85  | 74.00  | -10.15    | VERTICAL Peak    |
| 5   | 5190.000 | 86.94 | 31.73   | 5.60  | 36.87  | 87.40  | -----  | -----     | VERTICAL Average |
| 6 * | 5190.000 | 96.16 | 31.73   | 5.60  | 36.87  | 96.62  | 68.20  | 28.42     | VERTICAL Peak    |



Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

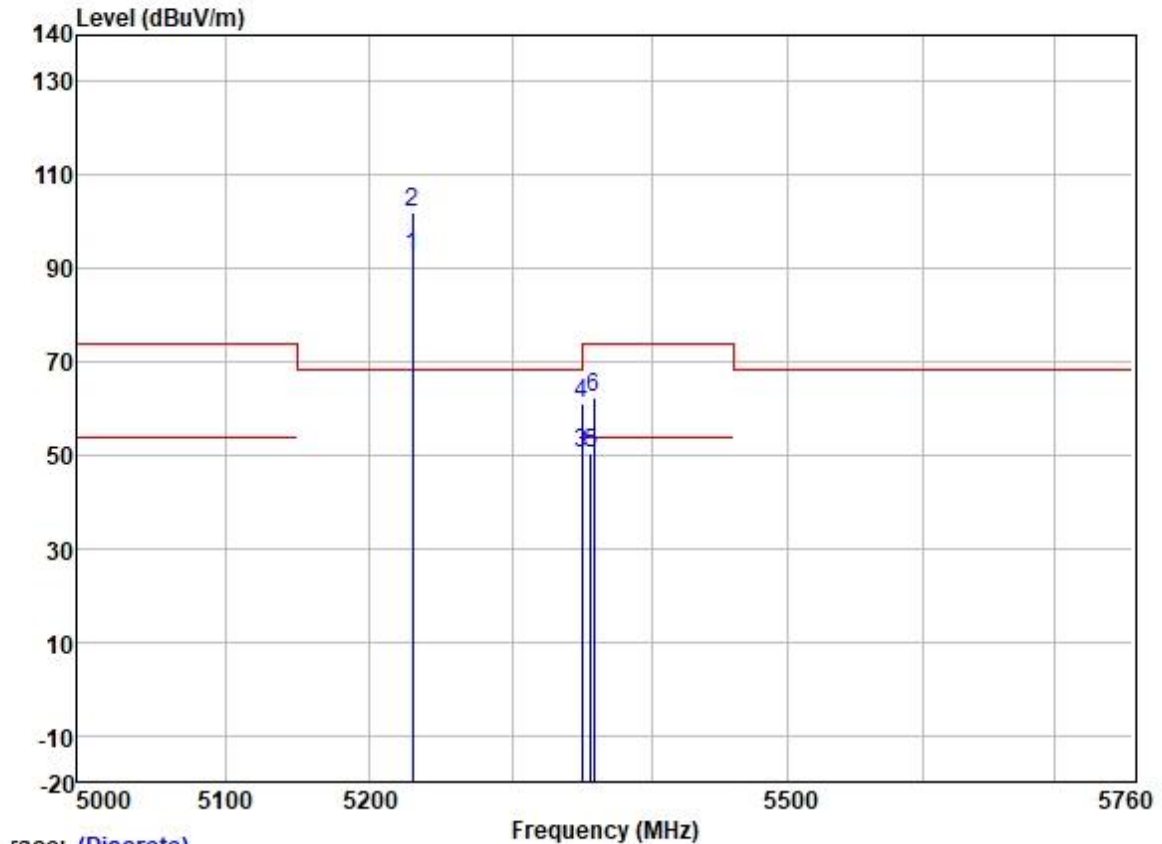


Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5230.000 | 92.01  | 31.74   | 5.70  | 36.87  | 92.58  | -----  | -----     | HORIZONTAL Average |
| 2 * | 5230.000 | 101.43 | 31.74   | 5.70  | 36.87  | 102.00 | 68.20  | 33.80     | HORIZONTAL Peak    |
| 3   | 5350.020 | 49.32  | 31.77   | 6.05  | 36.88  | 50.26  | 54.00  | -3.74     | HORIZONTAL Average |
| 4   | 5350.020 | 60.25  | 31.77   | 6.05  | 36.88  | 61.19  | 74.00  | -12.81    | HORIZONTAL Peak    |
| 5   | 5355.940 | 49.49  | 31.78   | 6.03  | 36.88  | 50.42  | 54.00  | -3.58     | HORIZONTAL Average |
| 6   | 5358.376 | 61.55  | 31.78   | 6.03  | 36.88  | 62.48  | 74.00  | -11.52    | HORIZONTAL Peak    |




Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: High

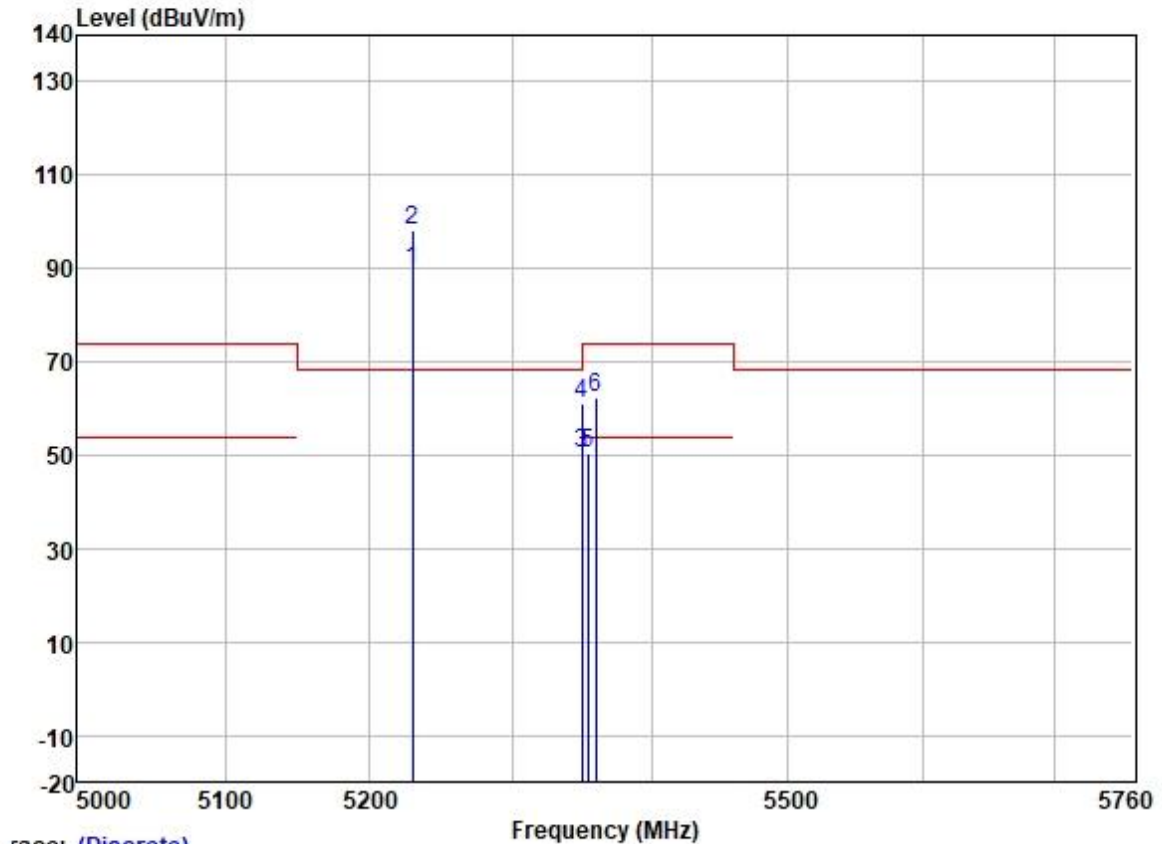

Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5230.000 | 89.01 | 31.74   | 5.70  | 36.87  | 89.58  | -----  | -----     | VERTICAL Average |
| 2 * | 5230.000 | 97.50 | 31.74   | 5.70  | 36.87  | 98.07  | 68.20  | 29.87     | VERTICAL Peak    |
| 3   | 5350.020 | 49.26 | 31.77   | 6.05  | 36.88  | 50.20  | 54.00  | -3.80     | VERTICAL Average |
| 4   | 5350.020 | 60.00 | 31.77   | 6.05  | 36.88  | 60.94  | 74.00  | -13.06    | VERTICAL Peak    |
| 5   | 5353.993 | 49.52 | 31.77   | 6.05  | 36.88  | 50.46  | 54.00  | -3.54     | VERTICAL Average |
| 6   | 5359.675 | 61.23 | 31.78   | 6.03  | 36.88  | 62.16  | 74.00  | -11.84    | VERTICAL Peak    |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

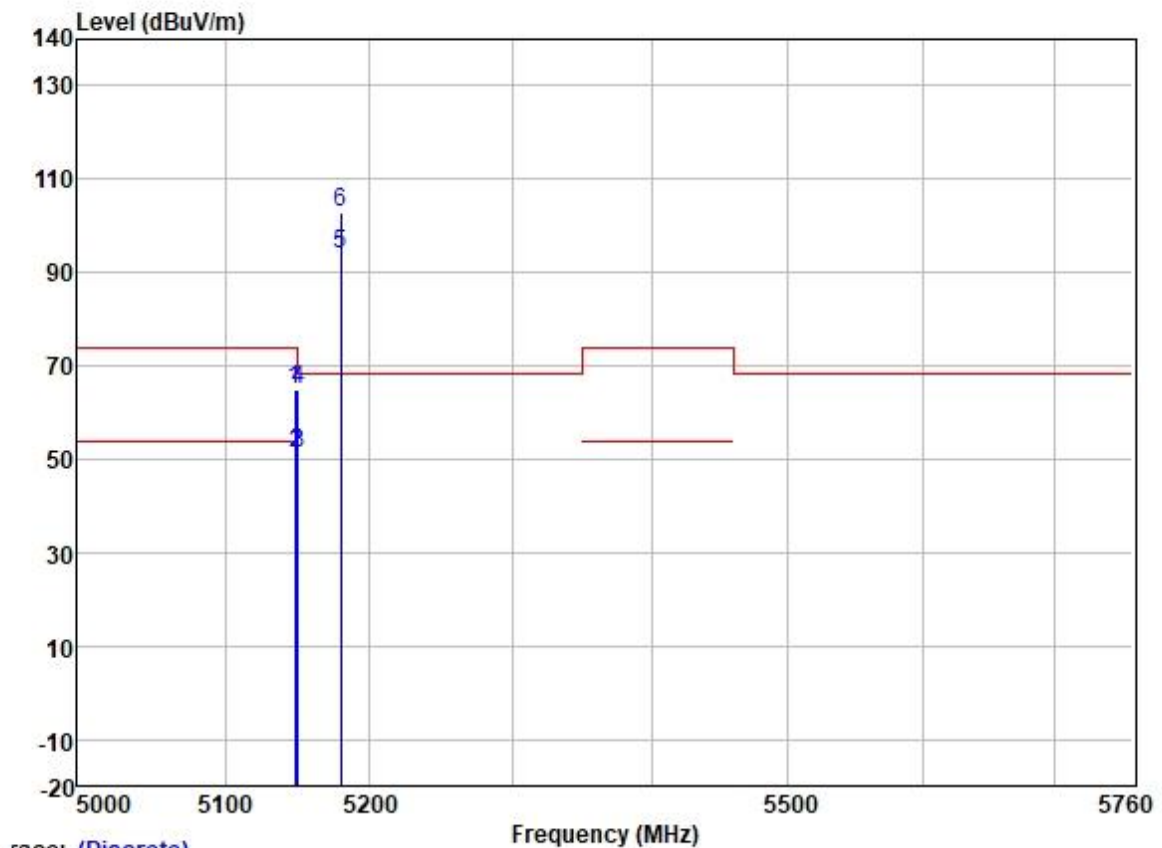

Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5148.257 | 64.44  | 31.72   | 5.62  | 36.86  | 64.92  | 74.00  | -9.08     | HORIZONTAL Peak    |
| 2   | 5148.958 | 50.75  | 31.72   | 5.62  | 36.86  | 51.23  | 54.00  | -2.77     | HORIZONTAL Average |
| 3   | 5149.980 | 50.91  | 31.72   | 5.62  | 36.86  | 51.39  | 54.00  | -2.61     | HORIZONTAL Average |
| 4   | 5149.980 | 64.55  | 31.72   | 5.62  | 36.86  | 65.03  | 74.00  | -8.97     | HORIZONTAL Peak    |
| 5   | 5180.000 | 93.52  | 31.73   | 5.61  | 36.87  | 93.99  | -----  | -----     | HORIZONTAL Average |
| 6 * | 5180.000 | 102.21 | 31.73   | 5.61  | 36.87  | 102.68 | 68.20  | 34.48     | HORIZONTAL Peak    |


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

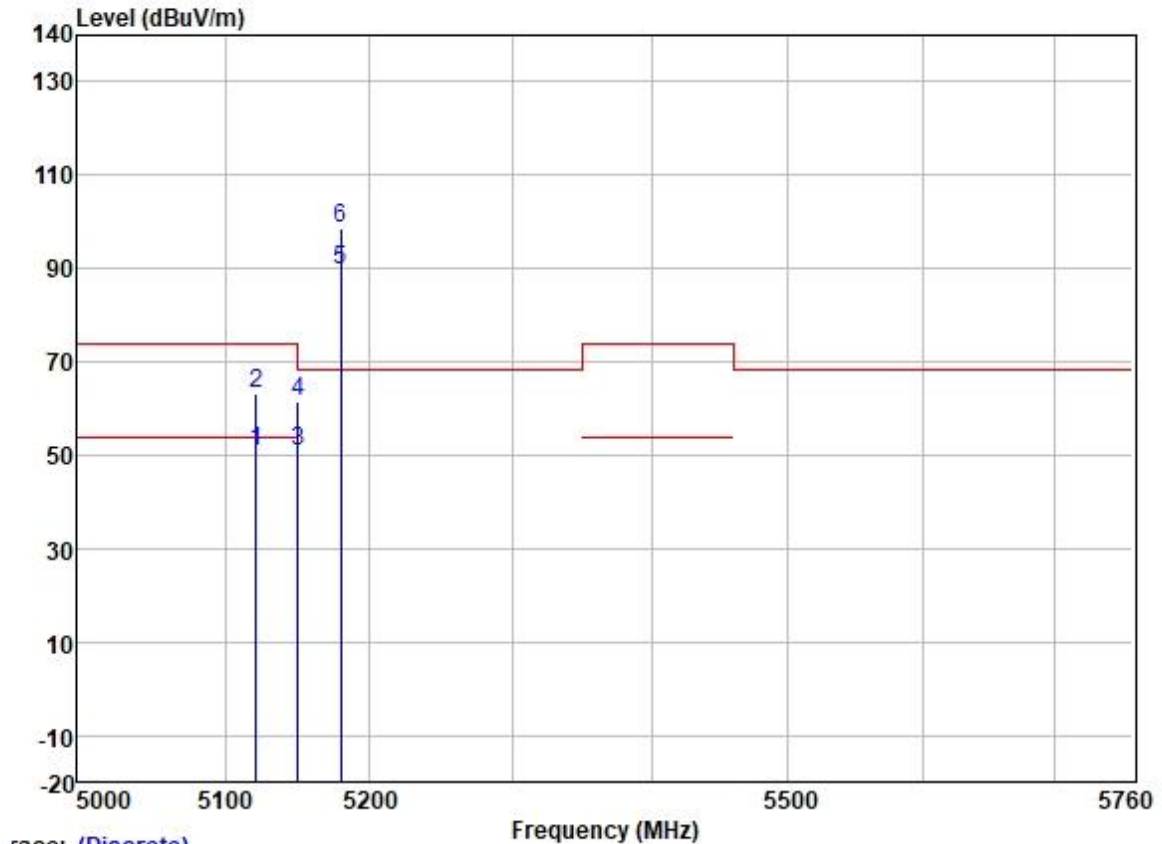

|     | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level  | Limit Line | Over Limit | Pol/Phase | Remark  |
|-----|----------|------------|----------------|------------|---------------|--------|------------|------------|-----------|---------|
|     | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m | dBuV/m     | dB         |           |         |
| 1   | 5121.336 | 50.33      | 31.72          | 5.64       | 36.86         | 50.83  | 54.00      | -3.17      | VERTICAL  | Average |
| 2   | 5121.336 | 62.70      | 31.72          | 5.64       | 36.86         | 63.20  | 74.00      | -10.80     | VERTICAL  | Peak    |
| 3   | 5149.980 | 50.14      | 31.72          | 5.62       | 36.86         | 50.62  | 54.00      | -3.38      | VERTICAL  | Average |
| 4   | 5149.980 | 61.09      | 31.72          | 5.62       | 36.86         | 61.57  | 74.00      | -12.43     | VERTICAL  | Peak    |
| 5   | 5180.000 | 89.29      | 31.73          | 5.61       | 36.87         | 89.76  | -----      | -----      | VERTICAL  | Average |
| 6 * | 5180.000 | 98.16      | 31.73          | 5.61       | 36.87         | 98.63  | 68.20      | 30.43      | VERTICAL  | Peak    |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: High

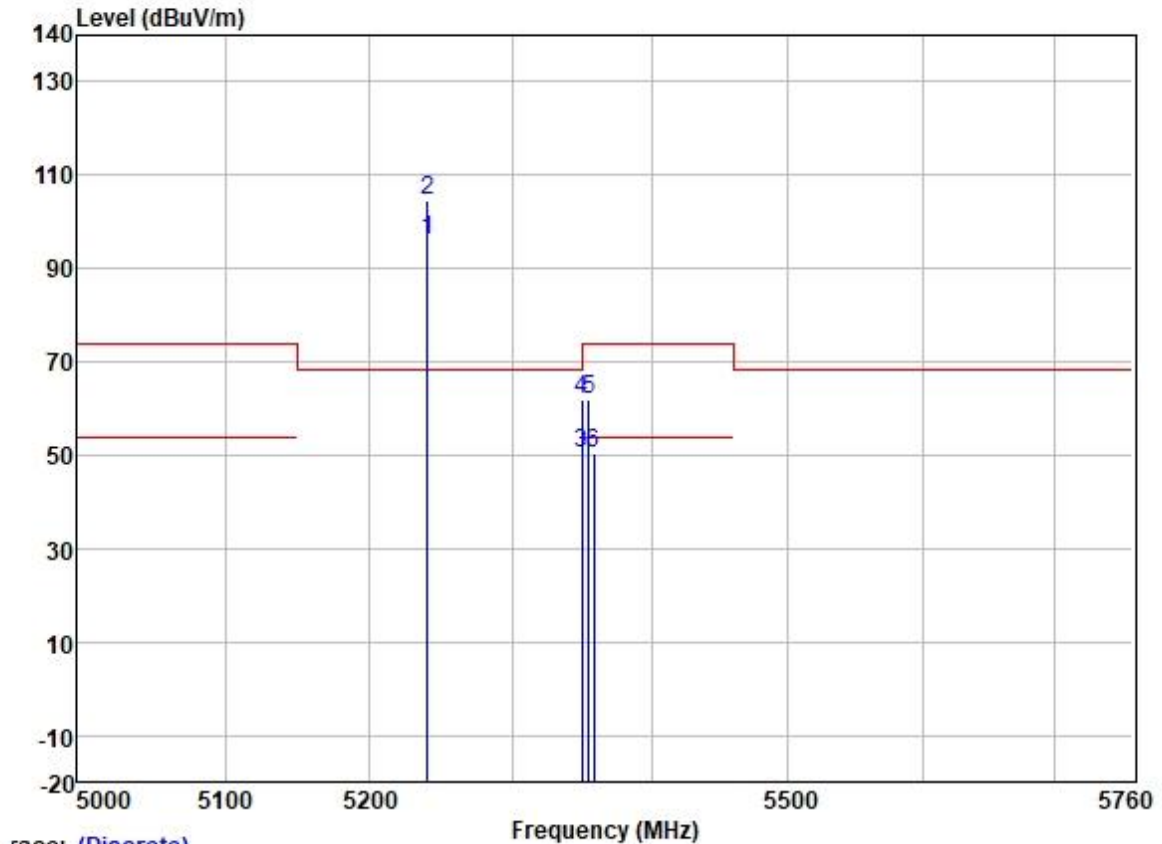


Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5240.000 | 95.36  | 31.75   | 5.74  | 36.87  | 95.98  | -----  | -----     | HORIZONTAL Average |
| 2 * | 5240.000 | 103.84 | 31.75   | 5.74  | 36.87  | 104.46 | 68.20  | 36.26     | HORIZONTAL Peak    |
| 3   | 5350.020 | 49.34  | 31.77   | 6.05  | 36.88  | 50.28  | 54.00  | -3.72     | HORIZONTAL Average |
| 4   | 5350.020 | 60.83  | 31.77   | 6.05  | 36.88  | 61.77  | 74.00  | -12.23    | HORIZONTAL Peak    |
| 5   | 5354.896 | 61.18  | 31.78   | 6.03  | 36.88  | 62.11  | 74.00  | -11.89    | HORIZONTAL Peak    |
| 6   | 5358.014 | 49.51  | 31.78   | 6.03  | 36.88  | 50.44  | 54.00  | -3.56     | HORIZONTAL Average |




Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: High

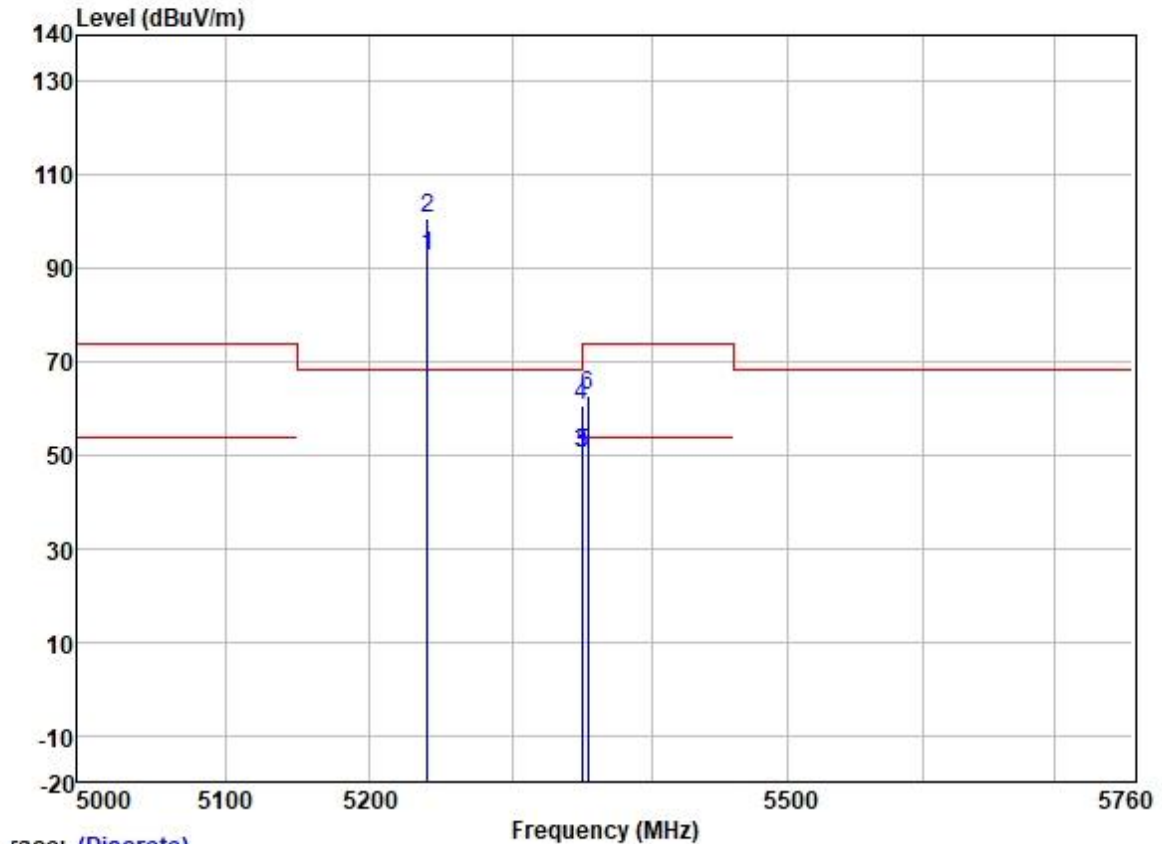

Trace: (Discrete)


|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5240.000 | 91.83  | 31.75   | 5.74  | 36.87  | 92.45  | -----  | -----     | VERTICAL Average |
| 2 * | 5240.000 | 100.28 | 31.75   | 5.74  | 36.87  | 100.90 | 68.20  | 32.70     | VERTICAL Peak    |
| 3   | 5350.020 | 49.26  | 31.77   | 6.05  | 36.88  | 50.20  | 54.00  | -3.80     | VERTICAL Average |
| 4   | 5350.020 | 59.91  | 31.77   | 6.05  | 36.88  | 60.85  | 74.00  | -13.15    | VERTICAL Peak    |
| 5   | 5350.787 | 49.62  | 31.77   | 6.05  | 36.88  | 50.56  | 54.00  | -3.44     | VERTICAL Average |
| 6   | 5354.045 | 61.65  | 31.77   | 6.05  | 36.88  | 62.59  | 74.00  | -11.41    | VERTICAL Peak    |

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

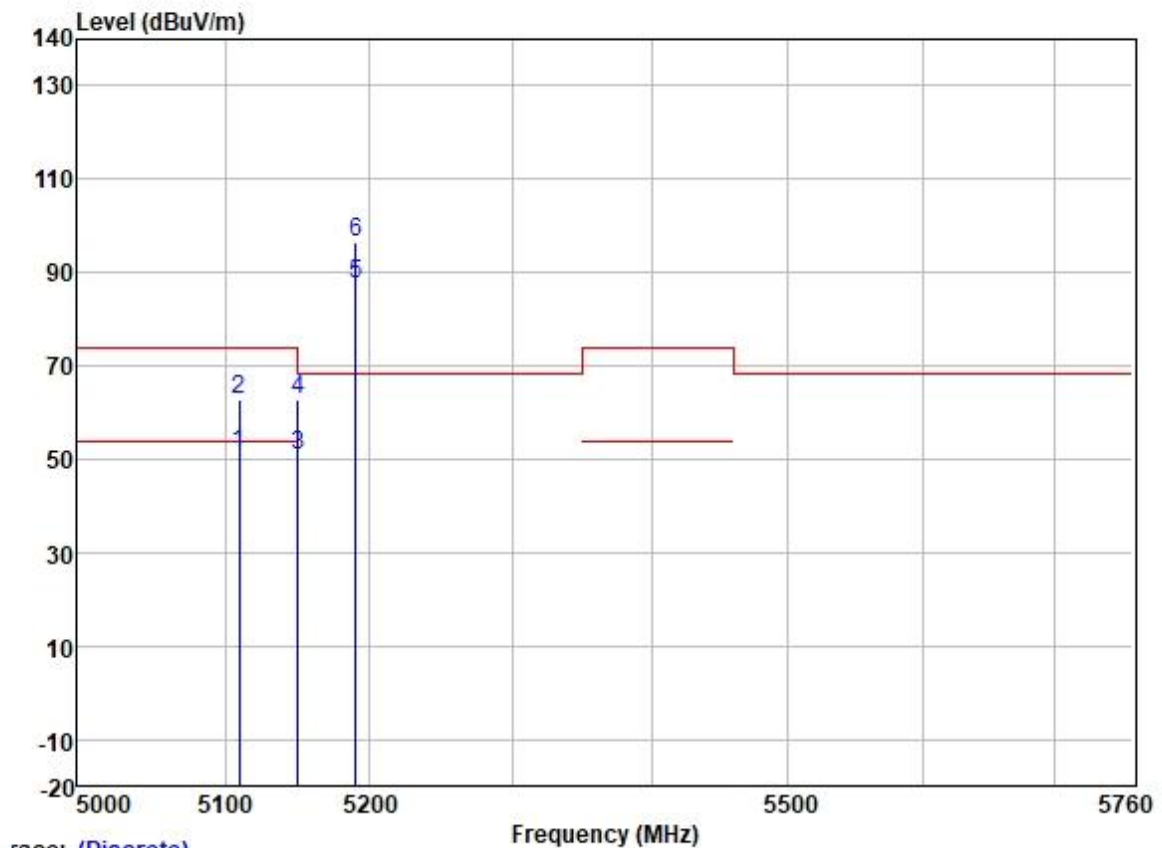

|     | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level  | Limit  | Over Limit | Pol/Phase  | Remark  |
|-----|----------|------------|----------------|------------|---------------|--------|--------|------------|------------|---------|
|     | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m | dBuV/m | dB         |            |         |
| 1   | 5109.735 | 50.64      | 31.72          | 5.65       | 36.86         | 51.15  | 54.00  | -2.85      | HORIZONTAL | Average |
| 2   | 5109.735 | 62.31      | 31.72          | 5.65       | 36.86         | 62.82  | 74.00  | -11.18     | HORIZONTAL | Peak    |
| 3   | 5149.980 | 50.42      | 31.72          | 5.62       | 36.86         | 50.90  | 54.00  | -3.10      | HORIZONTAL | Average |
| 4   | 5149.980 | 62.30      | 31.72          | 5.62       | 36.86         | 62.78  | 74.00  | -11.22     | HORIZONTAL | Peak    |
| 5   | 5190.000 | 86.95      | 31.73          | 5.60       | 36.87         | 87.41  | -----  | -----      | HORIZONTAL | Average |
| 6 * | 5190.000 | 95.92      | 31.73          | 5.60       | 36.87         | 96.38  | 68.20  | 28.18      | HORIZONTAL | Peak    |


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

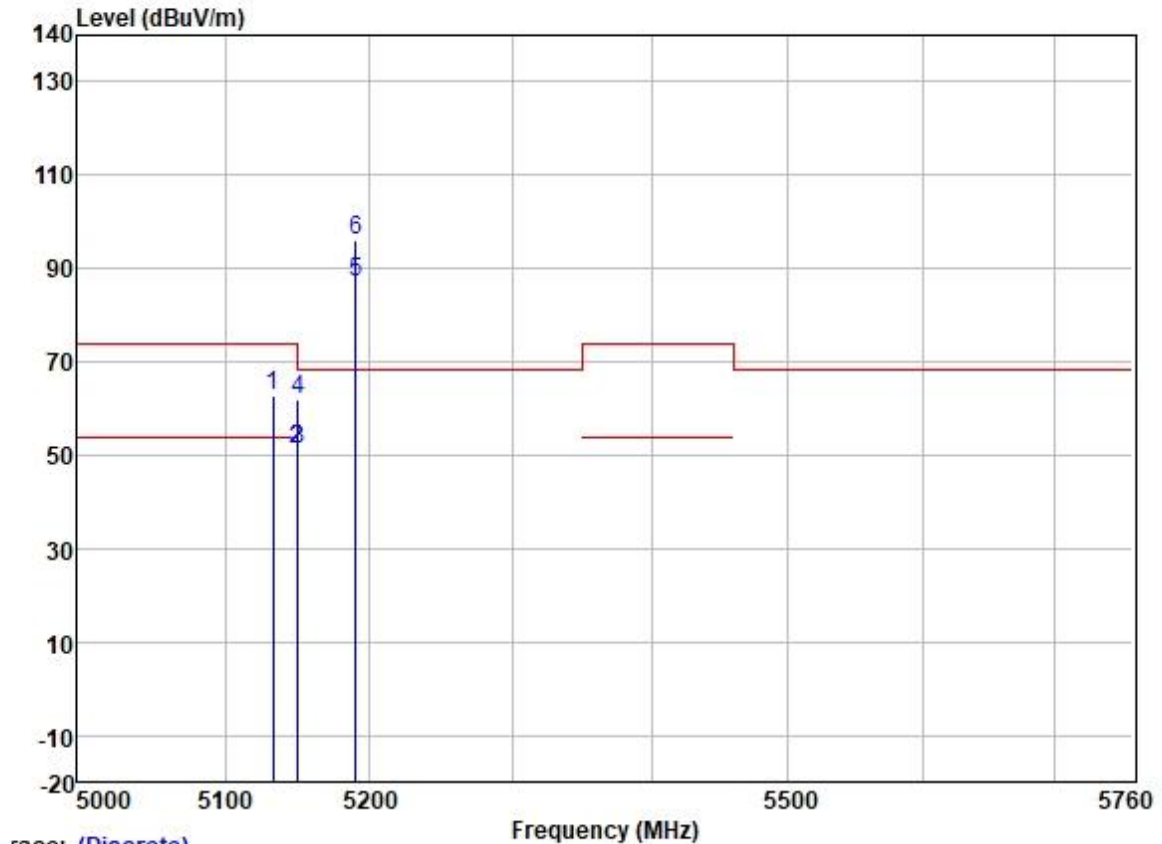

|     | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Level  | Limit  | Over Limit | Pol/Phase | Remark  |
|-----|----------|------------|----------------|------------|---------------|--------|--------|------------|-----------|---------|
|     | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m | dBuV/m | dB         |           |         |
| 1   | 5132.722 | 62.18      | 31.72          | 5.63       | 36.86         | 62.67  | 74.00  | -11.33     | VERTICAL  | Peak    |
| 2   | 5149.342 | 50.56      | 31.72          | 5.62       | 36.86         | 51.04  | 54.00  | -2.96      | VERTICAL  | Average |
| 3   | 5149.980 | 50.67      | 31.72          | 5.62       | 36.86         | 51.15  | 54.00  | -2.85      | VERTICAL  | Average |
| 4   | 5149.980 | 61.42      | 31.72          | 5.62       | 36.86         | 61.90  | 74.00  | -12.10     | VERTICAL  | Peak    |
| 5   | 5190.000 | 86.80      | 31.73          | 5.60       | 36.87         | 87.26  | -----  | -----      | VERTICAL  | Average |
| 6 * | 5190.000 | 95.72      | 31.73          | 5.60       | 36.87         | 96.18  | 68.20  | 27.98      | VERTICAL  | Peak    |



Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: High

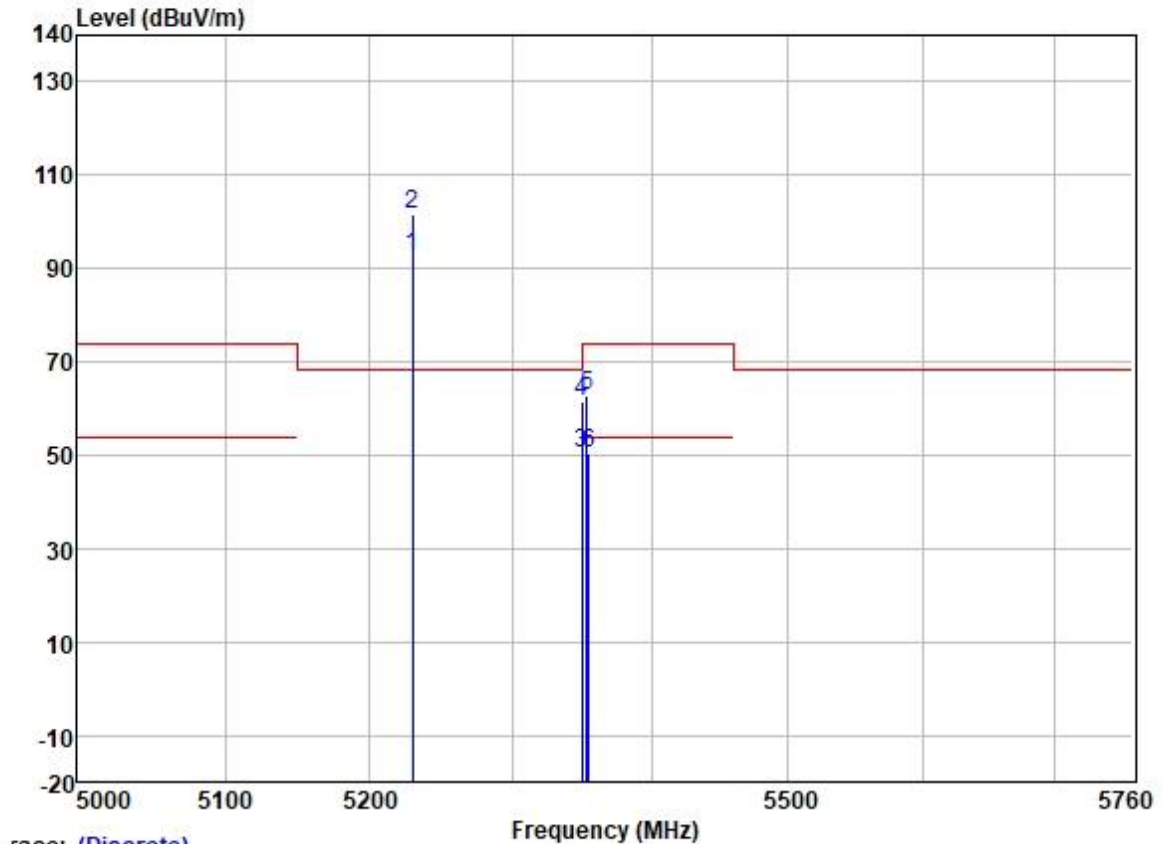


Trace: (Discrete)

|     | Freq     | Read   | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|--------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level  | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5230.000 | 91.91  | 31.74   | 5.70  | 36.87  | 92.48  | -----  | -----     | HORIZONTAL Average |
| 2 * | 5230.000 | 100.95 | 31.74   | 5.70  | 36.87  | 101.52 | 68.20  | 33.32     | HORIZONTAL Peak    |
| 3   | 5350.020 | 49.29  | 31.77   | 6.05  | 36.88  | 50.23  | 54.00  | -3.77     | HORIZONTAL Average |
| 4   | 5350.020 | 60.47  | 31.77   | 6.05  | 36.88  | 61.41  | 74.00  | -12.59    | HORIZONTAL Peak    |
| 5   | 5353.182 | 61.99  | 31.77   | 6.05  | 36.88  | 62.93  | 74.00  | -11.07    | HORIZONTAL Peak    |
| 6   | 5354.480 | 49.63  | 31.78   | 6.03  | 36.88  | 50.56  | 54.00  | -3.44     | HORIZONTAL Average |




Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel: High

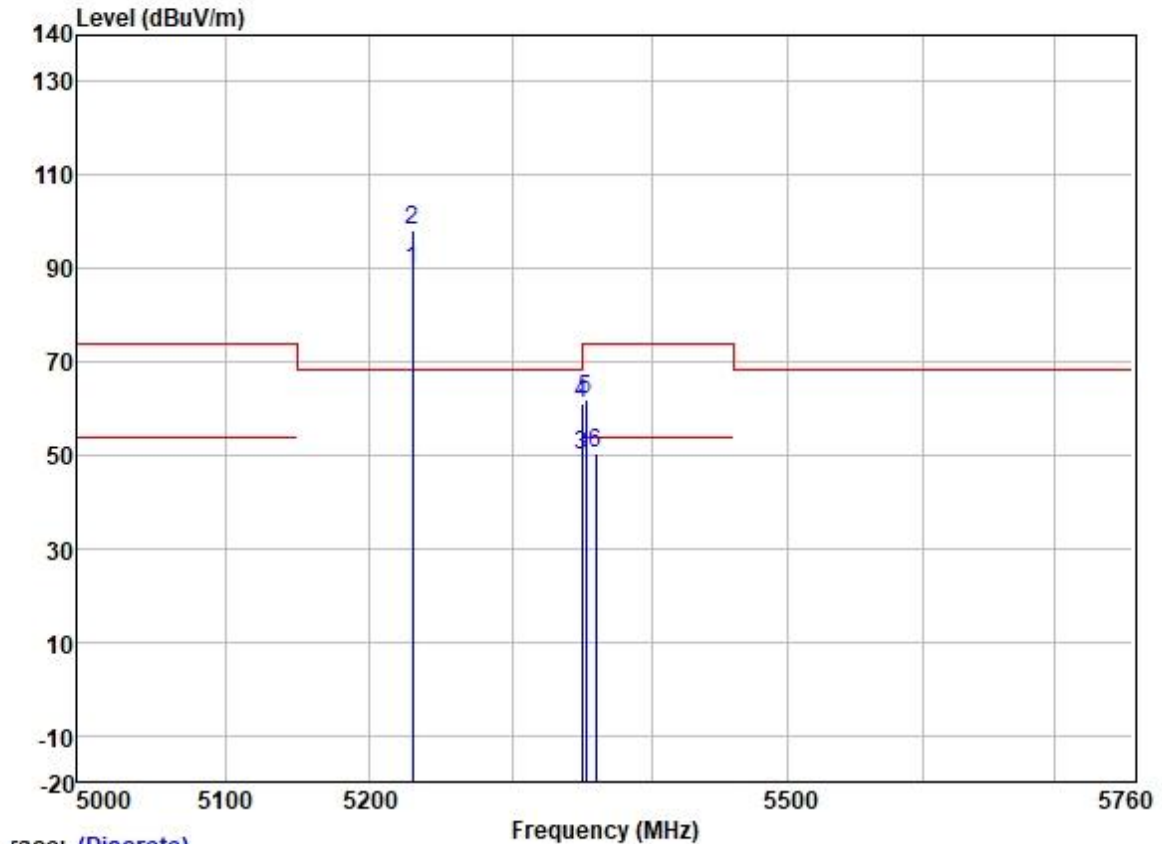

Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                  |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark           |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                  |
| 1   | 5230.000 | 89.10 | 31.74   | 5.70  | 36.87  | 89.67  | -----  | -----     | VERTICAL Average |
| 2 * | 5230.000 | 97.79 | 31.74   | 5.70  | 36.87  | 98.36  | 68.20  | 30.16     | VERTICAL Peak    |
| 3   | 5350.020 | 49.20 | 31.77   | 6.05  | 36.88  | 50.14  | 54.00  | -3.86     | VERTICAL Average |
| 4   | 5350.020 | 60.19 | 31.77   | 6.05  | 36.88  | 61.13  | 74.00  | -12.87    | VERTICAL Peak    |
| 5   | 5352.533 | 61.18 | 31.77   | 6.05  | 36.88  | 62.12  | 74.00  | -11.88    | VERTICAL Peak    |
| 6   | 5359.675 | 49.53 | 31.78   | 6.03  | 36.88  | 50.46  | 54.00  | -3.54     | VERTICAL Average |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

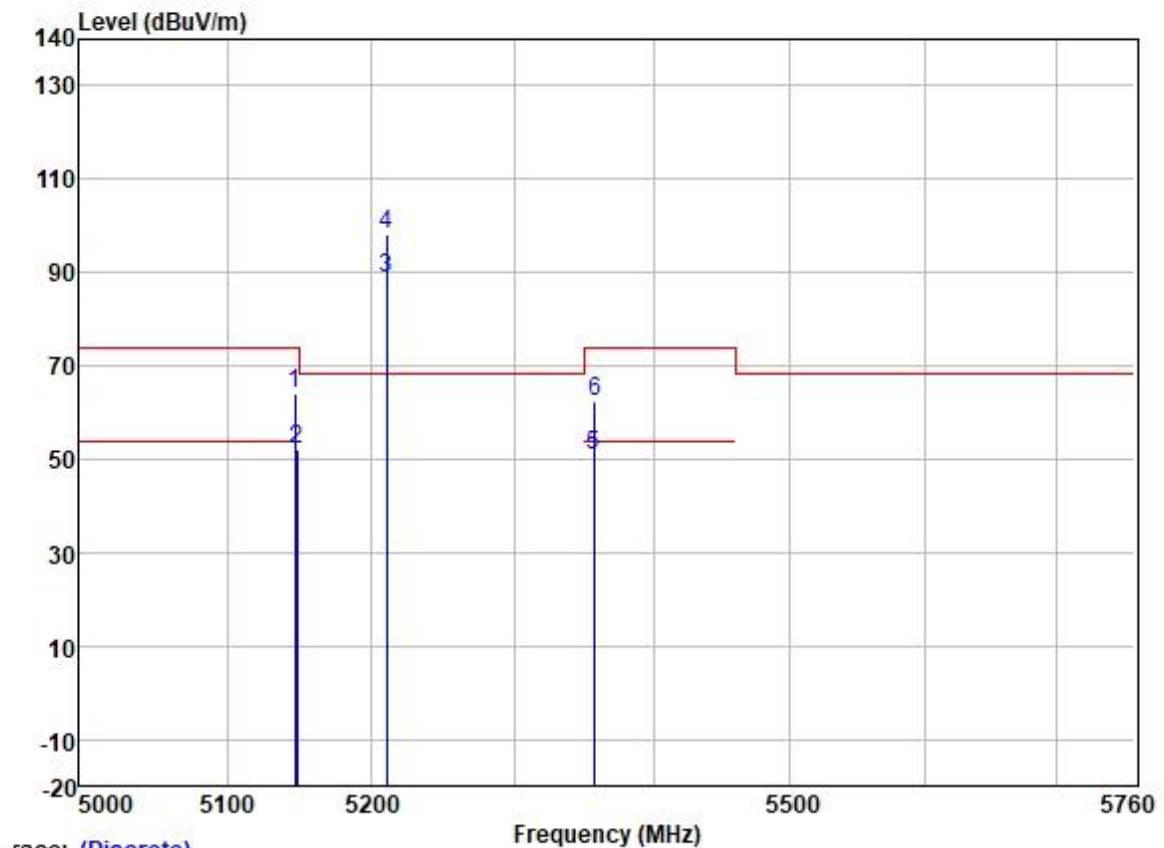

race: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                    |
|-----|----------|-------|---------|-------|--------|--------|--------|-----------|--------------------|
|     | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark             |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                    |
| 1   | 5146.619 | 63.60 | 31.72   | 5.62  | 36.86  | 64.08  | 74.00  | -9.92     | HORIZONTAL Peak    |
| 2   | 5148.154 | 51.48 | 31.72   | 5.62  | 36.86  | 51.96  | 54.00  | -2.04     | HORIZONTAL Average |
| 3   | 5210.000 | 88.26 | 31.74   | 5.65  | 36.87  | 88.78  | -----  | -----     | HORIZONTAL Average |
| 4 * | 5210.000 | 97.65 | 31.74   | 5.65  | 36.87  | 98.17  | 68.20  | 29.97     | HORIZONTAL Peak    |
| 5   | 5357.069 | 49.76 | 31.78   | 6.03  | 36.88  | 50.69  | 54.00  | -3.31     | HORIZONTAL Average |
| 6   | 5357.335 | 61.30 | 31.78   | 6.03  | 36.88  | 62.23  | 74.00  | -11.77    | HORIZONTAL Peak    |

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

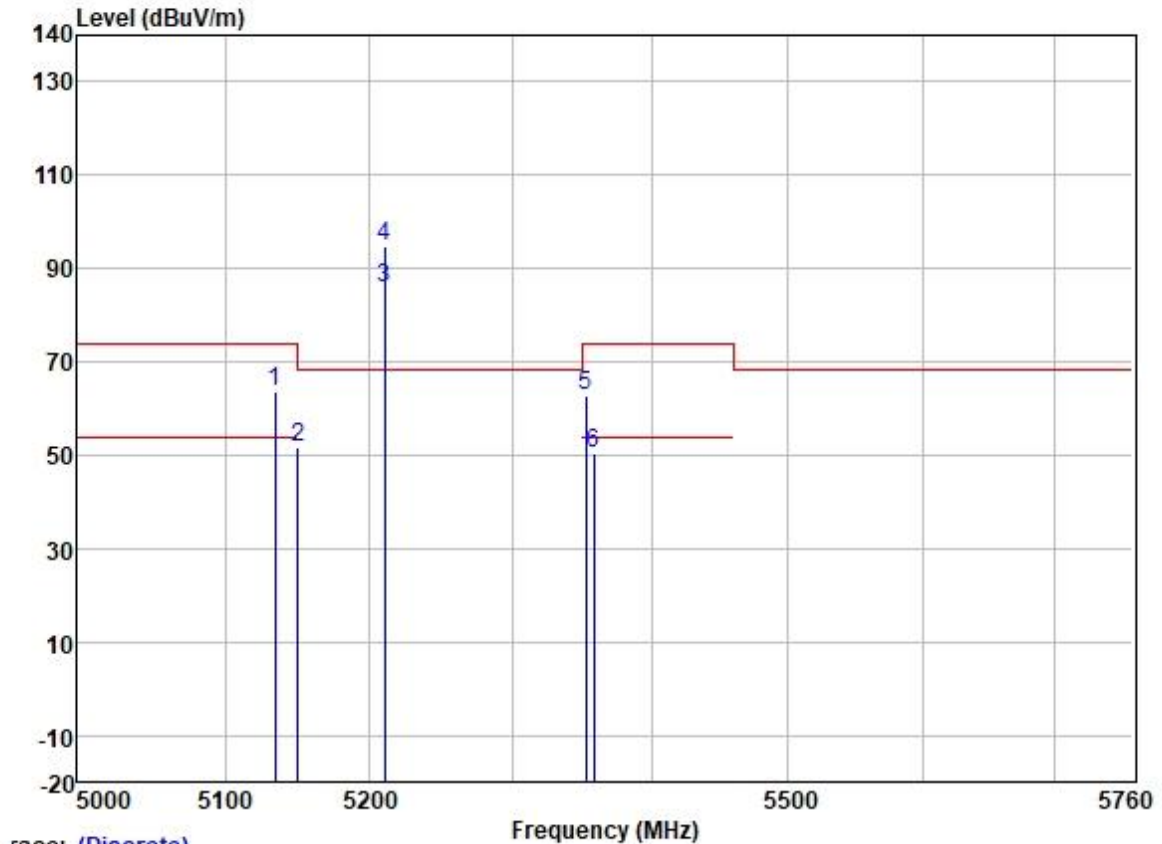


Trace: (Discrete)

|     | Freq     | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |         |
|-----|----------|-------|---------|-------|--------|--------|--------|--------|-----------|---------|
|     | MHz      | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark  |
|     | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |         |
| 1   | 5134.094 | 63.02 | 31.72   | 5.63  | 36.86  | 63.51  | 74.00  | -10.49 | VERTICAL  | Peak    |
| 2   | 5149.947 | 51.15 | 31.72   | 5.62  | 36.86  | 51.63  | 54.00  | -2.37  | VERTICAL  | Average |
| 3   | 5210.000 | 85.46 | 31.74   | 5.65  | 36.87  | 85.98  | -----  | -----  | VERTICAL  | Average |
| 4 * | 5210.000 | 94.15 | 31.74   | 5.65  | 36.87  | 94.67  | 68.20  | 26.47  | VERTICAL  | Peak    |
| 5   | 5352.809 | 61.93 | 31.77   | 6.05  | 36.88  | 62.87  | 74.00  | -11.13 | VERTICAL  | Peak    |
| 6   | 5358.401 | 49.49 | 31.78   | 6.03  | 36.88  | 50.42  | 54.00  | -3.58  | VERTICAL  | Average |




Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

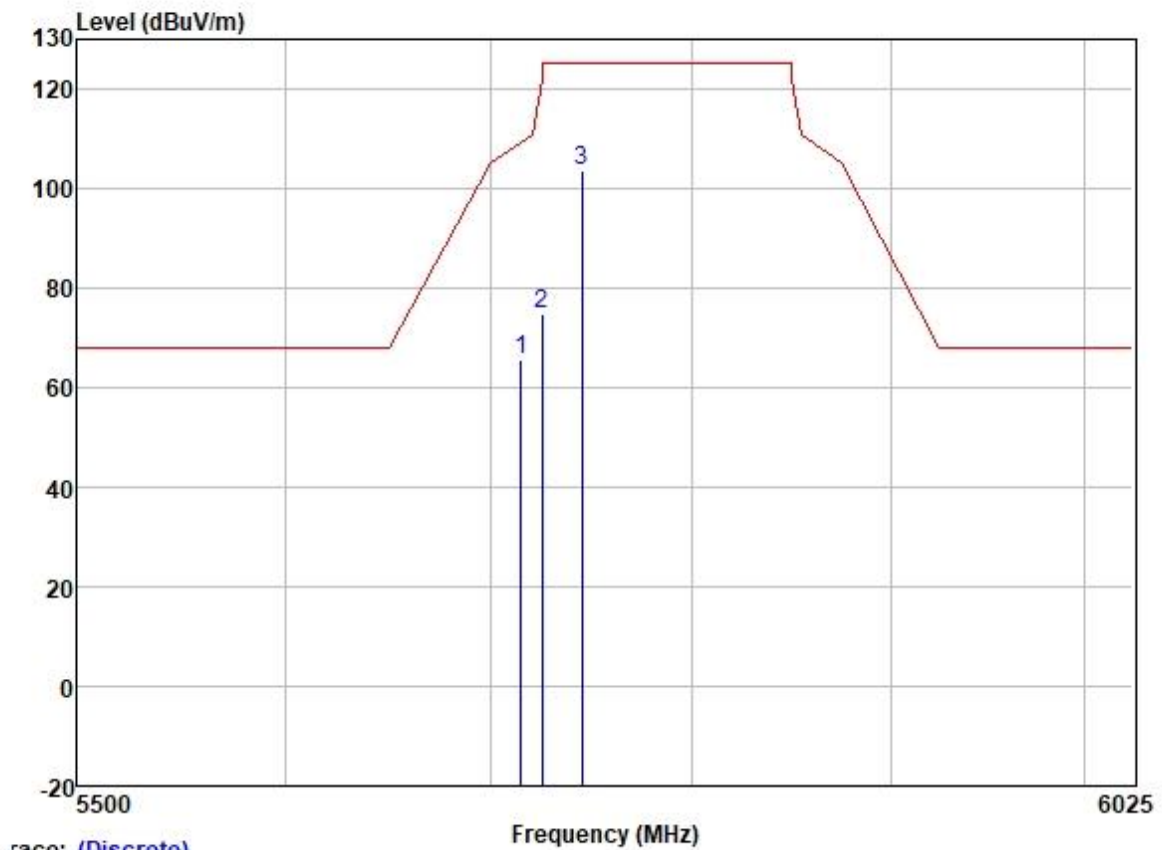

|   | Freq     | ReadAntenna<br>Level | Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m   | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 5715.000 | 64.08                | 32.04  | 6.33          | 36.89            | 65.56  | 109.40        | -43.84        | HORIZONTAL | Peak   |
| 2 | 5725.000 | 73.24                | 32.07  | 6.25          | 36.89            | 74.67  | 122.20        | -47.53        | HORIZONTAL | Peak   |
| 3 | 5745.000 | 102.26               | 32.10  | 6.20          | 36.89            | 103.67 | 125.20        | -21.53        | HORIZONTAL | Peak   |




Test Mode: 09; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

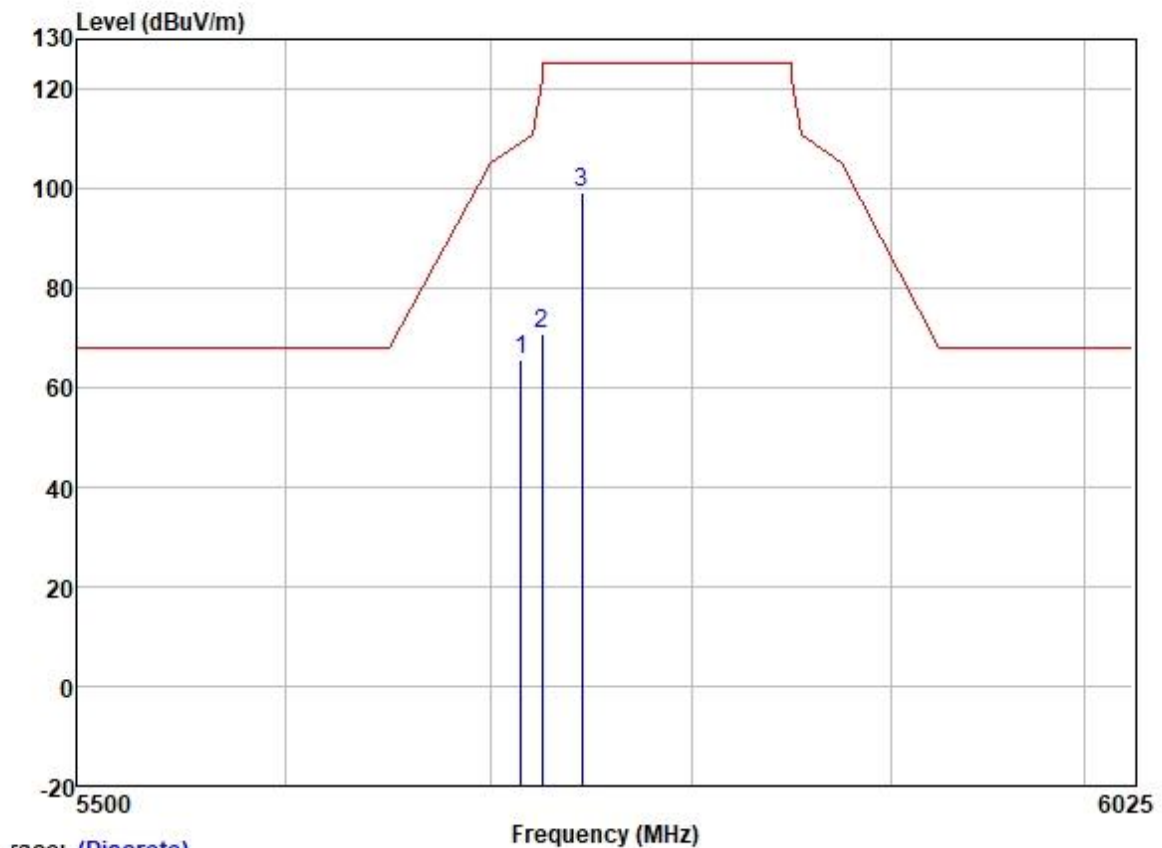

Trace: (Discrete)

|   | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 5715.000 | 64.21 | 32.04   | 6.33  | 36.89  | 65.69  | 109.40 | -43.71    | VERTICAL Peak |
| 2 | 5725.000 | 69.34 | 32.07   | 6.25  | 36.89  | 70.77  | 122.20 | -51.43    | VERTICAL Peak |
| 3 | 5745.000 | 97.95 | 32.10   | 6.20  | 36.89  | 99.36  | 125.20 | -25.84    | VERTICAL Peak |


Test Mode: 09; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: High

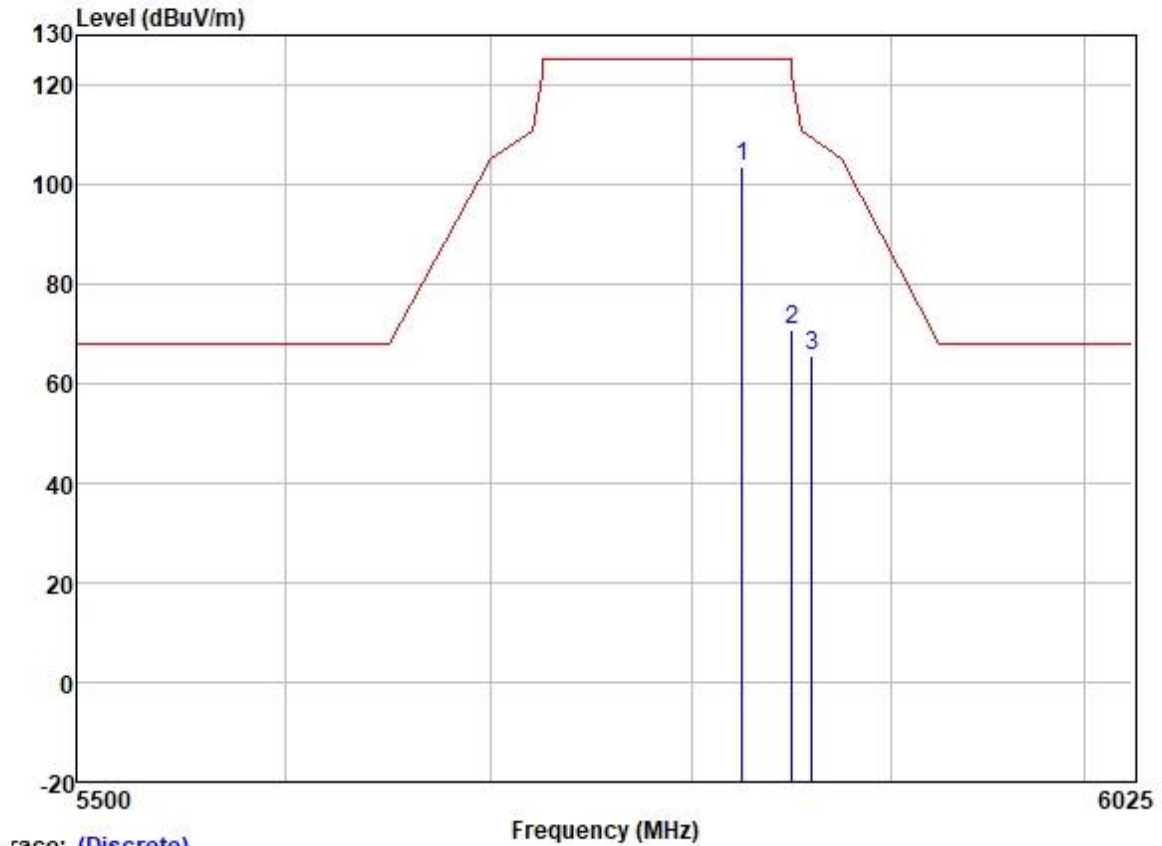

Trace: (Discrete)


|            | Read   | Antenna | Cable | Preamp |        | Limit  | Over   |            |        |
|------------|--------|---------|-------|--------|--------|--------|--------|------------|--------|
| Freq       | Level  | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
| MHz        | dBuV   | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 5825.000 | 102.39 | 32.23   | 6.04  | 36.90  | 103.76 | 125.20 | -21.44 | HORIZONTAL | Peak   |
| 2 5850.000 | 69.27  | 32.25   | 6.00  | 36.90  | 70.62  | 122.20 | -51.58 | HORIZONTAL | Peak   |
| 3 5860.000 | 64.13  | 32.27   | 5.96  | 36.90  | 65.46  | 109.40 | -43.94 | HORIZONTAL | Peak   |

Test Mode: 09; Polarity: Vertical; Modulation: 802.11a; Bandwidth: 20MHz; Channel: High

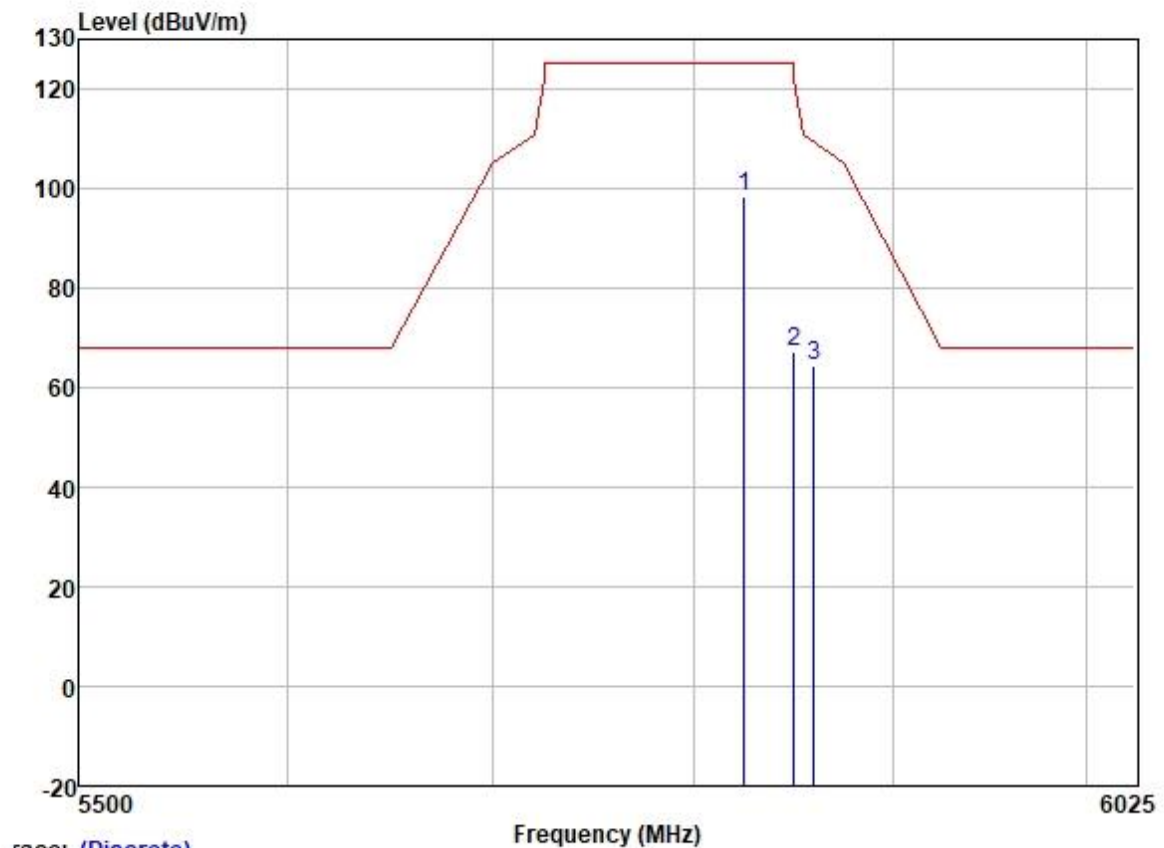

|   |          | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|---|----------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq     | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 5825.000 | 97.05 | 32.23   | 6.04  | 36.90  | 98.42  | 125.20 | -26.78 | VERTICAL  | Peak   |
| 2 | 5850.000 | 65.68 | 32.25   | 6.00  | 36.90  | 67.03  | 122.20 | -55.17 | VERTICAL  | Peak   |
| 3 | 5860.000 | 63.04 | 32.27   | 5.96  | 36.90  | 64.37  | 109.40 | -45.03 | VERTICAL  | Peak   |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

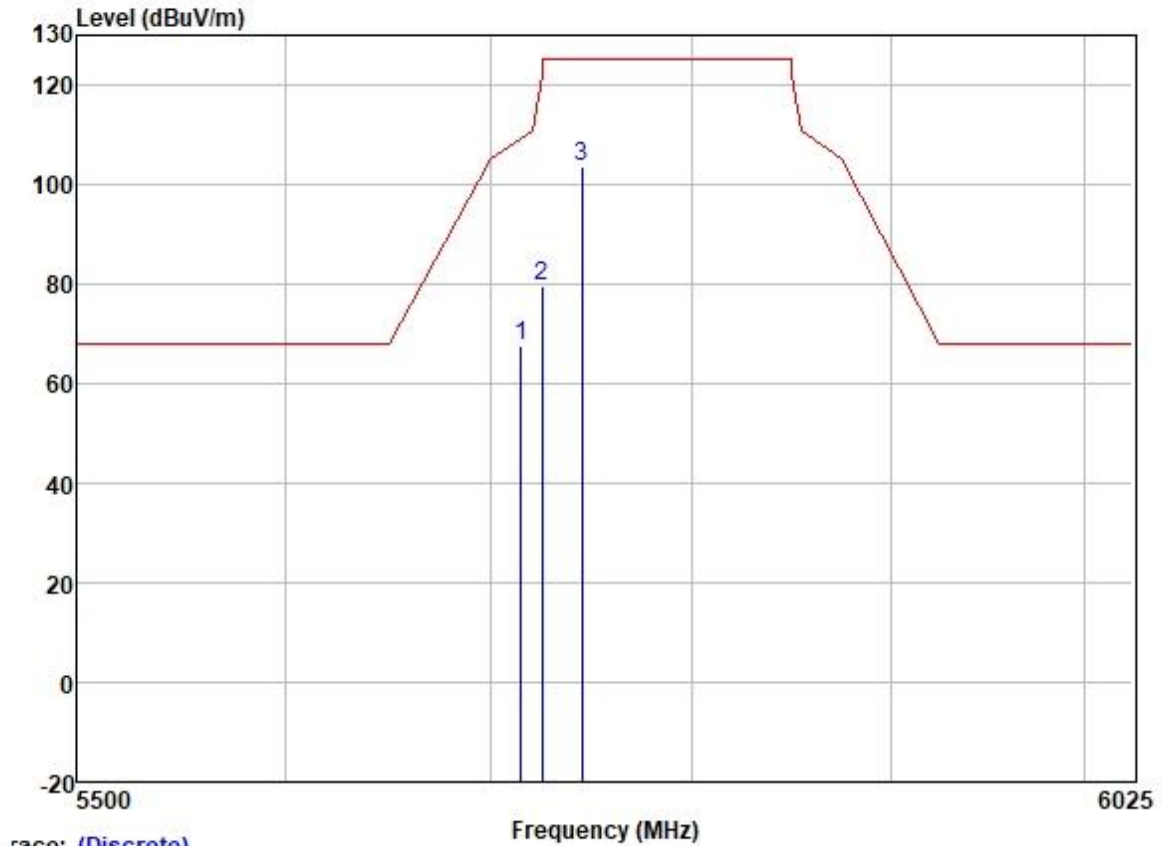


Trace: (Discrete)

|   |          | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |            |        |
|---|----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
|   | Freq     | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz      | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 5715.000 | 65.98       | 32.04  | 6.33  | 36.89  | 67.46  | 109.40 | -41.94 | HORIZONTAL | Peak   |
| 2 | 5725.000 | 78.01       | 32.07  | 6.25  | 36.89  | 79.44  | 122.20 | -42.76 | HORIZONTAL | Peak   |
| 3 | 5745.000 | 102.19      | 32.10  | 6.20  | 36.89  | 103.60 | 125.20 | -21.60 | HORIZONTAL | Peak   |




Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

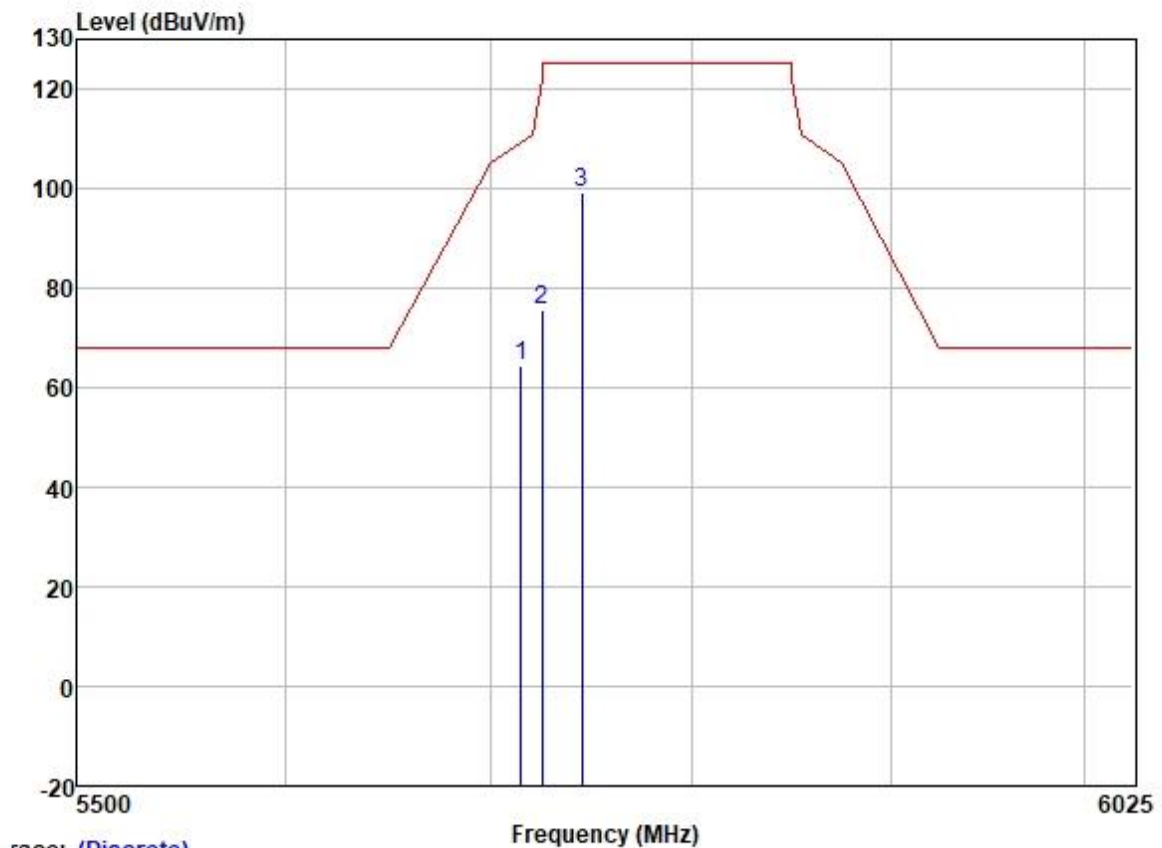

|   |          | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|---|----------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq     | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 5715.000 | 63.05 | 32.04   | 6.33  | 36.89  | 64.53  | 109.40 | -44.87 | VERTICAL  | Peak   |
| 2 | 5725.000 | 74.11 | 32.07   | 6.25  | 36.89  | 75.54  | 122.20 | -46.66 | VERTICAL  | Peak   |
| 3 | 5745.000 | 97.82 | 32.10   | 6.20  | 36.89  | 99.23  | 125.20 | -25.97 | VERTICAL  | Peak   |


Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: High

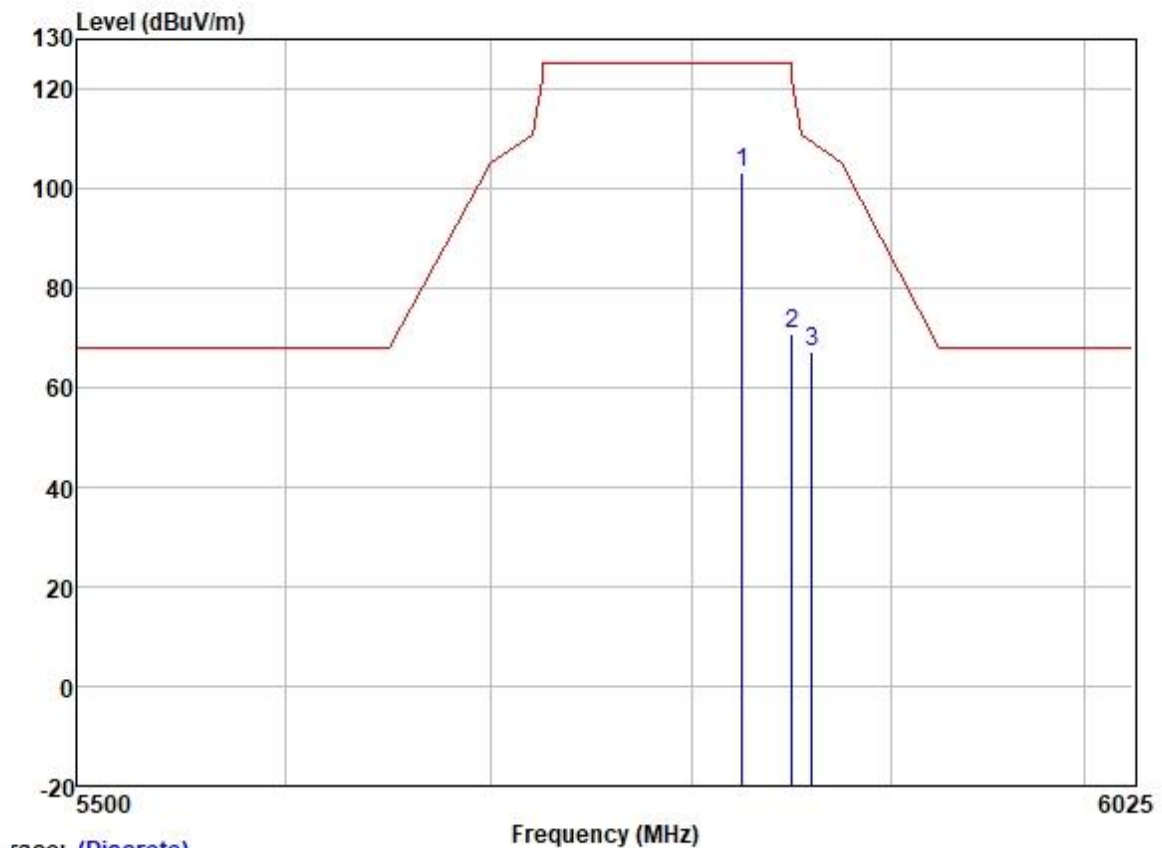

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark          |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|-----------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dB         |           |                 |
| 1 | 5825.000 | 102.00     | 32.23          | 6.04       | 36.90         | 103.37      | 125.20     | -21.83    | HORIZONTAL Peak |
| 2 | 5850.000 | 69.36      | 32.25          | 6.00       | 36.90         | 70.71       | 122.20     | -51.49    | HORIZONTAL Peak |
| 3 | 5860.000 | 65.95      | 32.27          | 5.96       | 36.90         | 67.28       | 109.40     | -42.12    | HORIZONTAL Peak |


Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

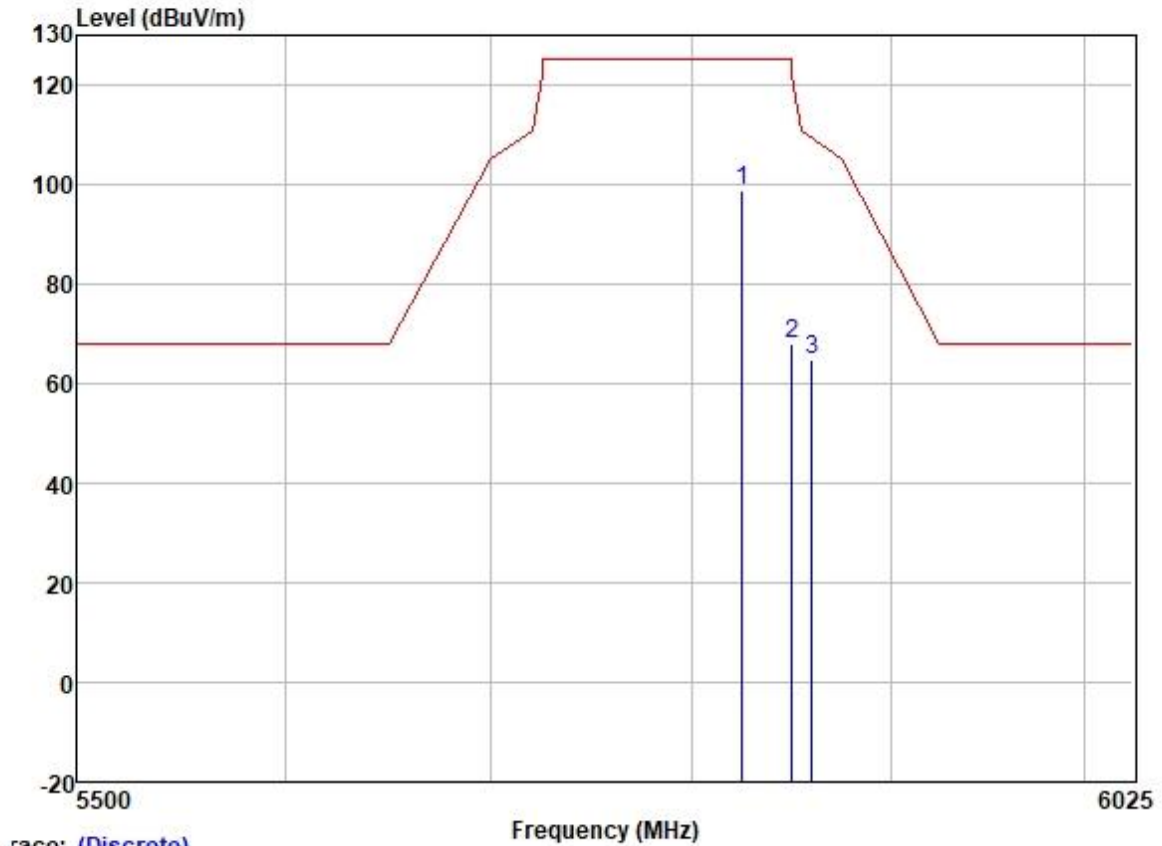

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark        |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|---------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dB         |           |               |
| 1 | 5825.000 | 97.27      | 32.23          | 6.04       | 36.90         | 98.64       | 125.20     | -26.56    | VERTICAL Peak |
| 2 | 5850.000 | 66.49      | 32.25          | 6.00       | 36.90         | 67.84       | 122.20     | -54.36    | VERTICAL Peak |
| 3 | 5860.000 | 63.31      | 32.27          | 5.96       | 36.90         | 64.64       | 109.40     | -44.76    | VERTICAL Peak |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

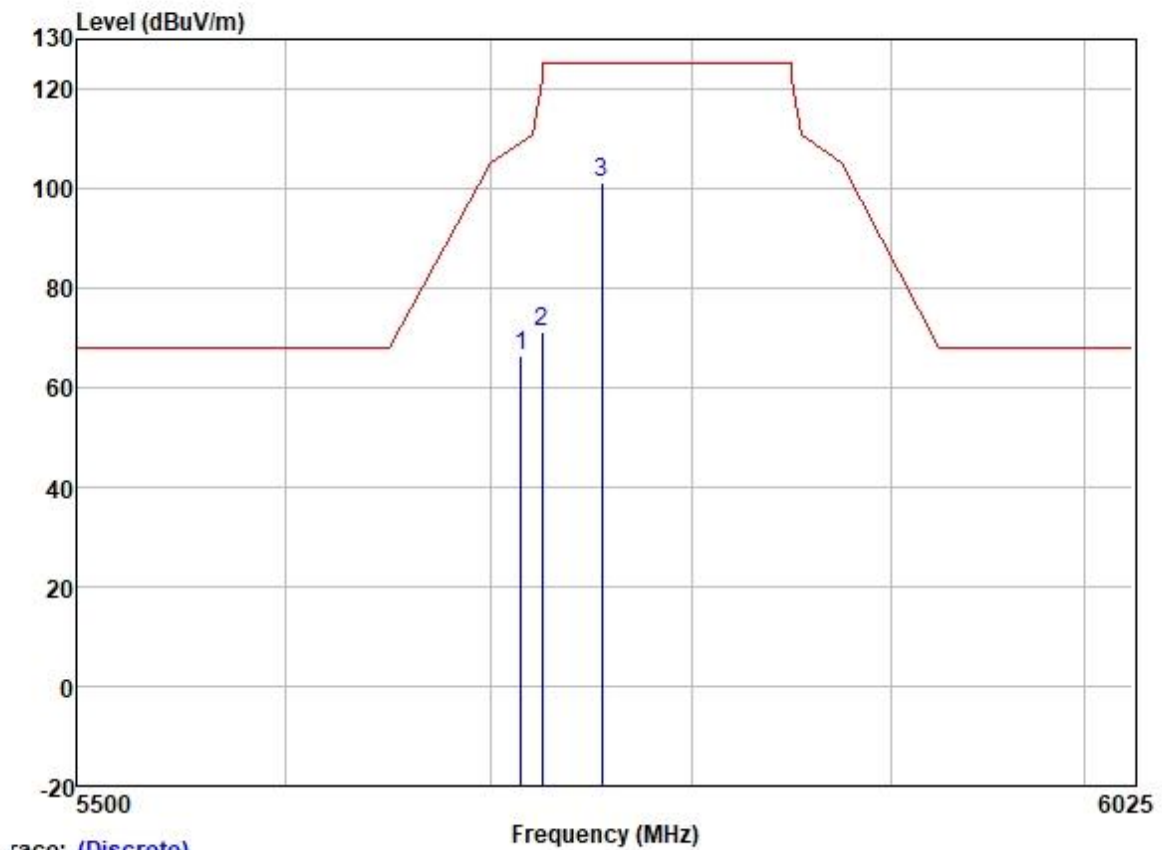


Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level | Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m   | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 5715.000 | 64.92                | 32.04  | 6.33          | 36.89            | 66.40  | 109.40        | -43.00        | HORIZONTAL | Peak   |
| 2 | 5725.000 | 69.83                | 32.07  | 6.25          | 36.89            | 71.26  | 122.20        | -50.94        | HORIZONTAL | Peak   |
| 3 | 5755.000 | 99.86                | 32.10  | 6.20          | 36.89            | 101.27 | 125.20        | -23.93        | HORIZONTAL | Peak   |




Test Mode: 09; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

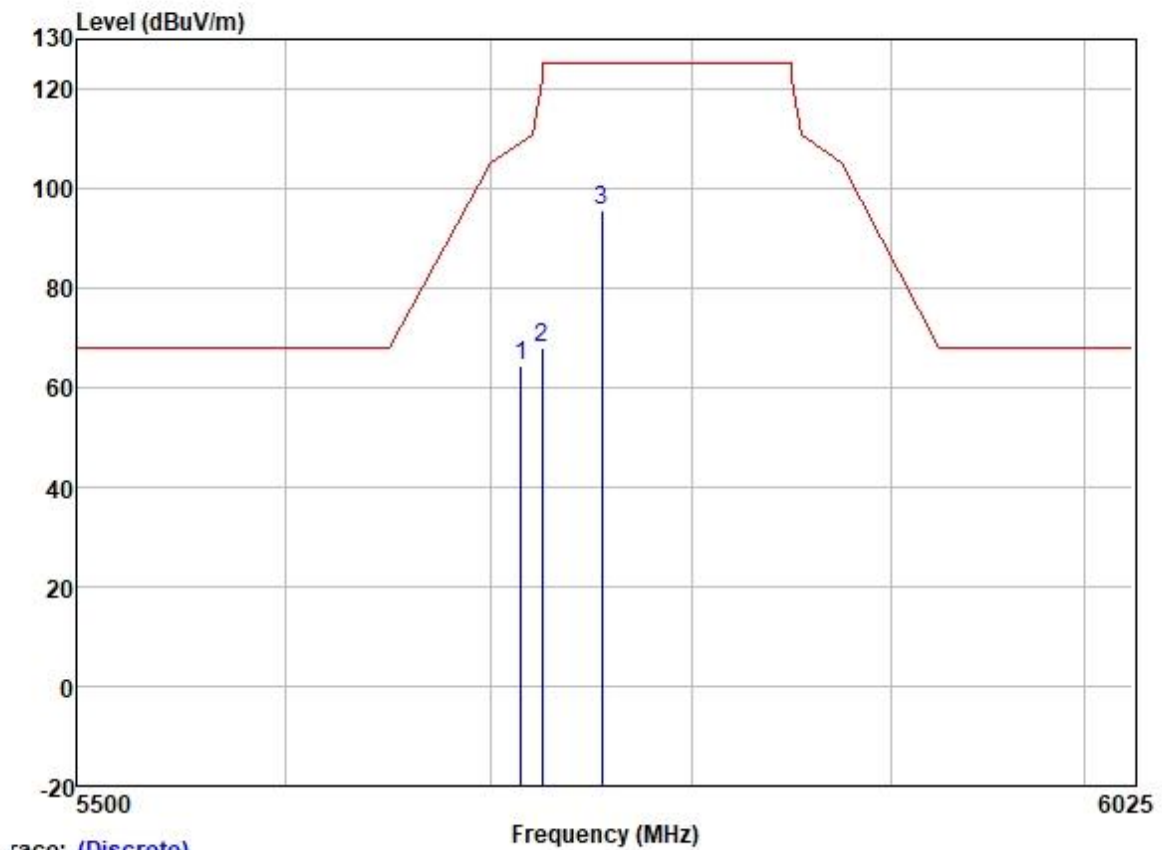

|   | Freq     | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz      | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 5715.000 | 62.73 | 32.04   | 6.33  | 36.89  | 64.21  | 109.40 | -45.19    | VERTICAL Peak |
| 2 | 5725.000 | 66.60 | 32.07   | 6.25  | 36.89  | 68.03  | 122.20 | -54.17    | VERTICAL Peak |
| 3 | 5755.000 | 94.38 | 32.10   | 6.20  | 36.89  | 95.79  | 125.20 | -29.41    | VERTICAL Peak |


Test Mode: 09; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

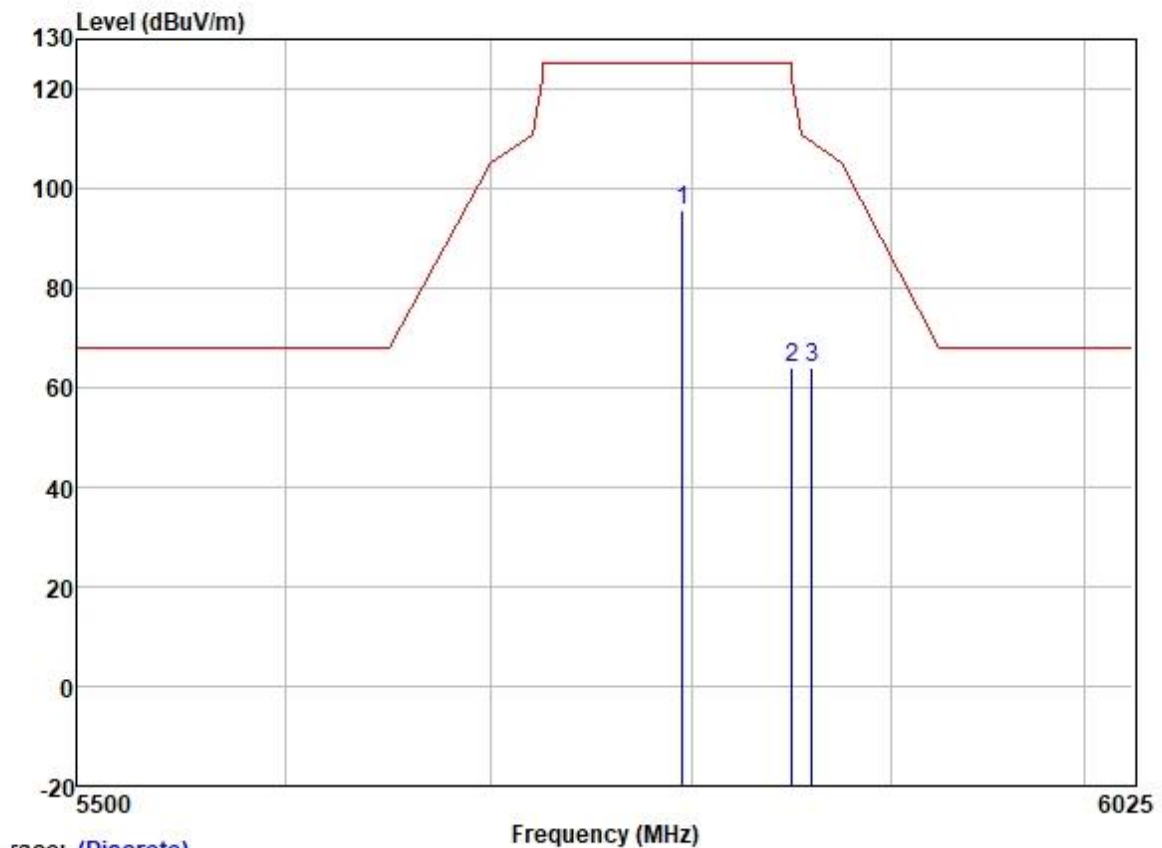

Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level | Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m   | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 5795.000 | 94.14                | 32.19  | 6.10          | 36.89            | 95.54  | 125.20        | -29.66        | HORIZONTAL | Peak   |
| 2 | 5850.000 | 62.56                | 32.25  | 6.00          | 36.90            | 63.91  | 122.20        | -58.29        | HORIZONTAL | Peak   |
| 3 | 5860.000 | 62.55                | 32.27  | 5.96          | 36.90            | 63.88  | 109.40        | -45.52        | HORIZONTAL | Peak   |


Test Mode: 09; Polarity: Vertical; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

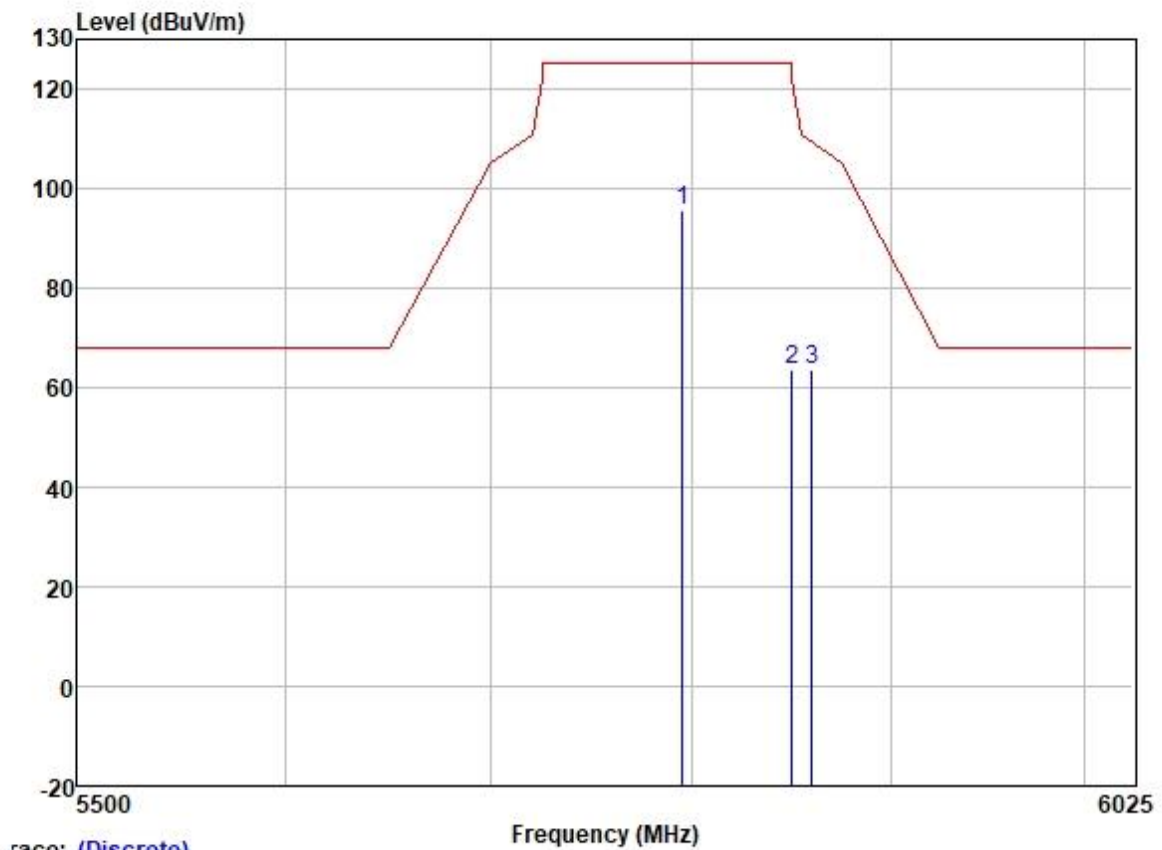

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark        |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|---------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dB         |           |               |
| 1 | 5795.000 | 94.32      | 32.19          | 6.10       | 36.89         | 95.72       | 125.20     | -29.48    | VERTICAL Peak |
| 2 | 5850.000 | 62.26      | 32.25          | 6.00       | 36.90         | 63.61       | 122.20     | -58.59    | VERTICAL Peak |
| 3 | 5860.000 | 62.42      | 32.27          | 5.96       | 36.90         | 63.75       | 109.40     | -45.65    | VERTICAL Peak |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

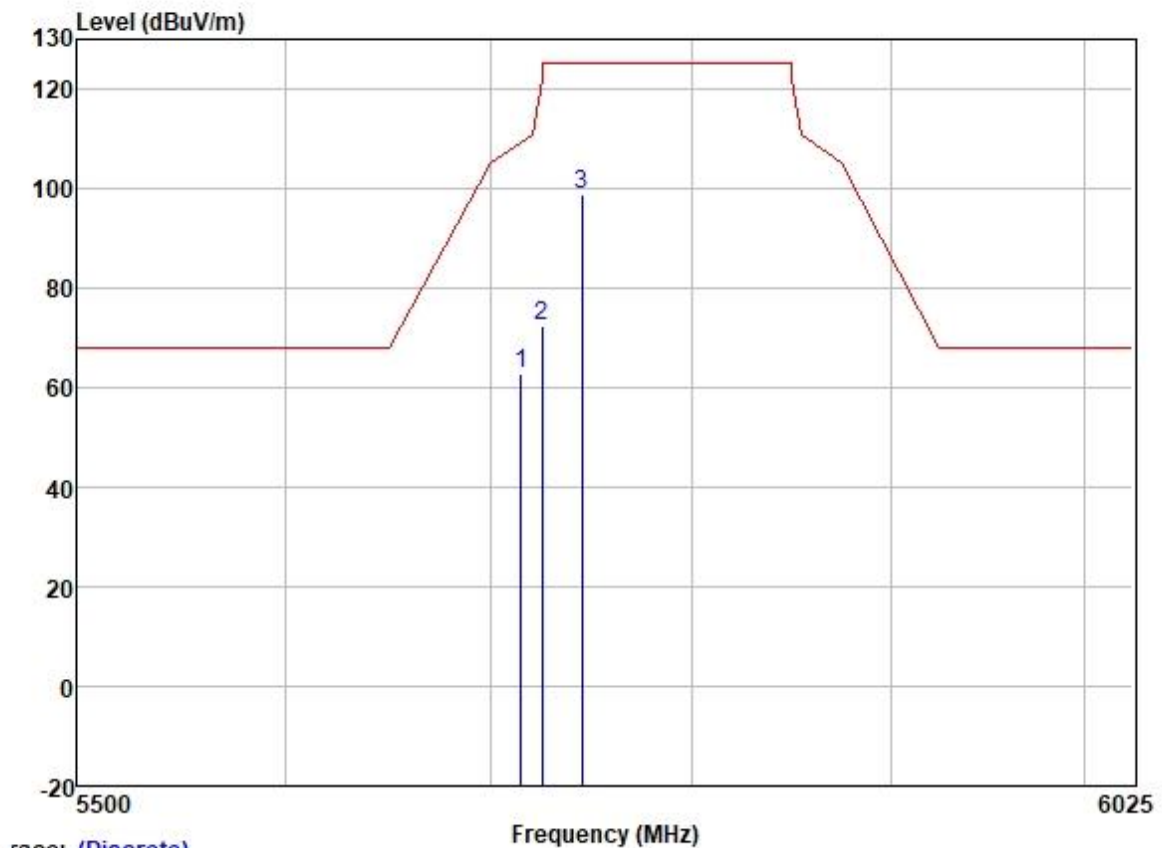


Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level Factor | Cable<br>Loss | Preamp<br>Factor | Level | Limit<br>Line | Over<br>Limit | Pol/Phase | Remark          |
|---|----------|-----------------------------|---------------|------------------|-------|---------------|---------------|-----------|-----------------|
|   | MHz      | dBuV                        | dB/m          | dB               | dB    | dBuV/m        | dBuV/m        | dB        |                 |
| 1 | 5715.000 | 61.27                       | 32.04         | 6.33             | 36.89 | 62.75         | 109.40        | -46.65    | HORIZONTAL Peak |
| 2 | 5725.000 | 70.93                       | 32.07         | 6.25             | 36.89 | 72.36         | 122.20        | -49.84    | HORIZONTAL Peak |
| 3 | 5745.000 | 97.22                       | 32.10         | 6.20             | 36.89 | 98.63         | 125.20        | -26.57    | HORIZONTAL Peak |




Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

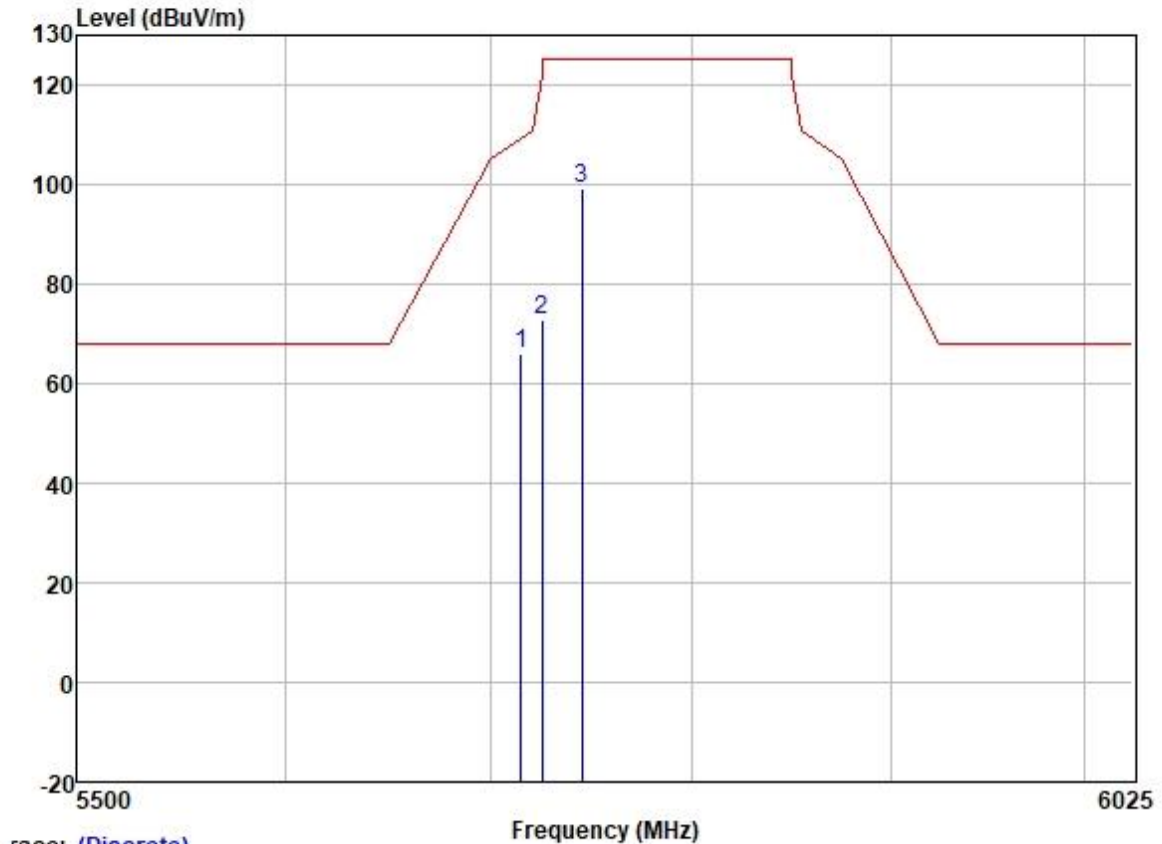

Trace: (Discrete)

|   |          | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | Freq     | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 5715.000 | 64.39       | 32.04  | 6.33   | 36.89  | 65.87  | 109.40 | -43.53 | VERTICAL  | Peak   |
| 2 | 5725.000 | 71.35       | 32.07  | 6.25   | 36.89  | 72.78  | 122.20 | -49.42 | VERTICAL  | Peak   |
| 3 | 5745.000 | 97.76       | 32.10  | 6.20   | 36.89  | 99.17  | 125.20 | -26.03 | VERTICAL  | Peak   |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: High

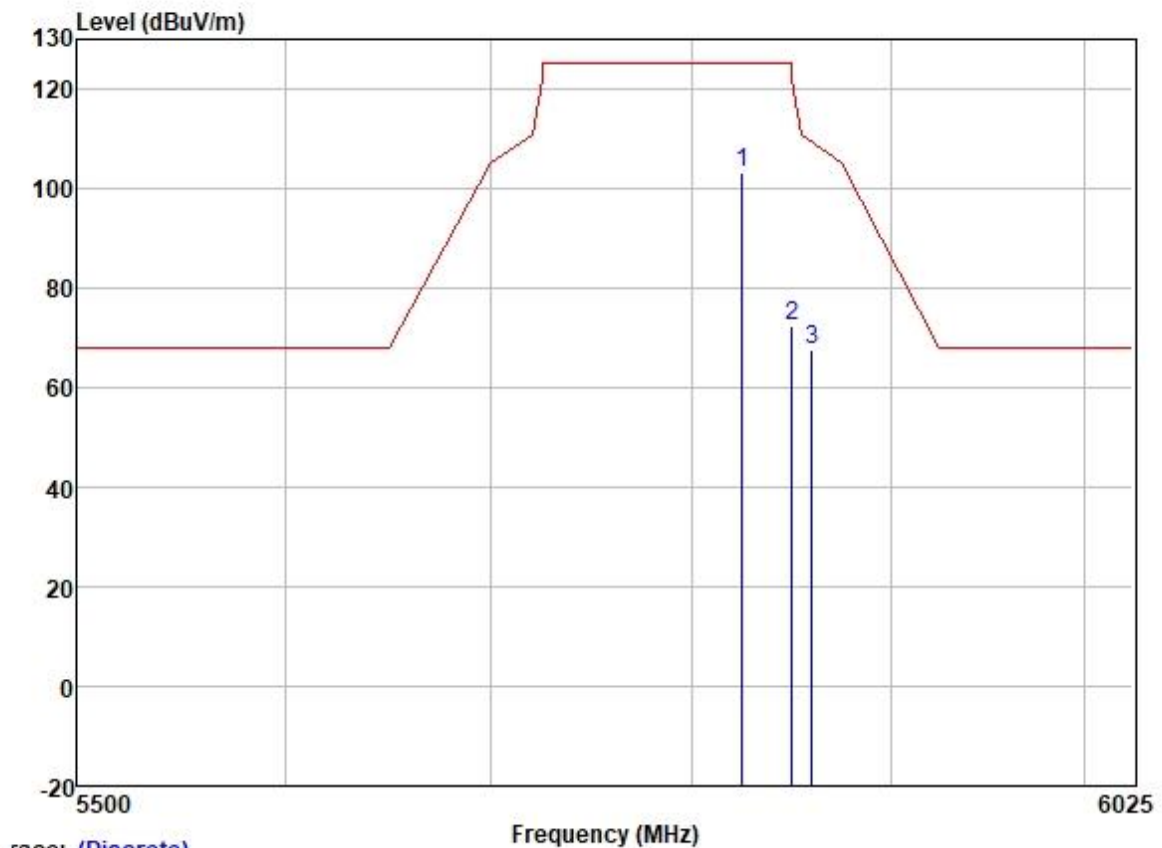

race: (Discrete)

|   | Freq     | ReadAntenna<br>Level Factor | Cable<br>Loss | Preamp<br>Factor | Level | Limit<br>Line | Over<br>Limit | Pol/Phase | Remark          |
|---|----------|-----------------------------|---------------|------------------|-------|---------------|---------------|-----------|-----------------|
|   | MHz      | dBuV                        | dB/m          | dB               | dB    | dBuV/m        | dBuV/m        | dB        |                 |
| 1 | 5825.000 | 101.90                      | 32.23         | 6.04             | 36.90 | 103.27        | 125.20        | -21.93    | HORIZONTAL Peak |
| 2 | 5850.000 | 71.11                       | 32.25         | 6.00             | 36.90 | 72.46         | 122.20        | -49.74    | HORIZONTAL Peak |
| 3 | 5860.000 | 66.27                       | 32.27         | 5.96             | 36.90 | 67.60         | 109.40        | -41.80    | HORIZONTAL Peak |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed on the reverse or available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and for electronic forms of documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. (SGS 7EEL9207-14-15)

SGS-CSTC Standards Technical Services Co., Ltd.  
Guangzhou Branch Testing Center EEC Laboratory.

中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com


Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: High

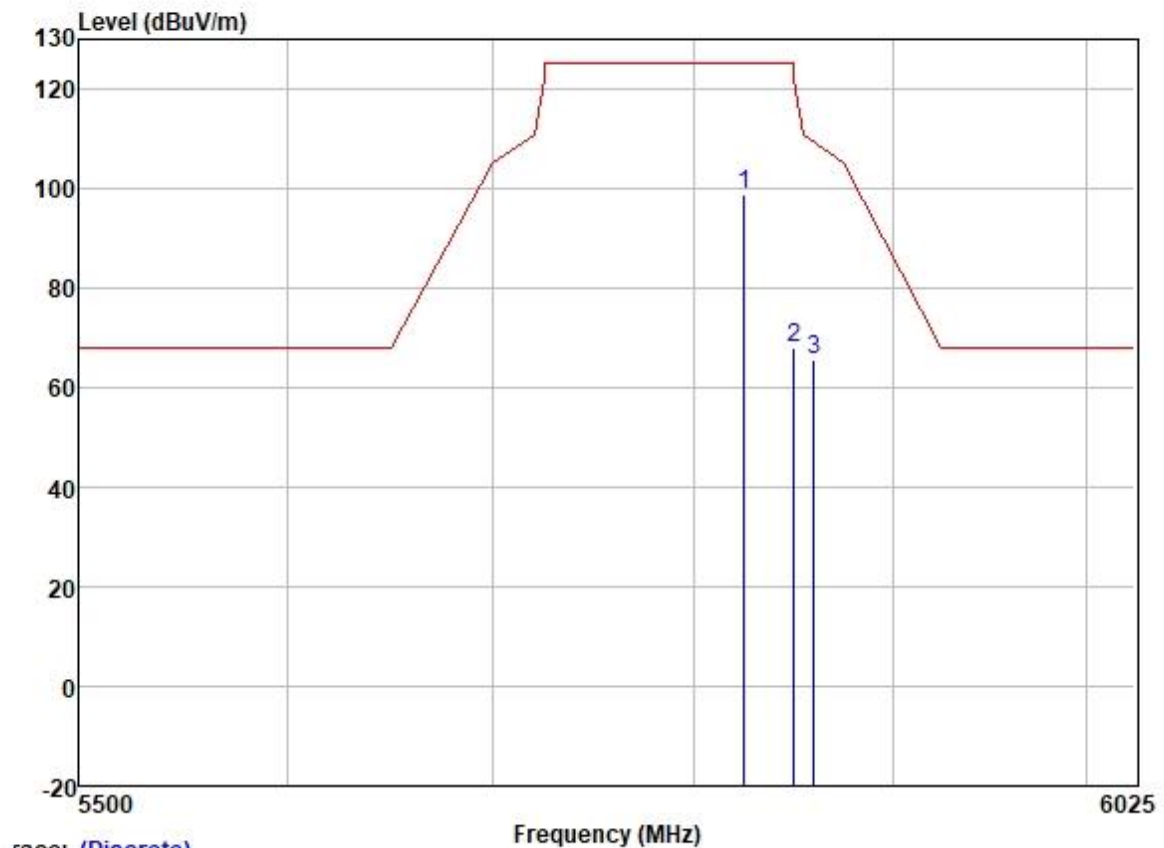

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark        |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|---------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dB         |           |               |
| 1 | 5825.000 | 97.52      | 32.23          | 6.04       | 36.90         | 98.89       | 125.20     | -26.31    | VERTICAL Peak |
| 2 | 5850.000 | 66.49      | 32.25          | 6.00       | 36.90         | 67.84       | 122.20     | -54.36    | VERTICAL Peak |
| 3 | 5860.000 | 64.33      | 32.27          | 5.96       | 36.90         | 65.66       | 109.40     | -43.74    | VERTICAL Peak |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

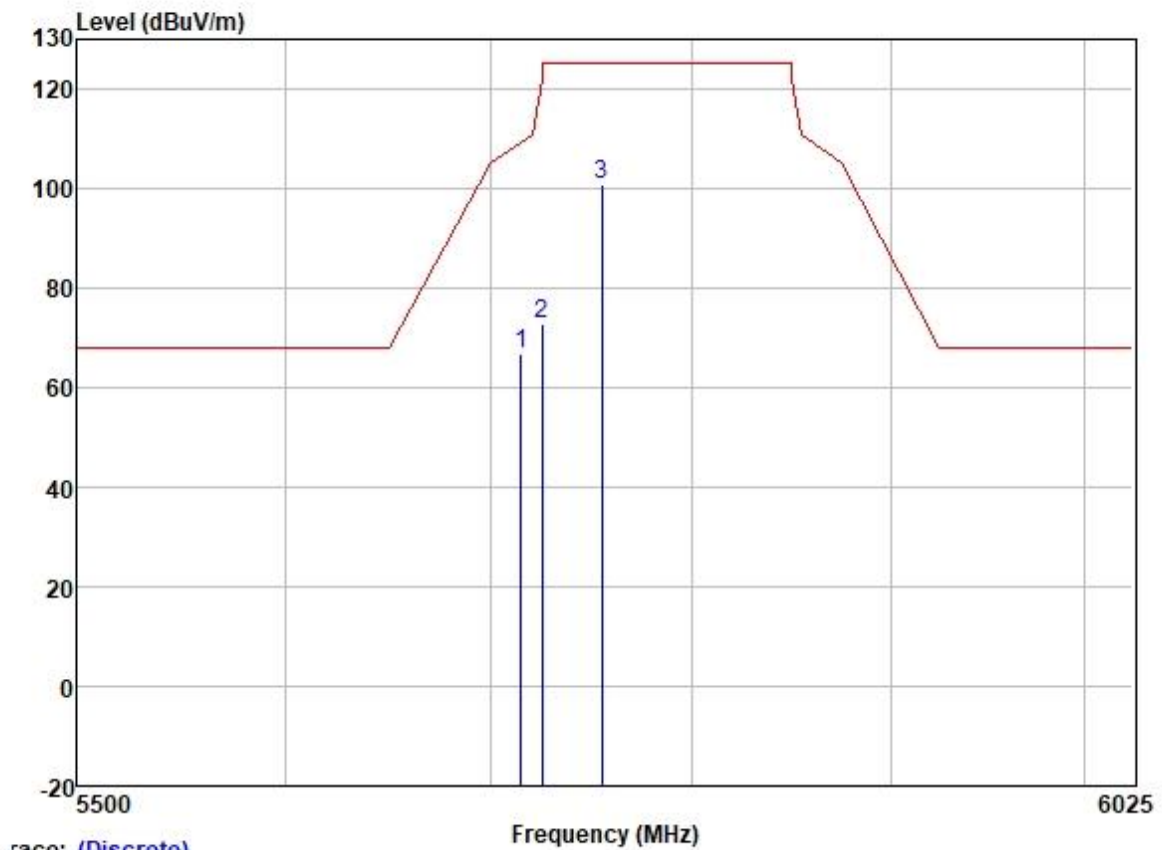


Trace: (Discrete)

|   | Freq     | ReadAntenna<br>Level | Factor | Cable<br>Loss | Preamp<br>Factor | Level  | Limit<br>Line | Over<br>Limit | Pol/Phase  | Remark |
|---|----------|----------------------|--------|---------------|------------------|--------|---------------|---------------|------------|--------|
|   | MHz      | dBuV                 | dB/m   | dB            | dB               | dBuV/m | dBuV/m        | dB            |            |        |
| 1 | 5715.000 | 65.16                | 32.04  | 6.33          | 36.89            | 66.64  | 109.40        | -42.76        | HORIZONTAL | Peak   |
| 2 | 5725.000 | 71.43                | 32.07  | 6.25          | 36.89            | 72.86  | 122.20        | -49.34        | HORIZONTAL | Peak   |
| 3 | 5755.000 | 99.37                | 32.10  | 6.20          | 36.89            | 100.78 | 125.20        | -24.42        | HORIZONTAL | Peak   |




Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

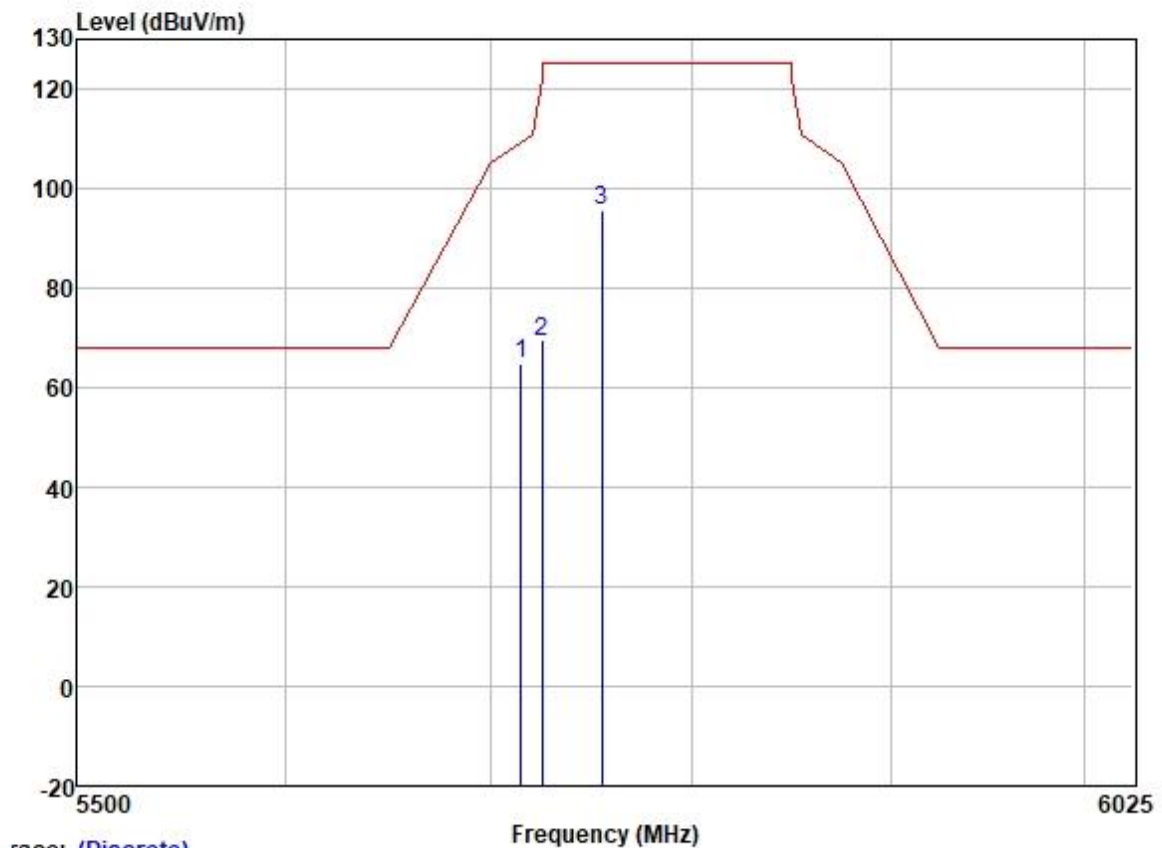

Trace: (Discrete)

|   |          | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|---|----------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq     | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz      | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 5715.000 | 63.47 | 32.04   | 6.33  | 36.89  | 64.95  | 109.40 | -44.45 | VERTICAL  | Peak   |
| 2 | 5725.000 | 67.97 | 32.07   | 6.25  | 36.89  | 69.40  | 122.20 | -52.80 | VERTICAL  | Peak   |
| 3 | 5755.000 | 94.37 | 32.10   | 6.20  | 36.89  | 95.78  | 125.20 | -29.42 | VERTICAL  | Peak   |


Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: High

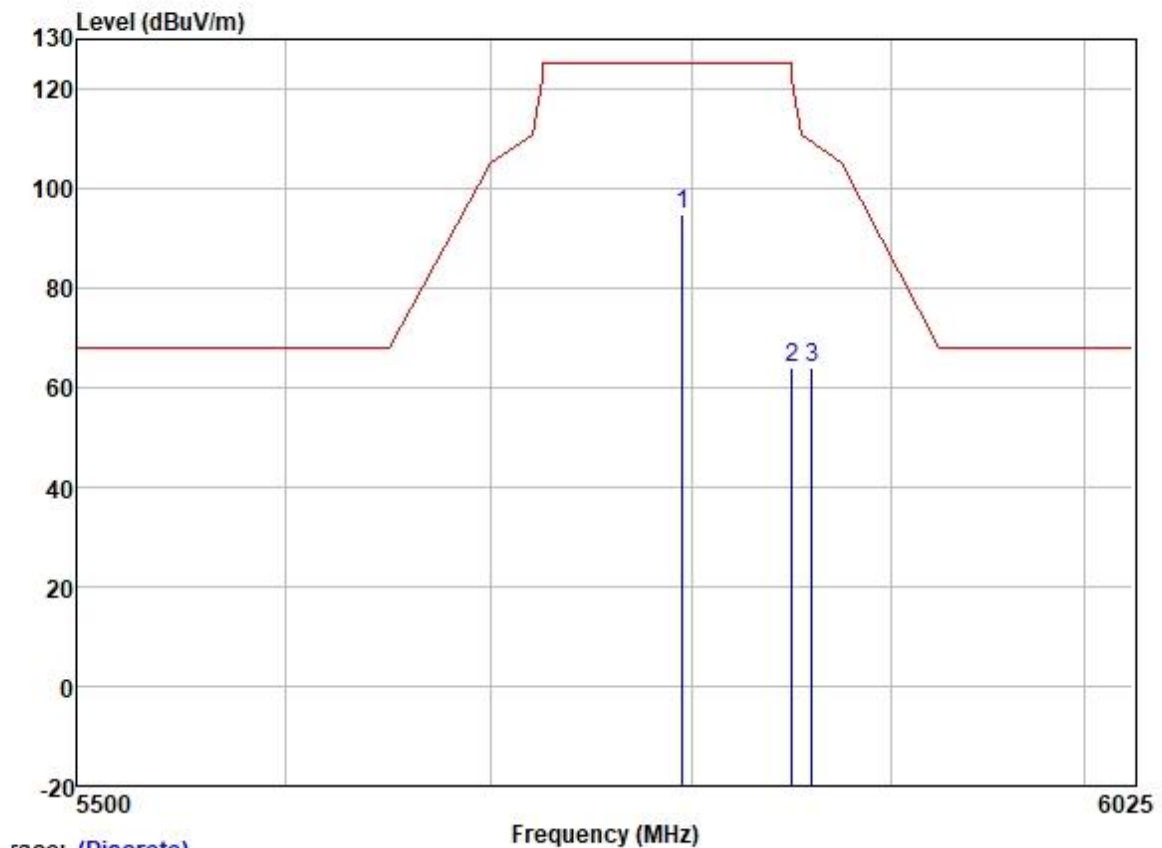

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark          |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|-----------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dBuV/m     | dB        |                 |
| 1 | 5795.000 | 93.35      | 32.19          | 6.10       | 36.89         | 94.75       | 125.20     | -30.45    | HORIZONTAL Peak |
| 2 | 5850.000 | 62.83      | 32.25          | 6.00       | 36.90         | 64.18       | 122.20     | -58.02    | HORIZONTAL Peak |
| 3 | 5860.000 | 62.53      | 32.27          | 5.96       | 36.90         | 63.86       | 109.40     | -45.54    | HORIZONTAL Peak |


Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel: High

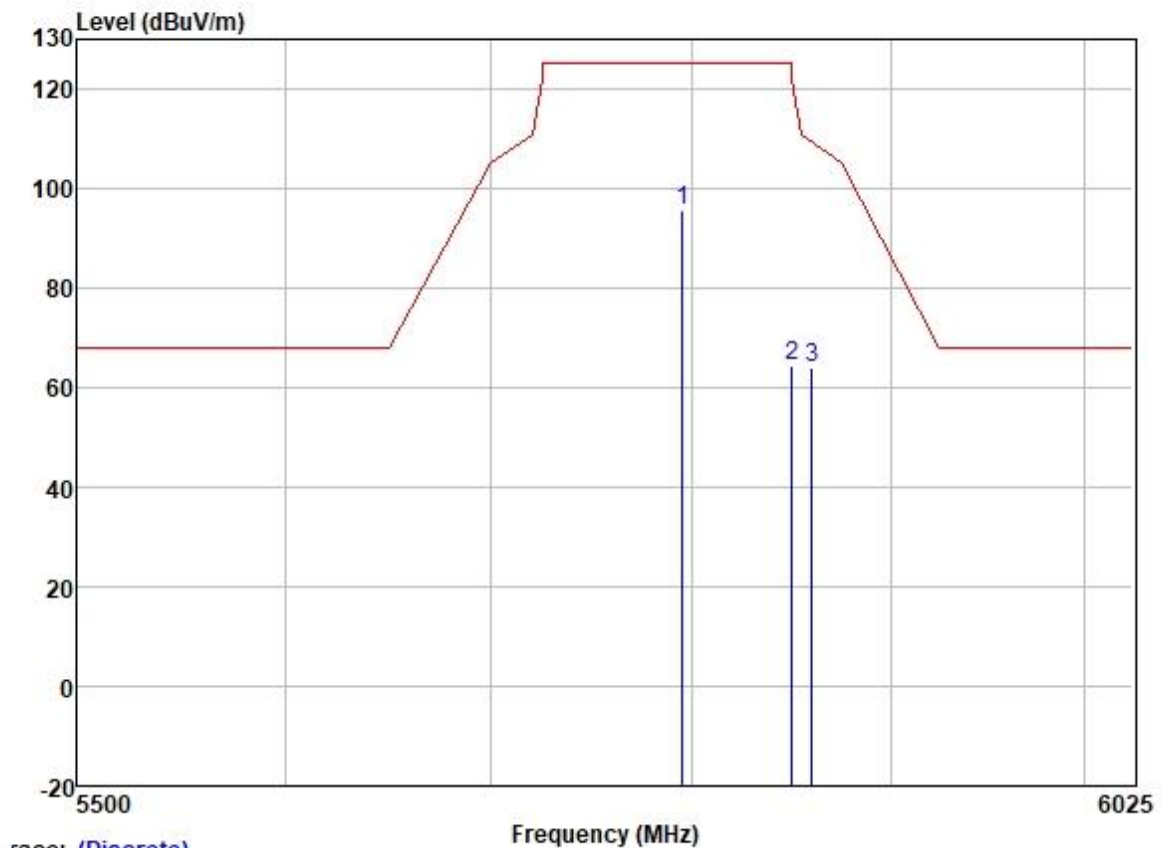

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark        |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|---------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dB         |           |               |
| 1 | 5795.000 | 94.11      | 32.19          | 6.10       | 36.89         | 95.51       | 125.20     | -29.69    | VERTICAL Peak |
| 2 | 5850.000 | 62.93      | 32.25          | 6.00       | 36.90         | 64.28       | 122.20     | -57.92    | VERTICAL Peak |
| 3 | 5860.000 | 62.57      | 32.27          | 5.96       | 36.90         | 63.90       | 109.40     | -45.50    | VERTICAL Peak |

Test Mode: 09; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

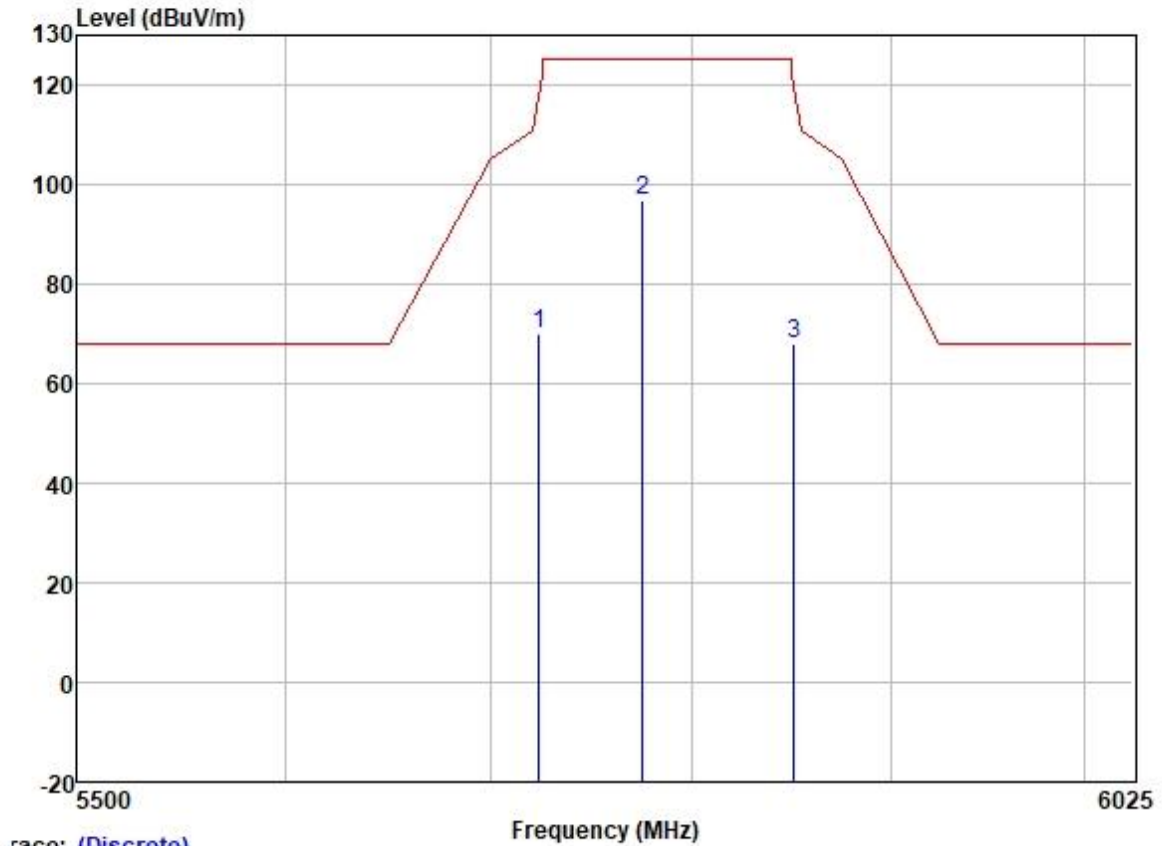


Trace: (Discrete)

|      | Read     | Antenna | Cable | Preamp |        | Limit  | Over   |           |                 |
|------|----------|---------|-------|--------|--------|--------|--------|-----------|-----------------|
| Freq | Level    | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark          |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |                 |
| 1    | 5723.787 | 68.63   | 32.07 | 6.25   | 36.89  | 70.06  | 119.44 | -49.38    | HORIZONTAL Peak |
| 2    | 5775.000 | 95.35   | 32.16 | 6.10   | 36.89  | 96.72  | 125.20 | -28.48    | HORIZONTAL Peak |
| 3    | 5850.883 | 66.54   | 32.25 | 6.00   | 36.90  | 67.89  | 120.19 | -52.30    | HORIZONTAL Peak |



Test Mode: 09; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

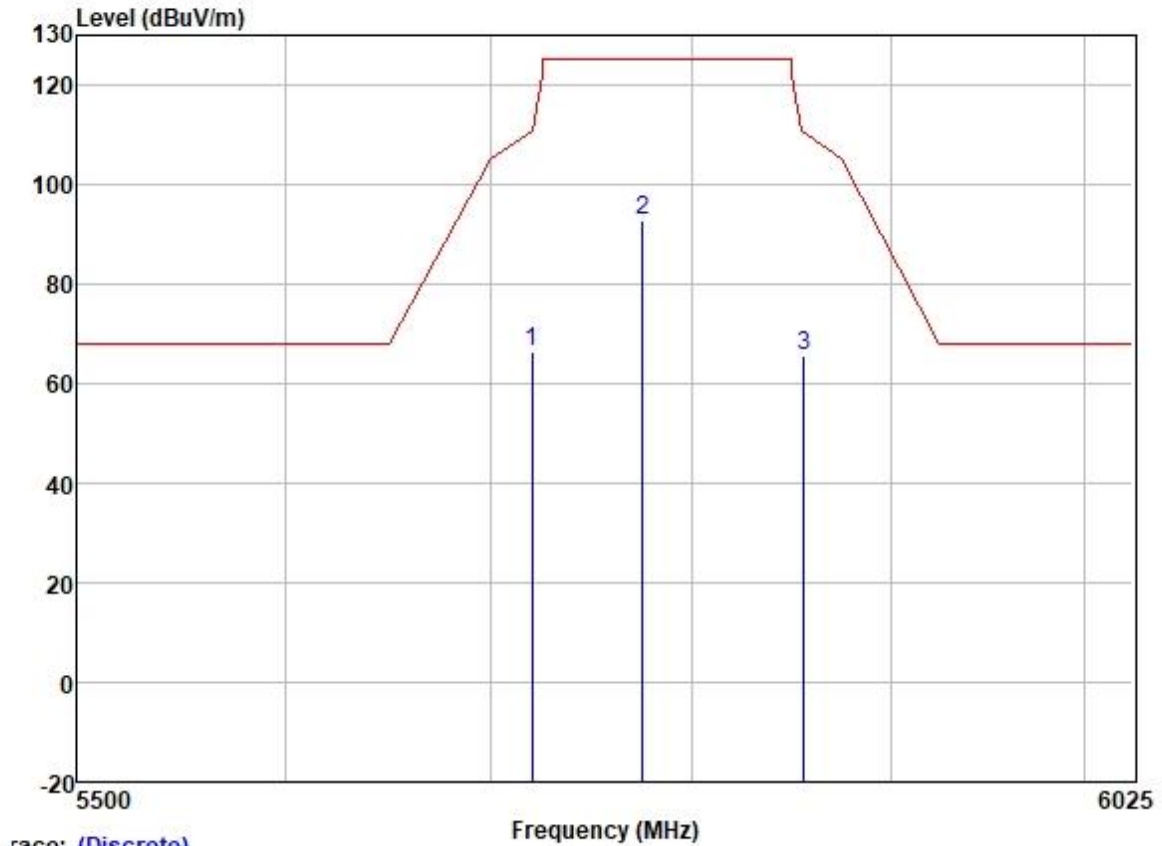

Trace: (Discrete)

|   | Freq     | Read Level | Antenna Factor | Cable Loss | Preamp Factor | Limit Level | Over Limit | Pol/Phase | Remark        |
|---|----------|------------|----------------|------------|---------------|-------------|------------|-----------|---------------|
|   | MHz      | dBuV       | dB/m           | dB         | dB            | dBuV/m      | dBuV/m     | dB        |               |
| 1 | 5720.472 | 65.03      | 32.04          | 6.33       | 36.89         | 66.51       | 111.88     | -45.37    | VERTICAL Peak |
| 2 | 5775.000 | 91.33      | 32.16          | 6.10       | 36.89         | 92.70       | 125.20     | -32.50    | VERTICAL Peak |
| 3 | 5856.124 | 64.17      | 32.27          | 5.96       | 36.90         | 65.50       | 110.48     | -44.98    | VERTICAL Peak |

**7.9 Radiated Emissions (above 1GHz)**

Test Requirement 47 CFR Part 15, Subpart C 15.209 &amp; 15.407(b)

Test Method: KDB 789033 D02 II G

Measurement Distance: 3m

Limit:

| Frequency(MHz) | Field strength(microvolts/meter) | Measurement distance(meters) |
|----------------|----------------------------------|------------------------------|
| 0.009-0.490    | 2400/F(kHz)                      | 300                          |
| 0.490-1.705    | 24000/F(kHz)                     | 30                           |
| 1.705-30.0     | 30                               | 30                           |
| 30-88          | 100                              | 3                            |
| 88-216         | 150                              | 3                            |
| 216-960        | 200                              | 3                            |
| Above 960      | 500                              | 3                            |

\*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

**7.9.1 E.U.T. Operation**

Operating Environment:

Temperature: 22.5 °C

Humidity: 52.7 % RH

Atmospheric Pressure: 1003 mbar

**7.9.2 Test Mode Description**

Pre-scan / Mode  
Final test Code Description

Pre-scan 06 TX mode (U-NII-1)\_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/terms-and-conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Pre-scan 07

and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

TX mode (U-NII-3)\_Keep the EUT in continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.


Final test 08

Charge + TX mode (U-NII-3)\_Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

Final test 09

Charge + TX mode (U-NII-3)\_Keep the EUT in charging and continuously transmitting mode with all modulation types.All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n(HT20); data rate @ MCS0 is the worst case of IEEE 802.11n(HT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT20); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT40); data rate @ MCS0 is the worst case of IEEE 802.11ac(VHT80), final test modes are considering the modulation and worse data rates. Only the data of worst case is recorded in the report.

### 7.9.3 Test Setup Diagram

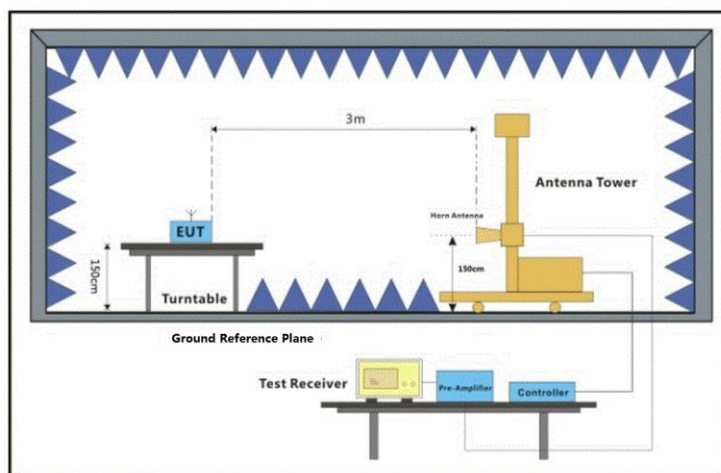

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained herein reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



#### 7.9.4 Measurement Procedure and Data

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- i. Repeat above procedures until all frequencies measured was complete.

Remark:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. Scan from 1GHz to 40GHz, the disturbance above 18GHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

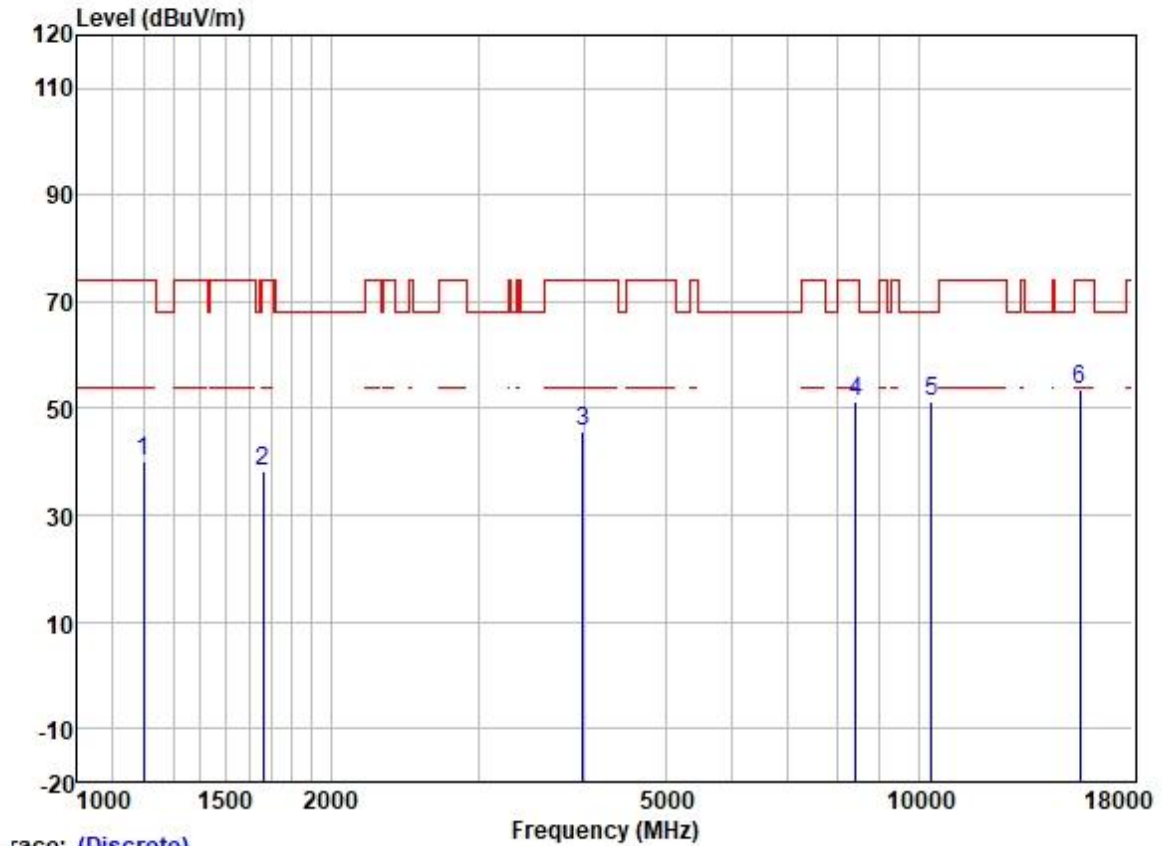

race: (Discrete)


|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1199.726  | 51.37 | 24.68   | 2.34  | 38.39  | 40.00  | 74.00  | -34.00    | HORIZONTAL Peak |
| 2 | 1663.137  | 47.56 | 25.65   | 2.80  | 37.91  | 38.10  | 74.00  | -35.90    | HORIZONTAL Peak |
| 3 | 3992.781  | 48.25 | 29.79   | 4.60  | 36.80  | 45.84  | 74.00  | -28.16    | HORIZONTAL Peak |
| 4 | 8416.584  | 45.31 | 37.09   | 6.64  | 37.57  | 51.47  | 74.00  | -22.53    | HORIZONTAL Peak |
| 5 | 10360.000 | 41.95 | 39.28   | 7.29  | 37.37  | 51.15  | 68.20  | -17.05    | HORIZONTAL Peak |
| 6 | 15540.000 | 40.16 | 39.05   | 9.88  | 35.39  | 53.70  | 74.00  | -20.30    | HORIZONTAL Peak |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)


Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: Low

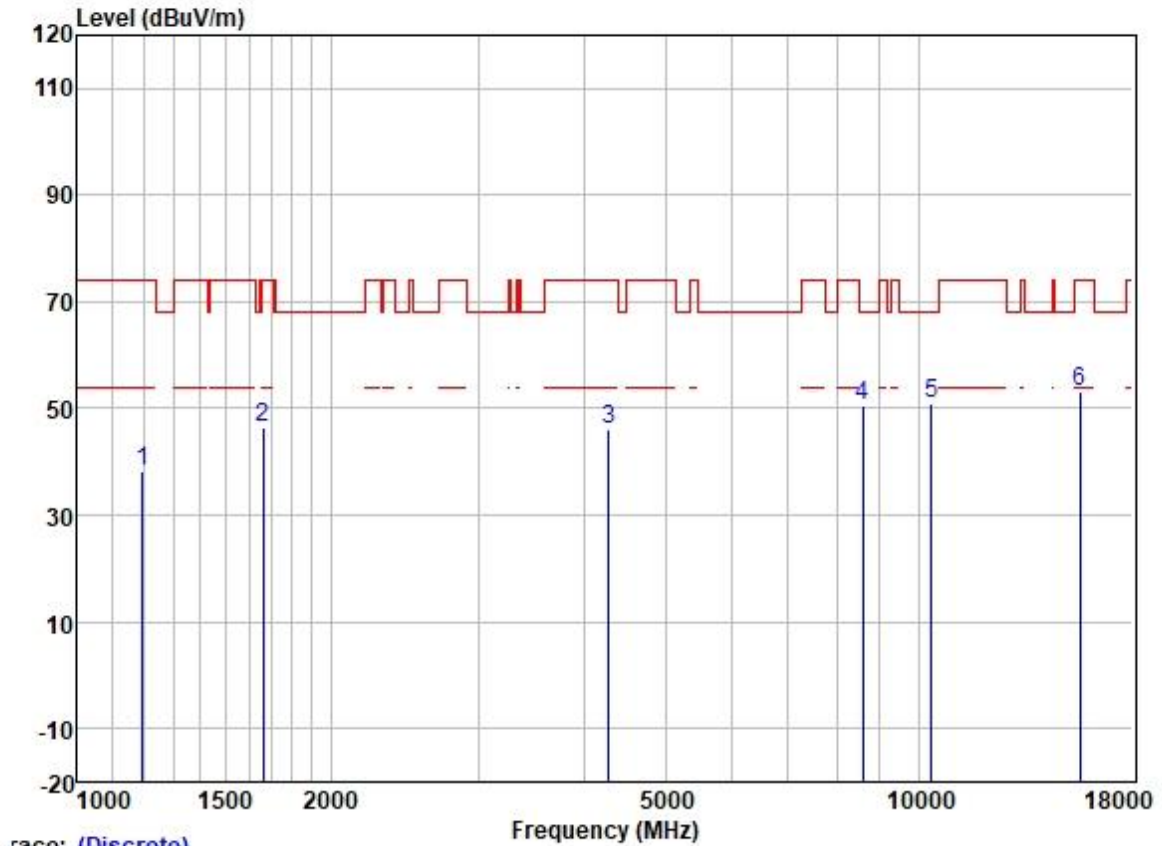

Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |               |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |               |
| 1 | 1196.264  | 49.53 | 24.67   | 2.35  | 38.39  | 38.16  | 74.00 | -35.84    | VERTICAL Peak |
| 2 | 1663.137  | 56.01 | 25.65   | 2.80  | 37.91  | 46.55  | 74.00 | -27.45    | VERTICAL Peak |
| 3 | 4279.589  | 47.67 | 30.42   | 4.63  | 36.81  | 45.91  | 74.00 | -28.09    | VERTICAL Peak |
| 4 | 8588.607  | 44.11 | 37.23   | 6.84  | 37.56  | 50.62  | 68.20 | -17.58    | VERTICAL Peak |
| 5 | 10360.000 | 41.86 | 39.28   | 7.29  | 37.37  | 51.06  | 68.20 | -17.14    | VERTICAL Peak |
| 6 | 15540.000 | 39.79 | 39.05   | 9.88  | 35.39  | 53.33  | 74.00 | -20.67    | VERTICAL Peak |

Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: middle

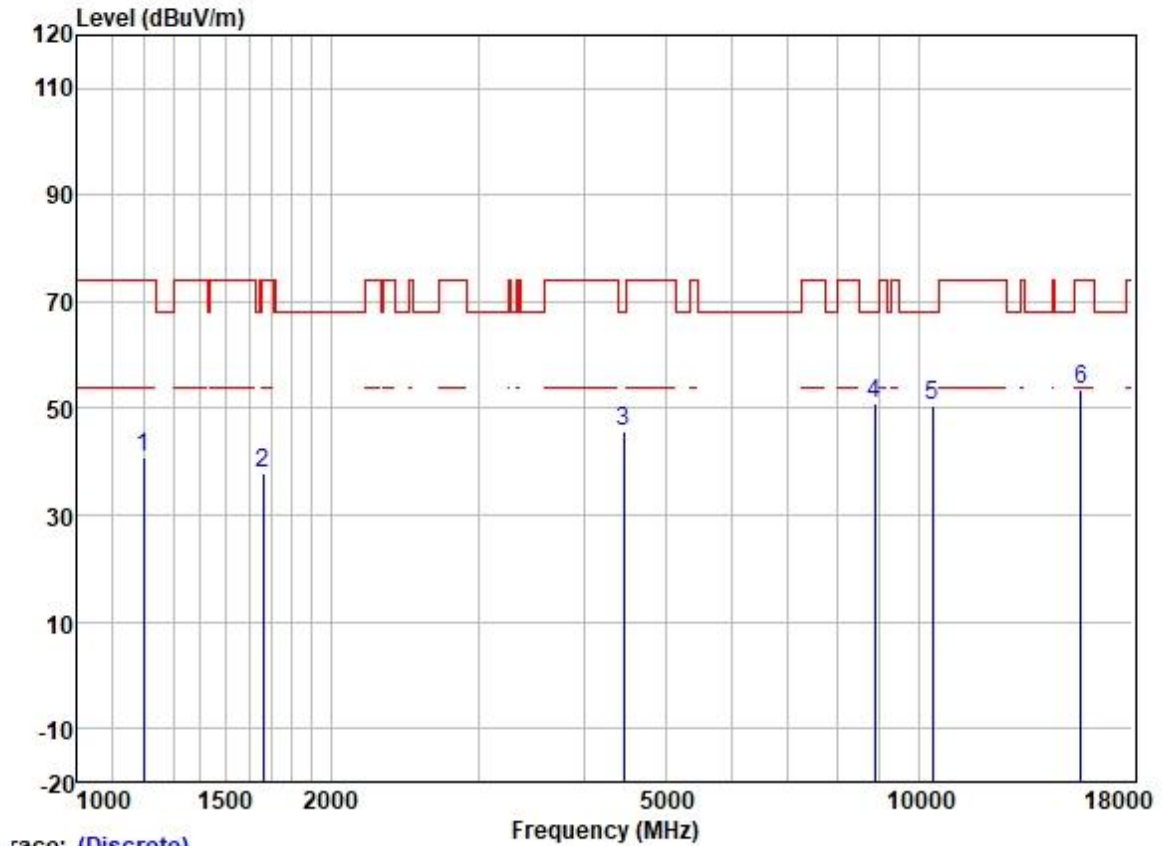


Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |                 |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |                 |
| 1 | 1199.726  | 52.36 | 24.68   | 2.34  | 38.39  | 40.99  | 74.00 | -33.01    | HORIZONTAL Peak |
| 2 | 1663.137  | 47.50 | 25.65   | 2.80  | 37.91  | 38.04  | 74.00 | -35.96    | HORIZONTAL Peak |
| 3 | 4456.315  | 46.76 | 30.75   | 4.88  | 36.81  | 45.58  | 68.20 | -22.62    | HORIZONTAL Peak |
| 4 | 8866.062  | 43.56 | 37.36   | 7.38  | 37.53  | 50.77  | 68.20 | -17.43    | HORIZONTAL Peak |
| 5 | 10400.000 | 41.42 | 39.33   | 7.32  | 37.36  | 50.71  | 68.20 | -17.49    | HORIZONTAL Peak |
| 6 | 15600.000 | 40.13 | 38.99   | 9.88  | 35.39  | 53.61  | 74.00 | -20.39    | HORIZONTAL Peak |




Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: middle

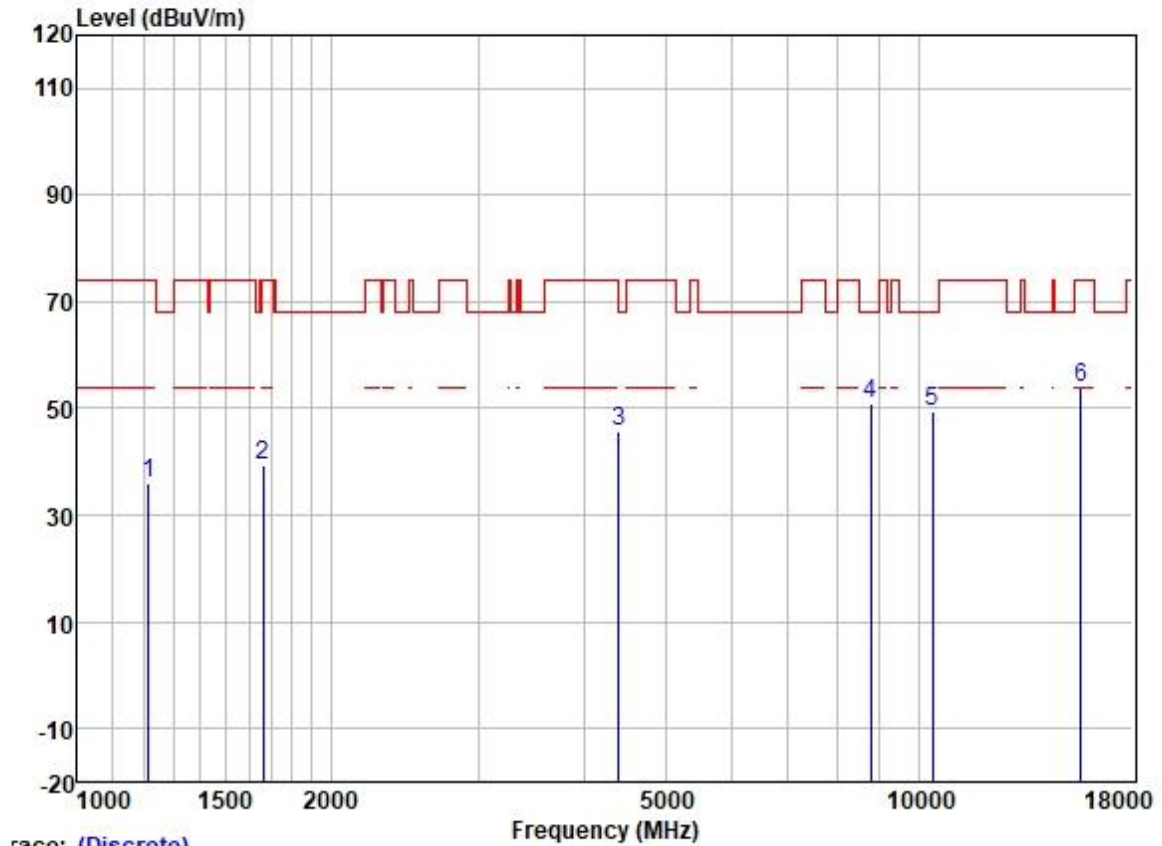

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |               |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |               |
| 1 | 1213.677  | 47.39 | 24.77   | 2.32  | 38.37  | 36.11  | 74.00 | -37.89    | VERTICAL Peak |
| 2 | 1663.137  | 49.00 | 25.65   | 2.80  | 37.91  | 39.54  | 74.00 | -34.46    | VERTICAL Peak |
| 3 | 4405.090  | 46.96 | 30.68   | 4.70  | 36.81  | 45.53  | 68.20 | -22.67    | VERTICAL Peak |
| 4 | 8764.146  | 44.11 | 37.32   | 7.19  | 37.54  | 51.08  | 68.20 | -17.12    | VERTICAL Peak |
| 5 | 10400.000 | 40.24 | 39.33   | 7.32  | 37.36  | 49.53  | 68.20 | -18.67    | VERTICAL Peak |
| 6 | 15600.000 | 40.38 | 38.99   | 9.88  | 35.39  | 53.86  | 74.00 | -20.14    | VERTICAL Peak |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11a; Bandwidth:20MHz; Channel: High

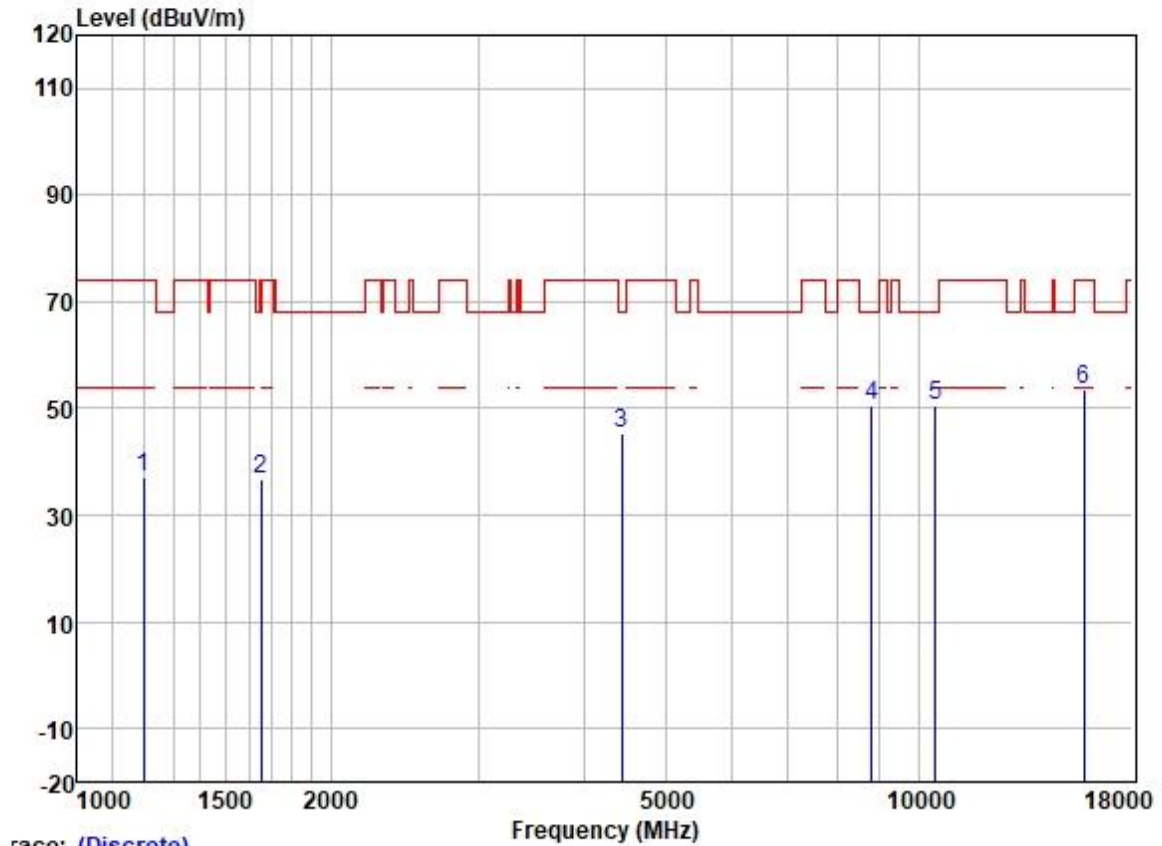

|   |           | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |            |        |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
|   | Freq      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz       | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1199.726  | 48.58       | 24.68  | 2.34  | 38.39  | 37.21  | 74.00  | -36.79 | HORIZONTAL | Peak   |
| 2 | 1653.550  | 46.40       | 25.64  | 2.80  | 37.93  | 36.91  | 68.20  | -31.29 | HORIZONTAL | Peak   |
| 3 | 4443.453  | 46.51       | 30.73  | 4.83  | 36.81  | 45.26  | 68.20  | -22.94 | HORIZONTAL | Peak   |
| 4 | 8789.516  | 43.63       | 37.33  | 7.24  | 37.54  | 50.66  | 68.20  | -17.54 | HORIZONTAL | Peak   |
| 5 | 10480.000 | 41.17       | 39.46  | 7.40  | 37.36  | 50.67  | 68.20  | -17.53 | HORIZONTAL | Peak   |
| 6 | 15720.000 | 40.25       | 38.78  | 9.87  | 35.39  | 53.51  | 74.00  | -20.49 | HORIZONTAL | Peak   |


Test Mode: 08; Polarity: Vertical; Modulation:802.11a; Bandwidth:20MHz; Channel: High

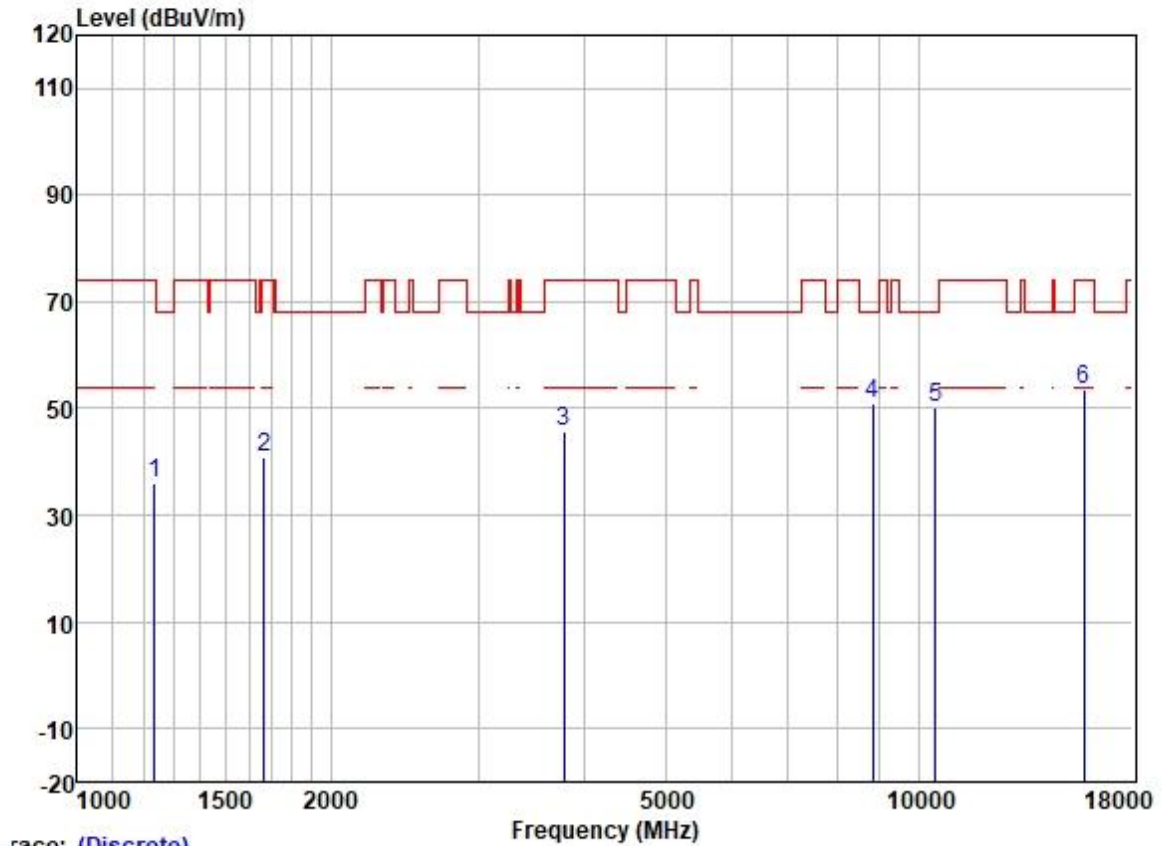

Trace: (Discrete)

|   |           | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|---|-----------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq      | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1234.909  | 47.27 | 24.93   | 2.30  | 38.37  | 36.13  | 74.00  | -37.87 | VERTICAL  | Peak   |
| 2 | 1667.951  | 50.22 | 25.66   | 2.80  | 37.91  | 40.77  | 74.00  | -33.23 | VERTICAL  | Peak   |
| 3 | 3790.361  | 48.29 | 29.50   | 4.60  | 36.85  | 45.54  | 74.00  | -28.46 | VERTICAL  | Peak   |
| 4 | 8814.957  | 43.66 | 37.34   | 7.29  | 37.53  | 50.76  | 68.20  | -17.44 | VERTICAL  | Peak   |
| 5 | 10480.000 | 40.52 | 39.46   | 7.40  | 37.36  | 50.02  | 68.20  | -18.18 | VERTICAL  | Peak   |
| 6 | 15720.000 | 40.17 | 38.78   | 9.87  | 35.39  | 53.43  | 74.00  | -20.57 | VERTICAL  | Peak   |

Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

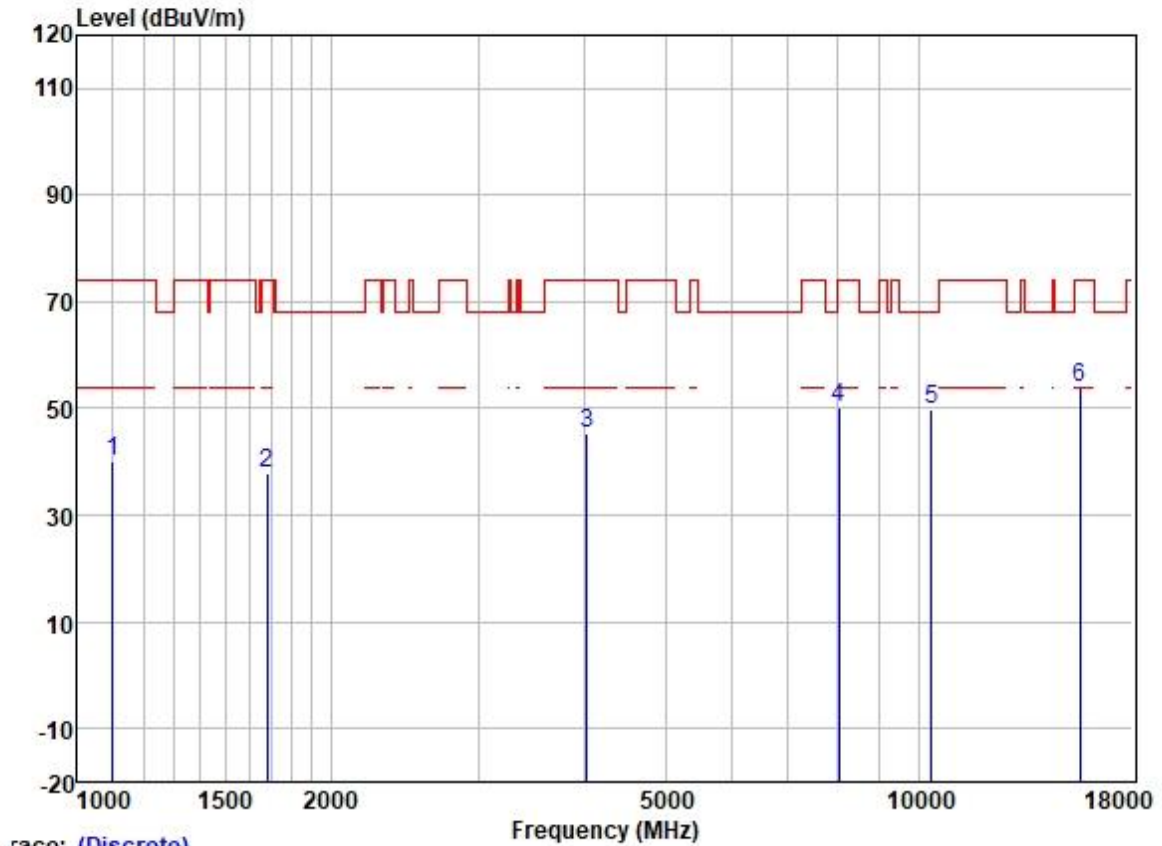

race: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1100.079  | 52.04 | 24.37   | 2.30  | 38.45  | 40.26  | 74.00  | -33.74    | HORIZONTAL Peak |
| 2 | 1682.477  | 47.40 | 25.68   | 2.80  | 37.91  | 37.97  | 74.00  | -36.03    | HORIZONTAL Peak |
| 3 | 4039.212  | 47.69 | 29.85   | 4.60  | 36.80  | 45.34  | 74.00  | -28.66    | HORIZONTAL Peak |
| 4 | 8036.214  | 44.62 | 36.91   | 6.19  | 37.60  | 50.12  | 74.00  | -23.88    | HORIZONTAL Peak |
| 5 | 10360.000 | 40.47 | 39.28   | 7.29  | 37.37  | 49.67  | 68.20  | -18.53    | HORIZONTAL Peak |
| 6 | 15540.000 | 40.20 | 39.05   | 9.88  | 35.39  | 53.74  | 74.00  | -20.26    | HORIZONTAL Peak |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: Low

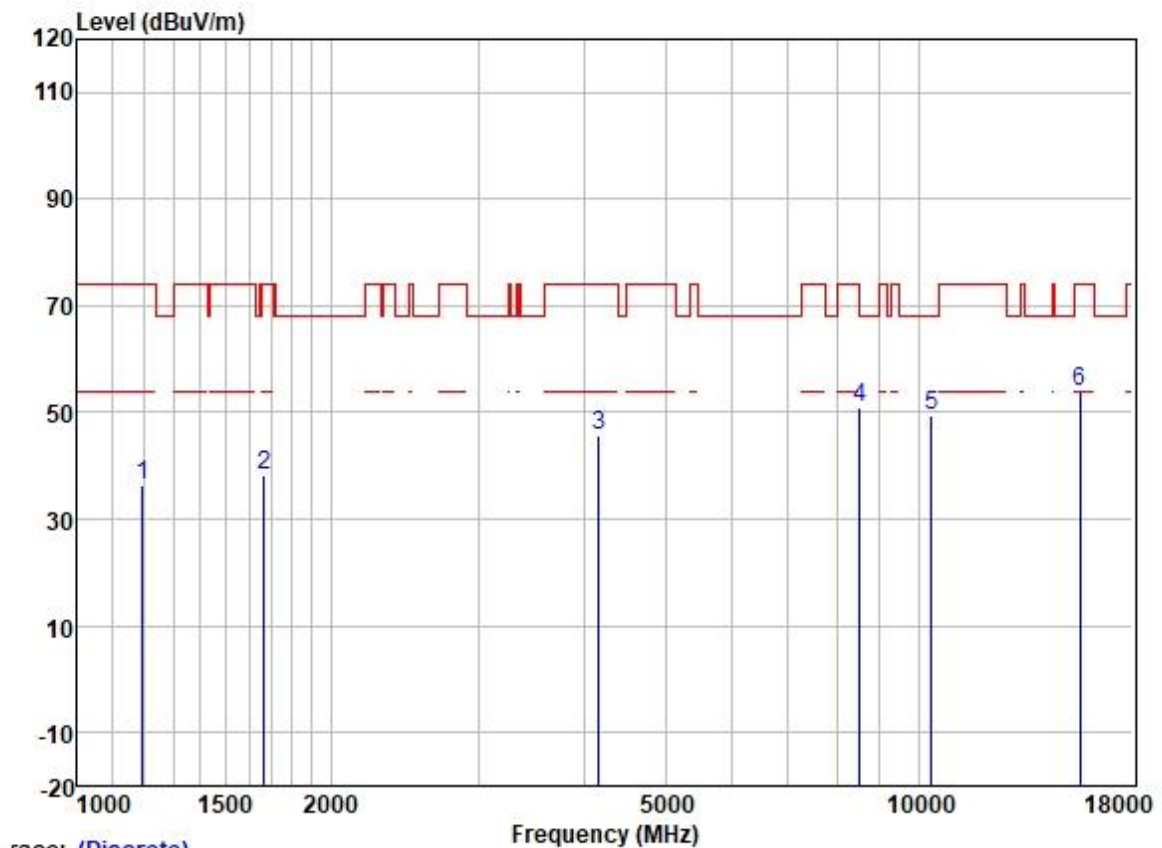


Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1196.264  | 47.63 | 24.67   | 2.35  | 38.39  | 36.26  | 74.00  | -37.74    | VERTICAL Peak |
| 2 | 1667.951  | 47.84 | 25.66   | 2.80  | 37.91  | 38.39  | 74.00  | -35.61    | VERTICAL Peak |
| 3 | 4169.698  | 47.74 | 30.09   | 4.60  | 36.80  | 45.63  | 74.00  | -28.37    | VERTICAL Peak |
| 4 | 8514.456  | 44.58 | 37.17   | 6.73  | 37.57  | 50.91  | 68.20  | -17.29    | VERTICAL Peak |
| 5 | 10360.000 | 40.17 | 39.28   | 7.29  | 37.37  | 49.37  | 68.20  | -18.83    | VERTICAL Peak |
| 6 | 15540.000 | 40.25 | 39.05   | 9.88  | 35.39  | 53.79  | 74.00  | -20.21    | VERTICAL Peak |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel: middle

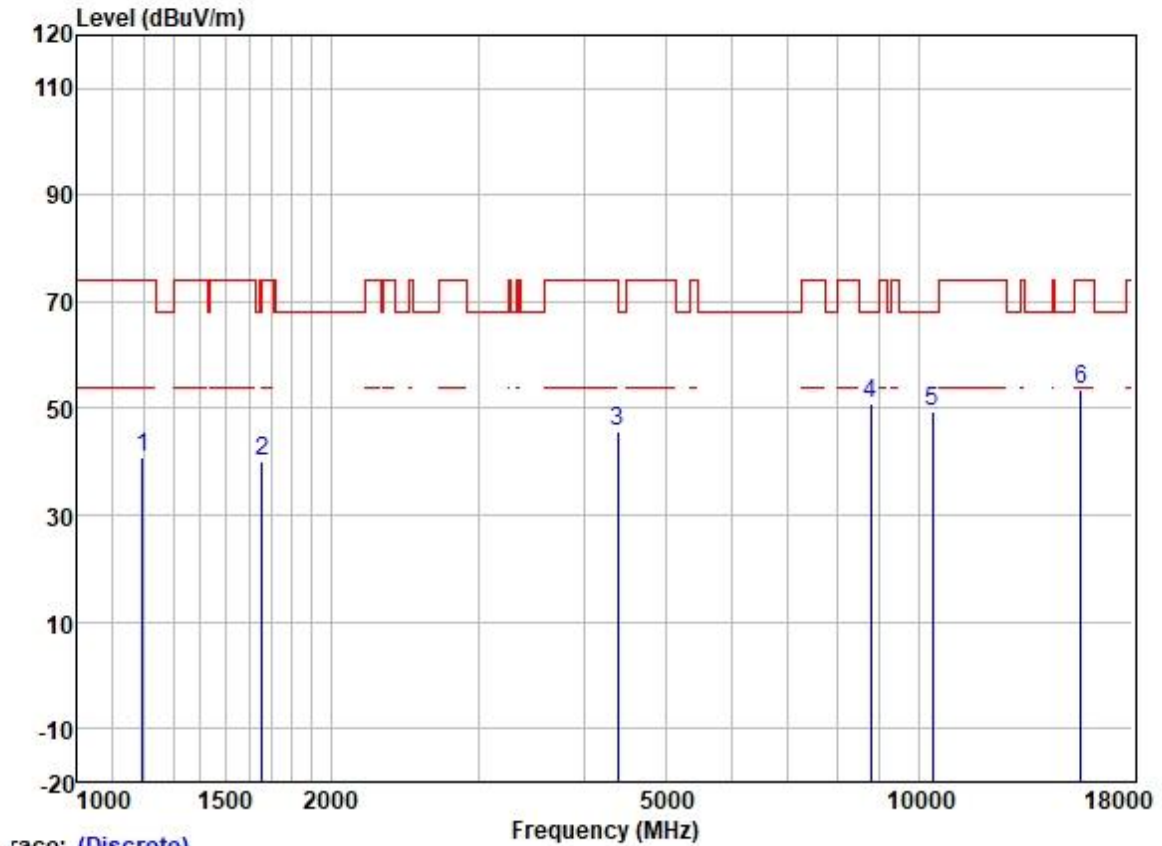


|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1196.264  | 52.05 | 24.67   | 2.35  | 38.39  | 40.68  | 74.00  | -33.32    | HORIZONTAL Peak |
| 2 | 1658.337  | 49.48 | 25.65   | 2.80  | 37.93  | 40.00  | 68.20  | -28.20    | HORIZONTAL Peak |
| 3 | 4392.376  | 47.10 | 30.66   | 4.70  | 36.81  | 45.65  | 74.00  | -28.35    | HORIZONTAL Peak |
| 4 | 8764.146  | 43.83 | 37.32   | 7.19  | 37.54  | 50.80  | 68.20  | -17.40    | HORIZONTAL Peak |
| 5 | 10400.000 | 40.28 | 39.33   | 7.32  | 37.36  | 49.57  | 68.20  | -18.63    | HORIZONTAL Peak |
| 6 | 15600.000 | 40.16 | 38.99   | 9.88  | 35.39  | 53.64  | 74.00  | -20.36    | HORIZONTAL Peak |

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: middle

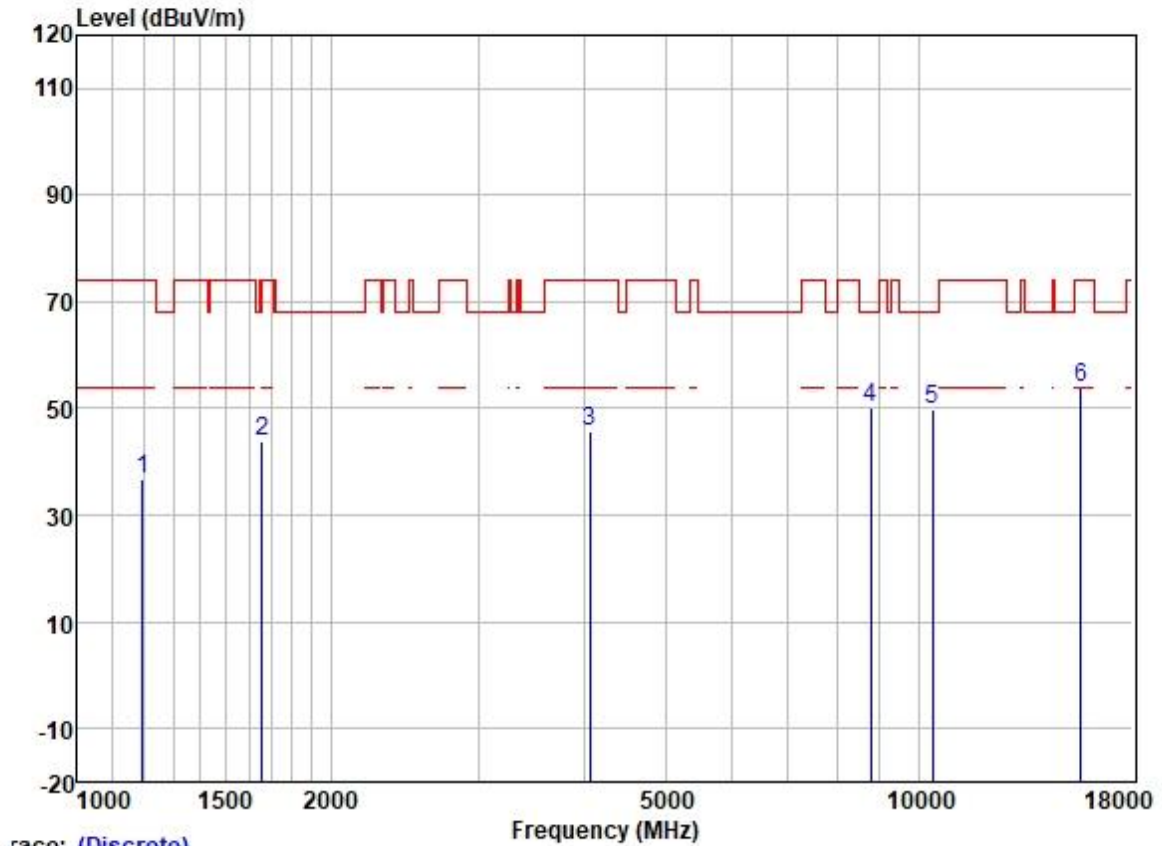

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1196.264  | 47.95 | 24.67   | 2.35  | 38.39  | 36.58  | 74.00  | -37.42    | VERTICAL Peak |
| 2 | 1658.337  | 53.20 | 25.65   | 2.80  | 37.93  | 43.72  | 68.20  | -24.48    | VERTICAL Peak |
| 3 | 4062.629  | 47.84 | 29.88   | 4.60  | 36.80  | 45.52  | 74.00  | -28.48    | VERTICAL Peak |
| 4 | 8764.146  | 43.40 | 37.32   | 7.19  | 37.54  | 50.37  | 68.20  | -17.83    | VERTICAL Peak |
| 5 | 10400.000 | 40.35 | 39.33   | 7.32  | 37.36  | 49.64  | 68.20  | -18.56    | VERTICAL Peak |
| 6 | 15600.000 | 40.34 | 38.99   | 9.88  | 35.39  | 53.82  | 74.00  | -20.18    | VERTICAL Peak |


Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 20MHz; Channel: High

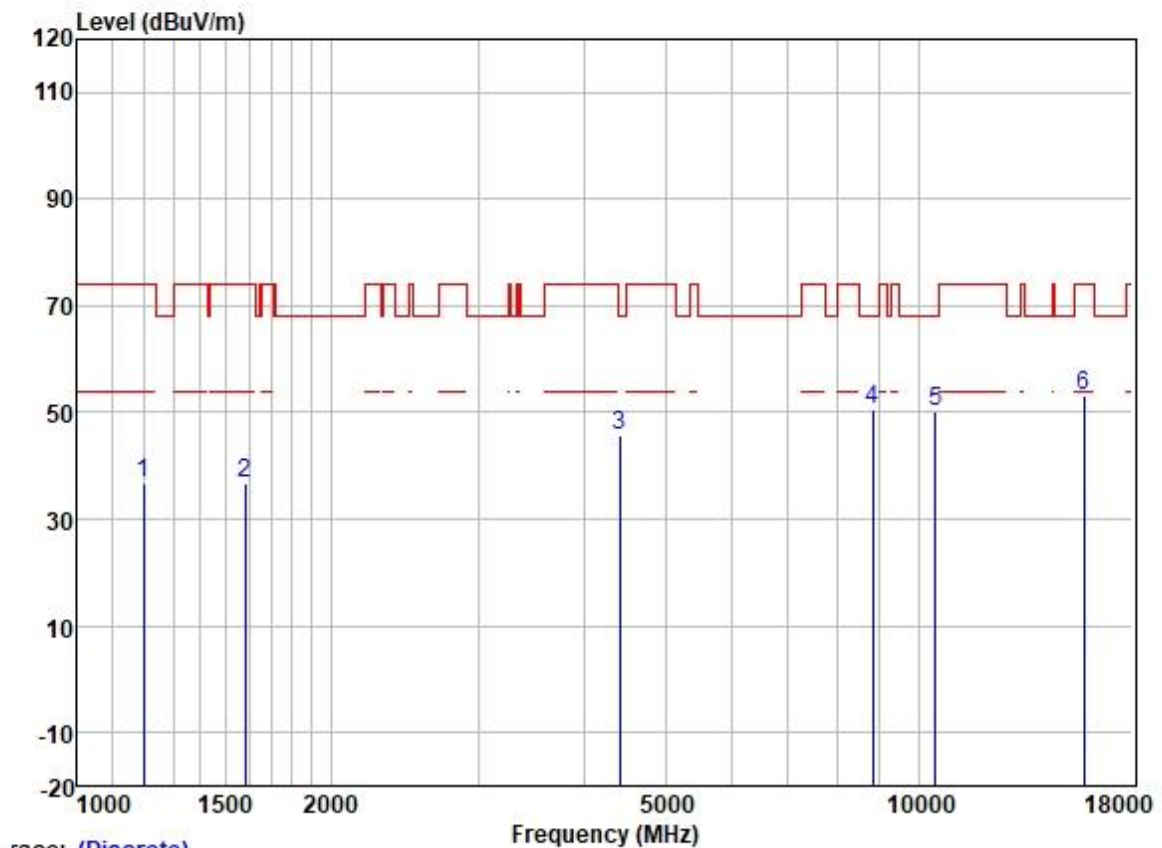

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1199.726  | 48.28 | 24.68   | 2.34  | 38.39  | 36.91  | 74.00  | -37.09    | HORIZONTAL Peak |
| 2 | 1583.392  | 46.41 | 25.56   | 2.80  | 38.00  | 36.77  | 74.00  | -37.23    | HORIZONTAL Peak |
| 3 | 4417.841  | 47.05 | 30.70   | 4.74  | 36.81  | 45.68  | 68.20  | -22.52    | HORIZONTAL Peak |
| 4 | 8814.957  | 43.42 | 37.34   | 7.29  | 37.53  | 50.52  | 68.20  | -17.68    | HORIZONTAL Peak |
| 5 | 10480.000 | 40.58 | 39.46   | 7.40  | 37.36  | 50.08  | 68.20  | -18.12    | HORIZONTAL Peak |
| 6 | 15720.000 | 39.79 | 38.78   | 9.87  | 35.39  | 53.05  | 74.00  | -20.95    | HORIZONTAL Peak |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel: High

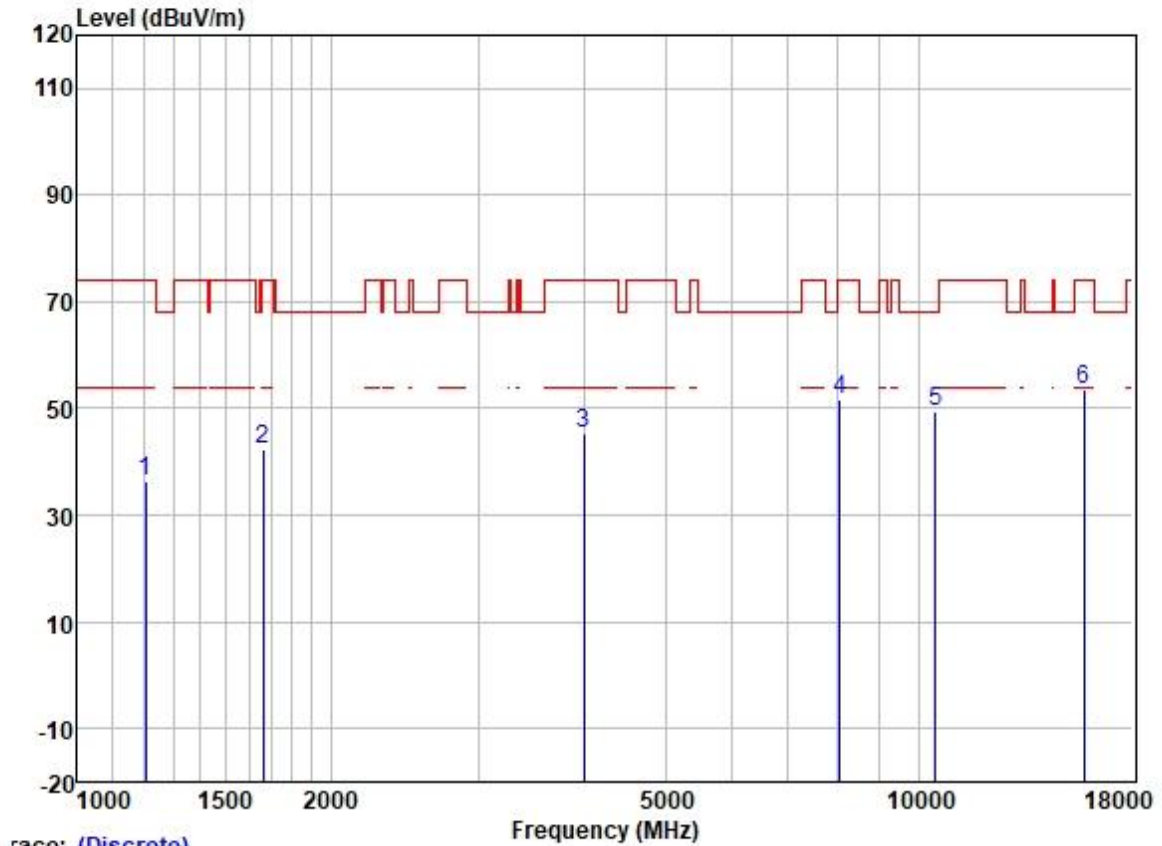


Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |               |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |               |
| 1 | 1206.682  | 47.82 | 24.72   | 2.33  | 38.39  | 36.48  | 74.00 | -37.52    | VERTICAL Peak |
| 2 | 1663.137  | 51.80 | 25.65   | 2.80  | 37.91  | 42.34  | 74.00 | -31.66    | VERTICAL Peak |
| 3 | 4004.339  | 47.80 | 29.80   | 4.60  | 36.80  | 45.40  | 74.00 | -28.60    | VERTICAL Peak |
| 4 | 8059.475  | 46.01 | 36.92   | 6.21  | 37.60  | 51.54  | 74.00 | -22.46    | VERTICAL Peak |
| 5 | 10480.000 | 40.09 | 39.46   | 7.40  | 37.36  | 49.59  | 68.20 | -18.61    | VERTICAL Peak |
| 6 | 15720.000 | 40.38 | 38.78   | 9.87  | 35.39  | 53.64  | 74.00 | -20.36    | VERTICAL Peak |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

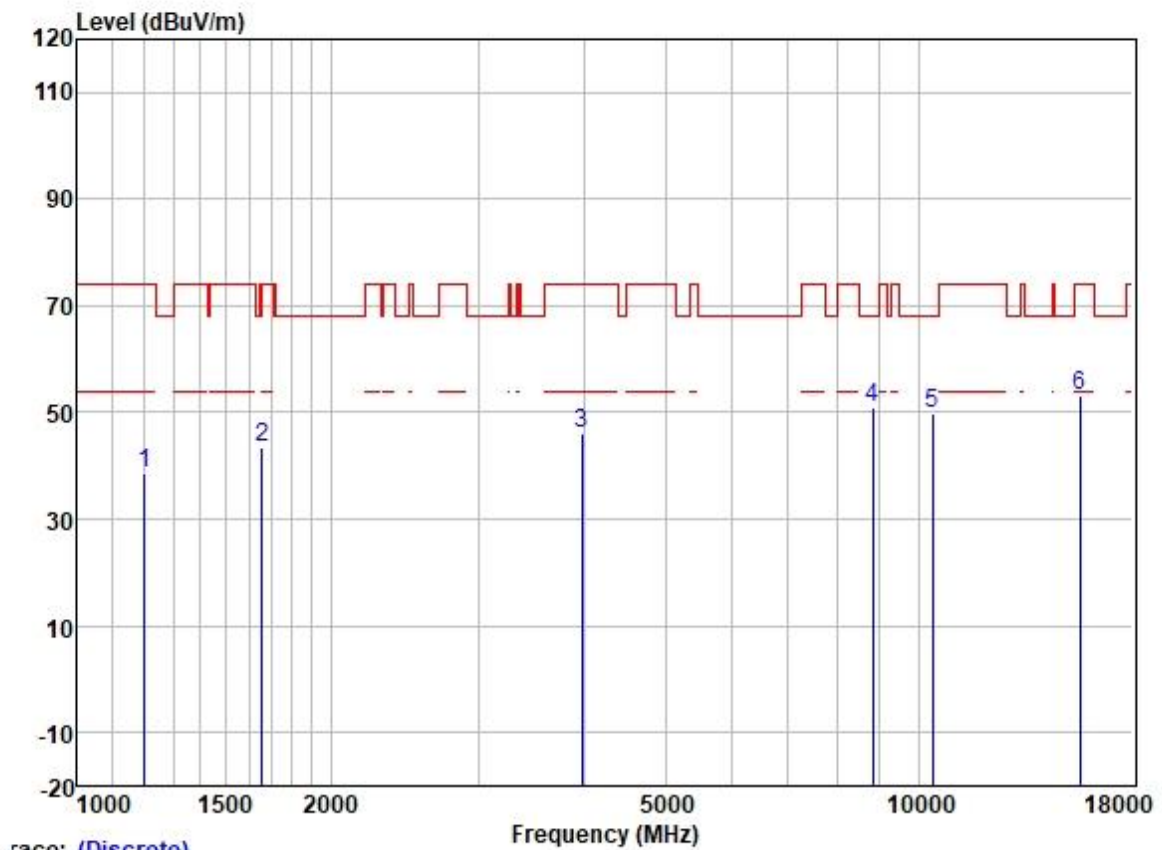


|   |           | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |            |        |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
|   | Freq      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz       | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1203.199  | 49.94       | 24.70  | 2.34  | 38.39  | 38.59  | 74.00  | -35.41 | HORIZONTAL | Peak   |
| 2 | 1658.337  | 53.11       | 25.65  | 2.80  | 37.93  | 43.63  | 68.20  | -24.57 | HORIZONTAL | Peak   |
| 3 | 3981.257  | 48.68       | 29.78  | 4.60  | 36.81  | 46.25  | 74.00  | -27.75 | HORIZONTAL | Peak   |
| 4 | 8814.957  | 43.95       | 37.34  | 7.29  | 37.53  | 51.05  | 68.20  | -17.15 | HORIZONTAL | Peak   |
| 5 | 10380.000 | 40.46       | 39.33  | 7.32  | 37.37  | 49.74  | 68.20  | -18.46 | HORIZONTAL | Peak   |
| 6 | 15570.000 | 39.82       | 38.99  | 9.88  | 35.39  | 53.30  | 74.00  | -20.70 | HORIZONTAL | Peak   |

Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: Low

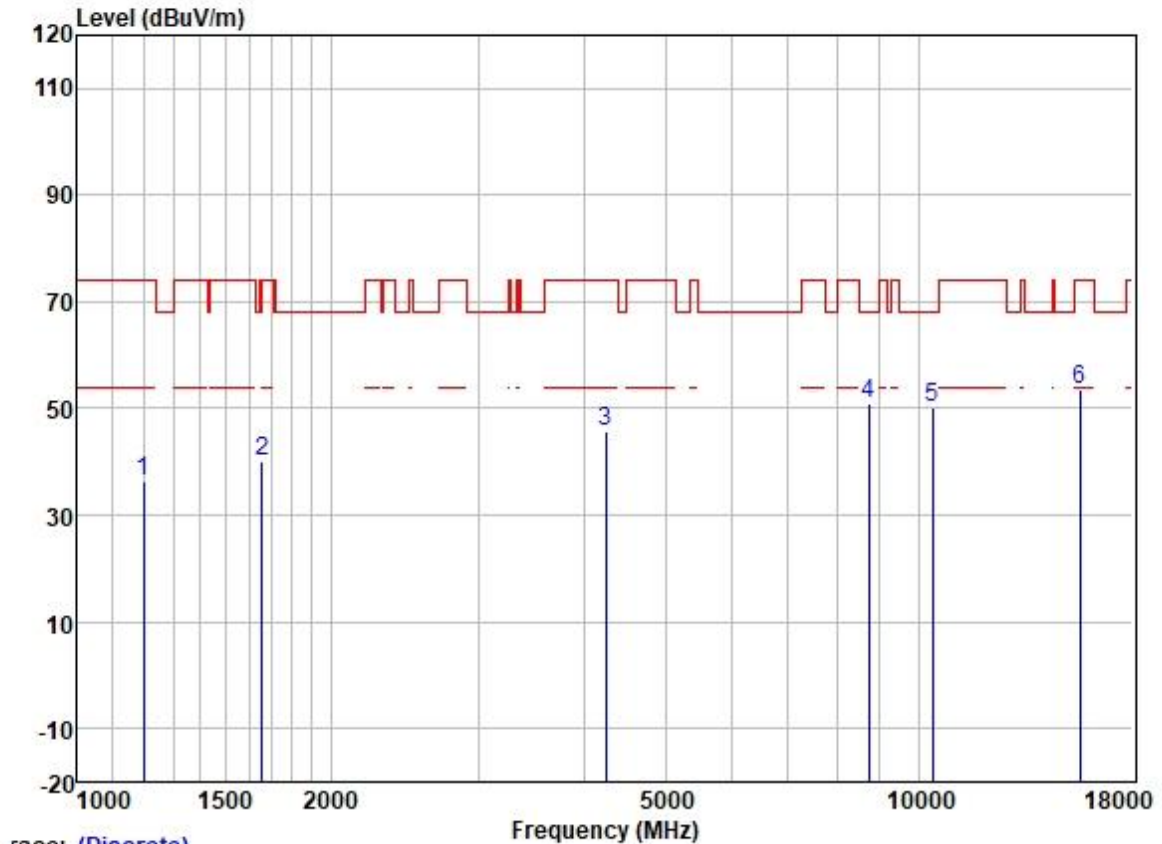

|   |           | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |           |        |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz       | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1199.726  | 47.68       | 24.68  | 2.34  | 38.39  | 36.31  | 74.00  | -37.69 | VERTICAL  | Peak   |
| 2 | 1658.337  | 49.75       | 25.65  | 2.80  | 37.93  | 40.27  | 68.20  | -27.93 | VERTICAL  | Peak   |
| 3 | 4242.641  | 47.67       | 30.30  | 4.62  | 36.81  | 45.78  | 74.00  | -28.22 | VERTICAL  | Peak   |
| 4 | 8738.852  | 43.93       | 37.31  | 7.13  | 37.54  | 50.83  | 68.20  | -17.37 | VERTICAL  | Peak   |
| 5 | 10380.000 | 40.89       | 39.33  | 7.32  | 37.37  | 50.17  | 68.20  | -18.03 | VERTICAL  | Peak   |
| 6 | 15570.000 | 40.15       | 38.99  | 9.88  | 35.39  | 53.63  | 74.00  | -20.37 | VERTICAL  | Peak   |


Test Mode: 08; Polarity: Horizontal; Modulation: 802.11n; Bandwidth: 40MHz; Channel: High

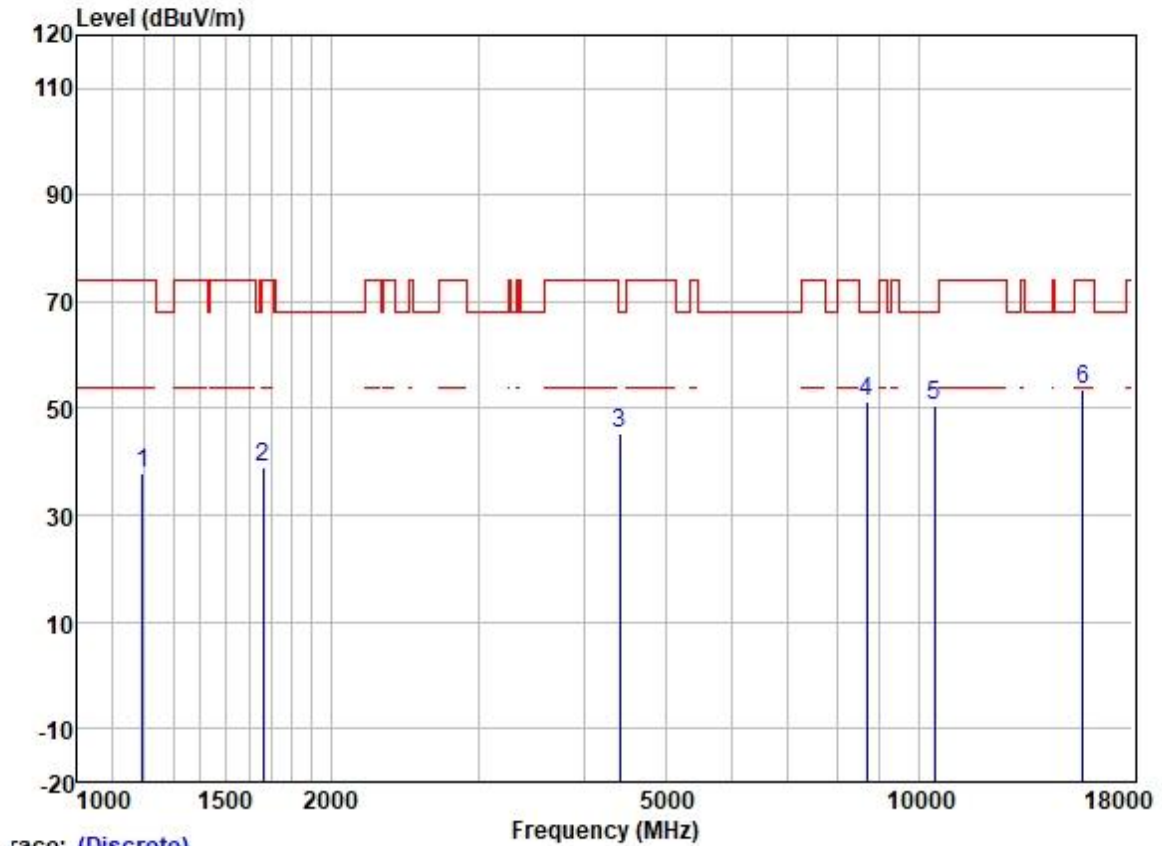

|   |           | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |            |        |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
|   | Freq      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz       | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1196.264  | 49.33       | 24.67  | 2.35  | 38.39  | 37.96  | 74.00  | -36.04 | HORIZONTAL | Peak   |
| 2 | 1663.137  | 48.55       | 25.65  | 2.80  | 37.91  | 39.09  | 74.00  | -34.91 | HORIZONTAL | Peak   |
| 3 | 4417.841  | 46.76       | 30.70  | 4.74  | 36.81  | 45.39  | 68.20  | -22.81 | HORIZONTAL | Peak   |
| 4 | 8688.480  | 44.44       | 37.28  | 7.02  | 37.55  | 51.19  | 68.20  | -17.01 | HORIZONTAL | Peak   |
| 5 | 10460.000 | 41.29       | 39.42  | 7.37  | 37.36  | 50.72  | 68.20  | -17.48 | HORIZONTAL | Peak   |
| 6 | 15690.000 | 40.39       | 38.86  | 9.87  | 35.39  | 53.73  | 74.00  | -20.27 | HORIZONTAL | Peak   |



Test Mode: 08; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel: High

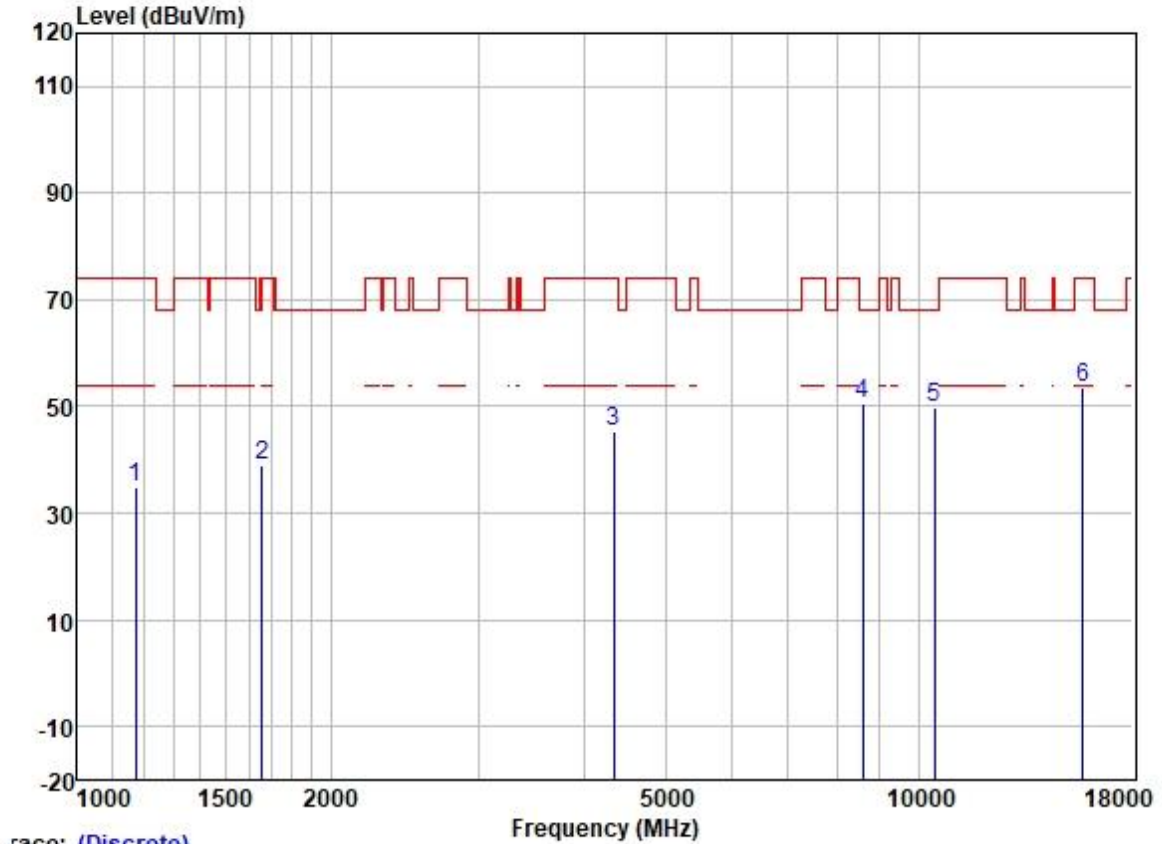


race: (Discrete)

|   | Freq      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |           |        |
|---|-----------|-------------|--------|--------|--------|--------|--------|--------|-----------|--------|
|   | MHz       | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz       | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1172.303  | 46.23       | 24.56  | 2.39   | 38.40  | 34.78  | 74.00  | -39.22 | VERTICAL  | Peak   |
| 2 | 1658.337  | 48.60       | 25.65  | 2.80   | 37.93  | 39.12  | 68.20  | -29.08 | VERTICAL  | Peak   |
| 3 | 4341.886  | 46.92       | 30.57  | 4.67   | 36.81  | 45.35  | 74.00  | -28.65 | VERTICAL  | Peak   |
| 4 | 8588.607  | 44.03       | 37.23  | 6.84   | 37.56  | 50.54  | 68.20  | -17.66 | VERTICAL  | Peak   |
| 5 | 10460.000 | 40.24       | 39.42  | 7.37   | 37.36  | 49.67  | 68.20  | -18.53 | VERTICAL  | Peak   |
| 6 | 15690.000 | 40.14       | 38.86  | 9.87   | 35.39  | 53.48  | 74.00  | -20.52 | VERTICAL  | Peak   |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

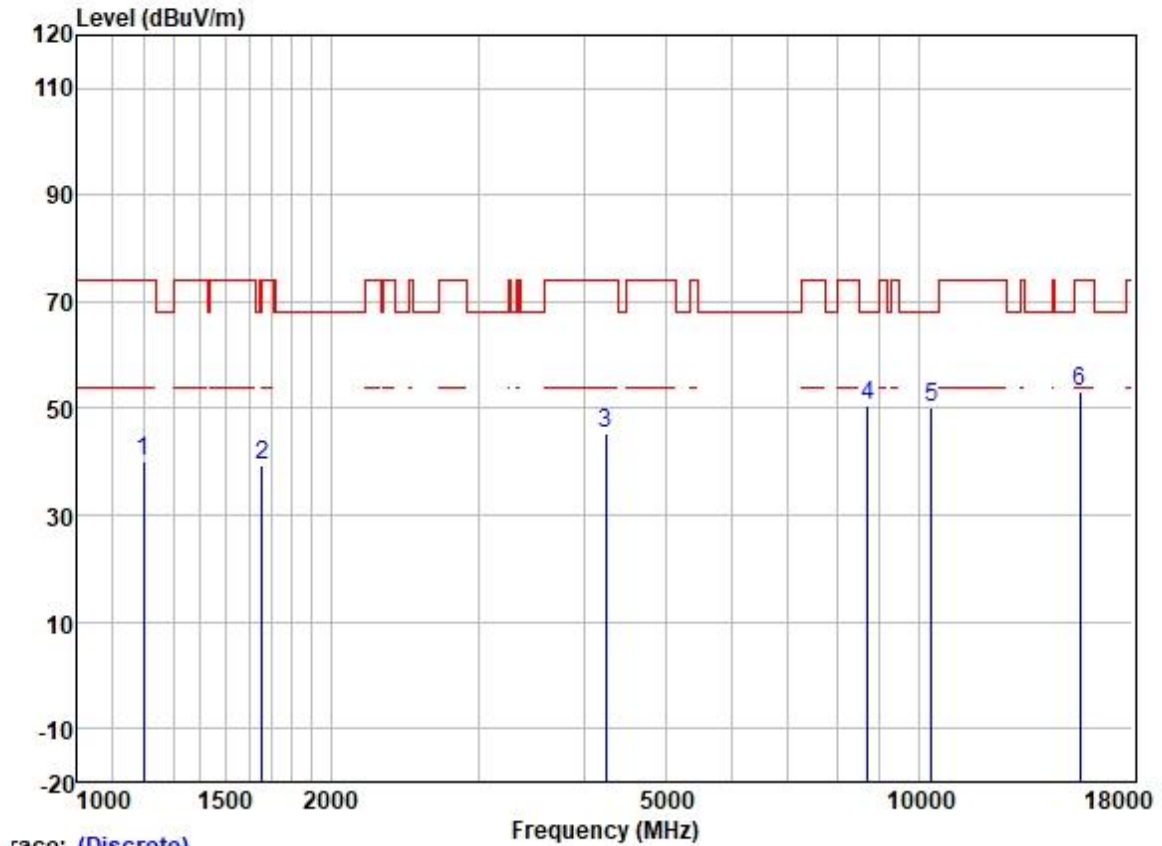

Trace: (Discrete)


|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1199.726  | 51.66 | 24.68   | 2.34  | 38.39  | 40.29  | 74.00  | -33.71    | HORIZONTAL Peak |
| 2 | 1658.337  | 48.94 | 25.65   | 2.80  | 37.93  | 39.46  | 68.20  | -28.74    | HORIZONTAL Peak |
| 3 | 4242.641  | 47.11 | 30.30   | 4.62  | 36.81  | 45.22  | 74.00  | -28.78    | HORIZONTAL Peak |
| 4 | 8713.630  | 43.92 | 37.30   | 7.07  | 37.55  | 50.74  | 68.20  | -17.46    | HORIZONTAL Peak |
| 5 | 10360.000 | 41.17 | 39.28   | 7.29  | 37.37  | 50.37  | 68.20  | -17.83    | HORIZONTAL Peak |
| 6 | 15540.000 | 39.76 | 39.05   | 9.88  | 35.39  | 53.30  | 74.00  | -20.70    | HORIZONTAL Peak |

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: Low

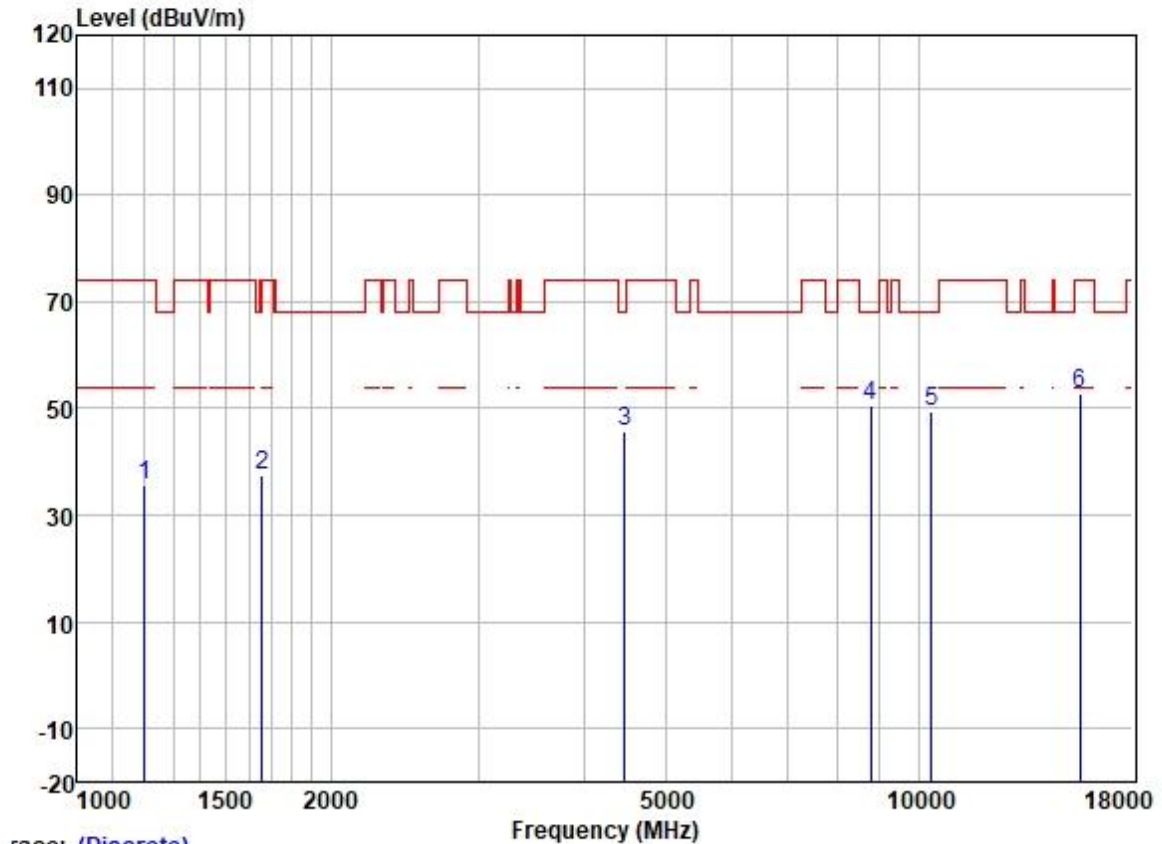

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1203.199  | 47.10 | 24.70   | 2.34  | 38.39  | 35.75  | 74.00  | -38.25    | VERTICAL Peak |
| 2 | 1658.337  | 46.95 | 25.65   | 2.80  | 37.93  | 37.47  | 68.20  | -30.73    | VERTICAL Peak |
| 3 | 4469.214  | 46.94 | 30.77   | 4.93  | 36.81  | 45.83  | 68.20  | -22.37    | VERTICAL Peak |
| 4 | 8764.146  | 43.58 | 37.32   | 7.19  | 37.54  | 50.55  | 68.20  | -17.65    | VERTICAL Peak |
| 5 | 10360.000 | 40.20 | 39.28   | 7.29  | 37.37  | 49.40  | 68.20  | -18.80    | VERTICAL Peak |
| 6 | 15540.000 | 39.42 | 39.05   | 9.88  | 35.39  | 52.96  | 74.00  | -21.04    | VERTICAL Peak |

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: middle

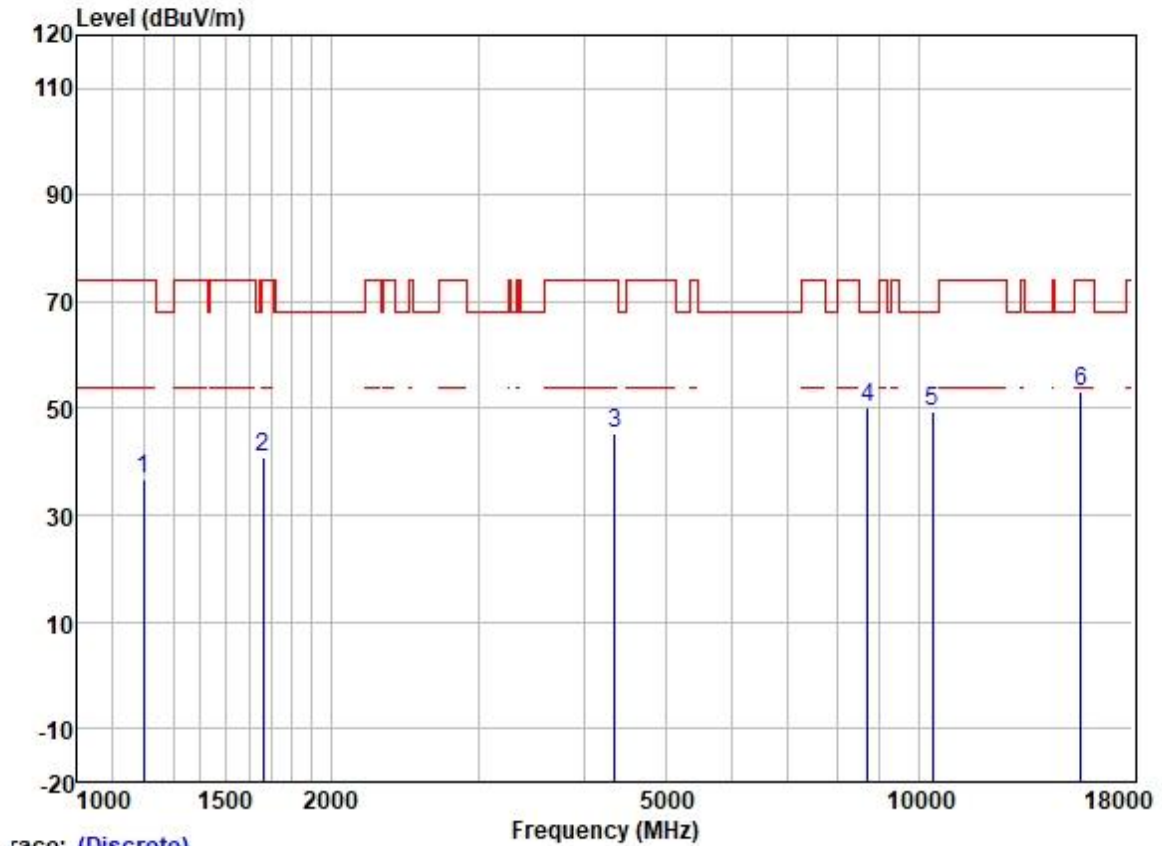


Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1199.726  | 47.96 | 24.68   | 2.34  | 38.39  | 36.59  | 74.00  | -37.41    | HORIZONTAL Peak |
| 2 | 1663.137  | 50.17 | 25.65   | 2.80  | 37.91  | 40.71  | 74.00  | -33.29    | HORIZONTAL Peak |
| 3 | 4354.454  | 47.04 | 30.59   | 4.68  | 36.81  | 45.50  | 74.00  | -28.50    | HORIZONTAL Peak |
| 4 | 8713.630  | 43.51 | 37.30   | 7.07  | 37.55  | 50.33  | 68.20  | -17.87    | HORIZONTAL Peak |
| 5 | 10400.000 | 40.15 | 39.33   | 7.32  | 37.36  | 49.44  | 68.20  | -18.76    | HORIZONTAL Peak |
| 6 | 15600.000 | 39.81 | 38.99   | 9.88  | 35.39  | 53.29  | 74.00  | -20.71    | HORIZONTAL Peak |




Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: middle

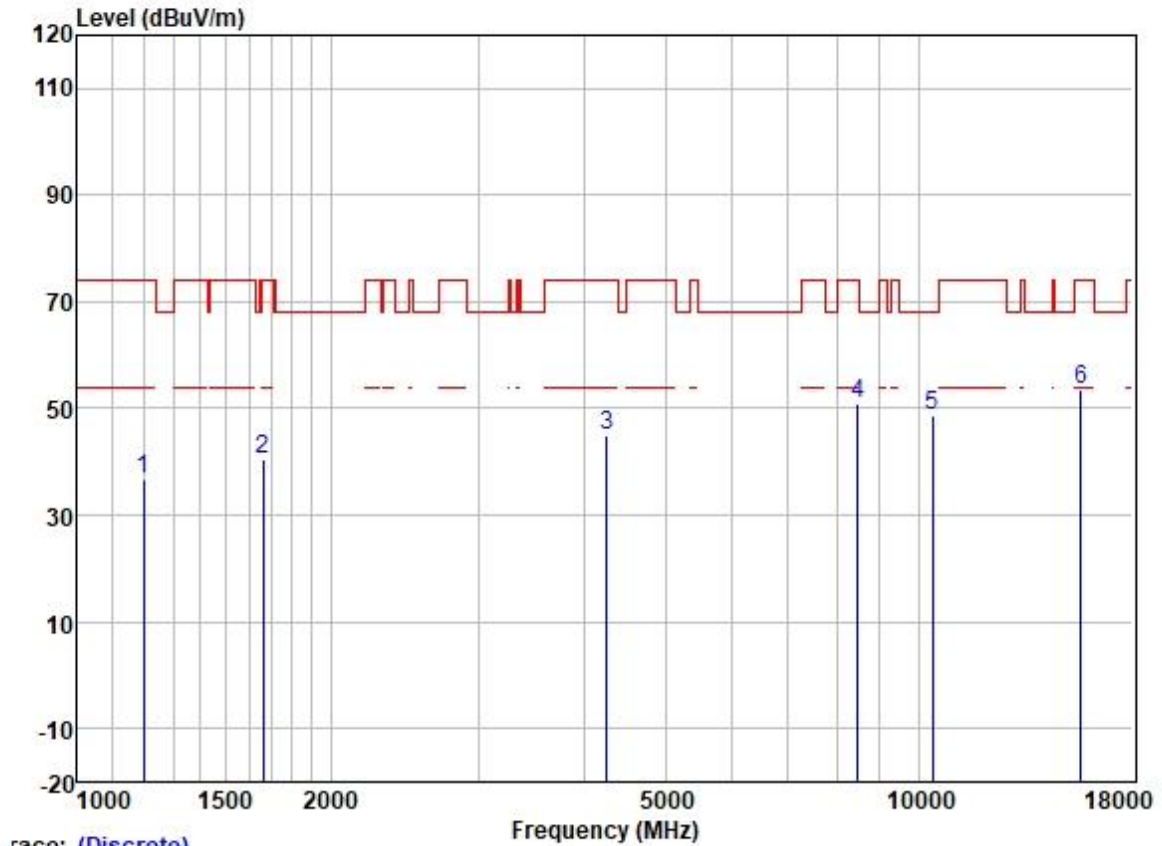

Trace: (Discrete)


|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1199.726  | 48.20 | 24.68   | 2.34  | 38.39  | 36.83  | 74.00  | -37.17    | VERTICAL Peak |
| 2 | 1663.137  | 50.04 | 25.65   | 2.80  | 37.91  | 40.58  | 74.00  | -33.42    | VERTICAL Peak |
| 3 | 4254.921  | 46.87 | 30.34   | 4.62  | 36.81  | 45.02  | 74.00  | -28.98    | VERTICAL Peak |
| 4 | 8465.379  | 44.53 | 37.13   | 6.68  | 37.57  | 50.77  | 74.00  | -23.23    | VERTICAL Peak |
| 5 | 10400.000 | 39.25 | 39.33   | 7.32  | 37.36  | 48.54  | 68.20  | -19.66    | VERTICAL Peak |
| 6 | 15600.000 | 40.23 | 38.99   | 9.88  | 35.39  | 53.71  | 74.00  | -20.29    | VERTICAL Peak |

Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel: High

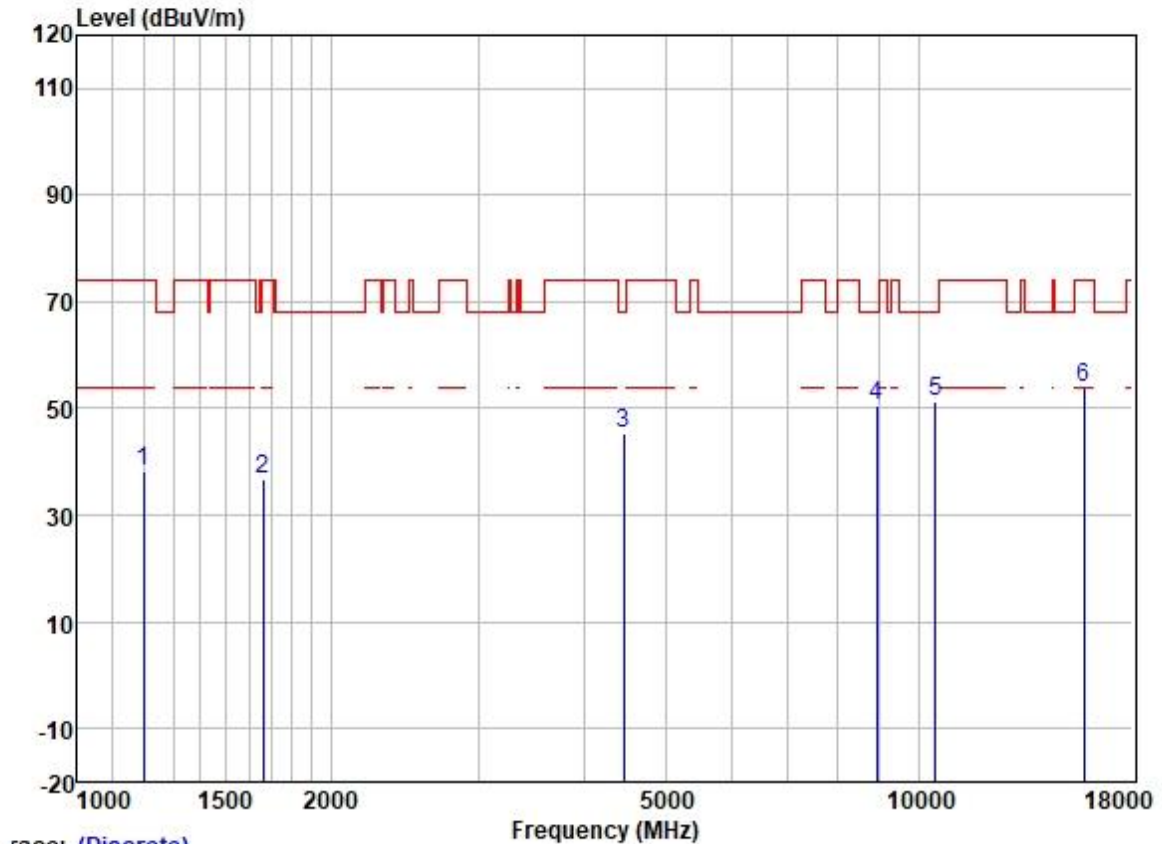

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |                 |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |                 |
| 1 | 1199.726  | 49.46 | 24.68   | 2.34  | 38.39  | 38.09  | 74.00 | -35.91    | HORIZONTAL Peak |
| 2 | 1663.137  | 46.20 | 25.65   | 2.80  | 37.91  | 36.74  | 74.00 | -37.26    | HORIZONTAL Peak |
| 3 | 4456.315  | 46.52 | 30.75   | 4.88  | 36.81  | 45.34  | 68.20 | -22.86    | HORIZONTAL Peak |
| 4 | 8917.462  | 43.08 | 37.38   | 7.46  | 37.52  | 50.40  | 68.20 | -17.80    | HORIZONTAL Peak |
| 5 | 10480.000 | 41.71 | 39.46   | 7.40  | 37.36  | 51.21  | 68.20 | -16.99    | HORIZONTAL Peak |
| 6 | 15720.000 | 40.63 | 38.78   | 9.87  | 35.39  | 53.89  | 74.00 | -20.11    | HORIZONTAL Peak |

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel: High

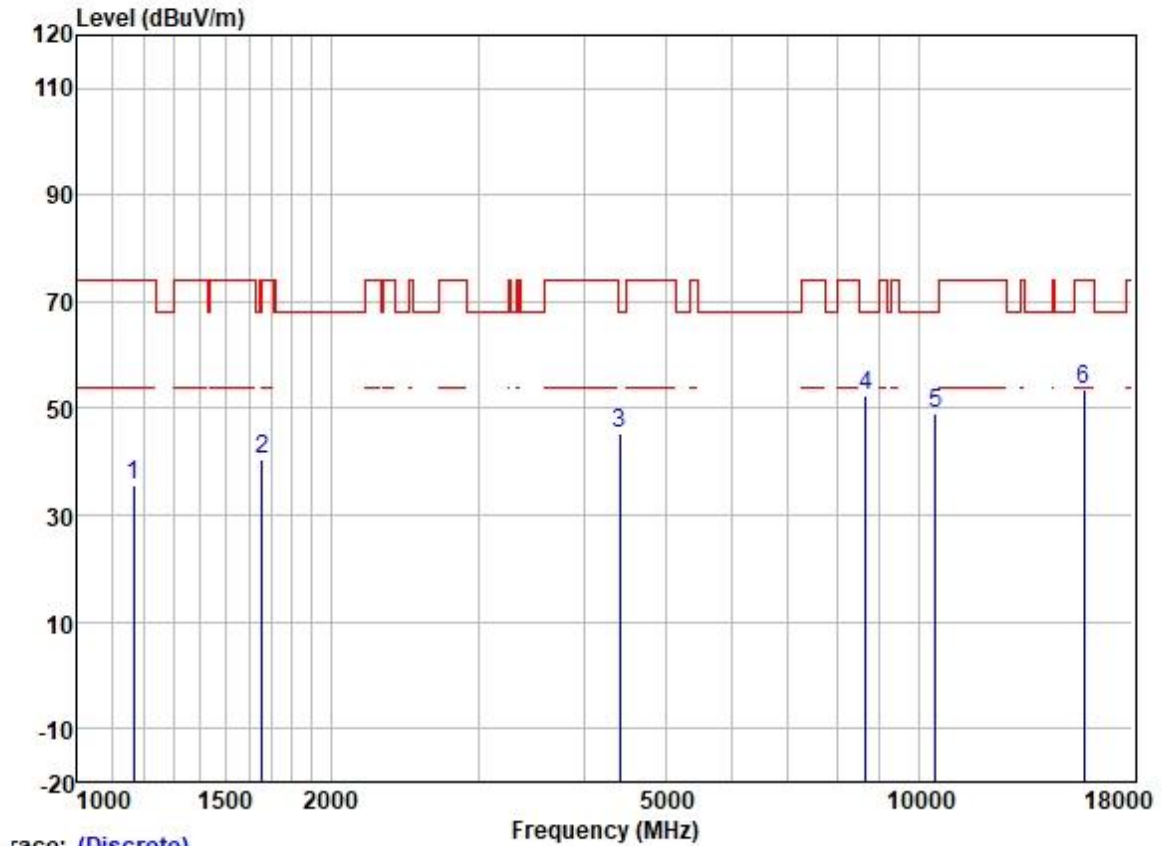


Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |               |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |               |
| 1 | 1165.546  | 47.00 | 24.54   | 2.39  | 38.40  | 35.53  | 74.00 | -38.47    | VERTICAL Peak |
| 2 | 1658.337  | 50.03 | 25.65   | 2.80  | 37.93  | 40.55  | 68.20 | -27.65    | VERTICAL Peak |
| 3 | 4417.841  | 46.79 | 30.70   | 4.74  | 36.81  | 45.42  | 68.20 | -22.78    | VERTICAL Peak |
| 4 | 8663.404  | 45.55 | 37.27   | 6.97  | 37.55  | 52.24  | 68.20 | -15.96    | VERTICAL Peak |
| 5 | 10480.000 | 39.48 | 39.46   | 7.40  | 37.36  | 48.98  | 68.20 | -19.22    | VERTICAL Peak |
| 6 | 15720.000 | 40.20 | 38.78   | 9.87  | 35.39  | 53.46  | 74.00 | -20.54    | VERTICAL Peak |




Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

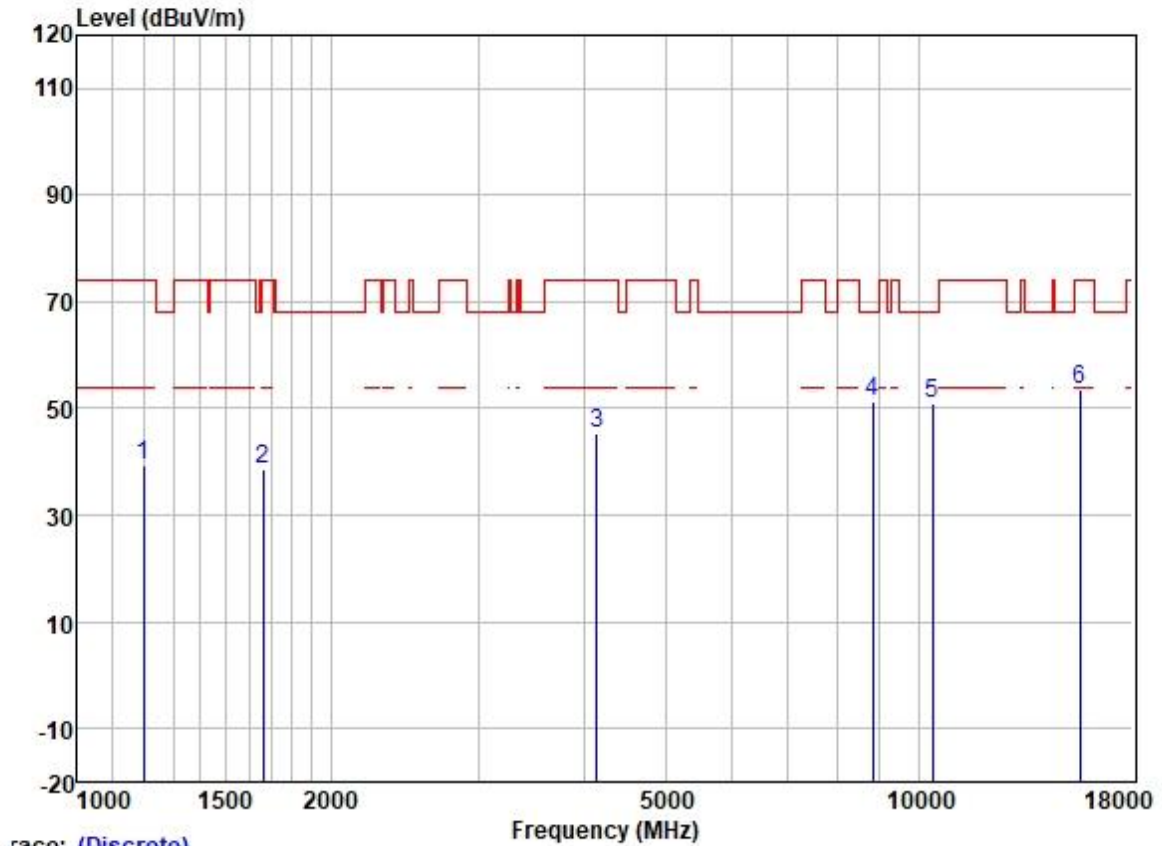

Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |                 |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|-----------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark          |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |                 |
| 1 | 1199.726  | 50.81 | 24.68   | 2.34  | 38.39  | 39.44  | 74.00  | -34.56    | HORIZONTAL Peak |
| 2 | 1663.137  | 47.90 | 25.65   | 2.80  | 37.91  | 38.44  | 74.00  | -35.56    | HORIZONTAL Peak |
| 3 | 4145.664  | 47.38 | 30.03   | 4.60  | 36.80  | 45.21  | 74.00  | -28.79    | HORIZONTAL Peak |
| 4 | 8814.957  | 44.35 | 37.34   | 7.29  | 37.53  | 51.45  | 68.20  | -16.75    | HORIZONTAL Peak |
| 5 | 10380.000 | 41.82 | 39.33   | 7.32  | 37.37  | 51.10  | 68.20  | -17.10    | HORIZONTAL Peak |
| 6 | 15570.000 | 39.91 | 38.99   | 9.88  | 35.39  | 53.39  | 74.00  | -20.61    | HORIZONTAL Peak |


Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel: Low

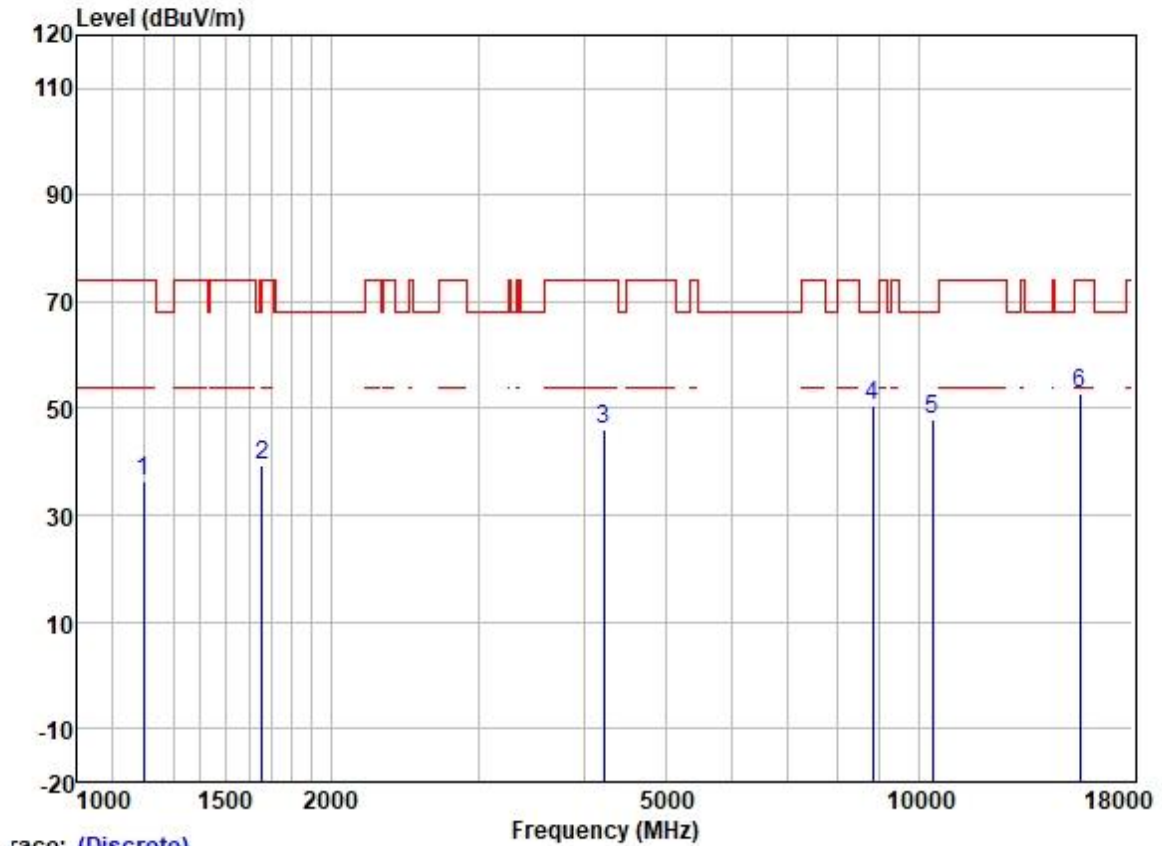

Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over   |           |               |
|---|-----------|-------|---------|-------|--------|--------|--------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit  | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB        |               |
| 1 | 1199.726  | 47.85 | 24.68   | 2.34  | 38.39  | 36.48  | 74.00  | -37.52    | VERTICAL Peak |
| 2 | 1658.337  | 48.78 | 25.65   | 2.80  | 37.93  | 39.30  | 68.20  | -28.90    | VERTICAL Peak |
| 3 | 4230.396  | 47.97 | 30.26   | 4.61  | 36.81  | 46.03  | 74.00  | -27.97    | VERTICAL Peak |
| 4 | 8814.957  | 43.55 | 37.34   | 7.29  | 37.53  | 50.65  | 68.20  | -17.55    | VERTICAL Peak |
| 5 | 10380.000 | 38.62 | 39.33   | 7.32  | 37.37  | 47.90  | 68.20  | -20.30    | VERTICAL Peak |
| 6 | 15570.000 | 39.44 | 38.99   | 9.88  | 35.39  | 52.92  | 74.00  | -21.08    | VERTICAL Peak |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel: High

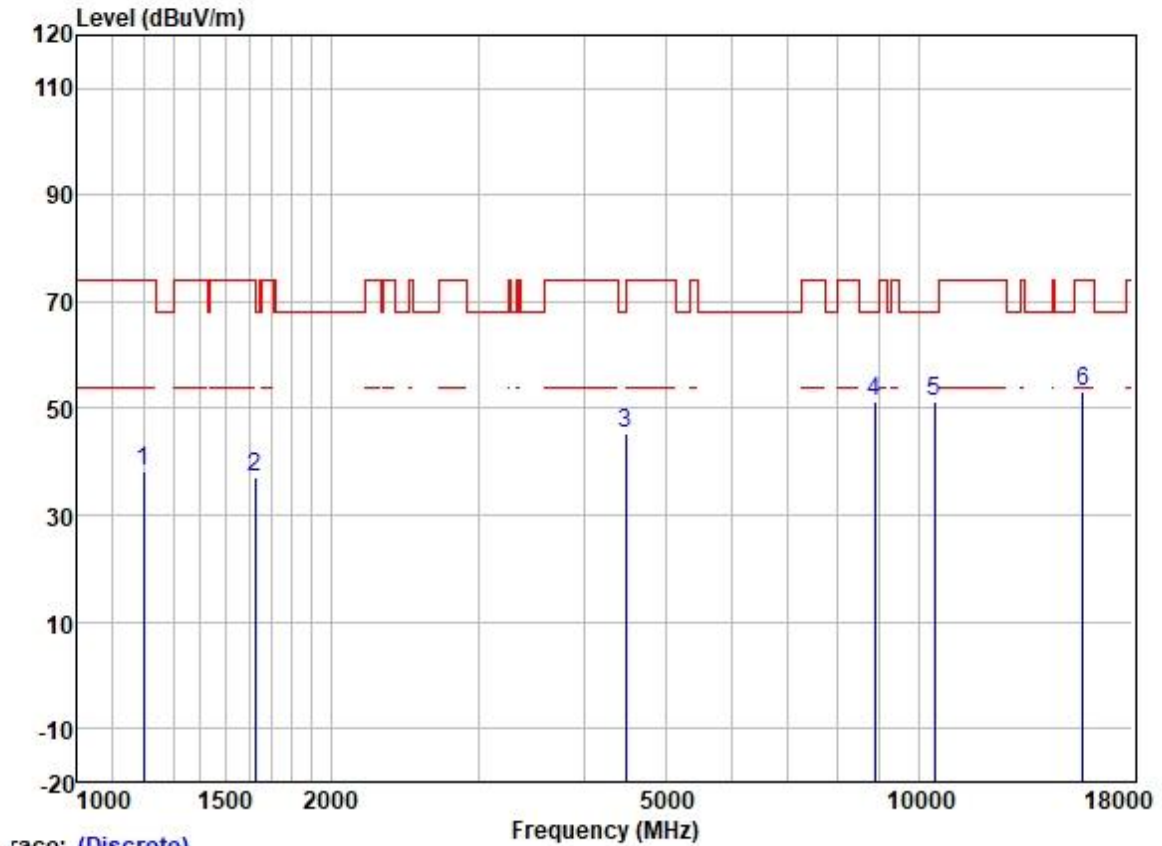

|   |           | ReadAntenna |        | Cable | Preamp |        | Limit  | Over   |            |        |
|---|-----------|-------------|--------|-------|--------|--------|--------|--------|------------|--------|
|   | Freq      | Level       | Factor | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz       | dBuV        | dB/m   | dB    | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1199.726  | 49.58       | 24.68  | 2.34  | 38.39  | 38.21  | 74.00  | -35.79 | HORIZONTAL | Peak   |
| 2 | 1625.121  | 46.66       | 25.61  | 2.80  | 37.95  | 37.12  | 74.00  | -36.88 | HORIZONTAL | Peak   |
| 3 | 4482.150  | 46.25       | 30.78  | 4.99  | 36.81  | 45.21  | 68.20  | -22.99 | HORIZONTAL | Peak   |
| 4 | 8866.062  | 43.93       | 37.36  | 7.38  | 37.53  | 51.14  | 68.20  | -17.06 | HORIZONTAL | Peak   |
| 5 | 10460.000 | 41.89       | 39.42  | 7.37  | 37.36  | 51.32  | 68.20  | -16.88 | HORIZONTAL | Peak   |
| 6 | 15690.000 | 40.00       | 38.86  | 9.87  | 35.39  | 53.34  | 74.00  | -20.66 | HORIZONTAL | Peak   |




Test Mode: 08; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: High

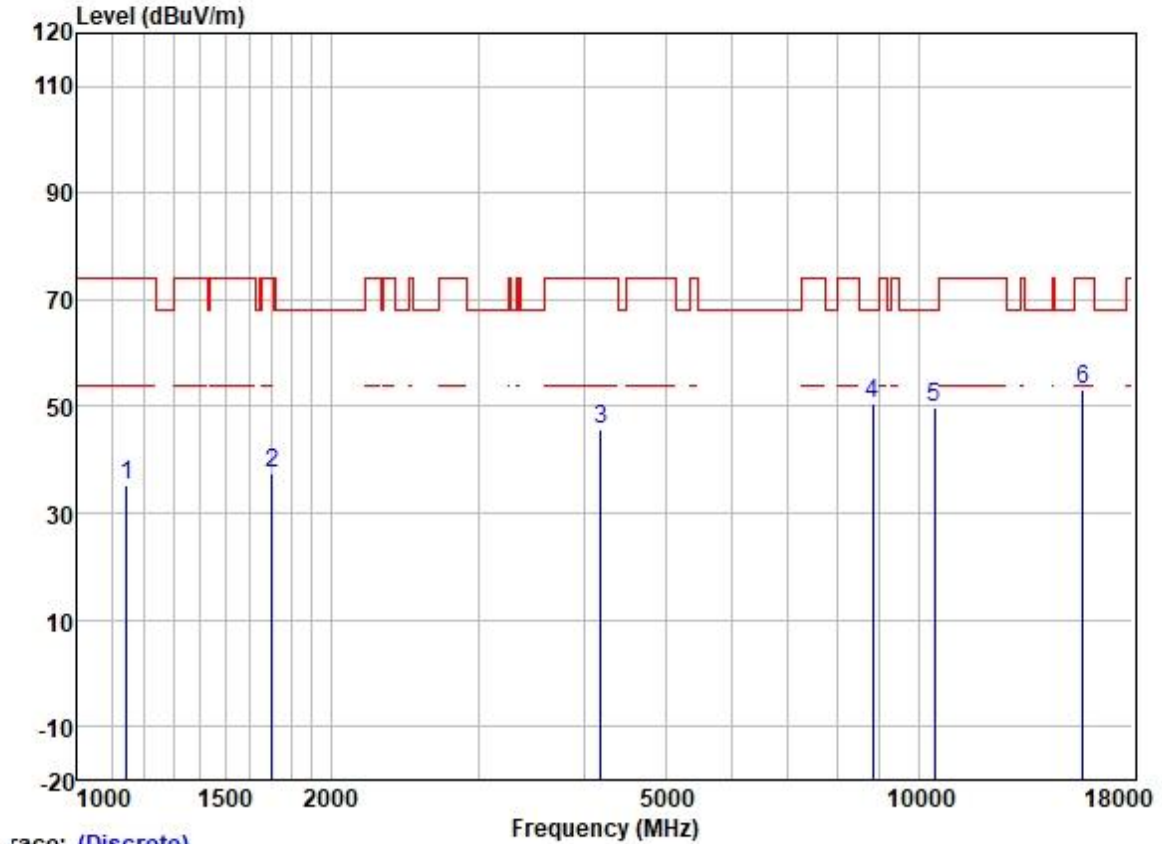

|   |           | Read  | Antenna | Cable | Preamp |        | Limit  | Over   |           |        |
|---|-----------|-------|---------|-------|--------|--------|--------|--------|-----------|--------|
|   | Freq      | Level | Factor  | Loss  | Factor | Level  | Line   | Limit  | Pol/Phase | Remark |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB     |           |        |
| 1 | 1145.507  | 47.03 | 24.48   | 2.32  | 38.42  | 35.41  | 74.00  | -38.59 | VERTICAL  | Peak   |
| 2 | 1702.042  | 46.80 | 25.72   | 2.80  | 37.89  | 37.43  | 74.00  | -36.57 | VERTICAL  | Peak   |
| 3 | 4193.872  | 47.75 | 30.15   | 4.60  | 36.81  | 45.69  | 74.00  | -28.31 | VERTICAL  | Peak   |
| 4 | 8814.957  | 43.33 | 37.34   | 7.29  | 37.53  | 50.43  | 68.20  | -17.77 | VERTICAL  | Peak   |
| 5 | 10460.000 | 40.22 | 39.42   | 7.37  | 37.36  | 49.65  | 68.20  | -18.55 | VERTICAL  | Peak   |
| 6 | 15690.000 | 39.96 | 38.86   | 9.87  | 35.39  | 53.30  | 74.00  | -20.70 | VERTICAL  | Peak   |


Test Mode: 08; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

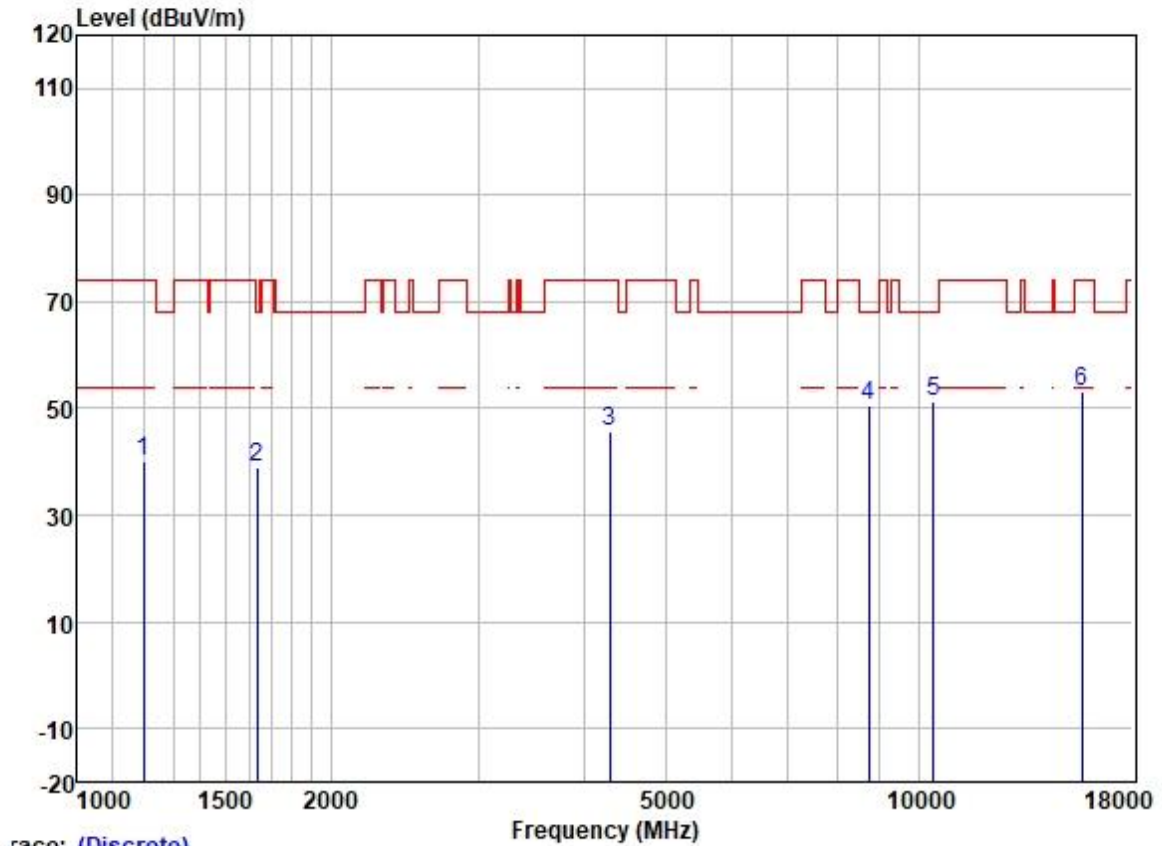

Trace: (Discrete)

|   | Freq      | ReadAntenna | Cable  | Preamp |        | Limit  | Over   |        |            |        |
|---|-----------|-------------|--------|--------|--------|--------|--------|--------|------------|--------|
|   | MHz       | Level       | Factor | Loss   | Factor | Level  | Line   | Limit  | Pol/Phase  | Remark |
|   | MHz       | dBuV        | dB/m   | dB     | dB     | dBuV/m | dBuV/m | dB     |            |        |
| 1 | 1199.726  | 51.59       | 24.68  | 2.34   | 38.39  | 40.22  | 74.00  | -33.78 | HORIZONTAL | Peak   |
| 2 | 1634.543  | 48.67       | 25.62  | 2.80   | 37.95  | 39.14  | 68.20  | -29.06 | HORIZONTAL | Peak   |
| 3 | 4291.977  | 47.34       | 30.45  | 4.64   | 36.81  | 45.62  | 74.00  | -28.38 | HORIZONTAL | Peak   |
| 4 | 8738.852  | 43.70       | 37.31  | 7.13   | 37.54  | 50.60  | 68.20  | -17.60 | HORIZONTAL | Peak   |
| 5 | 10420.000 | 42.03       | 39.38  | 7.35   | 37.36  | 51.40  | 68.20  | -16.80 | HORIZONTAL | Peak   |
| 6 | 15630.000 | 39.73       | 38.92  | 9.87   | 35.39  | 53.13  | 74.00  | -20.87 | HORIZONTAL | Peak   |

Test Mode: 08; Polarity: Vertical; Modulation:802.11ac; Bandwidth:80MHz; Channel: middle

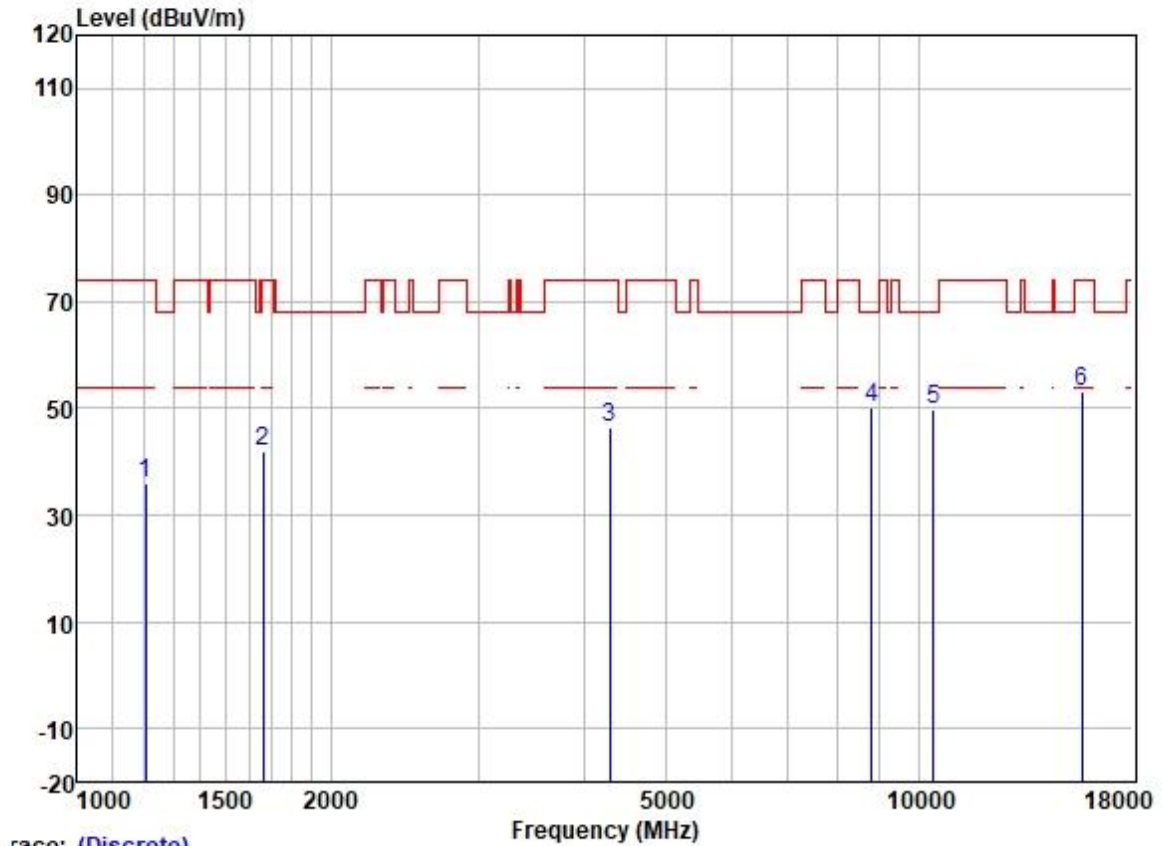

Trace: (Discrete)

|   | Freq      | Read  | Antenna | Cable | Preamp | Limit  | Over  |           |               |
|---|-----------|-------|---------|-------|--------|--------|-------|-----------|---------------|
|   | MHz       | Level | Factor  | Loss  | Factor | Line   | Limit | Pol/Phase | Remark        |
|   | MHz       | dBuV  | dB/m    | dB    | dB     | dBuV/m | dB    |           |               |
| 1 | 1206.682  | 47.22 | 24.72   | 2.33  | 38.39  | 35.88  | 74.00 | -38.12    | VERTICAL Peak |
| 2 | 1663.137  | 51.54 | 25.65   | 2.80  | 37.91  | 42.08  | 74.00 | -31.92    | VERTICAL Peak |
| 3 | 4291.977  | 48.02 | 30.45   | 4.64  | 36.81  | 46.30  | 74.00 | -27.70    | VERTICAL Peak |
| 4 | 8789.516  | 43.33 | 37.33   | 7.24  | 37.54  | 50.36  | 68.20 | -17.84    | VERTICAL Peak |
| 5 | 10420.000 | 40.31 | 39.38   | 7.35  | 37.36  | 49.68  | 68.20 | -18.52    | VERTICAL Peak |
| 6 | 15630.000 | 39.59 | 38.92   | 9.87  | 35.39  | 52.99  | 74.00 | -21.01    | VERTICAL Peak |