

Produkte
Products

Prüfbericht - Nr.: 14050994 001			Seite 1 von 17		
<i>Test Report No.:</i>			<i>Page 1 of 17</i>		
Auftraggeber: <i>Client:</i>		Rollogo Limited 1601, Far East Finance Centre, 16 Harcourt Road Admiralty Hong Kong			
Gegenstand der Prüfung: <i>Test Item:</i>		SMART POWER BANK			
Bezeichnung: <i>Identification:</i>		2VO-RLG/8AH/GY		Serien-Nr.: <i>Serial No.:</i>	
				Engineering sample	
Wareneingangs-Nr.: <i>Receipt No.:</i>		A000577390-001		Eingangsdatum: <i>Date of Receipt:</i>	
				04.07.2015	
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong Hong Kong Productivity Council HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>			Test samples are not damaged and suitable for testing.		
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C FCC Part 15 Subpart B ANSI C63.10-2013 ANSI C63.4-2014			
Prüfergebnis: <i>Test Results:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .			
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong			
geprüft/ tested by:			kontrolliert/ reviewed by:		
11.07.2017 Mika Chan Project Manager			11.07.2017 Sharon Li Unit Senior Manager		
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
					
Sonstiges: <i>Other Aspects</i>		FCC ID: 2ANFE2VO-RLG-8AH-GY			
Abkürzungen:		Abbreviations:			
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode.....	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	N/A..... 11
FCC 15.207 – Conducted Emission on AC Mains	Pass..... 11
FCC 15.247 (a)(2) – 6dB Bandwidth Measurement	Pass..... 12
FCC 15.247(b)(3) – Maximum Peak Couducted Output Power	Pass..... 12
FCC 15.247(e) – Power Spectral Density.....	Pass..... 13
FCC 15.247(d) – Spurious Conducted Emissions.....	Pass..... 13
FCC 15.205 – Radiated Emissions in Restricted Frequency Bands.....	Pass..... 14
Results FCC Part 15 – Subpart B	16

FCC 15.107 – Conducted Emission on AC Mains	Pass.....	16
FCC 15.109 – Radiated Emission.....	Pass.....	17
Appendix 1 – Test protocols		17 pages
Appendix 2 – Test setup		3 pages
Appendix 3 – EUT External Photos		4 pages
Appendix 4 – EUT Internal Photos		8 pages
Appendix 5 – RF exposure information.....		2 pages

Product information

Manufacturers declarations

	Transceiver
Operating frequency range	2402 - 2480 MHz
Type of modulation	GFSK
Number of channels	40
Channel separation	2 MHz
Type of antenna	PCB Antenna
Antenna gain (dBi)	0 dBi
Power level	fix
Type of equipment	stand alone radio device
Connection to public utility power line	Yes
Nominal voltage	V_{nor} : 3.7 VDC
Independent Operation Modes	Transmitting, Charging and Discharging mode

Product function and intended use

The equipment under test (EUT) is a Bluetooth low energy device.

FCC ID: 2ANFE2VO-RLG-8AH-GY

Models	Product description
2VO-RLG/8AH/GY	BLE Power Bank

Submitted documents

Circuit Diagram
Block Diagram
Technical Description
User manual
Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.
- Charging mode

For further information refer to User Manual

Related Submittal(s) Grants

None

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- During test, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power was selected according to the instruction given by the manufacturer (TX power =0). The setting of the RF output power expected by the customer shall be fixed on the firmware of the final end product.

Special Accessories and Auxiliary Equipment

- AC / DC adapter Model: PS10J050K2000BU (Provided by TUV HK.)
- HTC Mobile Phone (Provided by TUV HK.)

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

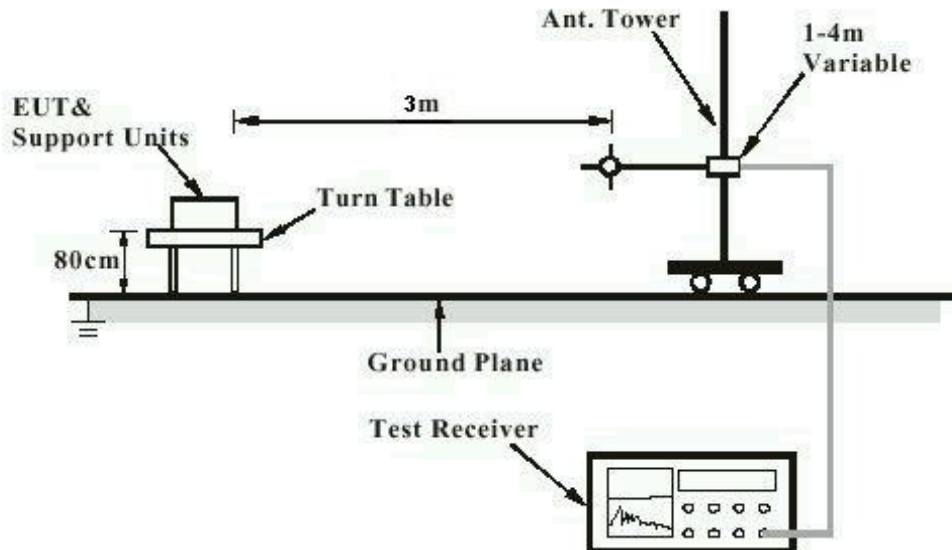

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)


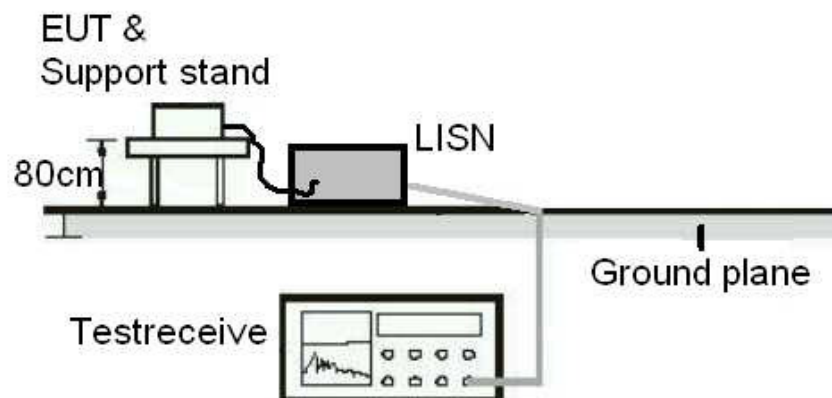


Diagram of Equipment Configuration for Antenna-port Conducted Measurement (if applicable)

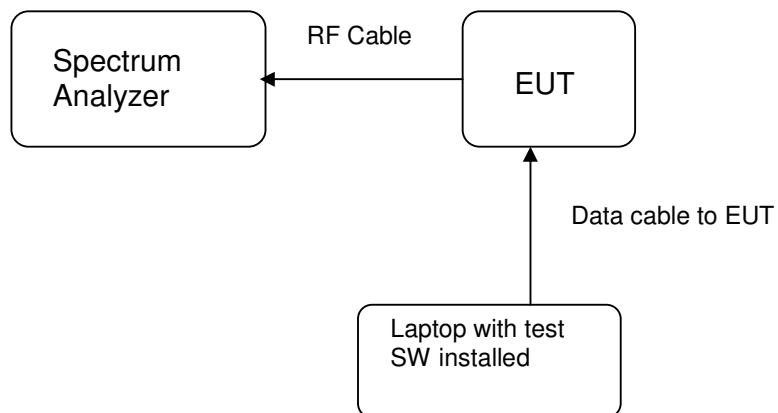

List of Test and Measurement Instruments

Hong Kong Productivity Council (FCC Registration number: 90656)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	25-Apr-17	25-Apr-18
Test Receiver	R & S	ESU26	11-Jul-17	11-Jul-18
Active Loop Antenna	EMCO	6502	27-Oct-16	27-Oct-17
Bi-conical Antenna	R & S	HK116	7-Jun-16	7-Jun-18
Log Periodic Antenna	R & S	HL223	31-May-16	31-May-18
Standard Gain Horn	ETS-Lindgren	3160-07	3-Mar-16	3-Mar-18
Standard Gain Horn	ETS-Lindgren	3160-08	3-Mar-16	3-Mar-18
Standard Gain Horn	ETS-Lindgren	3160-10	3-Mar-16	3-Mar-18
Double-Ridged Waveguide Horn	EMCO	3116	17-Jun-16	17-Jun-18
Double-Ridged Waveguide Horn	EMCO	3117	22-Jun-16	22-Jun-18
Coaxial cable	Harbour	LL335	10-Jun-16	10-Jun-18
High Frequency Cable	Pasternack	PE3VNA4001-3M	27-Jan-17	27-Jan-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
Preamplifier 18GHz to 40GHz with cable (EMC656)	A.H. Systems, Inc.	PAM-1840VH	27-Jan-17	27-Jan-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	28-Oct-15	28-Oct-17

AC Mains Conducted Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Test Receiver	R & S	ESU26	11-Jul-17	11-Jul-18
RF Voltage Probe	Schwarzbeck	TK9416	11-Feb-17	11-Feb-18
Line Impedance Stabilization Network	R&S	ENV216	19-Jul-17	19-Jul-18
Double Shield Cable	Huber+ Suhner	RG223/U-01	18-May-17	18-May-19
Pulse Limiter	R&S	ESH3-Z2	3-Jun-16	3-Jun-18

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	16 Oct 2016	15 Oct 2017

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.96\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 3.70\text{dB}$ (9kHz to 30MHz) and $\pm 4.64\text{dB}$ (30MHz to 1000MHz) and is $\pm 4.83\text{dB}$ (1GHz to 18GHz) and $\pm 5.20\text{dB}$ (18GHz to 25GHz)

The estimated combined standard uncertainty for antenna conducted emission is $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type: Integral PCB antenna b) Manufacturer and model no: N/A c) Peak Gain: 0 dBi	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		N/A
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains						Pass
Requirement: 15.207(a)						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBμV)	Limit AV (dBμV)	Verdict
0,15 – 0,5	0.165	42.4	27.3	66 - 56	56 - 46	Pass
> 0,5 - 5	0.561	42.4	31.2	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBμV	Average dBμV	Limit QP (dBμV)	Limit AV (dBμV)	Verdict
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass
> 0,5 - 5	0.510	44.3	27.4	56	46	Pass
	0.570	45.0	25.1	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz does not exceed the limits. For test Results plots refer to Appendix 1						

FCC 15.247 (a)(2) – 6dB Bandwidth Measurement			Pass
FCC Requirement: Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Channel frequency (MHz)	6 dB left (MHz)	6 dB right (MHz)	6dB bandwidth (kHz)
2402	2401.728	2402.412	684.00
2440	2439.732	2440.412	680.00
2480	2479.720	2480.412	692.00

FCC 15.247(b)(3) – Maximum Peak Conducted Output Power			Pass
FCC Requirement: For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850MHz bands: 1 Watt (30dBm)			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1			
Frequency (MHz)	Measured Output Power (dBm)	Limit (W/dBm)	Verdict
2402	-6.60	1 / 30.0	Pass
2440	-5.88	1 / 30.0	Pass
2480	-6.14	1 / 30.0	Pass

FCC 15.247(e) – Power Spectral Density			Pass
FCC Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.			
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
Results: For test protocols please refer to Appendix 1.			
Operating frequency (MHz)	Power density (dBm)	Limit (dBm)	Verdict
2402	-6.34	8.0	Pass
2440	-5.65	8.0	Pass
2480	-6.01	8.0	Pass

FCC 15.247(d) – Spurious Conducted Emissions					Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Temporary antenna port Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23 °C Humidity : 50 %					
FCC Requirement: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Only the worst cases is shown below. For test protocols refer to Appendix 1					
Operating frequency (MHz)	Spurious frequency (MHz)	Spurious Level (dBm)	Reference value (dBm)	Delta (dB)	Verdict
2402	2336.000	-30.92	-6.34	24.58	Pass
2440	2336.000	-38.69	-5.65	33.04	Pass
2480	2512.000	-44.31	-6.01	38.30	Pass

FCC 15.205 – Radiated Emissions in Restricted Frequency Bands			Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : TX mode Port of testing : Enclosure Detector : Peak Supply voltage : 3.7 Vdc Temperature : 23°C Humidity : 50%			
FCC Requirement: In any 100kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.205(c).			
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. All three transmit frequency modes comply with the field strength within the restricted bands. There is no spurious found below 30MHz.			
Mode: 2402MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
30.000	27.1	40.0 / QP	
138.300	40.9	43.5 / QP	
230.831	27.8	46.0 / QP	
4804.480	57.43	74.0 / PK	
4804.160	50.69	54.0 / AV	
7205.391	58.06	74.0 / PK	
7213.692	43.96	54.0 / AV	
Mode: 2402 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
77.952	17.2	40.0 / QP	
140.802	36.7	43.5 / QP	
222.950	34.2	46.0 / QP	
4803.967	55.42	74.0 / PK	
4804.160	45.94	54.0 / AV	
Mode: 2440 MHz TX		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
139.121	40.0	43.5 / QP	
231.834	27.5	46.0 / QP	
4879.807	55.70	74.0 / PK	
4880.160	47.09	54.0 / AV	
Mode: 2440 MHz TX		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
140.512	37.1	43.5 / QP	
230.840	34.5	46.0 / QP	

4880.368	54.41	74.0 / PK
4880.128	40.12	54.0 / AV
Mode: 2480MHz TX Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
141.212	38.2	43.5 / QP
230.410	27.6	46.0 / QP
4960.416	55.40	74.0 / PK
4960.160	47.23	54.0 / AV
Mode: 2480 MHz TX Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
140.010	37.0	43.5 / QP
222.530	34.0	46.0 / QP
4959.583	54.07	74.0 / PK
4960.224	42.44	54.0 / AV

Results FCC Part 15 – Subpart B

FCC 15.107 – Conducted Emission on AC Mains						Pass
Test Specification : ANSI C63.4 – 2014 Mode of operation : Charging and Discharging mode Port of testing : AC Mains input port of power supply Supply voltage : 120Vac 60Hz Temperature : 23°C Humidity : 50%						
Requirement: 15.107(a)						
Live measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBµV	Average dBµV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass
> 0,5 - 5	0.510	44.3	27.4	56	46	Pass
	0.570	45.0	25.1	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass
Neutral measurement						
Frequency range (MHz)	Frequency (MHz)	Quasi-peak dBµV	Average dBµV	Limit QP (dBµV)	Limit AV (dBµV)	Verdict
0,15 – 0,5	No peak found	---	---	66 - 56	56 - 46	Pass
> 0,5 - 5	0.506	43.0	28.8	56	46	Pass
	0.569	41.9	29.9	56	46	Pass
> 5 - 30	No peak found	---	---	60	50	Pass

FCC 15.109 – Radiated Emission		Pass
Test Specification : ANSI C63.4 – 2014 Mode of operation : Charging and Discharging mode Port of testing : Enclosure Supply voltage : 120VAC Frequency range : 30MHz to 1GHz Temperature : 23°C Humidity : 50%		
FCC Requirement: 15.109(a)		
Results:		
Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
114.720	37.1	43.5 / QP
214.940	32.4	43.5 / QP
Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
139.609	38.3	43.5 / QP
225.414	38.8	46.0 / QP