



RF - TEST REPORT

- FCC Part 15.247, RSS-247 -

Model Name : HPR Display V04

Product Description : Central control unit of e-bike system

Applicant : TQ-Systems GmbH

Address : Gut Delling, Muehlstrasse 2

82229 SEEFELD

Manufacturer : TQ-Systems GmbH

Address : Gut Delling, Muehlstrasse 2

82229 SEEFELD

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : **80237318-03 Rev_1**

11. November 2025

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-00

Contents

1	TEST STANDARDS	3
2	EQUIPMENT UNDER TEST	4
2.1	Information provided by the Client	4
2.2	Sampling	4
2.3	General remarks	4
2.4	Photo documentation of the EUT – Detailed photos see ATTACHMENT A	4
2.5	Equipment type	4
2.6	Short description of the equipment under test (EUT)	4
2.7	Variants of the EUT	5
2.8	Operation frequency and channel plan	5
2.9	Transmit operating modes	5
2.10	Antenna	5
2.11	Power supply system utilised	6
2.12	Peripheral devices and interface cables	6
2.13	Determination of worst-case conditions for final measurement	6
3	TEST RESULT SUMMARY	7
3.1	Revision history of test report	7
3.2	Final assessment	7
4	TEST ENVIRONMENT	8
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	8
4.5	Measurement protocol for FCC and ISSED	9
5	TEST CONDITIONS AND RESULTS	12
5.1	EBW and OBW	12
5.2	Maximum peak output power	19
5.3	Power spectral density	24
5.4	Spurious emissions radiated	28
5.5	Antenna application	41
6	USED TEST EQUIPMENT AND ACCESSORIES	42

ATTACHMENTs A, B as separate supplements

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 (November 2025)

Part 15, Subpart A	General
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz
ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024	Testing Unlicensed Wireless Devices
KDB 558074 D01 v05r02	Guidance for compliance measurements on DTS; FHSS and hybrid system devices operating under Section 15.247 of the FCC rules, April 2, 2019.

ISED Canada Rules and Regulations

RSS-Gen, Issue 5 + Amendment 1 + 2	General Requirements for Compliance of Radio Apparatus
RSS-247, Issue 4	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024	Testing Unlicensed Wireless Devices
KDB 558074 D01 v05r02	Guidance for compliance measurements on DTS; FHSS and hybrid system devices operating under Section 15.247 of the FCC rules, April 2, 2019.

2 EQUIPMENT UNDER TEST

2.1 Information provided by the Client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according his/her instructions.

2.3 General remarks

None

2.4 Photo documentation of the EUT – Detailed photos see ATTACHMENT A

2.5 Equipment type

BLE device, ANT+ device

2.6 Short description of the equipment under test (EUT)

The EUT "HPR Display V04" is a Bluetooth Low Energy wireless bike computer. It is the central control and information unit of the TQ HPR e-bike system. The modulation used by the EUT is GFSK.

Number of tested samples	: 1 (radiated sample)	1 (conducted sample)
Article number	: 356974.0100	356974.0100
Serial number	: 20240819/00104/23#	20240819/00056/23#
Firmware number	: 1.0.0	1.0.0
Name of sample	: HPR-DISP04-CON-RAD-005	HPR-DISP04-CON-SMA-003

FCC ID : 2ANFF-Q104
 IC ID : 23072-Q104
 HVIN : HPR DISPLAY V04

Items	Description
BT type	5.4 Low Energy
BT chipset type	nRF 52840
Modulation	GFSK
Frequency range	2400 MHz to 2483.5 MHz
Channel numbers	40
Data rate (Mbps)	1
Power setting	Default (0)
Antenna type	PCB

2.7 Variants of the EUT

There are no variants.

2.8 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	18	2442
0	2404	19	2444
1	2406	20	2446
2	2408	21	2448
3	2410	22	2450
4	2412	23	2452
5	2414	24	2454
6	2416	25	2456
7	2418	26	2458
8	2420	27	2460
9	2422	28	2462
10	2424	29	2464
38	2426	30	2466
11	2428	31	2468
12	2430	32	2470
13	2432	33	2472
14	2434	34	2474
15	2436	35	2476
16	2438	36	2478
17	2440	39	2480

Note: the marked frequencies are determined for final testing.

Channel frequency ANT+: 2457 MHz

2.9 Transmit operating modes

The EUT uses GFSK modulation and may provide following data rates:

- 1 Mbps for BLE (Mbps = Megabits per second)
- 0.025 Mbps for ANT+

2.10 Antenna

The following antennas shall be used with the EUT:

A single PCB antenna is used within the system. The EUT has only one integrated antenna.

Number	Characteristic	Frequency band (GHz)	Gain (dBi)
1	omnidirectional	2.4 – 2.5	-13.2

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 13.3 V_{DC}

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- _____ Model : -
 - _____ Model : -

2.13 Determination of worst-case conditions for final measurement

Preliminary tests are performed in all three orthogonal axes of the EUT to locate at which position and at what setting of the EUT produces the maximum of the emissions.

For the final test the following channels and test modes are selected:

Technology	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.15.1 BLE	37 - 39	37, 18, 39	P0	DSSS	GFSK	1 Mbps
802.15.1 ANT+	2457 MHz	2457 MHz	P0	DSSS	GFSK	0.025 Mbps

2.13.1 Test jig

No test jig is used.

2.13.2 Test software

The EUT has a special firmware that allows a continuous modulated wave on the different channels and a receive mode.

3 TEST RESULT SUMMARY

BLE and ANT+ device using digital modulation and operating in the 2400 MHz – 2483.5 MHz band:

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS-Gen, 8.8	AC power line conducted emissions	not applicable
15.247(a)(2)	RSS-247, 6.3.1(a)	-6 dB EBW	passed
15.247(b)(3) 15.247(b)(4)	RSS-247, 6.3.2	Maximum peak output power	passed
15.247(d)	RSS-247, 6.6	Spurious emissions	passed
15.209	RSS-Gen 8.10	Restricted frequency bands	passed
15.247(e)	RSS-247, 6.3.1(b)	PSD	passed
15.35(c)	RSS-Gen, 8.2	Pulsed operation	passed
15.203	-	Antenna requirement	passed
-	RSS-Gen, 6.7	99 % Bandwidth	passed

Note: Not applicable because device has no AC power port.

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80237318-03	0	03 April 2025	Initial test report
80237318-03	1	11 November 2025	Updated standards, antenna data corrected

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfils the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 13 March 2025

Testing concluded on : 28 March 2025

Checked by:

Tested by:

Jürgen Pessinger
Radio Team

Christopher Thaller
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Straubinger Strasse 100
94447 PLATTLING
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 – 35 °C

Humidity: 30 – 60 %

Atmospheric pressure: 86 – 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2: 2011 + A1: 2014 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 – “Testing Unlicensed Wireless Devices”.


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

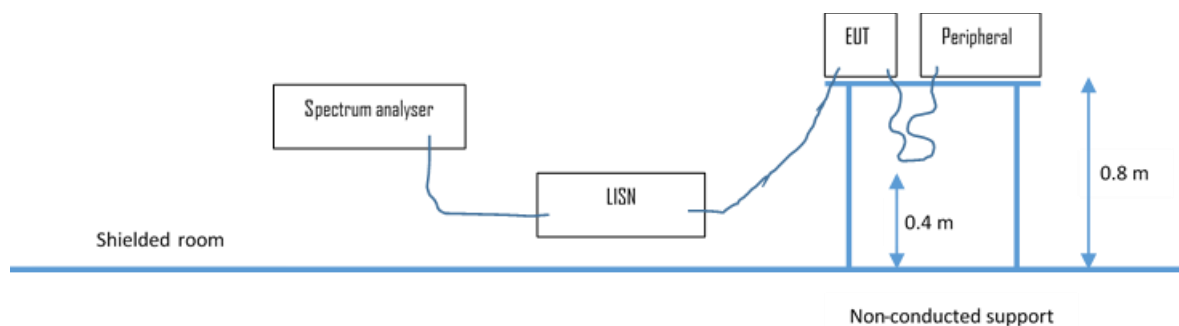

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$


$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Tabletop equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

4.5.3.2 Radiated emission

4.5.3.2.1 Anechoic chamber test site (9 kHz – 30 MHz):


Test setup according ANSI C63.10

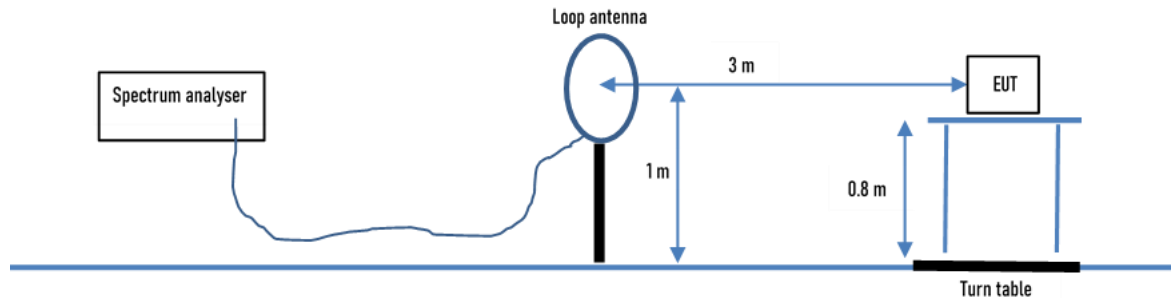

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.2.2 Anechoic chamber (30 MHz – 1 GHz):

Test setup according ANSI C63.10.

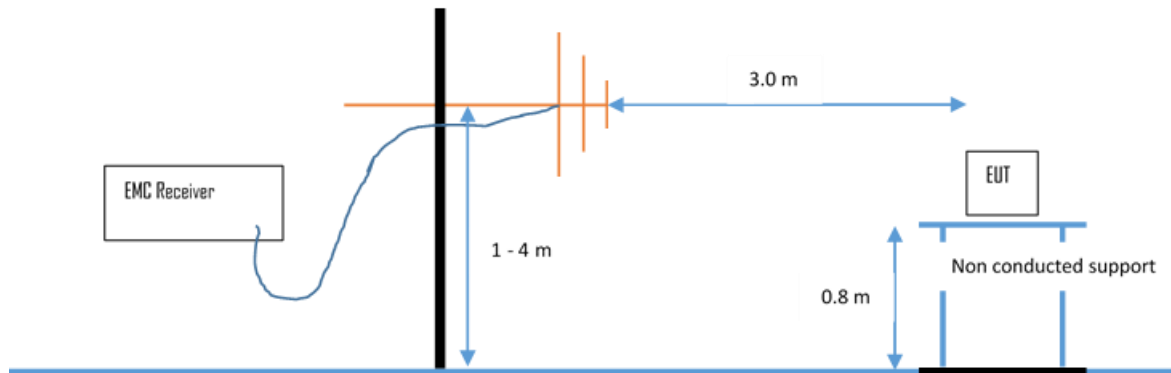

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Tabletop equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the centre of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:


30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4


4.5.3.2.3 Anechoic chamber (1000 MHz – 18000 MHz)

Test setup according to ANSI C63.10.

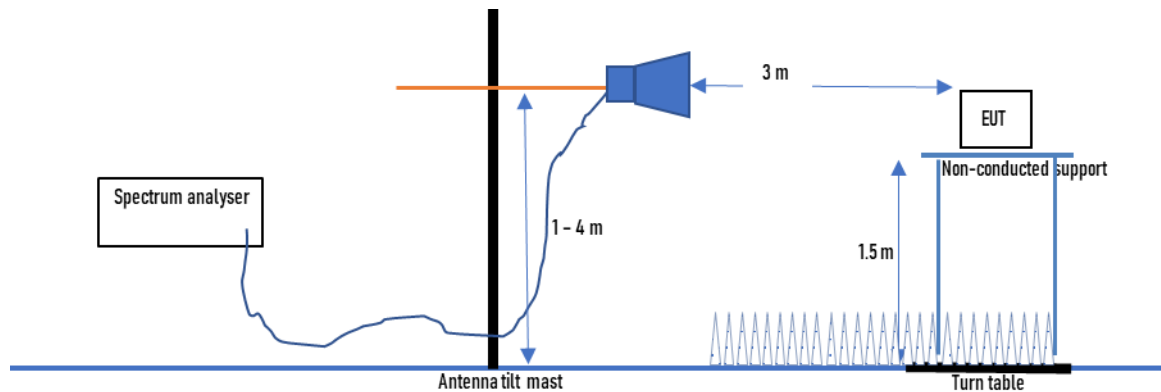

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Tabletop equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.2.4 Anechoic chamber (18 GHz – 40 GHz)

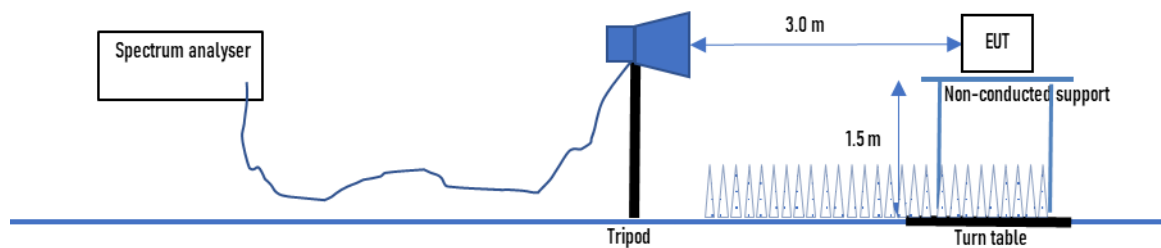

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Tabletop equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the centre, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit is adopted.

5 TEST CONDITIONS AND RESULTS

5.1 EBW and OBW

For test instruments and accessories used see section 6 Part **MB**.

5.1.1 Description of the test location

Test location: Shielded Room SR6

5.1.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.1.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 – 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 6.3.1(a):

The following applies to the bands 902-928 MHz and 2400-2483.5 MHz: the minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen 6.7:

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

5.1.4 Description of Measurement

The emission bandwidth is measured according to ANSI C63.10, item 11.8.1, at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

The 99% bandwidth is measured according to ANSI C63.10, item 6.9.3, with the 99% power bandwidth function of the analyser.

Spectrum analyser settings for EBW:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak

Spectrum analyser settings for OBW:

RBW: 1-5% OBW, VBW: 3 RBW, Detector: Max peak

5.1.5 Test result

6dB bandwidth

Channel	Centre frequency (MHz)	6 dB bandwidth (kHz)	Minimum limit (MHz)
37	2402	701.3	0.5
18	2442	710.3	0.5
39	2480	704.3	0.5
ANT+	2457	701.3	0.5

99% bandwidth

Channel	Centre frequency (MHz)	99 % bandwidth (kHz)
37	2402	1054.8
18	2442	1055.0
39	2480	1055.4
ANT+	2457	1039.0

Emission bandwidth limit according to FCC Part 15, Section 15.247(a)(2):

Frequency (MHz)	6dB EBW Limit
902-928	> 500 kHz
2400-2483.5	> 500 kHz
5725-5850	> 500 kHz

Emission bandwidth limit according to RSS-247 5.2(a):

Frequency (MHz)	6dB EBW Limit
902-928	> 500 kHz
2400-2483.5	> 500 kHz


The requirements are **FULFILLED**.

Remarks: For detailed test result please see the following test protocols

5.1.6 Test protocols EBW

BLE


1 Mbps Channel 37 (2402 MHz)

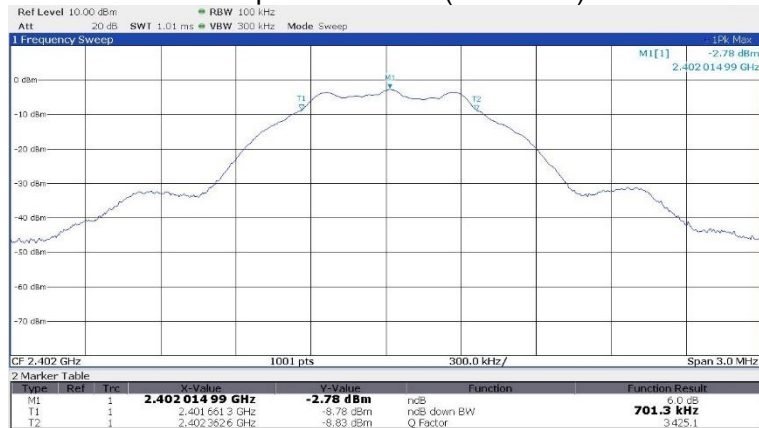

1 Mbps Channel 18 (2442 MHz)




1 Mbps Channel 39 (2480 MHz)

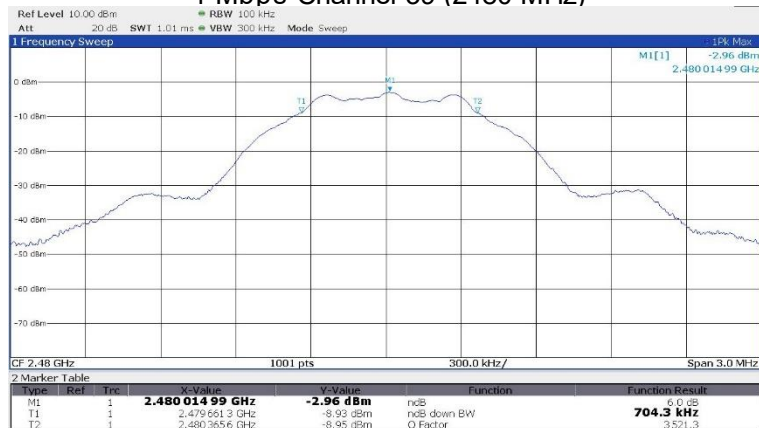

ANT+

ANT+ (2457 MHz)

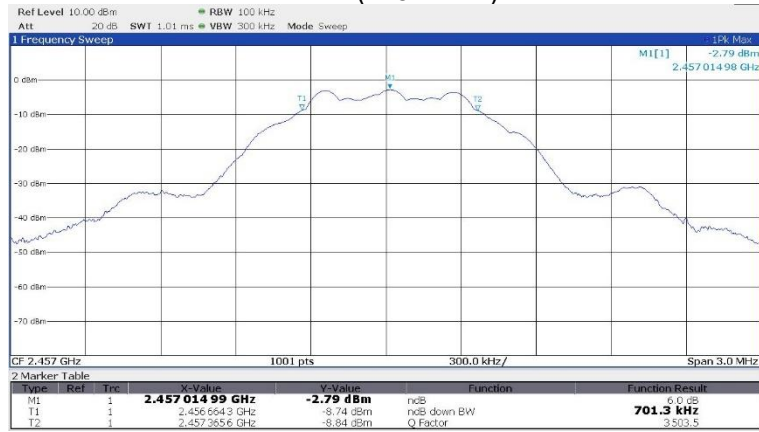

5.1.7 Test protocols OBW

BLE

1 Mbps Channel 37 (2402 MHz)



1 Mbps Channel 18 (2442 MHz)



1 Mbps Channel 39 (2480 MHz)



ANT+

ANT+ (2457 MHz)



5.2 Maximum peak output power

For test instruments and accessories used see section 6 Part **CPC**.

5.2.1 Description of the test location

Test location: Shielded Room SR6

5.2.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

According to FCC Part 15, Section 15.247(b)(4):

The conducted output power limits specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS-247 6.3.2:

For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

5.2.4 Description of Measurement

The maximum peak conducted output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.1.1. The EUT is set in TX continuous mode while measuring.

5.2.5 Test result

Peak Power conducted:

Conducted Measurement					
FCC §15.247 (b)(3) RSS-247 6.3.2					
Modulation	Channel	Frequency	Measured Conducted TX Power	Conducted Tx-Power Limit	Margin
		MHz	dBm	dBm	dB
BLE 1 Mbps	CH37	2402	-2.2	30.0	-32.2
	CH18	2442	-2.2	30.0	-32.2
	CH39	2480	-2.3	30.0	-32.3
ANT+ 25 kbps	ANT+	2457	-2.4	30.0	-32.4

EIRP calculated with –13.2 dBi antenna gain:

RSS-247 6.3.2					
Modulation	Channel	Frequency	Calculated EIRP	EIRP Limit	Margin
		MHz	dBm	dBm	dB
BLE 1 Mbps	CH37	2402	-15.4	36	-51.4
	CH18	2442	-15.4	36	-51.4
	CH39	2480	-15.5	36	-51.5
ANT+ 25 kbps	ANT+	2457	-15.6	36	-51.6

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(W)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

Peak output power limit according to RSS-247 6.3.2:

Frequency (MHz)	Peak Power Limit	
	(dBm)	(W)
902-928	30	1.0
2400-2483.5	30	1.0

Frequency (MHz)	EIRP Limit	
	(dBm)	(W)
902-928	36	4.0
2400-2483.5	36	4.0

The requirements are **FULFILLED**.


Remarks: For conducted measurement a 20cm SMA cable with cable loss of 0.5 dB was used.
For detailed test result please see the following test protocols

5.2.6 Test protocols


Conducted measurements:

BLE


1 Mbps Channel 37 (2402 MHz)

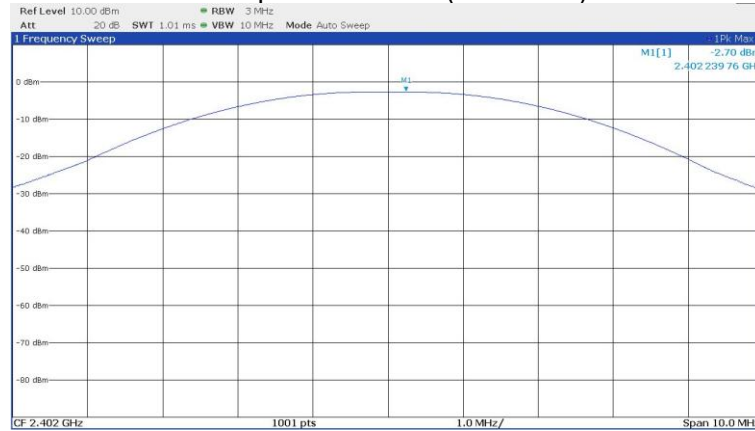

1 Mbps Channel 18 (2442 MHz)

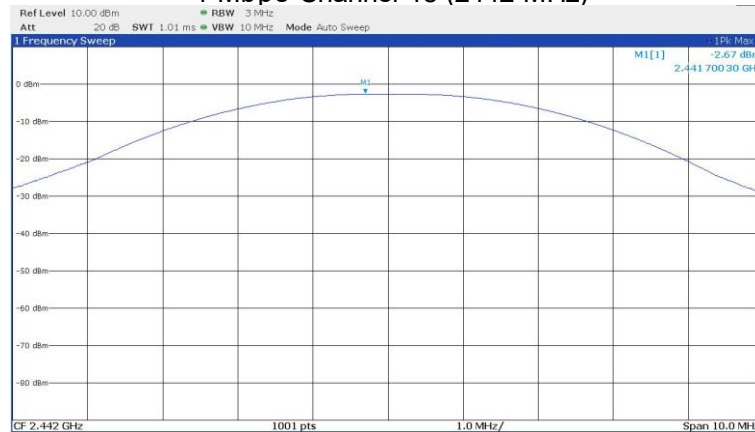


1 Mbps Channel 39 (2480 MHz)

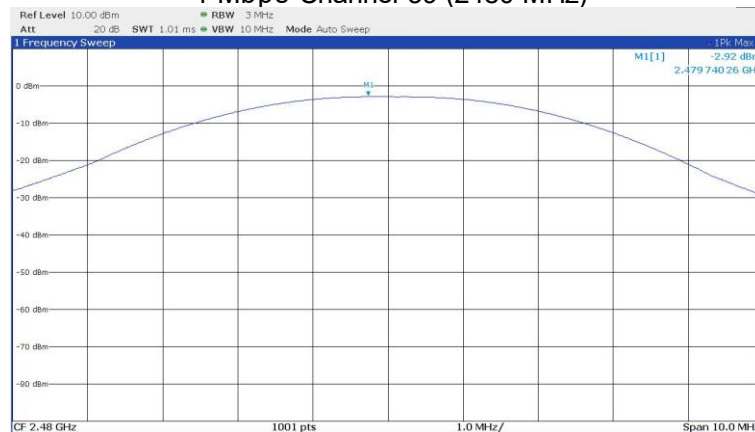

ANT+

ANT+ (2457 MHz)

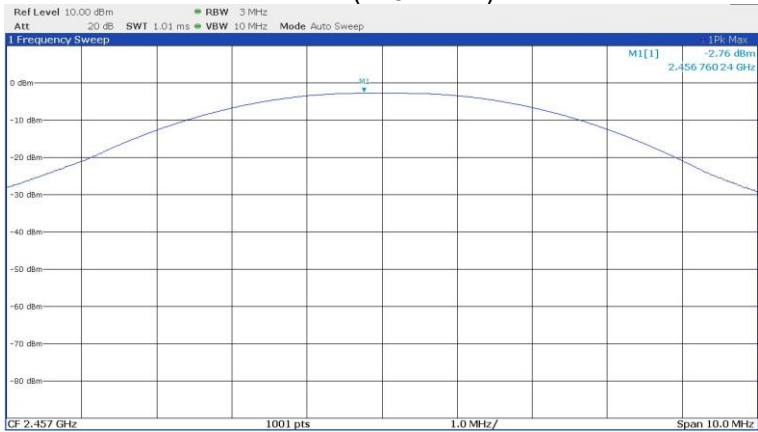

5.3 Power spectral density

For test instruments and accessories used see section 6 Part **MB**.

5.3.1 Description of the test location

Test location: Shielded Room SR6

5.3.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.3.3 Applicable standard

According to FCC Part 15, Section 15.247(e):

For digitally modulated systems, the power spectral density radiated from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the radiated output power shall be used to determine the power spectral density.

According to RSS-247 6.3.1(b):

transmitter power spectral density conducted from the transmitter to the antenna(s) shall not be greater than 8 dBm/3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 6.3.2 The power spectral density shall be determined using the same method as is used to determine the maximum conducted output power.

5.3.4 Description of Measurement

The measurement is performed using the procedure set out in item 11.10.2 of ANSI C63.10. The power measurement was done as peak power measurement. Therefore, the PKPSD is measured. The max peak was located with the spectrum analyser and a marker set to peak.

Spectrum analyser settings:

RBW: 3 kHz, VBW: 10 kHz, Detector: Peak, Sweep time: Auto

5.3.5 Test result

FCC §15.247 (b)(3) RSS-247 6.3.1(b)					
Modulation	Channel	Frequency	Measured	Conducted	Margin
		MHz	dBm	dBm	dB
BLE 1 Mbps	CH37	2402	-17.5	8.0	-25.5
	CH18	2442	-17.3	8.0	-25.3
	CH39	2480	-17.5	8.0	-25.5
ANT+ 25 kbps	ANT+	2457	-18.5	8.0	-26.5

Power spectral density limit according to FCC Part 15, Section 15.247(e):

Frequency (MHz)	Power spectral density limit (dBm/3 kHz)
902-928	8
2400 - 2483.5	8
5725-5850	8

Power spectral density limit according to RSS-247 6.3.1(b):


Frequency (MHz)	Power spectral density limit (dBm/3 kHz)
902-928	8
2400 - 2483.5	8

The requirements are **FULFILLED**.


Remarks: For detailed test result please see the following test protocols
For conducted measurement a 20cm SMA cable with cable loss of 0.5 dB was used.

5.3.6 Test protocols


1 Mbps Channel 37 (2402 MHz)

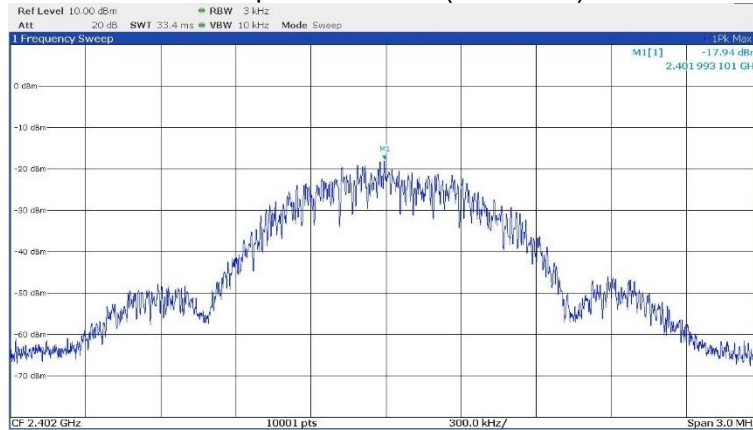

1 Mbps Channel 18 (2442 MHz)

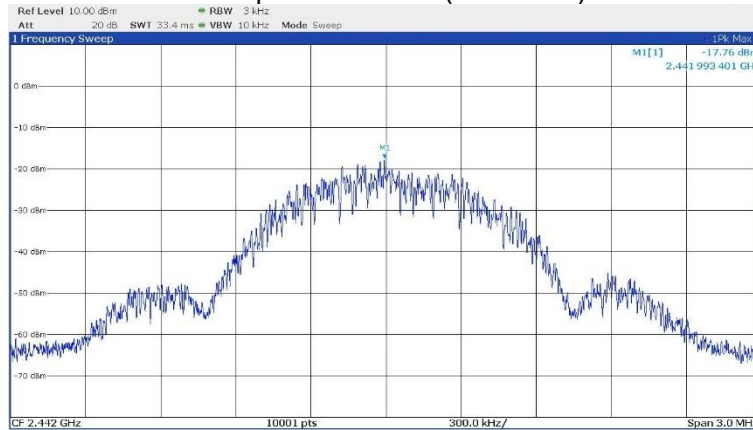


1 Mbps Channel 39 (2480 MHz)

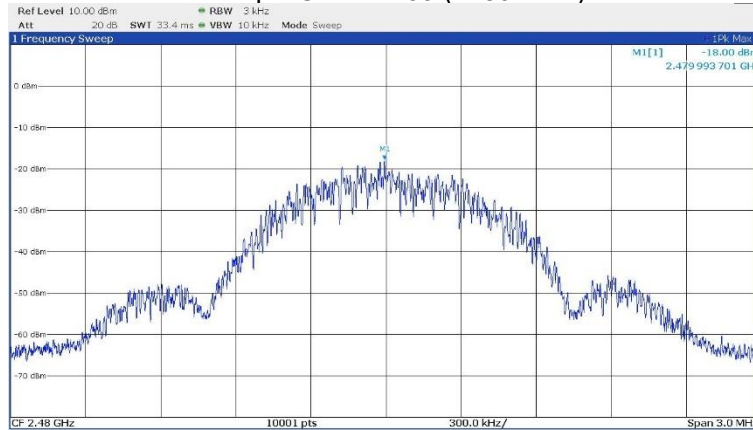

ANT+

ANT+ (2457 MHz)

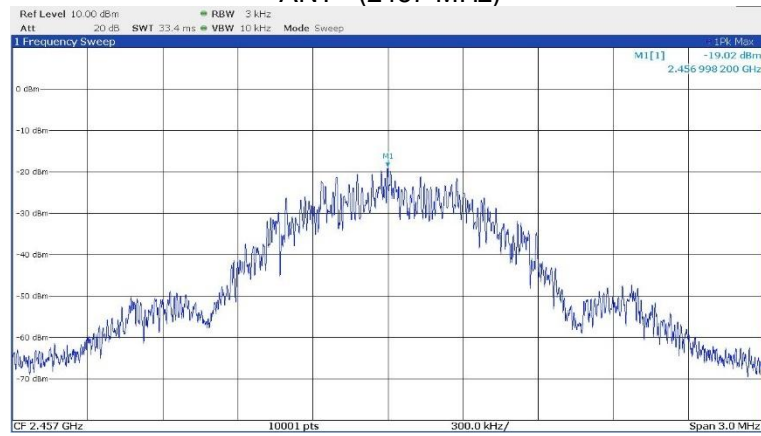

5.4 Spurious emissions radiated

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3**.

5.4.1 Description of the test location

Test location: Anechoic chamber SAC2
Test location: Anechoic chamber FAR1
Test distance: 3 m

5.4.2 Photo documentation of the test set-up

See Attachment B for detailed photo documentation of the test set-up.

5.4.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

According to RSS-247 6.6:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum device, digitally modulated device, or hybrid system is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power – based on either an RF conducted or a radiated measurement – provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 6.3.2, the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

5.4.4 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

The radiated power of the spurious emission from the EUT is measured in a test setup following the procedures set out in ANSI C63.10, items 11.11 and 11.12. If the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise the emission will be measured in average mode again and reported.

Measurements are performed in following order:

1) Measurement of emissions according to General Limit specified in section 15.209(a) / RSS-Gen 8.9:

Test receiver settings for SER1, SER2:

9kHz-150kHz	RBW: 200 Hz	Detector: Quasi peak*	Meas. Time: 1 s,
150kHz-30MHz	RBW: 9 kHz	Detector: Quasi peak*	Meas. Time: 1 s,
30MHz-1GHz	RBW: 120 MHz	Detector: Quasi peak	Meas. Time: 1 s,

*AV Detector in the ranges 9-90kHz and 110-490kHz

Spectrum analyser settings for SER3:

1GHz-26GHz	RBW: 1 MHz	Detector: Max. peak	Trace: Max. hold	Sweep: Auto
------------	------------	---------------------	------------------	-------------

2) If emissions outside the Restricted Bands are above General Limit additional measurements of emissions according to Spurious Emissions Limit specified in section 15.247(d) / RSS-247 5.5 are performed:

Spectrum analyser settings:

RBW: 100 kHz	VBW: 300 kHz	Detector: Max. peak	Trace: Max. hold	Sweep: Auto
--------------	--------------	---------------------	------------------	-------------

5.4.5 Test result

f < 30 MHz

FCC Part 15.209 Radiated emission limits; general requirements (< 30 MHz)							
Frequency (kHz)	PK reading (dBμV)	QP reading (dBμV)	Distance corr. (dB)	corr. AV level (dBμV/m)	QP level (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
15.13	58.4	48.9	-80.0	-21.6	-31.1	44.0	-65.6
16.15	57.5	49.8	-80.0	-22.5	-30.2	43.4	-65.9
23.97	57.4	52.5	-80.0	-22.6	-27.5	40.0	-62.6
27.91	53.4	48.4	-80.0	-26.6	-31.6	38.7	-65.3
32.28	49.4	41.3	-80.0	-30.6	-38.7	37.4	-68.0
41.67	50.7	46.5	-80.0	-29.3	-33.5	35.2	-64.5
681.00	41.7	7.5	-40.0	1.7	-32.5	30.9	-63.4
4556.00	41.2	4.1	-40.0	1.2	-35.9	29.5	-65.4

Note: frequencies in bold characters fall into AV ranges.

Frequency (kHz)	QP reading (dBμV)	QP calc. (dBμA)	Distance corr. (dB)	QP level (dBμA/m)	Limit (dBμA/m)	Dlimit (dB)
15.13	48.9	-2.6	-80.0	-82.6	-7.5	-75.1
16.15	49.8	-1.7	-80.0	-81.7	-8.1	-73.6
23.97	52.5	1.0	-80.0	-79.0	-11.5	-67.5
27.91	48.4	-3.1	-80.0	-83.1	-12.8	-70.3
32.28	41.3	-10.2	-80.0	-90.2	-14.1	-76.1
41.67	46.5	-5.0	-80.0	-85.0	-16.3	-68.7
681.00	7.5	-44.0	-40.0	-84.0	-20.6	-63.4
4556.00	4.1	-47.4	-40.0	-87.4	-37.1	-50.3

Note: No emissions detected in the frequency range 9 kHz to 30 MHz. The recorded values are solely noise values of the Anechoic chamber.


30 MHz < f < 1000 MHz:

Position	Vertical		
Limit	FCC/Part 15C (15.209) 3m	Class	B

Finals

Frequency (Hz)	QuasiPeak (dBµV/m)	QP Margin	QP Limit (dBµV/m)	angle	height	polarization	RBW (Hz)	Correction (dB)
51.817 M	9.92	-30.08	40	0	1	Vertical	120000	-10.79
64.579 M	7.23	-32.77	40	267	1	Vertical	120000	-11.89
123.172 M	13.93	-29.57	43.5	114	1	Vertical	120000	-11.18
194.696 M	6.94	-36.56	43.5	163	1.5	Vertical	120000	-11.68
281.654 M	11.5	-34.5	46	87	1	Vertical	120000	-9.38
461.359 M	17.4	-28.6	46	196	1	Vertical	120000	-4.53

Graph

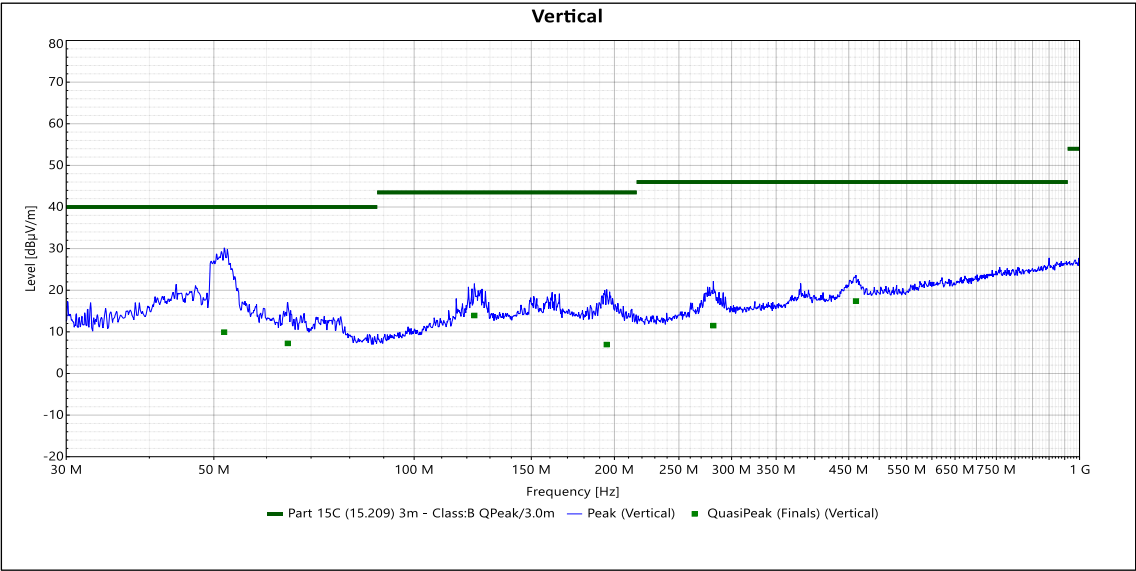


Position	Horizontal		
Limit	FCC/Part 15C (15.209) 3m	Class	B

Finals

Frequency (Hz)	QuasiPeak (dBµV/m)	QP Margin	QP Limit (dBµV/m)	angle	height	polarization	RBW (Hz)	Correction (dB)
49.117 M	7.99	-32.01	40	359	3.5	Horizontal	120000	-9.53
56.817 M	8	-32	40	359	1.5	Horizontal	120000	-9.95
122.145 M	6.3	-37.2	43.5	359	3.5	Horizontal	120000	-11.49
193.619 M	5.55	-37.95	43.5	145	2	Horizontal	120000	-12.59
276.06 M	9.72	-36.28	46	325	1	Horizontal	120000	-9.43
460.949 M	14.78	-31.22	46	137	2	Horizontal	120000	-4.14

Graph

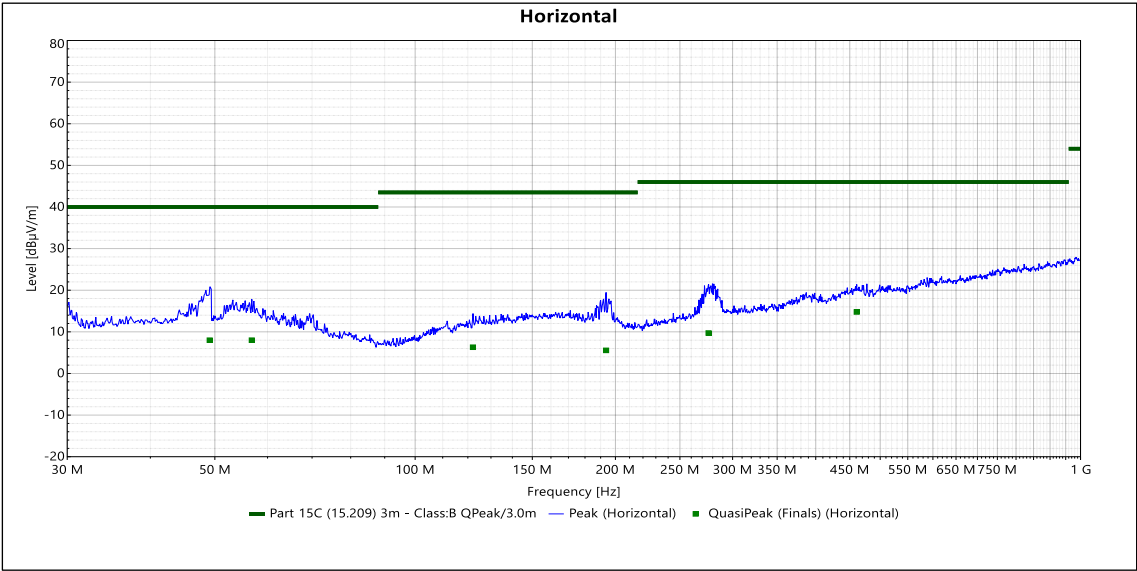


$f > 1000 \text{ MHz}$

1) Measurement of emissions according to General Limit specified in section 15.209(a) / RSS-Gen 8.9:


1 Mbps CH37 – 2402 MHz – P_{def}

Frequency f	Peak emission	Peak limit	Peak Margin	Average value	Average Limit	Average Margin
(GHz)	dBμV/m	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2.3900	43.1	74.0	-30.87	31.5	54.0	-22.5
2.4000	68.3	74.0	-5.73	-	NA	-
2.4835	41.0	74.0	-33.00	31.0	54.0	-23.0
16.6083	50.7	74.0	-23.30	-	NA	-


1-4 GHz

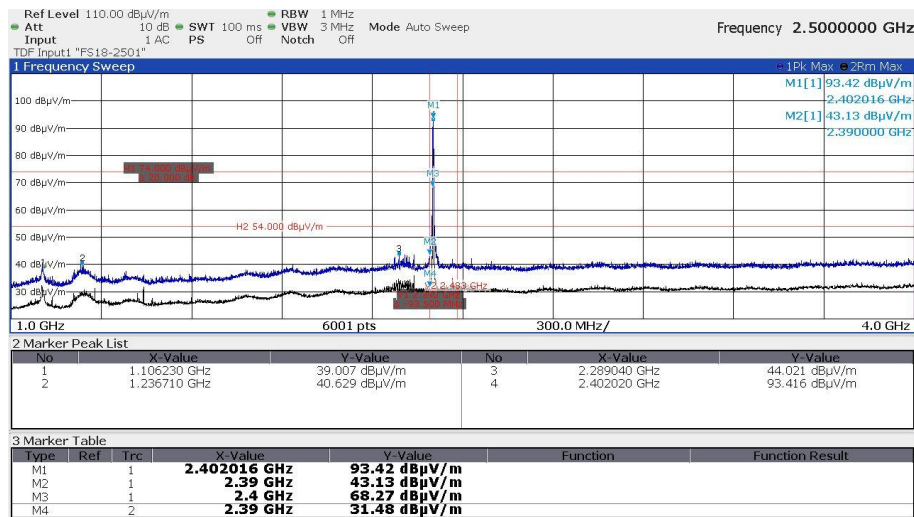

4-18GHz

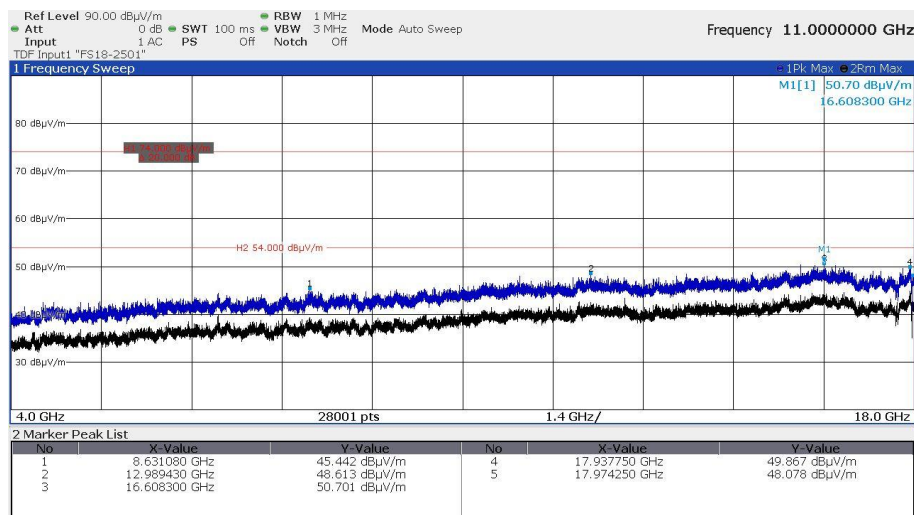


18-26GHz

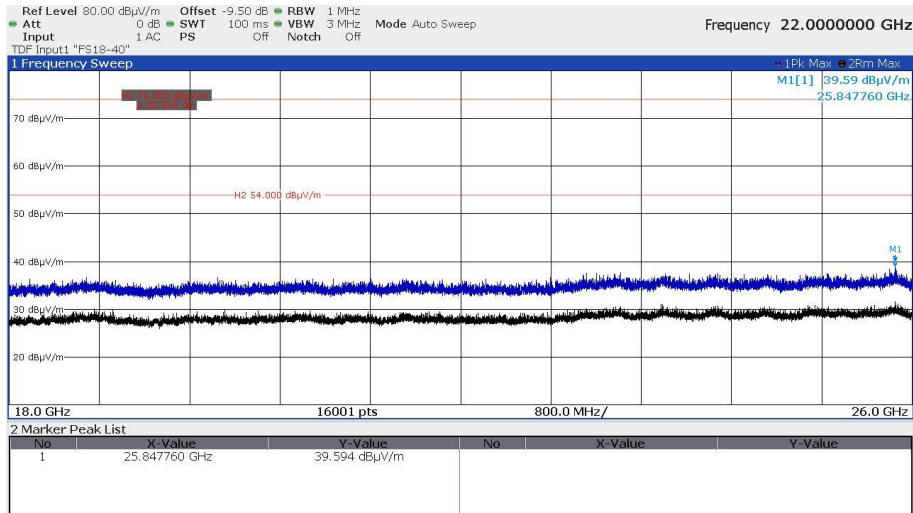


1 Mbps CH18 – 2442 MHz – P_{def}

Frequency f	Peak emission	Peak limit	Peak Margin	Average value	Average Limit	Average Margin
(GHz)	dBμV/m	(dBμV/m)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
2.3900	39.0	74.0	-35.00	31.0	54.0	-23.0
2.4000	39.1	74.0	-34.90	-	NA	-
2.4835	39.0	74.0	-35.00	31.0	54.0	-23.0
16.4543	50.4	74.0	-23.64	-	NA	-


1-4 GHz

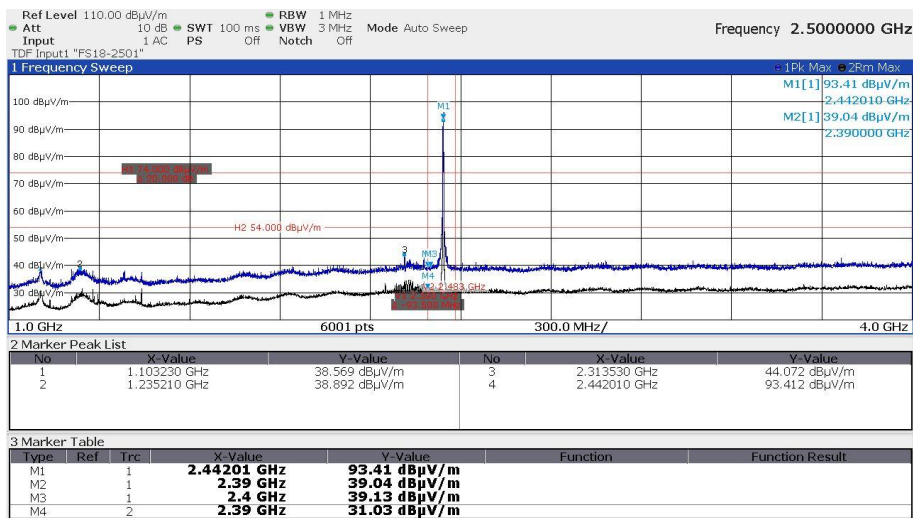

4-18GHz

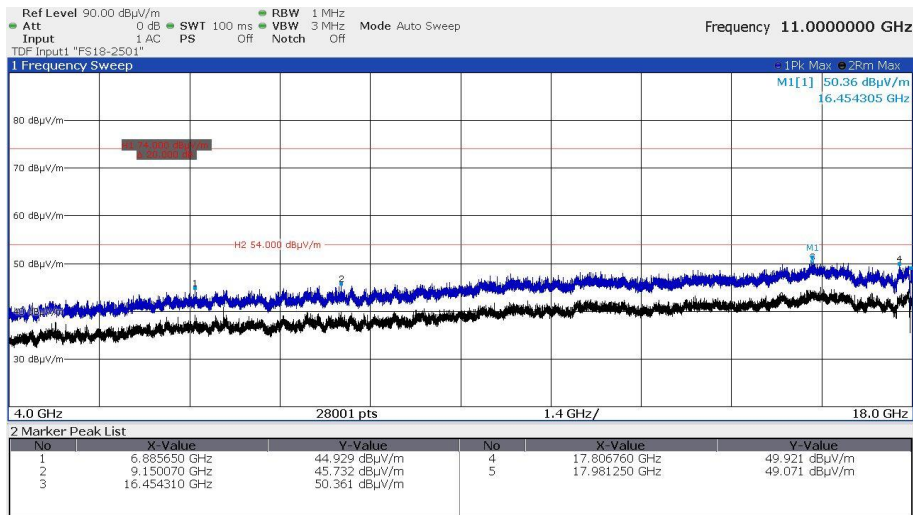


18-26GHz

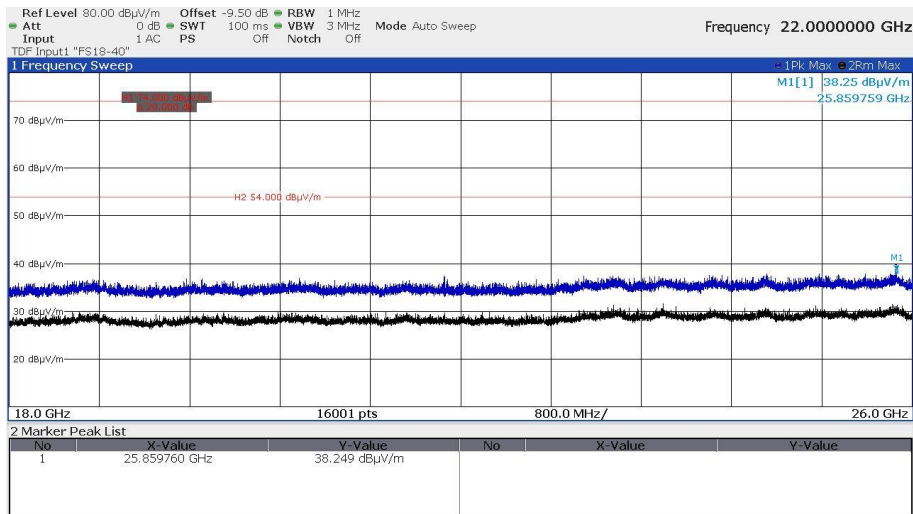


1 Mbps CH39 – 2480 MHz – P_{def}:

Frequency f (GHz)	Peak emission dBμV/m	Peak limit (dBμV/m)	Peak Margin (dB)	Average value (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
2.3900	41.0	74.0	-33.00	32.0	54.0	-22.0
2.4000	42.0	74.0	-32.00	-	NA	-
2.4835	52.7	74.0	-21.30	38.0	54.0	-16.0
16.4628	50.5	74.0	-23.47	-	NA	-


1-4GHz

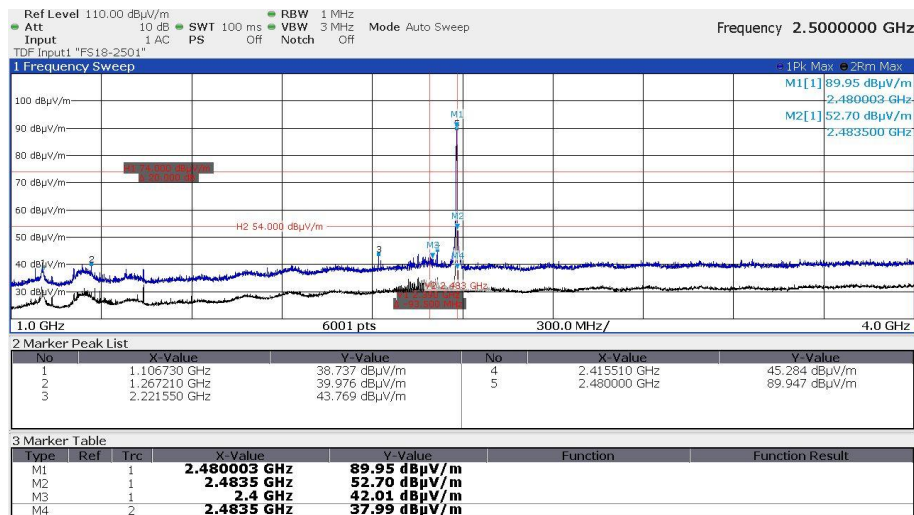

4-18GHz

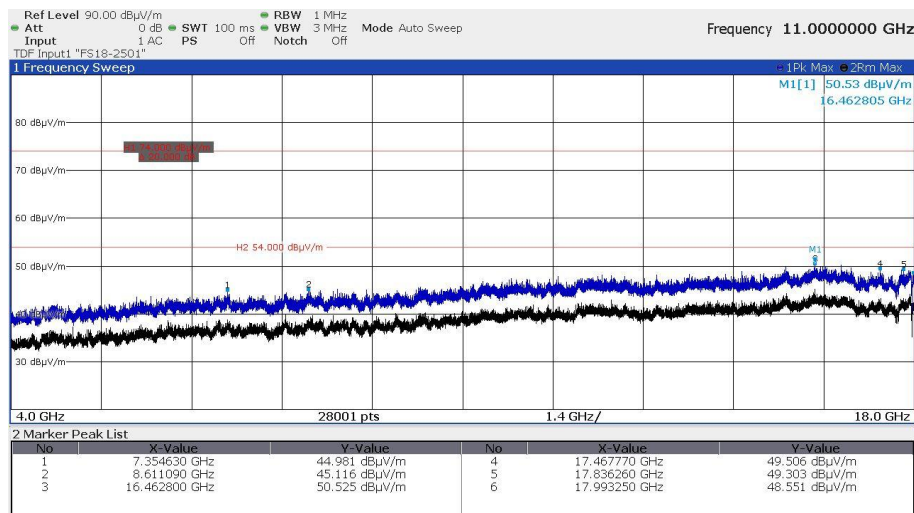


18-26GHz

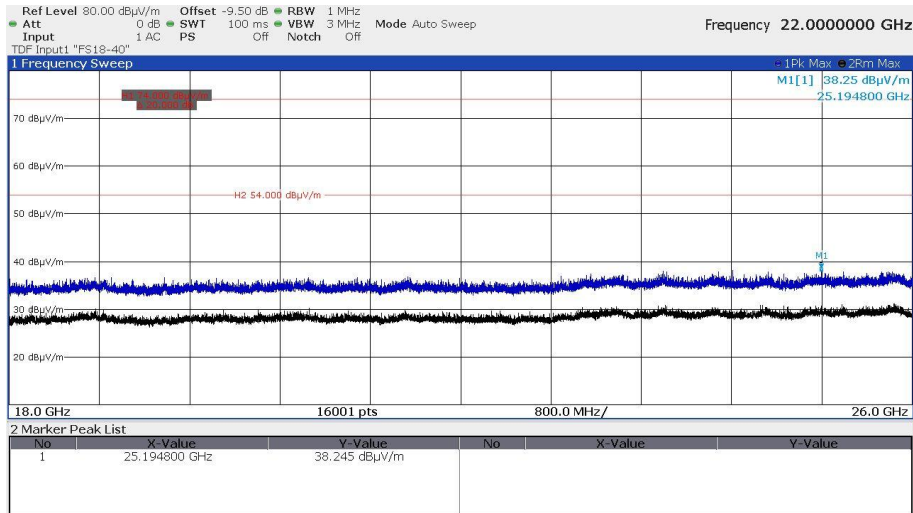


ANT+ – 2402 MHz – P_{def}

Frequency f (GHz)	Peak emission dBμV/m	Peak limit (dBμV/m)	Peak Margin (dB)	Average value (dBμV/m)	Average Limit (dBμV/m)	Average Margin (dB)
2.3900	41.0	74.0	-33.00	32.0	54.0	-22.0
2.4000	39.1	74.0	-34.94	-	NA	-
2.4835	39.1	74.0	-34.94	30.7	54.0	-23.4
16.4678	50.2	74.0	-23.77	-	NA	-


1-4 GHz

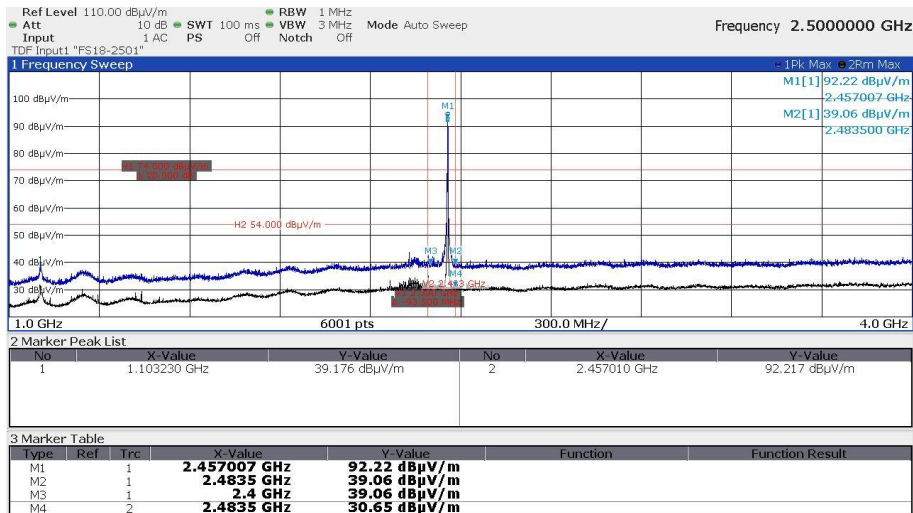

4-18GHz

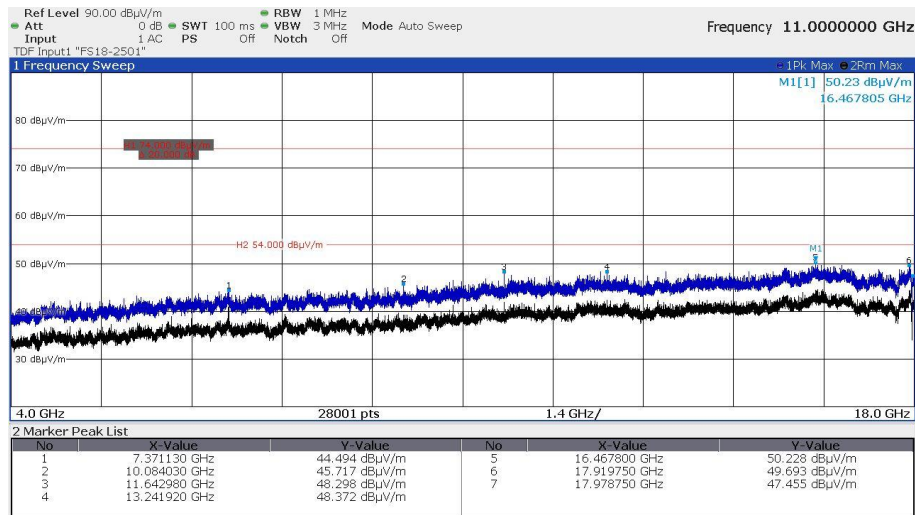

18-26GHz

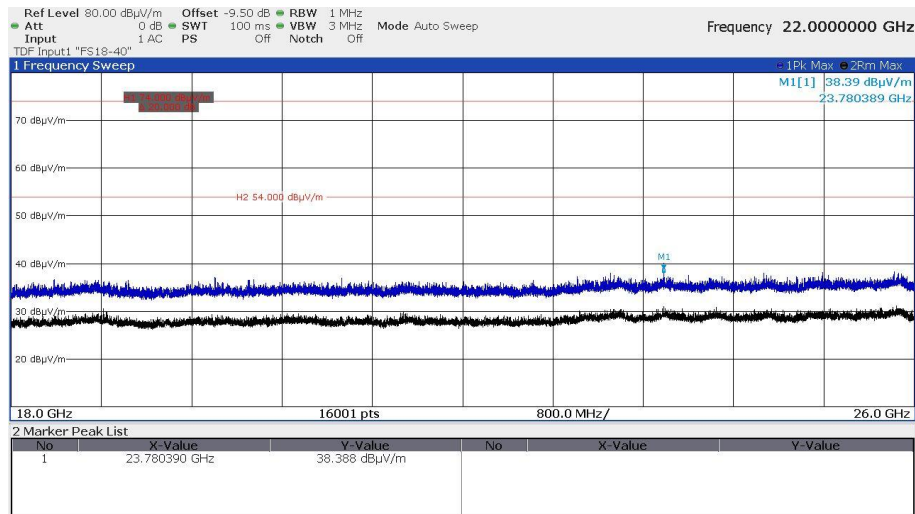

Radiated limits according to FCC Part 15, Section 15.209 for spurious emissions which fall in restricted bands:

Frequency (MHz)	15.209 Limits ($\mu\text{V/m}$)	Measurement distance (m)
0.009 - -0.49	2400/f(kHz)	300
0.49 - 1.705	24000/f(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Radiated limits according to RSS-Gen, 8.9 for spurious emissions which fall in restricted bands:

Frequency (MHz)	RSS-Gen Limits ($\mu\text{A/m}$)	Measurement distance (m)
0.009 - -0.49	63.7/f(kHz)	300
0.49 - 1.705	63.7/f(kHz)	30
1.705 - 30.0	0.08	30

Frequency (MHz)	RSS-Gen Limits ($\mu\text{V/m}$)	Measurement distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Limit according to FCC Part 15, Section 15.247(d) for emissions falling not in restricted bands:

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

Attenuation below the general limits specified in Section 15.209(a) is not required.

Limit according to RSS-247, 5.5 for emissions falling not in restricted bands:

Frequency (MHz)	Spurious emission limit
Below 1000	20 dB below the highest level of the desired power
Above 1000	20 dB below the highest level of the desired power

Attenuation below the general limits specified in RSS-Gen is not required.

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

RSS-Gen, Table 6 – Restricted Frequency Bands

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 – 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 – 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 – 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 – 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic. Only the worst-case plots are listed.

5.5 Antenna application

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has an integrated antenna. No other antenna can be used with the device.

The supplied antenna meets the requirements of part 15.203.

The requirements are **FULFILLED**.

Remarks: None

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Kind of Equipment	Manufacturer	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPC 3	FSW43	Spectrum Analyser	Rohde & Schwarz München	02-02/11-15-001	19/08/2025	19/08/2024		
MB	FSW43	Spectrum Analyser	Rohde & Schwarz München	02-02/11-15-001	19/08/2025	19/08/2024		
SER 1	ESR7	EMI Test Receiver	Rohde & Schwarz Memmingen	09-02/03-21-004	05/08/2025	05/08/2024		
	HFH2-Z2E	Active Loop Antenna	Rohde & Schwarz Memmingen	09-02/24-21-001	05/08/2025	05/08/2024		
	KK-7.8F-2XNM_4.0M	Cable Assembly 7.8	Tactron Elektronik	09-02/50-21-018				
	KK-7.8F-2XNM_4.5M	Cable Assembly 7.8	Tactron Elektronik	09-02/50-21-023				
SER 2	ESR7	EMI Test Receiver	Rohde & Schwarz Memmingen	09-02/03-21-004	05/08/2025	05/08/2024		
	BBV 9743 B	Broadb. Ampl. 10MHz-6GHz	Schwarzbeck Mess-Elektronik	09-02/17-21-002			17/12/2025	17/12/2024
	VULB9168	Trilog-Broadband	Schwarzbeck Mess-Elektronik	09-02/24-22-003	06/08/2025	06/08/2024	12/08/2025	12/08/2024
	KK-7.8F-2XNM_4.0M	Cable Assembly 7.8	Tactron Elektronik	09-02/50-21-018				
	KK-7.8F-2XNM_4.5M	Cable Assembly 7.8	Tactron Elektronik	09-02/50-21-023				
	KK-7.8F-2XNM_9.5M	Cable Assembly 7.8	Tactron Elektronik	09-02/50-21-025				
	50F-003 N 3dB	Attenuator 3dB	Tactron Elektronik	09-02/50-22-002				
	CDB-10K-18-50V-NMF-I	DC Blocker	Tactron Elektronik	09-02/50-22-031			17/07/2025	17/07/2024
	KK-SF526S-2X11N-10.0M	RF Cable	Tactron Elektronik	09-02/50-25-002				
	BAT-EMC 2024.0.12.0	Nexio Software	EMCO Elektronik GmbH	09-02/68-21-002				

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

SER 3	ESW26	EMI Test Receiver	Rohde & Schwarz München	02-02/03-17-002	16/04/2025	16/04/2024		
	AMF-6D-01002000-22-10P	RF Amplifier	MITEQ, Inc.	02-02/17-15-004				
	BBHA 9170	SHF-EHF Horn Antenna	Schwarzbeck Mess-Elektronik	02-02/24-05-014	20/06/2027	20/06/2024		
	3117	Horn Antenna	ETS Lindgren	02-02/24-20-007	20/11/2025	20/11/2024		
	R1 _ 18 - 40 GHz	Reception Sys 18-40 GHz	CSA Group Bayern GmbH	02-02/30-09-002			02/08/2025	02/08/2024
	BAM 4.5-P	Antenna Mast	maturo GmbH	02-02/50-17-024				
	KK-SF106-2X11N-6,5M	RF Cable	Huber + Suhner	02-02/50-18-016				
	0_5 Meter DC-18GHz	NMS111-GL200SC06_5	Tactron Elektronik	09-16/50-23-003				

- End of test report -

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.