
FCC Test Report

Report No.: AGC05794260601FR01

FCC ID : 2ANFNIT375

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION : Multi-Input Eco Charging Cable With Watch Charger

BRAND NAME : N/A

MODEL NAME : IT375, 240731

APPLICANT : Anhui Inno-Sign International Co., Ltd

DATE OF ISSUE : Jul. 17, 2026

STANDARD(S) : FCC Part 15 Subpart C

REPORT VERSION : V1.0



Attestation of Global Compliance (Shenzhen) Co., Ltd

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Jul. 17, 2026	Valid	Initial Release

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Table of Contents



1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Related Submittal(S) / Grant (S)	6
2.3 Test Methodology	6
2.4 Special Accessories	6
2.5 Equipment Modifications	6
2.6 Antenna Requirement.....	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	9
4. System Test Configuration.....	10
4.1 EUT Configuration.....	10
4.2 EUT Exercise.....	10
4.3 Configuration of Tested System	10
4.4 Equipment Used in Tested System.....	11
4.5 Summary of Test Results	12
5. Description of Test Modes	13
6. Field Strength of Fundamental	14
6.1 Measurement Limits	14
6.2 Measurement Procedure.....	15
6.3 Field Strength Calculation	16
6.4 Measurement Setup	17
6.5 Measurement Result	18
7. -20 dB Bandwidth Measurement	30
7.1 Provisions Applicable	30
7.2 Measurement Procedure.....	30
7.3 Measurement Setup	30
7.4 Measurement Result	30
8. AC Power Line Conducted Emission Test.....	32
8.1 Measurement Limits	32
8.2 Measurement Setup	32
8.3 Preliminary Procedure of Line Conducted Emission Test	33
8.4 Final Procedure of Line Conducted Emission Test.....	33
8.5 Measurement Result	34
Appendix I: Photographs of Test Setup.....	38
Appendix II: Photographs of Test EUT	38

Any report having not been signed by authorized approver, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

1. General Information

Applicant	Anhui Inno-Sign International Co., Ltd
Address	Room 1201-1204 Building B, HuaBang ICC, NO.190 South Qianshan Road, Hefei, Anhui Province, 230071 China
Manufacturer	Anhui Inno-Sign International Co., Ltd
Address	Room 1201-1204 Building B, HuaBang ICC, NO.190 South Qianshan Road, Hefei, Anhui Province, 230071 China
Factory	Anhui Inno-Sign International Co., Ltd
Address	Room 1201-1204 Building B, HuaBang ICC, NO.190 South Qianshan Road, Hefei, Anhui Province, 230071 China
Product Designation	Multi-Input Eco Charging Cable With Watch Charger
Brand Name	N/A
Test Model	IT375
Series Model(s)	240731
Difference Description	All the same except for the model name.
Date of receipt of test item	Jun. 30, 2026
Date of Test	Jun. 30, 2026 to Jul. 17, 2026
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-WPT-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By		
	Thea Huang (Project Engineer)	Jul. 17, 2026
Reviewed By		
	Bibo Zhang (Reviewer)	Jul. 17, 2026
Approved By		
	Angela Li (Authorized Officer)	Jul. 17, 2026

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2. Product Information

2.1 Product Technical Description

Equipment Type	☐ WPT System; ☒ WPT Source; ☐ WPT Client
Device Type	☒ Desktop Charger
	☐ Portable Charger
	☐ Composite charger
Operation Frequency Band	WPT Band I: 110.5kHz-205kHz(Samsung Watch)
	WPT Band II: 325kHz-335kHz(Apple Watch)
Hardware Version	V1.0
Software Version	V1.0
Modulation Type	ASK
Field Strength of Fundamental	WPT Band I: 56.27dBμV/m (Max) WPT Band II: 53.54dBμV/m (Max)
Antenna Designation	Coil Antenna
Number of Coils	1 Primary Coil
Input Rating	USB-A Input& Type-C Input: 5V/1A 5V/2A 5V/3A
Output Rating	Watch wireless Output: 2W (Apple Watch) 1W (Samsung Watch) Type-C Output: 5V/1A 5V/2A 5V/3A Lightning Output: 5V/1A 5V/2A Micro Output: 5V/1A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2.2 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANFNIT375**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.3 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2020+Cor.1-2023+ C63.10a-2024+Errata to C63.10a-2024	American National Standard for Testing Unlicensed Wireless Devices

2.4 Special Accessories

Not available for this EUT intended for grant.

2.5 Equipment Modifications

Not available for this EUT intended for grant.

2.6 Antenna Requirement

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
EUT Antenna: The non-detachable antenna inside the device cannot be replaced by the user at will.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 101 & 201, Building 19(B5), Junfeng Industrial Park, Chongqing Road, P.R.C.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842(CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	0 - 30
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 150kHz	$U_c = \pm 4.2 \text{ dB}$
Uncertainty of Radiated Emission below 30MHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2.7 \%$

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

3.5 List of Equipment Used

● Radiated Spurious Emission& RF Conducted Test							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	100096	2026-01-13	2027-01-12
☒	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2026-05-20	2027-05-19
☒	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2026-05-20	2027-05-19
☒	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2026-01-14	2028-01-13
☒	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2025-03-14	2027-03-13
☒	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2025-05-16	2027-05-15

● AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
☒	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2026-05-20	2027-05-19
☒	AGC-EM-A171	Attenuator	Mini-Circuits	UNAT-10A+	DC-6GZ	2026-01-13	2028-01-12
☒	AGC-EM-E023	AMN	R&S	ESH2-Z5	100086	2026-05-19	2027-05-18

● Test Software					
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information
☒	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71
☒	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

4. System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise


The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



Conducted Emission Configure:



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

☒ Test Accessories Come from the Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Wireless Charging Load	YBZ	Q2	Support 2W,1W	--
2	Adapter	Apple	A2452	N/A	N/A

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	N/A	N/A	N/A	N/A	N/A

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.209(a)(f)	Field Strength of Fundamental	Pass
3	§15.209(a)(f)	Radiated Spurious Emission	Pass
4	§15.215(c)	20dB Bandwidth	Pass
5	§15.205(a)	Restricted Bands of Operation	Pass
6	§15.207	AC Power Line Conducted Emission	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

5. Description of Test Modes

Test Mode	Test Descriptions	Test Frequency	Remark
1	EUT stand alone, standby, powered by AC/DC adapter.	@110.5kHz-205kHz(Samsung Watch)	None
2	Direct contact during charging/operating between the EUT& WPT Load EUT is powered by AC/DC adapter.	@110.5kHz-205kHz(Samsung Watch)	Using a wireless dummy load (1W)
3	EUT stand alone, standby, powered by AC/DC adapter.	@325kHz-335kHz(Apple Watch)	None
4	Direct contact during charging/operating between the EUT& WPT Load EUT is powered by AC/DC adapter.	@325kHz-335kHz(Apple Watch)	Using a wireless dummy load (2W)
Supplementary Test Instructions			
- For the radiated emissions and AC power conducted emissions test, the EUT was tested in desktop position in the following configurations: Standby and charging. - AC power line conducted testing was performed on Configuration 2& Configuration 4 at EUT minimum and maximum load respectively only as worse case. - Radiated spurious emission 30MHz to 1GHz was performed on Configuration 2& Configuration 4 at EUT minimum and maximum load respectively only as worse case - During the radiation emission test, the device will find the worst placement of the X, Y, and Z axes for testing. - The EUT supports 2W, 1W "wireless output, and all modes have been tested at full load, half load and null load, only the worst mode is reflected in the report.			

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6. Field Strength of Fundamental

6.1 Measurement Limits

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10-2020+Cor.1-2023+ C63.10a-2024+Errata to C63.10a-2024				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver Setup:	Frequency	Detector	RBW	VBW	Value
	9kHz-150kHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150kHz-30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Note: For measurements in the frequency bands 9-90kHz and 110-490kHz, quasi-peak detection is preferred. If the margin is very small, average detection is added.					

■ Limits for frequency below 30MHz

Frequency	Limit (μV /m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

■ Limits for frequency Above 30MHz

Frequency	Limit (dBμV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

Remark:

- 1) Emission level dBμV= 20 log Emission level μV/m
- 2) The smaller limit shall apply at the cross point between two frequency bands.
- 3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.2 Measurement Procedure

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$\blacklozenge \quad FS = RA + AF + CF - AG - AV$$

Where

- FS = Field Strength in dBμV/m
- RA = Receiver Amplitude (including preamplifier) in dBμV
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB/m
- AG = Amplifier Gain in dB
- AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$\blacklozenge \quad FS = RR + LF$$

Where

- FS = Field Strength in dBμV/m
- RR = RA - AG - AV in dBμV
- LF = CF + AF in dB

Assume a receiver reading of 52.0dBμV is obtained.

- The antenna factor of 7.4dB/m and cable factor of 1.6dB are added.
- The amplifier gain of 29dB and average factor of 5dB are subtracted, giving a field strength of 27dBμV/m.
- This value in dBμV/m was converted to its corresponding level in μV/m.

- RA = 52.0 dBμV/m, AF = 7.4 dB/m
- RR = 18.0 dBμV, CF = 1.6 dB
- LF = 9.0 Db, AG = 29.0 dB
- AV = 5.0 dB, FS = RR + LF
- FS = 18 + 9 = 27 dBμV/m

➤ Level in μV/m = Common Antilogarithm [(27 dBμV/m)/20] = 22.4 μV/m

- Magnetic field strength calculation (9 kHz – 30 MHz)

When the limit is in terms of magnetic field, the following equation applies:

$$\blacklozenge \quad H[\text{dB}(\mu\text{A/m})] = V[\text{dB}(\mu\text{V})] + LC [\text{dB}] - GPA [\text{dB}] + AFH [\text{dB(S/m)}]$$

Where,

- H is the magnetic field strength (to be compared with the limit),
- V is the voltage level measured by the receiver or spectrum analyzer,
- LC is the cable loss,
- GPA is the gain of the preamplifier (if used), and
- AFH is the magnetic antenna factor.


If the “electrical” antenna factor is used instead, the above equation becomes:

$$\blacklozenge \quad H[\text{dB}(\mu\text{A/m})] = V[\text{dB}(\mu\text{V})] + LC [\text{dB}] - GPA [\text{dB}] + AFE [\text{dB(m-1)}] - 51.5[\text{dB}\Omega]$$


where AFE is the “electric” antenna factor, as provided by the antenna calibration laboratory.

6.4 Measurement Setup

Radiated Emission Test Setup 9kHz-30MHz

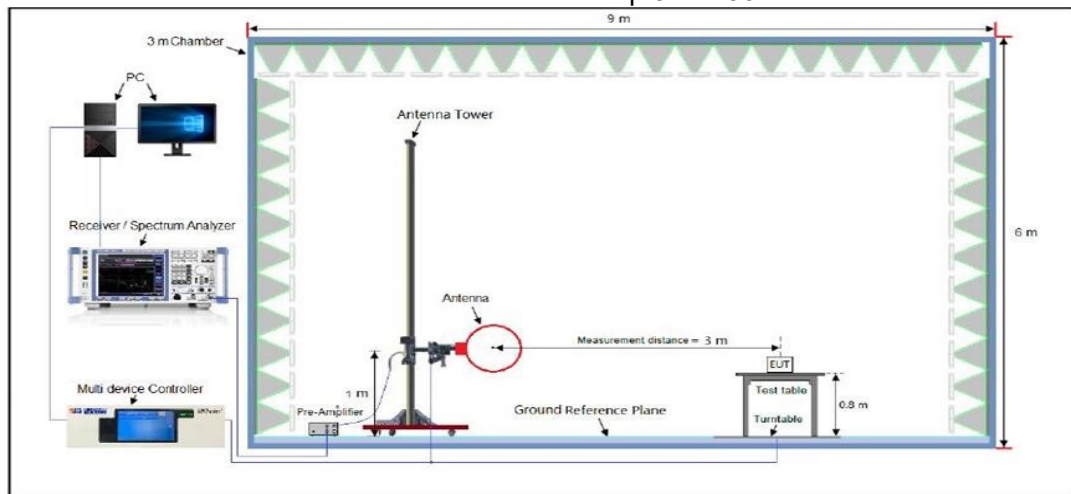

Radiated Emission Test Setup 30MHz-1000MHz

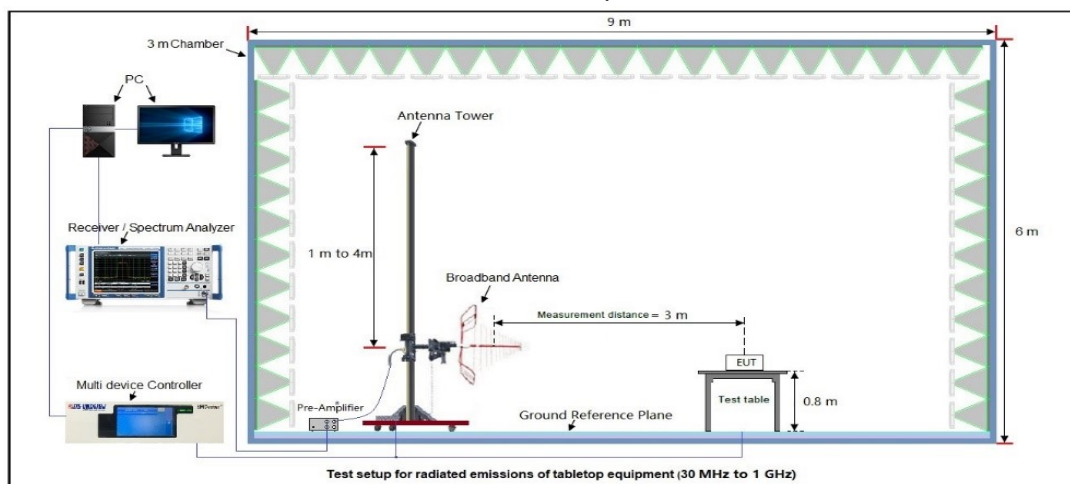

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020+Cor.1-2023+C63.10a-2024+Errata to C63.10a-2024. The specification used was the FCC 15.209 and FCC 15.205 limits.


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

6.5 Measurement Result

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Coaxial

Test graph and data for Electric Field strength between 9kHz-150kHz

Test Mode: Mode 2

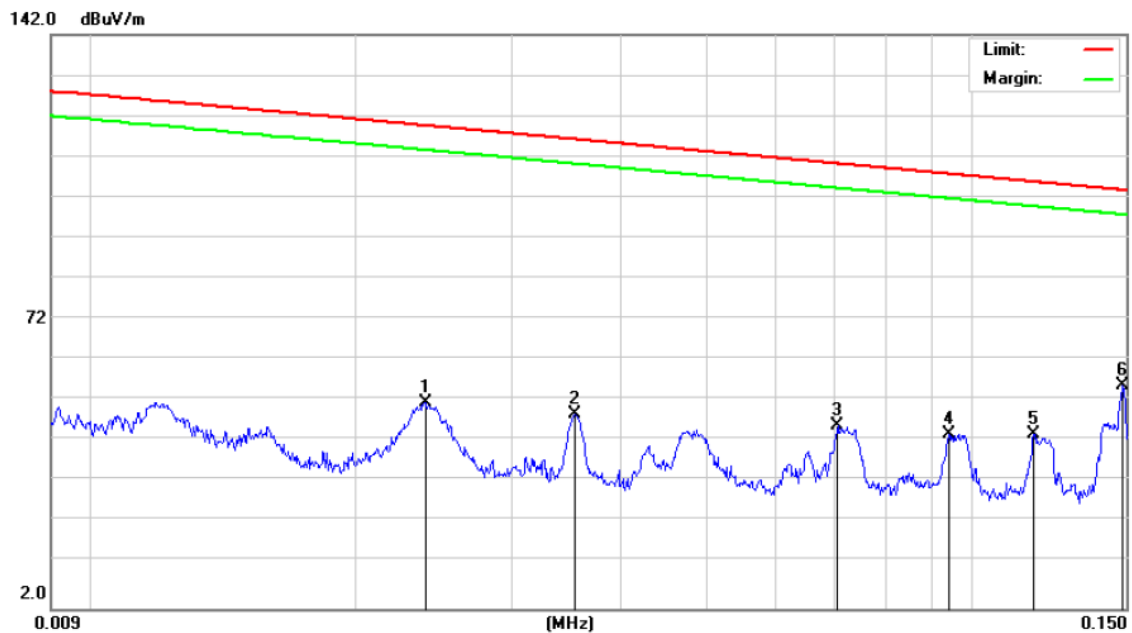

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.0240	21.26	31.07	52.33	119.84	-67.51	peak
2		0.0354	20.29	28.98	49.27	116.48	-67.21	peak
3		0.0704	19.88	26.70	46.58	110.55	-63.97	peak
4		0.0942	18.35	26.22	44.57	108.03	-63.46	peak
5		0.1178	18.39	26.25	44.64	106.10	-61.46	peak
6	*	0.1468	29.84	26.43	56.27	104.10	-47.83	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Coplanar

Test graph and data for Electric Field strength between 9kHz-150kHz

Test Mode: Mode 2

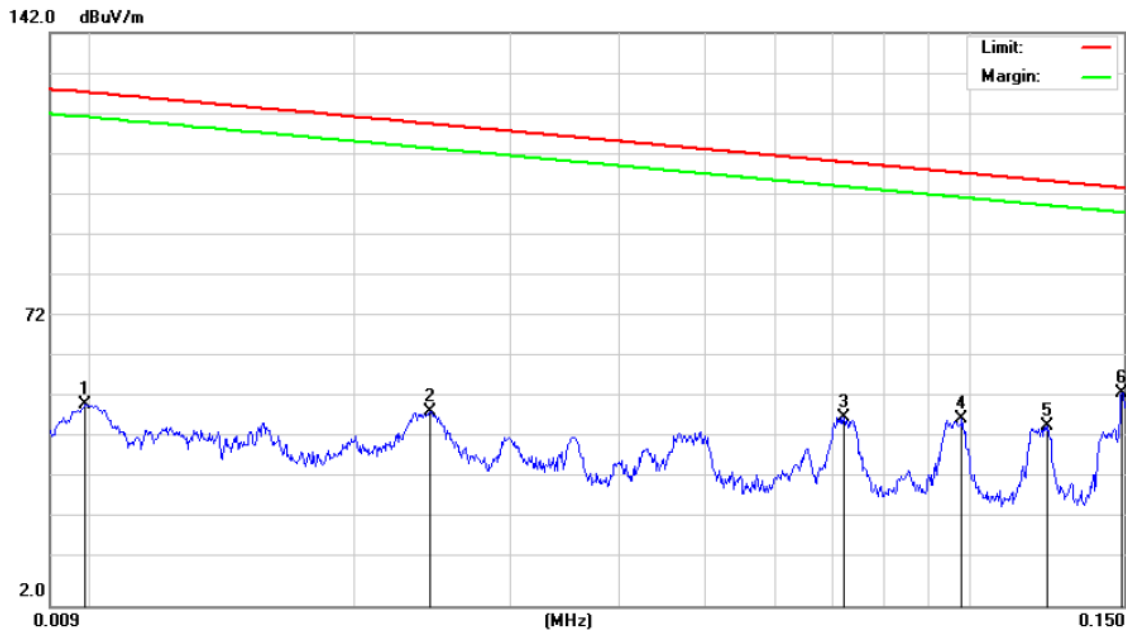

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.0099	13.39	37.68	51.07	127.48	-76.41	peak
2		0.0244	18.57	30.97	49.54	119.70	-70.16	peak
3		0.0719	21.50	26.66	48.16	110.37	-62.21	peak
4		0.0981	21.46	26.18	47.64	107.68	-60.04	peak
5		0.1228	19.55	26.28	45.83	105.74	-59.91	peak
6	*	0.1471	27.68	26.43	54.11	104.07	-49.96	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Coaxial

Test graph and data for Electric Field strength between 150kHz-30MHz

Test Mode: Mode 2

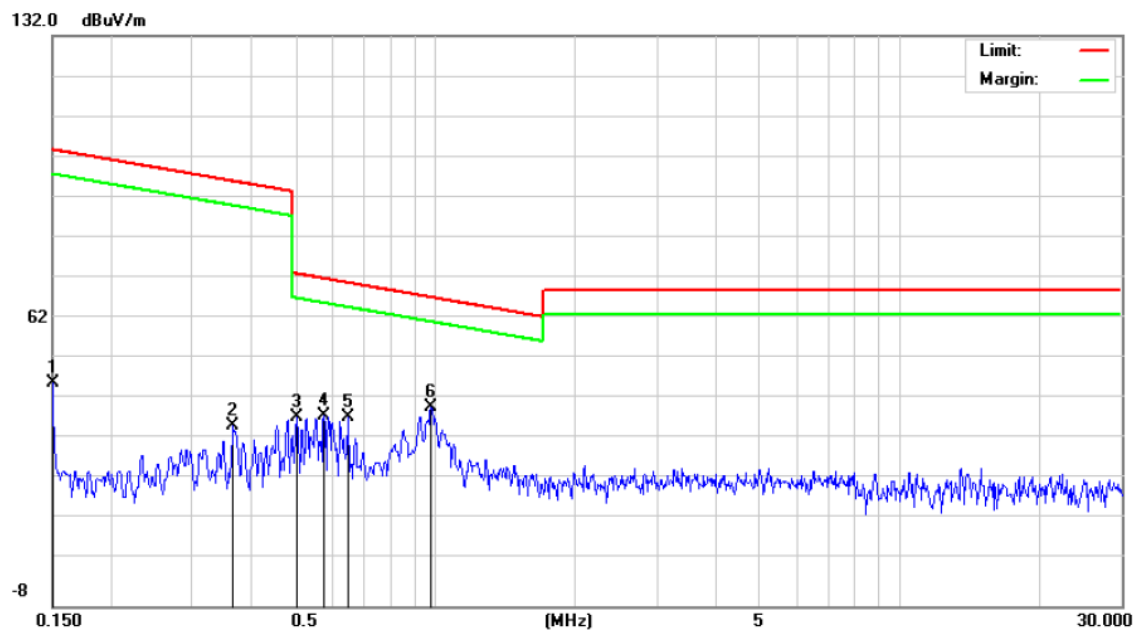

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.1500	20.18	26.43	46.61	104.05	-57.44	peak
2		0.3673	9.97	26.40	36.37	96.29	-59.92	peak
3		0.5020	12.02	26.29	38.31	73.59	-35.28	peak
4		0.5762	12.61	26.27	38.88	72.39	-33.51	peak
5		0.6508	12.16	26.26	38.42	71.33	-32.91	peak
6	*	0.9787	14.55	26.12	40.67	67.79	-27.12	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Coplanar

Test graph and data for Electric Field strength between 150kHz-30MHz

Test Mode: Mode 2

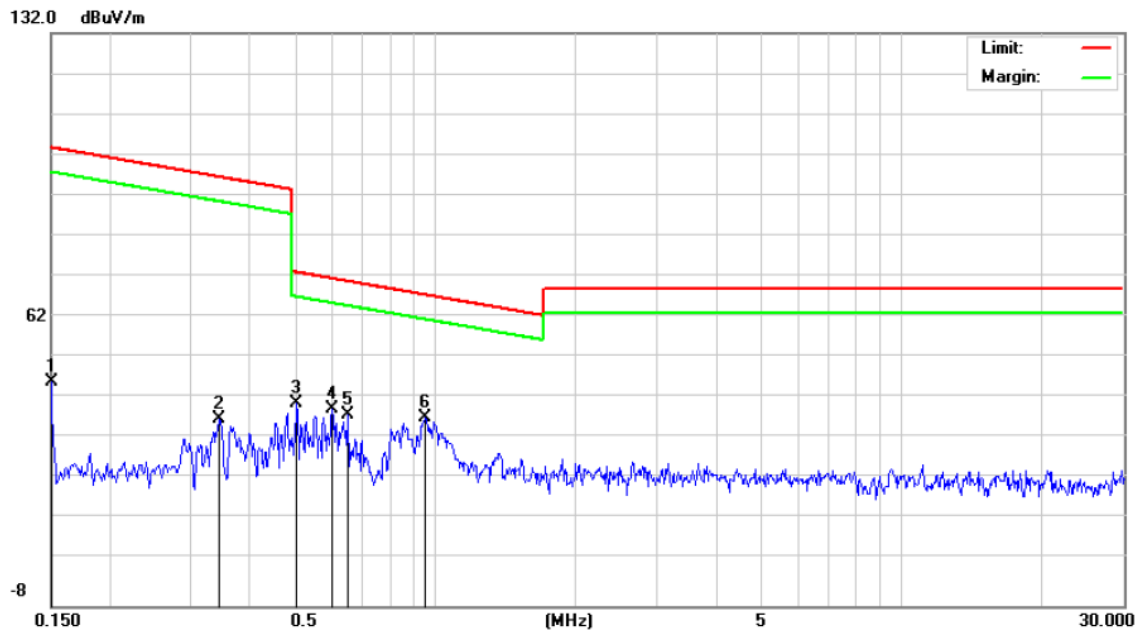

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.1500	20.24	26.43	46.67	104.05	-57.38	peak
2		0.3428	11.17	26.43	37.60	96.89	-59.29	peak
3		0.5047	15.23	26.29	41.52	73.54	-32.02	peak
4		0.6011	14.03	26.26	40.29	72.02	-31.73	peak
5		0.6474	12.43	26.27	38.70	71.38	-32.68	peak
6	*	0.9531	11.88	26.15	38.03	68.02	-29.99	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Coaxial

Test graph and data for Electric Field strength between 9kHz-150kHz

Test Mode: Mode 4

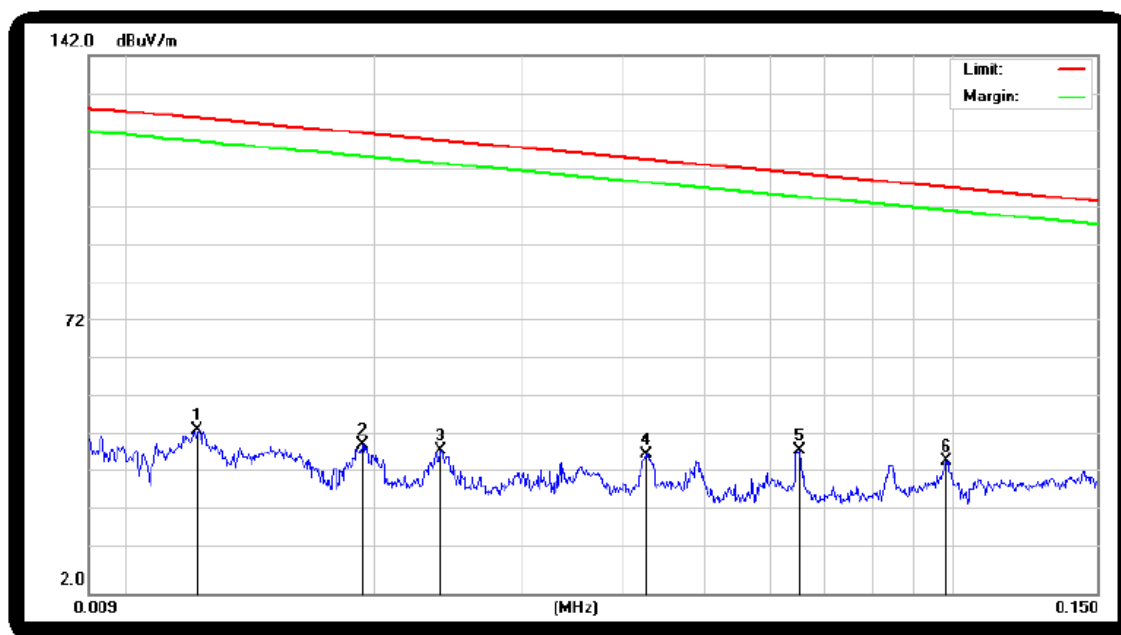

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detecto
1		0.0122	8.04	36.39	44.43	125.68	-81.25	peak
2		0.0193	8.41	32.39	40.80	121.72	-80.92	peak
3		0.0240	8.25	31.07	39.32	119.84	-80.52	peak
4		0.0427	10.18	28.17	38.35	114.86	-76.51	peak
5		0.0652	12.34	26.90	39.24	111.21	-71.97	peak
6	*	0.0984	10.24	26.18	36.42	107.66	-71.24	peak

Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Coplanar

Test graph and data for Electric Field strength between 9kHz-150kHz

Test Mode: Mode 4

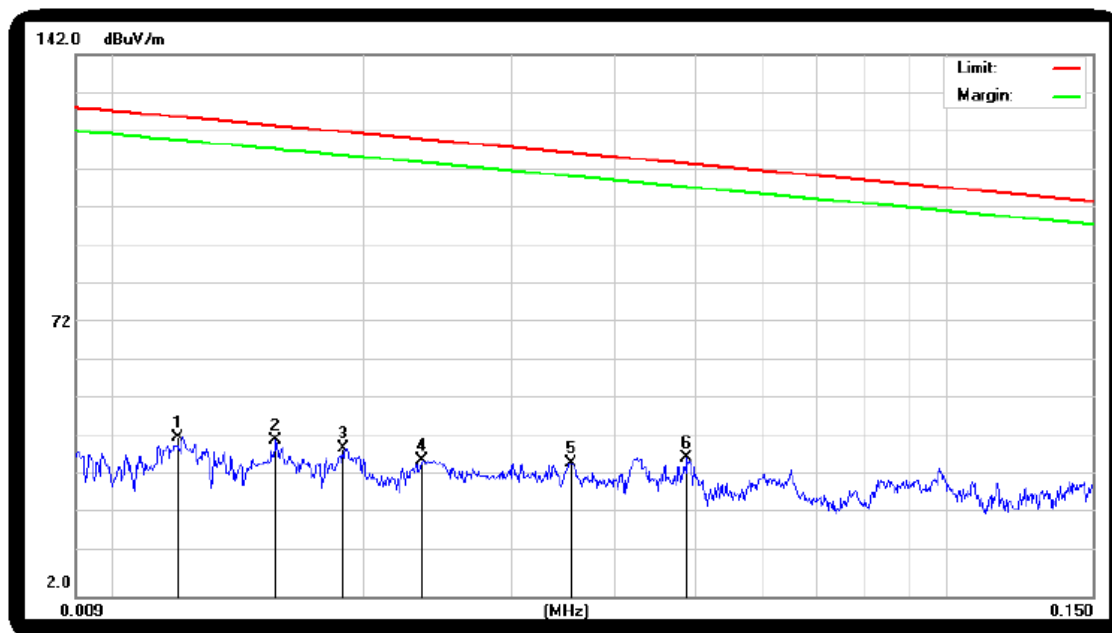

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detecto
1		0.0120	6.74	36.50	43.24	125.82	-82.58	peak
2		0.0156	7.79	34.47	42.26	123.56	-81.30	peak
3		0.0189	7.74	32.62	40.36	121.90	-81.54	peak
4		0.0235	5.91	31.18	37.09	120.02	-82.93	peak
5		0.0354	7.62	28.98	36.60	116.48	-79.88	peak
6	*	0.0488	10.07	27.69	37.76	113.71	-75.95	peak

Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Coaxial

Test graph and data for Electric Field strength between 150kHz-30MHz

Test Mode: Mode 4

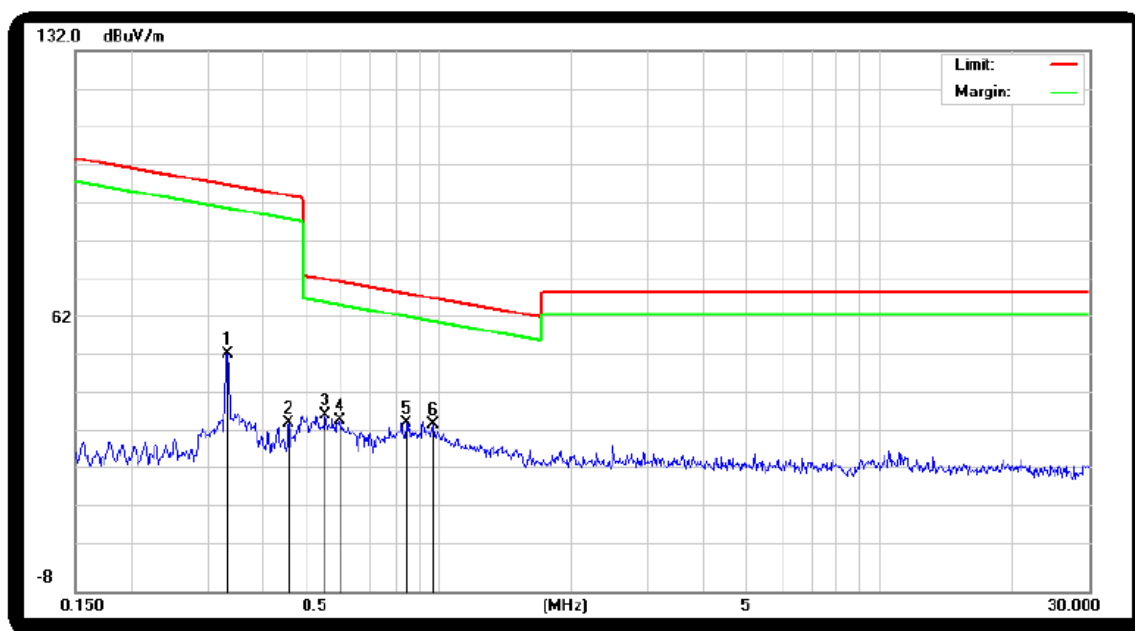

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detecto
1		0.3322	26.94	26.44	53.38	97.16	-43.78	peak
2		0.4563	9.12	26.32	35.44	94.41	-58.97	peak
3		0.5523	11.30	26.27	37.57	72.76	-35.19	peak
4		0.5977	9.97	26.26	36.23	72.07	-35.84	peak
5		0.8437	9.52	26.21	35.73	69.08	-33.35	peak
6	*	0.9735	9.08	26.13	35.21	67.84	-32.63	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	19.9°C	Relative Humidity	51.0%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Coplanar

Test graph and data for Electric Field strength between 150kHz-30MHz

Test Mode: Mode 4

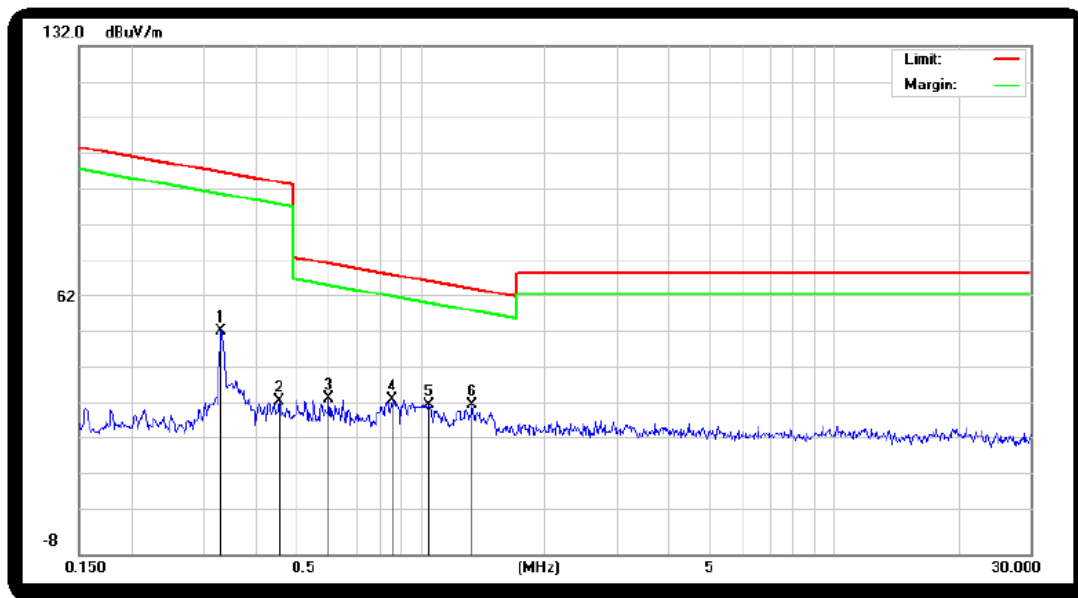

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		0.3322	27.10	26.44	53.54	97.21	-43.67	peak
2		0.4563	7.91	26.32	34.23	94.41	-60.18	peak
3		0.6008	8.75	26.26	35.01	72.03	-37.02	peak
4		0.8528	8.48	26.21	34.69	68.99	-34.30	peak
5		1.0483	7.12	26.08	33.20	67.19	-33.99	peak
6	*	1.3379	7.19	25.95	33.14	65.08	-31.94	peak

Result: Pass

Notes:

1. Negative value in the margin column shows emission below limit.
2. All measurements were made with 0.6m loop antenna at 3m distance. All emissions are below the QP limit.
3. Corr. Factor= Antenna Factor (dB/m) + Cable Loss (dB), Over = Measurement-Limit.
4. Loop antenna is used for the emission under 30MHz.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd


Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	21.3°C	Relative Humidity	52.5%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Horizontal

Test graph and data for Radiated Emission up to 1GHz

Test Mode: Mode 2

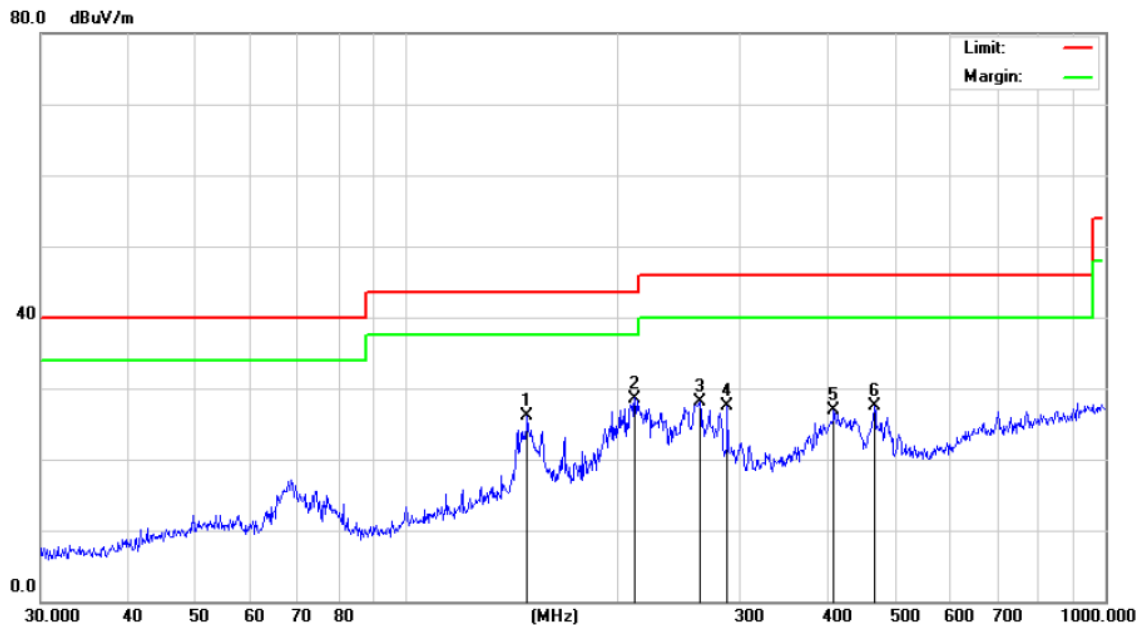

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		148.9625	48.00	-21.95	26.05	43.50	-17.45	peak
2	*	212.2695	53.49	-24.89	28.60	43.50	-14.90	peak
3		262.8955	50.46	-22.40	28.06	46.00	-17.94	peak
4		287.9904	48.89	-21.47	27.42	46.00	-18.58	peak
5		408.9460	46.26	-19.28	26.98	46.00	-19.02	peak
6		467.2349	47.21	-19.61	27.60	46.00	-18.40	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	21.3°C	Relative Humidity	52.5%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 2	Antenna Polarity	Vertical

Test graph and data for Radiated Emission up to 1GHz

Test Mode: Mode 2

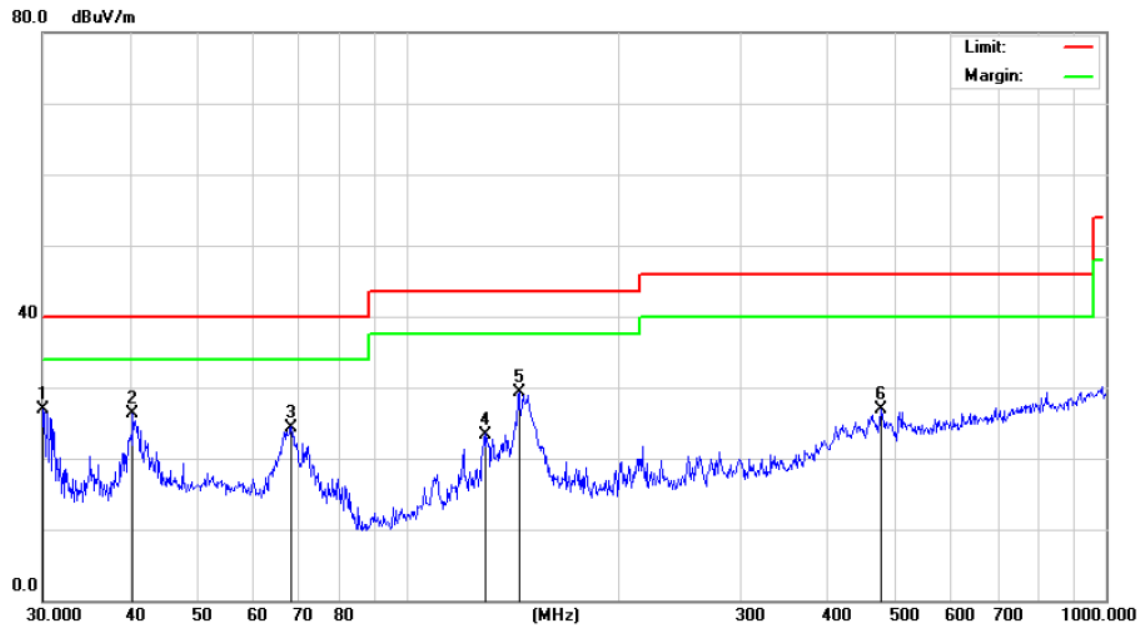

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.1054	50.81	-23.93	26.88	40.00	-13.12	peak
2		40.4172	48.81	-22.51	26.30	40.00	-13.70	peak
3		68.1514	47.65	-23.25	24.40	40.00	-15.60	peak
4		129.4677	45.99	-22.59	23.40	43.50	-20.10	peak
5		144.3348	50.35	-21.05	29.30	43.50	-14.20	peak
6		477.1694	43.79	-16.93	26.86	46.00	-19.14	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	21.3°C	Relative Humidity	52.5%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Horizontal

Test graph and data for Radiated Emission up to 1GHz

Test Mode: Mode 4

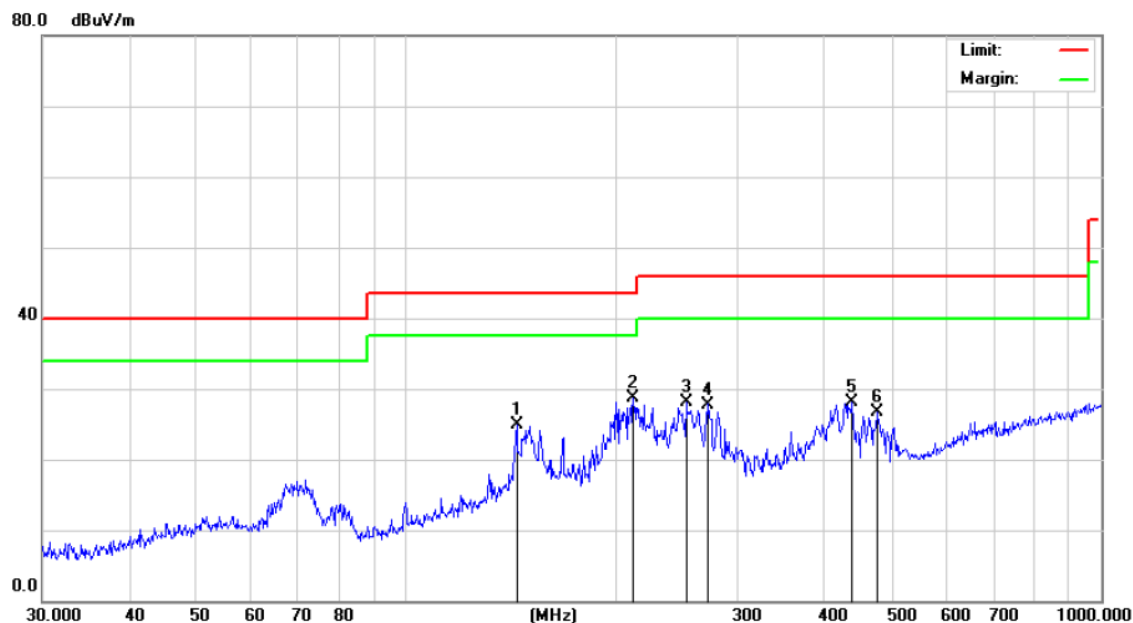

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1		144.3348	46.95	-21.98	24.97	43.50	-18.53	peak
2	*	212.2695	53.66	-24.89	28.77	43.50	-14.73	peak
3		252.9482	50.90	-22.86	28.04	46.00	-17.96	peak
4		272.2776	49.67	-21.87	27.80	46.00	-18.20	peak
5		438.6554	48.27	-20.08	28.19	46.00	-17.81	peak
6		475.4991	46.28	-19.53	26.75	46.00	-19.25	peak


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Equipment	Multi-Input Eco Charging Cable With Watch Charger	Model Name	IT375
Temperature	21.3°C	Relative Humidity	52.5%
Air Pressure	985 Mbar	Power supply	DC 5V by adapter
Worst Mode	Mode 4	Antenna Polarity	Vertical

Test graph and data for Radiated Emission up to 1GHz

Test Mode: Mode 4

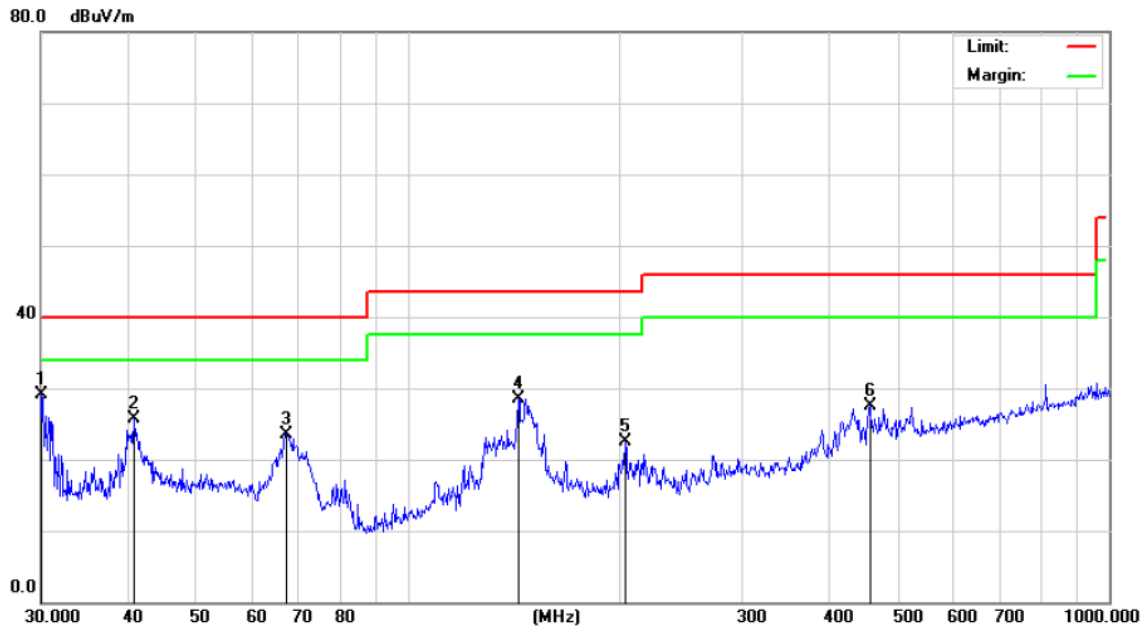

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector
1	*	30.1054	53.10	-23.93	29.17	40.00	-10.83	peak
2		40.7016	48.26	-22.47	25.79	40.00	-14.21	peak
3		67.2022	46.58	-23.15	23.43	40.00	-16.57	peak
4		143.8295	49.55	-21.06	28.49	43.50	-15.01	peak
5		204.2377	46.59	-24.07	22.52	43.50	-20.98	peak
6		455.9058	44.47	-17.00	27.47	46.00	-18.53	peak

Result: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Over = Measurement-Limit.

3. The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

7. -20 dB Bandwidth Measurement

7.1 Provisions Applicable

N/A


7.2 Measurement Procedure

Set the parameters of SPA as below:

1. The spectrum analyzer connected via a receive antenna placed near the EUT in peak Max hold mode.
2. Centre frequency = Operation Frequency
3. The resolution bandwidth of 300 Hz and the video bandwidth of 1 kHz were used.
4. Span: 3kHz, Sweep time: Auto
5. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.
6. Measured the spectrum width with power higher than 20dB below carrier.
7. Measured the 99% OBW.
8. Record the plots and Reported.

Note: Since the measured signal is CW-like, it is not practical to adjust the RBW according to C63.10, as the measured bandwidth will always follow the RBW, resulting in approximately twice the RBW.

7.3 Measurement Setup

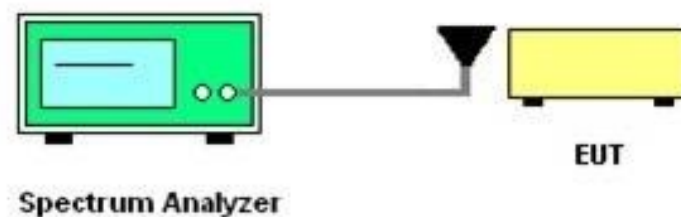


7.4 Measurement Result


Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Frequency (kHz)	99%Bandwidth (kHz)	-20dB Bandwidth (kHz)	Limits (kHz)	Pass or Fail
2	146.2	0.760	0.859	N/A	Pass
4	332.2	0.882	0.856	N/A	Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graphs of -20dB Bandwidth

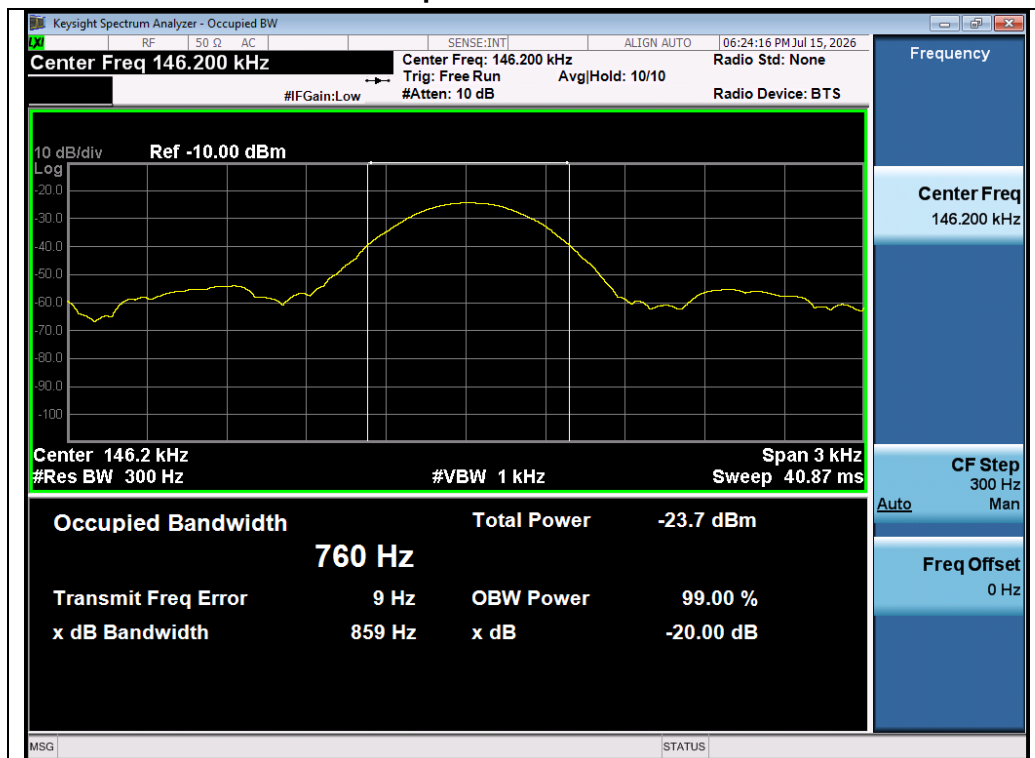

Test_Graph_ASK_Coil_146.2kHz_-20dB Bandwidth

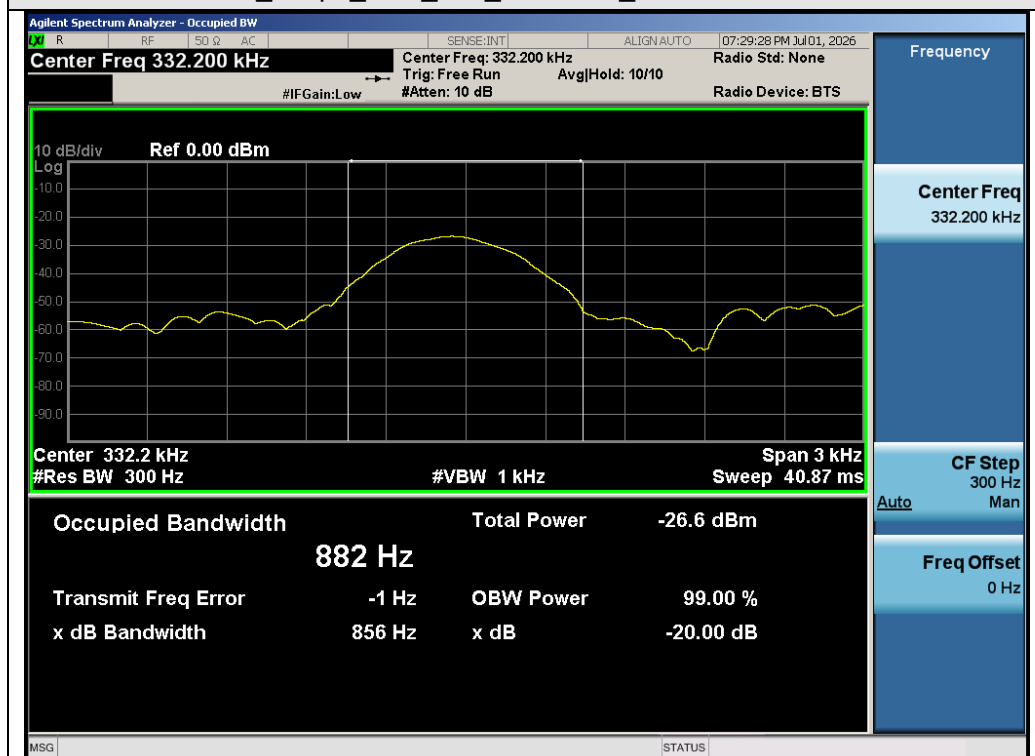

Test_Graph_ASK_Coil_332.2kHz_-20dB Bandwidth

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8. AC Power Line Conducted Emission Test


8.1 Measurement Limits

Frequency Range	Maximum RF Line Voltage	
	Q.P. (dBμV)	Average (dBμV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

8.2 Measurement Setup

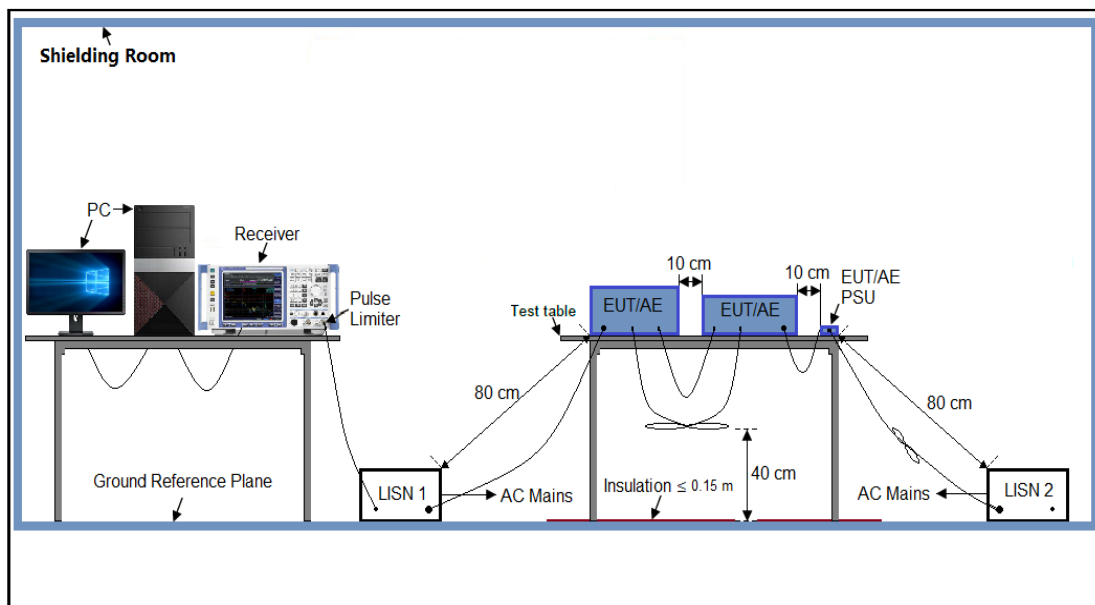

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

8.3 Preliminary Procedure of Line Conducted Emission Test


1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
4. All support equipment received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

8.4 Final Procedure of Line Conducted Emission Test

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.
4. A conducted emission is calculated by the following equation:
 - Measurement Level (dB μ V) = Receiver reading (dB μ V) + Transd (dB)
 - Transd (dB)= AMN Factor(dB)+Cable Loss(dB)+Attenuation(dB)
 - Margin= Limit-Level

8.5 Measurement Result

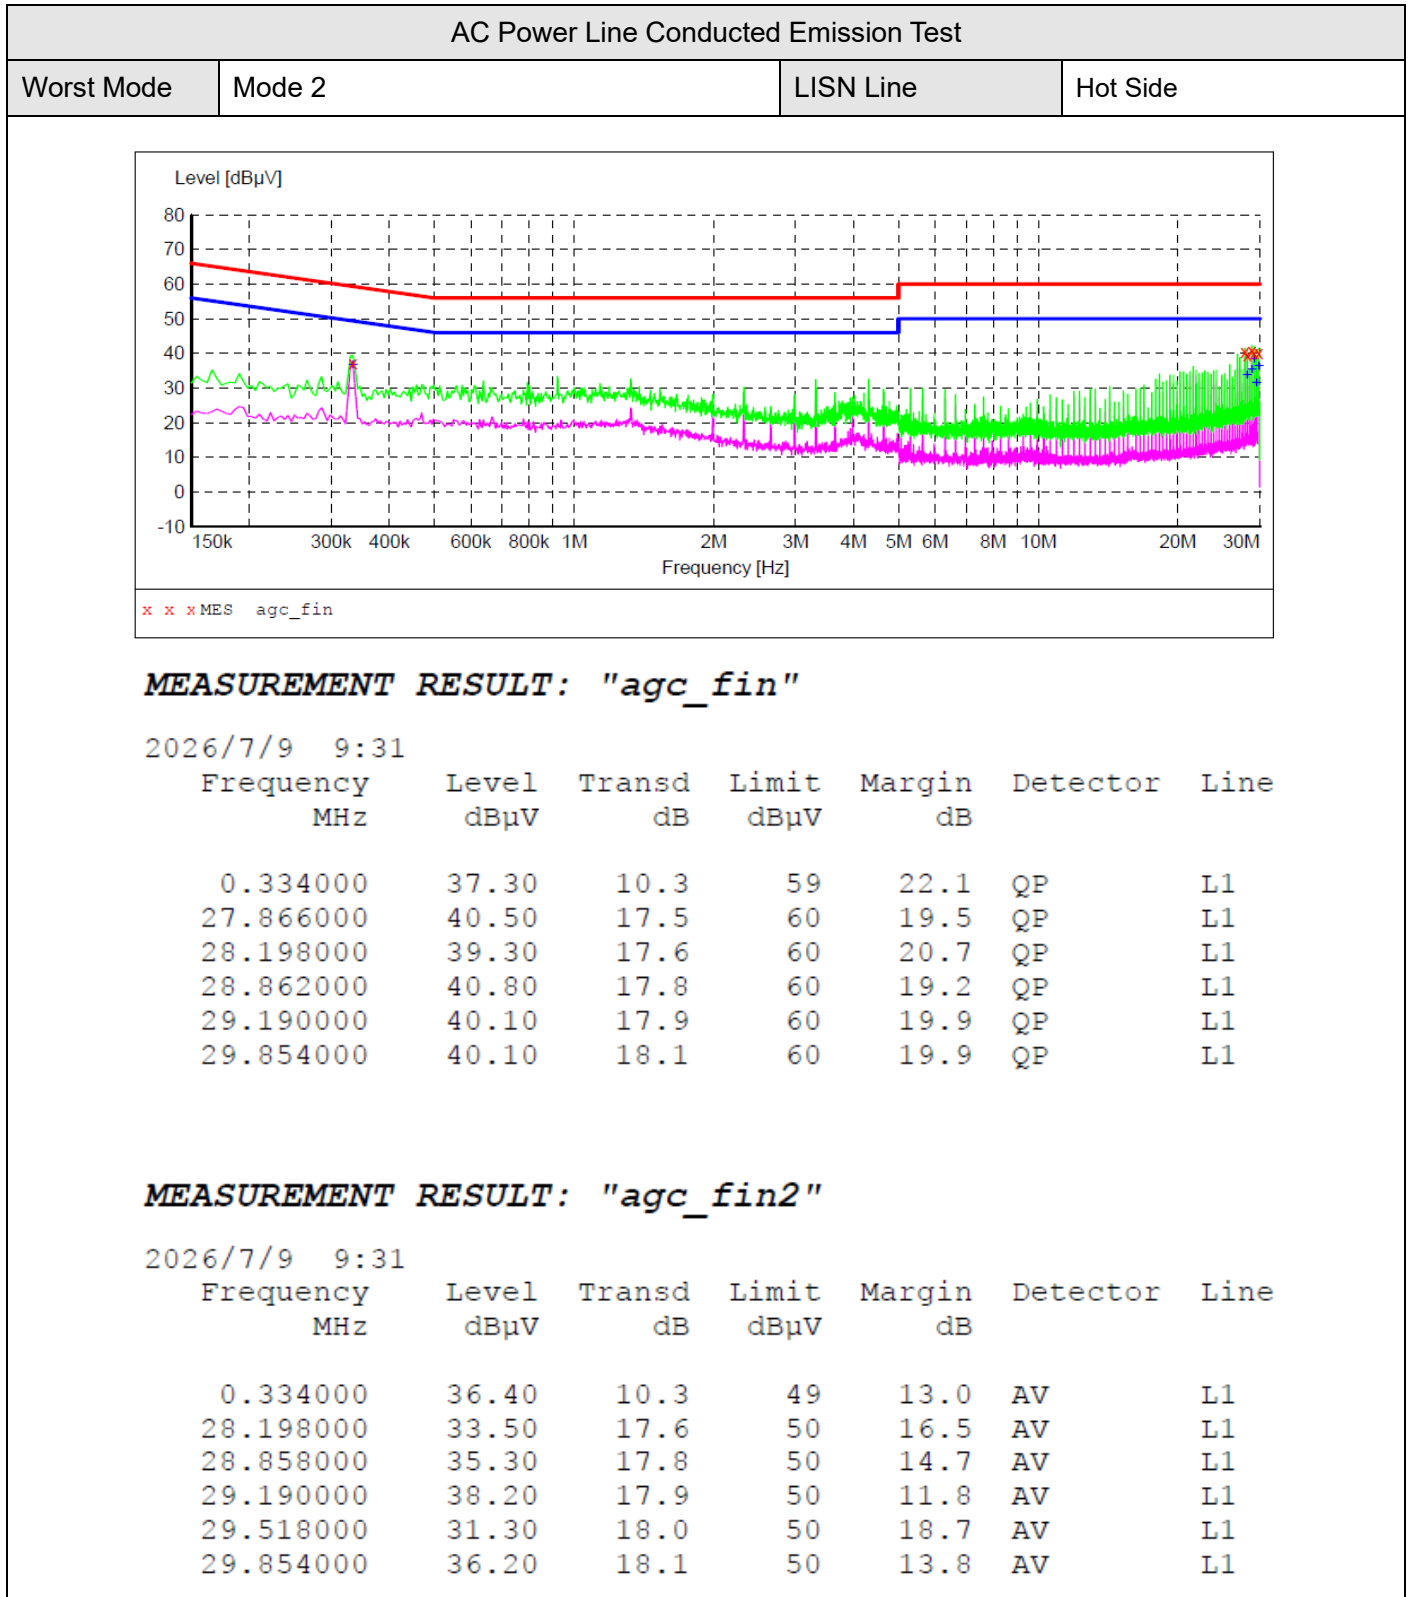


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

AC Power Line Conducted Emission Test

Worst Mode	Mode 2	LISN Line	Neutral Side
------------	--------	-----------	--------------

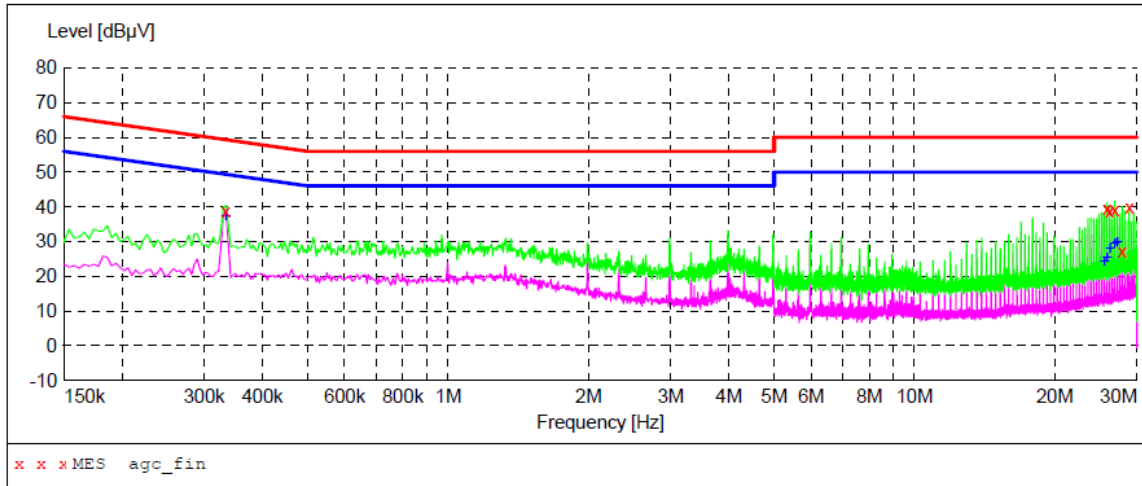

MEASUREMENT RESULT: "agc_fin"

2026/7/9 9:28

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.334000	38.80	10.3	59	20.6	QP	N
25.882000	39.60	16.9	60	20.4	QP	N
26.218000	38.80	17.0	60	21.2	QP	N
26.882000	38.90	17.2	60	21.1	QP	N
27.886000	27.10	17.5	60	32.9	QP	N
28.874000	40.00	17.8	60	20.0	QP	N

MEASUREMENT RESULT: "agc_fin2"

2026/7/9 9:28


Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.334000	37.30	10.3	49	12.1	AV	N
25.554000	24.30	16.8	50	25.7	AV	N
25.886000	25.40	16.9	50	24.6	AV	N
26.218000	27.80	17.0	50	22.2	AV	N
26.882000	29.50	17.2	50	20.5	AV	N
27.214000	29.70	17.3	50	20.3	AV	N

Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

AC Power Line Conducted Emission Test

Worst Mode	Mode 4	LISN Line	Hot Side
------------	--------	-----------	----------

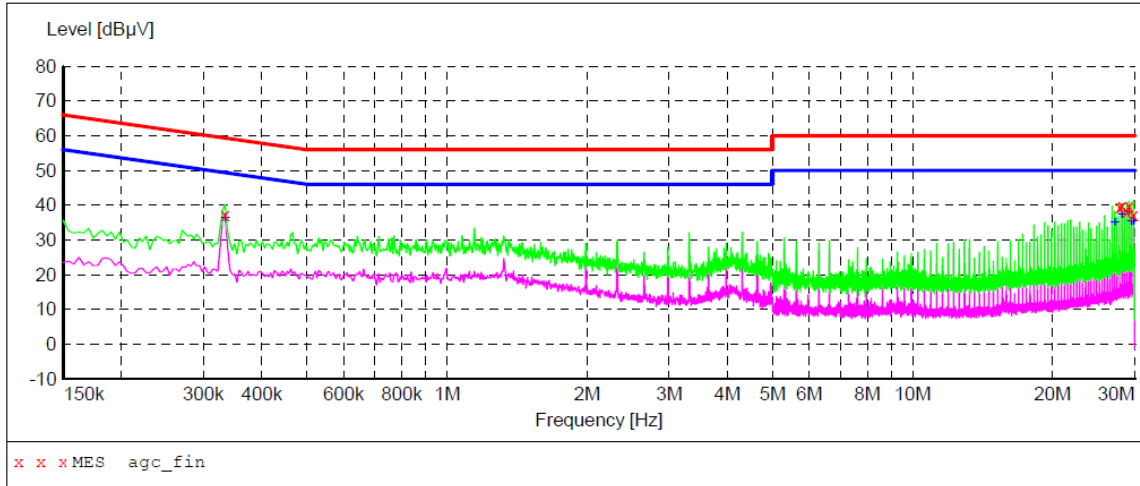

MEASUREMENT RESULT: "agc_fin"

2026/7/9 9:40

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.334000	37.20	10.3	59	22.2	QP	L1
27.842000	39.30	17.5	60	20.7	QP	L1
28.178000	39.80	17.6	60	20.2	QP	L1
28.846000	38.20	17.8	60	21.8	QP	L1
29.170000	39.90	17.9	60	20.1	QP	L1
29.842000	37.30	18.1	60	22.7	QP	L1

MEASUREMENT RESULT: "agc_fin2"

2026/7/9 9:40

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.334000	36.20	10.3	49	13.2	AV	L1
27.182000	35.00	17.3	50	15.0	AV	L1
28.178000	37.20	17.6	50	12.8	AV	L1
29.170000	37.90	17.9	50	12.1	AV	L1
29.502000	35.10	18.0	50	14.9	AV	L1
29.834000	35.20	18.1	50	14.8	AV	L1


Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

AC Power Line Conducted Emission Test

Worst Mode	Mode 4	LISN Line	Neutral Side
------------	--------	-----------	--------------

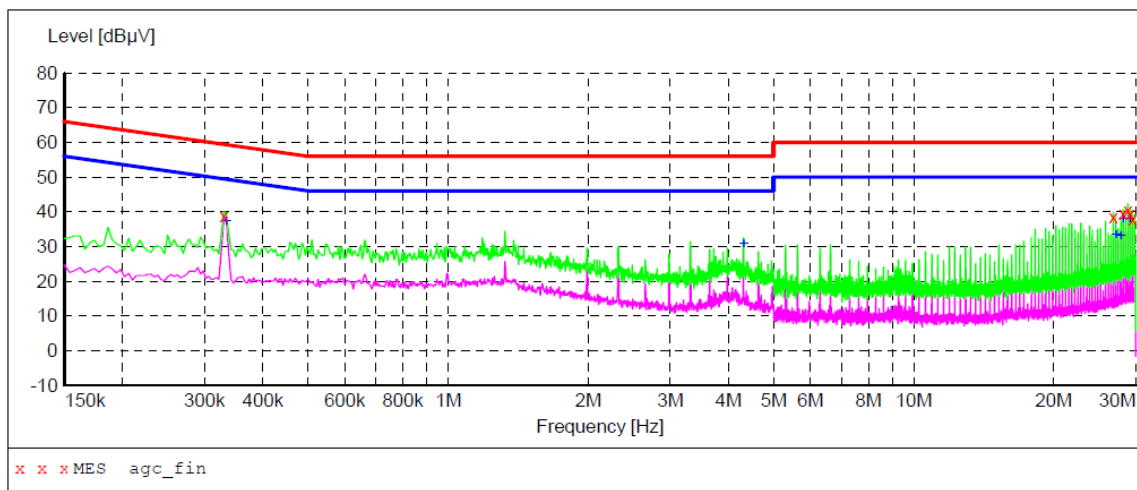

MEASUREMENT RESULT: "agc_fin"

2026/7/9 9:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.330000	38.70	10.3	60	20.8	QP	N
26.854000	38.50	17.2	60	21.5	QP	N
28.178000	39.60	17.6	60	20.4	QP	N
28.842000	40.60	17.8	60	19.4	QP	N
29.170000	39.40	17.9	60	20.6	QP	N
29.510000	37.80	18.0	60	22.2	QP	N

MEASUREMENT RESULT: "agc_fin2"

2026/7/9 9:38

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line
0.334000	37.10	10.3	49	12.3	AV	N
4.310000	30.50	10.7	46	15.5	AV	N
27.186000	33.10	17.3	50	16.9	AV	N
27.850000	32.90	17.5	50	17.1	AV	N
28.178000	37.80	17.6	50	12.2	AV	N
29.174000	37.80	17.9	50	12.2	AV	N

Result: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC05794260601AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC05794260601AP02

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the “Dedicated Testing/Inspection Stamp” is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd

Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>

Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

-----End of Report-----

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15 days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Attestation of Global Compliance(Shenzhen)Co., Ltd
Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd
Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: <http://www.agccert.com/>