

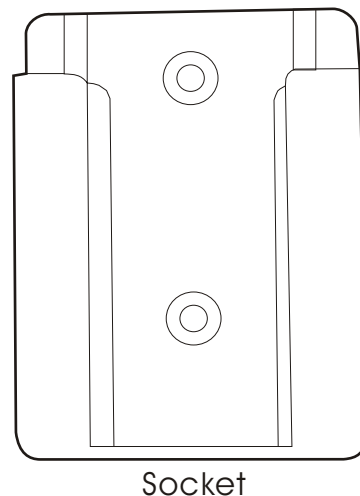



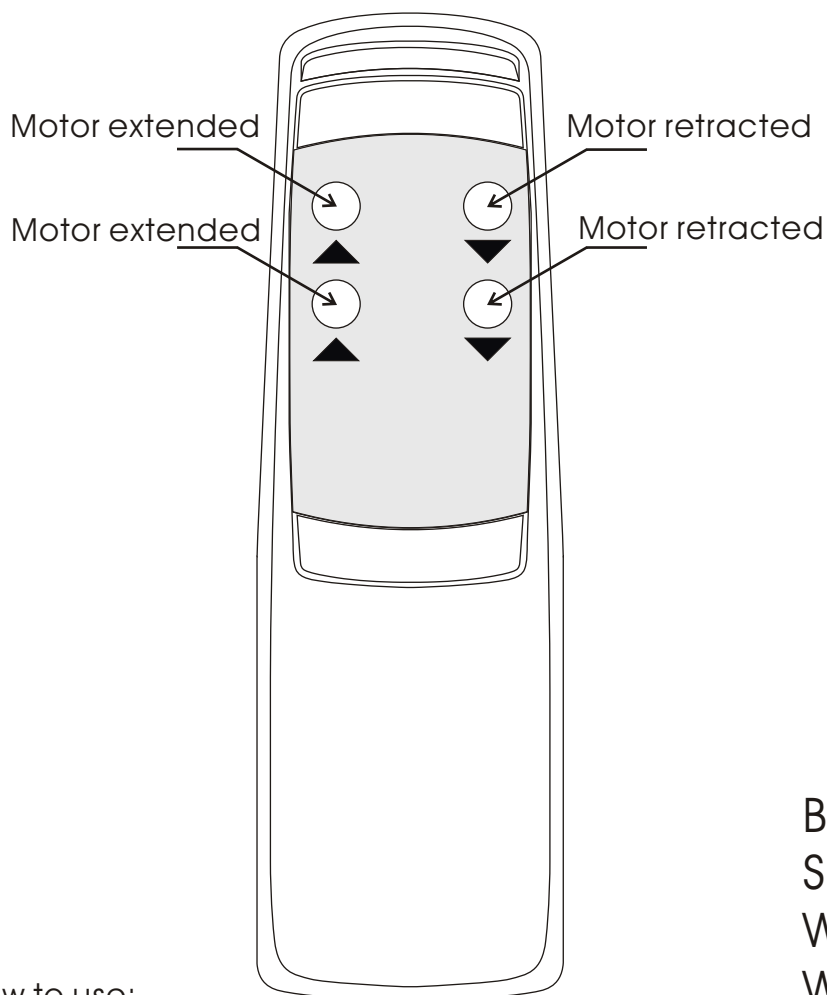

Battery: 2*AAA
 Standby current: < 10uA
 Working current: < 5MA
 Wireless distance: 15M

How to use:

- 1.Let the Receiver base enter connection mode;
- 2.Press the "Fc"key of remote;
- 3.When the Receiver base exit connection mode,you can use

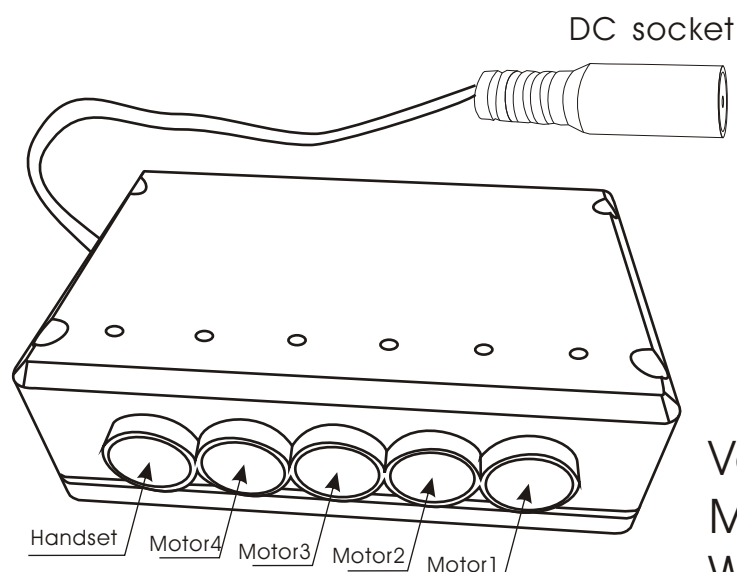

Voltage: DC12-29V
 Max Load:8A
 Wireless distance:15M

How to use:

- 1.Let the Receiver base enter connection mode(take the "DC socket" into AC adapter,it will enter 10s connection mode);
- 2.Press the "Fc"key of remote;
- 3.When the Receiver base exit connection mode,you can use

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To assure continued compliance, any changes or modifications not expressly approved by the party.

Responsible for compliance could void the user's authority to operate this equipment. (Example- use only shielded interface cables when connecting to computer or peripheral devices).

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.