




Test Plots:

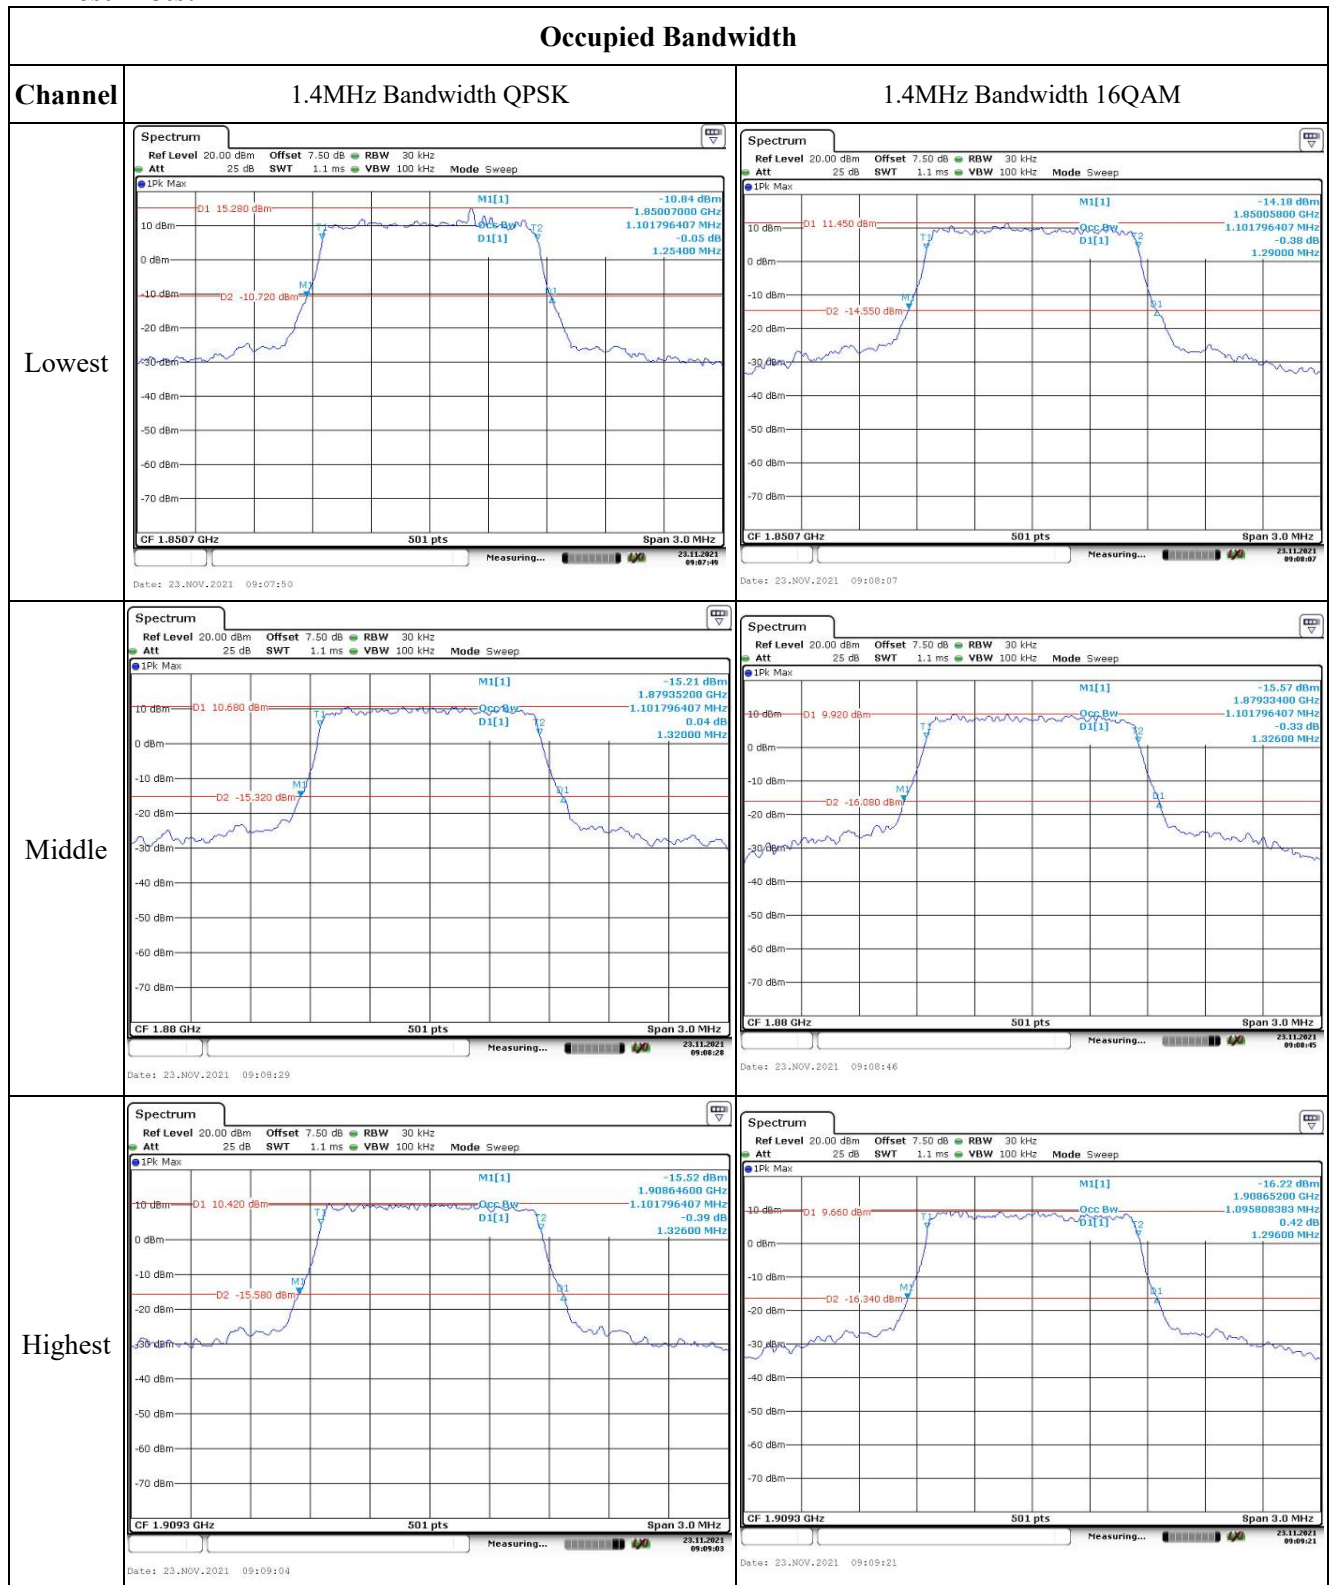


Occupied Bandwidth

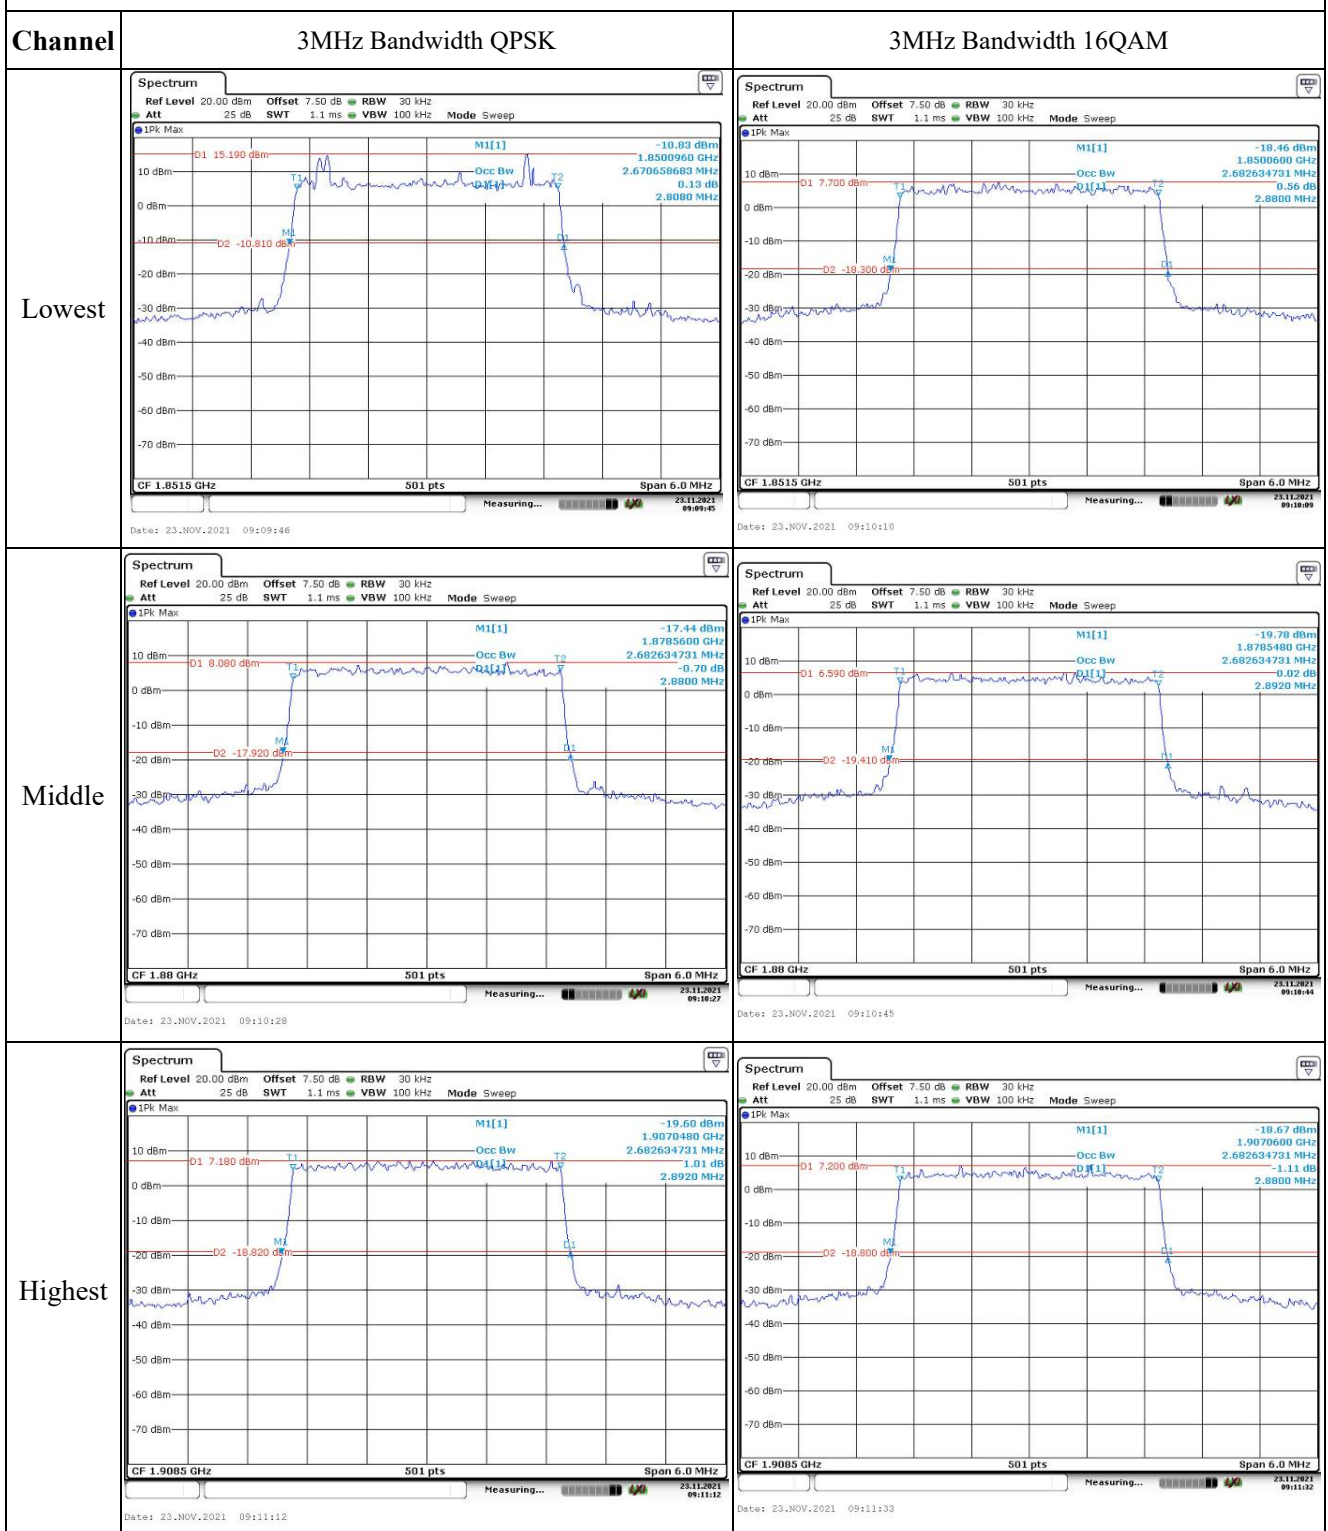


Occupied Bandwidth

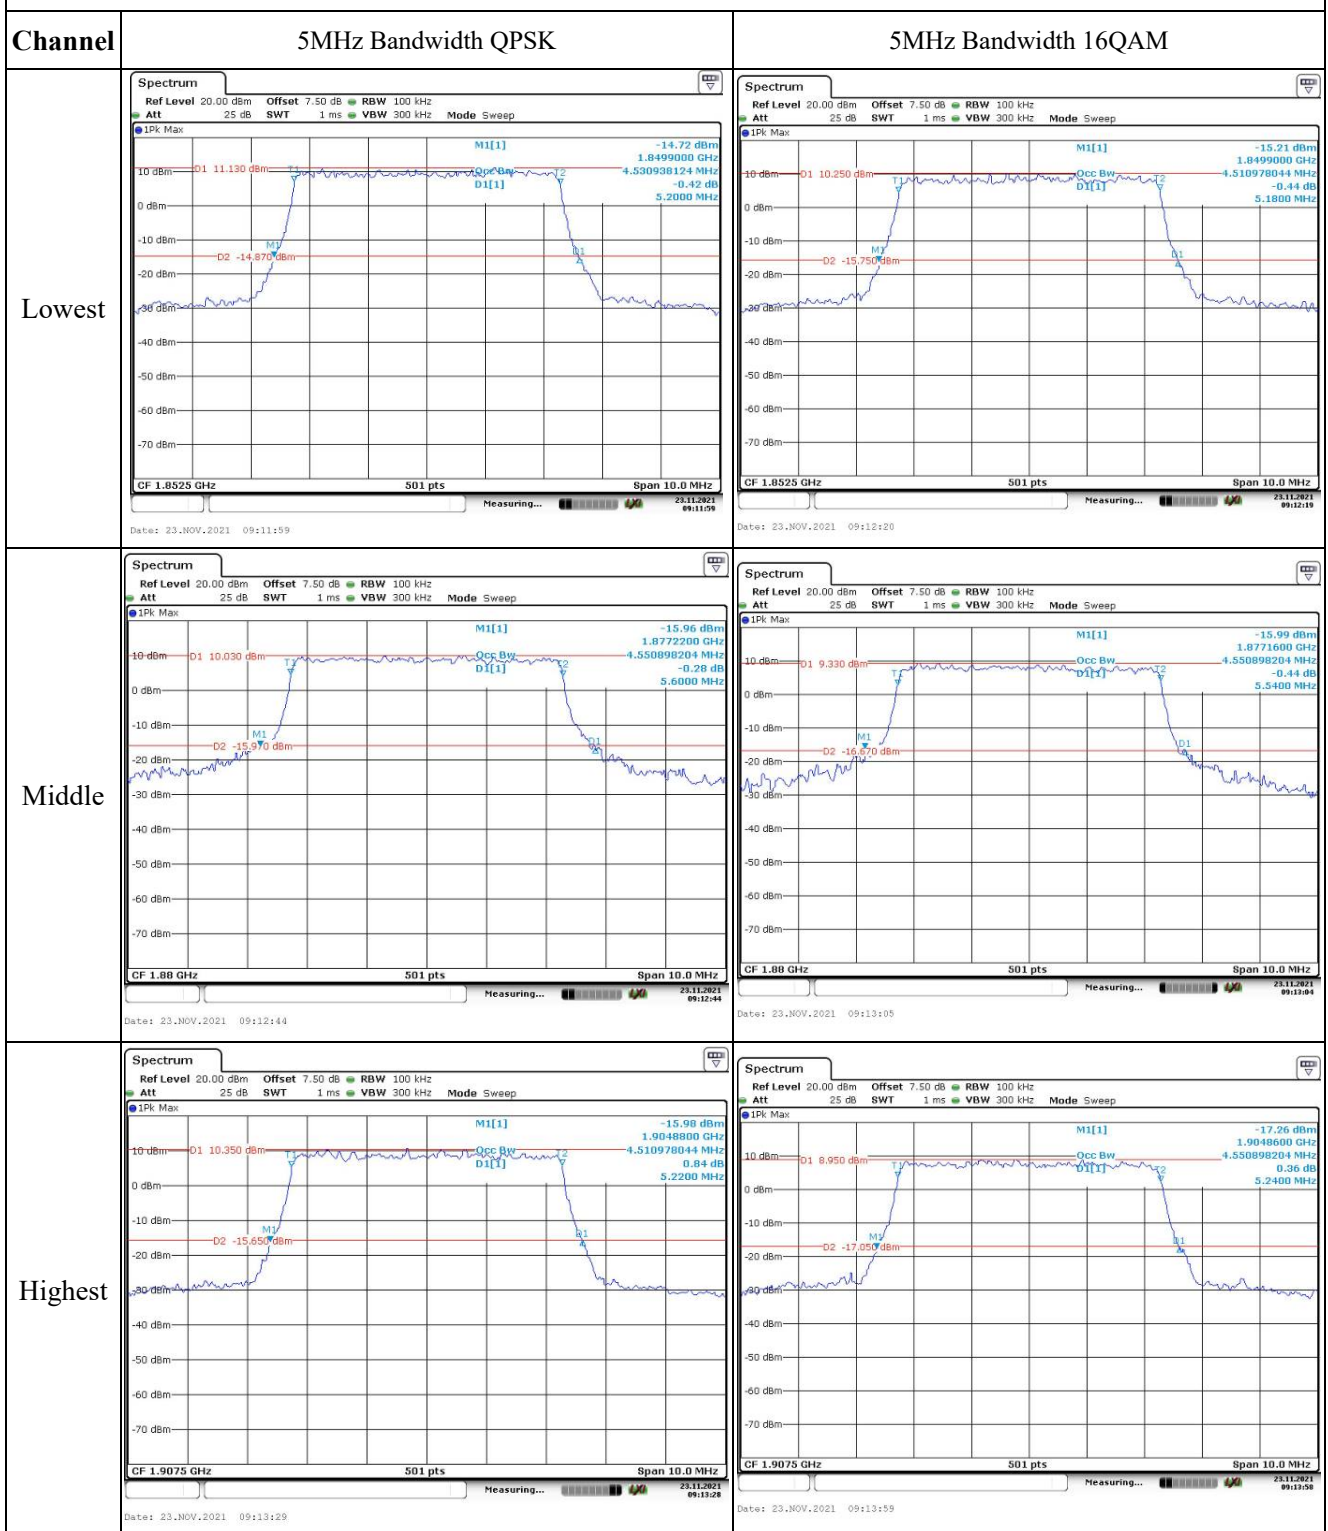


Occupied Bandwidth

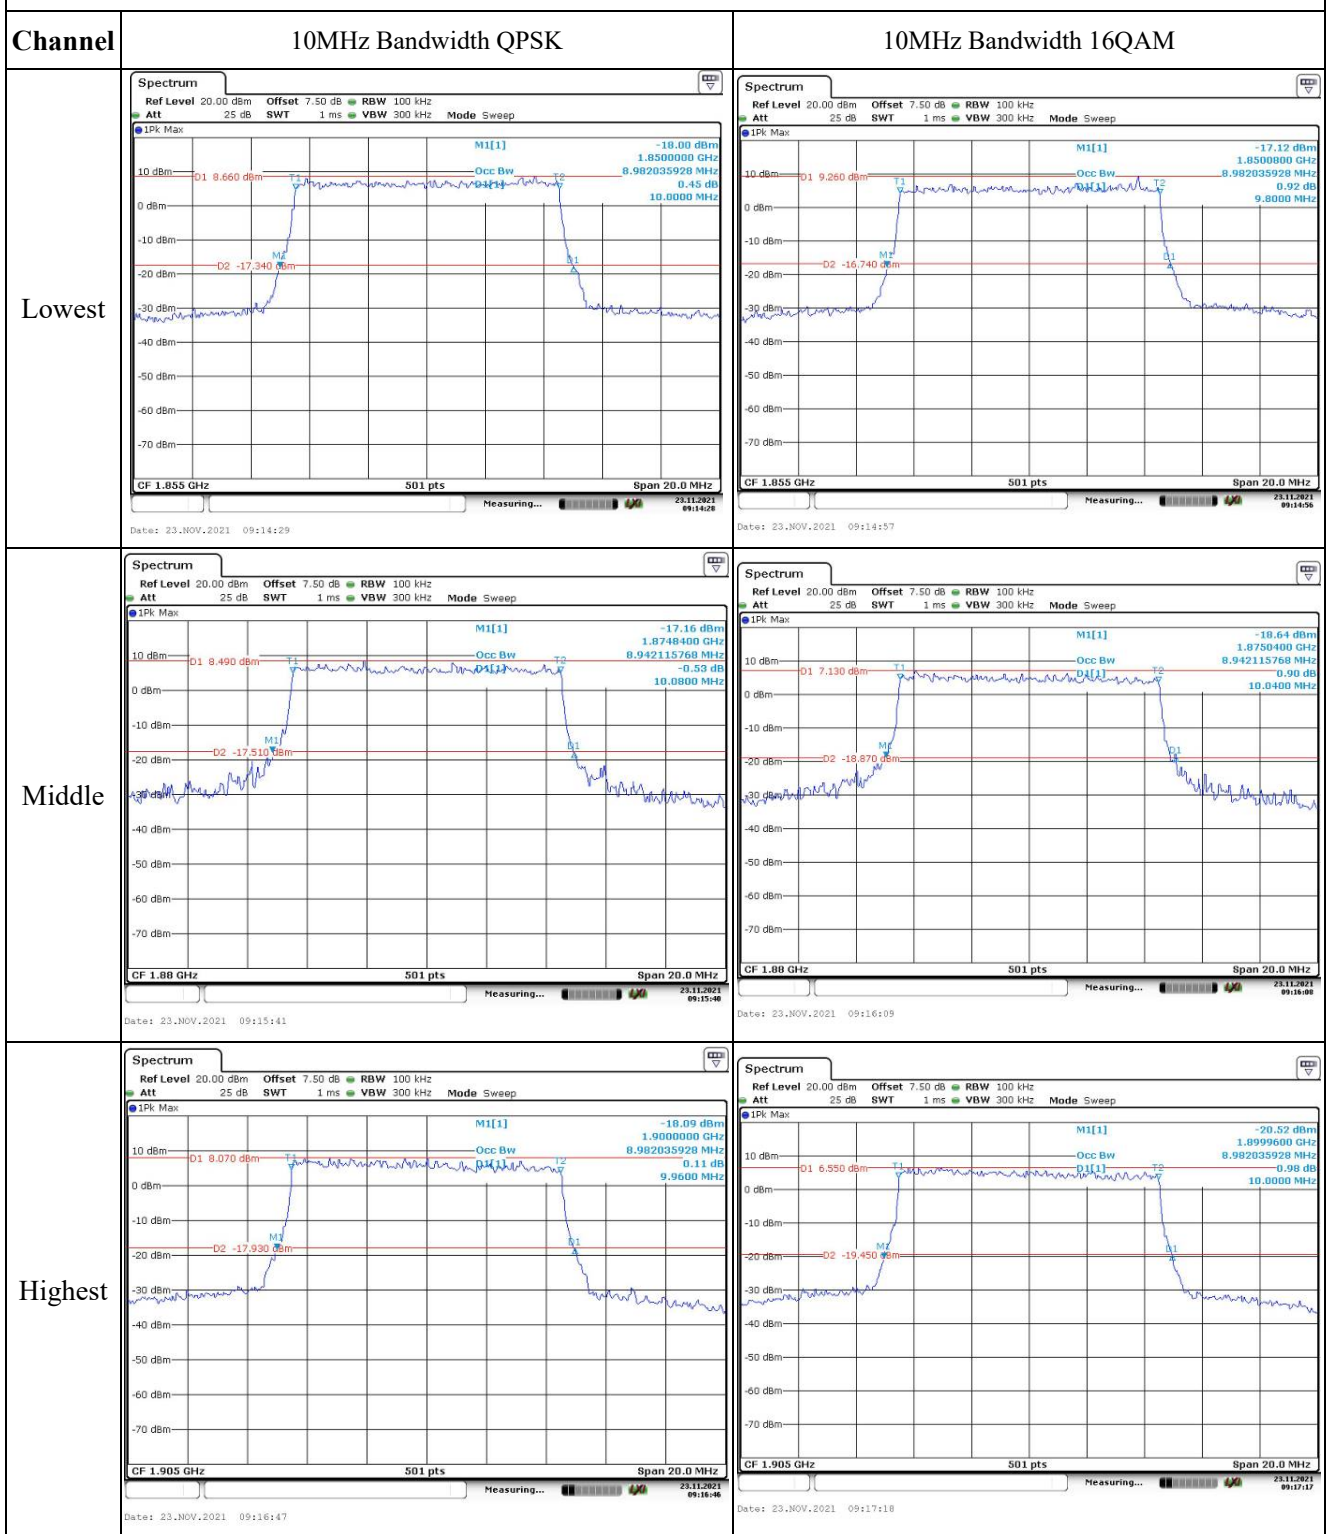

Occupied Bandwidth

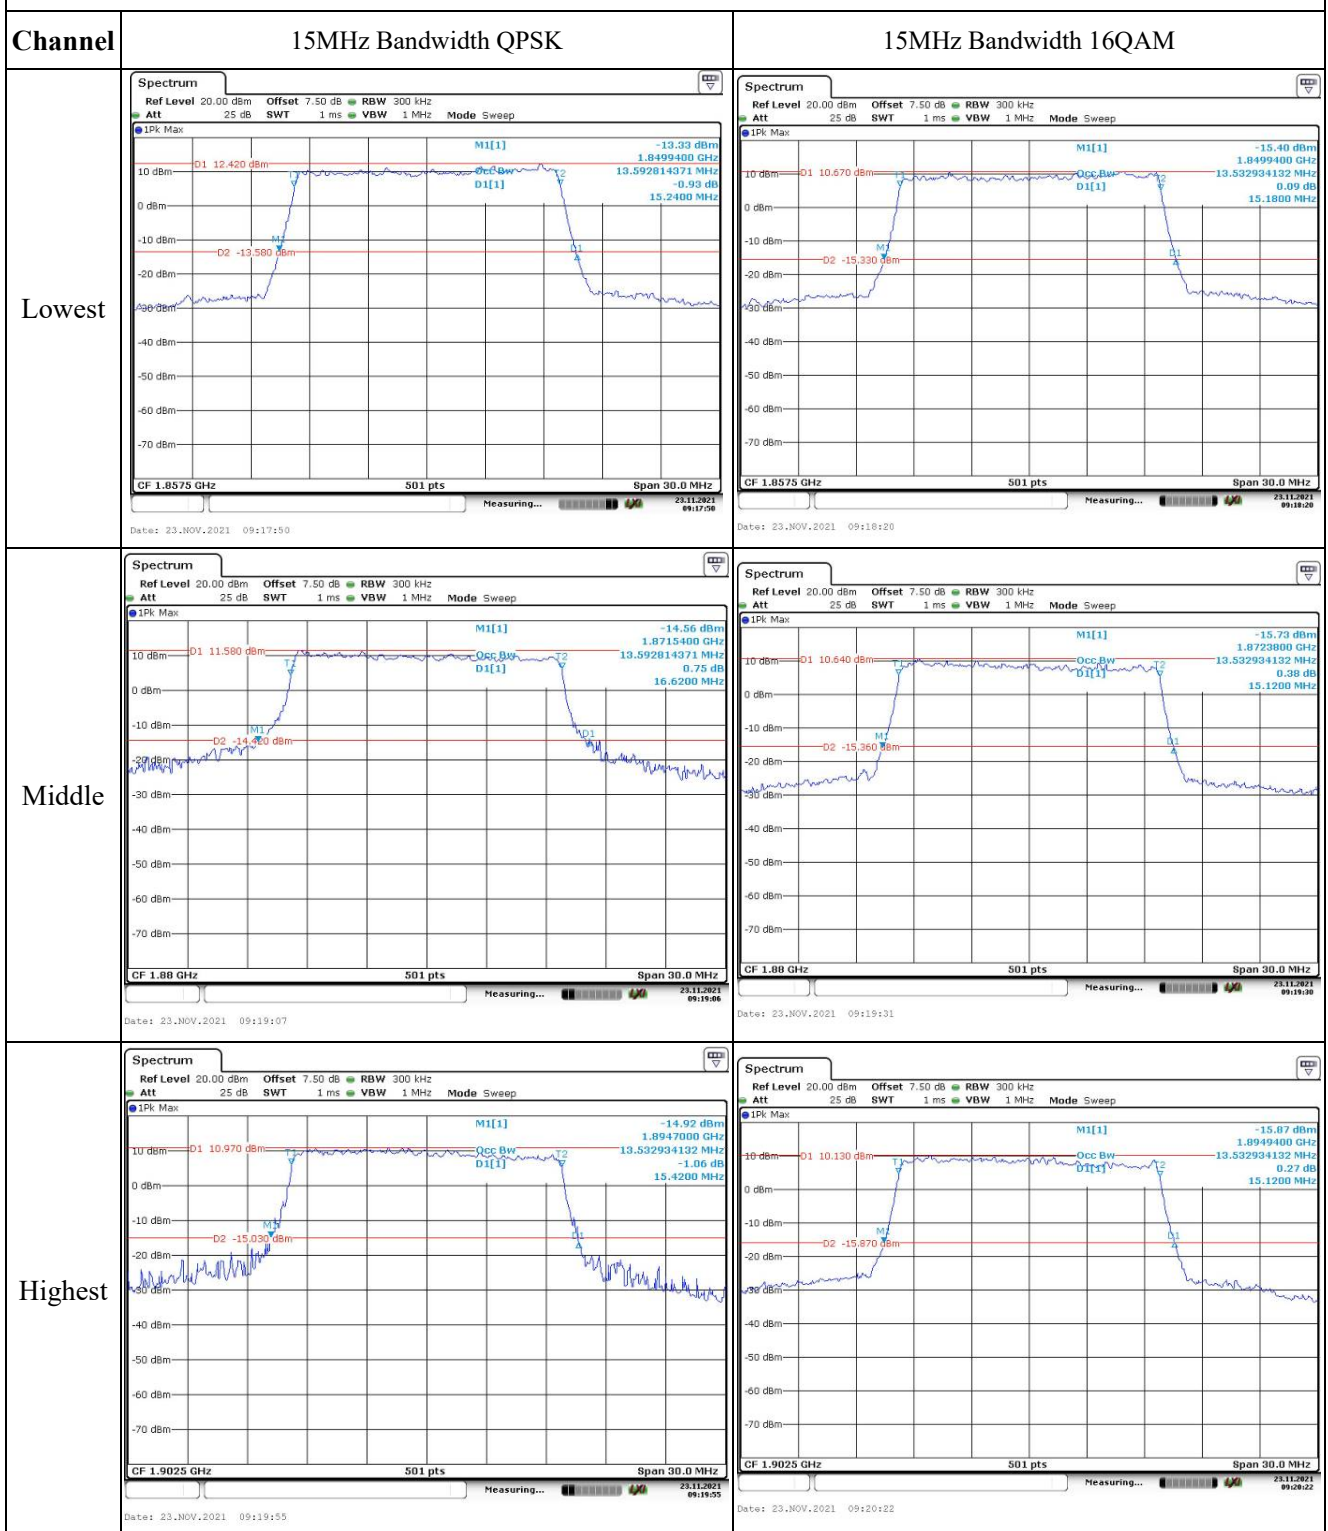

Occupied Bandwidth


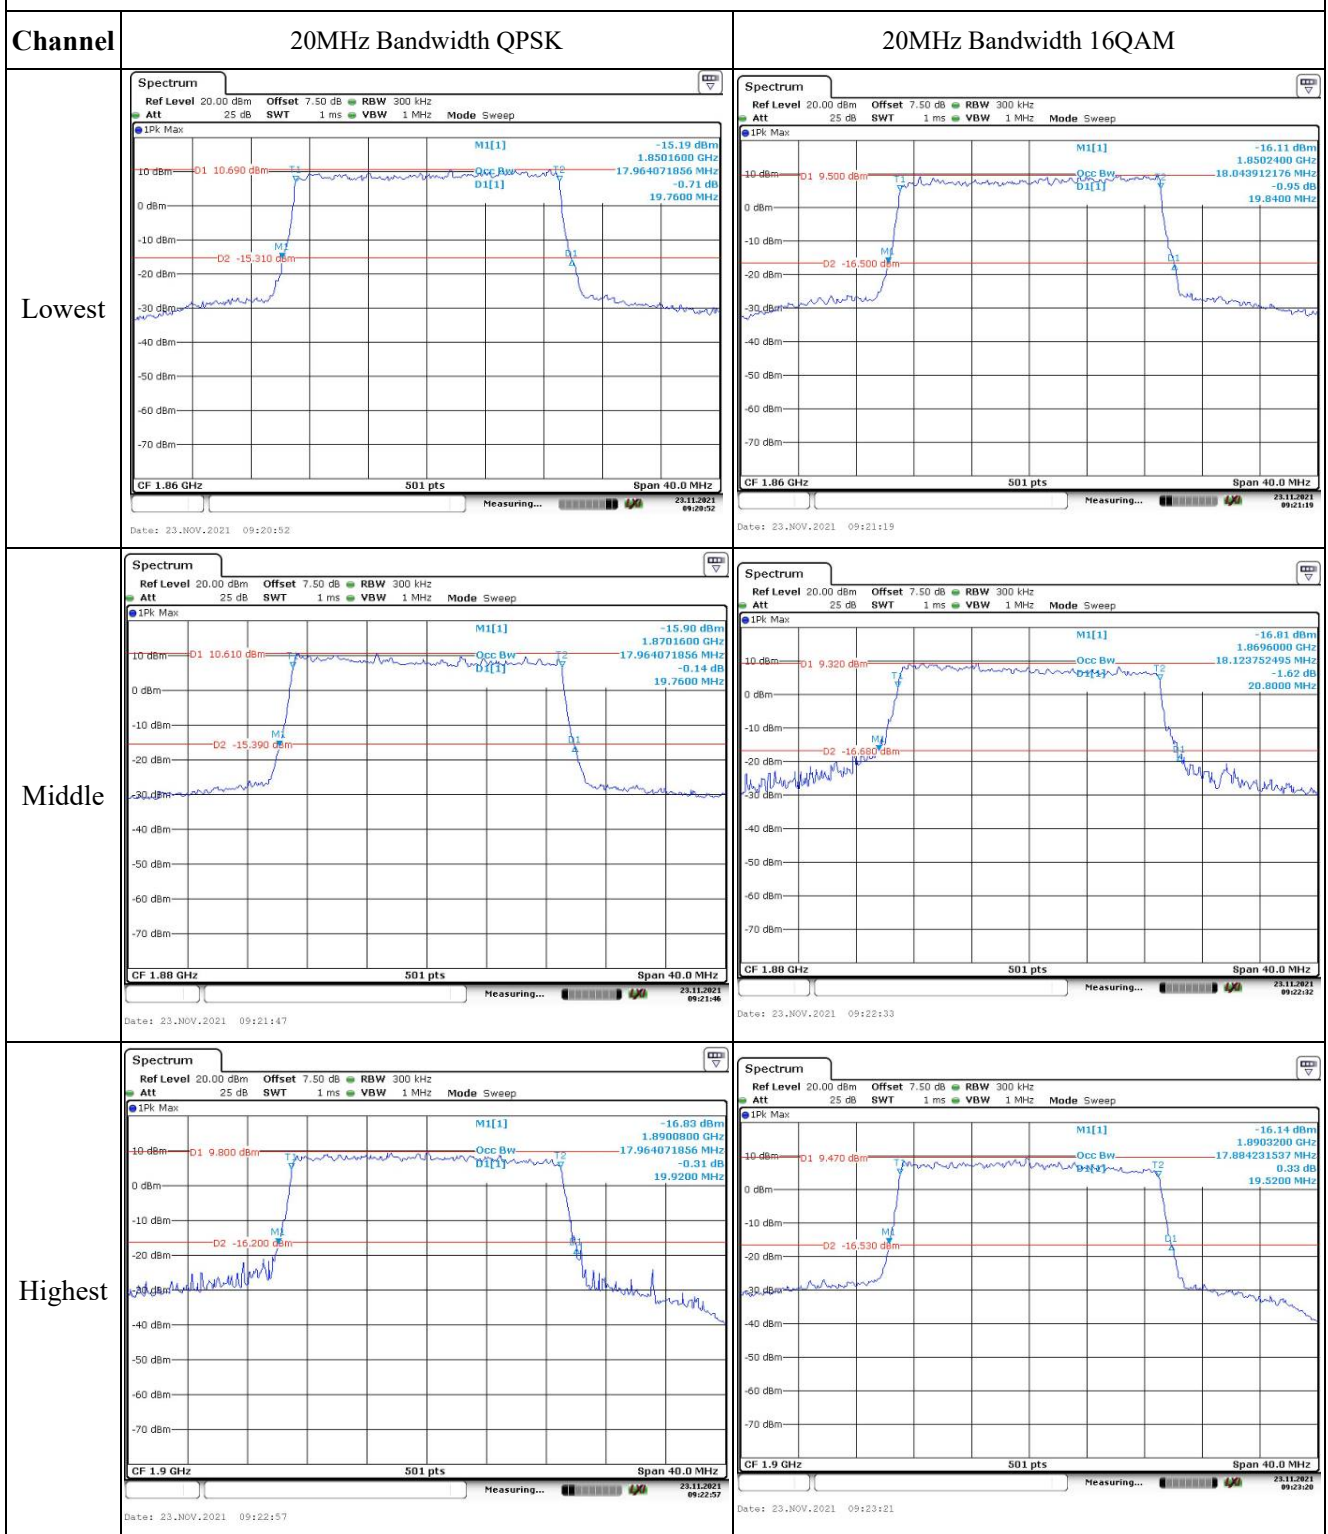


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

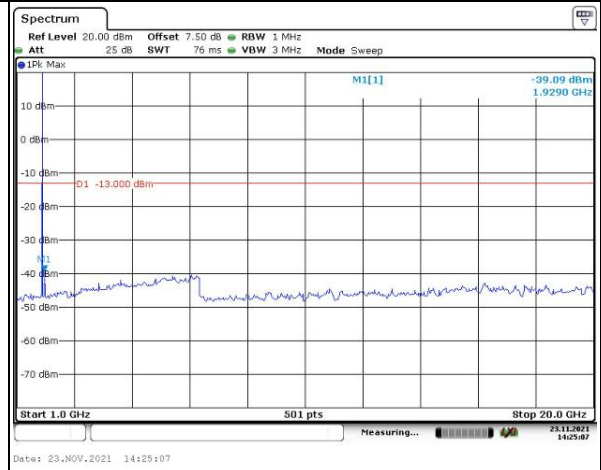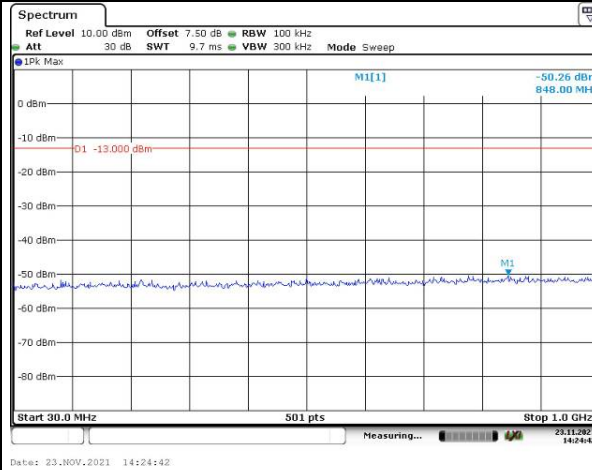


Middle

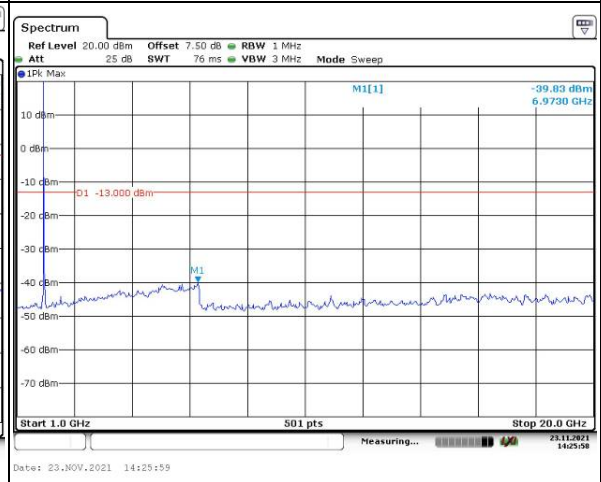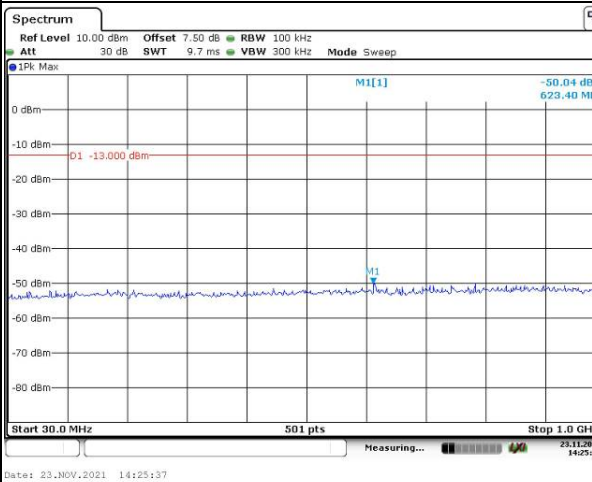

Highest

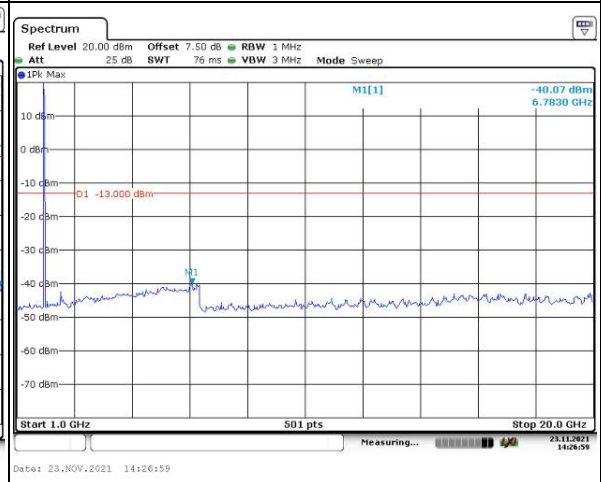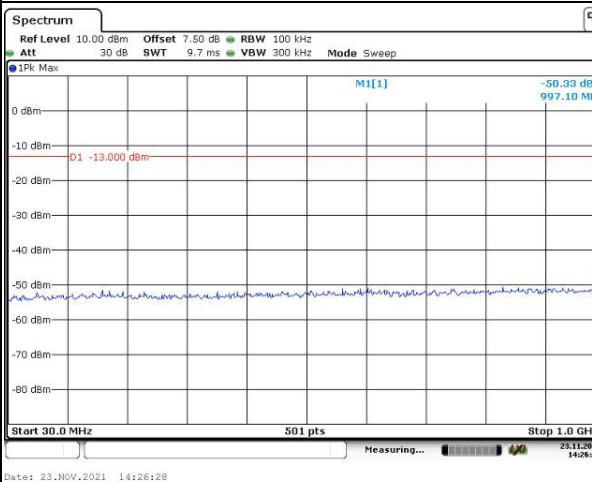

Spurious Emissions at Antenna Terminal


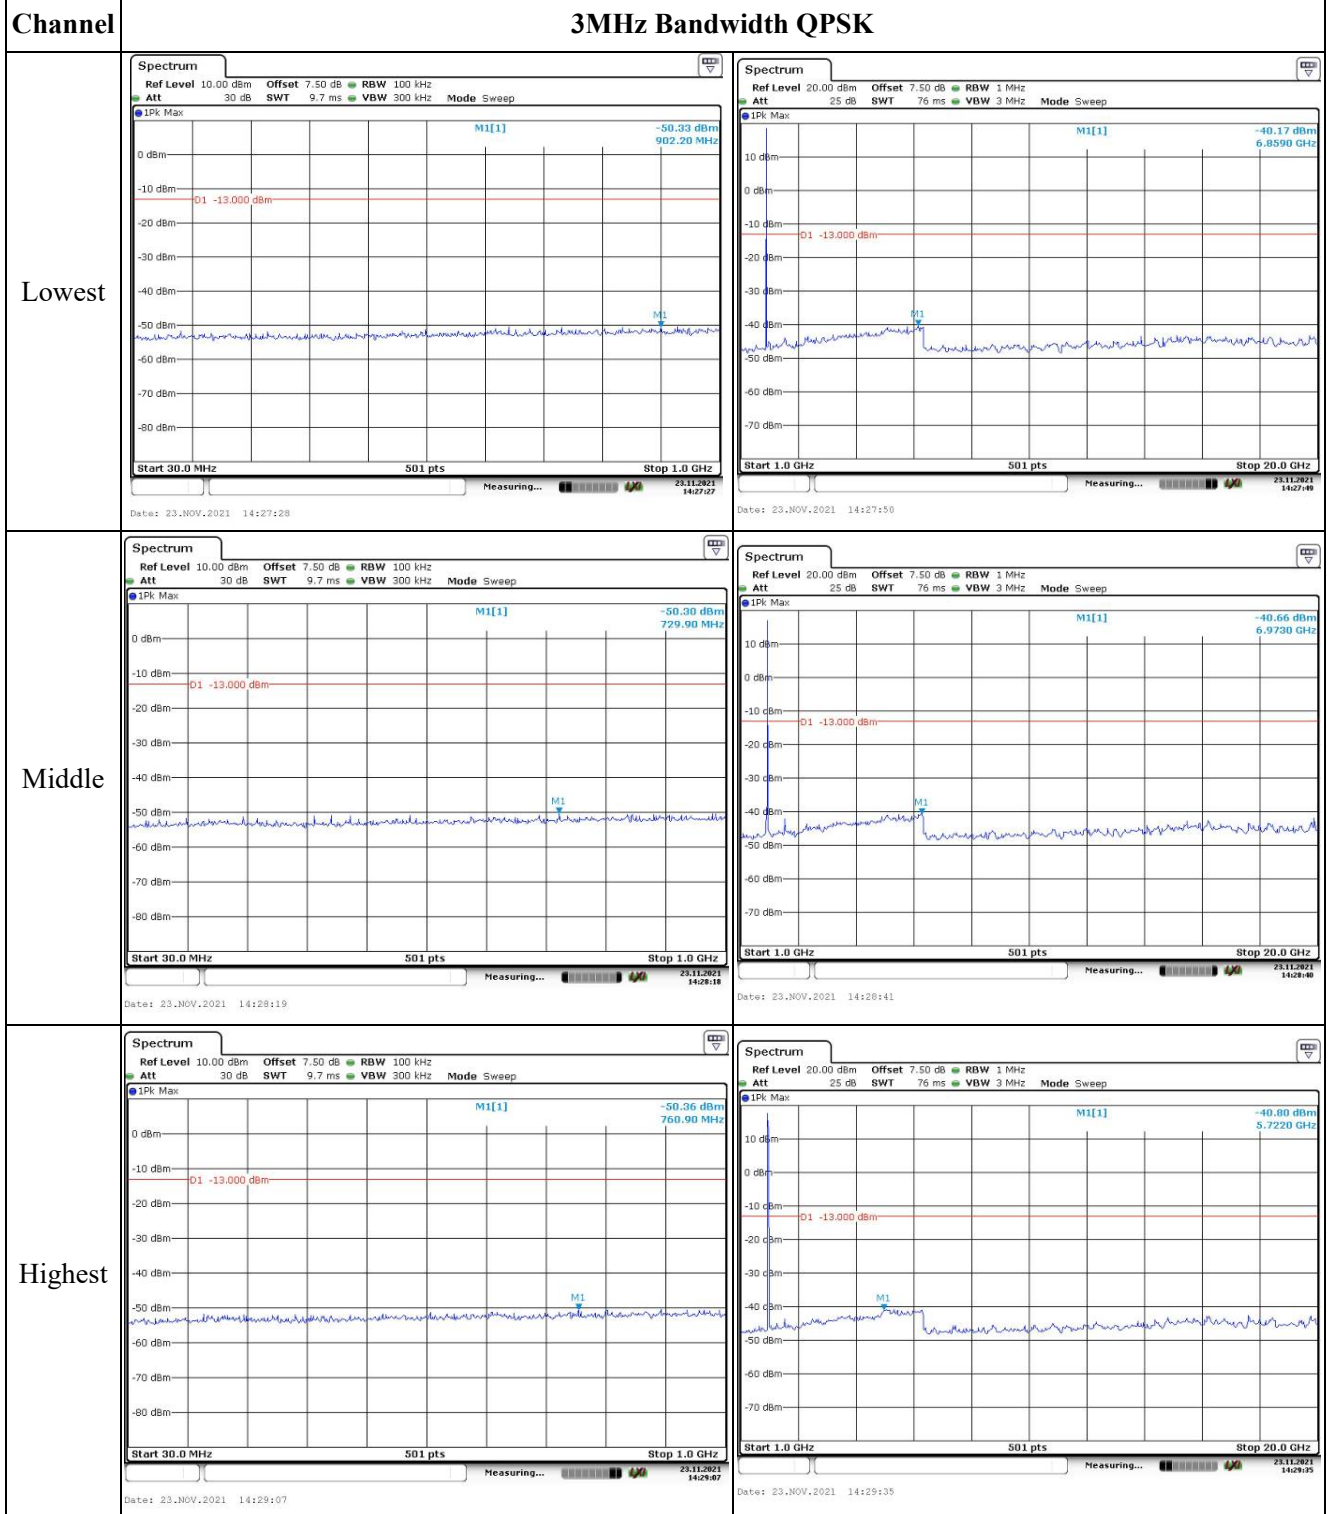


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

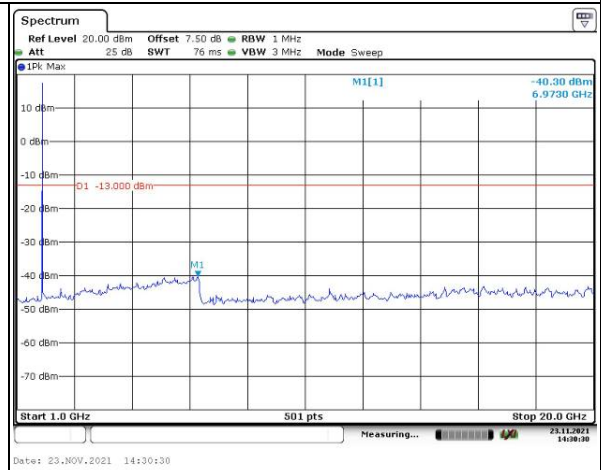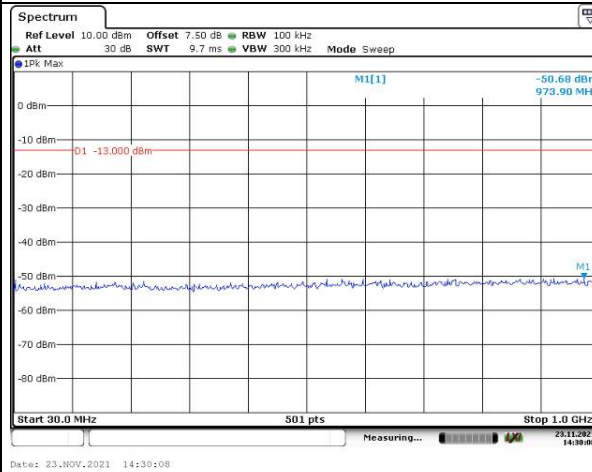


Middle

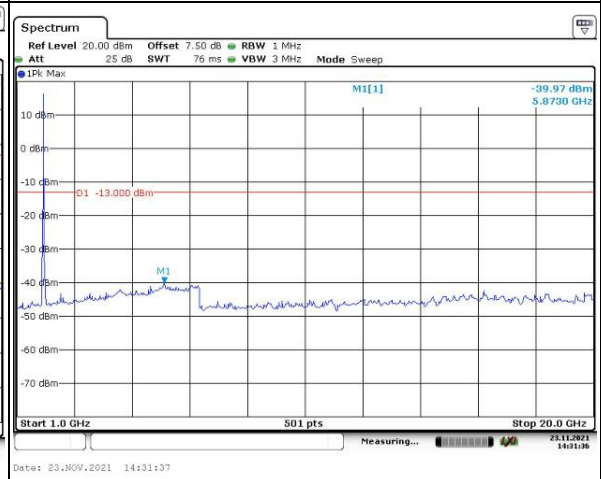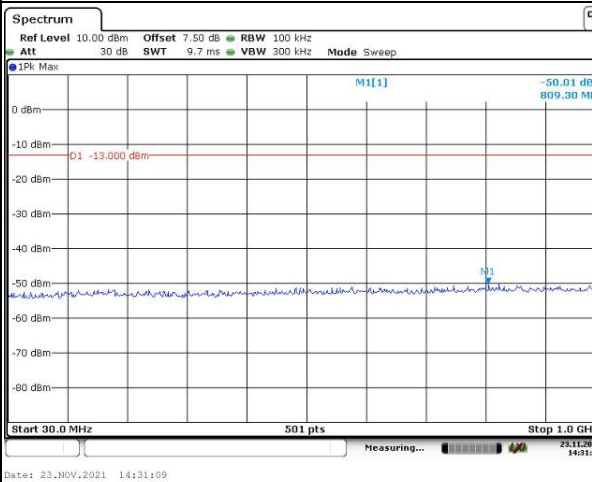

Highest

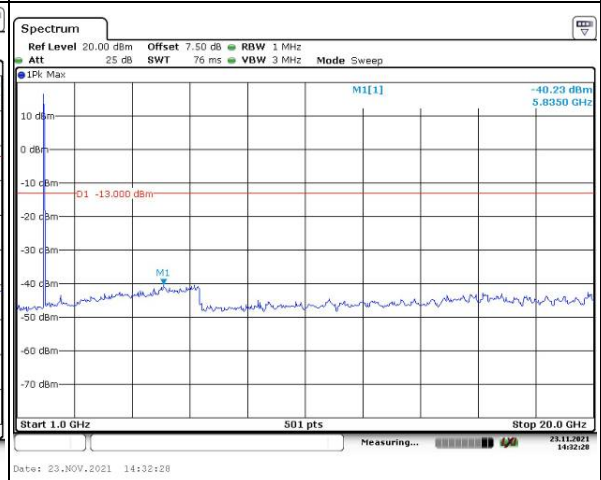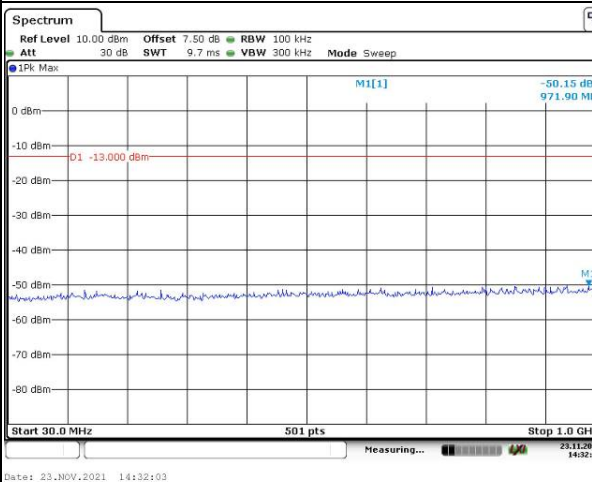

Spurious Emissions at Antenna Terminal


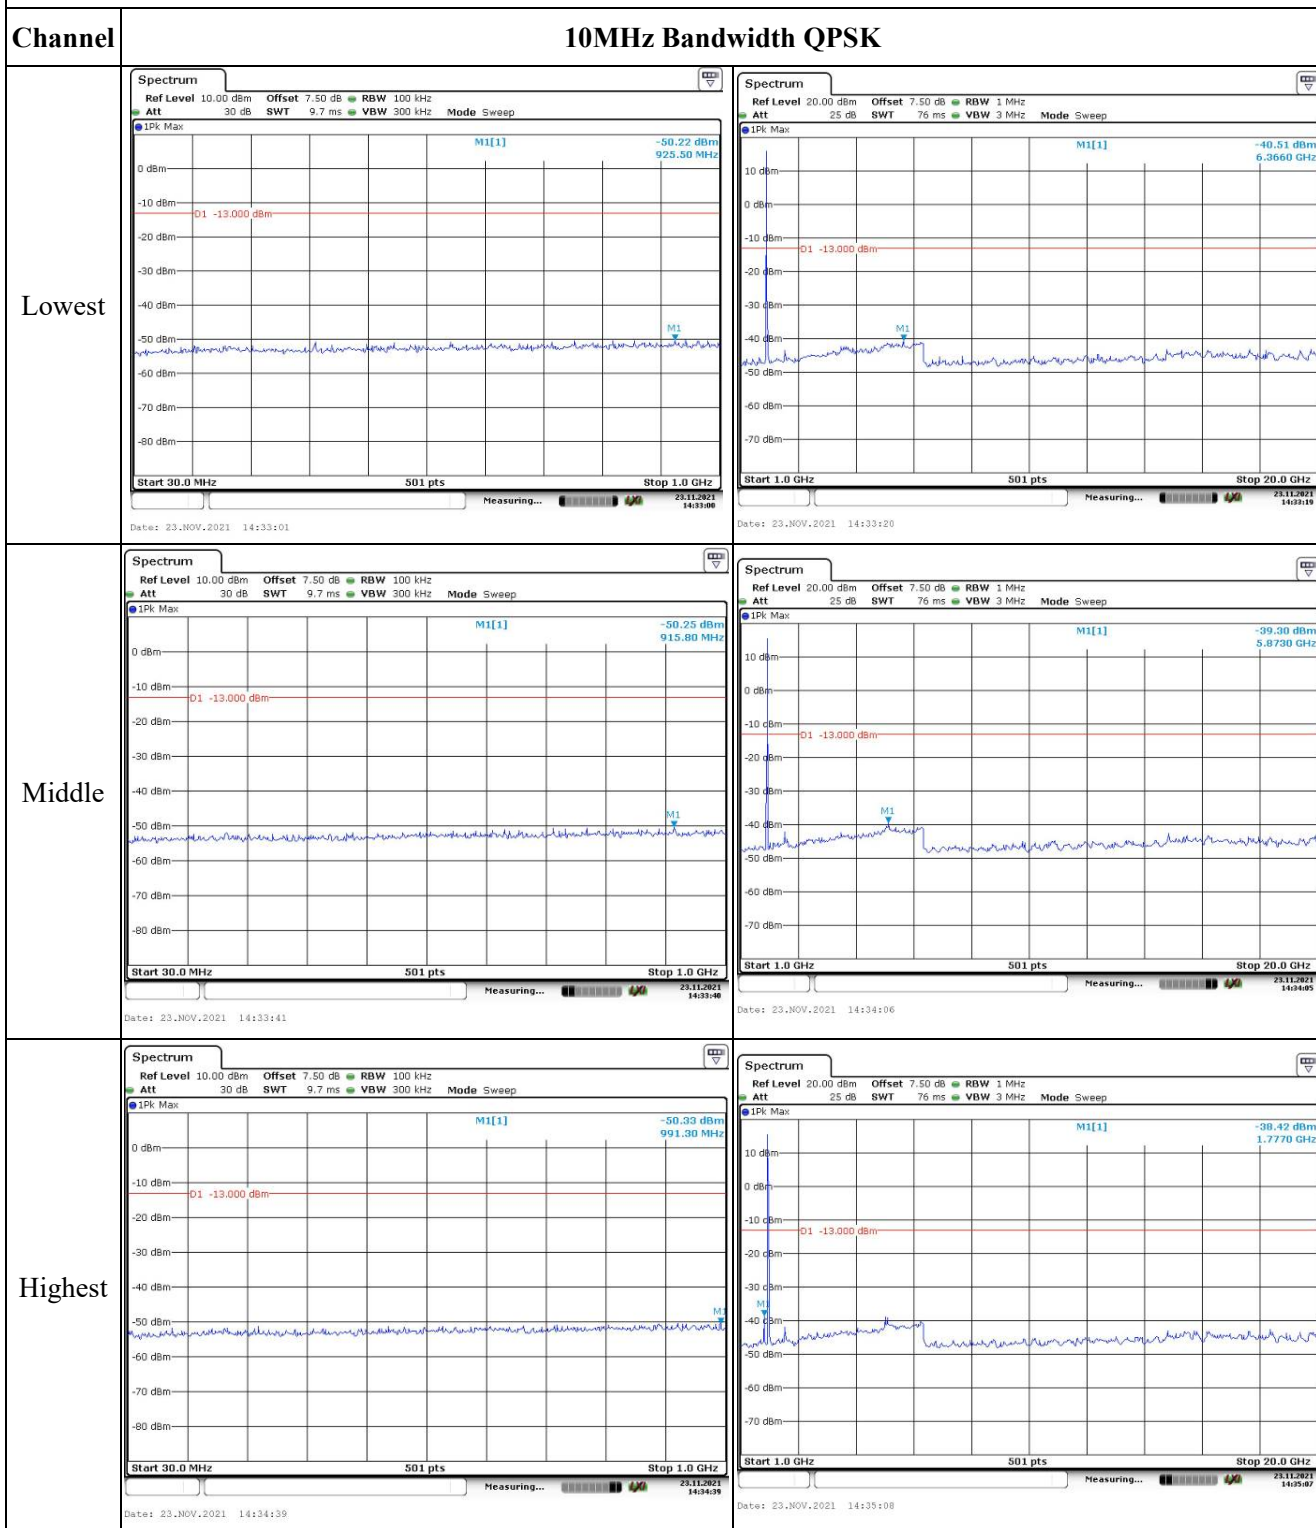


Spurious Emissions at Antenna Terminal



Channel

15MHz Bandwidth QPSK



Lowest

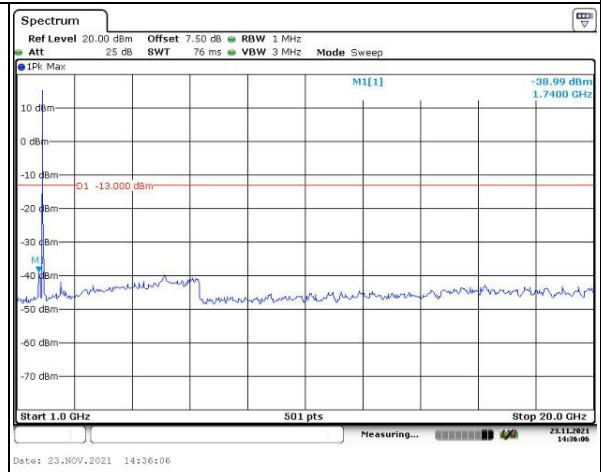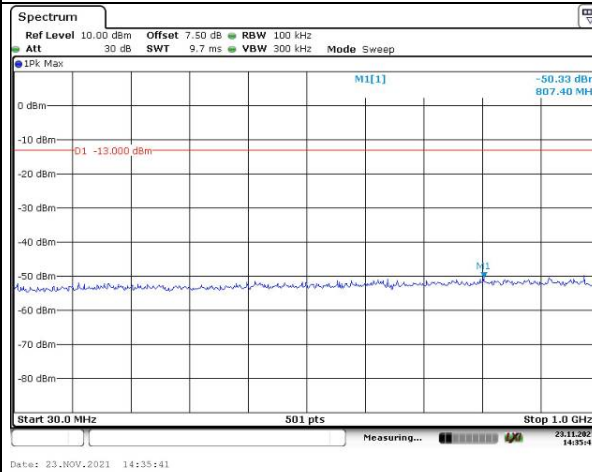


Middle

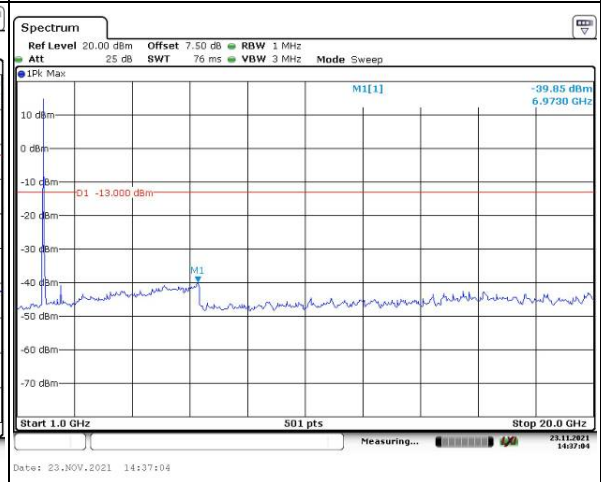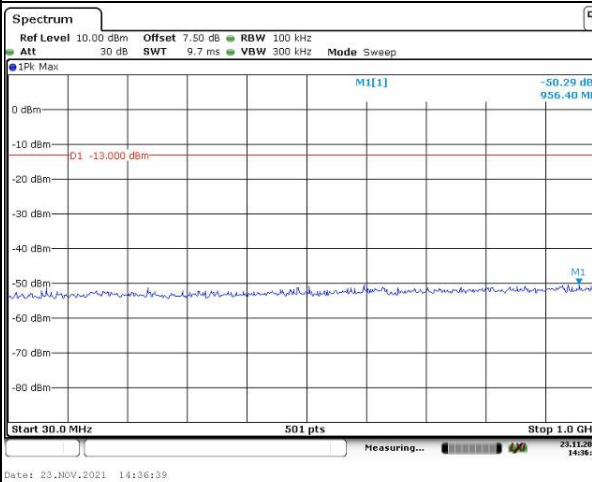


Highest

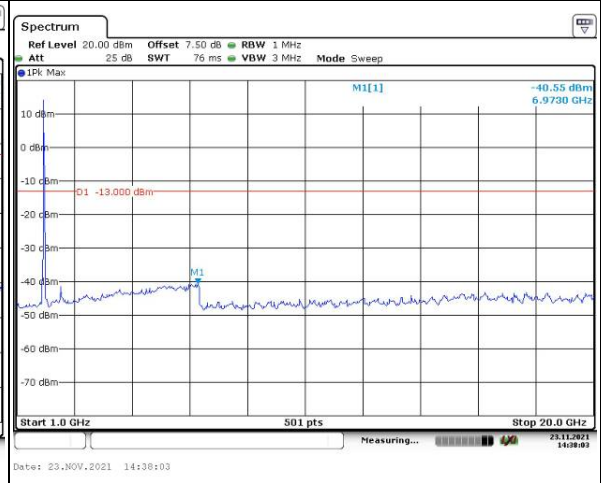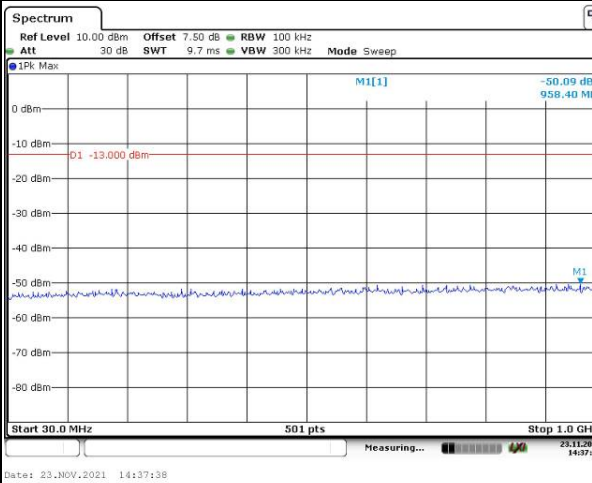


Spurious Emissions at Antenna Terminal

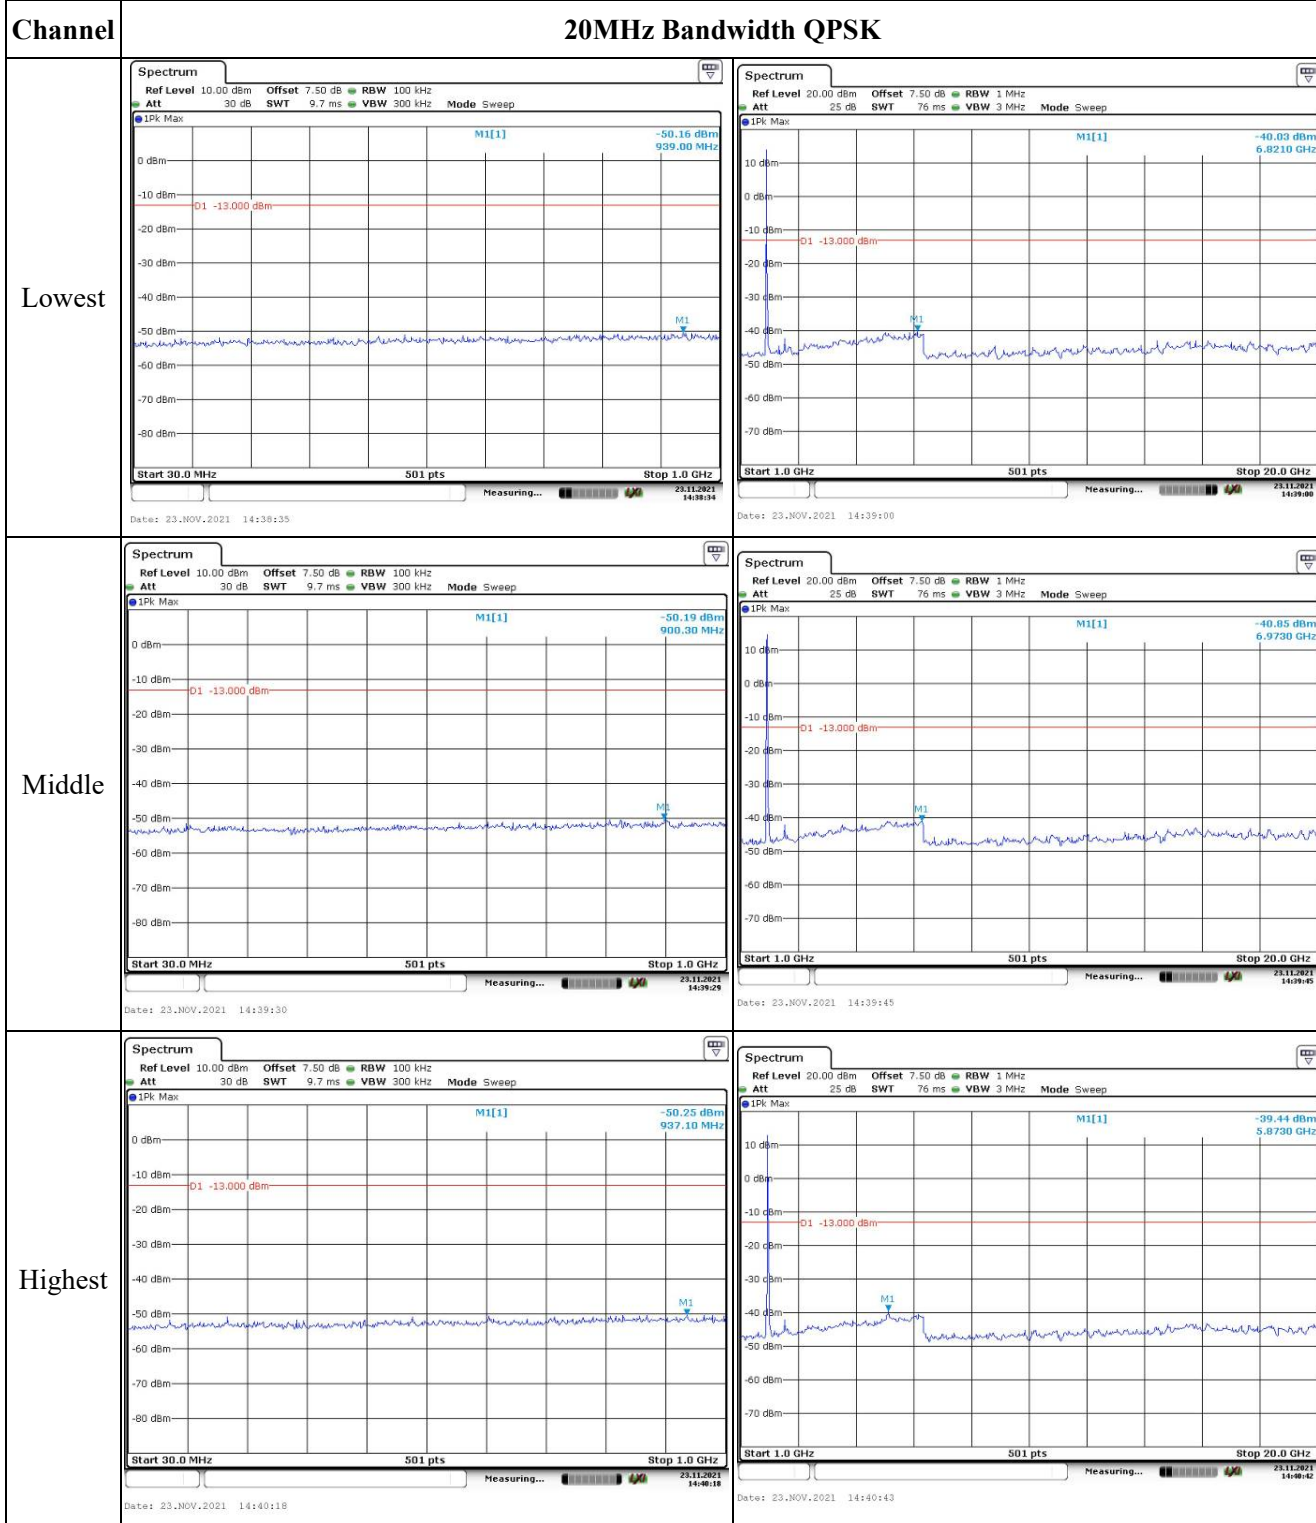


Out of band emission, Band Edge

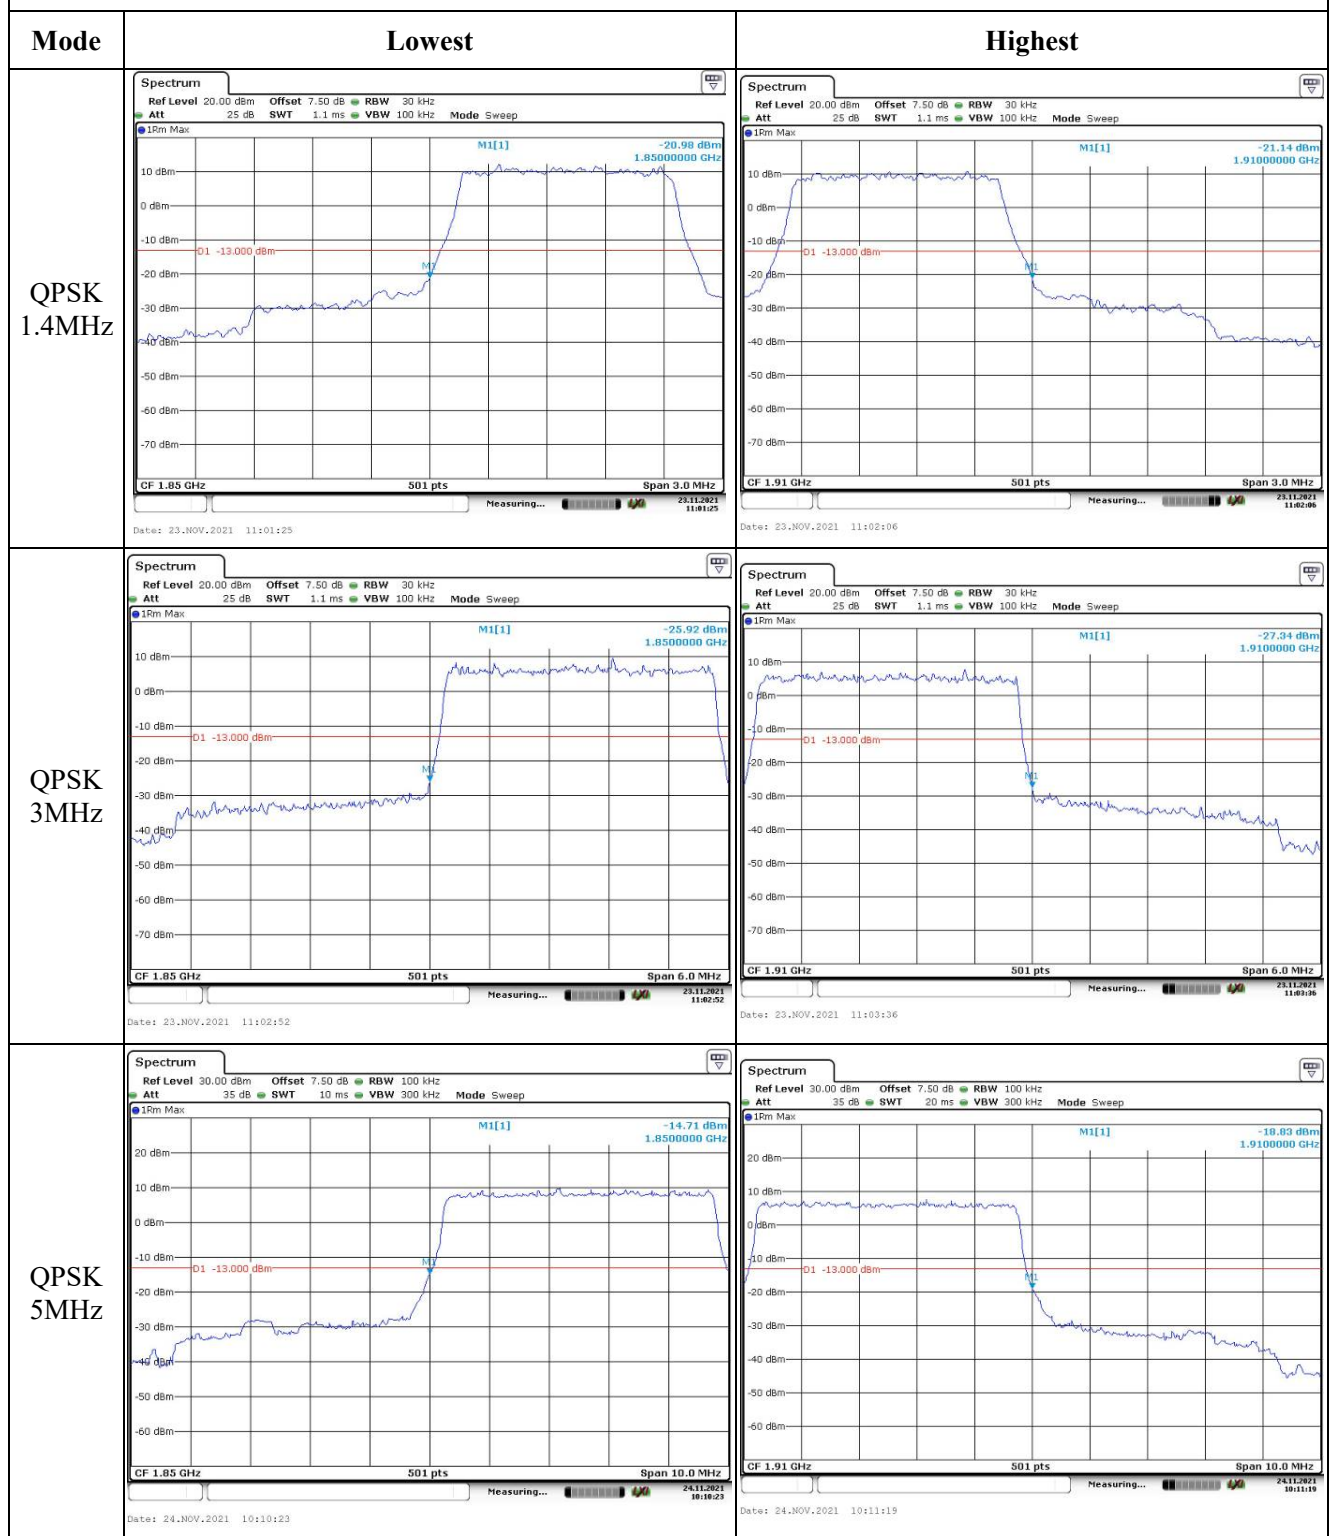


Out of band emission, Band Edge

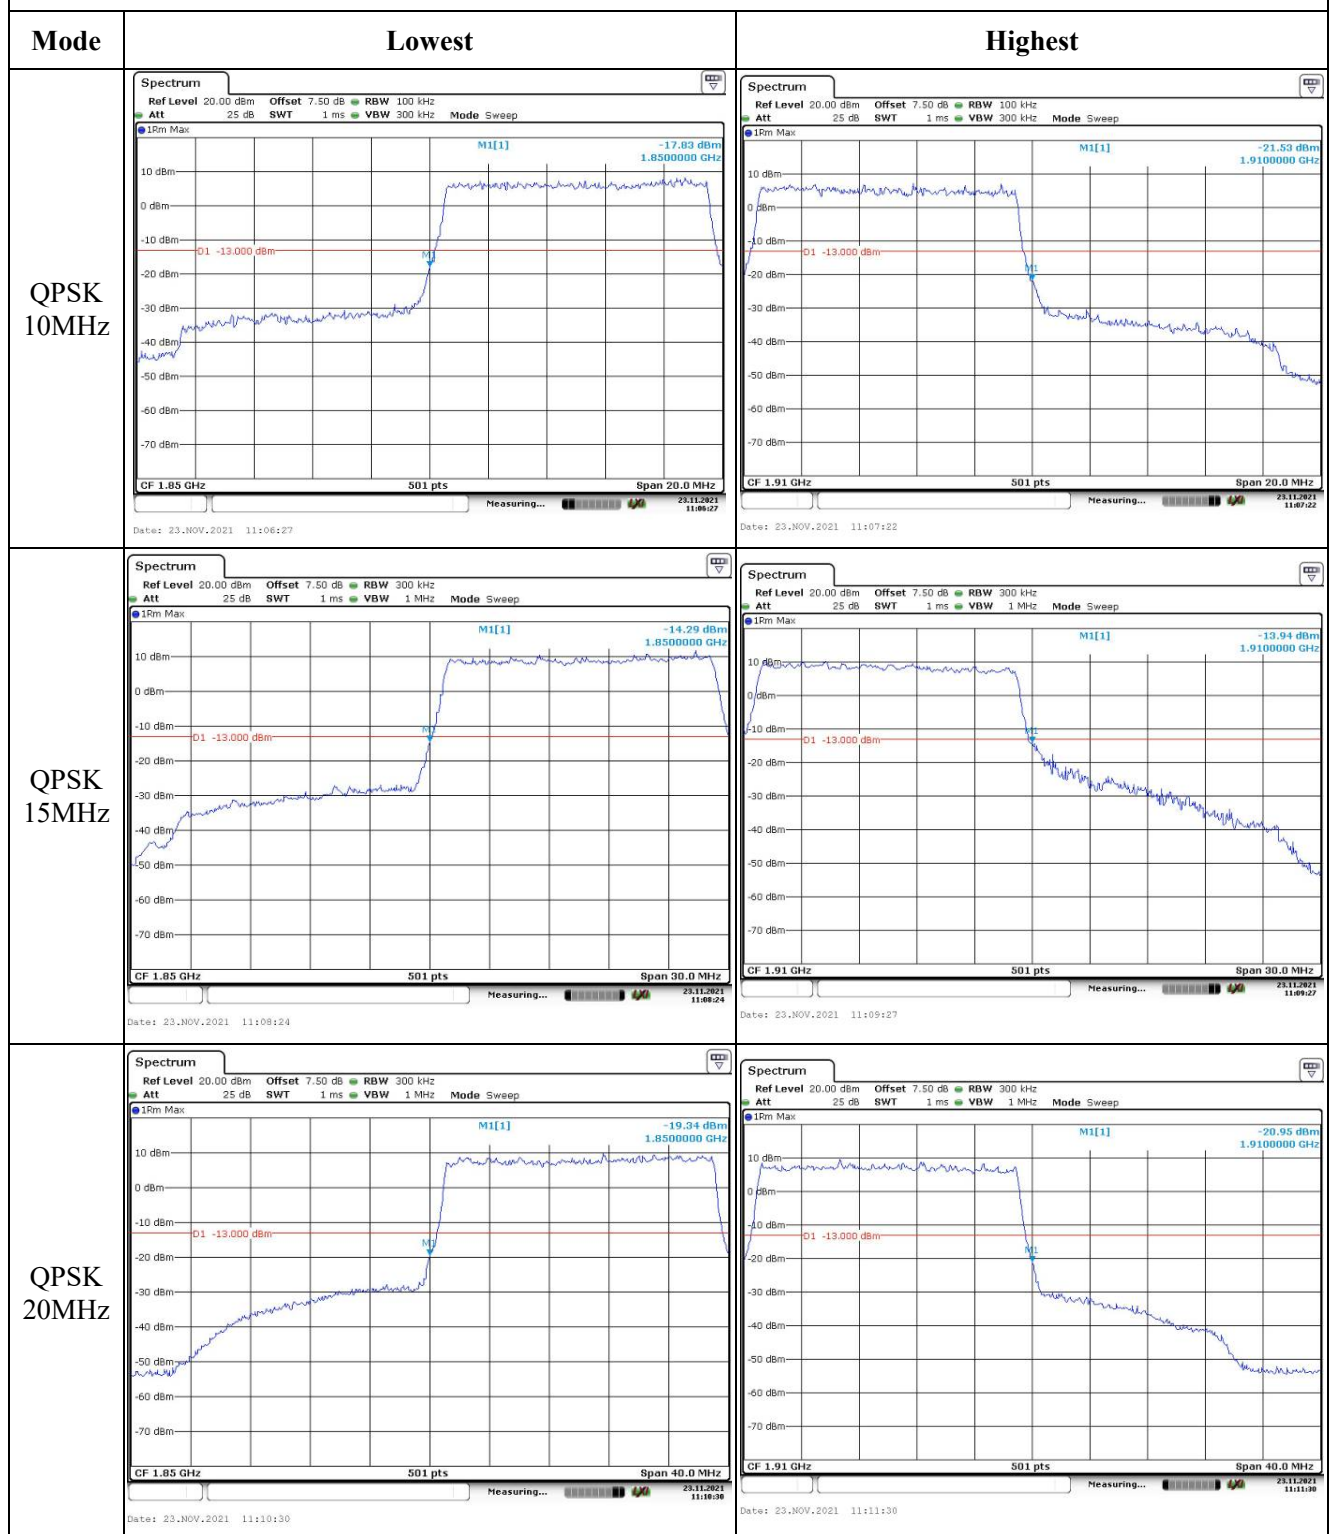

Out of band emission, Band Edge

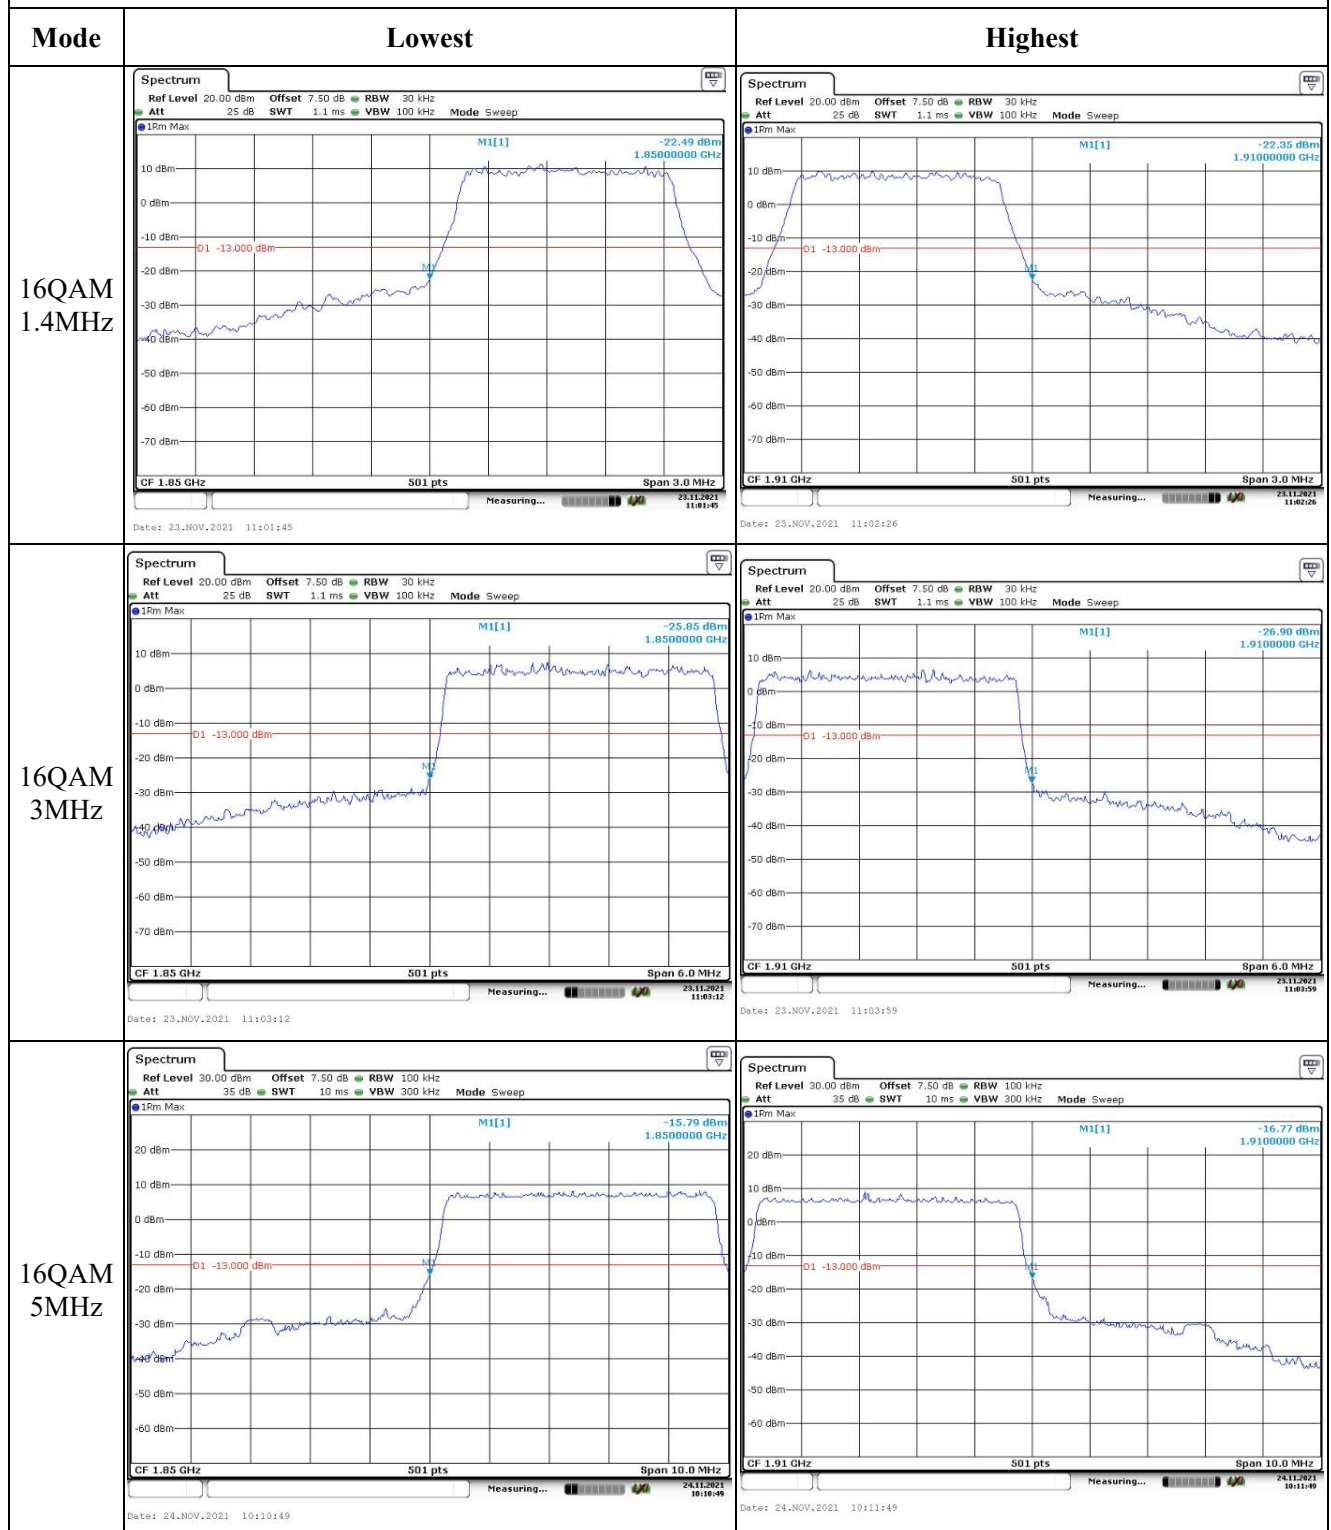

Out of band emission, Band Edge

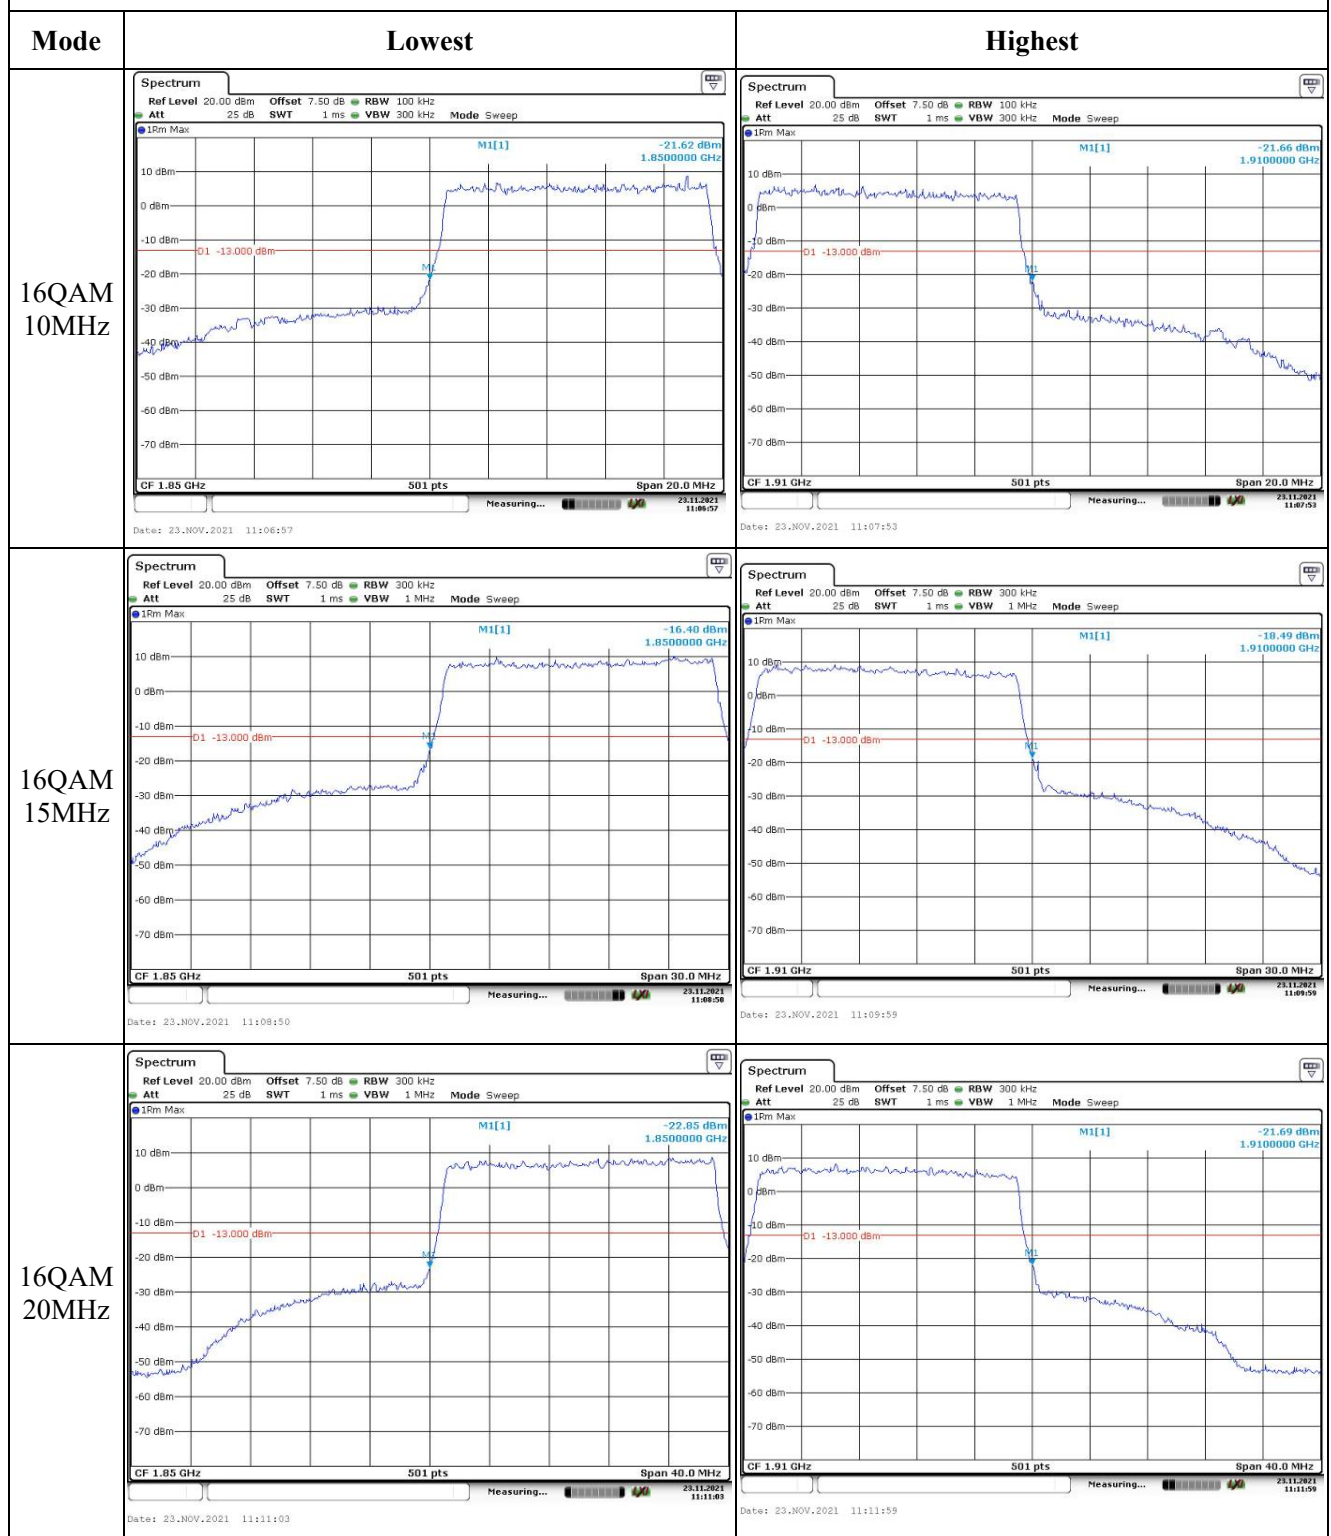

4.7 Antenna Port Test Data and Results for LTE Band 4

Serial Number:	CR21110011-RF-S1	Test Date:	2021-11-23~2021-11-24
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4~23.4	Relative Humidity: (%)	33~34	ATM Pressure: (kPa)	101.7
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D09	N/A	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ LTE Band 4▲:

Antenna Gain (dBi):	0.6	Cable Loss (dB):	0.4
Operation Voltage(V _{dc}):			
Lowest:	3.6	Normal:	3.85
		Highest:	4.35

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

Test Data:**FCC§2.1046;§ 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	18.68	18.63	18.67	19.1	30
	RB1#3	18.87	18.81	18.90		
	RB1#5	18.67	18.66	18.68		
	RB3#0	18.75	18.66	18.69		
	RB3#3	18.73	18.63	18.73		
	RB6#0	17.77	17.72	17.76		
1.4MHz 16QAM	RB1#0	17.66	17.68	17.66	18.96	30
	RB1#3	17.82	17.90	17.77		
	RB1#5	17.64	17.72	17.65		
	RB3#0	17.85	17.63	17.79		
	RB3#3	17.84	17.67	17.74		
	RB6#0	18.76	18.72	18.71		
3MHz QPSK	RB1#0	18.73	18.68	18.74	18.94	30
	RB1#8	18.62	18.66	18.73		
	RB1#14	18.67	18.65	18.73		
	RB6#0	17.67	17.63	17.70		
	RB6#9	17.66	17.63	17.69		
	RB15#0	17.67	17.63	17.70		
3MHz 16QAM	RB1#0	18.21	17.77	17.70	18.95	30
	RB1#8	18.17	17.75	17.65		
	RB1#14	18.18	17.77	17.69		
	RB6#0	18.75	18.70	18.69		
	RB6#9	18.73	18.69	18.67		
	RB15#0	18.70	18.61	18.75		
5MHz QPSK	RB1#0	18.68	18.66	18.66	18.95	30
	RB1#13	18.75	18.70	18.72		
	RB1#24	18.65	18.66	18.68		
	RB15#0	17.61	17.65	17.68		
	RB15#10	17.67	17.65	17.71		
	RB25#0	17.62	17.63	17.66		
5MHz 16QAM	RB1#0	17.51	17.88	17.73	18.13	30
	RB1#13	17.59	17.93	17.76		
	RB1#24	17.52	17.87	17.70		
	RB15#0	17.66	17.64	17.70		
	RB15#10	17.73	17.65	17.72		
	RB25#0	17.67	17.63	17.68		
10MHz QPSK	RB1#0	18.69	18.66	18.70	19.02	30

	RB1#25	18.80	18.81	18.82		
	RB1#49	18.68	18.64	18.72		
	RB25#0	17.62	17.68	17.62		
	RB25#25	17.61	17.67	17.73		
	RB50#0	17.59	17.69	17.66		
10MHz 16QAM	RB1#0	18.20	17.75	17.66	18.54	30
	RB1#25	18.34	17.94	17.83		
	RB1#49	18.23	17.71	17.65		
	RB25#0	17.68	17.72	17.69		
	RB25#25	17.65	17.66	17.82		
	RB50#0	17.63	17.70	17.70		
15MHz QPSK	RB1#0	18.64	18.63	18.62	18.94	30
	RB1#38	18.68	18.72	18.74		
	RB1#74	18.63	18.67	18.69		
	RB36#0	17.67	17.72	17.68		
	RB36#39	17.68	17.72	17.79		
	RB75#0	17.67	17.71	17.76		
15MHz 16QAM	RB1#0	18.14	17.74	18.00	18.42	30
	RB1#38	18.22	17.83	18.05		
	RB1#74	18.20	17.72	18.01		
	RB36#0	17.72	17.76	17.69		
	RB36#39	17.71	17.78	17.75		
	RB75#0	17.67	17.74	17.71		
20MHz QPSK	RB1#0	18.49	18.52	18.39	19.09	30
	RB1#50	18.88	18.89	18.82		
	RB1#99	18.52	18.56	18.50		
	RB50#0	17.67	17.80	17.66		
	RB50#50	17.60	17.73	17.79		
	RB100#0	17.67	17.75	17.73		
20MHz 16QAM	RB1#0	17.76	17.67	17.90	18.56	30
	RB1#50	18.12	18.04	18.36		
	RB1#99	17.77	17.70	18.00		
	RB50#0	17.69	17.81	17.61		
	RB50#50	17.63	17.74	17.75		
	RB100#0	17.71	17.77	17.74		

Note: EIRP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBi)

Result:

Pass

Peak-to-average Ratio(PAR)					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	4.26	5.45	4.93	13
	RB100#0	4.75	5.33	4.75	13
20MHz 16QAM	RB1#0	5.07	5.94	6.29	13
	RB100#0	5.57	6.32	5.65	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.102	1.108	1.108	1.332	1.338	1.32
1.4MHz 16QAM	1.102	1.096	1.102	1.332	1.296	1.32
3MHz QPSK	2.695	2.695	2.683	2.88	2.88	2.904
3MHz 16QAM	2.683	2.683	2.683	2.892	2.88	2.88
5MHz QPSK	4.531	4.511	4.531	5.22	5.14	5.24
5MHz 16QAM	4.531	4.551	4.551	5.18	5.14	5.32
10MHz QPSK	8.981	8.942	8.942	9.96	9.92	9.92
10MHz 16QAM	8.981	8.942	8.942	9.76	9.84	9.96
15MHz QPSK	13.473	13.533	13.593	15.12	15.3	15.42
15MHz 16QAM	13.473	13.533	13.593	15.06	15.18	15.24
20MHz QPSK	17.884	17.964	17.964	19.6	19.76	20
20MHz 16QAM	17.964	18.044	18.044	19.68	20	20.56
Note: The test plots please refer to the Plots of Occupied Bandwidth						

FCC §2.1051, § 27.53:Spurious Emissions at Antenna Terminal	
Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

FCC §2.1051, § 27.53:Out of band emission, Band Edge	
Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.


FCC §2.1055, §27.54: Frequency Stability

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1710.513	1710.00	1754.485	1755
	-20	3.85	1710.514	1710.00	1754.484	1755
	-10	3.85	1710.513	1710.00	1754.486	1755
	0	3.85	1710.515	1710.00	1754.485	1755
	10	3.85	1710.513	1710.00	1754.484	1755
	20	3.85	1710.514	1710.00	1754.486	1755
	30	3.85	1710.514	1710.00	1754.484	1755
	40	3.85	1710.513	1710.00	1754.476	1755
	50	3.85	1710.515	1710.00	1754.483	1755
Frequency Stability vs. Voltage	20	3.6	1710.514	1710.00	1754.487	1755
	20	4.35	1710.514	1710.00	1754.487	1755
					Result:	Pass


Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	1710.544	1710.00	1754.487	1755
	-20	3.85	1710.544	1710.00	1754.485	1755
	-10	3.85	1710.543	1710.00	1754.484	1755
	0	3.85	1710.542	1710.00	1754.486	1755
	10	3.85	1710.542	1710.00	1754.487	1755
	20	3.85	1710.543	1710.00	1754.486	1755
	30	3.85	1710.544	1710.00	1754.485	1755
	40	3.85	1710.543	1710.00	1754.487	1755
	50	3.85	1710.542	1710.00	1754.485	1755
Frequency Stability vs. Voltage	20	3.6	1710.544	1710.00	1754.485	1755
	20	4.35	1710.546	1710.00	1754.486	1755
					Result:	Pass

Test Plots:

Occupied Bandwidth

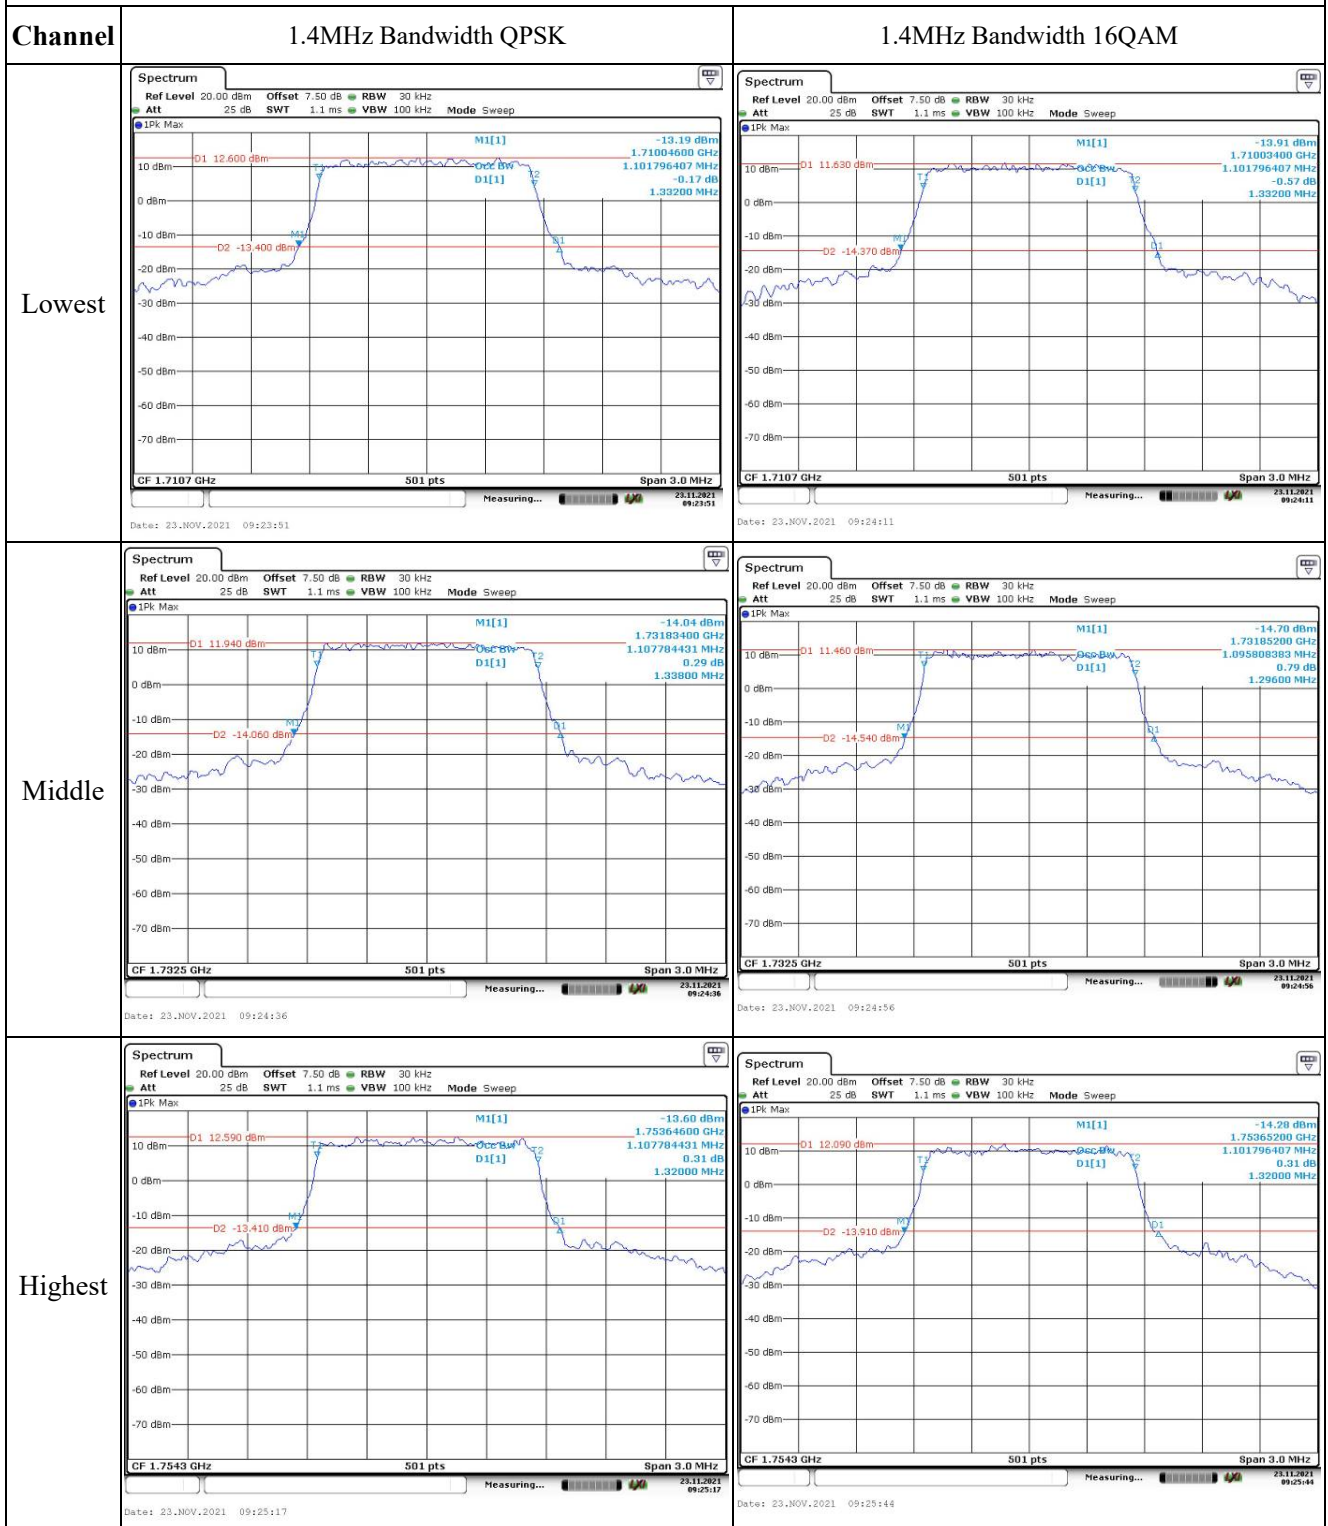

Occupied Bandwidth

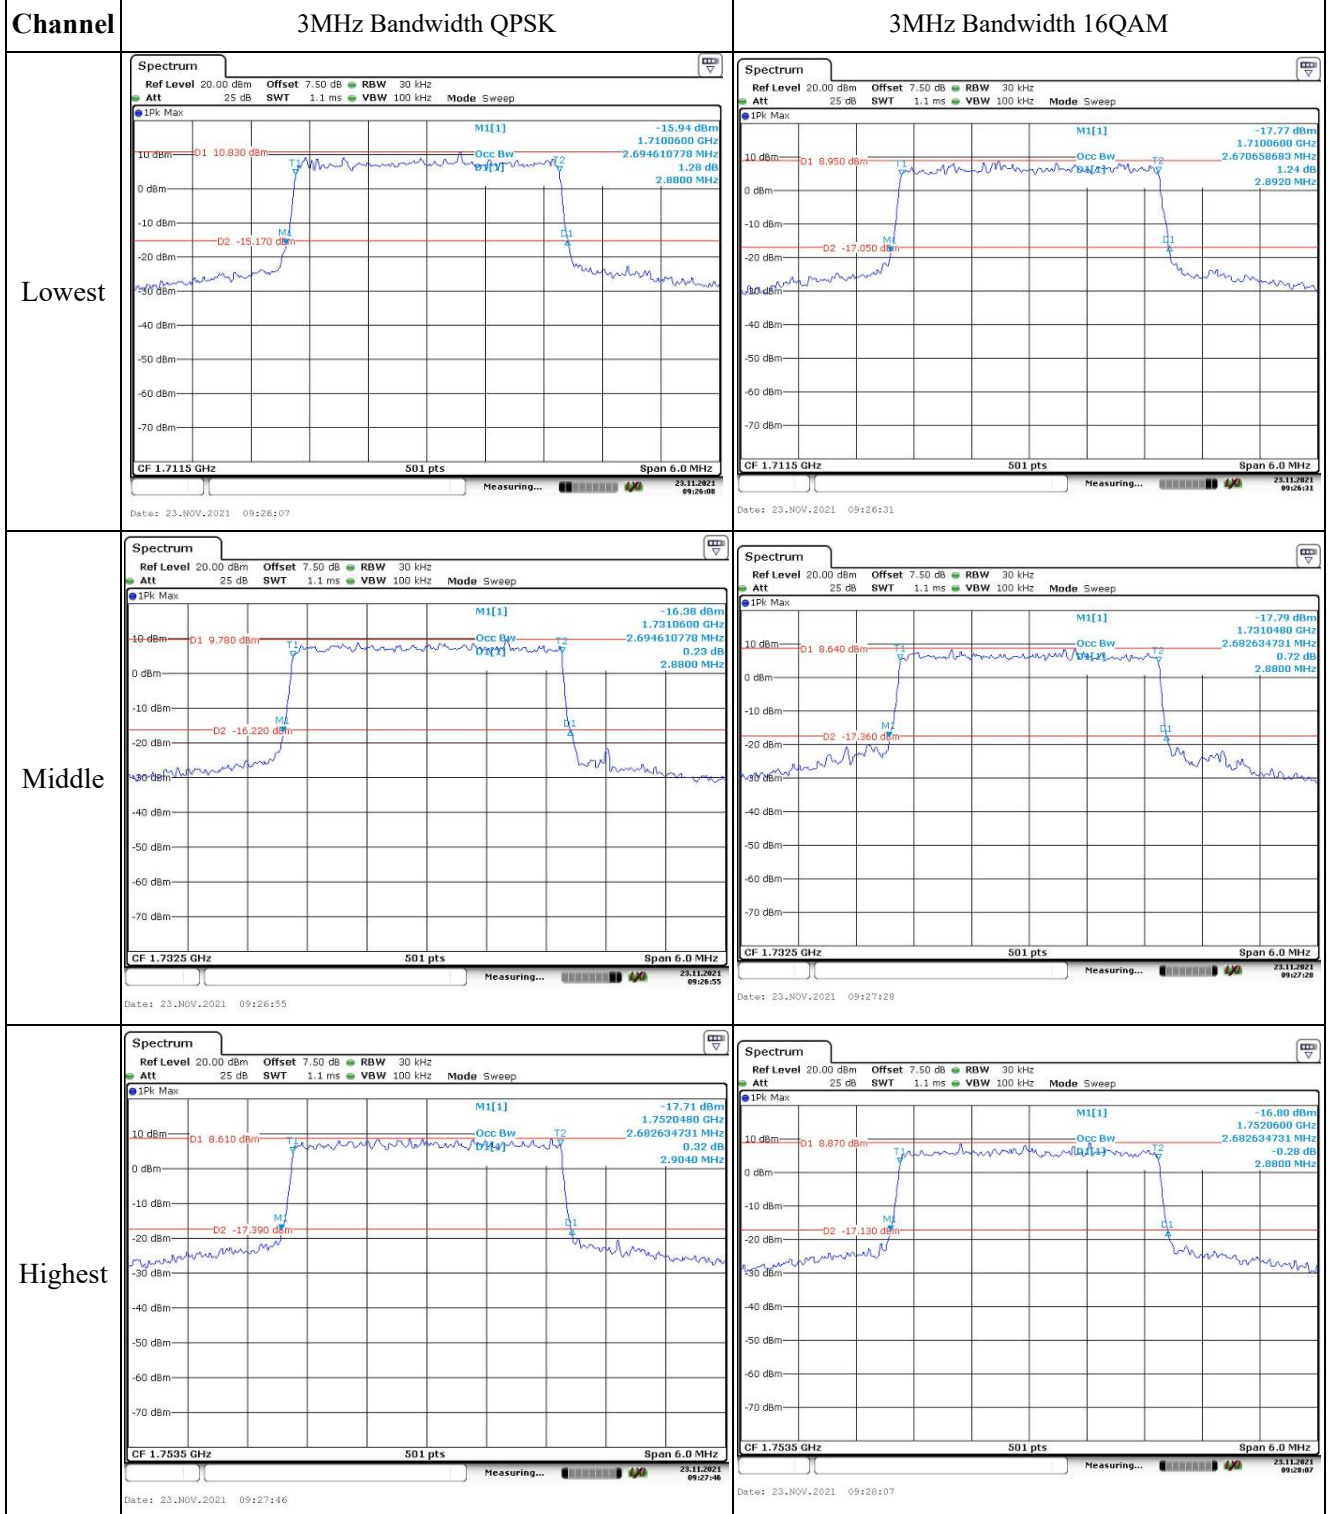

Occupied Bandwidth

