
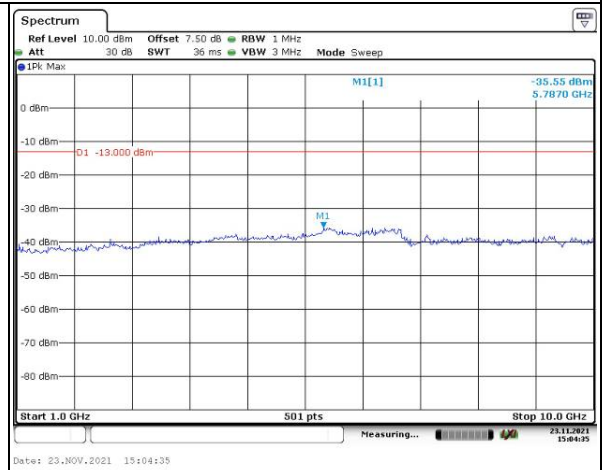


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

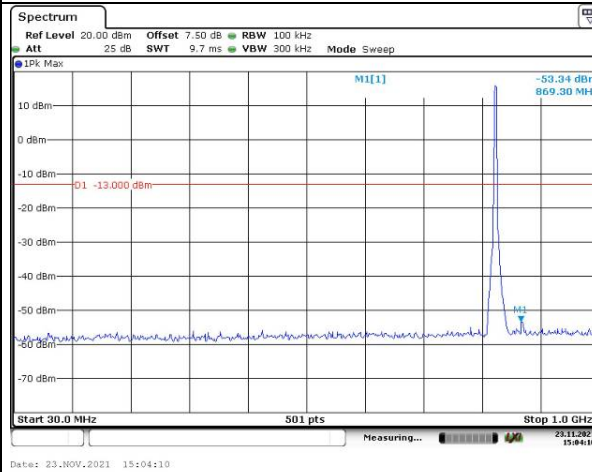

Middle

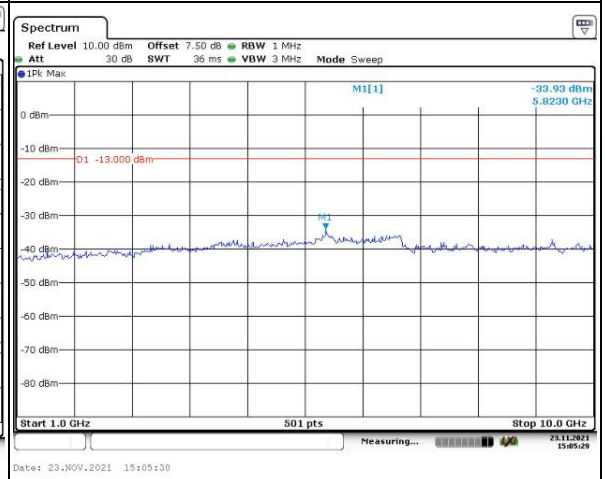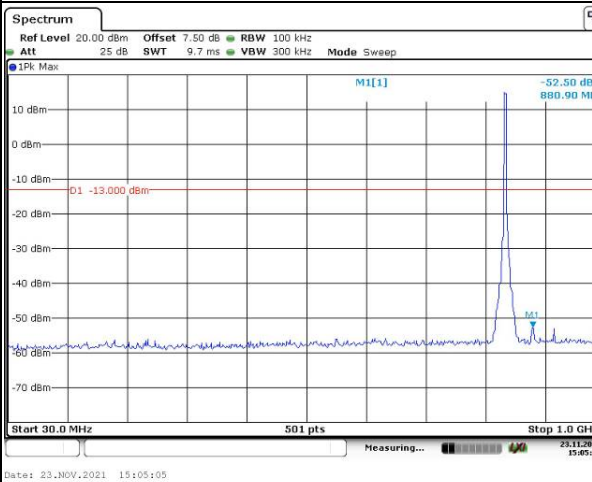

Highest

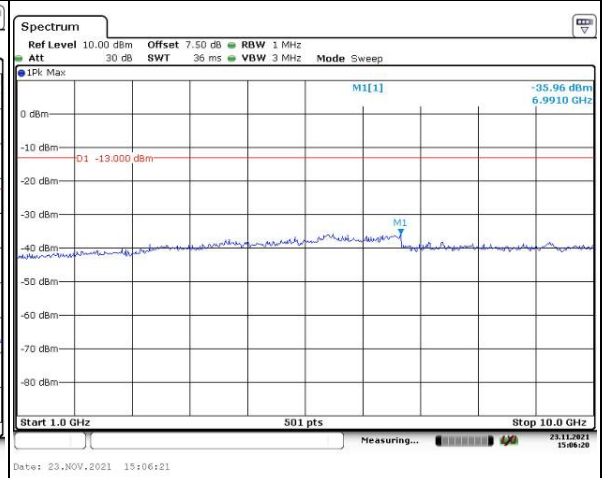
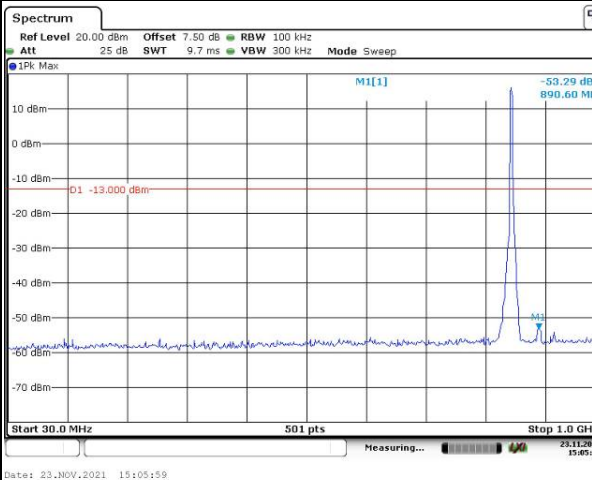


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

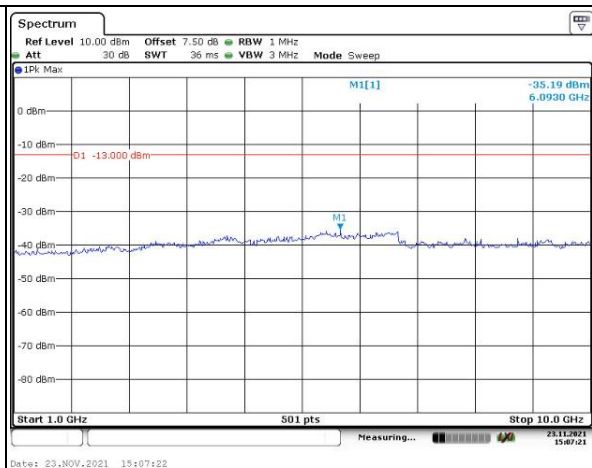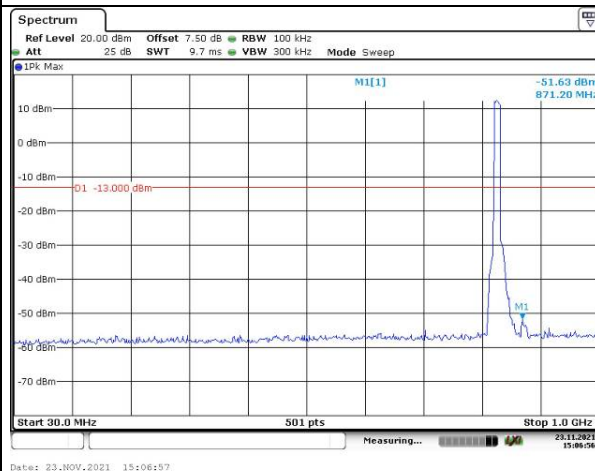


Middle

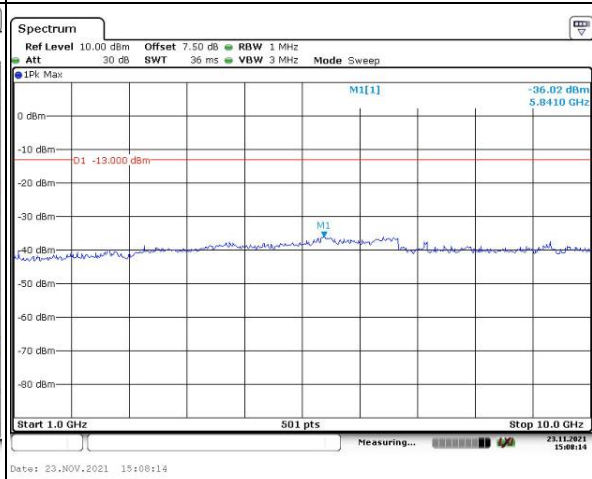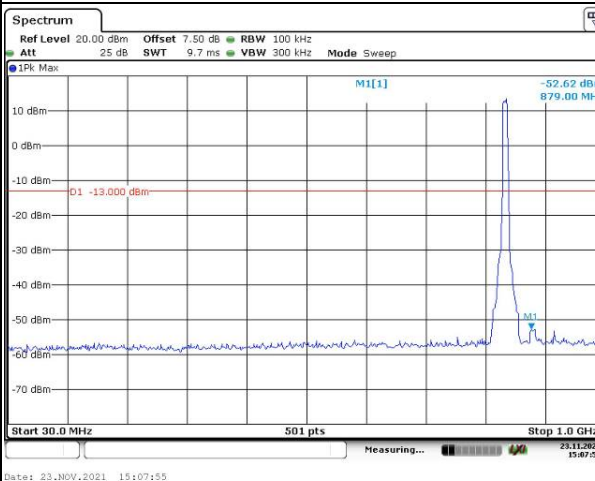


Highest

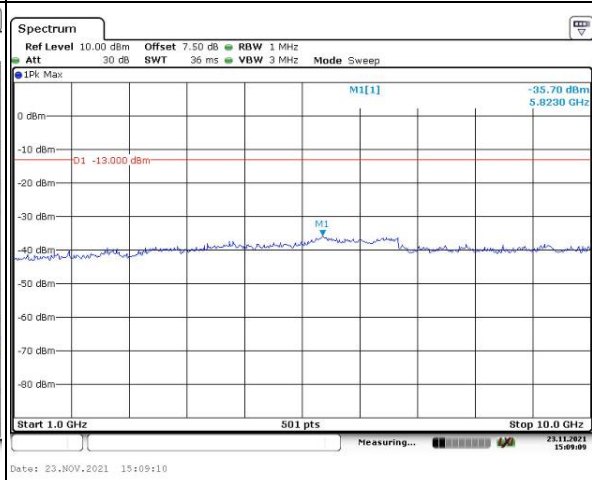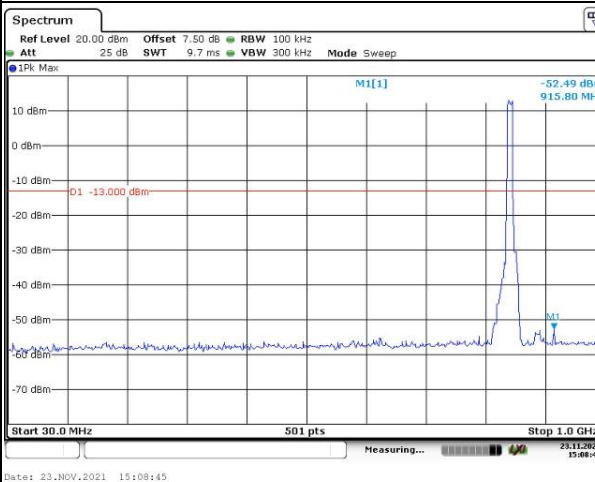


Out of band emission, Band Edge

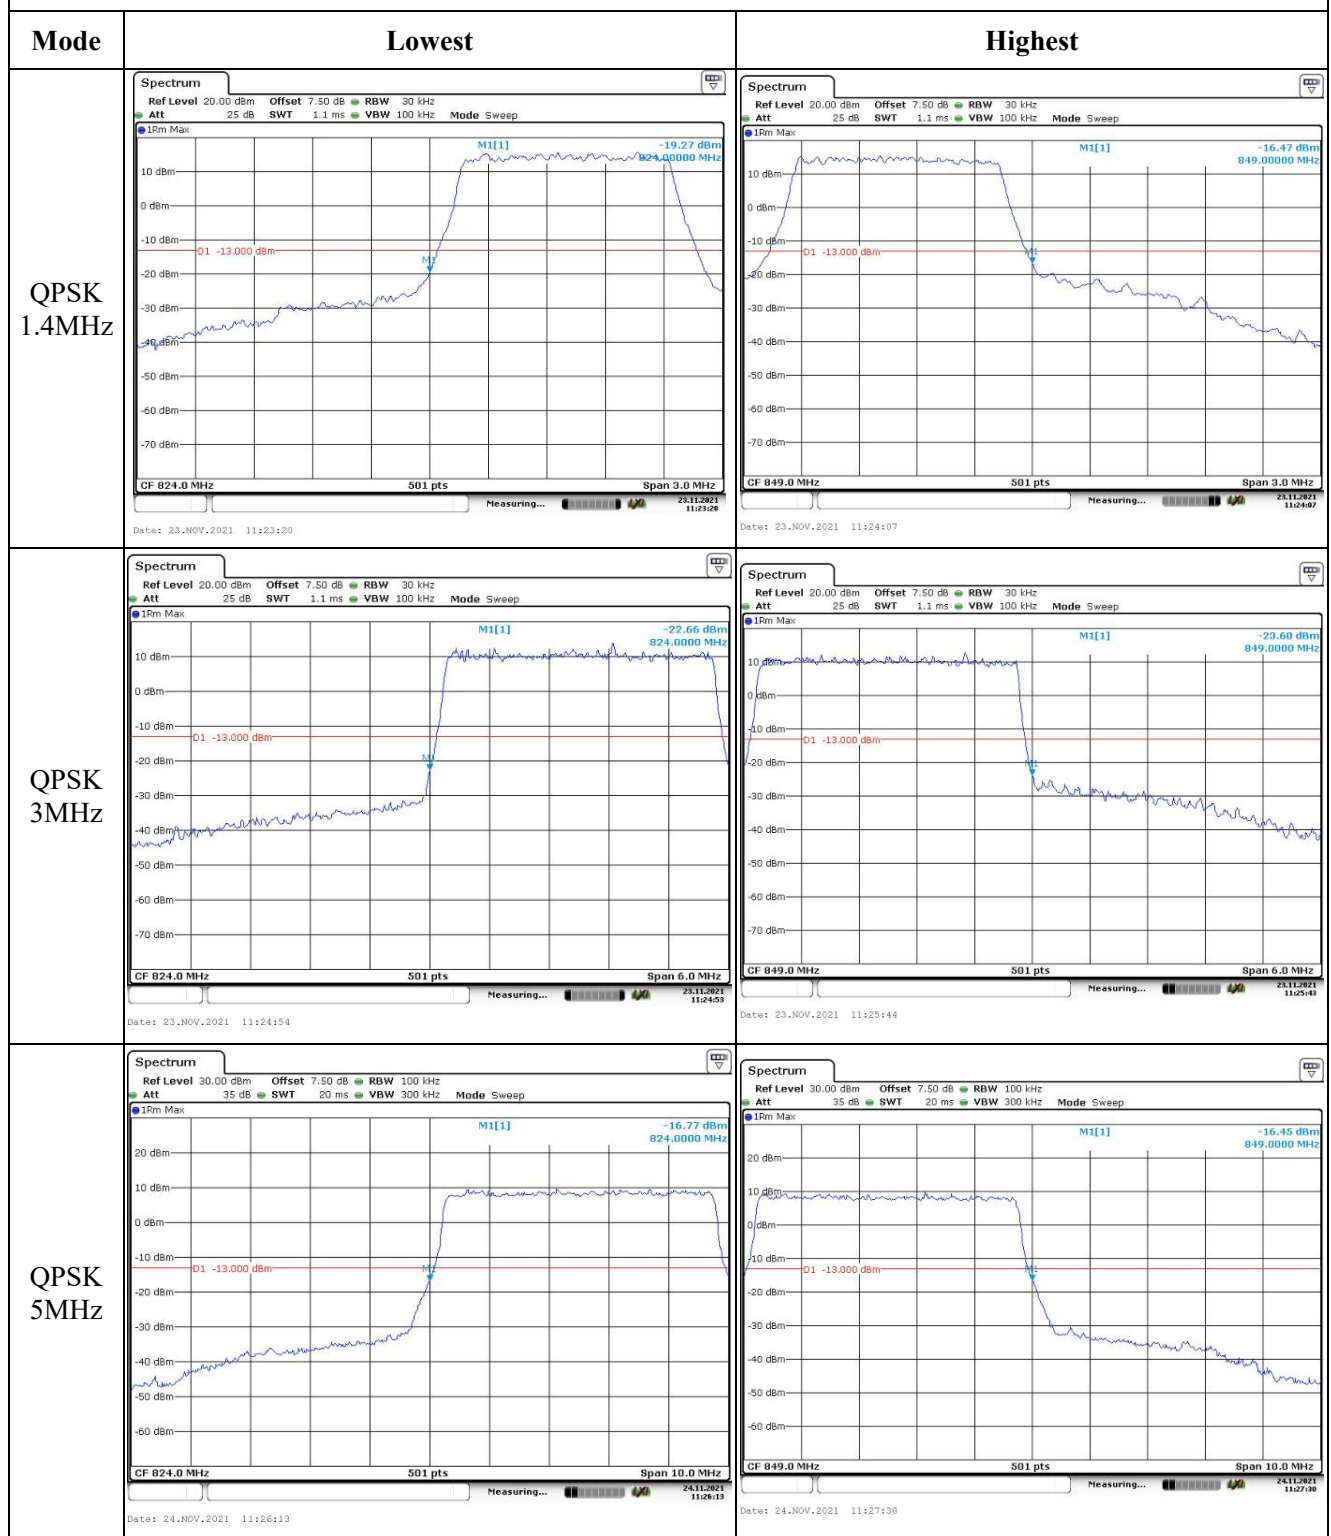


Out of band emission, Band Edge

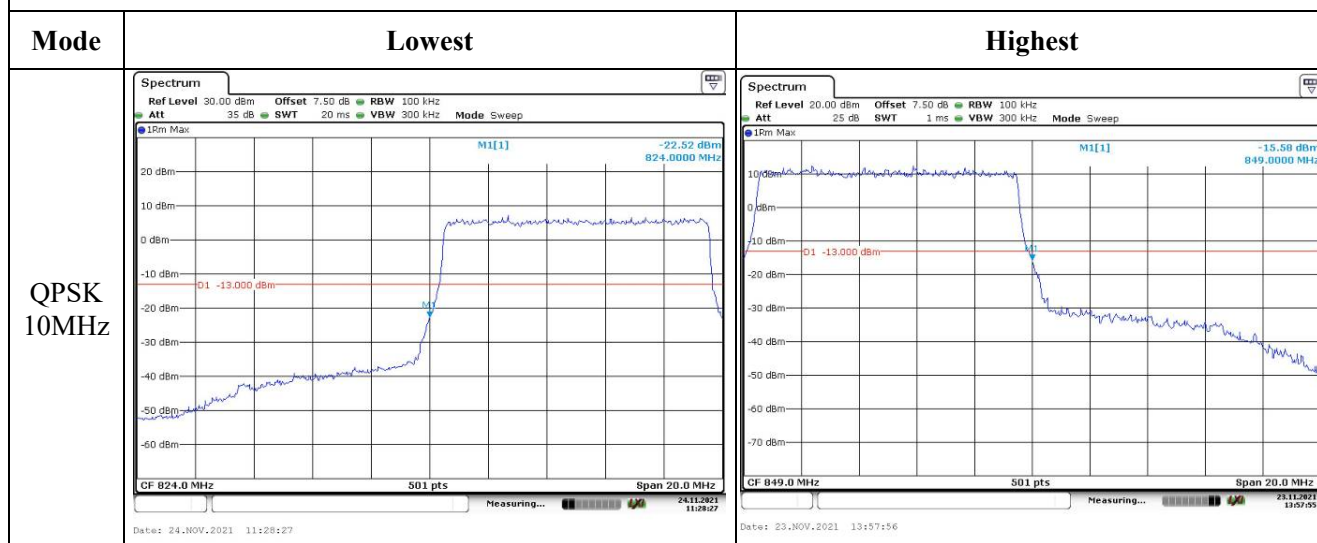

Out of band emission, Band Edge

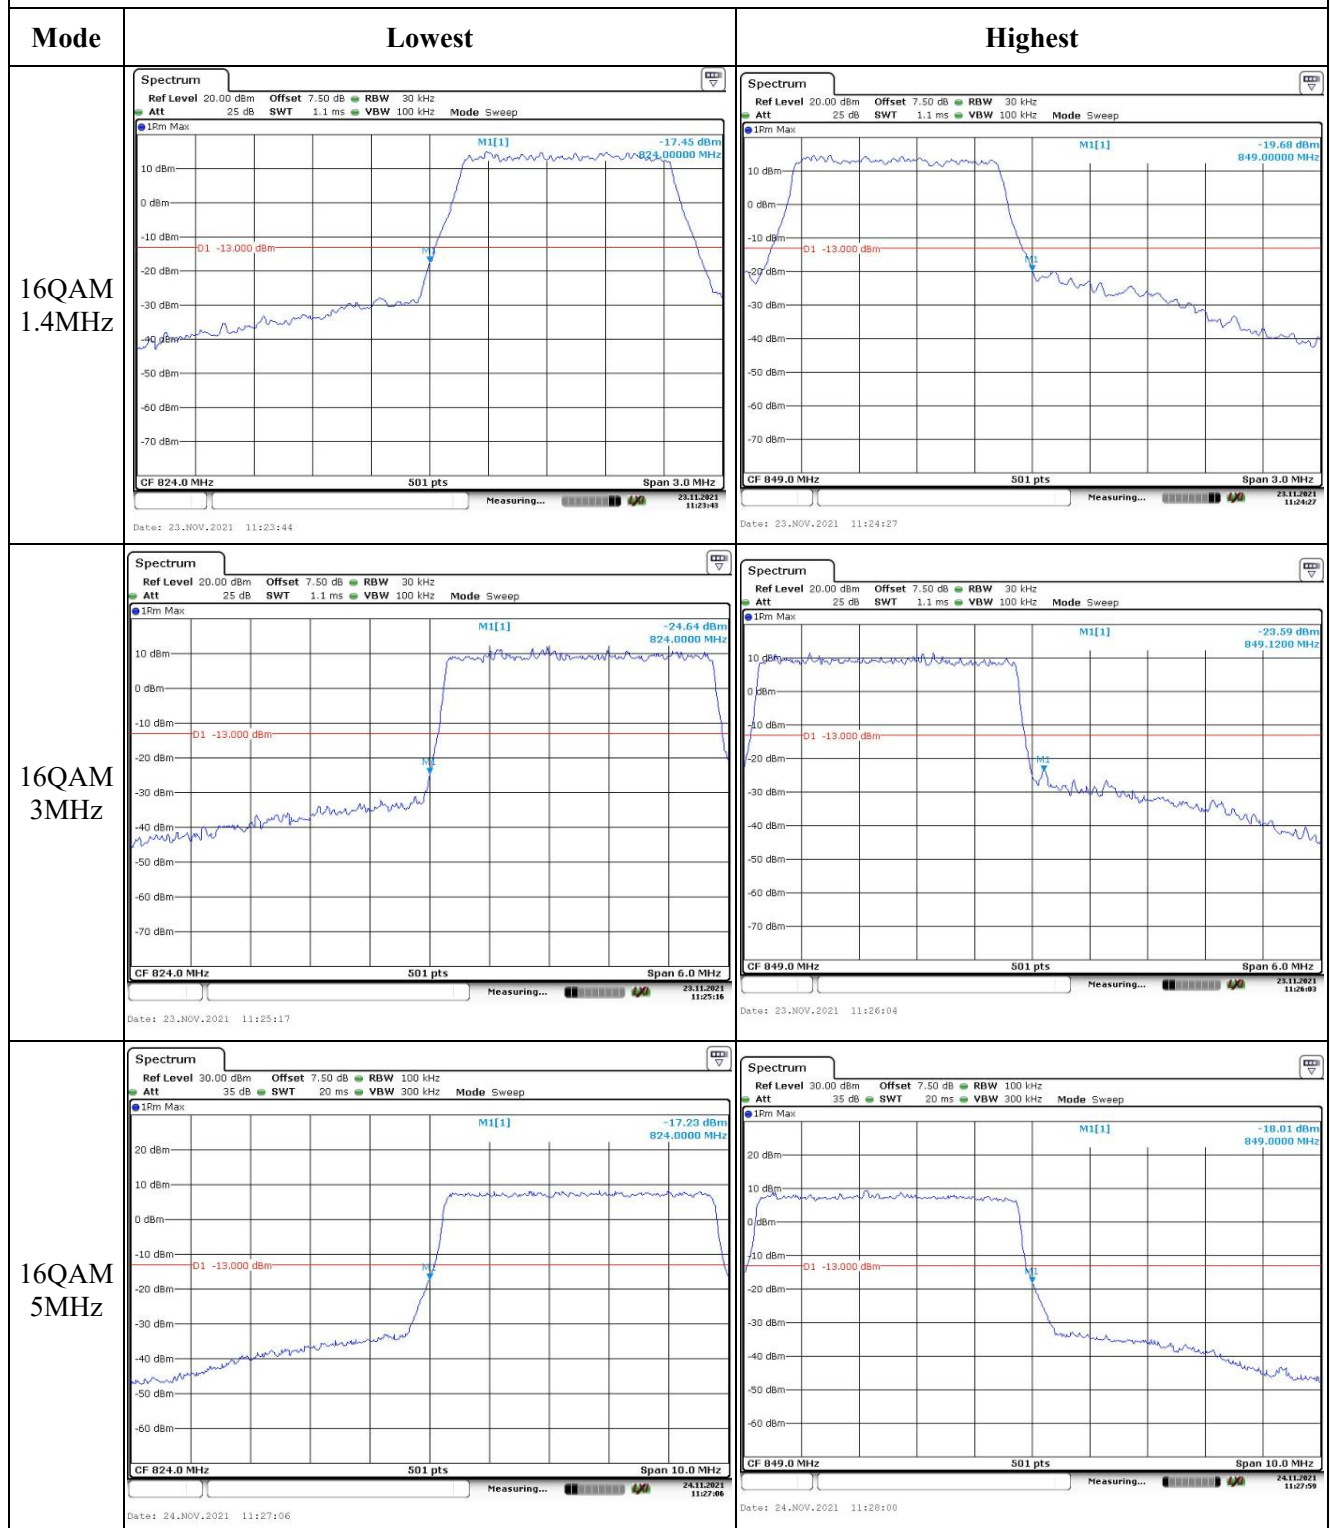

Out of band emission, Band Edge

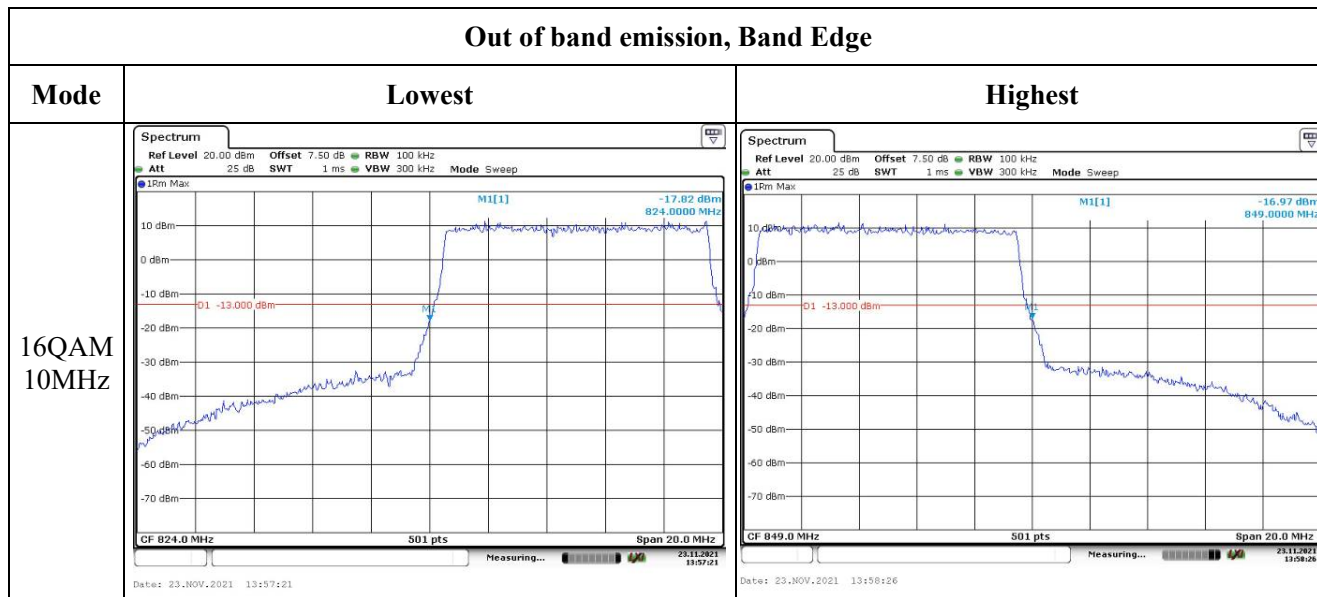

4.9 Antenna Port Test Data and Results for LTE Band 12

Serial Number:	CR21110011-RF-S1	Test Date:	2021-11-23~2021-11-24
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4~23.4	Relative Humidity: (%)	33~34	ATM Pressure: (kPa)	101.7
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D09	N/A	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@ LTE Band 12▲:

Antenna Gain (dBi):	0.6	Antenna Gain (dBd):	-1.55	Cable Loss (dB):	0.4
Operation Voltage(V _{DC}):					
Lowest:	3.6	Normal:	3.85	Highest:	4.35

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	699.7	707.5	715.3
3MHz	700.5	707.5	714.5
5MHz	701.5	707.5	713.5
10MHz	704	707.5	711

Test Data:**FCC§2.1046;§ 27.50(c) (10)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	18.70	18.70	18.79	17.02	34.77
	RB1#3	18.84	18.87	18.97		
	RB1#5	18.70	18.74	18.83		
	RB3#0	17.66	17.63	17.90		
	RB3#3	17.62	17.78	17.78		
	RB6#0	18.62	18.64	18.70		
1.4MHz 16QAM	RB1#0	18.71	18.76	18.82	17.2	34.77
	RB1#3	18.63	18.66	18.77		
	RB1#5	17.72	17.67	17.84		
	RB3#0	17.69	17.77	17.80		
	RB3#3	17.67	17.74	17.86		
	RB6#0	19.13	19.15	19.07		
3MHz QPSK	RB1#0	18.67	18.68	18.72	18.04	34.77
	RB1#8	18.77	18.81	18.89		
	RB1#14	18.64	18.65	18.73		
	RB6#0	17.70	17.66	17.86		
	RB6#9	19.08	19.06	19.99		
	RB15#0	19.09	19.12	19.06		
3MHz 16QAM	RB1#0	19.68	19.19	19.11	18.74	34.77
	RB1#8	20.67	19.20	19.06		
	RB1#14	20.69	19.25	18.05		
	RB6#0	19.16	19.06	18.98		
	RB6#9	19.13	19.12	18.92		
	RB15#0	19.15	19.04	19.09		
5MHz QPSK	RB1#0	18.04	18.06	19.96	18.11	34.77
	RB1#13	18.17	18.16	19.10		
	RB1#24	18.09	18.02	19.02		
	RB15#0	18.09	18.09	19.16		
	RB15#10	18.09	18.19	19.96		
	RB25#0	18.06	18.21	20.06		
5MHz 16QAM	RB1#0	19.90	18.19	19.97	18.02	34.77
	RB1#13	18.04	18.39	18.13		
	RB1#24	19.94	18.30	18.05		
	RB15#0	19.10	19.04	19.17		
	RB15#10	19.10	19.13	18.95		
	RB25#0	19.09	19.09	19.06		
10MHz QPSK	RB1#0	18.51	18.52	18.48	17.02	34.77
	RB1#25	18.91	18.93	18.92		
	RB1#49	18.51	18.58	18.59		

	RB25#0	18.70	18.70	18.79		
	RB25#25	18.84	18.87	18.97		
	RB50#0	18.70	18.74	18.83		
10MHz 16QAM	RB1#0	17.66	17.63	17.90	17.3	34.77
	RB1#25	18.67	18.68	18.72		
	RB1#49	18.77	18.81	18.89		
	RB25#0	18.64	18.65	18.73		
	RB25#25	19.20	19.25	19.00		
	RB50#0	19.13	19.16	19.00		

Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)

Result: **Pass**

Peak-to-average Ratio(PAR)

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.39	5.39	5.88	13
	RB50#0	5.3	5.54	5.25	13
10MHz 16QAM	RB1#0	5.97	5.91	6.99	13
	RB50#0	6.32	6.32	6.12	13
				Result:	Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.096	1.102	1.102	1.296	1.32	1.29
1.4MHz 16QAM	1.102	1.09	1.102	1.32	1.29	1.296
3MHz QPSK	2.683	2.695	2.683	2.88	2.88	2.892
3MHz 16QAM	2.683	2.683	2.671	2.892	2.88	2.868
5MHz QPSK	4.531	4.511	4.511	5.18	5.22	5.14
5MHz 16QAM	4.531	4.551	4.531	5.16	5.18	5.16
10MHz QPSK	8.942	8.942	8.981	10	9.92	9.96
10MHz 16QAM	8.942	8.981	8.942	9.72	9.84	9.88

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	--

FCC §2.1051, §27.53:Out of band emission, Band Edge

Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	---


FCC §2.1055, §27.54: Frequency Stability

Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	699.513	699.00	715.456	716.00
	-20	3.85	699.514	699.00	715.458	716.00
	-10	3.85	699.513	699.00	715.458	716.00
	0	3.85	699.514	699.00	715.456	716.00
	10	3.85	699.512	699.00	715.455	716.00
	20	3.85	699.514	699.00	715.457	716.00
	30	3.85	699.513	699.00	715.455	716.00
	40	3.85	699.514	699.00	715.457	716.00
Frequency Stability vs. Voltage	50	3.85	699.515	699.00	715.455	716.00
	20	3.6	699.515	699.00	715.458	716.00
	20	4.35	699.513	699.00	715.458	716.00
					Result:	Pass

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	699.515	699.00	715.458	716.00
	-20	3.85	699.513	699.00	715.457	716.00
	-10	3.85	699.513	699.00	715.458	716.00
	0	3.85	699.514	699.00	715.459	716.00
	10	3.85	699.514	699.00	715.456	716.00
	20	3.85	699.514	699.00	715.457	716.00
	30	3.85	699.514	699.00	715.455	716.00
	40	3.85	699.515	699.00	715.455	716.00
Frequency Stability vs. Voltage	50	3.85	699.512	699.00	715.456	716.00
	20	3.6	699.512	699.00	715.455	716.00
	20	4.35	699.513	699.00	715.456	716.00
					Result:	Pass

Test Plots:

Occupied Bandwidth

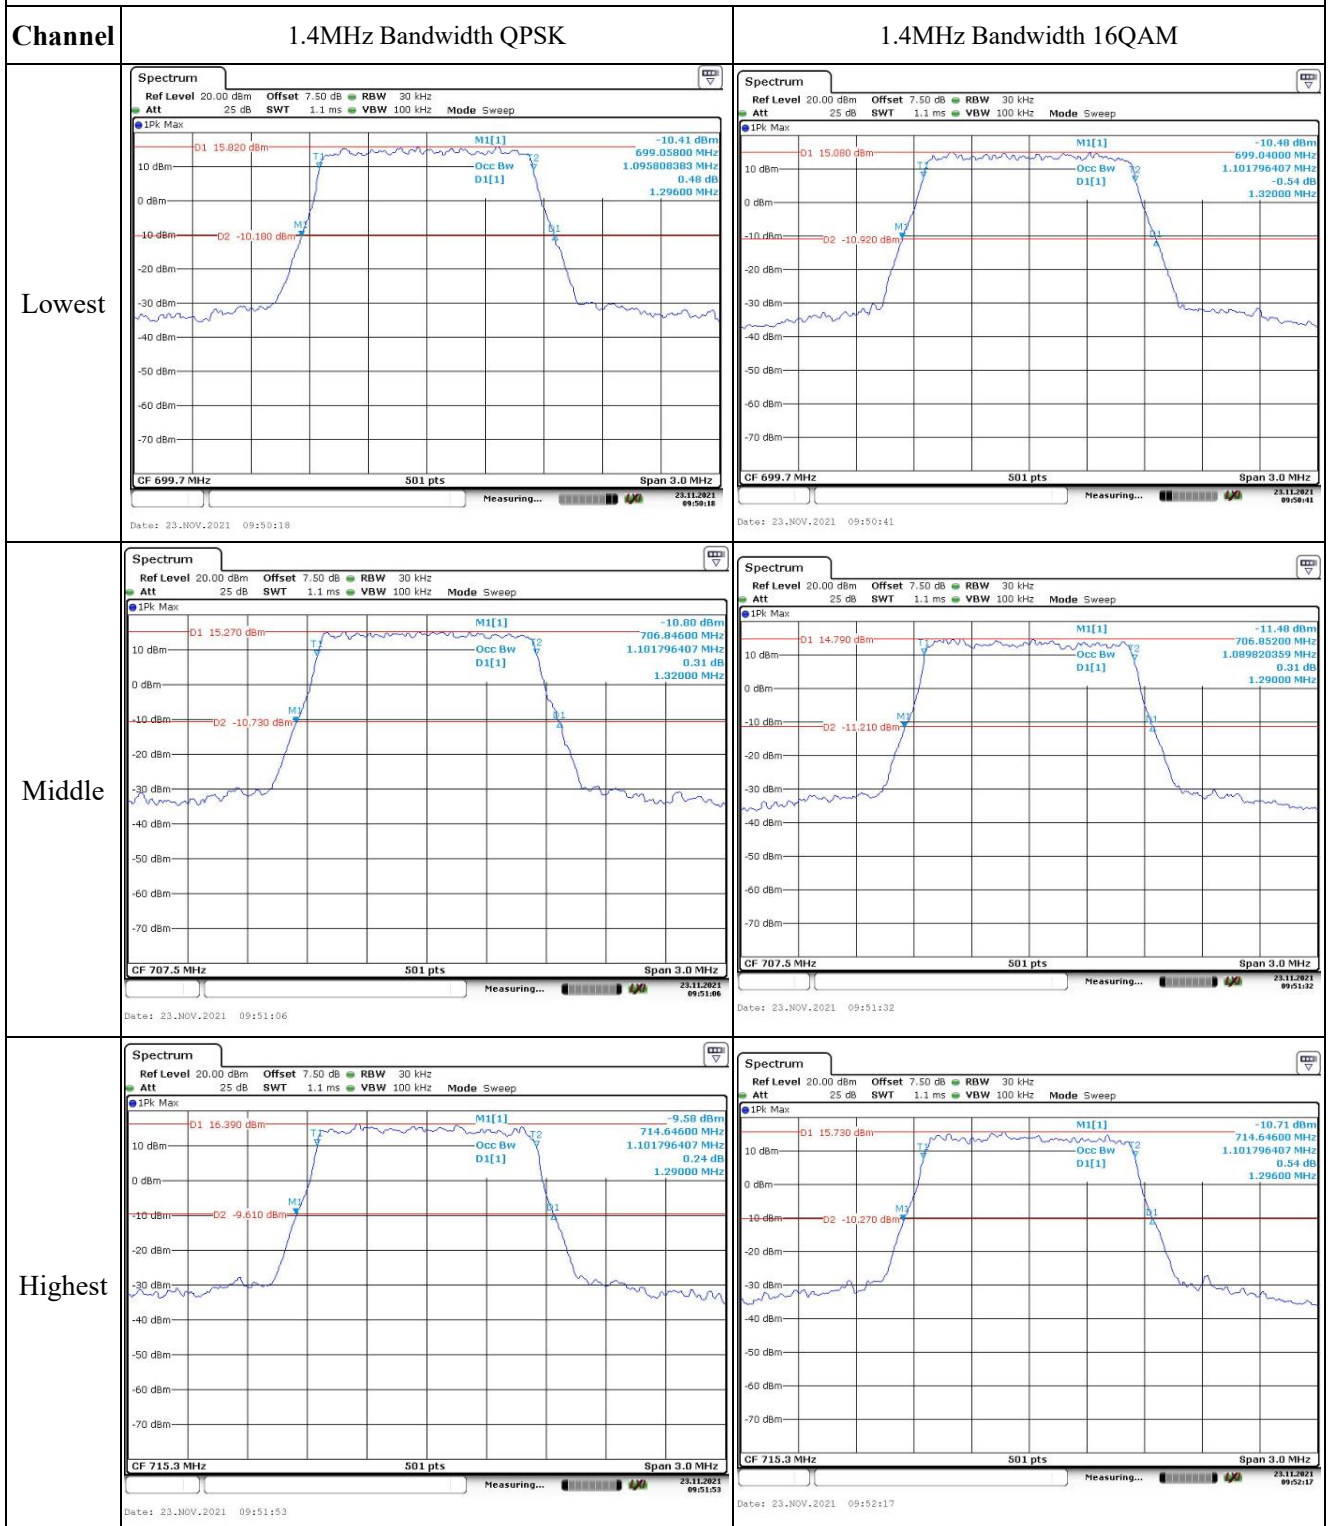



Occupied Bandwidth

Channel



3MHz Bandwidth QPSK

3MHz Bandwidth 16QAM



Lowest

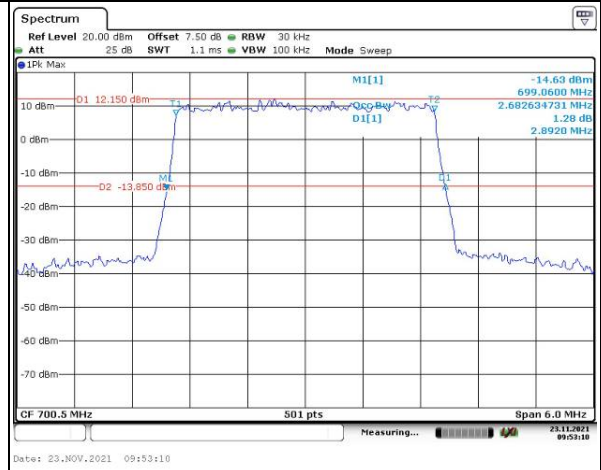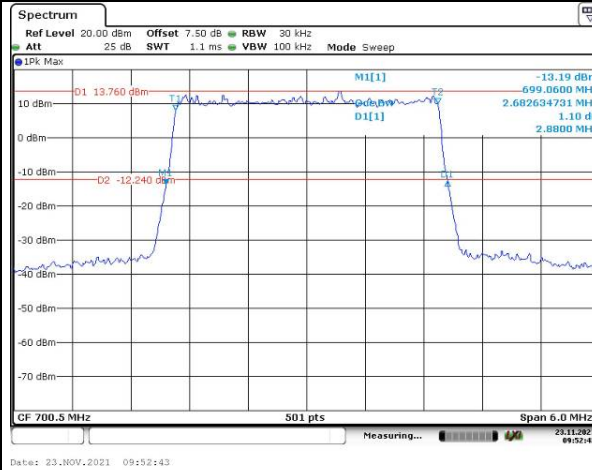


Middle

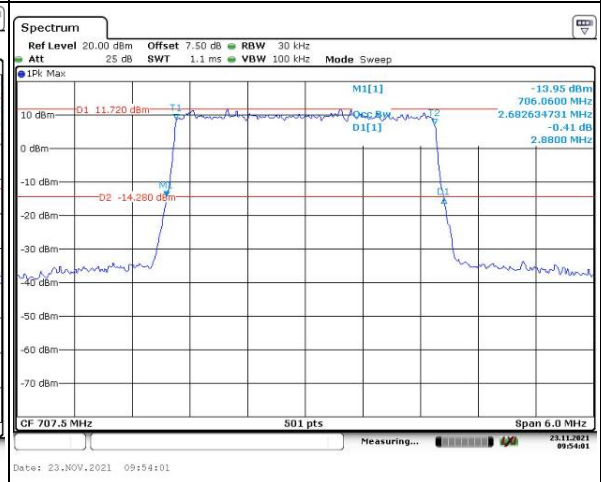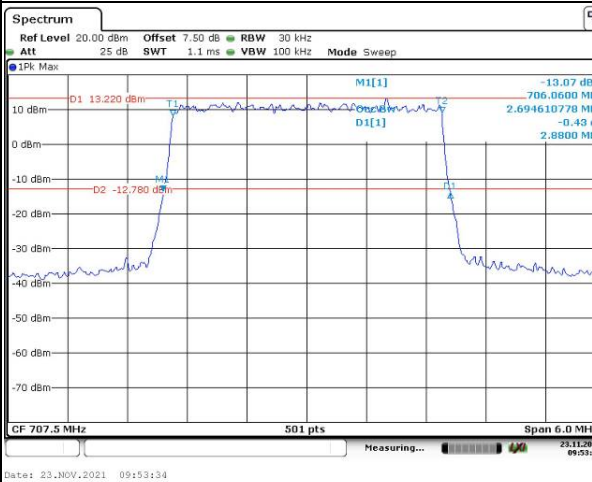


Highest

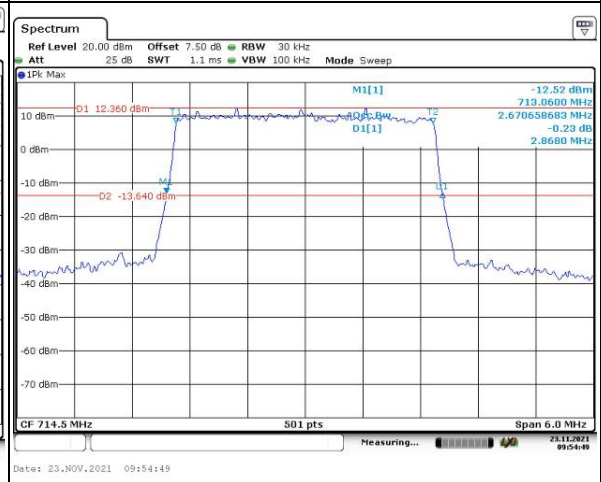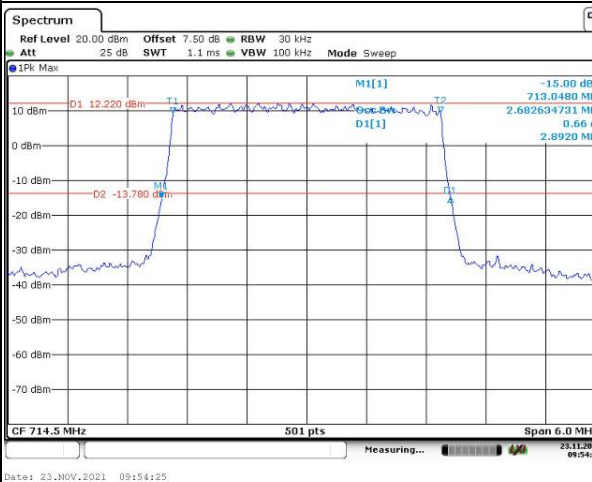

Occupied Bandwidth

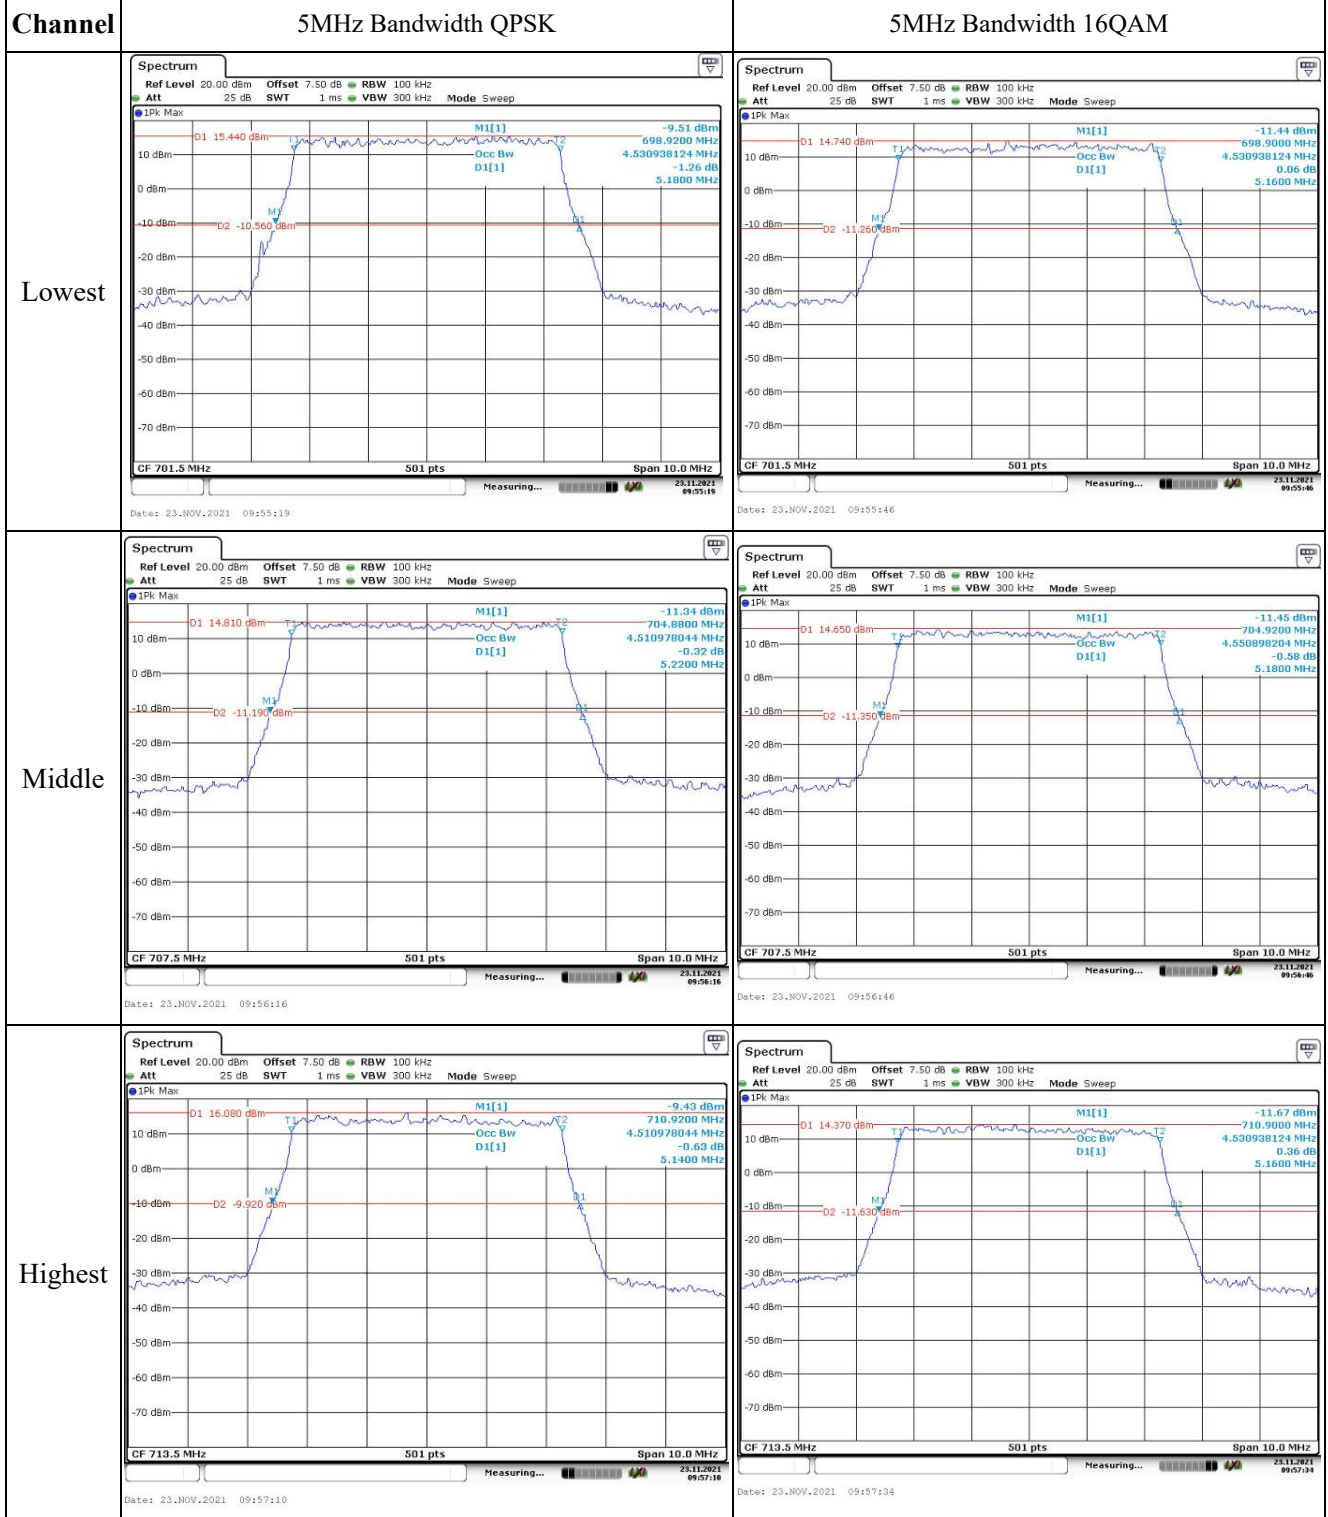

Occupied Bandwidth


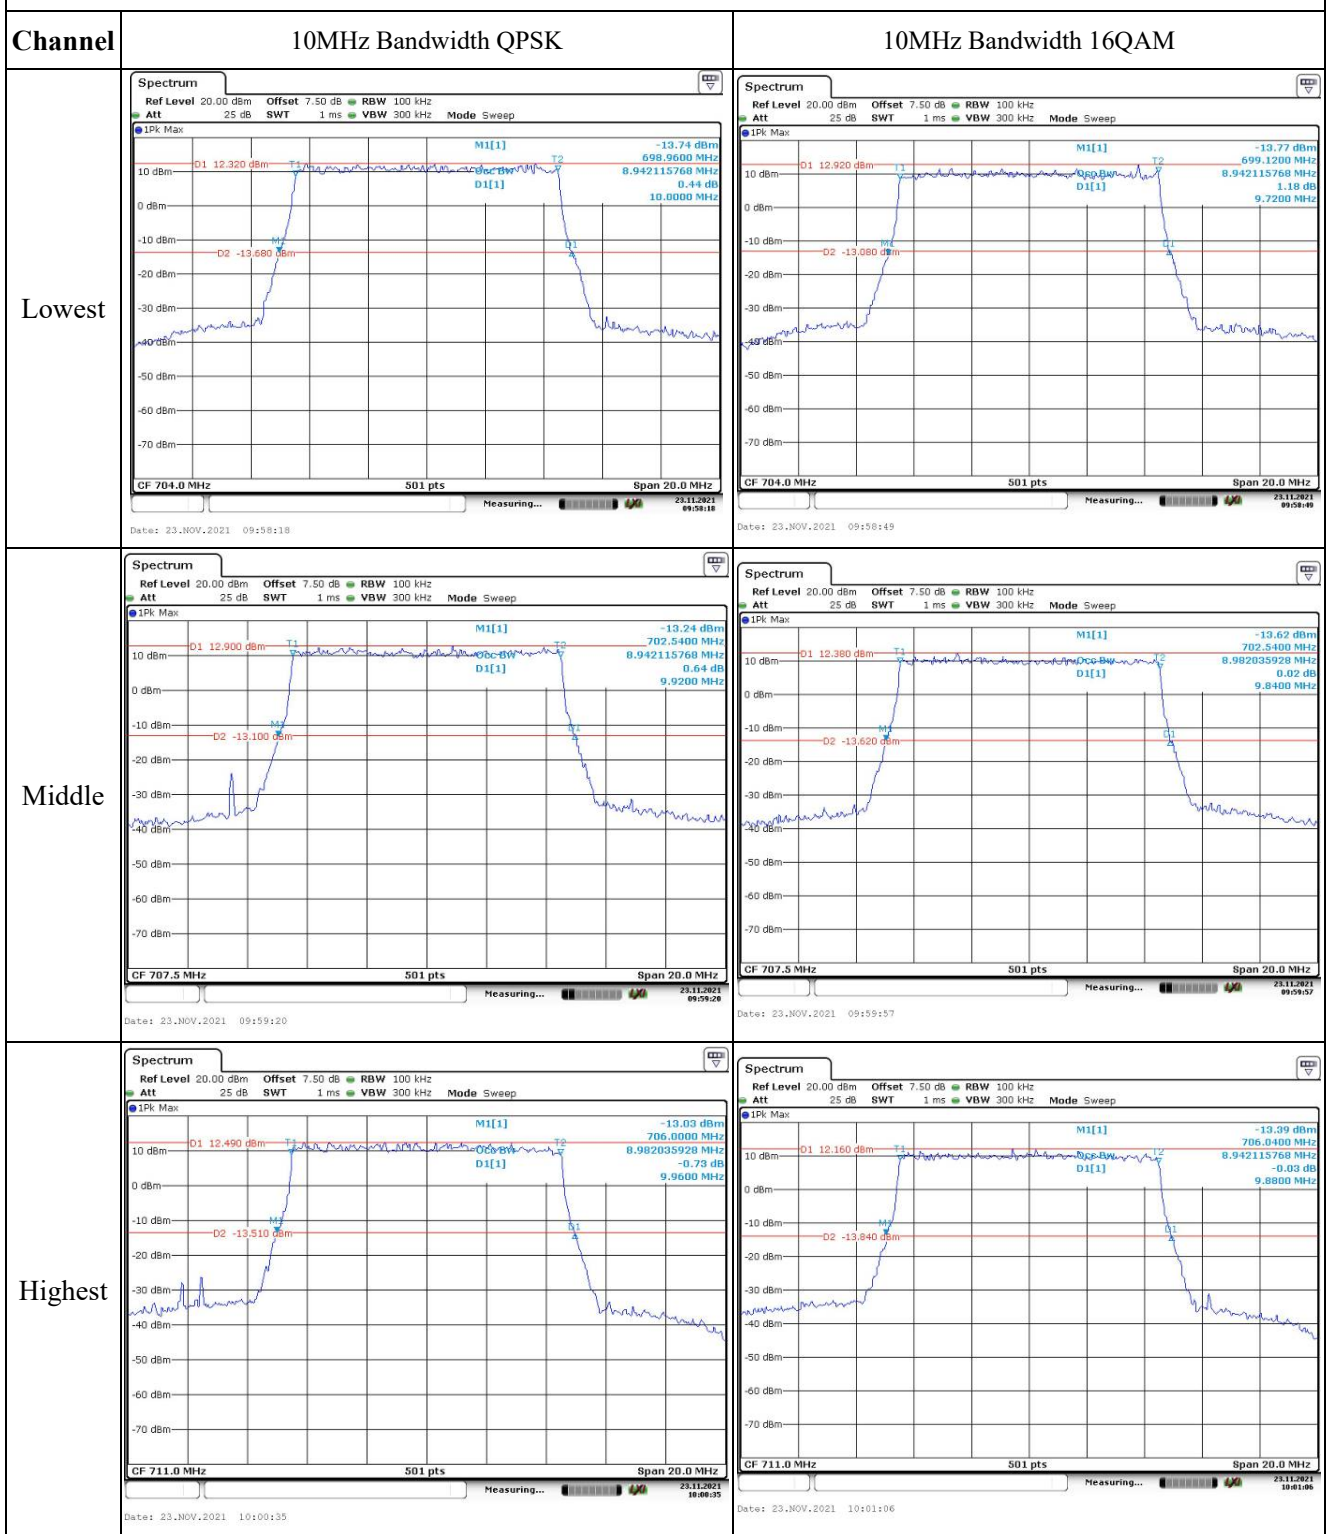


Spurious Emissions at Antenna Terminal



Channel

1.4MHz Bandwidth QPSK



Lowest

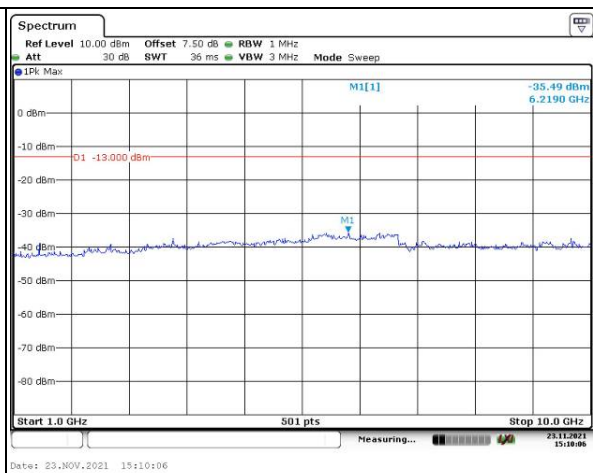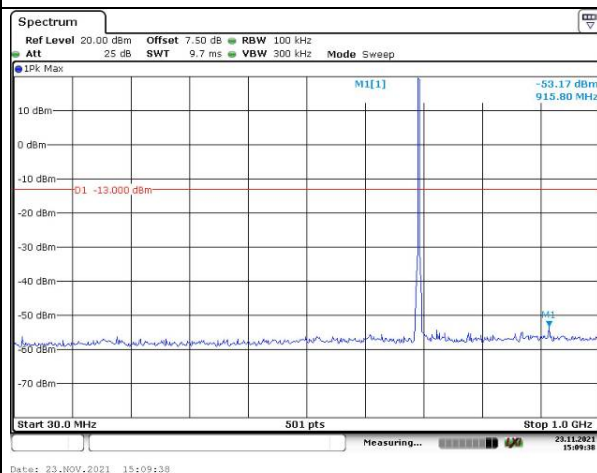

Middle

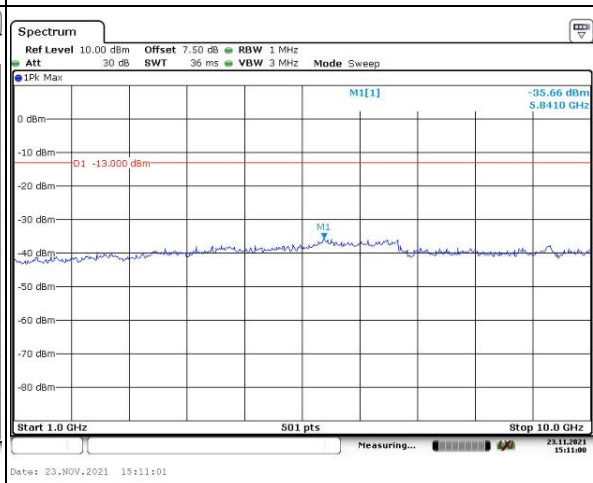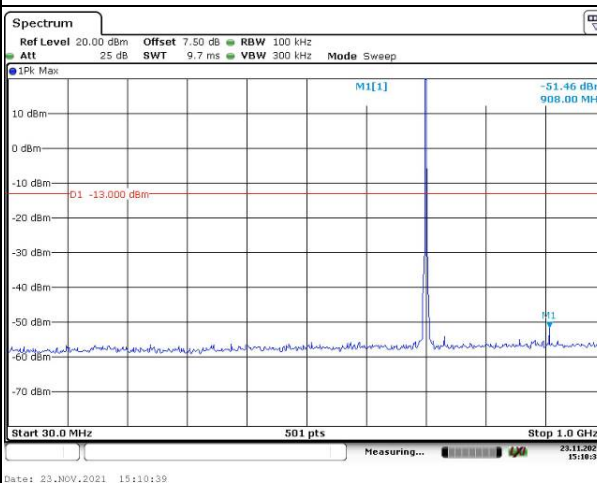

Highest

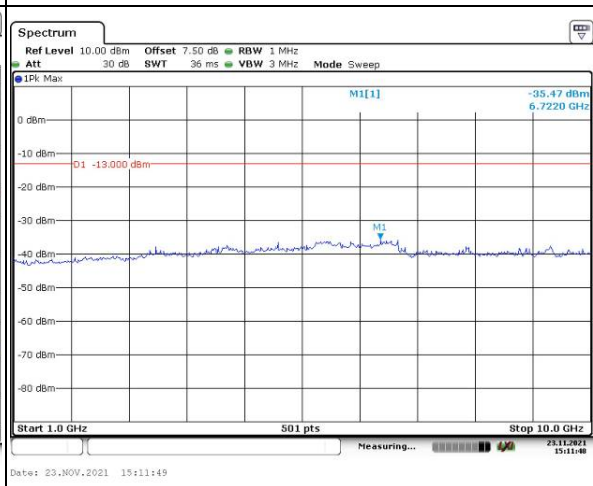
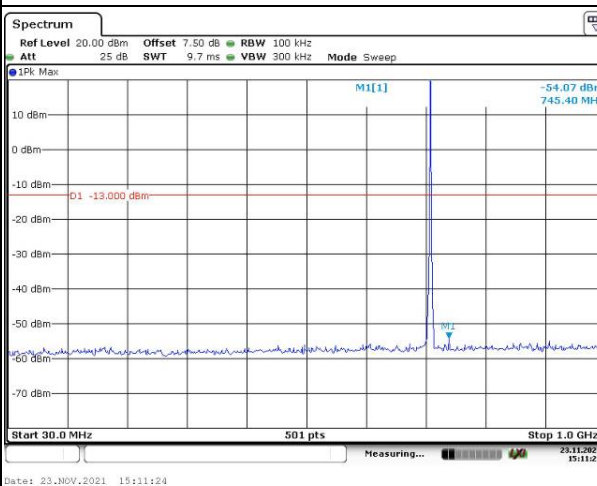


Spurious Emissions at Antenna Terminal



Channel

3MHz Bandwidth QPSK



Lowest

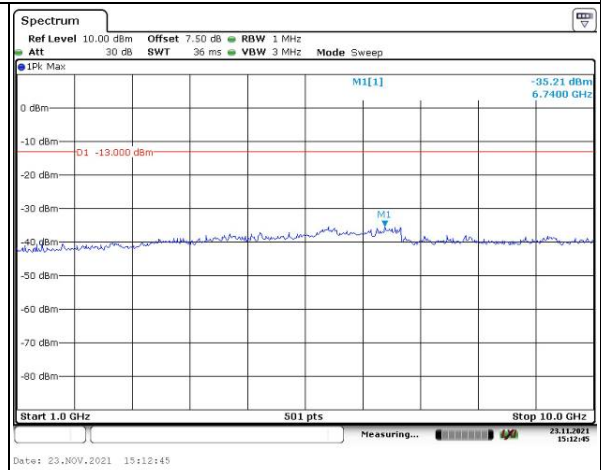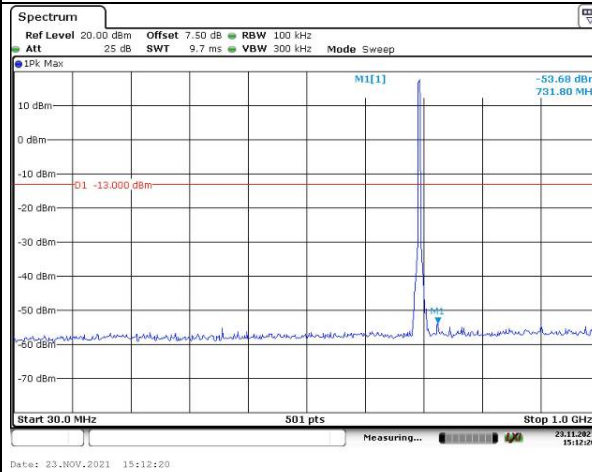

Middle

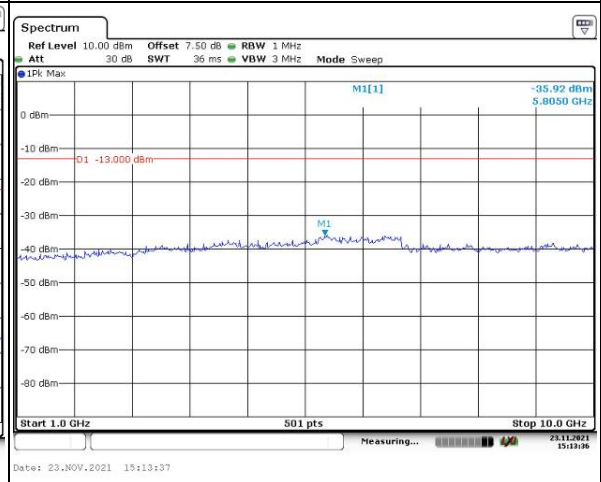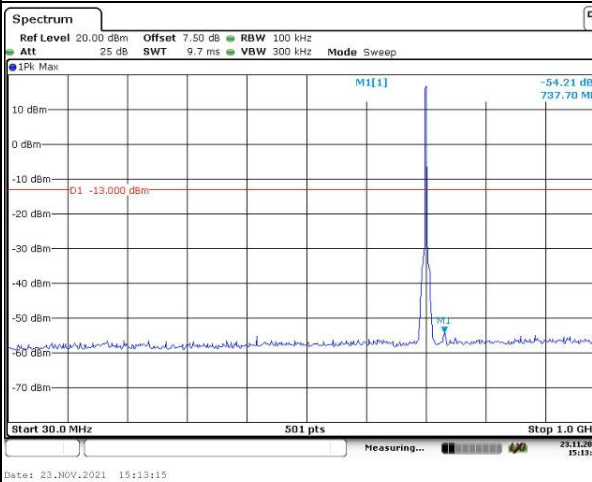

Highest

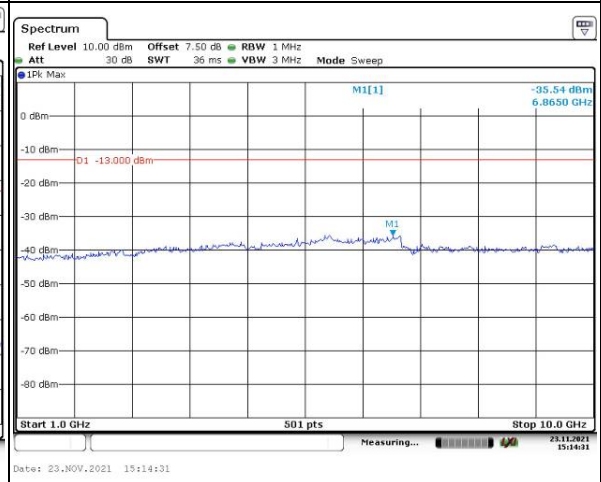
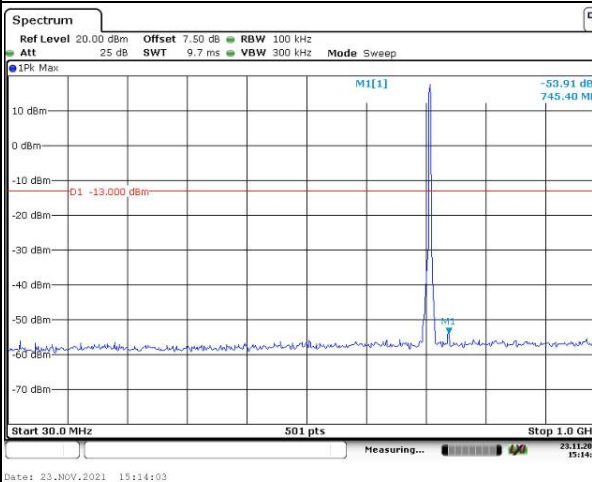


Spurious Emissions at Antenna Terminal



Channel

5MHz Bandwidth QPSK



Lowest

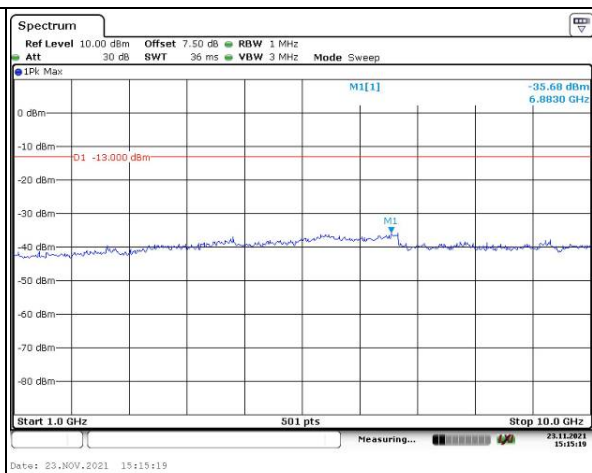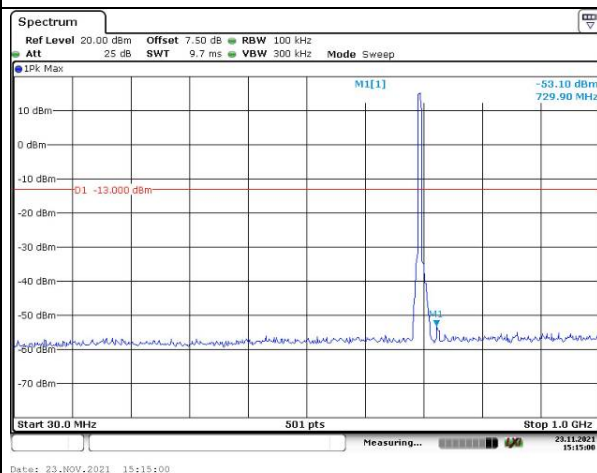

Middle

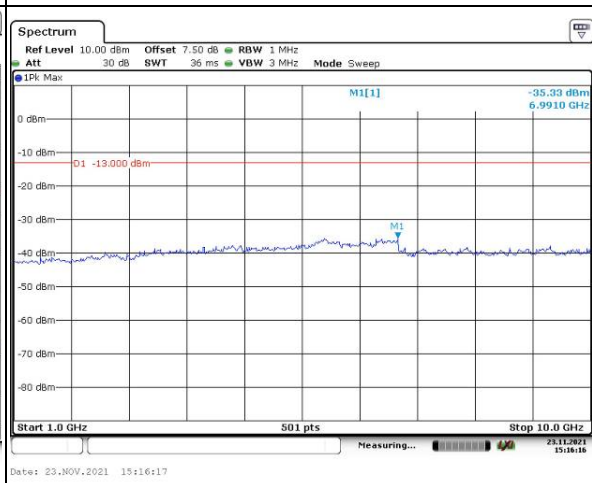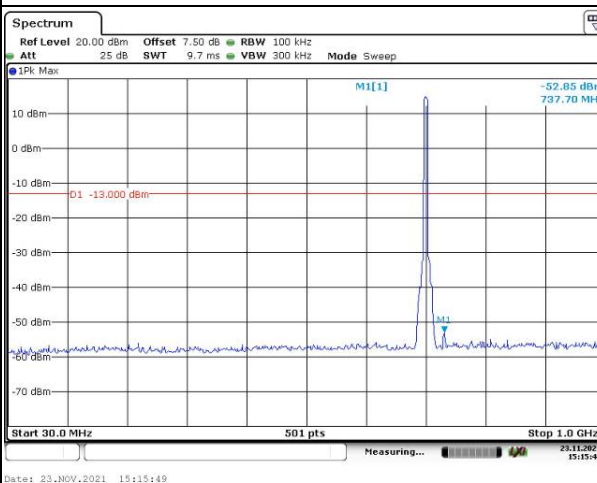

Highest

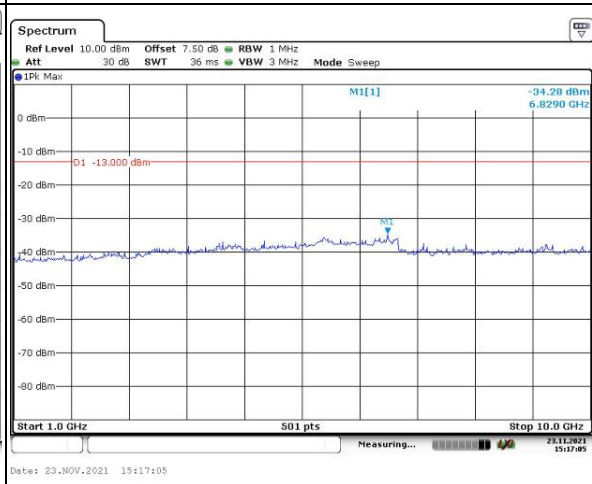
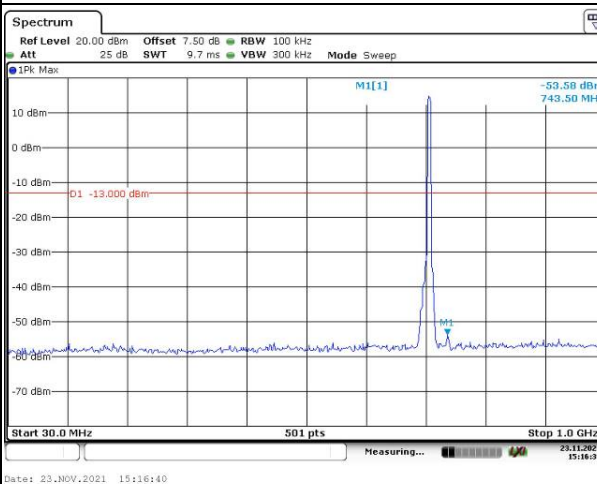


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK



Lowest

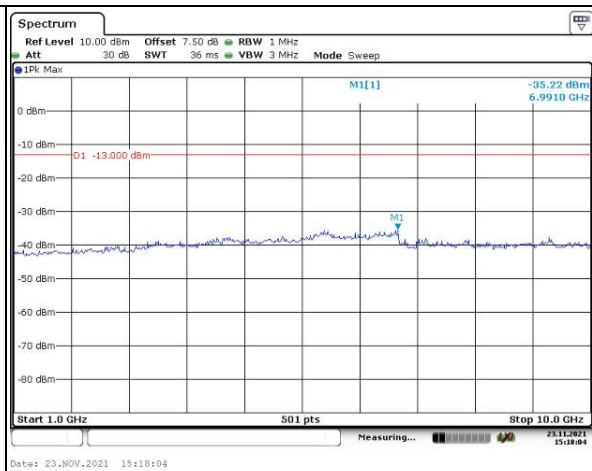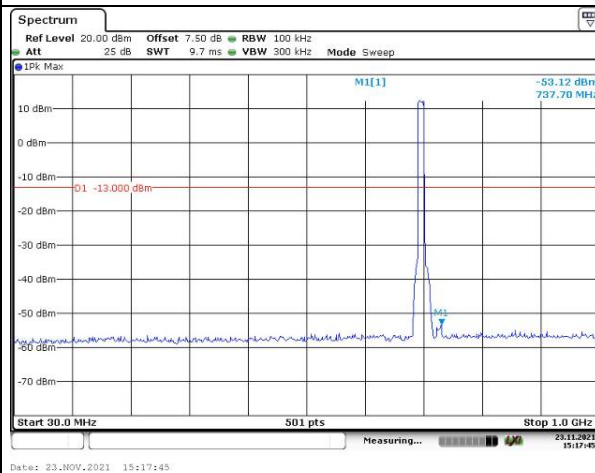


Middle

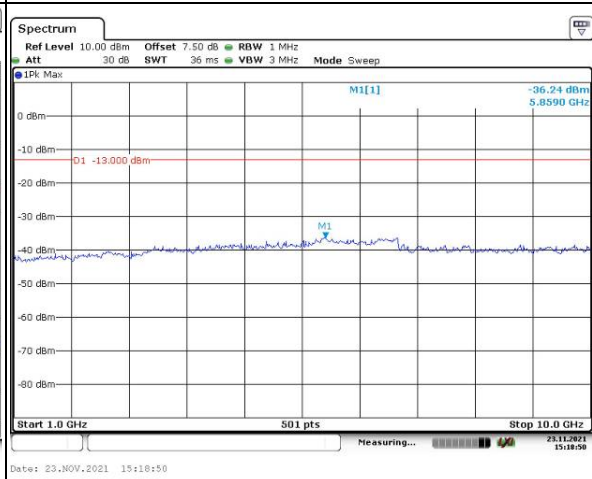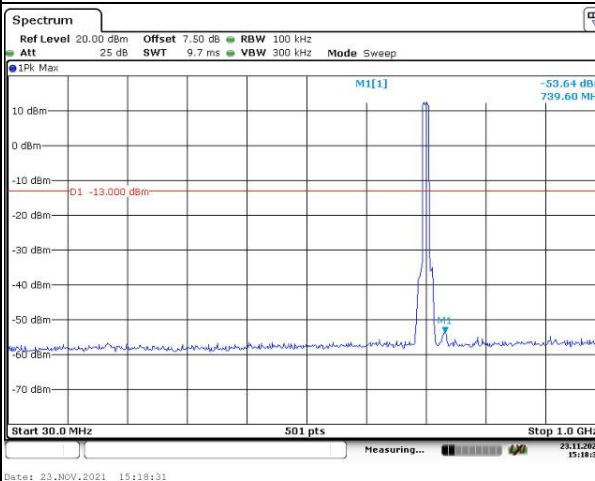


Highest

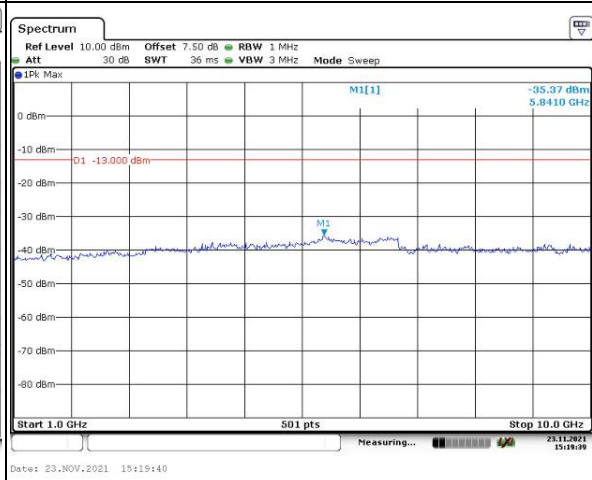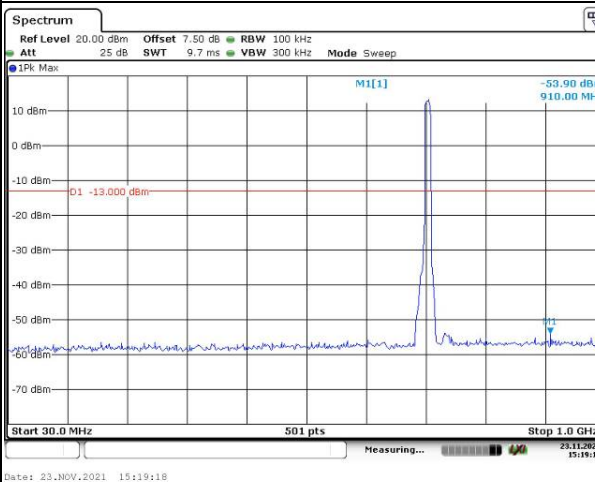


Out of band emission, Band Edge

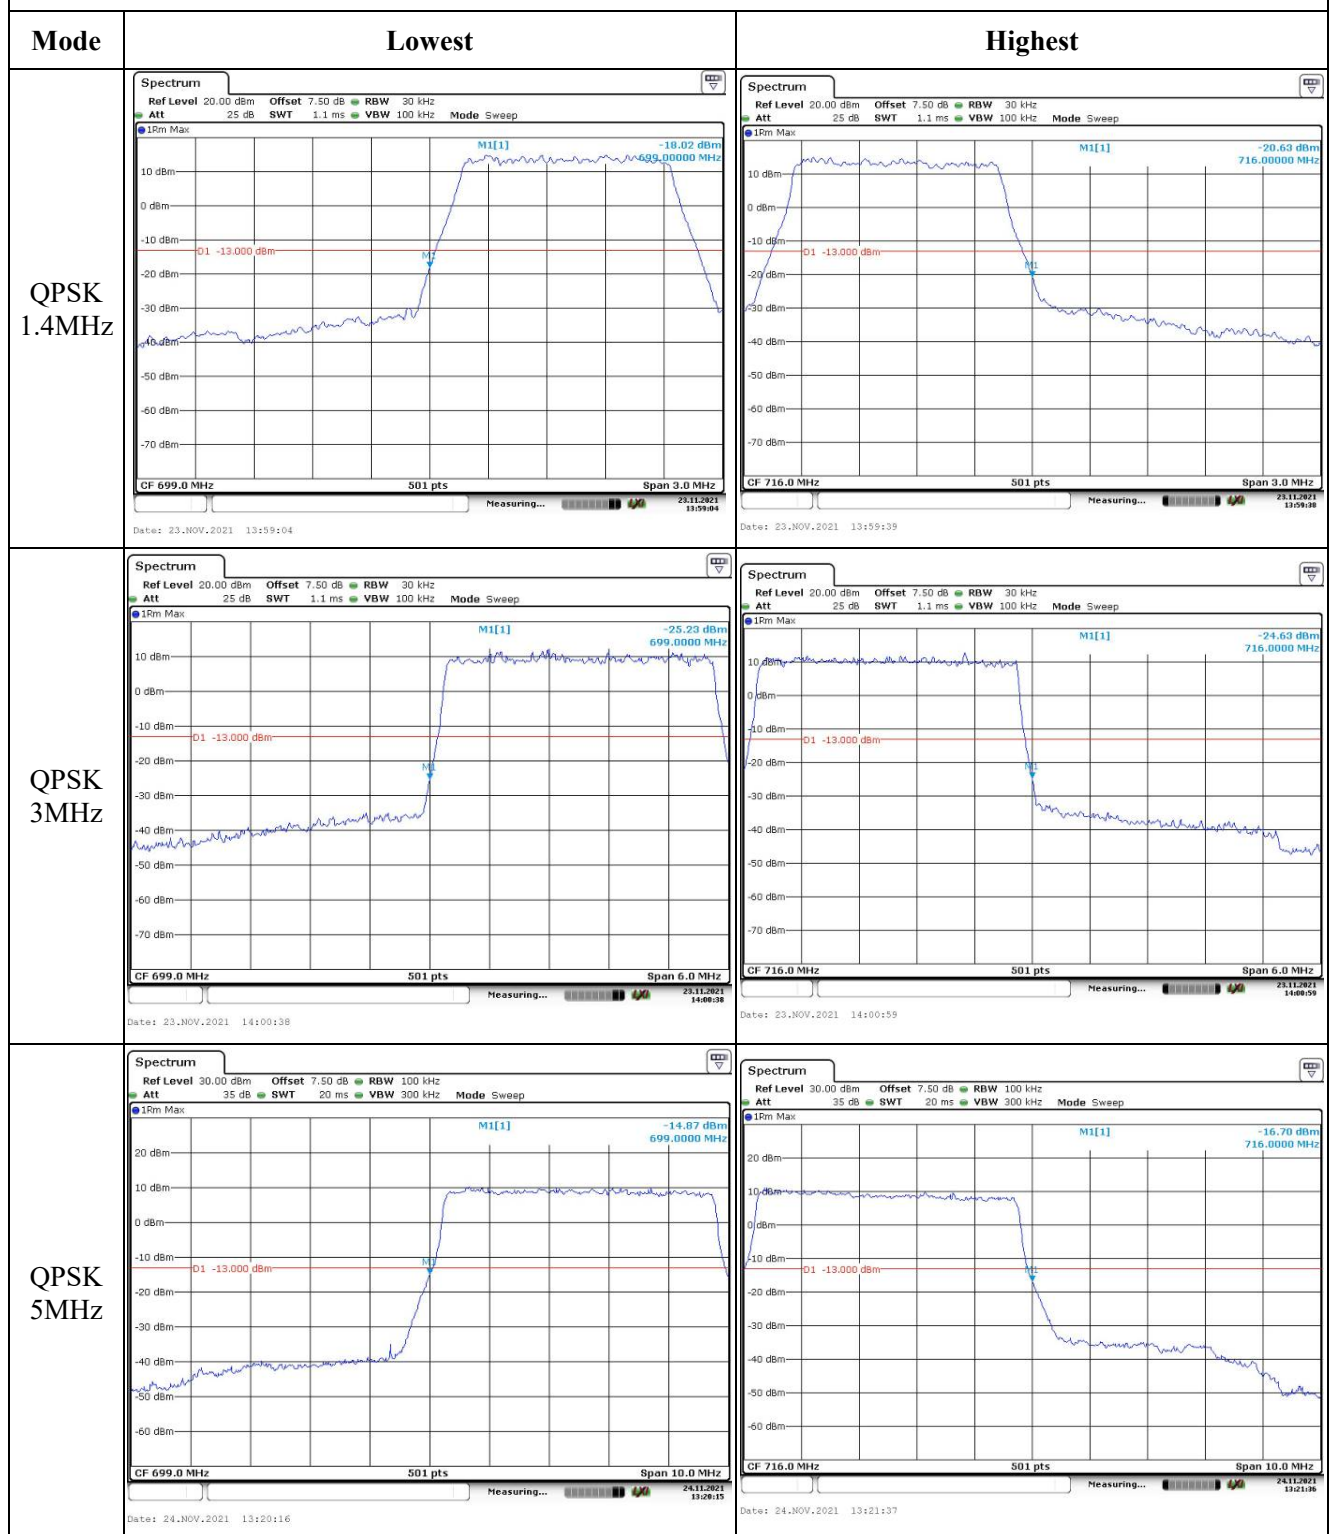


Out of band emission, Band Edge

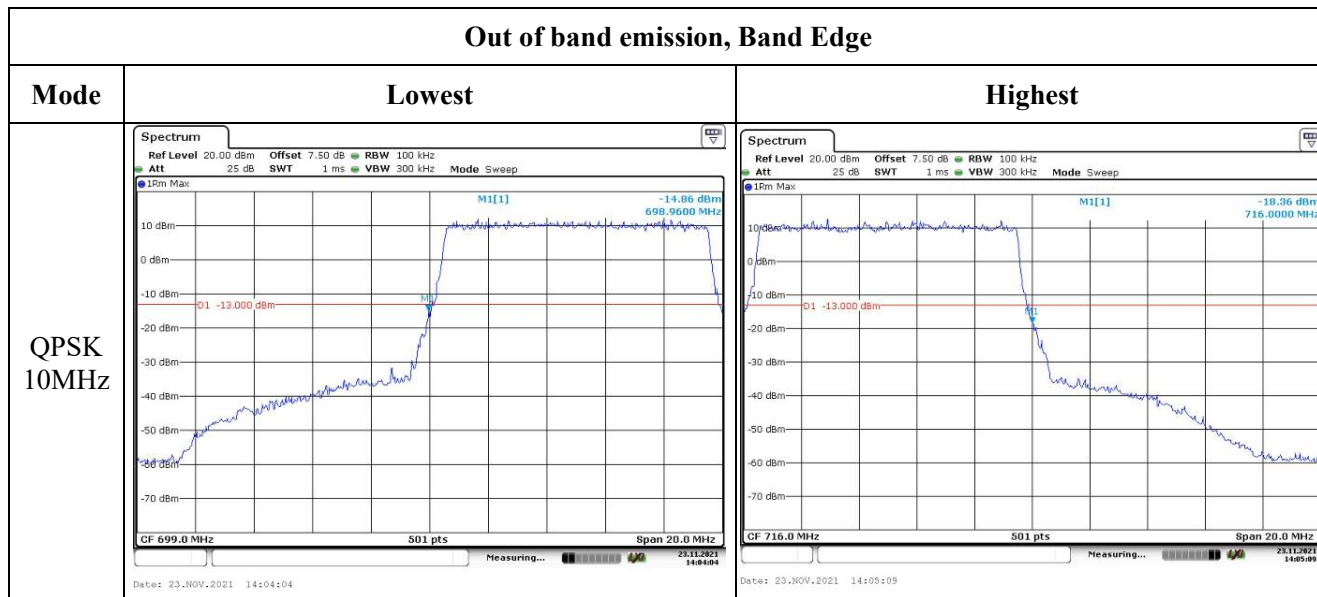

Out of band emission, Band Edge

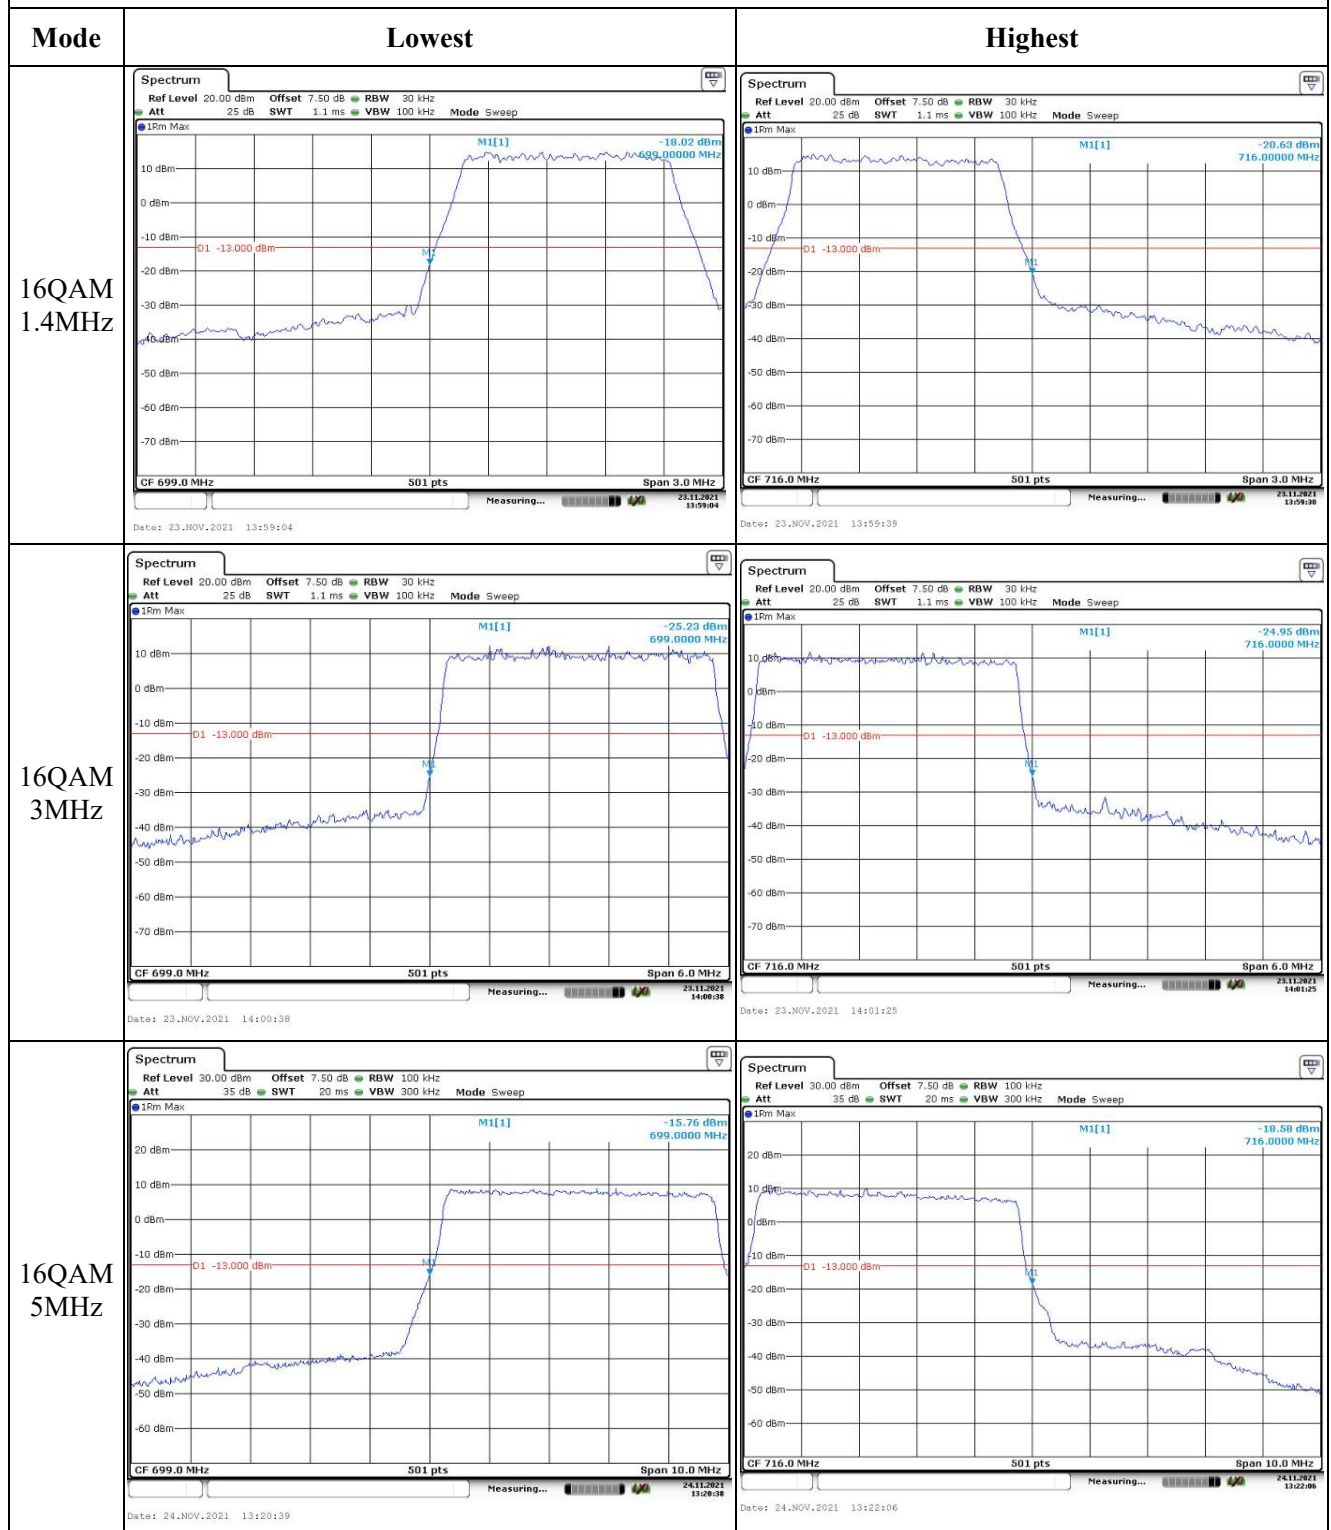

Out of band emission, Band Edge

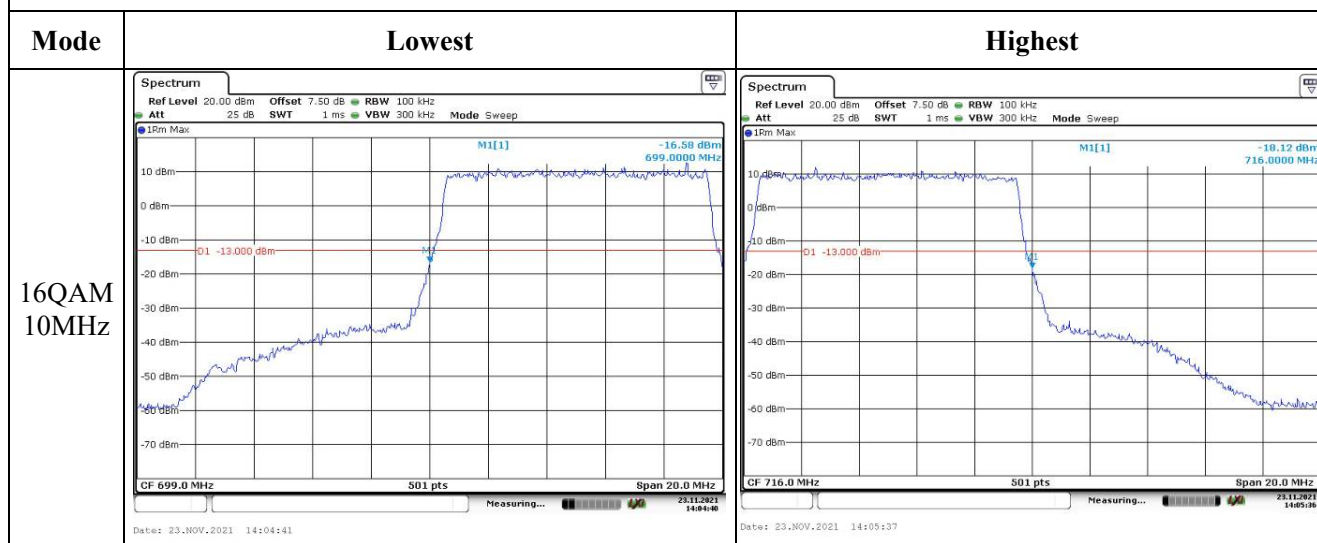

4.10 Antenna Port Test Data and Results for LTE Band 17

Serial Number:	CR21110011-RF-S1	Test Date:	2021-11-23~2021-11-24
Test Site:	966-2, 966-1	Test Mode:	Transmitting
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4~23.4	Relative Humidity: (%)	33~34	ATM Pressure: (kPa)	101.7
----------------------	-----------	------------------------------	-------	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
Mini-Circuits	DC Block	BLK-18-S+	1554403	Each time	N/A
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D09	N/A	N/A
Weinschel	Coaxial Attenuators	53-20-34	LN751	Each time	N/A
R&S	Wideband Radio Communication Tester	CMW500	149218	2021/7/22	2022/7/21
BACL	TEMP&HUMI Test Chamber	BTH-150	30026	2021/7/22	2022/7/22
UNI-T	Multimeter	UT39A+	C210582554	2021/9/30	2022/9/30
E-Microwave	Two-way Splitter	ODP-1-6	OE0120176	Each Time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

EUT Information@LTE Band 17▲:

Antenna Gain (dBi):	0.6	Antenna Gain (dBd):	-1.55	Cable Loss (dB):	0.4
Operation Voltage(V _{DC}):					
Lowest:	3.6	Normal:	3.85	Highest:	4.35

Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
5MHz	706.5	710	713.5
10MHz	709	710	711

Test Data:**FCC§2.1046;§ 27.50(c) (10)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum ERP(dBm)	ERP Limit(dBm)
		Lowest Channel	Middle Channel	Highest Channel		
5MHz QPSK	RB1#0	18.95	18.25	18.83	18.03	34.77
	RB1#13	18.36	18.25	18.85		
	RB1#24	18.69	18.52	18.25		
	RB15#0	18.93	18.28	18.58		
	RB15#10	18.95	18.55	19.93		
	RB25#0	18.95	18.55	19.98		
5MHz 16QAM	RB1#0	19.82	18.97	19.97	18.02	34.77
	RB1#13	18.99	19.34	18.12		
	RB1#24	19.89	19.23	19.06		
	RB15#0	19.11	18.91	19.12		
	RB15#10	19.17	18.98	18.93		
	RB25#0	19.08	18.98	18.98		
10MHz QPSK	RB1#0	18.33	19.99	19.98	18.04	34.77
	RB1#25	18.11	18.89	19.98		
	RB1#49	18.41	18.88	19.93		
	RB25#0	18.47	18.99	19.96		
	RB25#25	18.71	19.96	19.88		
	RB50#0	18.47	19.98	19.93		
10MHz 16QAM	RB1#0	18.58	18.06	19.99	18.04	34.77
	RB1#25	18.75	18.30	19.14		
	RB1#49	18.33	18.15	19.07		
	RB25#0	19.08	18.98	19.02		
	RB25#25	19.11	18.94	18.94		
	RB50#0	19.10	18.95	18.97		

Note: ERP=Conducted Power(dBm) - Cable loss(dB) + Antenna Gain(dBd)

Result:**Pass****Peak-to-average Ratio(PAR)**

Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
10MHz QPSK	RB1#0	5.91	4.99	5.77	13
	RB50#0	5.45	5.42	5.28	13
10MHz 16QAM	RB1#0	6.32	5.91	7.1	13
	RB50#0	6.49	6.29	6.2	13
Result:					Pass

FCC §2.1049, §27.53:Occupied Bandwidth

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
5MHz QPSK	4.511	4.531	4.511	5.22	5.14	5.16
5MHz 16QAM	4.511	4.531	4.531	5.16	5.18	5.18
10MHz QPSK	8.981	8.942	8.981	9.96	9.88	9.92
10MHz 16QAM	8.942	8.981	8.981	9.88	9.92	9.8

Note: The test plots please refer to the Plots of Occupied Bandwidth

FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal

Result:	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.
----------------	---

FCC §2.1051, §27.53:Out of band emission, Band Edge


Result:	Pass, Please refer to the test plots of Out of band emission, Band Edge.
----------------	--

FCC §2.1055, §27.54: Frequency Stability


Test Mode:	10M QPSK	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	704.513	704.00	715.485	716.00
	-20	3.85	704.512	704.00	715.487	716.00
	-10	3.85	704.513	704.00	715.487	716.00
	0	3.85	704.514	704.00	715.485	716.00
	10	3.85	704.513	704.00	715.486	716.00
	20	3.85	704.514	704.00	715.486	716.00
	30	3.85	704.514	704.00	715.485	716.00
	40	3.85	704.515	704.00	715.485	716.00
	50	3.85	704.515	704.00	715.484	716.00
Frequency Stability vs. Voltage	20	3.6	704.515	704.00	715.486	716.00
	20	4.35	704.512	704.00	715.487	716.00
Result:					Pass	

Test Mode:	10M 16QAM	Test Channel: Lowest for Lower Edge, Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V _{DC})	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.85	704.514	704.00	715.456	716.00
	-20	3.85	704.513	704.00	715.458	716.00
	-10	3.85	704.512	704.00	715.456	716.00
	0	3.85	704.513	704.00	715.454	716.00
	10	3.85	704.513	704.00	715.456	716.00
	20	3.85	704.514	704.00	715.457	716.00
	30	3.85	704.514	704.00	715.456	716.00
	40	3.85	704.516	704.00	715.457	716.00
	50	3.85	704.514	704.00	715.458	716.00
Frequency Stability vs. Voltage	20	3.6	704.516	704.00	715.456	716.00
	20	4.35	704.514	704.00	715.457	716.00
					Result:	Pass


Test Plots:

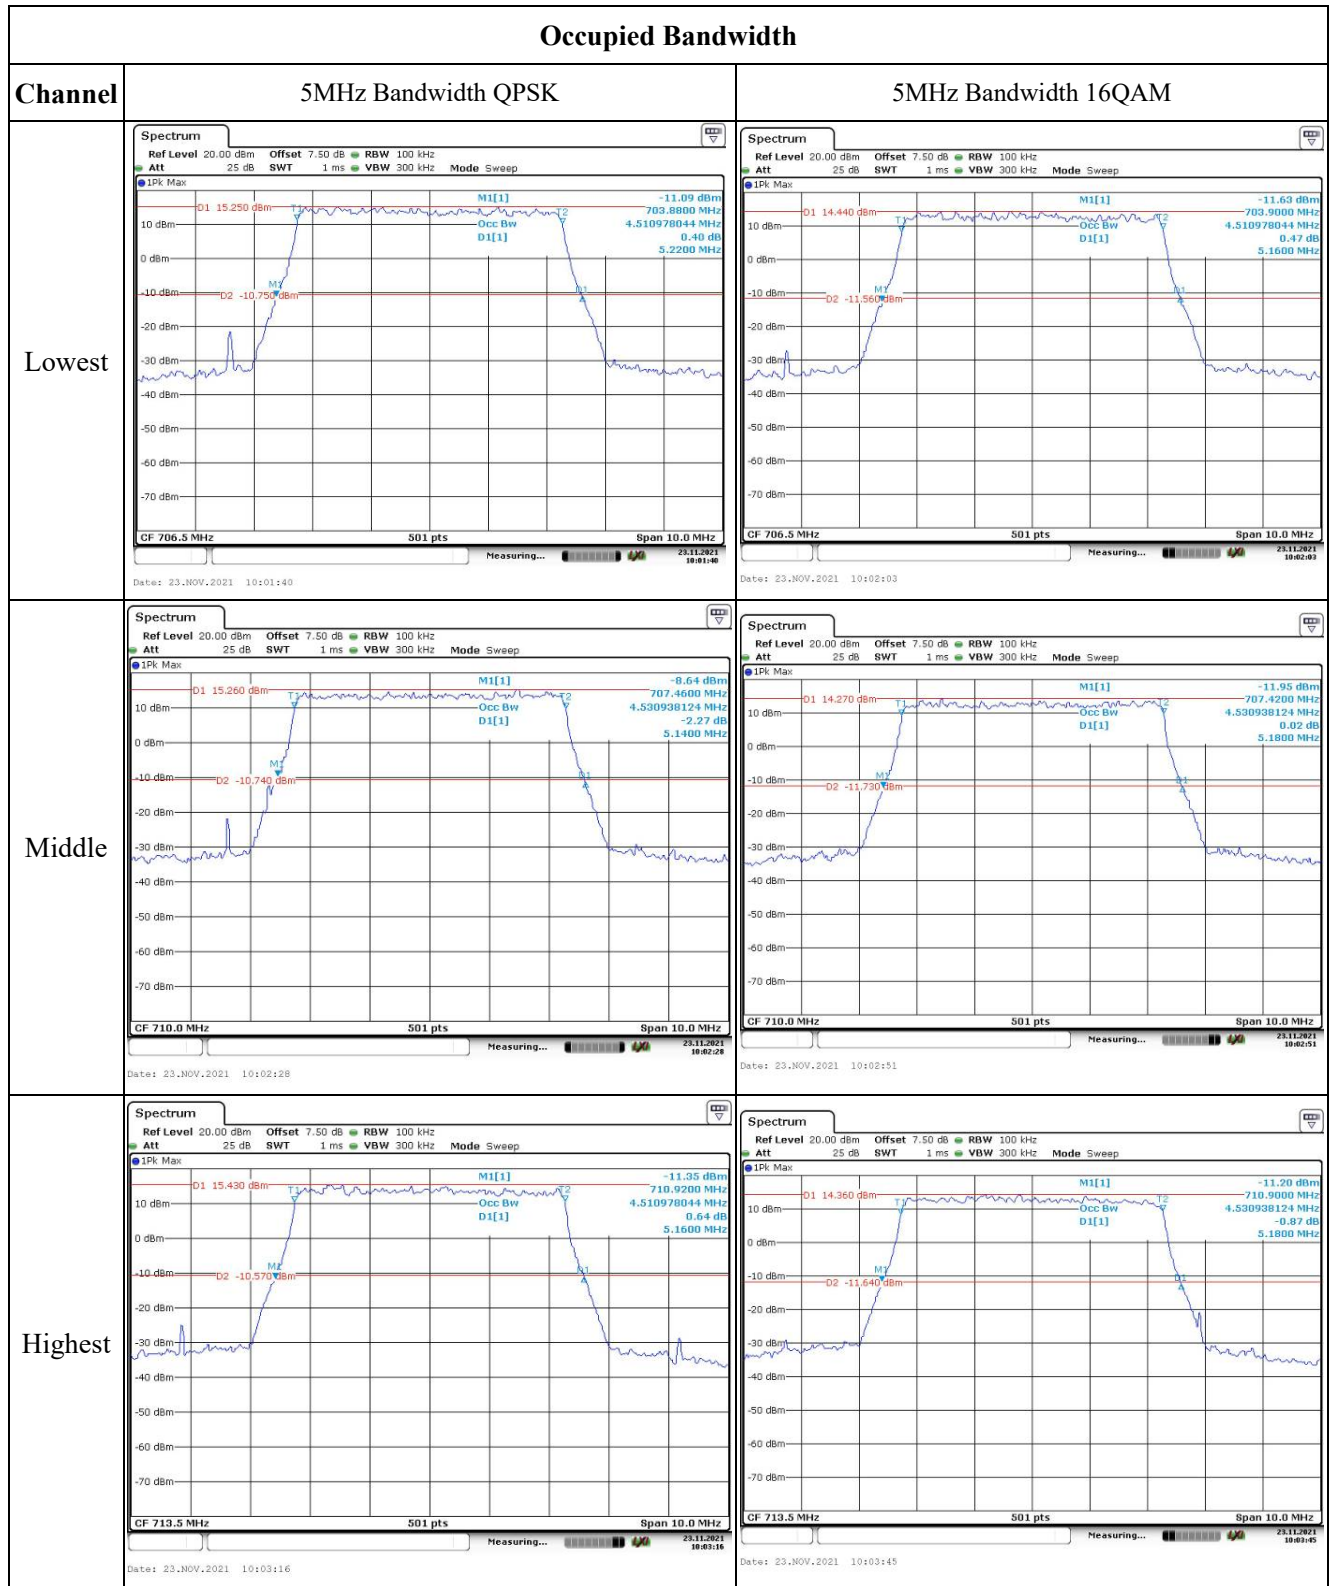

Occupied Bandwidth

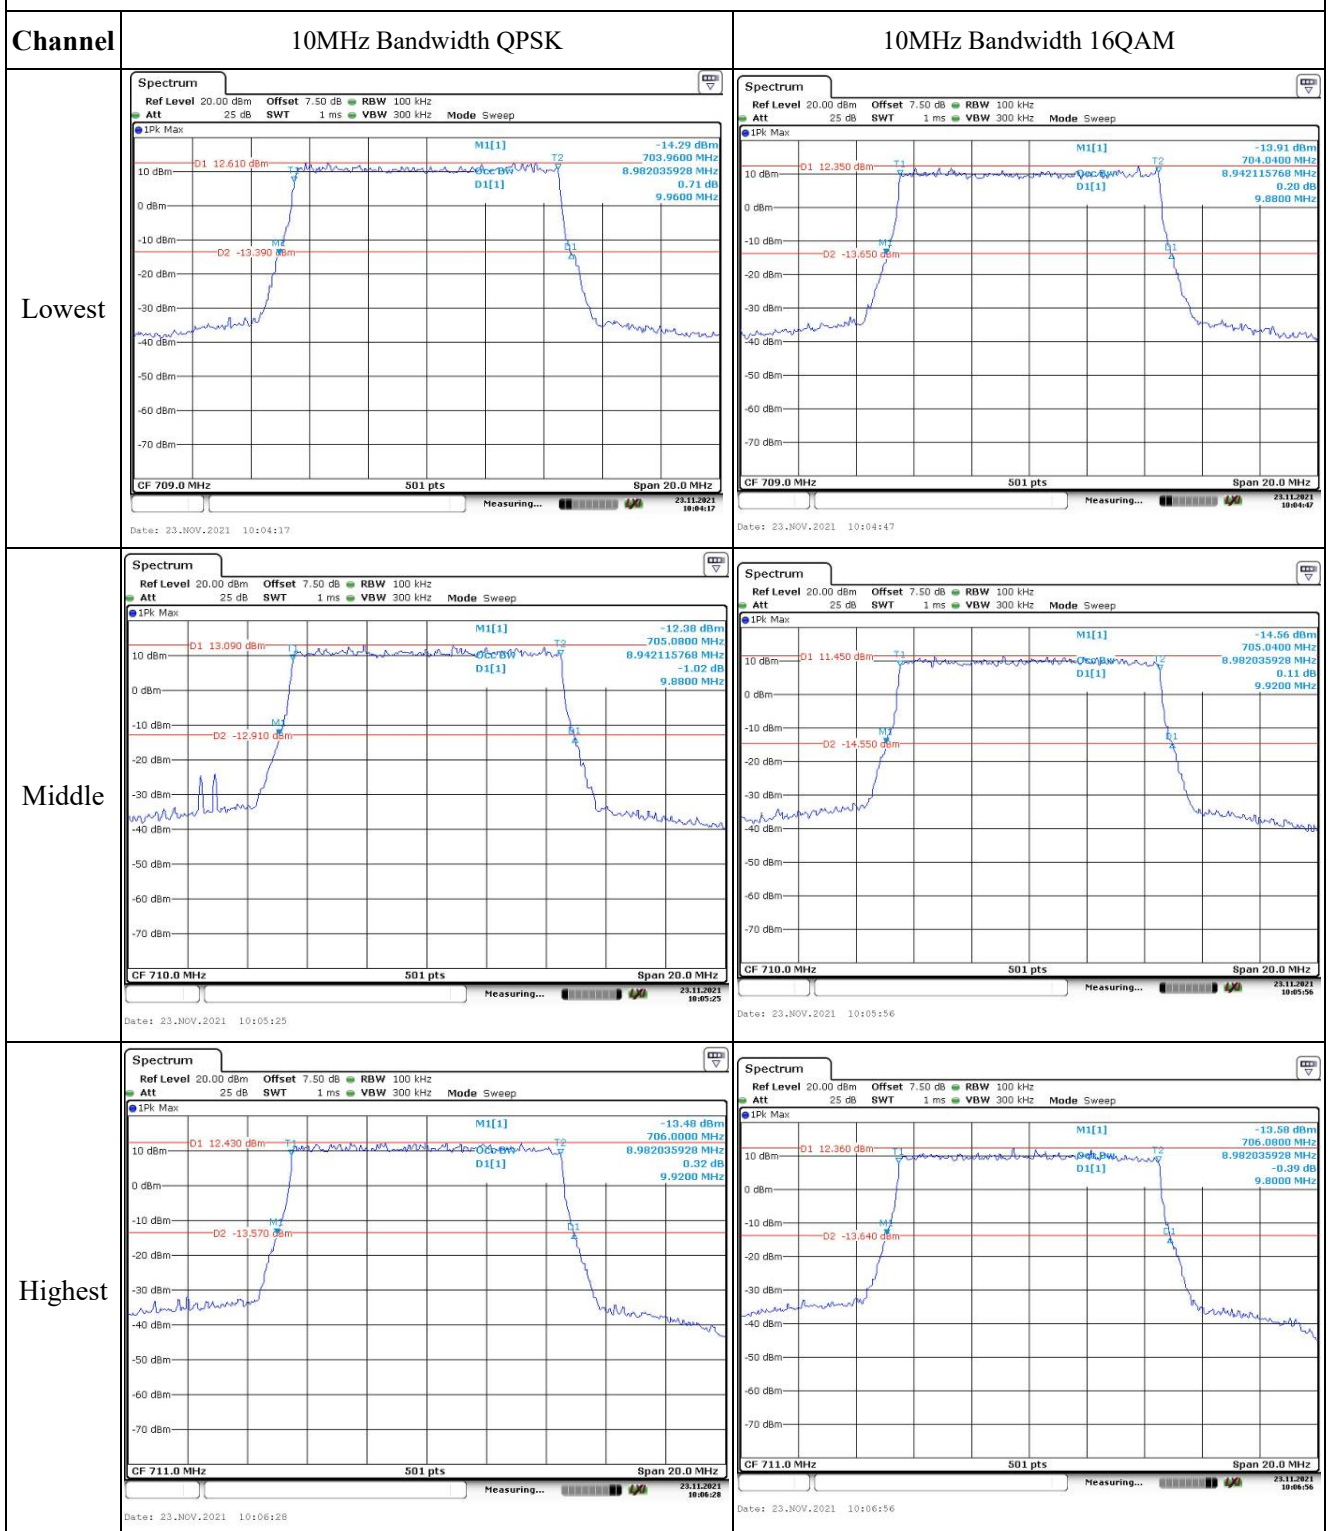

Spurious Emissions at Antenna Terminal


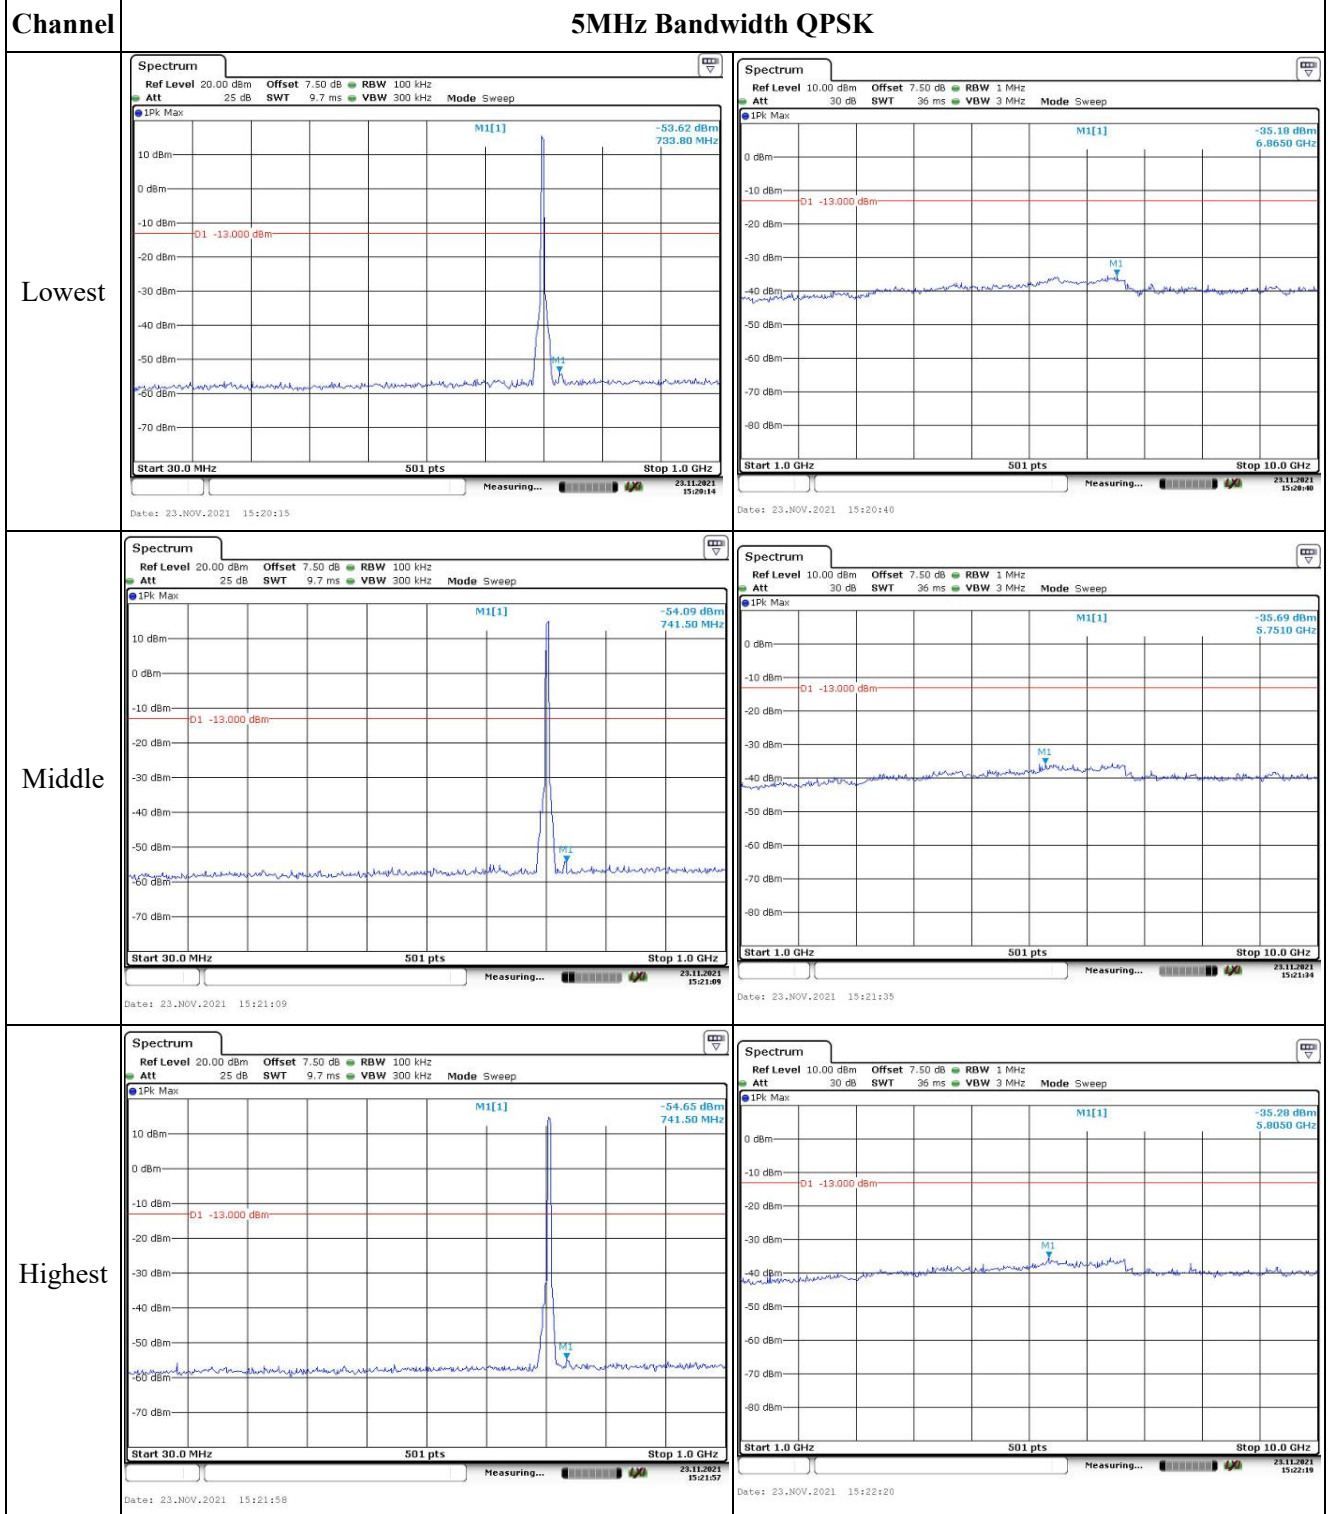


Spurious Emissions at Antenna Terminal



Channel

10MHz Bandwidth QPSK

Lowest

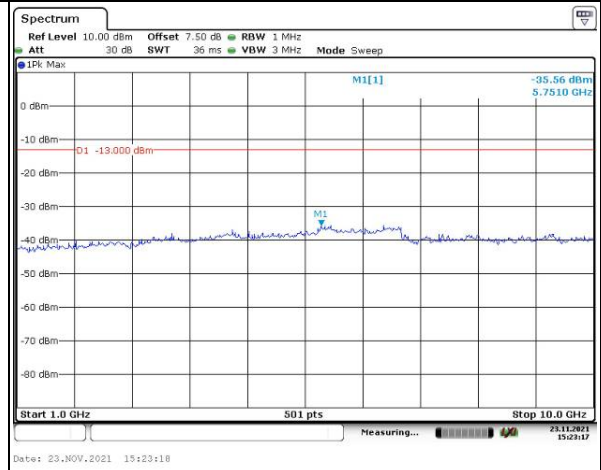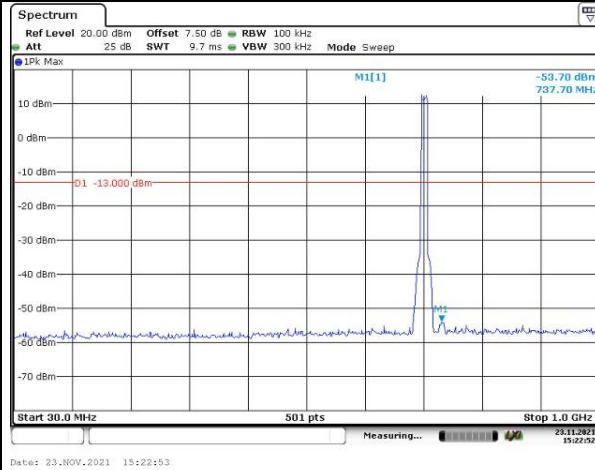

Middle

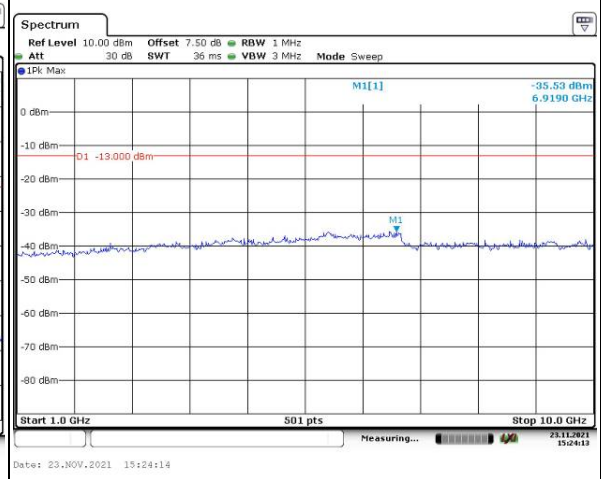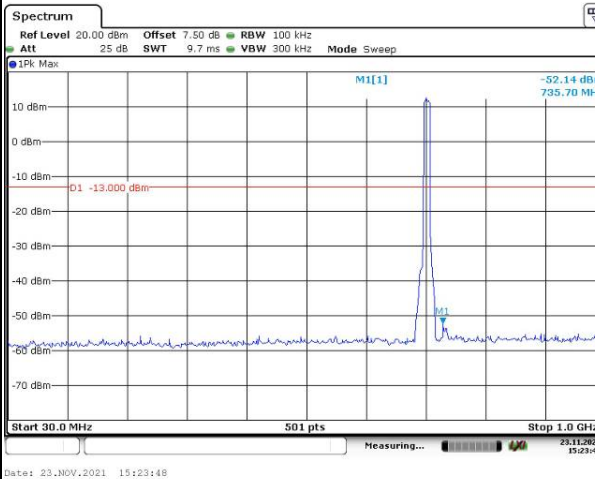

Highest

