

Meas.1 Body Plane with Horizontal-Up 5mm on Middle Channel in LTE Band26 mode with Antenna 1

Date: 2026.02.12

Communication System Band: Band26,E-UTRA/FDD(814-849); Frequency: 831.5 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 41.395$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature:22.7°C Liquid Temperature:21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73, 9.73, 9.73); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch26865/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.697 W/kg

Ch26865/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.22 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.975 W/kg

SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.9%

Maximum value of SAR (measured) = 0.688 W/kg

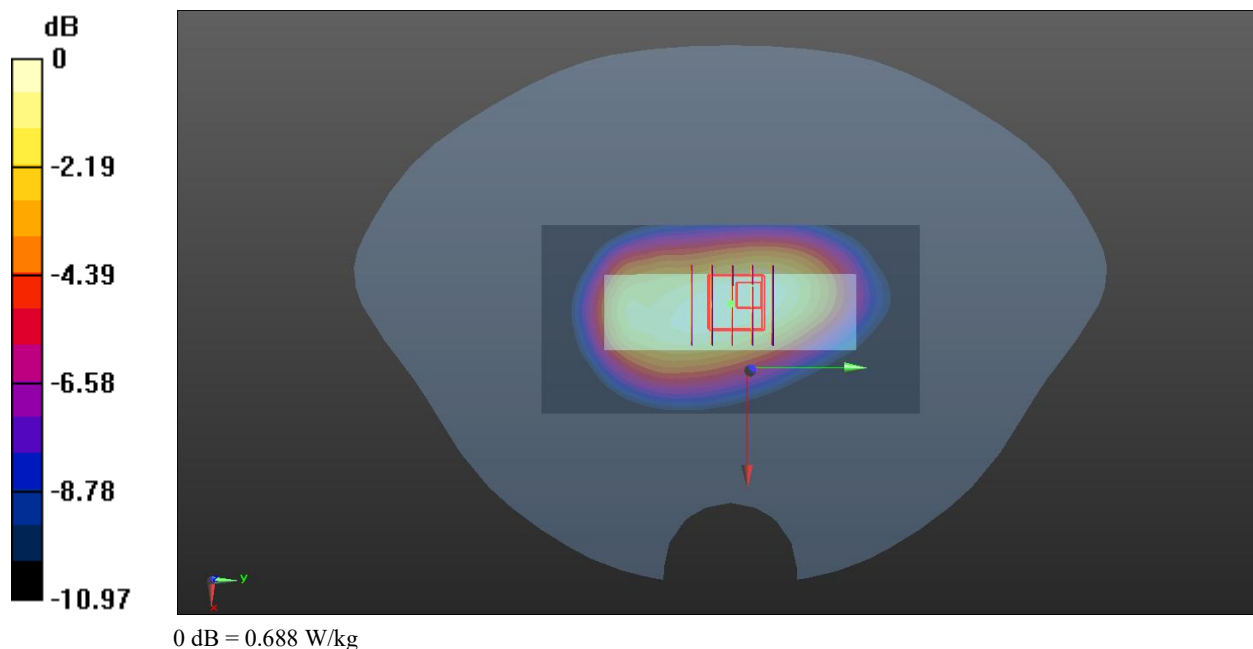

Meas.2 Body Plane with Horizontal-Down 5mm on High Channel in LTE Band41 mode with Antenna 1

Date: 2026.03.20

Communication System Band: Band 41, E-UTRA/TDD (2496.0 - 2690.0 MHz); Frequency: 2680 MHz; Duty Cycle: 1:1.58

Medium parameters used (interpolated): $f = 2680$ MHz; $\sigma = 2.068$ S/m; $\epsilon_r = 38.058$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52, 7.52, 7.52); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch41490/Area Scan (51x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Ch41490/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.245 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.349 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 1.03 W/kg

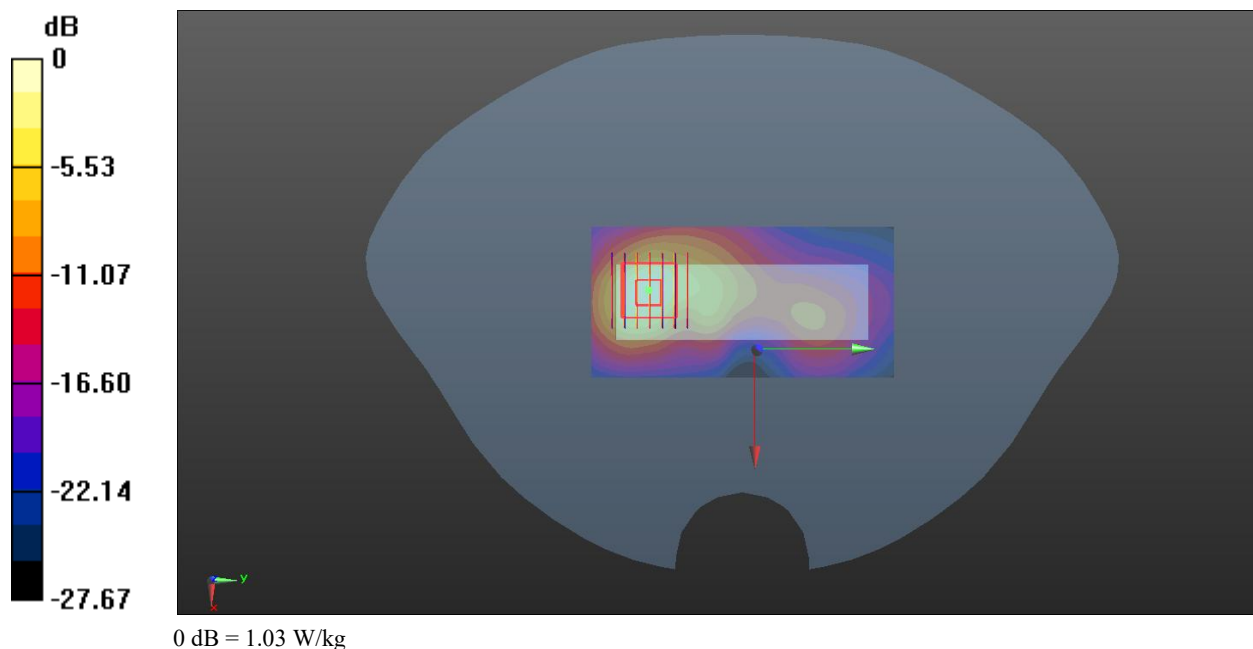

Meas.3 Body Plane with Horizontal-Up 5mm on 167800 Channel in N26 mode with Antenna 1

Date: 2026.02.13

Communication System Band: N26; Frequency: 839 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 839$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 41.568$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.8°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(9.73, 9.73, 9.73); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch167800/Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.748 W/kg

Ch167800/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.39 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.02 W/kg

SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.417 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.9%

Maximum value of SAR (measured) = 0.729 W/kg

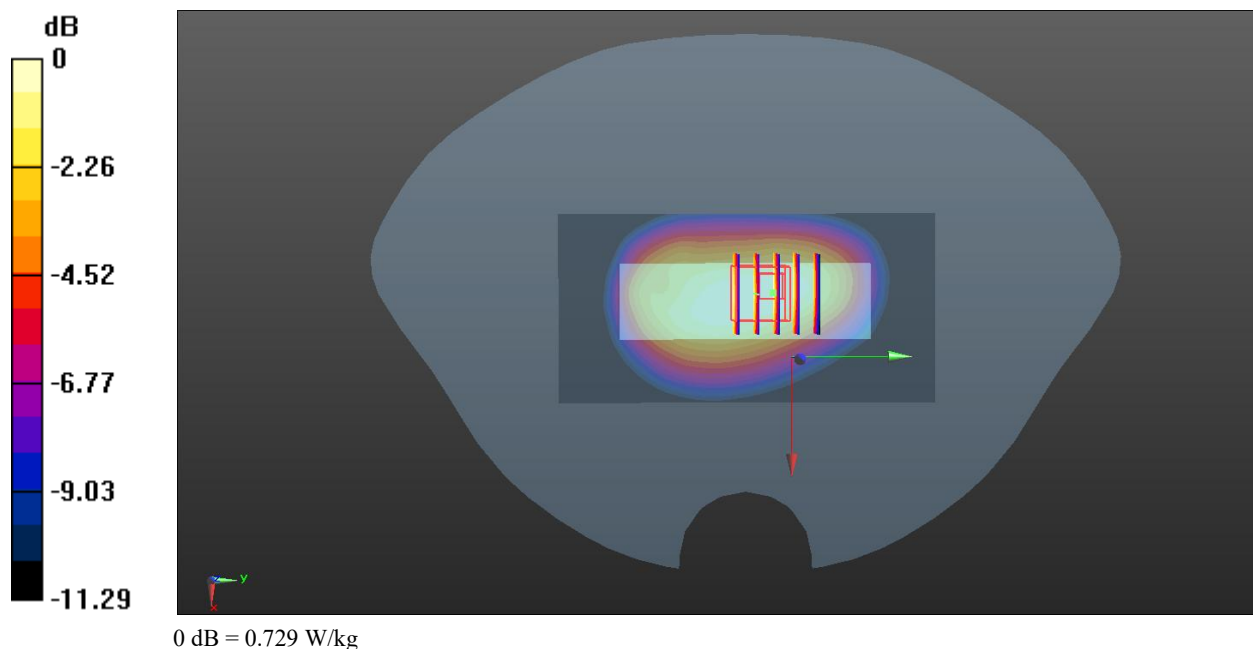

Meas.4 Body Plane with Horizontal-Up 5mm on 535998 Channel in N41 mode with Antenna 1

Date: 2026.03.21

Communication System Band: N41; Frequency: 2679.99 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2679.99$ MHz; $\sigma = 2.076$ S/m; $\epsilon_r = 38.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.6°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.52, 7.52, 7.52); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch535998/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.16 W/kg

Ch535998/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.58 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 2.50 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.445 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 47%

Maximum value of SAR (measured) = 1.25 W/kg

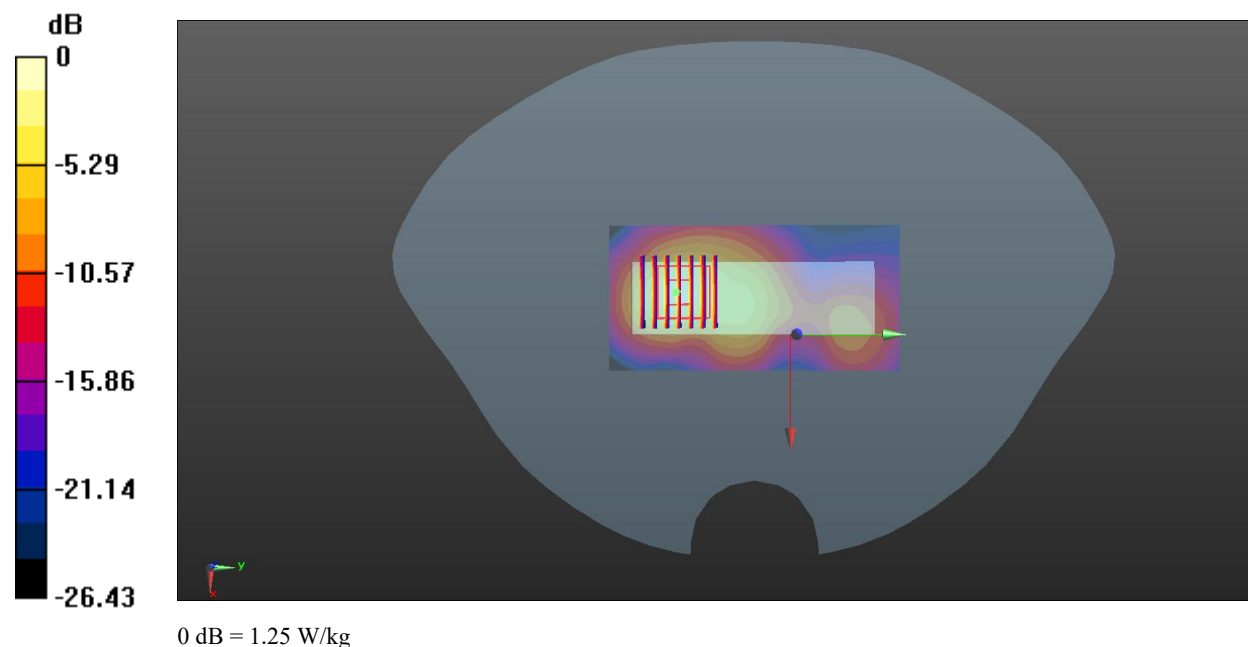

Meas.5 Body Plane with Horizontal-Down 5mm on 633334 Channel in N77 mode with Antenna 3

Date: 2026.03.22

Communication System Band: N77; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 37.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(6.95, 6.95, 6.95); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch633334/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.466 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 8.452 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.434 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 44.8%

Maximum value of SAR (measured) = 0.466 W/kg

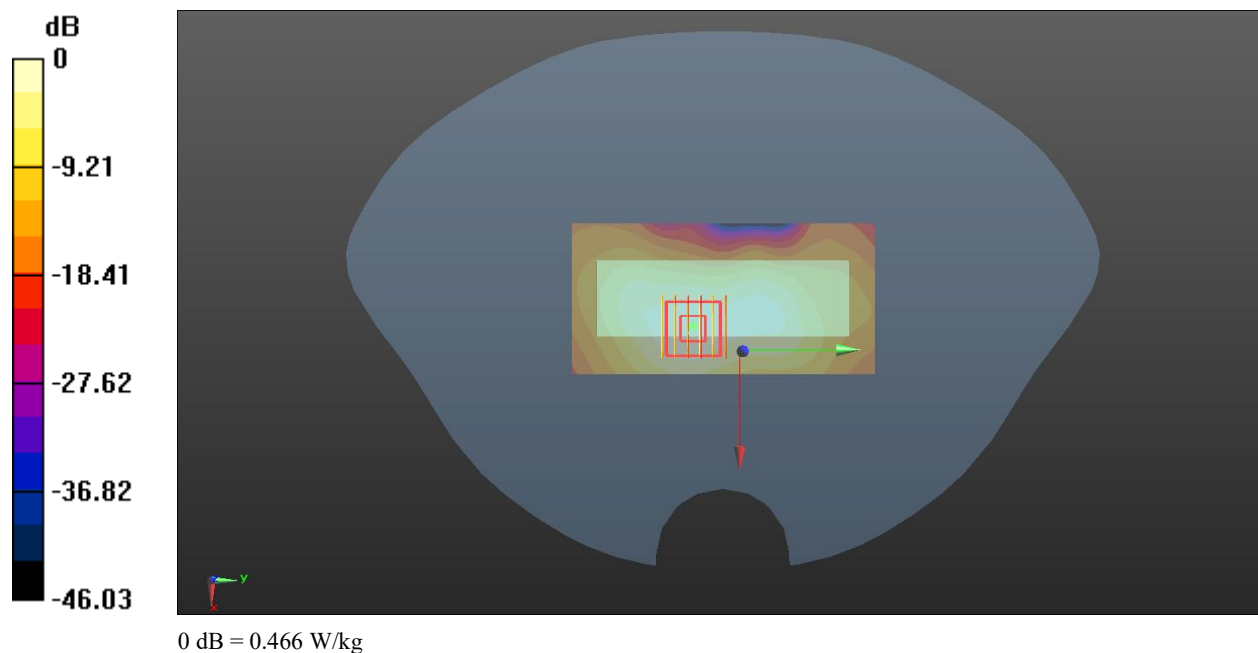

Meas.6 Body Plane with Horizontal-Down 5mm on 656000 Channel in N77 mode with Antenna 3

Date: 2026.03.23

Communication System Band: N77; Frequency: 3840 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3840$ MHz; $\sigma = 3.273$ S/m; $\epsilon_r = 38.032$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(6.67, 6.67, 6.67); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch656000/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.727 W/kg

Ch656000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 10.59 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.255 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.639 W/kg

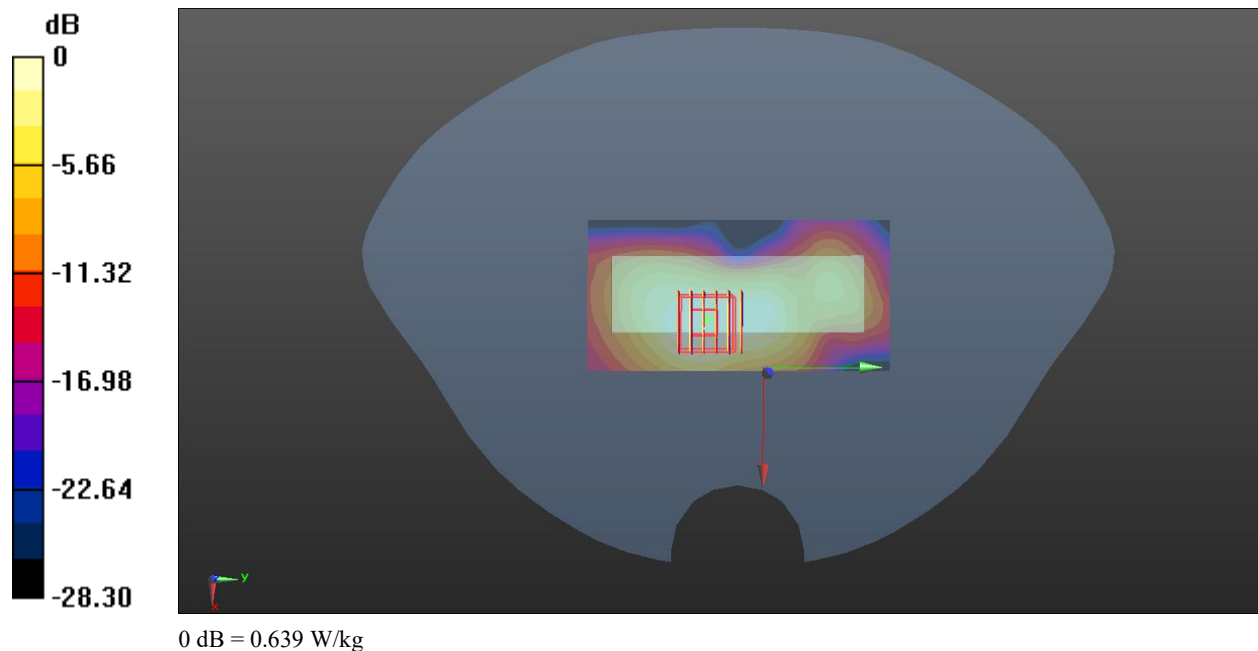

Meas.7 Body Plane with Horizontal-Down 5mm on 633334 Channel in N78 mode with Antenna 3

Date: 2026.03.22

Communication System Band: N78; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 3500.01$ MHz; $\sigma = 2.973$ S/m; $\epsilon_r = 37.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(6.95, 6.95, 6.95); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch633334/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.552 W/kg

Ch633334/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 10.16 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.517 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.2%

Maximum value of SAR (measured) = 0.574 W/kg

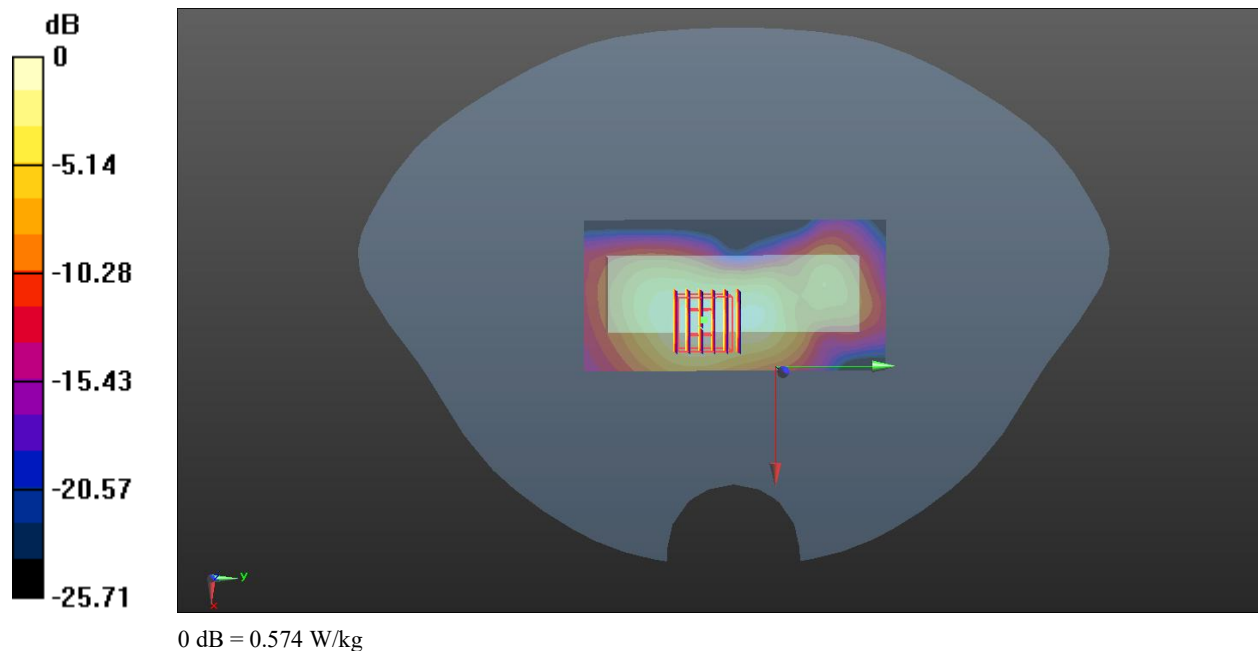

Meas.8 Body Plane with Horizontal-Down 5mm on 650000 Channel in N78 mode with Antenna 3

Date: 2026.03.23

Communication System Band: N78; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3750$ MHz; $\sigma = 3.154$ S/m; $\epsilon_r = 37.073$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(6.75, 6.75, 6.75); Calibrated: 2025.11.11;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1711; Calibrated: 2025.11.11
- Phantom: Twin SAM V5.0; Type: QD000P40CD; Serial: 1858
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch650000/Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.473 W/kg

Ch650000/Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=4mm

Reference Value = 7.506 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 0.485 W/kg

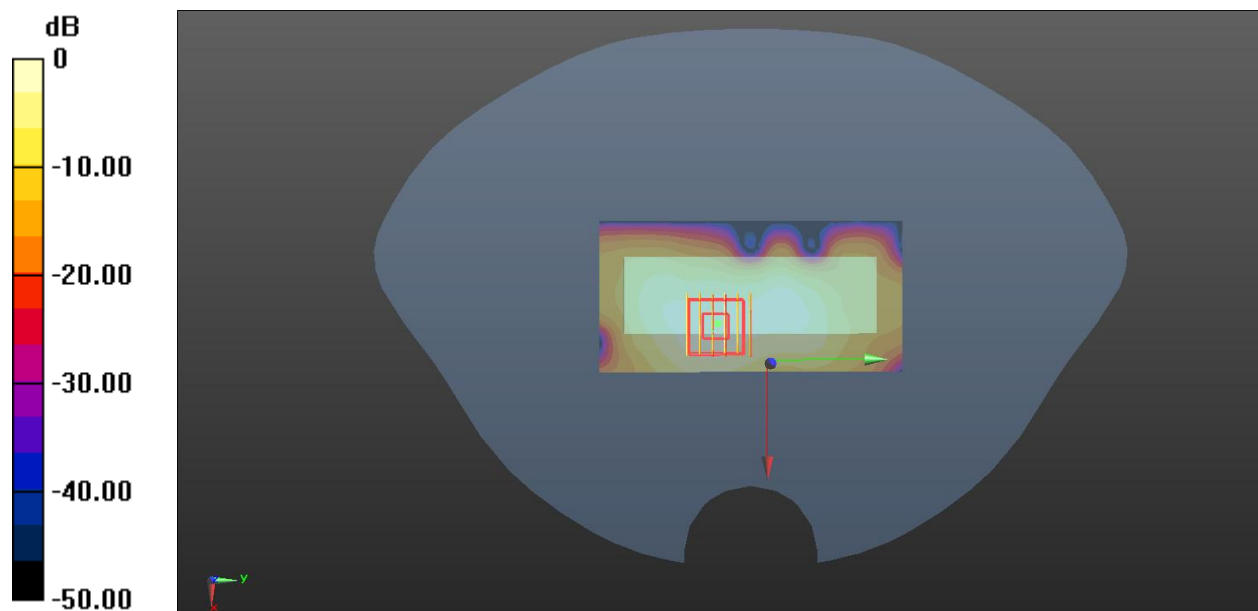

0 dB = 0.485 W/kg