



TEST REPORT

Applicant: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
Address of Applicant: INDUSTRIALZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX
China
Manufacturer: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
Addressof Manufacturer: INDUSTRIAL ZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX
China
Product Name: Smart phone
Model No.: C26 Mini,C26,C26 S,C26 E,C26 Pro,C26 Plus,C26 Ultra,C26 Max,C26
GT,C26 Go,C26 Lite
Trade Mark: OUKITE
FCC ID: 2ANMU-C26MINI
Applicable standards: 47CFR Part 15.247
Date of Test: Sept. 03, 2026- Sept. 15, 2026
Date of report issued: Sept. 15, 2026

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Project Engineer

Reviewed by:

Project Manager

Approved by:

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-26094838E01	Original	Sept. 15, 2026



Contents

Page

1	TEST SUMMARY	4
2	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	TEST MODE	7
2.3	DESCRIPTION OF SUPPORT UNITS	7
2.4	TEST FACILITY	7
2.5	ADDITIONAL INSTRUCTIONS	7
3	TEST INSTRUMENTS LIST	8
4	TEST RESULTS AND MEASUREMENT DATA	9
4.1	ANTENNA REQUIREMENT	9
4.2	CONDUCTED EMISSIONS	10
4.3	CONDUCTED PEAK OUTPUT POWER	13
4.4	20dB EMISSION BANDWIDTH	14
4.5	CARRIER FREQUENCIES SEPARATION	15
4.6	HOPPING CHANNEL NUMBER	16
4.7	DWELL TIME	17
4.8	BAND EDGE	18
4.8.1	<i>Conducted Emission Method</i>	18
4.8.2	<i>Radiated Emission Method</i>	19
4.9	SPURIOUS EMISSION	21
4.9.1	<i>Conducted Emission Method</i>	21
4.9.2	<i>Radiated Emission Method</i>	22
5	APPENDIX 1-TEST DATA	30
6	TEST SETUP PHOTO	92
7	EUT CONSTRUCTIONAL DETAILS	92

1 Test Summary

Test Item	Section	Result	Test by
Antenna Requirement	47CRF Part15.203/15.247 (b) (4)	Pass	/
AC Power Line Conducted Emission	47CFR Part 15.207	Pass	Jason Huang
Conducted Peak Output Power	47CFR Part 15.247 (b)(1)	Pass	Oliver Wang
20dB Occupied Bandwidth	47CFR Part 15.247 (a)(1)	Pass	Oliver Wang
Carrier Frequencies Separation	47CFR Part 15.247 (a)(1)	Pass	Oliver Wang
Hopping Channel Number	47CFR Part 15.247 (a)(1)(iii)	Pass	Oliver Wang
Dwell Time	47CFR Part 15.247 (a)(1)(iii)	Pass	Oliver Wang
Radiated Emission	47CFR Part 15.205/15.209	Pass	Jason Huang
Band Edge	47CFR Part 15.247(d) 47CFR part 15.205/15.209	Pass	Oliver Wang

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024
and KDB558074 D01 15.247 Meas Guidance v05r02.
3. Note: Compliance determination rules
 - 1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacturer. If measurement uncertainty is taken into account, the applicant/manufacturer will bear all possible risks of non-compliance.
 - 2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	0.72%	(1)
RF output power, conducted	±0.67 dB	(1)
Power Spectral Density, conducted	±0.51 dB	(1)
Unwanted Emissions, conducted	±0.64 dB	(1)
AC Power Line Conducted Emission	± 3.38 dB	(1)
Radiated emissions 9K-30MHz	±4.26 dB	(1)
Radiated emissions 30M- 1GHz	±4.88 dB	(1)
Radiated emissions 1GHz-18GHz	± 4.16 dB	(1)
Radiated emissions 18GHz-40GHz	±4.14 dB	(1)
Frequency error	Uc=6X10 ⁻⁷	(1)
Dwell Time	±0.03	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

2 General Information

2.1 General Description of EUT

Product Name:	Smart phone
Model No.:	C26 Mini,C26,C26 S,C26 E,C26 Pro,C26 Plus,C26 Ultra,C26 Max,C26 GT,C26 Go,C26 Lite
Difference of model(s):	Only different in model name
Test Model:	C26 Mini
Hardware Version:	N/A
Software Version:	N/A
Power supply:	Input: DC 5V 2A
Battery:	Model: S215 Brand: N/A Rated Voltage: 3.85V Charge Limit Voltage: 4.4V Capacity: 2300mAh Manufacturer: Zhongshan Jiuliyuan New Energy Technology Co., Ltd. Address: 2-3F, Building 4; 2-4F, Building 5, No. 20, Beichen Road, Cuiheng New Area, Nanlang Street, Zhongshan City, Guangdong Province, China
Adapter:	Model: HJ-0502000N2-US Brand: N/A Input: 100-240V~50/60Hz 0.3A Output: 5.0V~2.0A Manufacturer: SHENZHEN HUAJIN ELECTRONICSCO LTD Address: BLK E 518000/BLK E XINZHONGQIAO INDUSTRIAL PARK BAOLONG SIX RD BAOLONG INDUSTRIAL CITY LONGGANGDISTRICT,SHENZHEN,GUANGDONG,518000CHINA
Radio Technology:	Bluetooth EDR
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK,8DPSK
Antenna Type:	FPC antenna
Antenna gain:	-0.7dBi
Note: 1.For more details, refer to the user's manual of the EUT. 2.Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

2.2 Test mode

Conducted test	Link mode
RF and Radiated test	Transmitting mode (Keep the EUT in Max. power level continuously transmitting mode.)
Remark: the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	/	/	/	/
2	/	/	/	/
3	/	/	/	/

2.4 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064
IC Company Number:	28440
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

2.5 Additional Instructions

Test Software	Engineering mode
Power level setup	6

3 Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101214	2026.3.05	2027.3.04
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2026.3.05	2027.3.04
3	Loop Antenna	schwarabeck	FMZB 1519 B	128	2026.3.08	2028.3.07
4	Broadband antenna	schwarabeck	VULB9168	1064	2026.3.11	2028.3.10
5	Horn antenna	schwarabeck	BBHA9120D	2288	2026.3.08	2028.3.07
6	amplifier	EMtrace	RP01A	50117	2026.3.05	2027.3.04
7	AMN	schwarabeck	NSLK8127	8127483	2026.3.05	2027.3.04
8	AMN	ETS	3186/2NM	1132	2026.3.05	2027.3.04
9	10dB attenuator	HUBER+SUHN R	10dB	/	2026.3.05	2027.3.04
10	amplifier	Space-Dtronics	EWLAN0118G-P40	19113001	2026.3.05	2027.3.04
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2026.3.05	2027.3.04
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2026.3.05	2027.3.04
13	Power control box	MWRFTest	MW100-PSB	MW201020JYT	2026.3.05	2027.3.04
14	Power Sensor	Keysight	U2021XA	MY54111006	2026.3.05	2027.3.04
15	amplifier	SKET	LNPA_1840-50 (18-40GHz)	19113001	2026.3.05	2027.3.04
16	Horn antenna	schwarabeck	BBHA 9170	946	2026.3.08	2028.3.07
17	Spectrum analyzer	Rohde&schwarz	FSU40	1166.1660K43	2026.3.05	2027.3.04
18	Temp. & Humidity Chamber	Jiecheng Instrument	QA-LP-80	20160705001	2026/3/06	2027/3/05

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4 Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(b) (4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4)requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
E.U.T Antenna:	
The antenna is FPC antenna,, the best case gain of the is -0.7dBi, reference to the Internal photos for details.	

4.2 Conducted Emissions

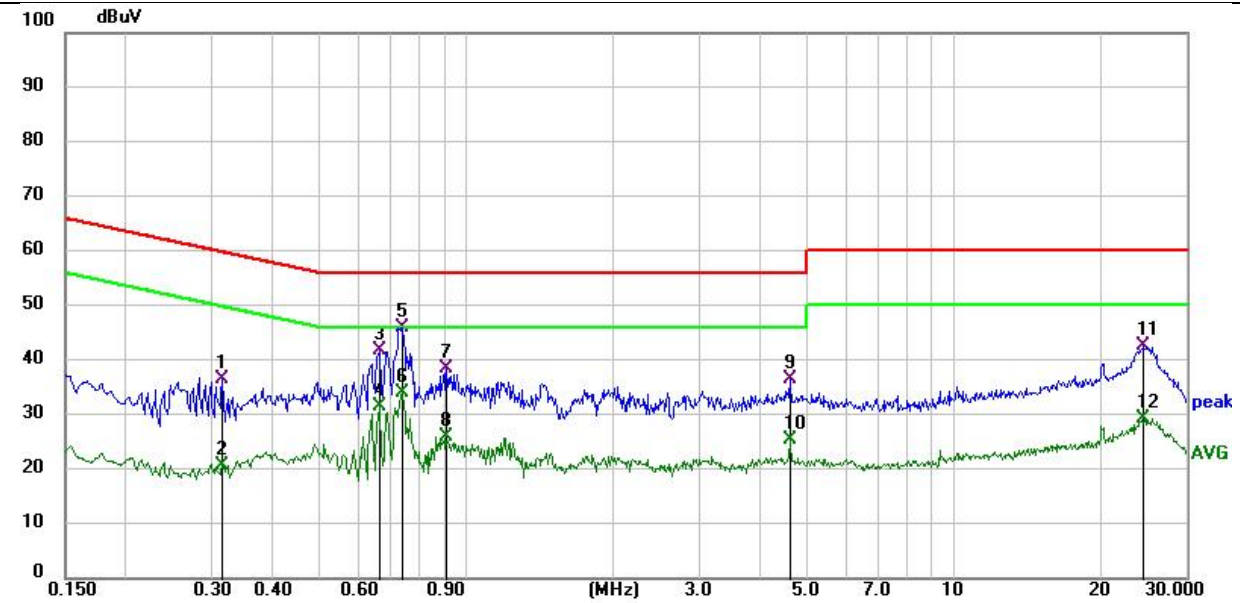
Test Requirement:	47CRF Part 15.207						
Test Method:	ANSI C63.10:2020 §6.2						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T LISN Filter EMI Receiver Test table/Insulation plane 80cm AC power Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2020 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	24.8℃	Humid.:	51%	Press.:	1002 mbar	
Test voltage:	AC 120V 60Hz						
Test results:	Pass						

Remark:

1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode 8DPSK (2402MHz) data.

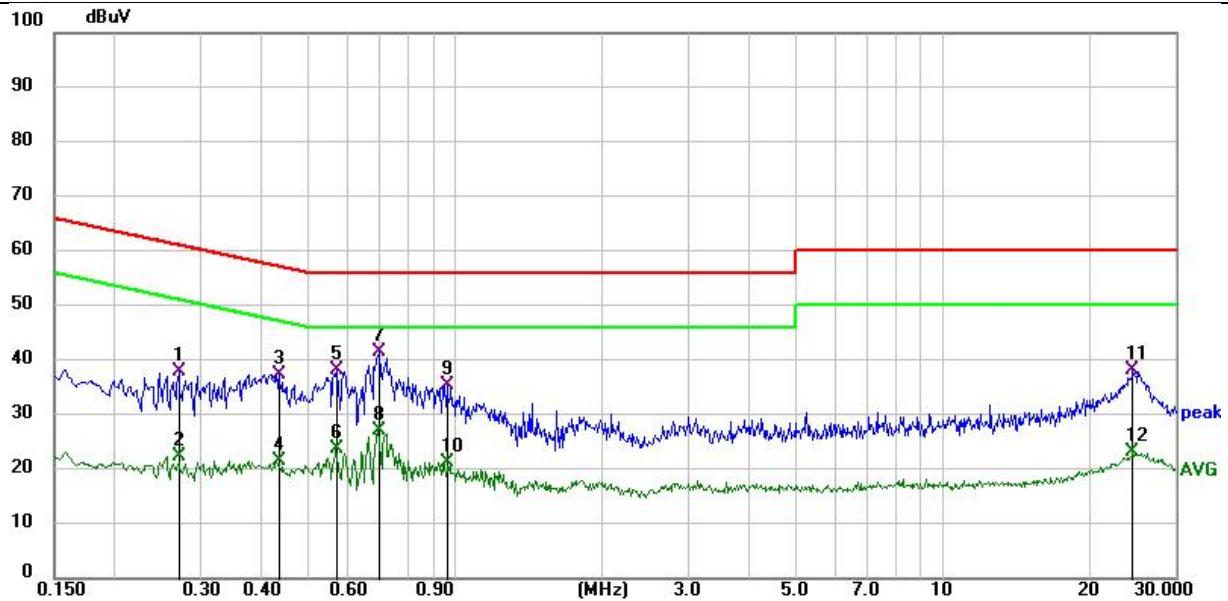
Measurement data:

Line:



No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Pass/Fail
1	0.3140	17.08	19.36	36.44	59.86	-23.42	QP	Pass
2	0.3140	1.47	19.36	20.83	49.86	-29.03	AVG	Pass
3	0.6580	22.40	19.38	41.78	56.00	-14.22	QP	Pass
4	0.6580	12.28	19.38	31.66	46.00	-14.34	AVG	Pass
5 *	0.7380	26.72	19.37	46.09	56.00	-9.91	QP	Pass
6	0.7380	14.55	19.37	33.92	46.00	-12.08	AVG	Pass
7	0.9060	19.24	19.36	38.60	56.00	-17.40	QP	Pass
8	0.9060	6.67	19.36	26.03	46.00	-19.97	AVG	Pass
9	4.5939	17.21	19.41	36.62	56.00	-19.38	QP	Pass
10	4.5939	6.04	19.41	25.45	46.00	-20.55	AVG	Pass
11	24.4900	22.94	19.69	42.63	60.00	-17.37	QP	Pass
12	24.4900	9.63	19.69	29.32	50.00	-20.68	AVG	Pass

Neutral:

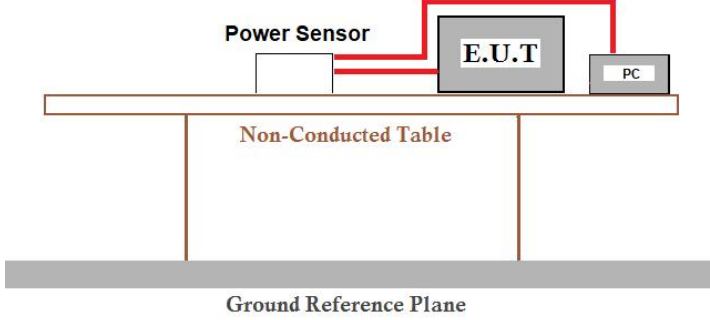


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Pass/Fail
1	0.2700	18.44	19.37	37.81	61.12	-23.31	QP	Pass
2	0.2700	3.05	19.37	22.42	51.12	-28.70	AVG	Pass
3	0.4340	17.91	19.35	37.26	57.18	-19.92	QP	Pass
4	0.4340	2.20	19.35	21.55	47.18	-25.63	AVG	Pass
5	0.5700	18.86	19.36	38.22	56.00	-17.78	QP	Pass
6	0.5700	4.50	19.36	23.86	46.00	-22.14	AVG	Pass
7 *	0.6940	22.18	19.41	41.59	56.00	-14.41	QP	Pass
8	0.6940	7.75	19.41	27.16	46.00	-18.84	AVG	Pass
9	0.9540	16.10	19.39	35.49	56.00	-20.51	QP	Pass
10	0.9540	1.77	19.39	21.16	46.00	-24.84	AVG	Pass
11	24.4500	18.49	19.75	38.24	60.00	-21.76	QP	Pass
12	24.4500	3.38	19.75	23.13	50.00	-26.87	AVG	Pass

Notes:

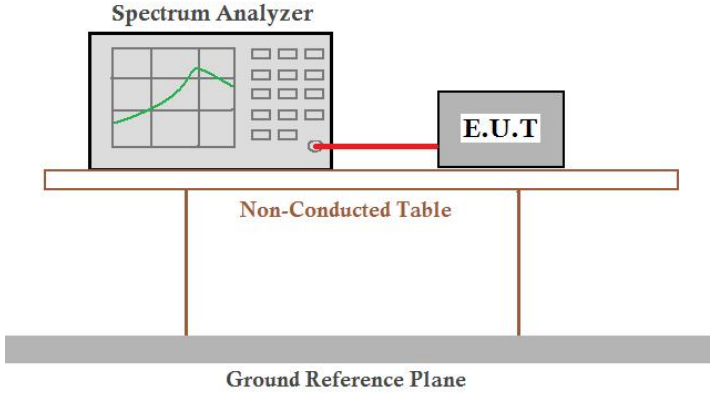
1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

4.3 Conducted Peak Output Power

Test Requirement:	47CRF Part 15.247 (b)(1)	
Test Method:	KDB558074 D01 15.247 Meas Guidance v05r02 ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §7.8.5	
Limit:	Output Power :20.97dBm	
Test setup:	 The diagram illustrates the test setup. A 'Power Sensor' is connected via red lines to an 'E.U.T.' (Equipment Under Test) and a 'PC'. Both the E.U.T. and the PC are placed on a 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a 'Ground Reference Plane', which is represented by a thick grey bar at the bottom.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

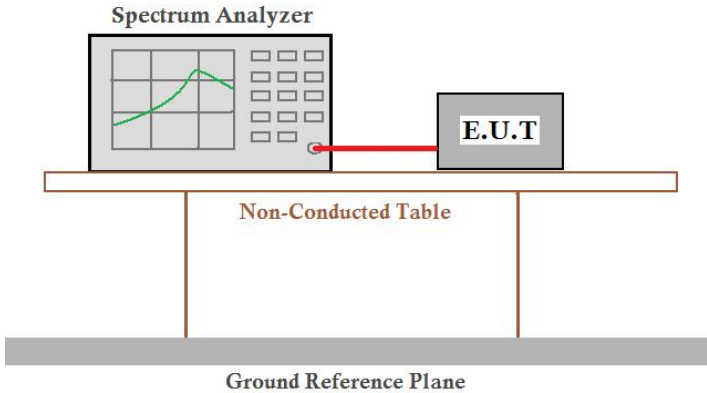
Note: The test data please refer to APPENDIX 1.

4.4 20dB Emission Bandwidth

Test Requirement:	47CRF Part 15.247 (a)(1)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §6.9.2	
Limit:	N/A	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

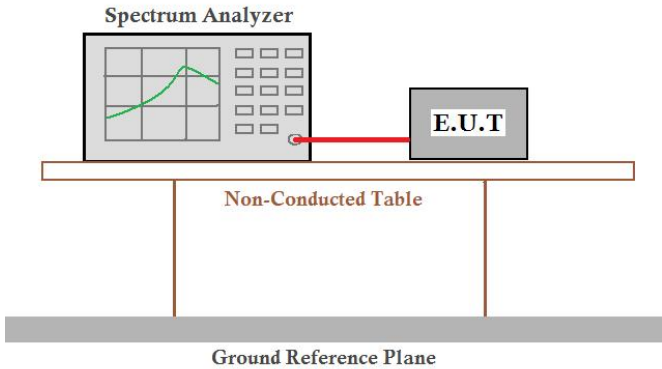
Note: The test data please refer to APPENDIX 1.

4.5 Carrier Frequencies Separation

Test Requirement:	47CRF Part 15.247 (a)(1)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §7.8.2	
Receiver setup:	RBW=300KHz, VBW=300KHz, detector=Peak	
Limit:	>0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

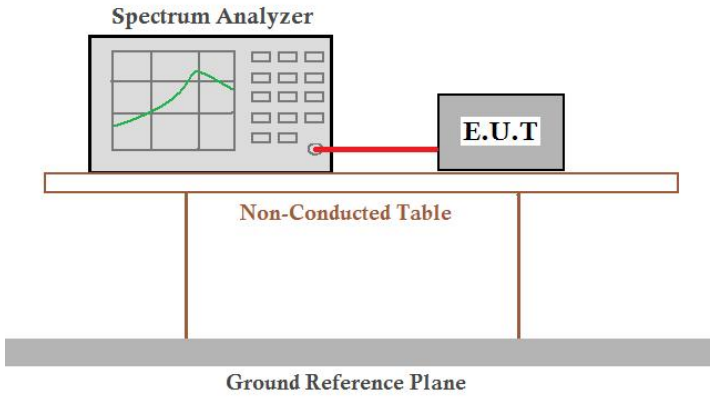
Note: The test data please refer to APPENDIX 1.

4.6 Hopping Channel Number

Test Requirement:	47CRF Part 15.247 (a)(1)(iii)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §7.8.3	
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak	
Limit:	15 channels	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

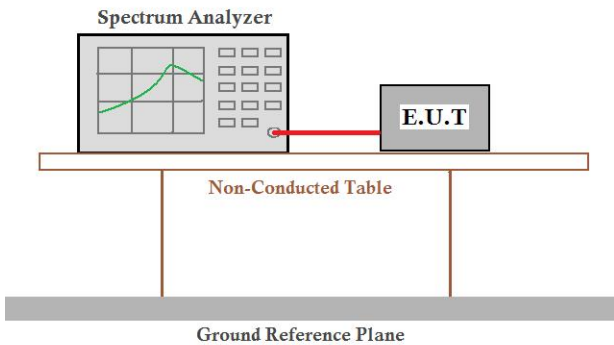
4.7 Dwell Time

Test Requirement:	47CRF Part 15.247 (a)(1)(iii)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §7.8.4	
Receiver setup:	RBW=1MHz, VBW=3MHz, Span=0Hz, Detector=Peak	
Limit:	0.4 Second	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an Equipment Under Test (E.U.T.). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

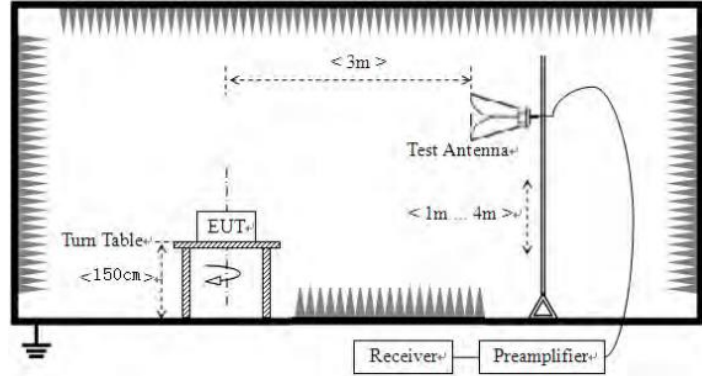
4.8 Band Edge

4.8.1 Conducted Emission Method

Test Requirement:	47CRF Part 15.247 (d)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §7.8.6	
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

4.8.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
Limit:	Frequency		Limit (dBuV/m @3m)		Remark
	Above 1GHz		54.00		Average Value
			74.00		Peak Value
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test environment:	Temp.: 24.8℃			Humid.: 51%RH	
Test voltage:	DC 3.85V				
Test results:	Pass				



Measurement Data

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Polarization
2310	60.00	-13.36	46.64	74	-27.36	Horizontal
2390	63.36	-13.03	50.33	74	-23.67	Horizontal
2310	58.57	-13.36	45.21	74	-28.79	Vertical
2390	62.76	-13.03	49.73	74	-24.27	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	47.06	-13.36	33.70	54	-20.30	Horizontal
2390	52.21	-13.03	39.18	54	-14.82	Horizontal
2310	47.61	-13.36	34.25	54	-19.75	Vertical
2390	52.71	-13.03	39.68	54	-14.32	Vertical

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	65.02	-12.64	52.38	74	-21.62	Horizontal
2500	59.08	-12.57	46.51	74	-27.49	Horizontal
2483.5	65.24	-12.64	52.60	74	-21.40	Vertical
2500	59.65	-12.57	47.08	74	-26.92	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	53.64	-12.64	41.00	54	-13.00	Horizontal
2500	48.18	-12.57	35.61	54	-18.39	Horizontal
2483.5	54.14	-12.64	41.50	54	-12.50	Vertical
2500	49.08	-12.57	36.51	54	-17.49	Vertical

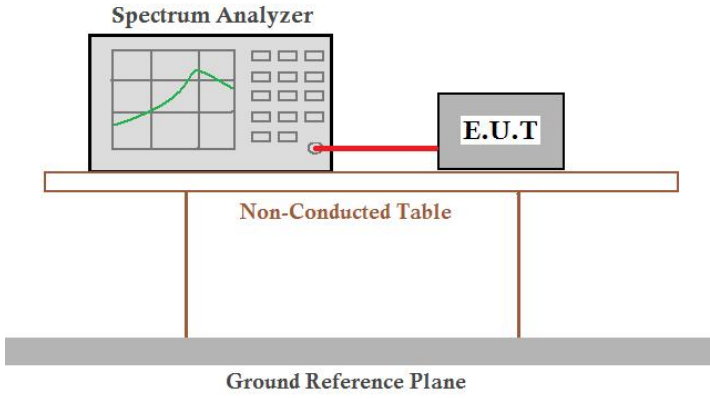
Remarks:

1. Level = Read level + Factor
2. Factor=Antenna Factor + Cable Loss – Preamplifier Factor
3. The emission levels of other frequencies are very lower than the limit and not show in test report.
4. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

During the test, pre-scan the GFSK, $\pi/4$ -DQPSK, 8DPSK modulation, and found the 8DPSK modulation which it is worse case.

4.9 Spurious Emission

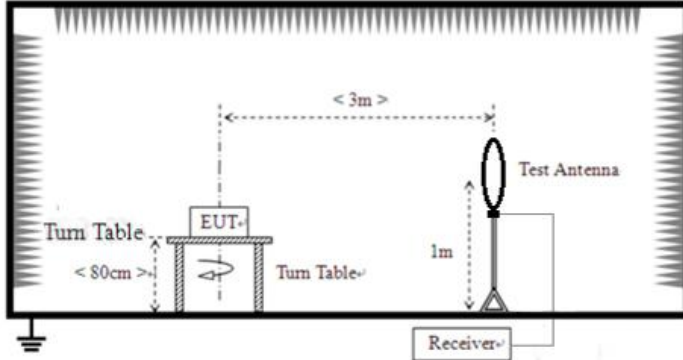
4.9.1 Conducted Emission Method

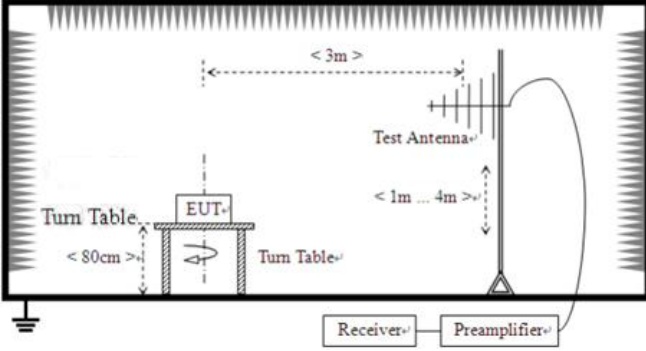
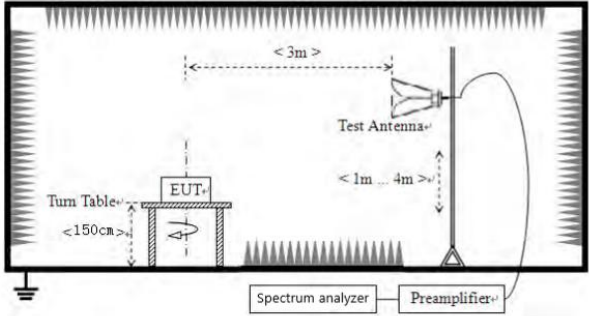
Test Requirement:	47CRF Part 15.247 (d), 47CRF Part 15.209 and 15.205	
Test Method:	ANSI C63.10:2020 §7.8.7	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8°C	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Remark:

1. Cable loss data included in Offset.

4.9.2 Radiated Emission Method

Test Requirement:	47CRF Part 15.247 (d), 47CRF Part 15.209 and 15.205				
Test Method:	ANSI C63.10:2020 § 6.4&6.5&6.6				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	360KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	6.37/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	63.7/F(KHz)	QP	30m	
	1.705MHz-30MHz	0.08	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	For radiated emissions from 9kHz to 30MHz				
					

	For radiated emissions from 30MHz to1GHz  For radiated emissions above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass



Measurement data:

Remarks:

1. *The report only shows the worst mode.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

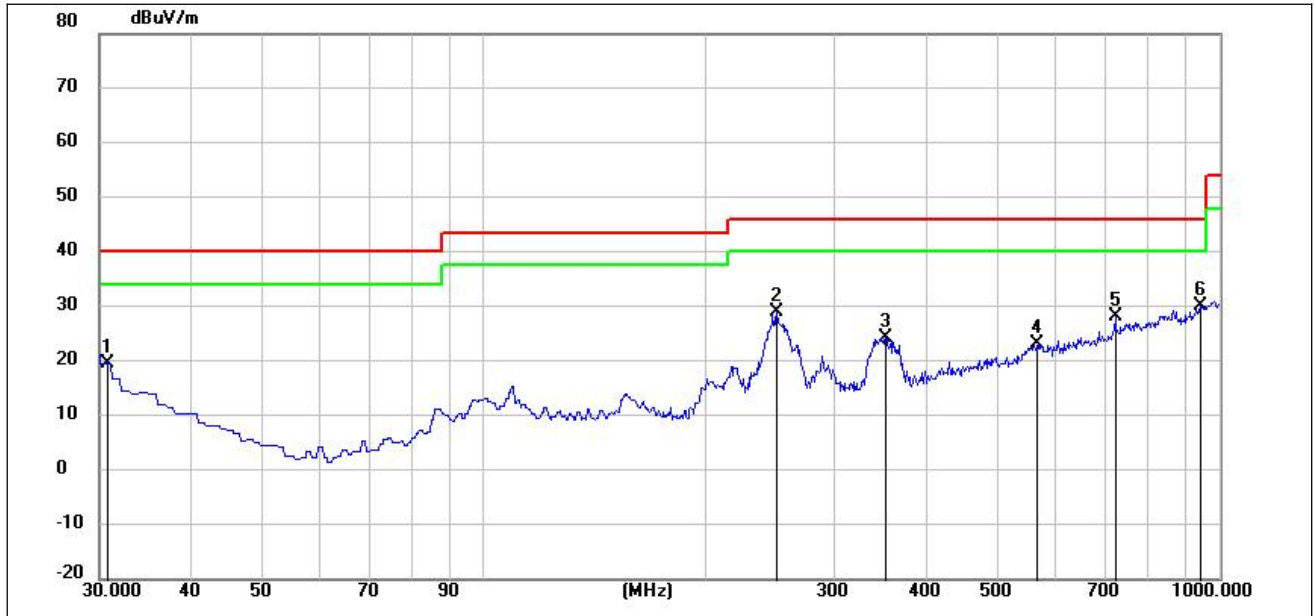
■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 47CRF part 15.31(o), the test result no need to reported.

■ **Below 1GHz**

All modes have been tested, and the report only displays the worst mode (3DH5 2402) data.

Test polarization:	Horizontal	Test voltage:	DC 3.85V
Temp.:	23.5°C	Humid.:	62%RH



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	30.8535	33.01	-13.29	19.72	40.00	-20.28	peak	Pass
2	250.1900	44.99	-16.10	28.89	46.00	-17.11	peak	Pass
3	351.0700	37.38	-13.04	24.34	46.00	-21.66	peak	Pass
4	566.4099	28.70	-5.57	23.13	46.00	-22.87	peak	Pass
5	721.6100	31.44	-3.12	28.32	46.00	-17.68	peak	Pass
6 *	939.8600	28.70	1.37	30.07	46.00	-15.93	peak	Pass

Factor= Antenna Factor + Cable Loss – Preamplifier Factor

Level = Reading + Factor, Margin=level-Limit

Test polarization:	Vertical	Test voltage:	DC 3.85V
Temp.:	23.5°C	Humid.:	62%RH



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	30.8535	33.01	-13.29	19.72	40.00	-20.28	peak	Pass
2	250.1900	44.99	-16.10	28.89	46.00	-17.11	peak	Pass
3	351.0700	37.38	-13.04	24.34	46.00	-21.66	peak	Pass
4	566.4099	28.70	-5.57	23.13	46.00	-22.87	peak	Pass
5	721.6100	31.44	-3.12	28.32	46.00	-17.68	peak	Pass
6 *	939.8600	28.70	1.37	30.07	46.00	-15.93	peak	Pass

Level = Reading + Factor, Margin=level-Limit
Factor= Antenna Factor + Cable Loss – Preamplifier Factor

■ Above 1GHz

Test voltage:	DC 3.85V		
Temp.:	23.5°C	Humid.:	62%RH

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	52.84	-7.69	45.15	74	-28.85	Vertical
7206	46.97	-1.7	45.27	74	-28.73	Vertical
9608	45.61	1.31	46.92	74	-27.08	Vertical
12010	*	--	--	74	--	Vertical
14412	*	--	--	74	--	Vertical
4804	52.54	-7.69	44.85	74	-29.15	Horizontal
7206	46.24	-1.7	44.54	74	-29.46	Horizontal
9608	46.02	1.31	47.33	74	-26.67	Horizontal
12010	*	--	--	74	--	Horizontal
14412	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804	40.1	-7.69	32.41	54	-21.59	Vertical
7206	35.43	-1.7	33.73	54	-20.27	Vertical
9608	33.95	1.31	35.26	54	-18.74	Vertical
12010	*	--	--	54	--	Vertical
14412	*	--	--	54	--	Vertical
4804	41.25	-7.69	33.56	54	-20.44	Horizontal
7206	34.19	-1.7	32.49	54	-21.51	Horizontal
9608	33.02	1.31	34.33	54	-19.67	Horizontal
12010	*	--	--	54	--	Horizontal
14412	*	--	--	54	--	Horizontal

Test channel:	Middle
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882	53.08	-7.56	45.52	74	-28.48	Vertical
7323	46.72	-1.38	45.34	74	-28.66	Vertical
9764	45.34	1.19	46.53	74	-27.47	Vertical
12205	*	--	--	74	--	Vertical
14646	*	--	--	74	--	Vertical
4882	53.15	-7.56	45.59	74	-28.41	Horizontal
7323	46.55	-1.38	45.17	74	-28.83	Horizontal
9764	45.4	1.19	46.59	74	-27.41	Horizontal
12205	*	--	--	74	--	Horizontal
14646	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882	39.96	-7.56	32.4	54	-21.6	Vertical
7323	35.15	-1.38	33.77	54	-20.23	Vertical
9764	34.67	1.19	35.86	54	-18.14	Vertical
12205	*	--	--	54	--	Vertical
14646	*	--	--	54	--	Vertical
4882	40.88	-7.56	33.32	54	-20.68	Horizontal
7323	34.13	-1.38	32.75	54	-21.25	Horizontal
9764	33.39	1.19	34.58	54	-19.42	Horizontal
12205	*	--	--	54	--	Horizontal
14646	*	--	--	54	--	Horizontal

Test channel:	Highest
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960	53.81	-7.43	46.38	74	-27.62	Vertical
7440	45.94	-1.02	44.92	74	-29.08	Vertical
9920	45.87	1.08	46.95	74	-27.05	Vertical
12400	*	--	--	74	--	Vertical
14880	*	--	--	74	--	Vertical
4960	52.4	-7.43	44.97	74	-29.03	Horizontal
7440	46.62	-1.02	45.6	74	-28.4	Horizontal
9920	46.25	1.08	47.33	74	-26.67	Horizontal
12400	*	--	--	74	--	Horizontal
14880	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Polarization
4960	39.89	-7.43	32.46	54	-21.54	Vertical
7440	34.34	-1.02	33.32	54	-20.68	Vertical
9920	34.5	1.08	35.58	54	-18.42	Vertical
12400	*	--	--	54	--	Vertical
14880	*	--	--	54	--	Vertical
4960	40.5	-7.43	33.07	54	-20.93	Horizontal
7440	34.24	-1.02	33.22	54	-20.78	Horizontal
9920	33.75	1.08	34.83	54	-19.17	Horizontal
12400	*	--	--	54	--	Horizontal
14880	*	--	--	54	--	Horizontal

Remarks:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *“*” means this data is too weak; instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not shown in test report.*

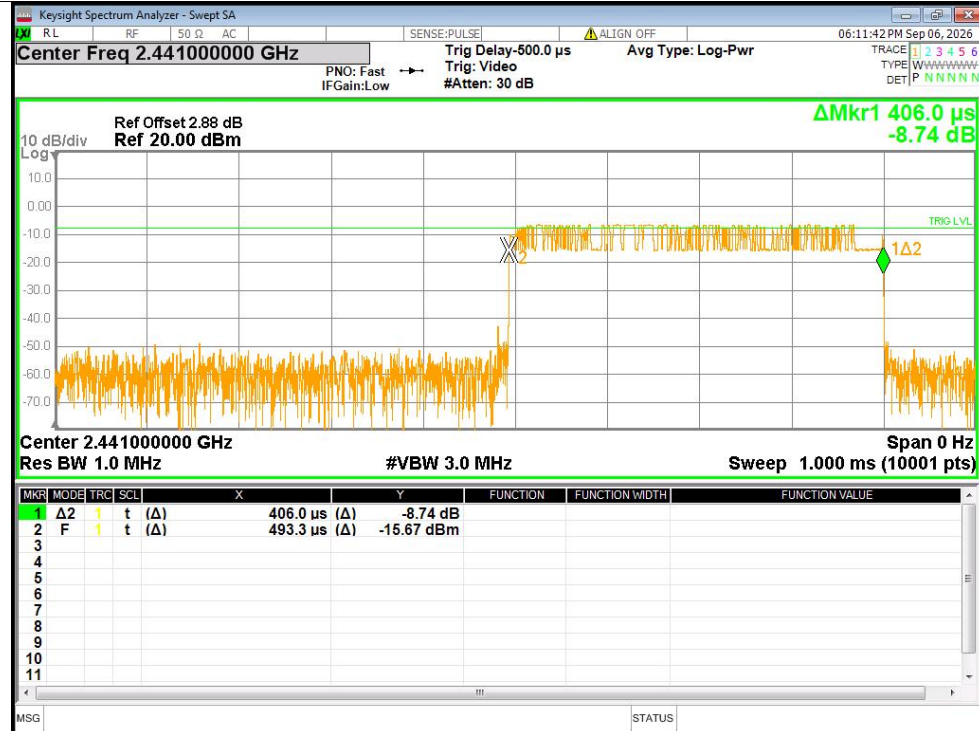
5 APPENDIX 1-TEST DATA

Dwell Time

Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
1-DH1	2441	0.406	128.702	317	31600	<=400	Pass
1-DH3	2441	1.662	275.892	166	31600	<=400	Pass
1-DH5	2441	2.91	305.55	105	31600	<=400	Pass
2-DH1	2441	0.398	126.962	319	31600	<=400	Pass
2-DH3	2441	1.65	257.4	156	31600	<=400	Pass
2-DH5	2441	2.898	304.29	105	31600	<=400	Pass
3-DH1	2441	0.396	123.948	313	31600	<=400	Pass
3-DH3	2441	1.646	266.652	162	31600	<=400	Pass
3-DH5	2441	2.897	338.949	117	31600	<=400	Pass

Test Graphs

Dwell NVNT 1-DH1 2441MHz One Burst



Dwell NVNT 1-DH1 2441MHz Accumulated

