



TEST REPORT

Applicant: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address of Applicant: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIALZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China
Manufacturer: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address of Manufacturer: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIALZONE, GUANLAN, LONGHUA SHENZHEN, 518XXX China
Product Name: Smart phone
Model No.: C26 Mini, C26, C26 S, C26 E, C26 Pro, C26 Plus, C26 Ultra, C26 Max, C26 GT, C26 Go, C26 Lite
Trade Mark: OUKITE
FCC ID: 2ANMU-C26MINI
Applicable standards: CFR Title 47 Part 15.247
Date of Test: Sept. 03, 2026- Sept. 15, 2026
Date of report issued: Sept. 15, 2026

Remark:

The results shown in this test report refer only to the sample(s) tested , this test report cannot be reproduced, except in full without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver

Prepared By

Shenzhen ETR Standard Technology Co., Ltd.

Address: No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

Compiled by:

Reviewed by:

Approved by:

Project Engineer

Project Manager

Authorized Signature



Report Revision History		
Report No.	Description	Issue Date
ET-26094838E03	Original	Sept. 15, 2026



Contents

	Page
1. TEST SUMMARY	4
2. GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 TEST MODE	7
2.3 DESCRIPTION OF SUPPORT UNITS	7
2.4 TEST FACILITY	7
2.5 ADDITIONAL INSTRUCTIONS	7
3. TEST INSTRUMENTS LIST	8
4. TEST RESULTS AND MEASUREMENT DATA	9
4.1 ANTENNA REQUIREMENT	9
4.2 CONDUCTED EMISSIONS	10
4.3 DUTY CYCLE	13
4.4 PEAK CONDUCTED OUTPUT POWER	14
4.5 6dB BANDWIDTH	15
4.6 POWER SPECTRAL DENSITY	16
4.7 BAND EDGES	17
Conducted Emission Method	17
Radiated Emission Method	18
4.8 SPURIOUS EMISSION	24
Conducted Emission Method	24
Radiated Emission Method	25
5. APPENDIX 1-TEST DATA	42
6. TEST SETUP PHOTO	93
7. EUT CONSTRUCTIONAL DETAILS	93

1. Test Summary

Test Item	Section	Result	Test by
Antenna requirement	47CFR Part 15.203 /247(b)(4)	Pass	/
AC Power Line Conducted Emission	47CFR part 15.207	Pass	Jason Huang
Conducted Peak Output Power	47CFR part 15.247 (b)(3)	Pass	Oliver Wang
6dB Bandwidth	47CFR part 15.247 (a)(2)	Pass	Oliver Wang
Power Spectral Density	47CFR part 15.247 (e)	Pass	Oliver Wang
Band Edge	47CFR part 15.247(d) 47CFR part 15.205/15.209	Pass	Oliver Wang
Spurious Emission	47CFR part 15.247(d) 47CFR part 15.205/15.209	Pass	Leo Zhong

Remarks:

1. Pass: The EUT complies with the essential requirements in the standard.
2. Test according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 and KDB558074 D01 15.247 Meas Guidance v05r02.
3. Note: Compliance determination rules
 - 1).The Compliance determination of test results does not take into account measurement uncertainty. Measurement results are determined based on regulatory limitations or requirements specified by the applicant/manufacture. If measurement uncertainty is taken into account, the applicant/manufacture will bear all possible risks of non-compliance.
 - 2).The measurement uncertainty please refer to each test result in the "Measurement Uncertainty"

Measurement Uncertainty

Test Item	Measurement Uncertainty	Notes
Occupied Channel Bandwidth	0.72%	(1)
RF output power, conducted	±0.67 dB	(1)
Power Spectral Density, conducted	±0.51 dB	(1)
Unwanted Emissions, conducted	±0.64 dB	(1)
AC Power Line Conducted Emission	± 3.38 dB	(1)
Radiated emissions 9K-30MHz	±4.26 dB	(1)
Radiated emissions 30M- 1GHz	±4.88 dB	(1)
Radiated emissions 1GHz-18GHz	± 4.16 dB	(1)
Radiated emissions 18GHz-40GHz	±4.14 dB	(1)
Frequency error	Uc=6X10 ⁻⁷	(1)
Duty Cycle	0.03	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



2. General Information

2.1 General Description of EUT

Product Name:	Smart phone
Model No.:	C26 Mini,C26,C26 S,C26 E,C26 Pro,C26 Plus,C26 Ultra,C26 Max,C26 GT,C26 Go,C26 Lite
Difference of model(s)	Only different in model name
Test Model:	C26 Mini
Hardware version:	N/A
Software version:	N/A
Power supply:	Input: DC 5V 2A
Adapter information:	Model: S215 Brand: N/A Rated Voltage: 3.85V Charge Limit Voltage: 4.4V Capacity: 2300mAh Manufacturer: Zhongshan Jiuliyuan New Energy Technology Co., Ltd. Address: 2-3F, Building 4; 2-4F, Building 5, No. 20, Beichen Road, Cuiheng New Area, Nanlang Street, Zhongshan City, Guangdong Province, China
Battery:	Model: HJ-0502000N2-US Brand: N/A Input: 100-240V~50/60Hz 0.3A Output: 5.0V=2.0A Manufacturer: SHENZHEN HUAJIN ELECTRONICSCO LTD Address: BLK E 518000/BLK E XINZHONGQIAO INDUSTRIAL PARK BAOLONG SIX RD BAOLONG INDUSTRIAL CITY LONGGANGDISTRICT,SHENZHEN,GUANGDONG,518000CHINA
Radio Technology:	2.4G WLAN
Operation Frequency:	2412MHz~2462MHz
Channel Numbers:	802.11b/802.11g /802.11n20: 11 802.11n40:7
Channel separation:	5MHz
Modulation technology:	802.11b: Direct Sequence Spread Spectrum (DSSS) 802.11g/802.11n20/802.11n40: Orthogonal Frequency Division Multiplexing (OFDM)
Antenna Type:	FPC antenna
Antenna gain:	-0.7dBi
Note: 1. Other information please Reference user manual. 2. Antenna information is provided by applicant, Testing lab is not responsible for the accuracy of the information.	

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Test channel	Frequency (MHz)	
	802.11b/802.11g/802.11n20	802.11n40
Lowest channel	2412MHz	2422MHz
Middle channel	2437MHz	2437MHz
Highest channel	2462MHz	2452MHz

2.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<i>Remark: the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:				
Pre-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.				
Mode	802.11b	802.11g	802.11n(HT20)	802.11n(HT40)
Data rate	1Mbps	6Mbps	6.5Mbps	13Mbps

2.3 Description of Support Units

No.	Description	Manufacturer	Model	Serial Number
1	/	/	/	/
2	/	/	/	/
3	/	/	/	/

2.4 Test Facility

Test laboratory:	Shenzhen ETR Standard Technology Co., Ltd.
CNAS Registration Number:	L11864
A2LA Certificate Number:	6640.01
FCC Designation Number:	CN1326
FCC Test Firm Registration:	183064
IC Company Number:	28440
IC CAB identifier:	CN0132
Laboratory location:	No.103, No.10, Phase I, Zone 3, Xinxing Industrial Park, Xinhe, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

2.5 Additional Instructions

Test Software	Engineering mode
Power level setup	see the form below

RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
WIFI(2.4G)	2.4G WIFI	802.11b	-0.7	10	Engineering mode
		802.11g		10	
		802.11n(HT20)		9	
		802.11n(HT40)		10	

3. Test Instruments list

Item	Equipment name	Manufacturer	Model	Serial No.	Calibration date	Due date
1	EMI Test Receiver	Rohde&schwarz	ESCI7	101214	2026.3.05	2027.3.04
2	EMI Test Receiver	Rohde&schwarz	ESCI3	102696	2026.3.05	2027.3.04
3	Loop Antenna	schwarabeck	FMZB 1519 B	128	2026.3.08	2028.3.07
4	Broadband antenna	schwarabeck	VULB9168	1064	2026.3.11	2028.3.10
5	Horn antenna	schwarabeck	BBHA9120D	2288	2026.3.08	2028.3.07
6	amplifier	EMtrace	RP01A	50117	2026.3.05	2027.3.04
7	AMN	schwarabeck	NSLK8127	8127483	2026.3.05	2027.3.04
8	AMN	ETS	3186/2NM	1132	2026.3.05	2027.3.04
9	10dB attenuator	HUBER+SUHN R	10dB	/	2026.3.05	2027.3.04
10	amplifier	Space-Dtronics	EWLAN0118G- P40	19113001	2026.3.05	2027.3.04
11	Filter	Xingbo	XBLBQ-GTA19	210410-3-1	2026.3.05	2027.3.04
12	Spectrum analyzer	KEYSIGHT	N9020A	MY55370280	2026.3.05	2027.3.04
13	Power control box	MWRFTest	MW100-PSB	MW201020JYT	2026.3.05	2027.3.04
14	Power Sensor	Keysight	U2021XA	MY54111006	2026.3.05	2027.3.04
15	amplifier	SKET	LNPA_1840-50 (18-40GHz)	19113001	2026.3.05	2027.3.04
16	Horn antenna	schwarabeck	BBHA 9170	946	2026.3.08	2028.3.07
17	Temp. & Humidity Chamber	Jiecheng Instrument	QA-LP-80	20160705001	2026/3/06	2027/3/05

Note: the calibration interval of the above test instruments is 12 or 24 months and the calibrations are traceable to international system unit (SI).

Software Name	Manufacturer	Model	Version
RF test software	MWRFTest	MTS 8310	V2.0.0.0
Conducted test software	EZ-EMC	Farad	Ver.EMC-CON 3A1.1
Radiated test software	EZ-EMC	Farad	Ver.FA-03A2 RE

4. Test results and Measurement Data

4.1 Antenna requirement

Standard requirement:	47CFR Part 15.203 /247(b)(4)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: If transmitting antennas of directional gain greater than 6dBi are used, the conducted output power limit shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi	
EUT Antenna:	
The antenna is FPC antenna, the best case gain of the is -0.7dBi, reference to the Internal photos for details.	

4.2 Conducted Emissions

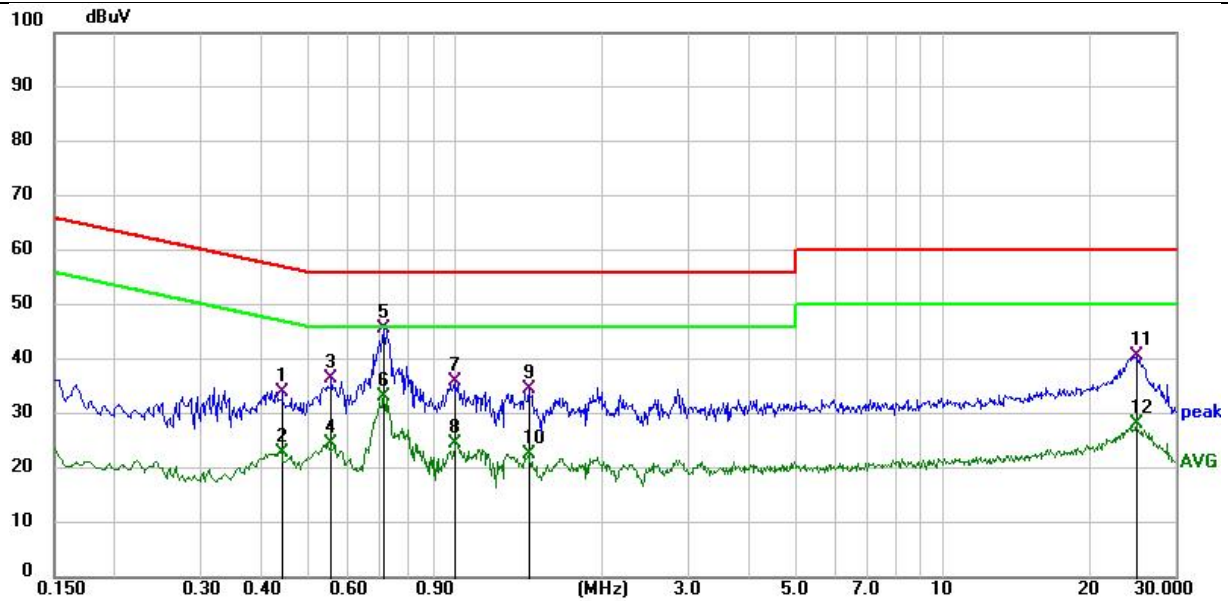
Test Requirement:	47CFR part 15.207						
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 §6.2						
Test Frequency Range:	150KHz to 30MHz						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	Frequency range (MHz)		Limit (dBuV)				
			Quasi-peak		Average		
	0.15-0.5		66 to 56*		56 to 46*		
	0.5-5		56		46		
	5-30		60		50		
* Decreases with the logarithm of the frequency.							
Test setup:	Reference Plane 40cm LISN AUX Equipment E.U.T 80cm LISN Filter AC power EMI Receiver Test table/Insulation plane Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m						
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 on conducted measurement.						
Test Instruments:	Refer to section 3.0 for details						
Test mode:	Refer to section 2.2 for details						
Test environment:	Temp.:	24.8℃	Humid.:	51%	Press.:	1012mbar	
Test voltage:	AC 120V 60Hz						
Test results:	Pass						

Remark:

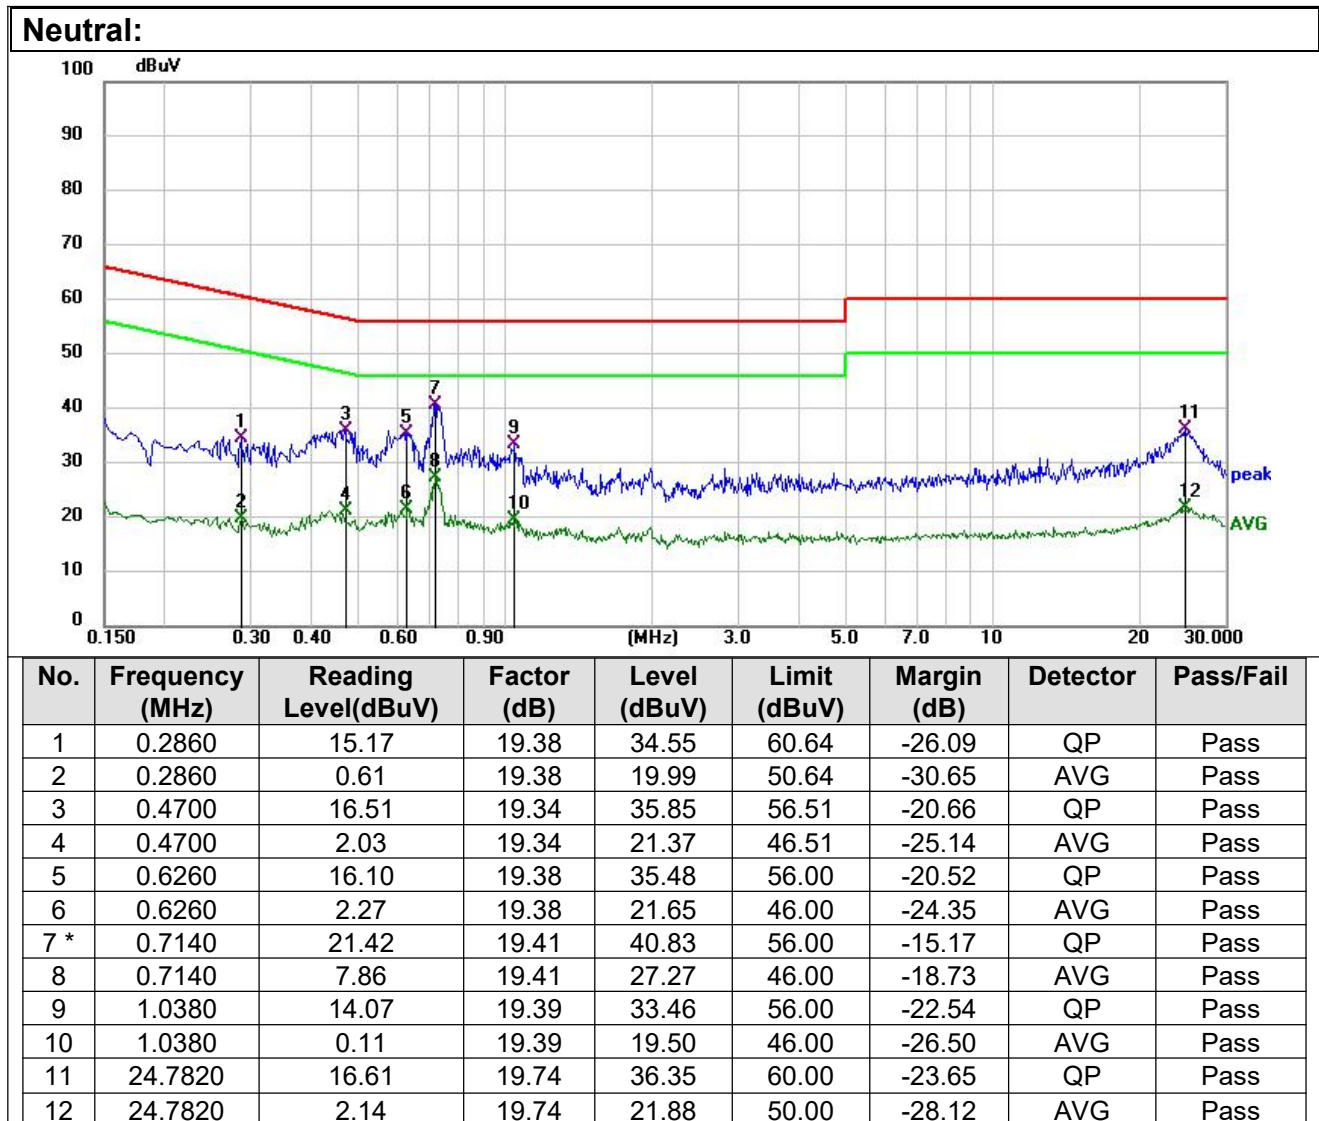
1. Both high voltage and low voltage have been tested, and the report only shows the worst case data with AC 120V/60Hz.
2. All mode have been tested, the report only shows the worst mode of 802.11g (2412MHz)

Measurement Result

Line:



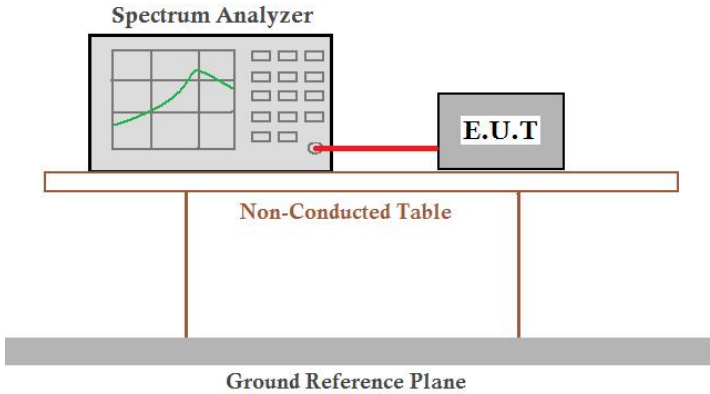
No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	Pass/Fail
1	0.4420	14.59	19.39	33.98	57.02	-23.04	QP	Pass
2	0.4420	3.64	19.39	23.03	47.02	-23.99	AVG	Pass
3	0.5540	17.13	19.39	36.52	56.00	-19.48	QP	Pass
4	0.5540	5.15	19.39	24.54	46.00	-21.46	AVG	Pass
5 *	0.7100	26.23	19.37	45.60	56.00	-10.40	QP	Pass
6	0.7100	13.71	19.37	33.08	46.00	-12.92	AVG	Pass
7	0.9940	16.56	19.35	35.91	56.00	-20.09	QP	Pass
8	0.9940	5.29	19.35	24.64	46.00	-21.36	AVG	Pass
9	1.4100	15.14	19.35	34.49	56.00	-21.51	QP	Pass
10	1.4100	3.26	19.35	22.61	46.00	-23.39	AVG	Pass
11	24.9460	20.89	19.69	40.58	60.00	-19.42	QP	Pass
12	24.9460	8.44	19.69	28.13	50.00	-21.87	AVG	Pass



Notes:

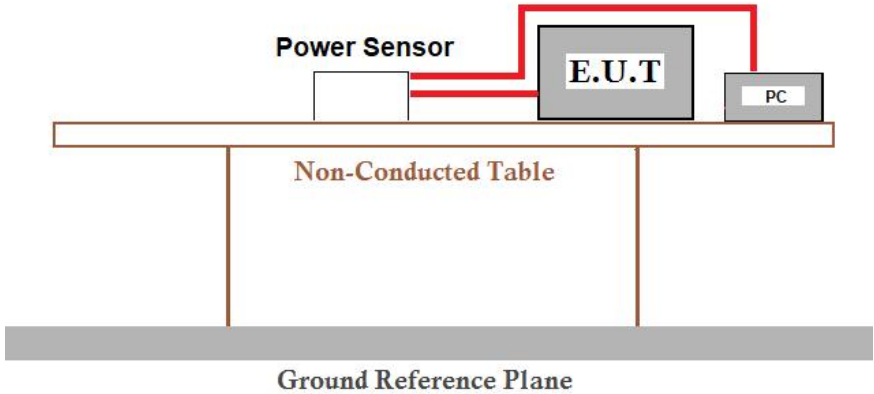
1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

4.3 Duty cycle

Test Method :	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024§11.6	
Limit:	/	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green waveform on its screen, is connected to an Equipment Under Test (E.U.T.) box by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs and sits on a 'Ground Reference Plane', which is represented by a thick grey horizontal bar at the bottom of the setup.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

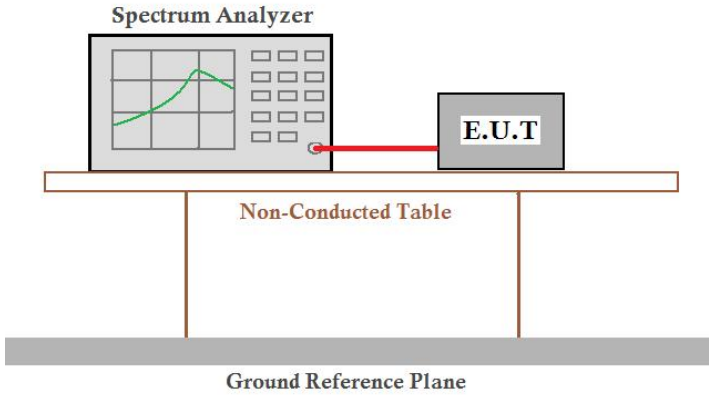
Note: The test data please refer to APPENDIX 1.

4.4 Peak Conducted Output Power

Test Requirement :	FCC Part15 C Section 15.247 (b)(3)	
Test Method :	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 § 11.9.1.2 KDB558074 D01 15.247 Meas Guidance v05r02	
Limit:	30dBm for peak conducted output power	
Test setup:		
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

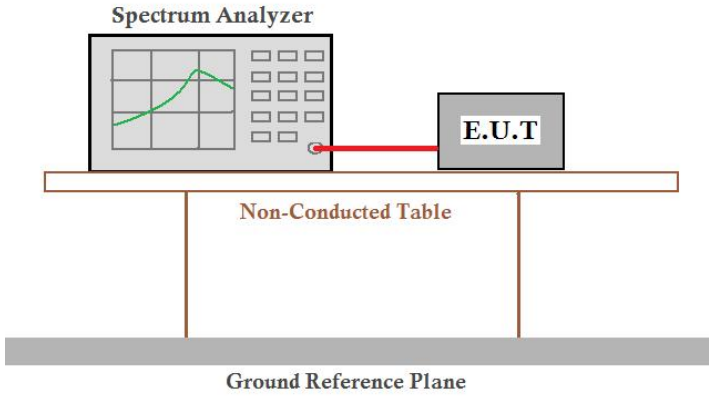
Note: The test data please refer to APPENDIX 1.

4.5 6dB Bandwidth

Test Requirement :	47CFR Part 15.247 (a)(2)	
Test Method :	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024§11.8.2	
Limit:	>500KHz	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

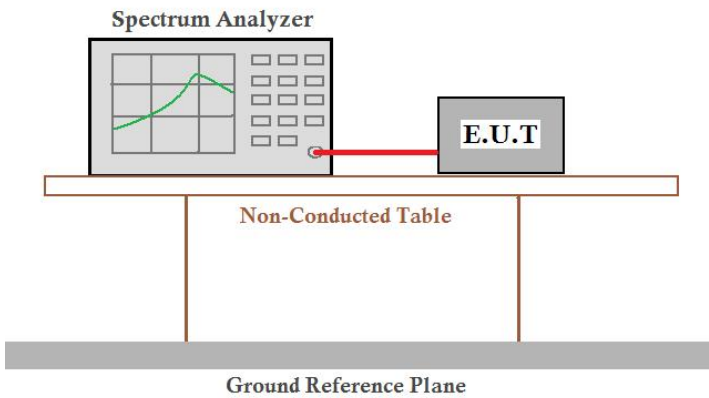
4.6 Power Spectral Density

Test Requirement:	47CFR Part 15.247 (e)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 § 11.10.2 KDB558074 D01 15.247 Meas Guidance v05r02	
Limit:	8dBm/3kHz	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8°C	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

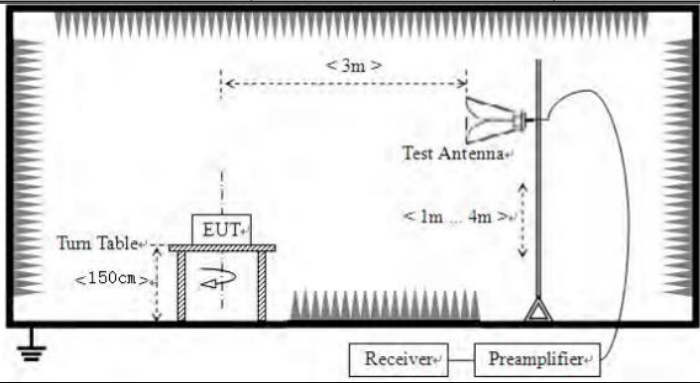
4.7 Band edges

Conducted Emission Method

Test Requirement:	47CFR Part 15.247 (d)	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 § 6.10.2	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

Radiated Emission Method

Test Requirement:	47CFR Part 15.209 and 15.205				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 § 6.10.4&11.12.1				
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Average	1MHz	3MHz	Average
Limit:	Frequency		Limit (dBuV/m @3m)		Value
	Above 1GHz		54.00		Average
			74.00		Peak
Test setup:					
Test Procedure:	1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.				
Test Instruments:	Refer to section 3.0 for details				
Test mode:	Refer to section 2.2 for details				
Test environment:	Temp.: 24.8℃			Humid.: 51%RH	
Test voltage:	DC 3.85V				
Test results:	Pass				





Measurement data:

Test mode:	802.11b	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	55.82	-13.36	42.46	74	-31.54	Horizontal
2390	57.98	-13.03	44.95	74	-29.05	Horizontal
2310	57.19	-13.36	43.83	74	-30.17	Vertical
2390	58.66	-13.03	45.63	74	-28.37	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	47.33	-13.36	33.97	54	-20.03	Horizontal
2390	49.87	-13.03	36.84	54	-17.16	Horizontal
2310	47.67	-13.36	34.31	54	-19.69	Vertical
2390	48.88	-13.03	35.85	54	-18.15	Vertical

Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	56.88	-12.64	44.24	74	-29.76	Horizontal
2500	55.43	-12.57	42.86	74	-31.14	Horizontal
2483.5	57.81	-12.64	45.17	74	-28.83	Vertical
2500	55.5	-12.57	42.93	74	-31.07	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	46.98	-12.64	34.34	54	-19.66	Horizontal
2500	46.13	-12.57	33.56	54	-20.44	Horizontal
2483.5	48.79	-12.64	36.15	54	-17.85	Vertical
2500	47.14	-12.57	34.57	54	-19.43	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level = Receiver Read level + Factor
3. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
4. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11g	Test channel:	Lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	55.99	-13.36	42.63	74	-31.37	Horizontal
2390	59.07	-13.03	46.04	74	-27.96	Horizontal
2310	57.75	-13.36	44.39	74	-29.61	Vertical
2390	59.88	-13.03	46.85	74	-27.15	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	47.37	-13.36	34.01	54	-19.99	Horizontal
2390	48.54	-13.03	35.51	54	-18.49	Horizontal
2310	47.52	-13.36	34.16	54	-19.84	Vertical
2390	48.98	-13.03	35.95	54	-18.05	Vertical

Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	58.41	-12.64	45.77	74	-28.23	Horizontal
2500	57.23	-12.57	44.66	74	-29.34	Horizontal
2483.5	60.46	-12.64	47.82	74	-26.18	Vertical
2500	56.77	-12.57	44.2	74	-29.8	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	49.61	-12.64	36.97	54	-17.03	Horizontal
2500	47.48	-12.57	34.91	54	-19.09	Horizontal
2483.5	49.77	-12.64	37.13	54	-16.87	Vertical
2500	47.46	-12.57	34.89	54	-19.11	Vertical

Remarks:

5. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
6. Final Level = Receiver Read level + Factor
7. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
8. Emissions more than 20 dB below the limit do not need to be reported.

Test mode:	802.11n(HT20)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	57.18	-13.36	43.82	74	-30.18	Horizontal
2390	59.62	-13.03	46.59	74	-27.41	Horizontal
2310	58.45	-13.36	45.09	74	-28.91	Vertical
2390	60.78	-13.03	47.75	74	-26.25	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	49.1	-13.36	35.74	54	-18.26	Horizontal
2390	49.48	-13.03	36.45	54	-17.55	Horizontal
2310	48.84	-13.36	35.48	54	-18.52	Vertical
2390	51	-13.03	37.97	54	-16.03	Vertical

Test mode:	802.11n(HT20)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	59	-12.64	46.36	74	-27.64	Horizontal
2500	56.92	-12.57	44.35	74	-29.65	Horizontal
2483.5	60.39	-12.64	47.75	74	-26.25	Vertical
2500	58.02	-12.57	45.45	74	-28.55	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	50.68	-12.64	38.04	54	-15.96	Horizontal
2500	48.3	-12.57	35.73	54	-18.27	Horizontal
2483.5	50.1	-12.64	37.46	54	-16.54	Vertical
2500	47.24	-12.57	34.67	54	-19.33	Vertical

Remarks:

1. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
2. Final Level =Receiver Read level + Factor
3. Factor =Antenna Factor + Cable Loss – Preamplifier Factor
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n(HT40)	Test channel:	Lowest
------------	---------------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	57.43	-13.36	44.07	74	-29.93	Horizontal
2390	59.5	-13.03	46.47	74	-27.53	Horizontal
2310	58.56	-13.36	45.2	74	-28.8	Vertical
2390	59.55	-13.03	46.52	74	-27.48	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	50.12	-13.36	36.76	54	-17.24	Horizontal
2390	79.01	-13.03	65.98	54	11.98	Horizontal
2310	49.69	-13.36	36.33	54	-17.67	Vertical
2390	49.55	-13.03	36.52	54	-17.48	Vertical

Test mode:	802.11n(HT40)	Test channel:	Highest
------------	---------------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	58.77	-12.64	46.13	74	-27.87	Horizontal
2500	57.19	-12.57	44.62	74	-29.38	Horizontal
2483.5	59.84	-12.64	47.2	74	-26.8	Vertical
2500	58.74	-12.57	46.17	74	-27.83	Vertical

Average value:

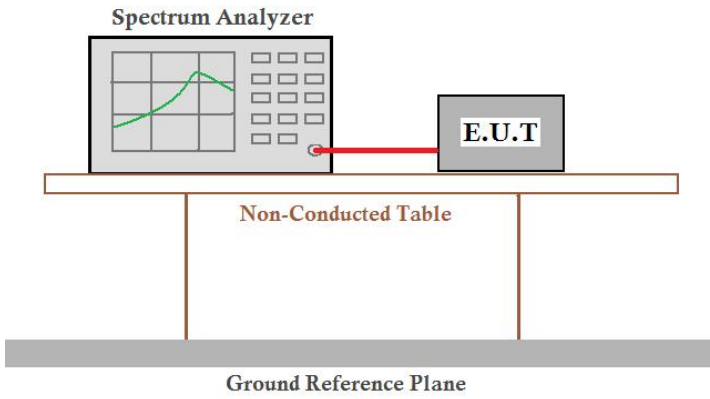
Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	49.9	-12.64	37.26	54	-16.74	Horizontal
2500	47.68	-12.57	35.11	54	-18.89	Horizontal
2483.5	49.87	-12.64	37.23	54	-16.77	Vertical
2500	48.05	-12.57	35.48	54	-18.52	Vertical

Remarks:

5. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.
6. Final Level = Receiver Read level + Factor
7. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
8. Emissions more than 20 dB below the limit do not need to be reported.

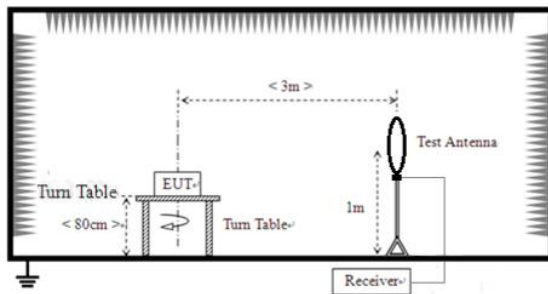
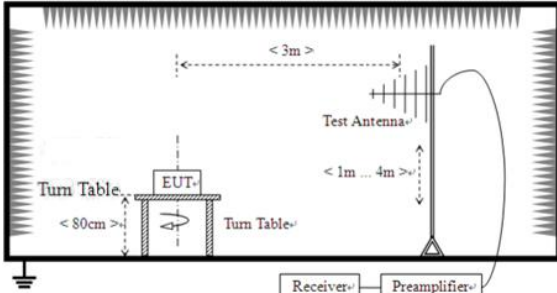
4.8 Spurious Emission

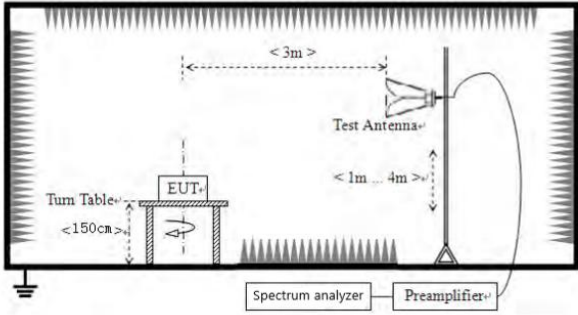
Conducted Emission Method

Test Requirement:	47CFR Part 15.247 (d), 47CFR Part 15.209	
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024 § 11.12.2	
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.	
Test setup:	 The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to an 'E.U.T' (Equipment Under Test) by a red cable. Both the analyzer and the E.U.T are positioned on a 'Non-Conducted Table'. This table is supported by two vertical legs and rests on a 'Ground Reference Plane', which is represented by a thick grey bar at the bottom of the setup.	
Test Instruments:	Refer to section 3.0 for details	
Test mode:	Refer to section 2.2 for details	
Test environment:	Temp.: 24.8℃	Humid.: 51%RH
Test voltage:	DC 3.85V	
Test results:	Pass	

Note: The test data please refer to APPENDIX 1.

Radiated Emission Method

Test Requirement:	47CFR part 15.247(d),47CFR Part 15.209 and 15.205				
Test Method:	ANSI C63.10-2020 + Cor. 1-2023+C63.10a-2024 + Errata to C63.10a-2024§6.4&6.5&6.6				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	360KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	300m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
5000		Peak			
Test setup:	For radiated emissions from 9kHz to 30MHz				
					
	For radiated emissions from 30MHz to 1GHz				
					
	For radiated emissions above 1GHz				

	
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
Test Instruments:	Refer to section 3.0 for details
Test mode:	Refer to section 2.2 for details
Test results:	Pass

Remarks:

1. The report only shows the worst mode.
2. Pre-scan all kind of the place mode (X-axis, Y-(axis, Z-axis), and found the Y-axis which it is worse case.
3. All models and modes have been tested, and the report only displays the worst mode 802.11g (2412MHz) data.



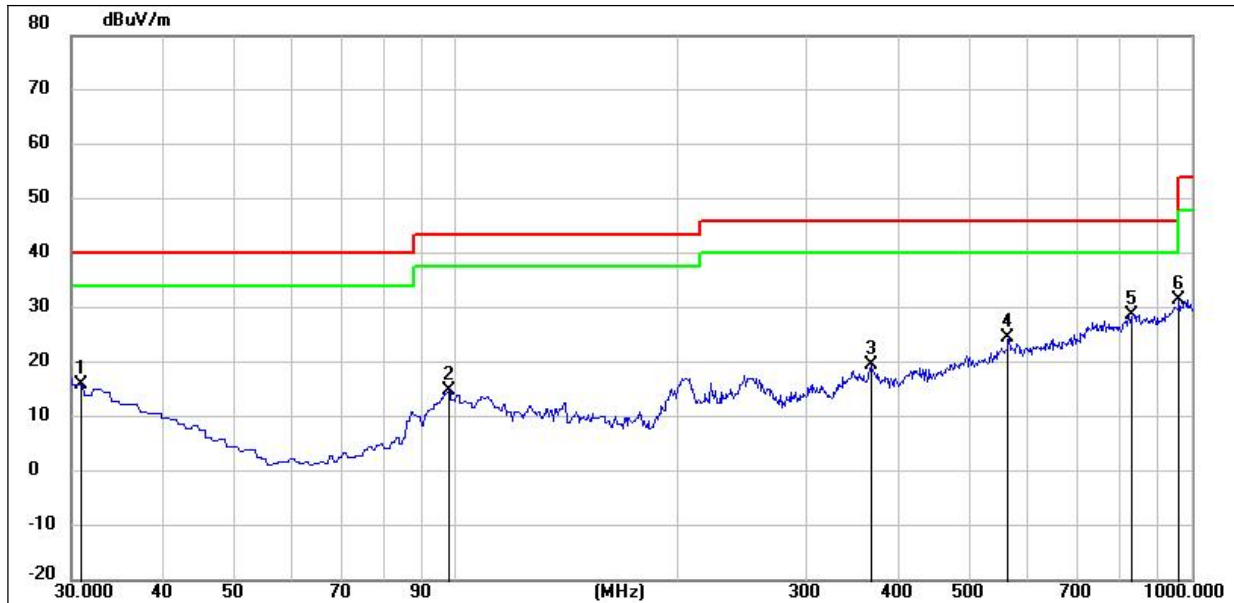
Measurement data:

■ **9kHz~30MHz**

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and according to 15.31(o), the test result no need to reported.

■ Below 1GHz

Test polarization:	Vertical	Test voltage:	DC 3.85V
Temp.:	23.5°C	Humid.:	62%RH



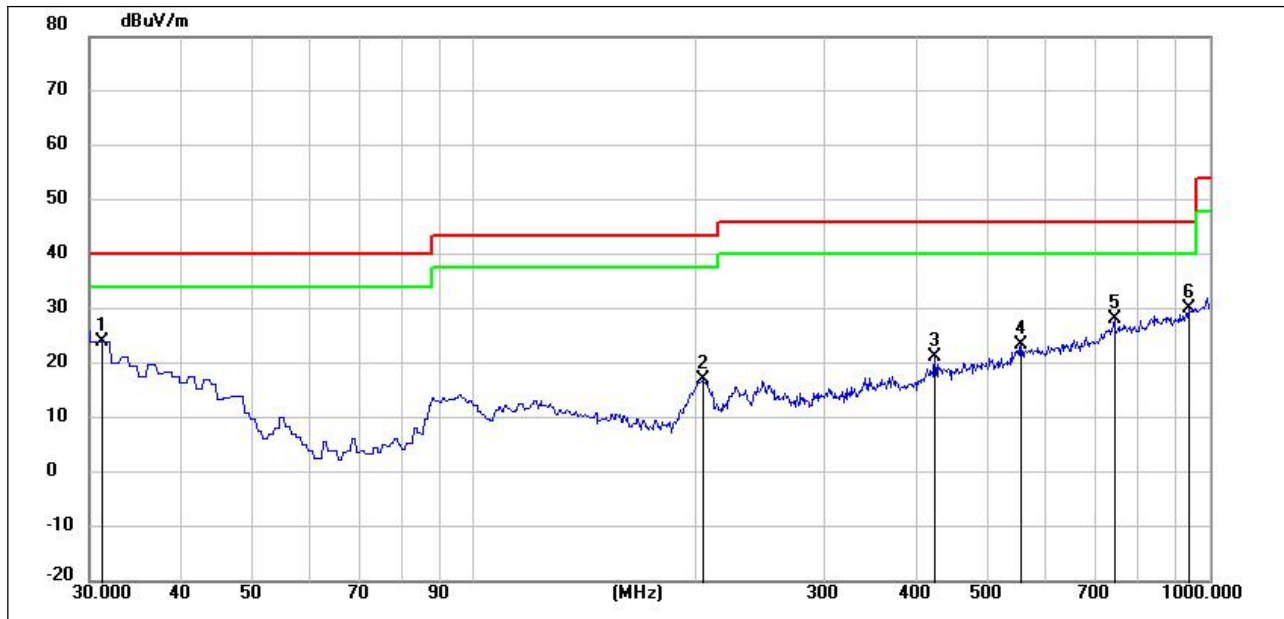
No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	30.9619	29.37	-13.35	16.02	40.00	-23.98	peak	Pass
2	97.4560	35.42	-20.51	14.91	43.50	-28.59	peak	Pass
3	366.5900	32.08	-12.62	19.46	46.00	-26.54	peak	Pass
4	564.4699	30.09	-5.54	24.55	46.00	-21.45	peak	Pass
5	833.1599	29.47	-0.62	28.85	46.00	-17.15	peak	Pass
6 *	959.2600	29.78	1.75	31.53	46.00	-14.47	peak	Pass

Remarks:

Level = Receiver Reading + Factor

Factor = Antenna Factor + Cable Factor – Preamplifier Factor

Test polarization:	Horizontal	Test voltage:	DC 3.85V
Temp.:	23.5°C	Humid.:	62%RH



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	31.2893	37.55	-13.51	24.04	40.00	-15.96	peak	Pass
2	204.6000	37.78	-20.80	16.98	43.50	-26.52	peak	Pass
3	422.8500	31.34	-10.11	21.23	46.00	-24.77	peak	Pass
4	553.8000	29.16	-5.67	23.49	46.00	-22.51	peak	Pass
5	740.0400	30.18	-2.11	28.07	46.00	-17.93	peak	Pass
6 *	937.9200	28.99	1.20	30.19	46.00	-15.81	peak	Pass

Remarks:

Level =Receiver Reading + Factor

Factor= Antenna Factor + Cable Factor – Preamplifier Factor



■ 1GHz-25GHz

Temp.:	21.7°C	Humid.:	63%RH
Test voltage:	DC 3.85V		

Test mode:	802.11b	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	48.46	-7.66	40.8	74	-33.20	Vertical
7236	44.6	-1.62	42.98	74	-31.02	Vertical
9648	45.28	1.27	46.55	74	-27.45	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	48.5	-7.66	40.84	74	-33.16	Horizontal
7236	44.03	-1.62	42.41	74	-31.59	Horizontal
9648	43.95	1.27	45.22	74	-28.78	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	39.28	-7.66	31.62	74	-42.38	Vertical
7236	34.93	-1.62	33.31	74	-40.69	Vertical
9648	35.59	1.27	36.86	74	-37.14	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	40.19	-7.66	32.53	74	-41.47	Horizontal
7236	36.62	-1.62	35	74	-39.00	Horizontal
9648	35.19	1.27	36.46	74	-37.54	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor =Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” , means this data is the too weak instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11b	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	48.94	-7.58	41.36	74	-32.64	Vertical
7311	45.24	-1.4	43.84	74	-30.16	Vertical
9748	45	1.2	46.2	74	-27.80	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	48.94	-7.58	41.36	74	-32.64	Horizontal
7311	44.86	-1.4	43.46	74	-30.54	Horizontal
9748	45.17	1.2	46.37	74	-27.63	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	38.13	-7.58	30.55	74	-43.45	Vertical
7311	34.29	-1.4	32.89	74	-41.11	Vertical
9748	34.41	1.2	35.61	74	-38.39	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	39.81	-7.58	32.23	74	-41.77	Horizontal
7311	36.62	-1.4	35.22	74	-38.78	Horizontal
9748	35.96	1.2	37.16	74	-36.84	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor =Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” , means this data is the too weak instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11b	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	48.45	-7.49	40.96	74	-33.04	Vertical
7386	44.55	-1.18	43.37	74	-30.63	Vertical
9848	45.81	1.12	46.93	74	-27.07	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	48.21	-7.49	40.72	74	-33.28	Horizontal
7386	43.78	-1.18	42.6	74	-31.40	Horizontal
9848	44.7	1.12	45.82	74	-28.18	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	40.17	-7.49	32.68	74	-41.32	Vertical
7386	37.01	-1.18	35.83	74	-38.17	Vertical
9848	36.93	1.12	38.05	74	-35.95	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	41.28	-7.49	33.79	74	-40.21	Horizontal
7386	37.75	-1.18	36.57	74	-37.43	Horizontal
9848	35.86	1.12	36.98	74	-37.02	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11g	Test channel:	lowest
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	50.93	-7.66	43.27	74	-30.73	Vertical
7236	46.4	-1.62	44.78	74	-29.22	Vertical
9648	48.61	1.27	49.88	74	-24.12	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	50.51	-7.66	42.85	74	-31.15	Horizontal
7236	46.45	-1.62	44.83	74	-29.17	Horizontal
9648	47.46	1.27	48.73	74	-25.27	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	41.96	-7.66	34.3	74	-39.70	Vertical
7236	38.13	-1.62	36.51	74	-37.49	Vertical
9648	38.34	1.27	39.61	74	-34.39	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	42.77	-7.66	35.11	74	-38.89	Horizontal
7236	38.59	-1.62	36.97	74	-37.03	Horizontal
9648	37.21	1.27	38.48	74	-35.52	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

1. $Level = Read\ level + Factor$
2. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11g	Test channel:	Middle
------------	---------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	51.13	-7.58	43.55	74	-30.45	Vertical
7311	50.89	-1.4	49.49	74	-24.51	Vertical
9748	47.68	1.2	48.88	74	-25.12	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	50.39	-7.58	42.81	74	-31.19	Horizontal
7311	46.63	-1.4	45.23	74	-28.77	Horizontal
9748	44.47	1.2	45.67	74	-28.33	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	42.69	-7.58	35.11	74	-38.89	Vertical
7311	38.37	-1.4	36.97	74	-37.03	Vertical
9748	38.16	1.2	39.36	74	-34.64	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	42.39	-7.58	34.81	74	-39.19	Horizontal
7311	37.76	-1.4	36.36	74	-37.64	Horizontal
9748	37.35	1.2	38.55	74	-35.45	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11g	Test channel:	Highest
------------	---------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.06	-7.49	43.57	74	-30.43	Vertical
7386	47.21	-1.18	46.03	74	-27.97	Vertical
9848	48.38	1.12	49.5	74	-24.50	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	51.86	-7.49	44.37	74	-29.63	Horizontal
7386	48.99	-1.18	47.81	74	-26.19	Horizontal
9848	47.53	1.12	48.65	74	-25.35	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	41.5	-7.49	34.01	74	-39.99	Vertical
7386	38.54	-1.18	37.36	74	-36.64	Vertical
9848	38.18	1.12	39.3	74	-34.70	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	42.79	-7.49	35.3	74	-38.70	Horizontal
7386	38.72	-1.18	37.54	74	-36.46	Horizontal
9848	37.49	1.12	38.61	74	-35.39	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n20	Test channel:	Lowest
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	52.01	-7.66	44.35	74	-29.65	Vertical
7236	46.75	-1.62	45.13	74	-28.87	Vertical
9648	48.23	1.27	49.5	74	-24.50	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	50.65	-7.66	42.99	74	-31.01	Horizontal
7236	47.85	-1.62	46.23	74	-27.77	Horizontal
9648	47.26	1.27	48.53	74	-25.47	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4824	42.15	-7.66	34.49	74	-39.51	Vertical
7236	38.04	-1.62	36.42	74	-37.58	Vertical
9648	36.95	1.27	38.22	74	-35.78	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4824	42.31	-7.66	34.65	74	-39.35	Horizontal
7236	38.11	-1.62	36.49	74	-37.51	Horizontal
9648	37.2	1.27	38.47	74	-35.53	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

1. $Level = Read\ level + Factor$
2. $Factor = Antenna\ Factor + Cable\ Loss - Preamplifier\ Factor$
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n20	Test channel:	Middle
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	51	-7.58	43.42	74	-30.58	Vertical
7311	49.82	-1.4	48.42	74	-25.58	Vertical
9748	47.04	1.2	48.24	74	-25.76	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	52.64	-7.58	45.06	74	-28.94	Horizontal
7311	46.74	-1.4	45.34	74	-28.66	Horizontal
9748	48.23	1.2	49.43	74	-24.57	Horizontal
12185		--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	41.54	-7.58	33.96	74	-40.04	Vertical
7311	39.77	-1.4	38.37	74	-35.63	Vertical
9748	37.27	1.2	38.47	74	-35.53	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	42.4	-7.58	34.82	74	-39.18	Horizontal
7311	39.21	-1.4	37.81	74	-36.19	Horizontal
9748	37.09	1.2	38.29	74	-35.71	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor =Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” , means this data is the too weak instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11n20	Test channel:	Highest
------------	-----------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	51.03	-7.49	43.54	74	-30.46	Vertical
7386	46.64	-1.18	45.46	74	-28.54	Vertical
9848	47.1	1.12	48.22	74	-25.78	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	51	-7.49	43.51	74	-30.49	Horizontal
7386	49.64	-1.18	48.46	74	-25.54	Horizontal
9848	46.39	1.12	47.51	74	-26.49	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4924	41.25	-7.49	33.76	74	-40.24	Vertical
7386	37.02	-1.18	35.84	74	-38.16	Vertical
9848	36.29	1.12	37.41	74	-36.59	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4924	40.78	-7.49	33.29	74	-40.71	Horizontal
7386	39.02	-1.18	37.84	74	-36.16	Horizontal
9848	35.62	1.12	36.74	74	-37.26	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n40	Test channel:	Lowest
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4844	49.35	-7.63	41.72	74	-32.28	Vertical
7266	46.26	-1.53	44.73	74	-29.27	Vertical
9688	44.41	1.24	45.65	74	-28.35	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	48.25	-7.63	40.62	74	-33.38	Horizontal
7266	44.88	-1.53	43.35	74	-30.65	Horizontal
9688	52.31	1.24	53.55	74	-20.45	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	polarization
4844	39.51	-7.63	31.88	74	-42.12	Vertical
7266	36.89	-1.53	35.36	74	-38.64	Vertical
9688	34.94	1.24	36.18	74	-37.82	Vertical
12060	*	--	--	74	--	Vertical
14472	*	--	--	74	--	Vertical
16884	*	--	--	74	--	Vertical
4844	40.05	-7.63	32.42	74	-41.58	Horizontal
7266	37.55	-1.53	36.02	74	-37.98	Horizontal
9688	36.83	1.24	38.07	74	-35.93	Horizontal
12060	*	--	--	74	--	Horizontal
14472	*	--	--	74	--	Horizontal
16884	*	--	--	74	--	Horizontal

Remark:

1. Level = Read level + Factor
2. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
3. “*”, means this data is the too weak instrument of signal is unable to test.
4. Emissions more than 20 dB below the limit do not need to be reported.



Test mode:	802.11n40	Test channel:	Middle
------------	-----------	---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	49.41	-7.58	41.83	74	-32.17	Vertical
7311	49.09	-1.4	47.69	74	-26.31	Vertical
9748	46.52	1.2	47.72	74	-26.28	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	51.01	-7.58	43.43	74	-30.57	Horizontal
7311	45.71	-1.4	44.31	74	-29.69	Horizontal
9748	46.46	1.2	47.66	74	-26.34	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4874	41.43	-7.58	33.85	74	-40.15	Vertical
7311	38.71	-1.4	37.31	74	-36.69	Vertical
9748	36.09	1.2	37.29	74	-36.71	Vertical
12185	*	--	--	74	--	Vertical
14622	*	--	--	74	--	Vertical
17059	*	--	--	74	--	Vertical
4874	42.4	-7.58	34.82	74	-39.18	Horizontal
7311	37.89	-1.4	36.49	74	-37.51	Horizontal
9748	34.88	1.2	36.08	74	-37.92	Horizontal
12185	*	--	--	74	--	Horizontal
14622	*	--	--	74	--	Horizontal
17059	*	--	--	74	--	Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor = Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” means this data is too weak, the instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*



Test mode:	802.11n40	Test channel:	Highest
------------	-----------	---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	49.75	-7.52	42.23	74	-31.77	Vertical
7356	45.39	-1.26	44.13	74	-29.87	Vertical
9808	47.25	1.16	48.41	74	-25.59	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	50.6	-7.52	43.08	74	-30.92	Horizontal
7356	48.1	-1.26	46.84	74	-27.16	Horizontal
9808	46.66	1.16	47.82	74	-26.18	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4904	40.16	-7.52	32.64	74	-41.36	Vertical
7356	37.24	-1.26	35.98	74	-38.02	Vertical
9808	35.69	1.16	36.85	74	-37.15	Vertical
12310	*	--	--	74	--	Vertical
14772	*	--	--	74	--	Vertical
17234	*	--	--	74	--	Vertical
4904	41.75	-7.52	34.23	74	-39.77	Horizontal
7356	37.97	-1.26	36.71	74	-37.29	Horizontal
9808	35.96	1.16	37.12	74	-36.88	Horizontal
12310	*	--	--	74	--	Horizontal
14772	*	--	--	74	--	Horizontal
17234	*	--	--	74	--	Horizontal

Remark:

1. *Level = Read level + Factor*
2. *Factor =Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*” , means this data is the too weak instrument of signal is unable to test.*
4. *Emissions more than 20 dB below the limit do not need to be reported.*

5. APPENDIX 1-TEST DATA

Duty Cycle

Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
b	2412	0.737	0.785	93.89	0.27	1.36
b	2437	0.737	0.785	93.89	0.27	1.36
b	2462	0.736	0.785	93.76	0.28	1.36
g	2412	0.116	0.17	68.24	1.66	8.6
g	2437	0.116	0.17	68.24	1.66	8.6
g	2462	0.116	0.169	68.64	1.63	8.6
n20	2412	0.114	0.169	67.46	1.71	8.7
n20	2437	0.116	0.169	68.64	1.63	8.66
n20	2462	0.116	0.17	68.24	1.66	8.66
n40	2422	0.076	0.129	58.91	2.3	13.25
n40	2437	0.076	0.129	58.91	2.3	13.25
n40	2452	0.075	0.129	58.14	2.36	13.25

