




Plot 6: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-21
ConvF	1.73
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1907.6
Relative permittivity (real part)	40.56
Conductivity (S/m)	1.38

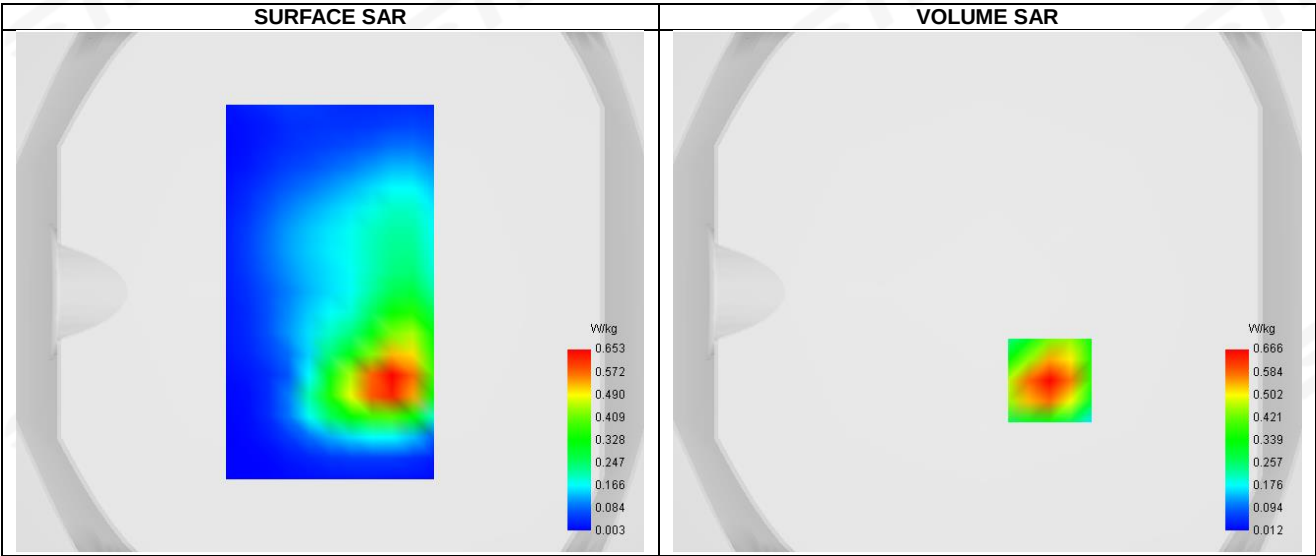


Maximum location: X=24.00, Y=-34.00 ; SAR Peak: 1.06 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.335
SAR 1g (W/Kg)	0.634
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.651091

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.061	0.666	0.364	0.214	0.122	0.070	0.040

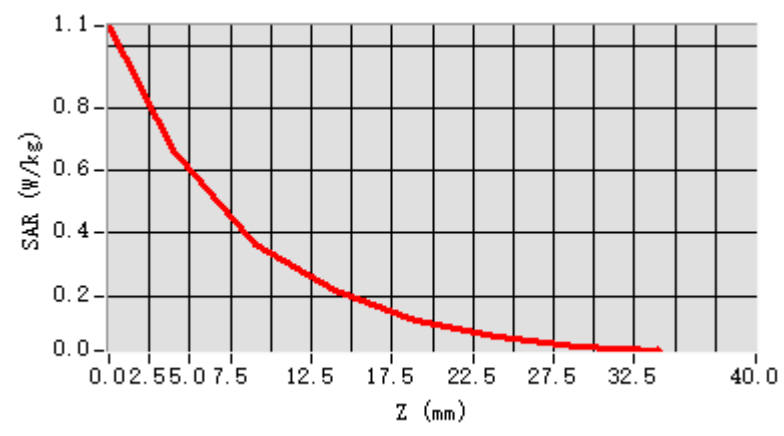


F. 3D Image

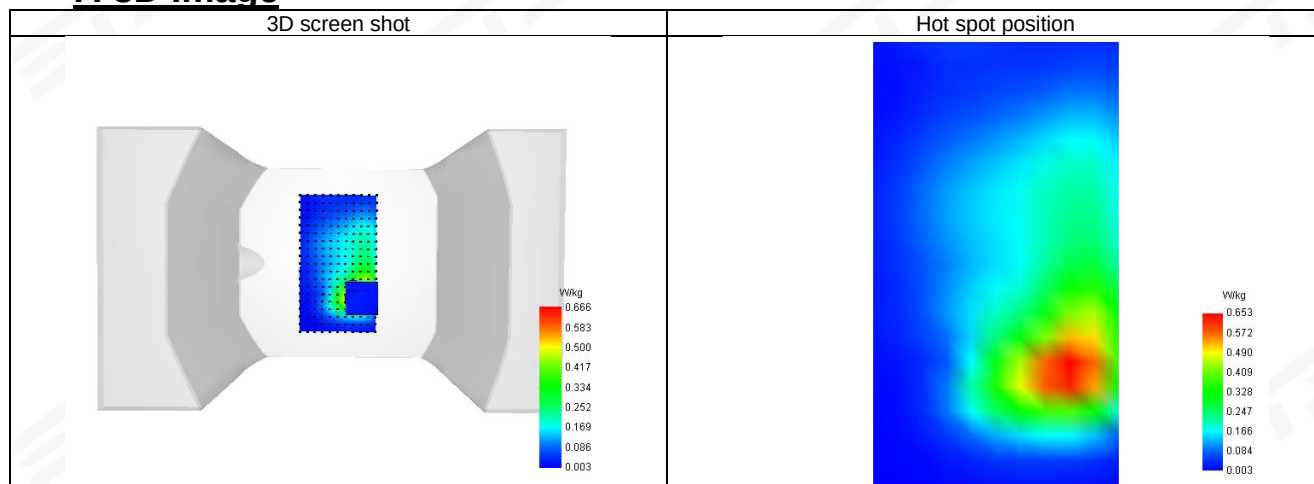

Plot 7: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-21
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA 4
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1712.6
Relative permittivity (real part)	40.92
Conductivity (S/m)	1.36

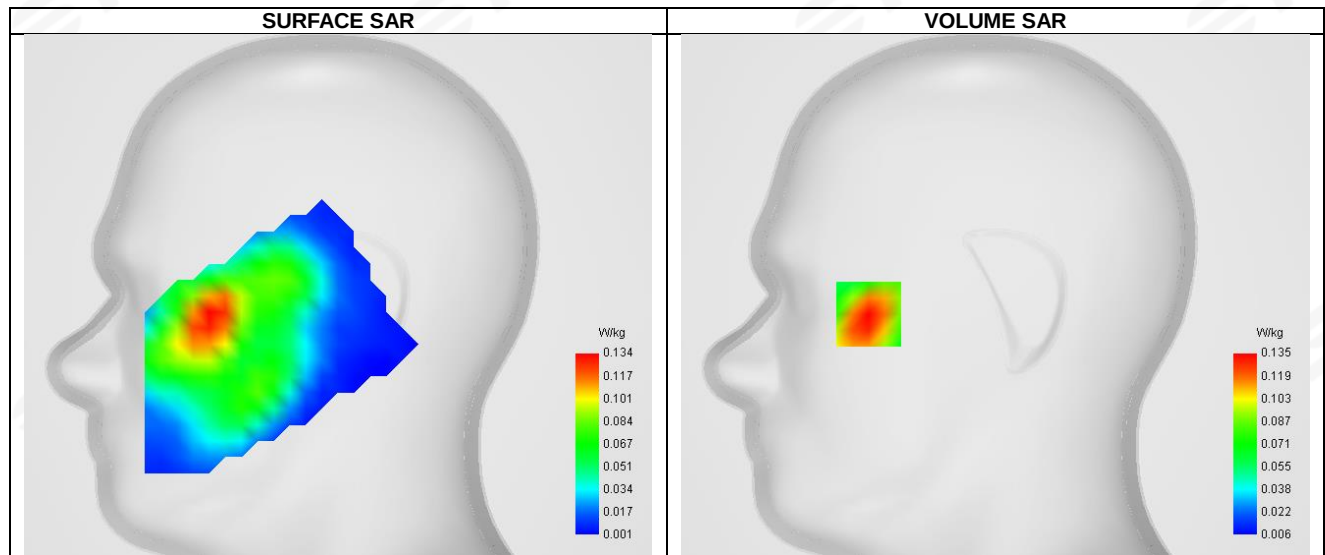


Maximum location: X=-63.00, Y=-9.00 ; SAR Peak: 0.19 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.082
SAR 1g (W/Kg)	0.130
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	68.770940

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.187	0.135	0.092	0.062	0.045	0.031	0.022

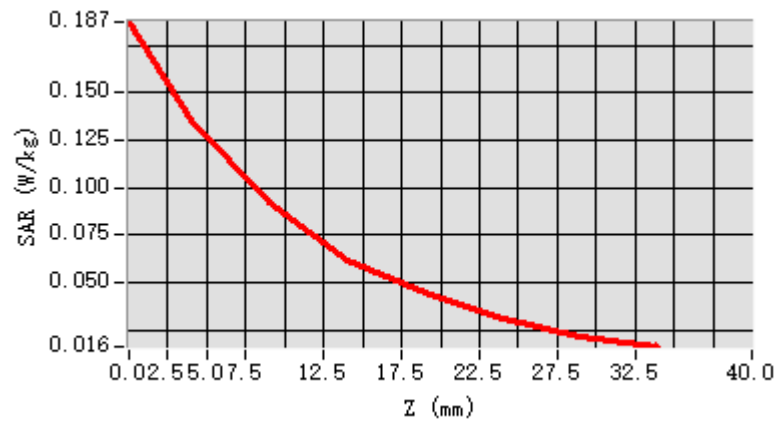


F. 3D Image

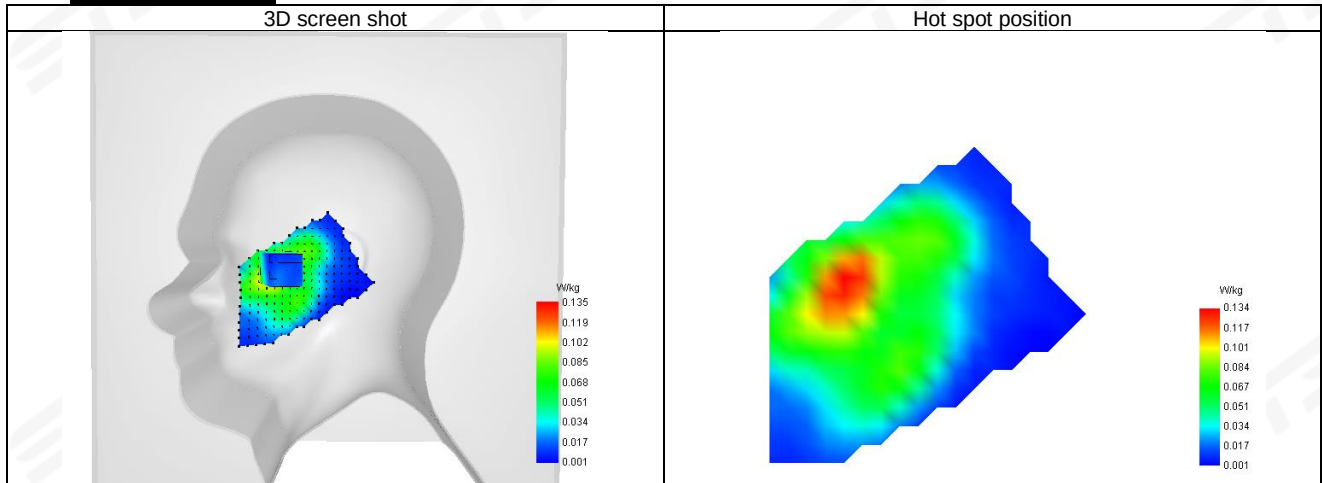

Plot 8: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-21
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 4
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1712.6
Relative permittivity (real part)	40.92
Conductivity (S/m)	1.36

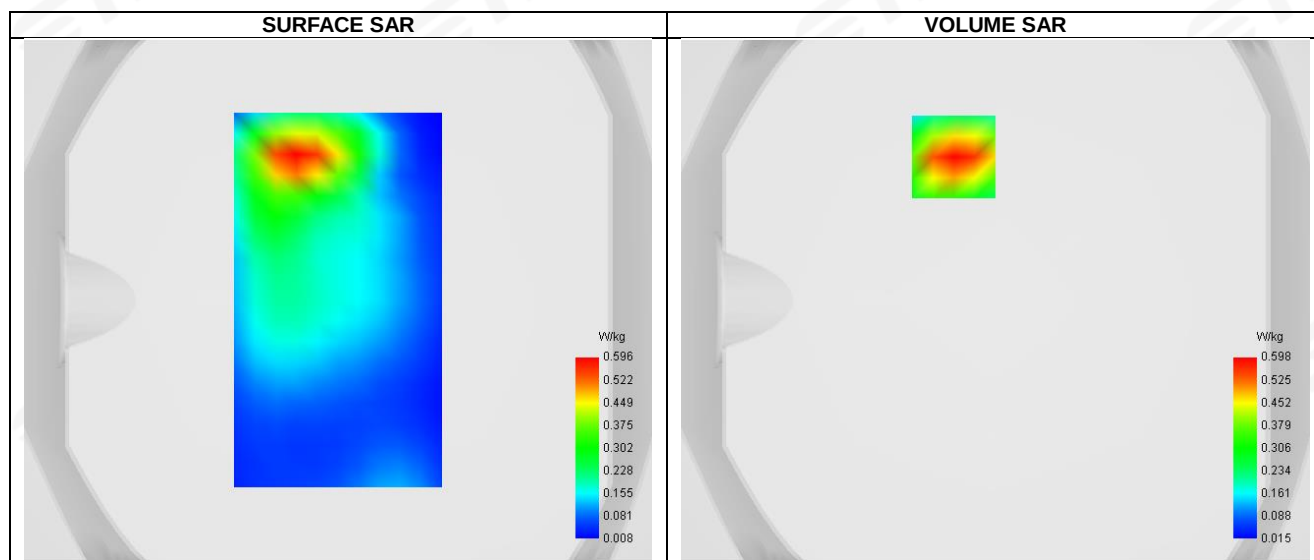


Maximum location: X=-16.00, Y=55.00 ; SAR Peak: 0.92 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.312
SAR 1g (W/Kg)	0.566
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.895447

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.923	0.598	0.346	0.205	0.128	0.077	0.047

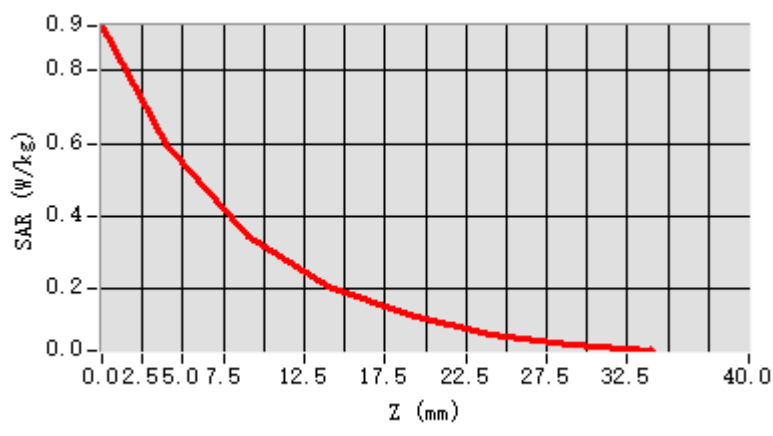


F. 3D Image

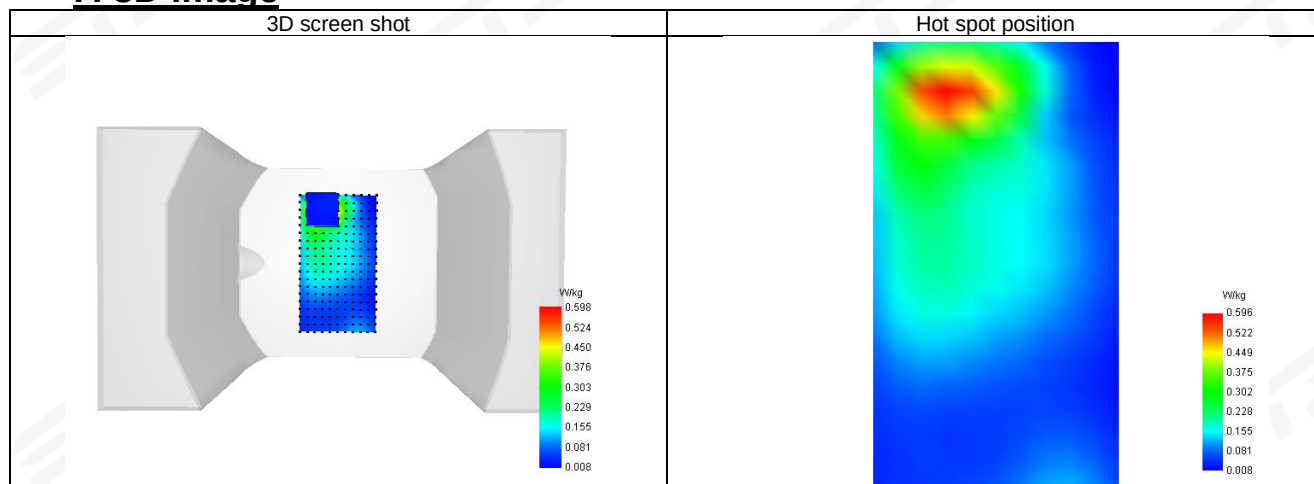



Plot 9: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA 5
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	41.65
Conductivity (S/m)	0.90

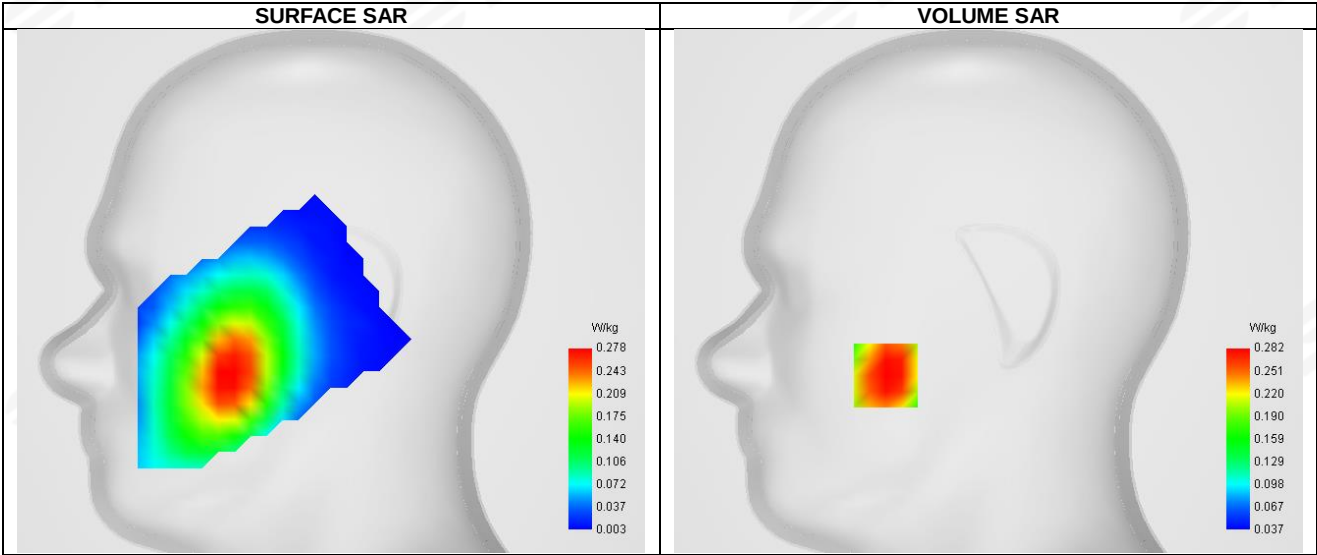


Maximum location: X=-51.00, Y=-42.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.205
SAR 1g (W/Kg)	0.279
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	79.432624

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.346	0.282	0.224	0.182	0.143	0.108	0.084

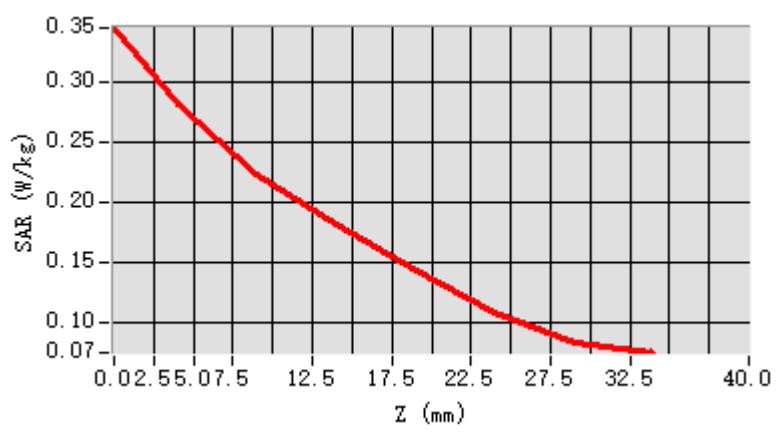


F. 3D Image

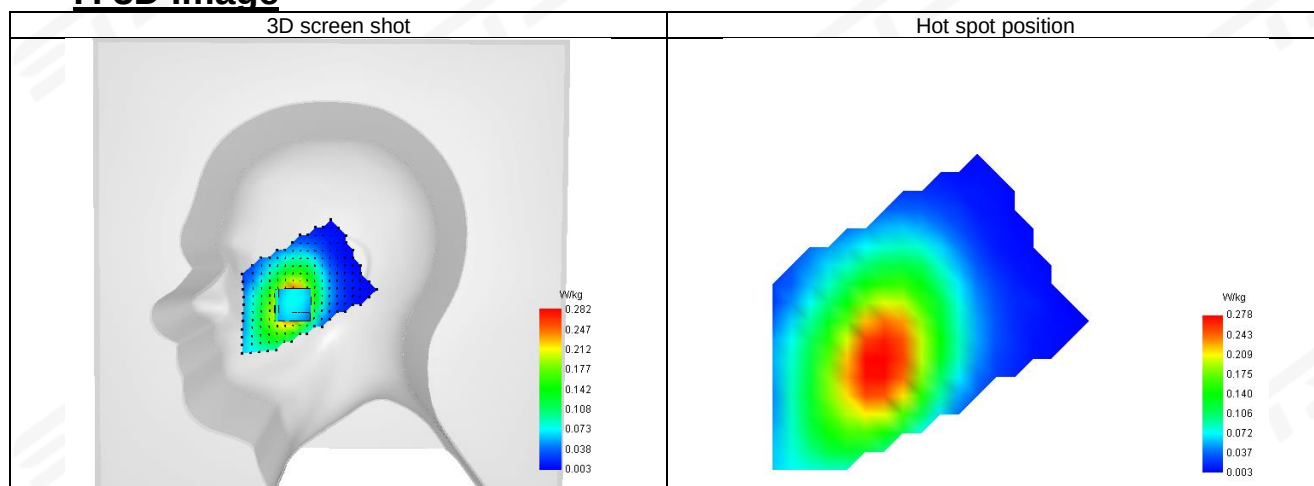



Plot 10: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA 5
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	846.6
Relative permittivity (real part)	41.65
Conductivity (S/m)	0.90

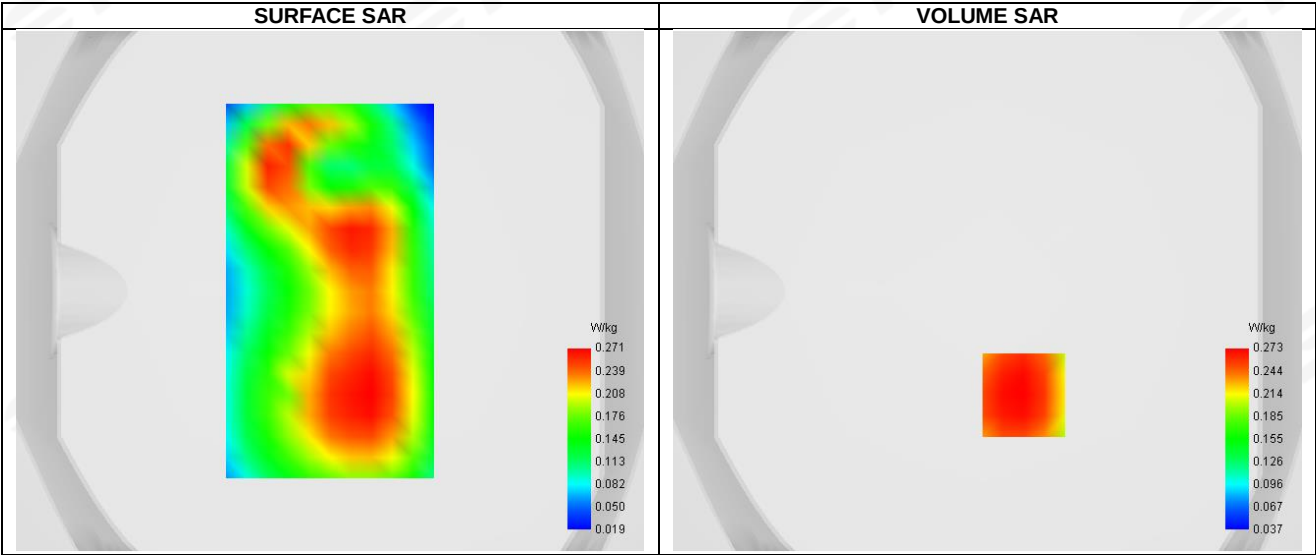


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.191
SAR 1g (W/Kg)	0.267
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	75.091575

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.350	0.273	0.205	0.152	0.120	0.091	0.070

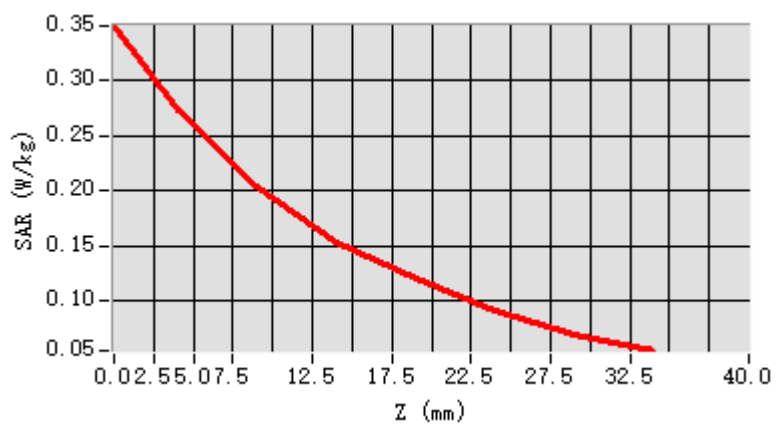


F. 3D Image

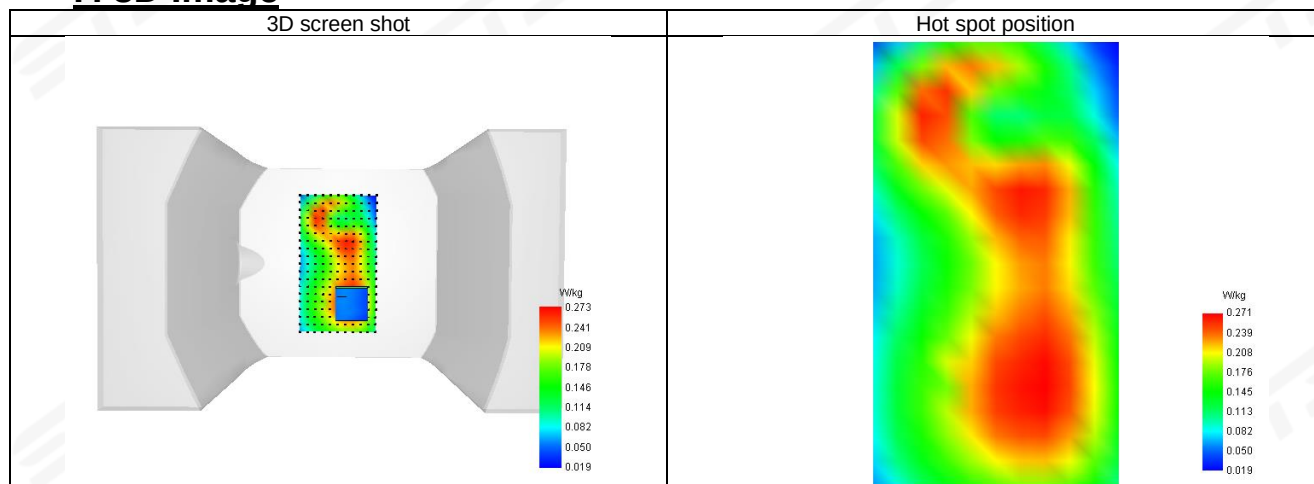

Plot 11: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-22
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	2.4G WLAN
Signal	802.11b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	39.16
Conductivity (S/m)	1.78

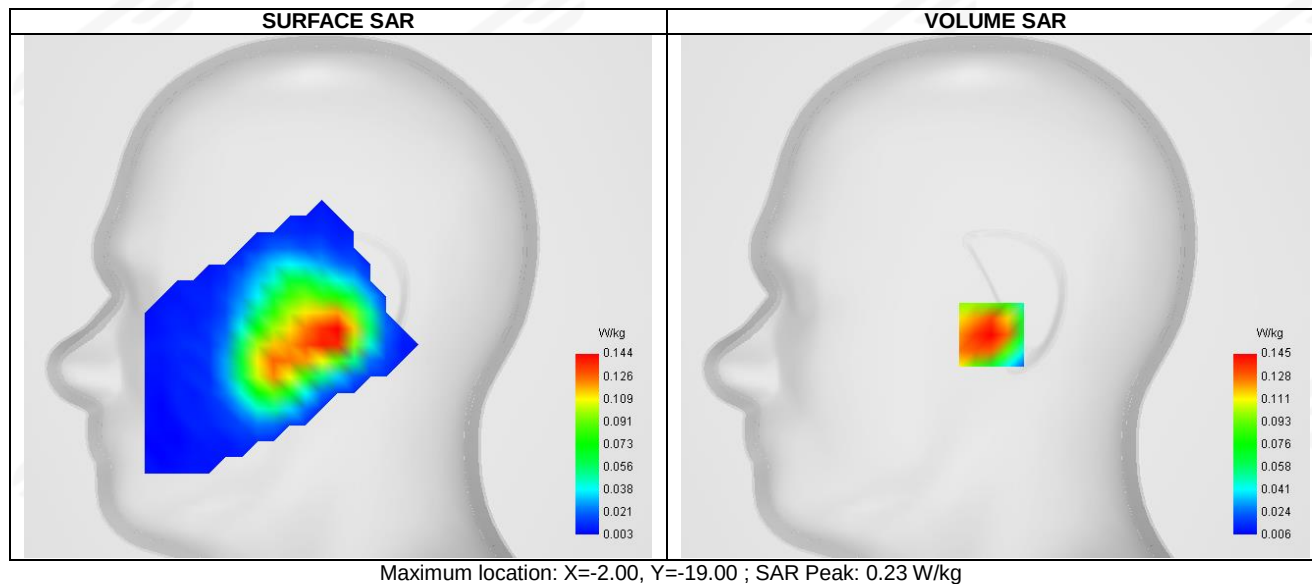


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.077
SAR 1g (W/Kg)	0.139
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	58.562675

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.223	0.145	0.085	0.050	0.032	0.019	0.012

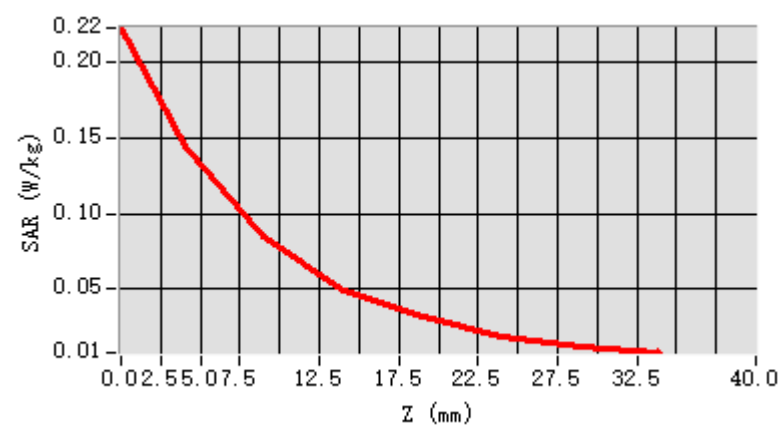


F. 3D Image

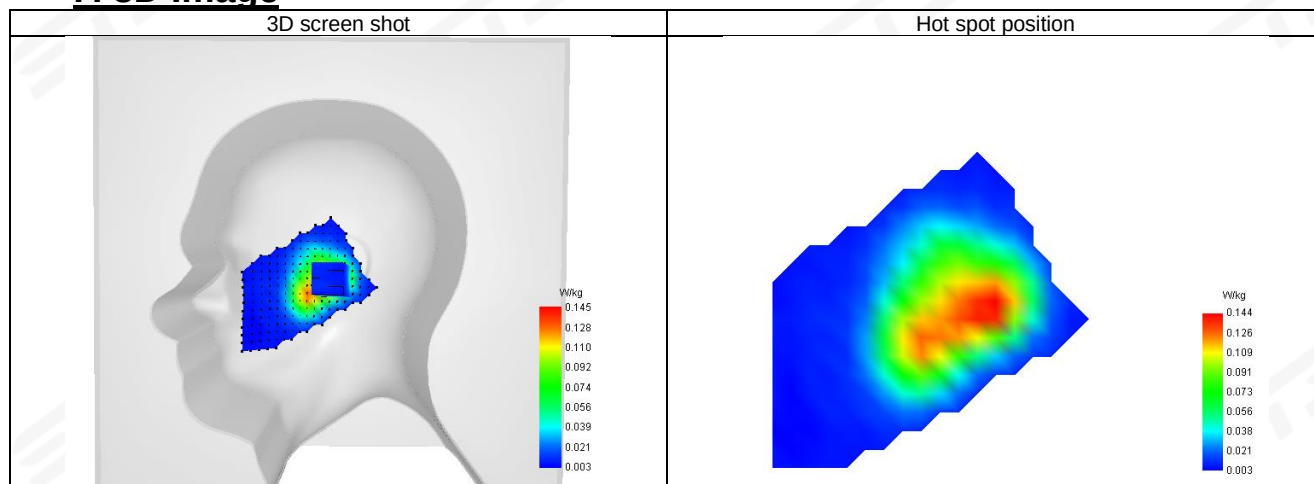



Plot 12: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-17
ConvF	1.82
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	2.4G WLAN
Signal	802.11b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	39.16
Conductivity (S/m)	1.78

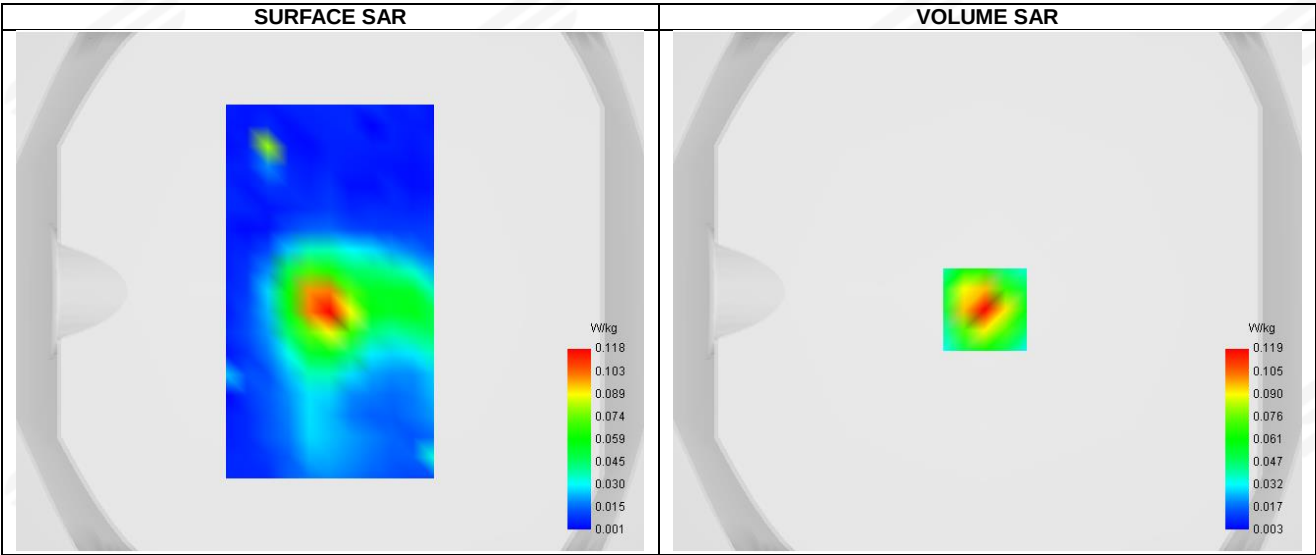


Maximum location: X=-1.00, Y=-7.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.058
SAR 1g (W/Kg)	0.113
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	54.347526

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.197	0.119	0.065	0.046	0.029	0.018	0.012

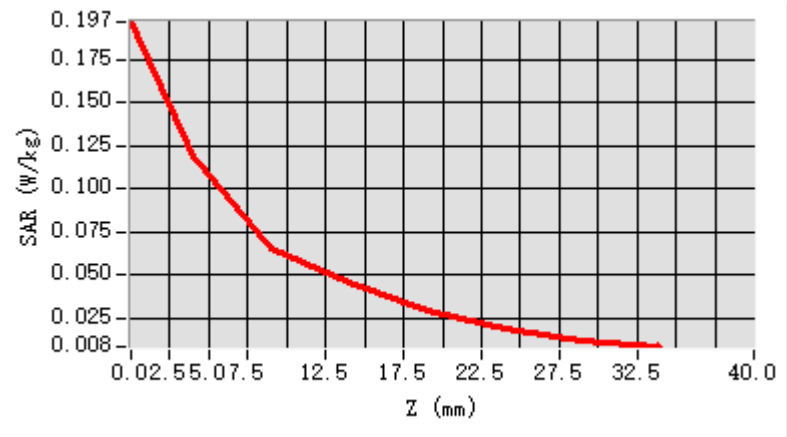


F. 3D Image

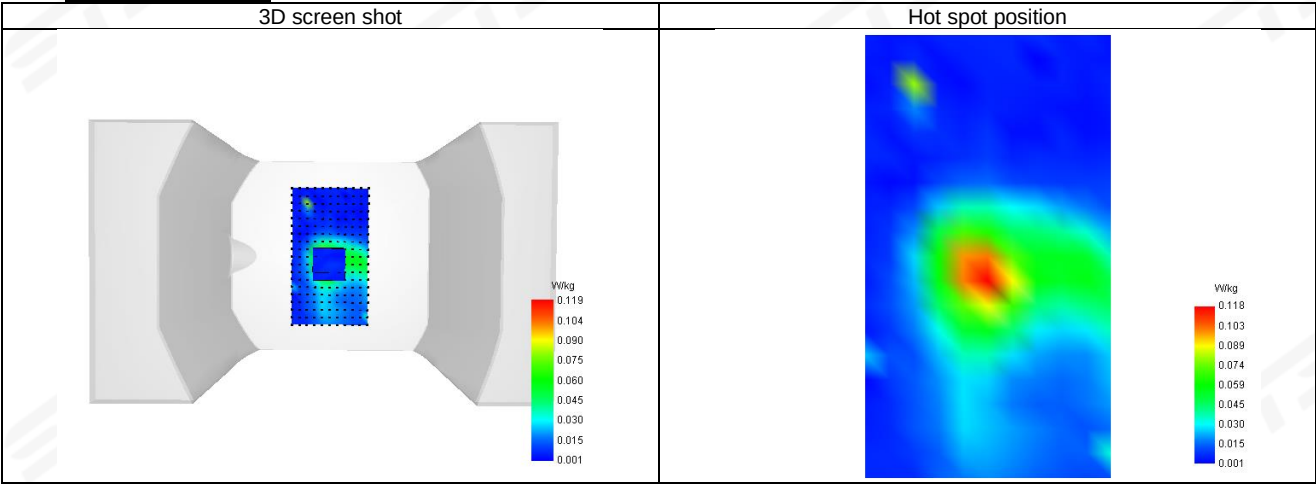

Plot 13: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-23
ConvF	1.37
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	5.2GHz WLAN
Signal	802.11a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	36.55
Conductivity (S/m)	4.65

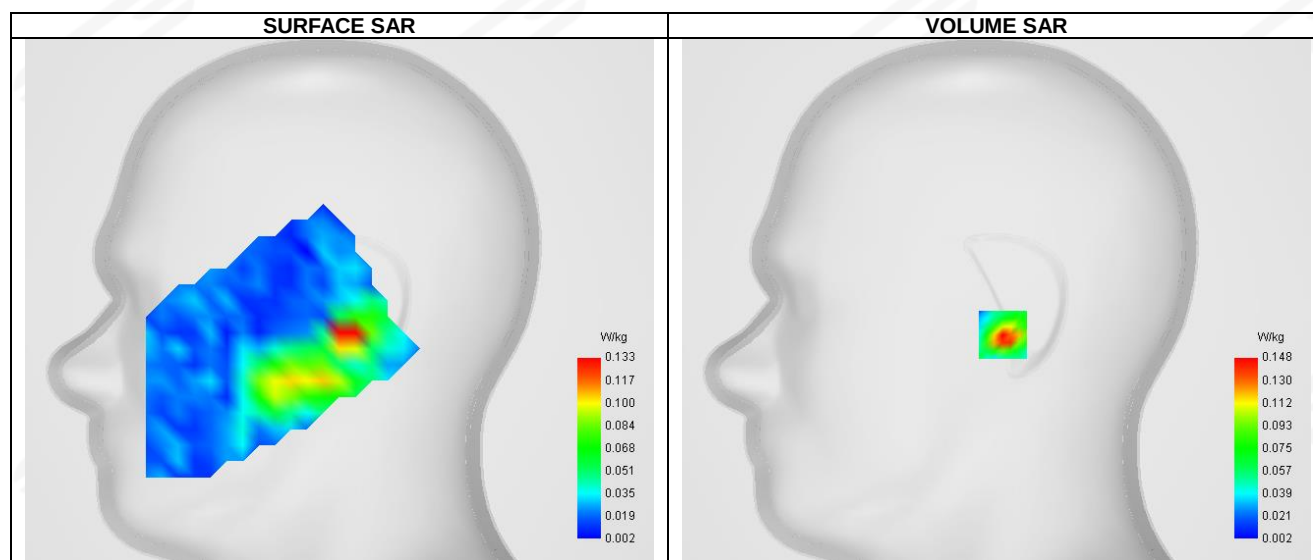


Maximum location: X=3.00, Y=-17.00 ; SAR Peak: 0.44 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.060
SAR 1g (W/Kg)	0.159
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.957804

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.230	0.148	0.082	0.055	0.057	0.044	0.034	0.026	0.020	0.016	0.012	0.009	0.009

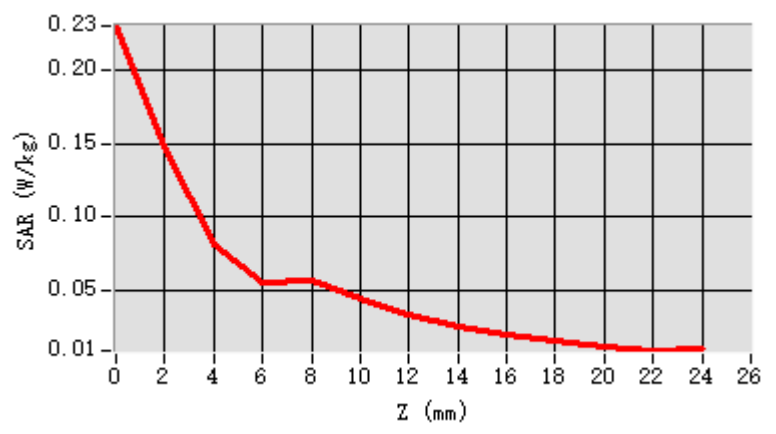


F. 3D Image

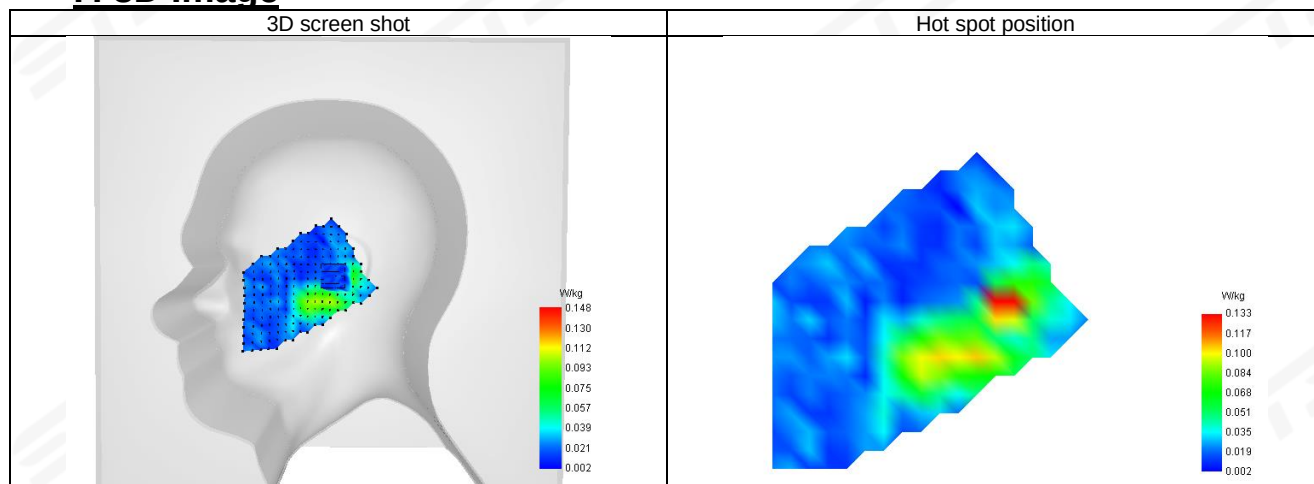



Plot 14: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-23
ConvF	1.37
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	5.2GHz WLAN
Signal	802.11a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	36.55
Conductivity (S/m)	4.65

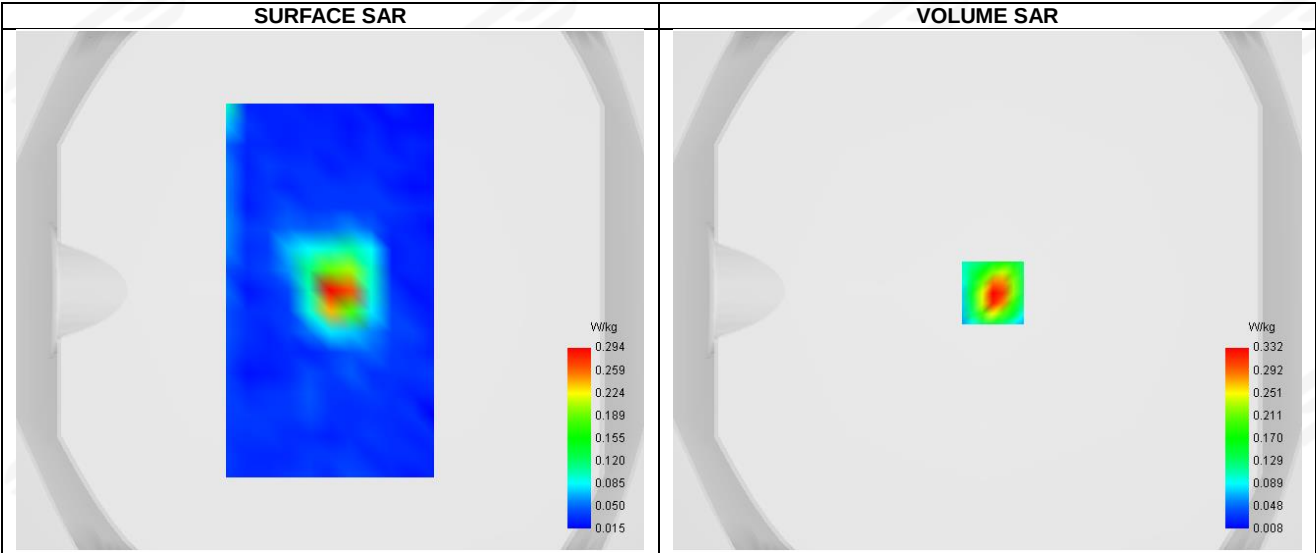


Maximum location: X=2.00, Y=-1.00 ; SAR Peak: 0.53 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.080
SAR 1g (W/Kg)	0.202
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	65.662843

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00
SAR (W/Kg)	0.511	0.332	0.218	0.134	0.095	0.068	0.047	0.038	0.038	0.033	0.029	0.014

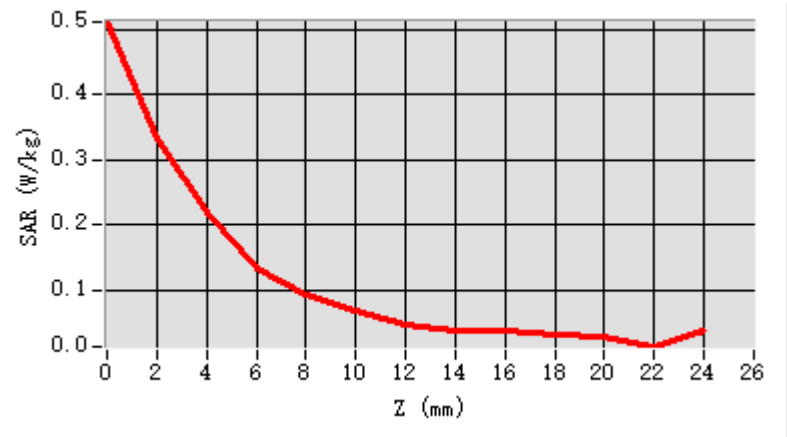


F. 3D Image

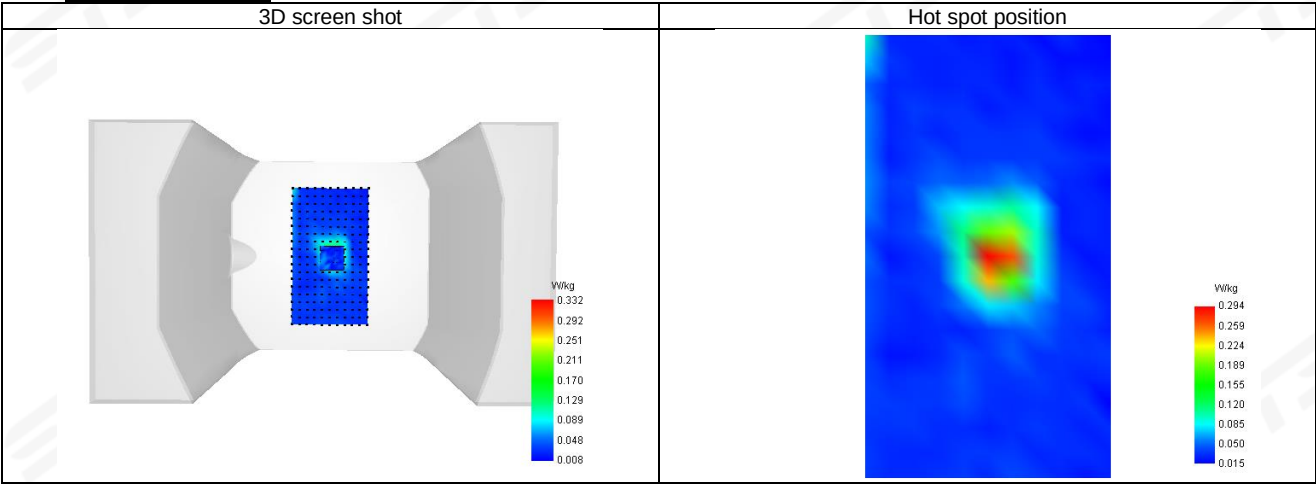

Plot 15: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-23
ConvF	1.32
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Right Cheek
Device Position	Cheek
Band	5.8GHz WLAN
Signal	802.11a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	35.32
Conductivity (S/m)	5.22

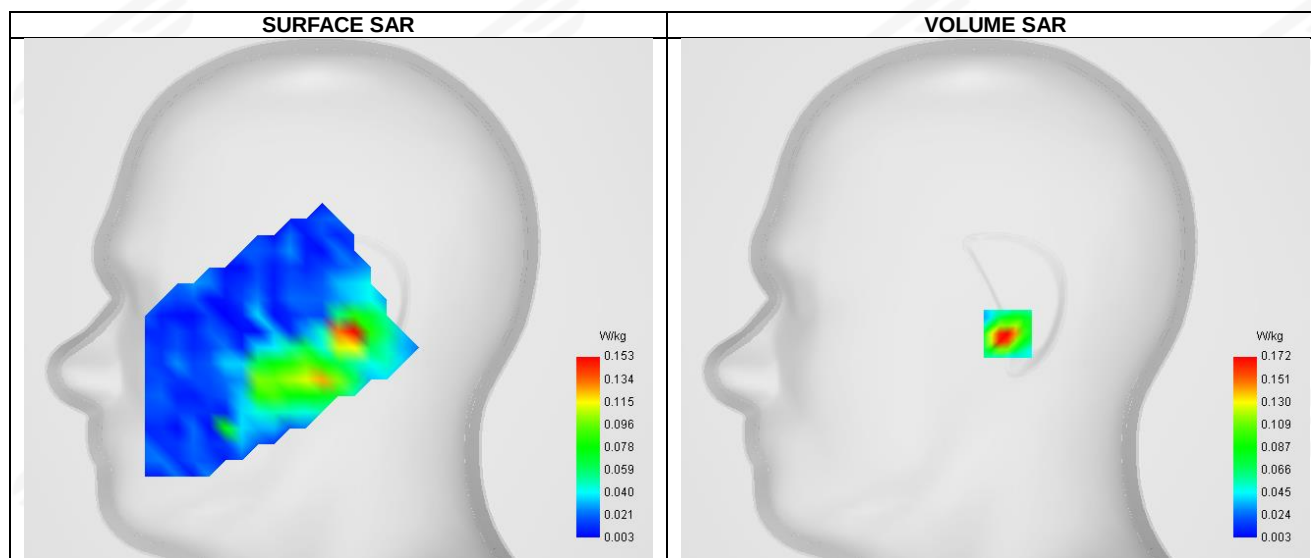


Maximum location: X=6.00, Y=-17.00 ; SAR Peak: 0.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.065
SAR 1g (W/Kg)	0.185
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	60.199488

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.270	0.172	0.104	0.060	0.073	0.058	0.046	0.037	0.029	0.023	0.019	0.015	0.015

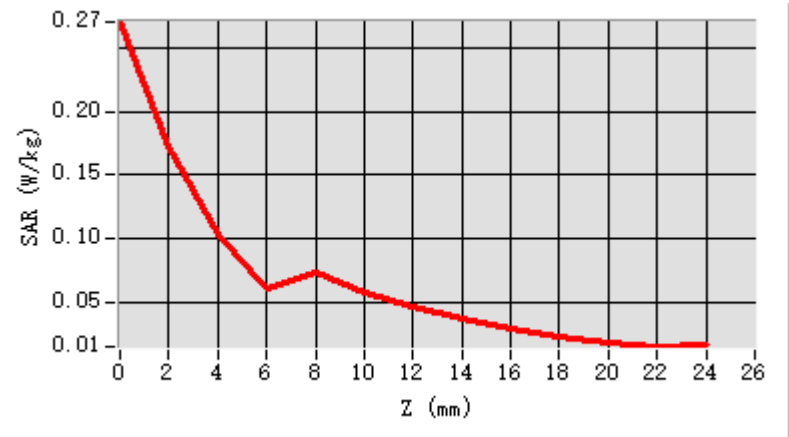


F. 3D Image

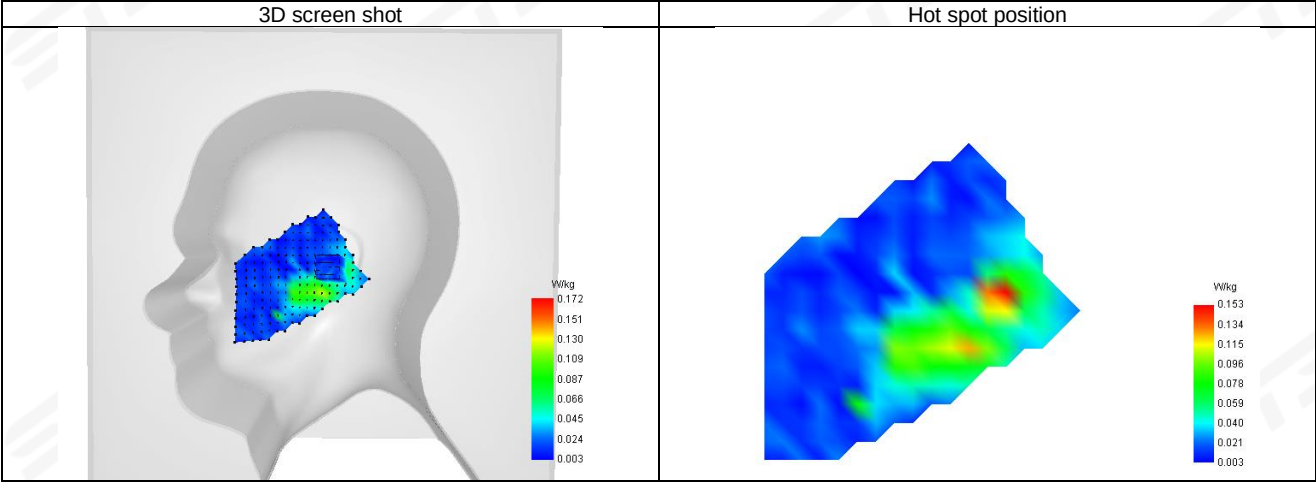

**Plot 16: DUT: Smart Phone; EUT Model: C66**


Test Date	2026-01-23
ConvF	1.32
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12, dx=4mm, dy=4mm, dz=2mm,
Phantom	Validation plane
Device Position	Back Side
Band	5.8GHz WLAN
Signal	802.11a (Crest factor: 1.0)
Frequency (MHz)	5745
Relative permittivity (real part)	35.32
Conductivity (S/m)	5.22

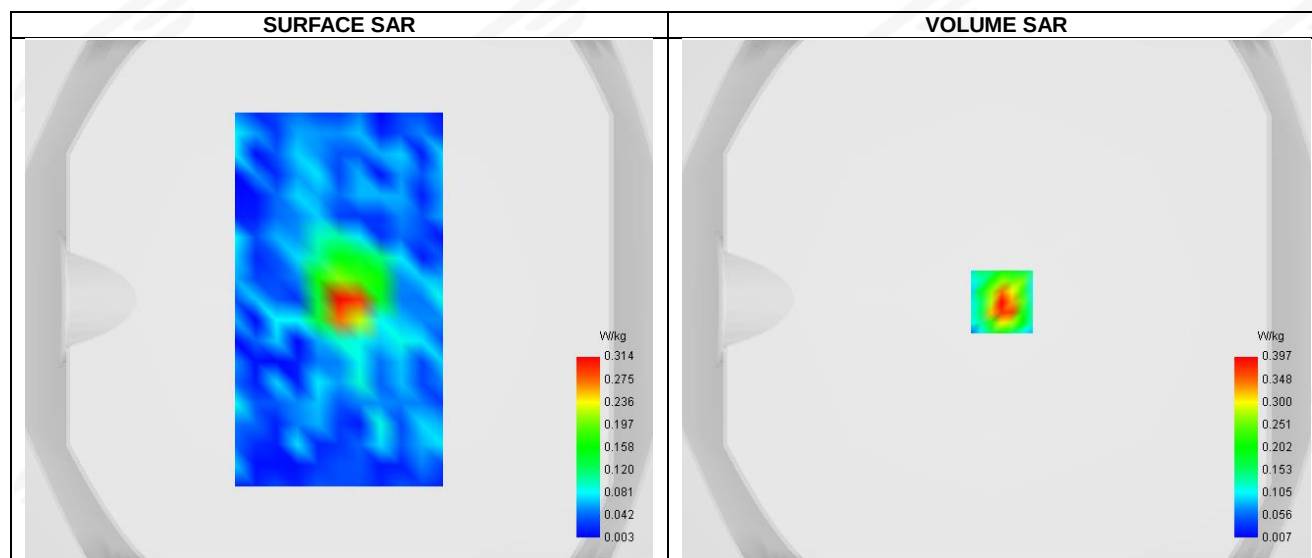**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.094
SAR 1g (W/Kg)	0.250
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.616004

E. Z Axis Scan

Z (mm)	0.00	2.00	4.00	6.00	8.00	10.00	12.00	14.00	16.00	18.00	20.00	22.00	24.00
SAR (W/Kg)	0.594	0.397	0.210	0.136	0.147	0.070	0.041	0.026	0.031	0.010	0.016	0.021	0.021

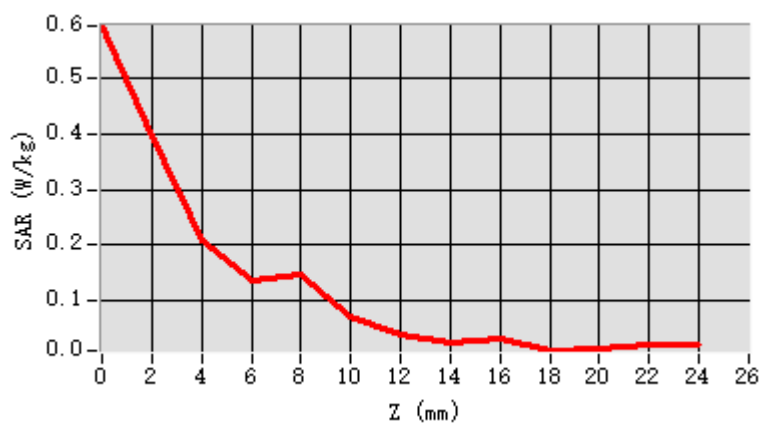


F. 3D Image

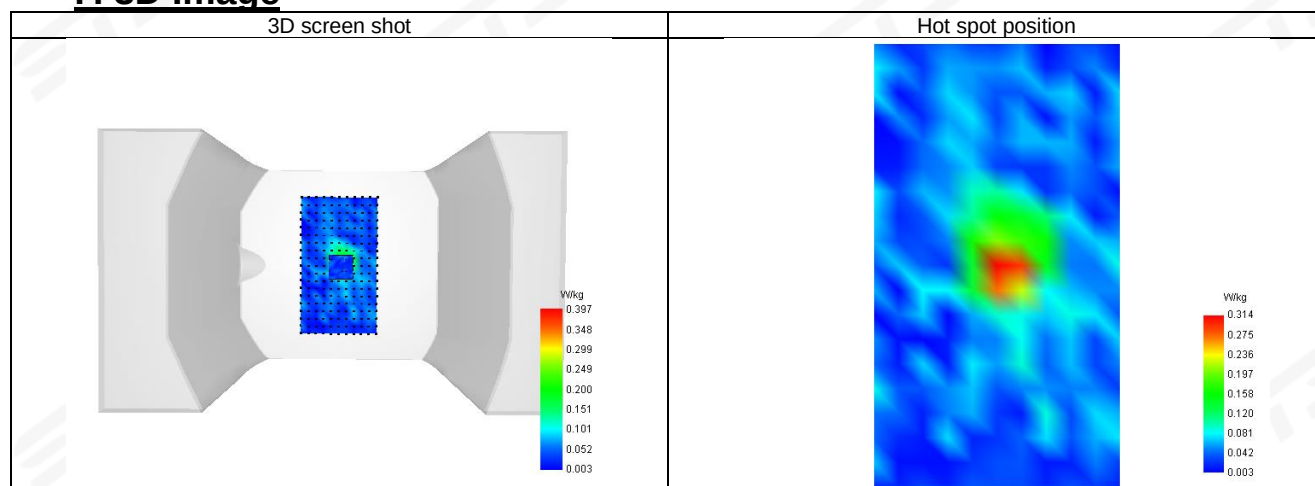

Plot 17: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	42.13
Conductivity (S/m)	0.89

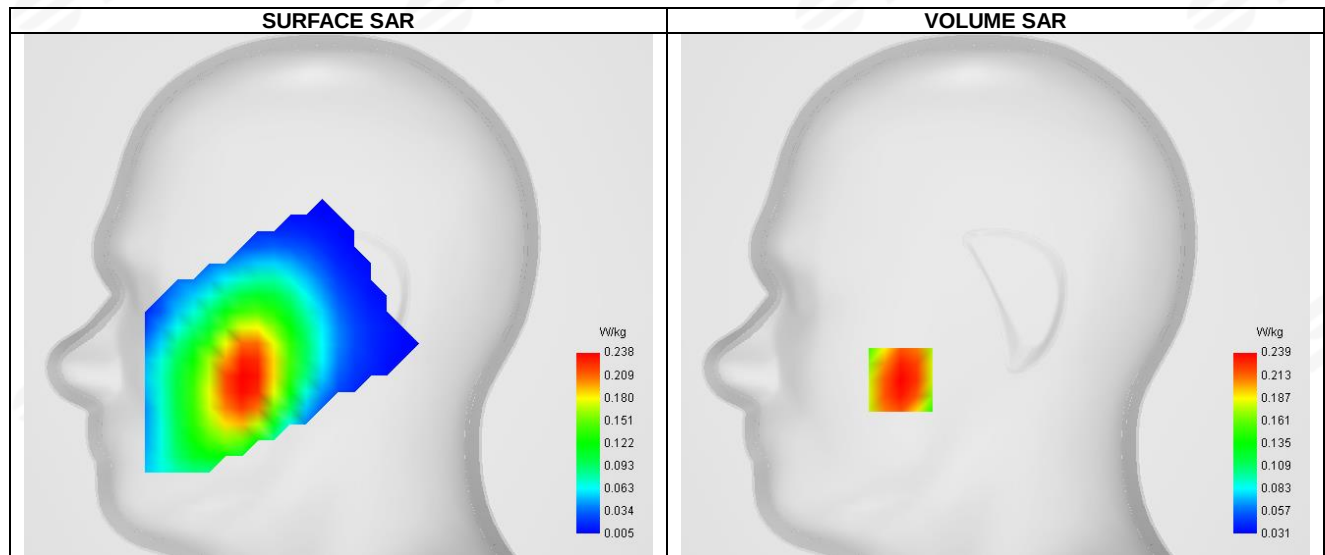


Maximum location: X=-47.00, Y=-42.00 ; SAR Peak: 0.29 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.173
SAR 1g (W/Kg)	0.234
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	79.497907

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.294	0.239	0.190	0.152	0.121	0.094	0.076

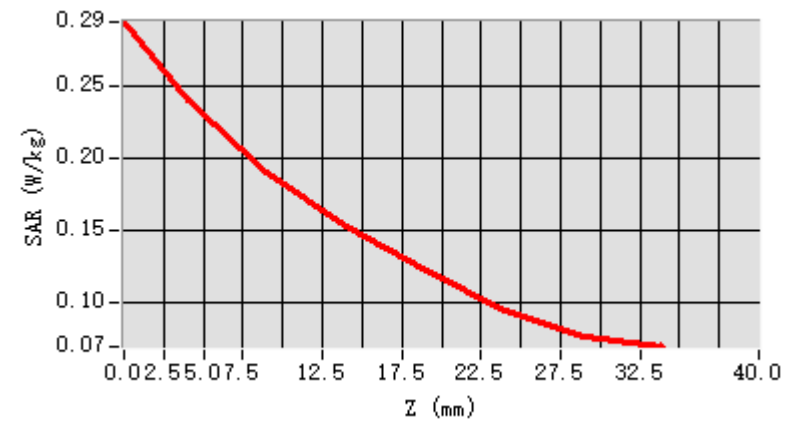


F. 3D Image

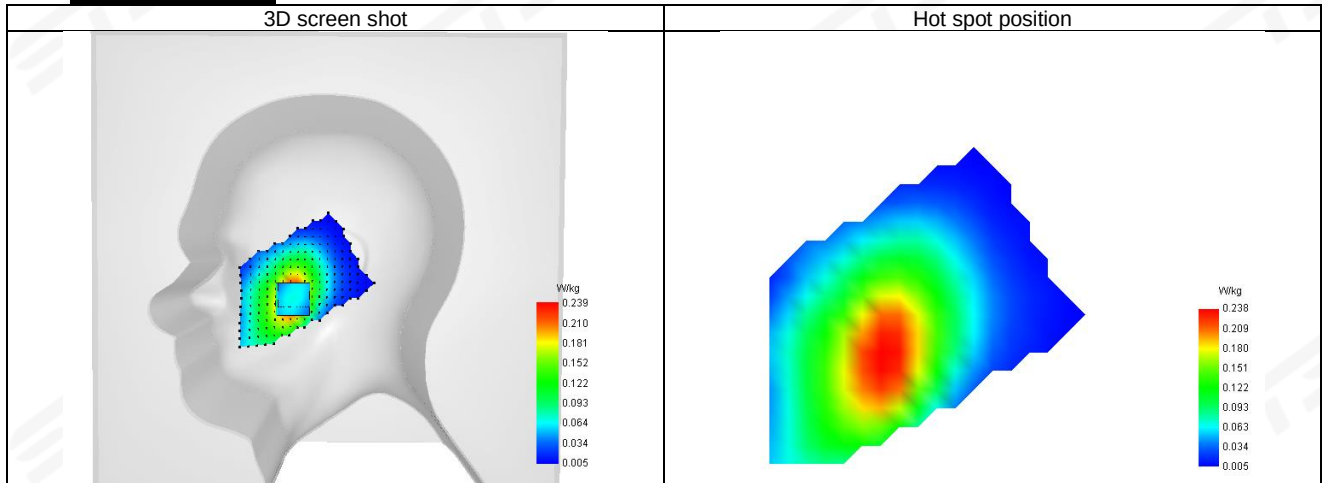



Plot 18: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 5 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	844
Relative permittivity (real part)	42.13
Conductivity (S/m)	0.89

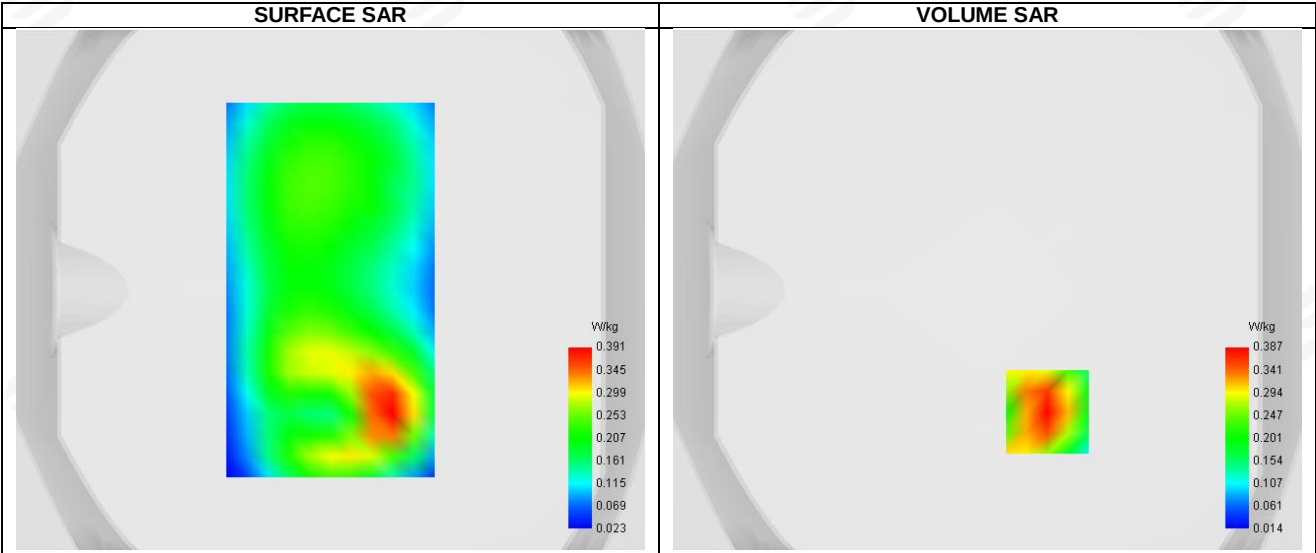


Maximum location: X=23.00, Y=-47.00 ; SAR Peak: 0.60 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.203
SAR 1g (W/Kg)	0.371
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	56.155906

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.612	0.387	0.217	0.137	0.083	0.050	0.030

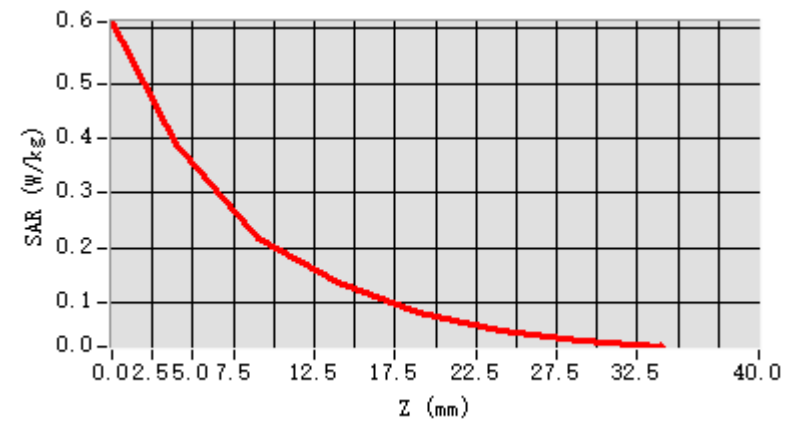


F. 3D Image

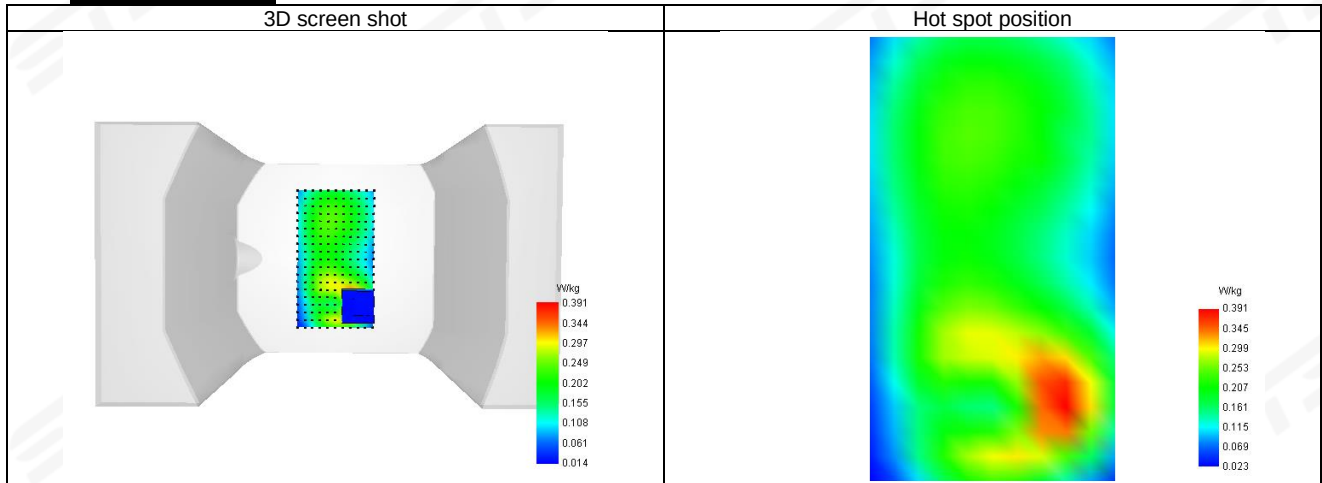



Plot 19: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-22
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	39.09
Conductivity (S/m)	1.89

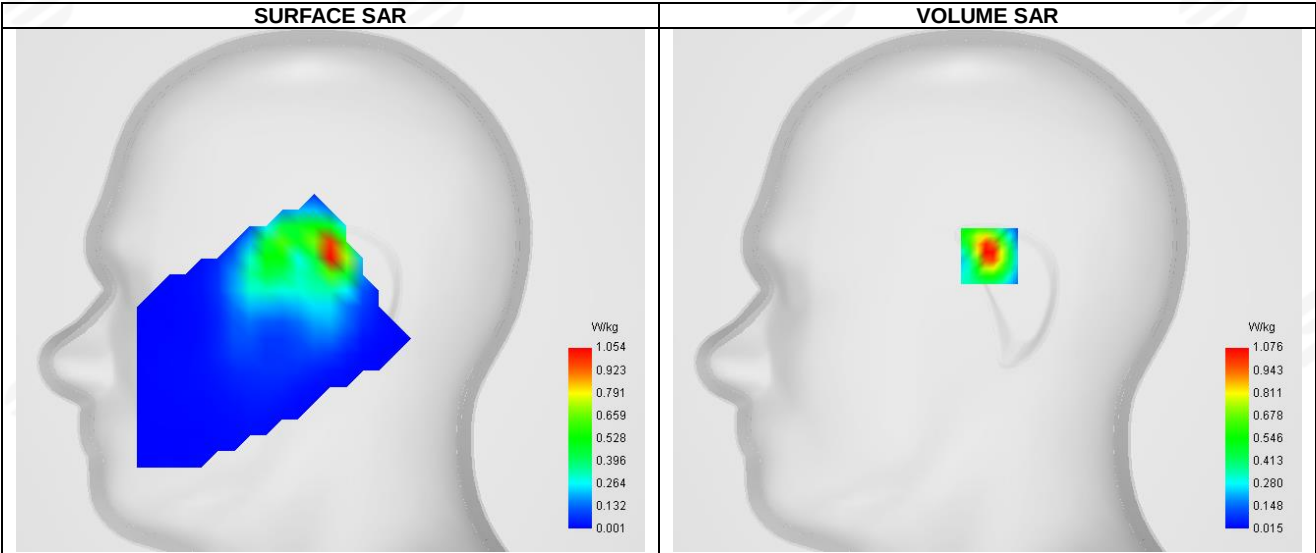

Maximum location: X=1.00, Y=17.00 ; SAR Peak: 1.85 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.415
SAR 1g (W/Kg)	0.973
Horizontal validation criteria: minimum distance (mm)	8.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	51.582826