



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.955	1.076	0.472	0.278	0.136	0.073	0.037

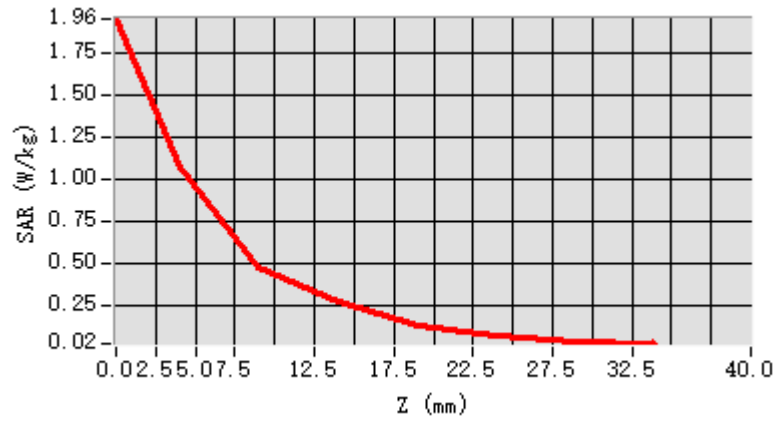


F. 3D Image

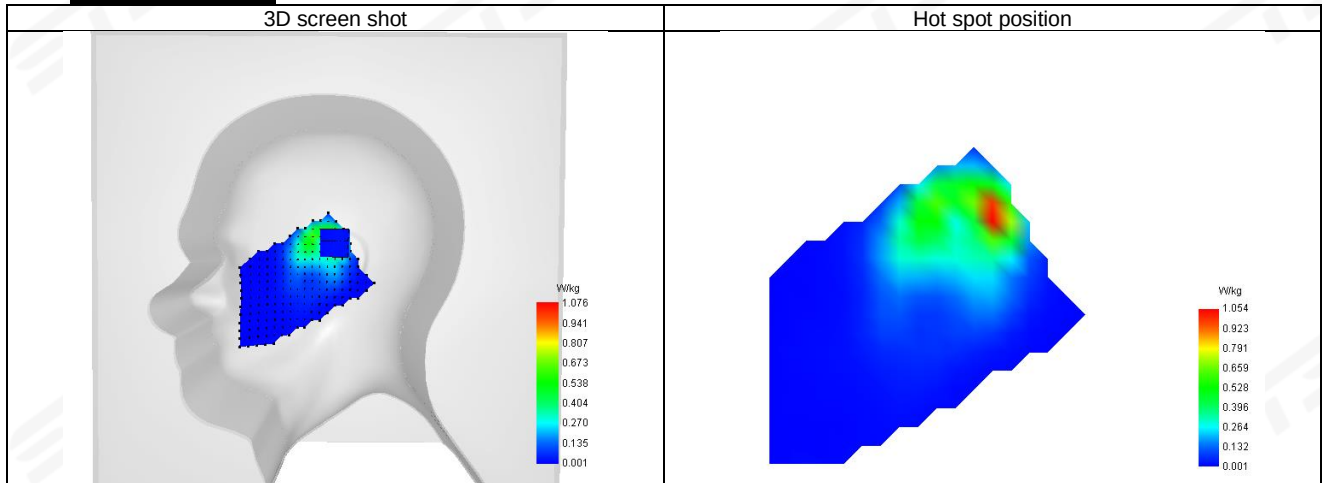



Plot 20: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-22
ConvF	1.70
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 7 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	2560
Relative permittivity (real part)	39.09
Conductivity (S/m)	1.89

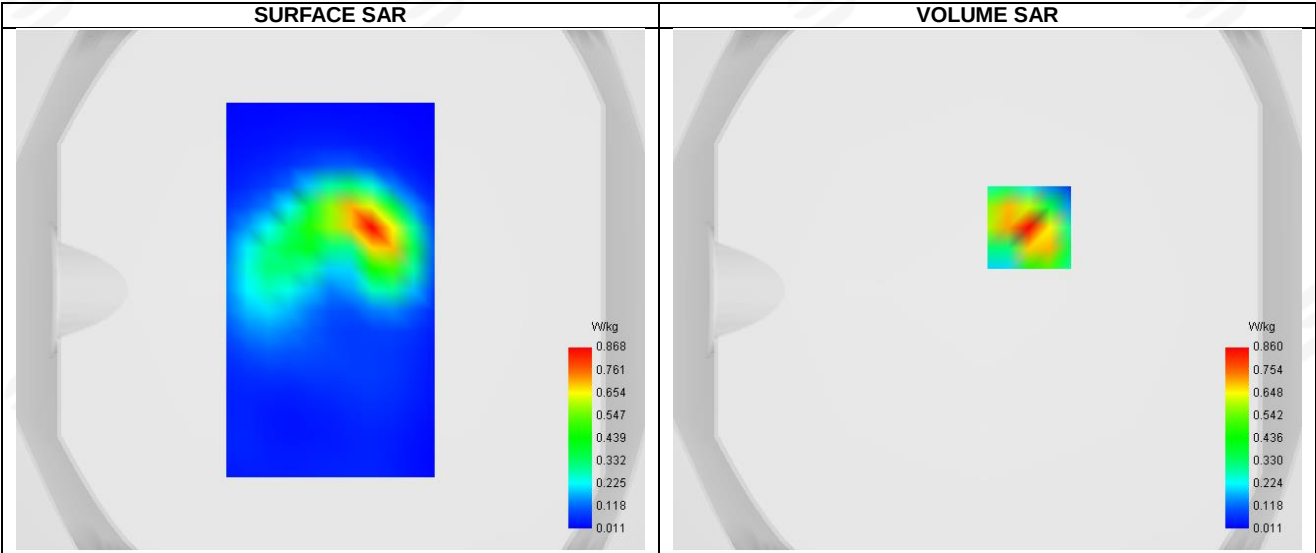

Maximum location: X=16.00, Y=24.00 ; SAR Peak: 1.42 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.380
SAR 1g (W/Kg)	0.772
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	51.384112




E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.423	0.860	0.442	0.248	0.134	0.072	0.039

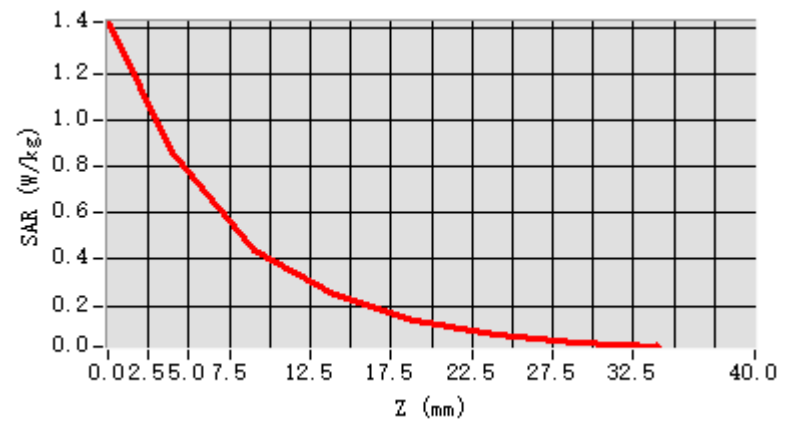


F. 3D Image

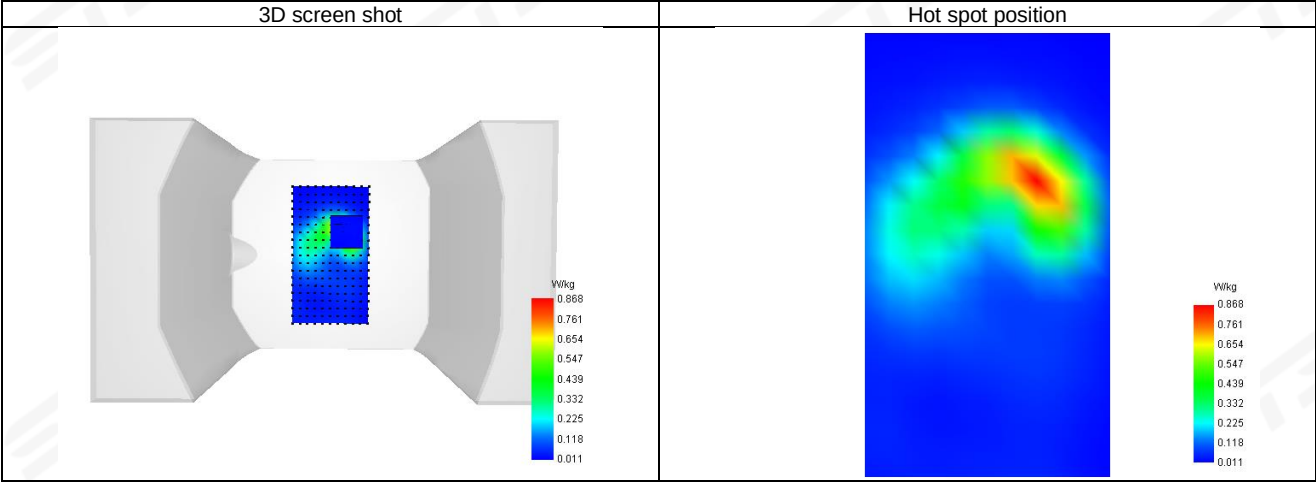

Plot 21: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-17
ConvF	1.51
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 12/17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	707.5
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.88

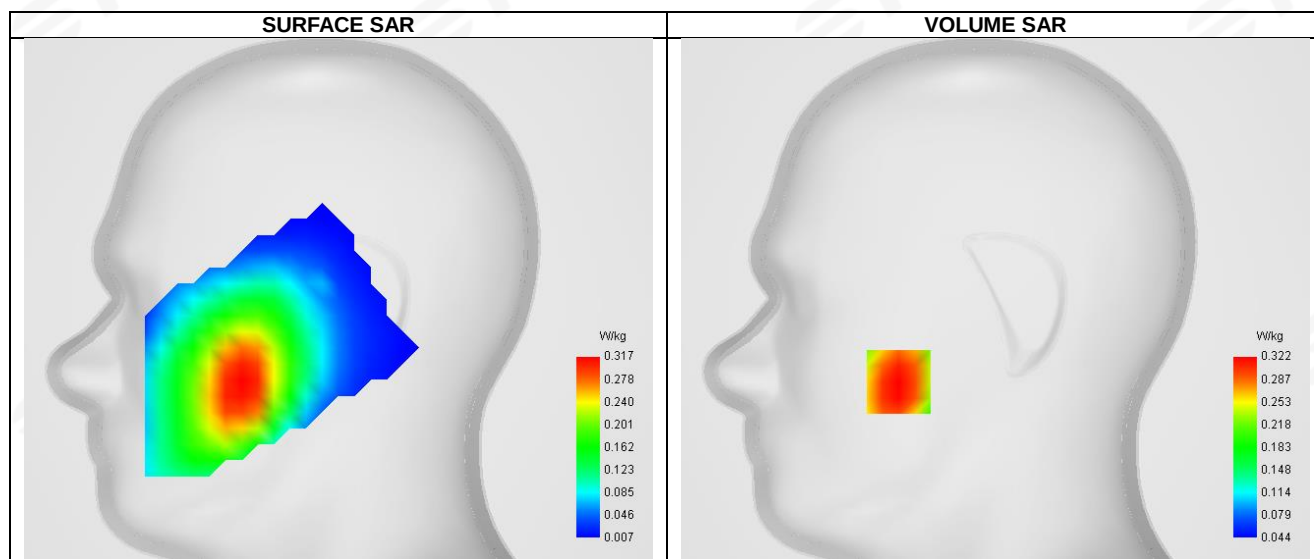


Maximum location: X=-48.00, Y=-41.00 ; SAR Peak: 0.39 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.238
SAR 1g (W/Kg)	0.316
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	80.434782

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.386	0.322	0.259	0.214	0.168	0.130	0.105

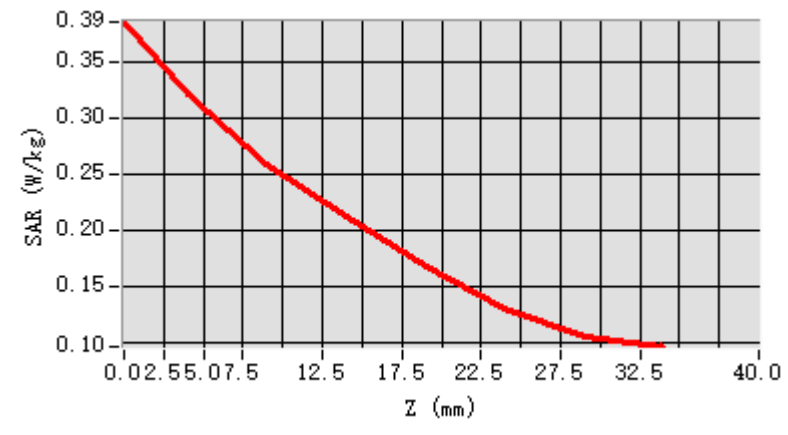


F. 3D Image

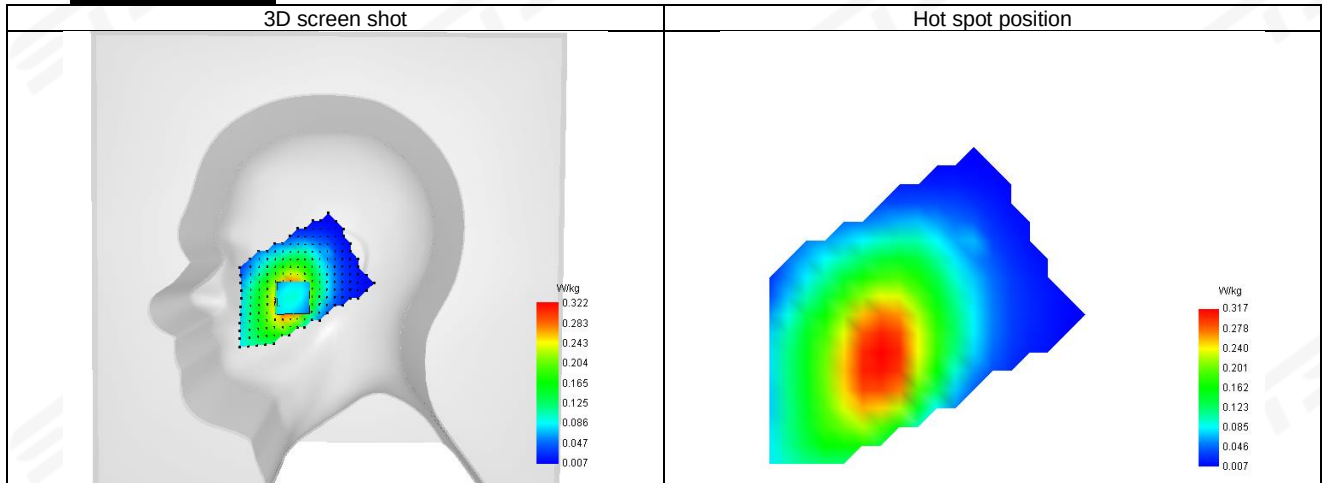

**Plot 22: DUT: Smart Phone; EUT Model: C66**


Test Date	2026-01-17
ConvF	1.51
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 12/17 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	707.5
Relative permittivity (real part)	41.92
Conductivity (S/m)	0.88

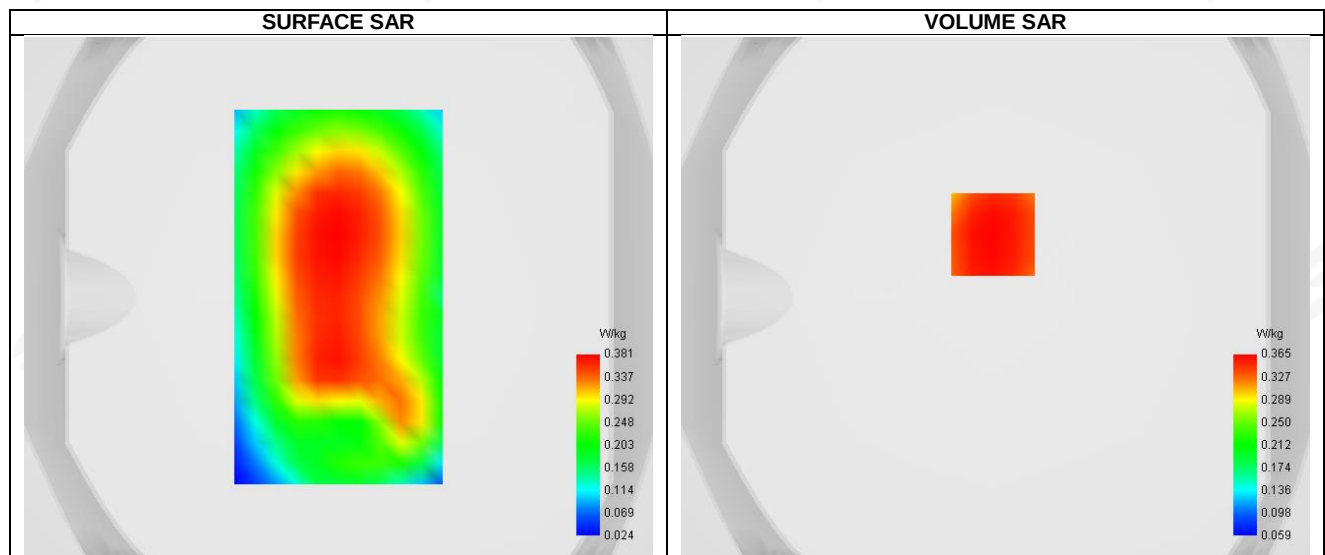**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.264
SAR 1g (W/Kg)	0.358
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	78.630136

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.449	0.365	0.287	0.223	0.172	0.123	0.089

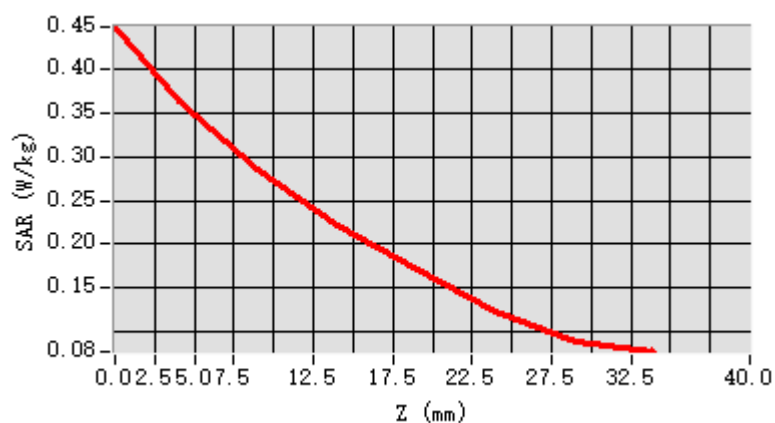


F. 3D Image

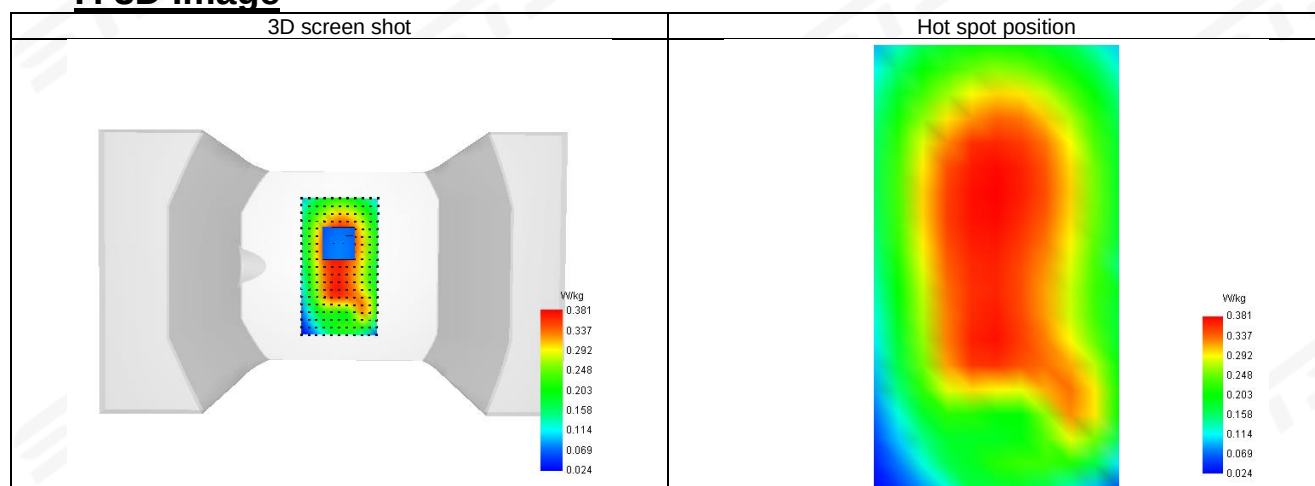

**Plot 23: DUT: Smart Phone; EUT Model: C66**


Test Date	2026-01-21
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 25/2
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1905
Relative permittivity (real part)	41.07
Conductivity (S/m)	1.41

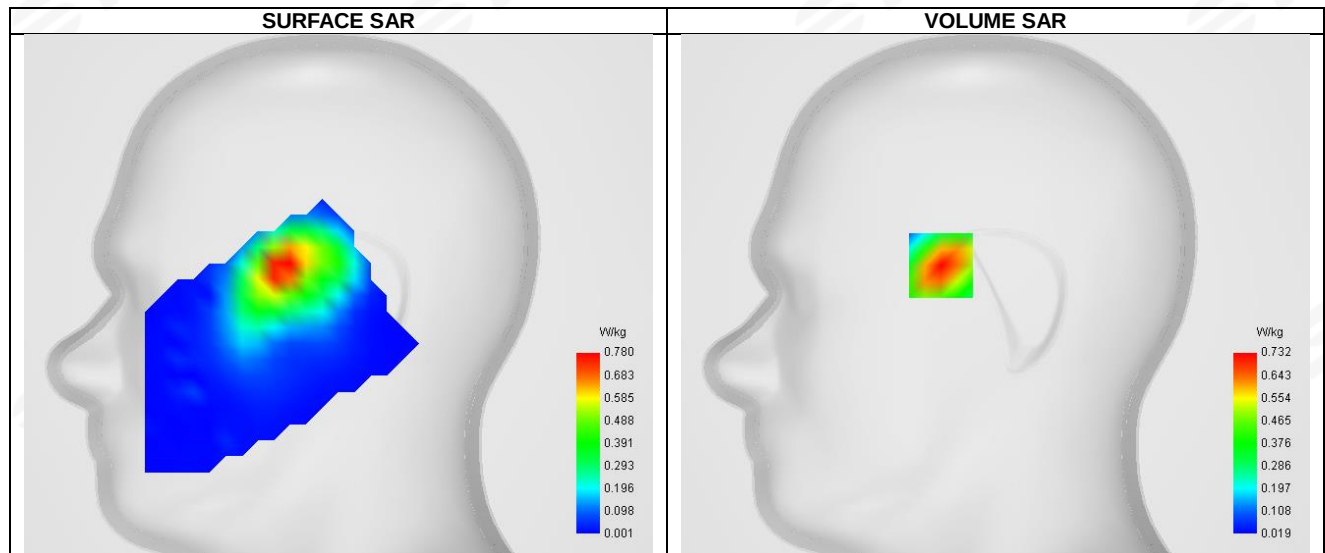**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.389
SAR 1g (W/Kg)	0.687
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	61.911466

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/kg)	1.061	0.732	0.453	0.277	0.172	0.106	0.065

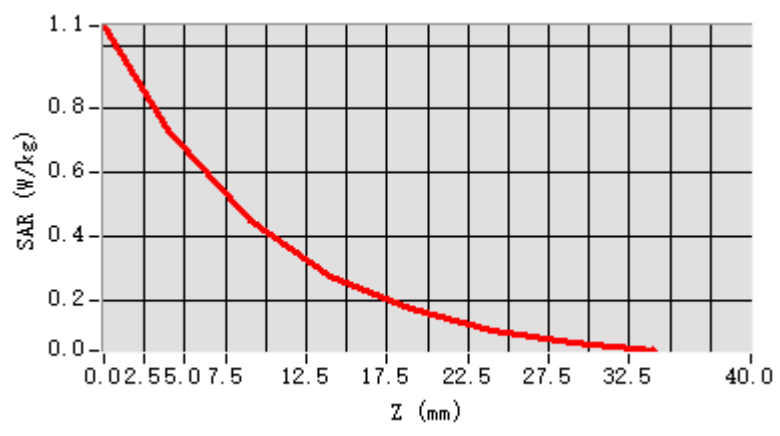


F. 3D Image

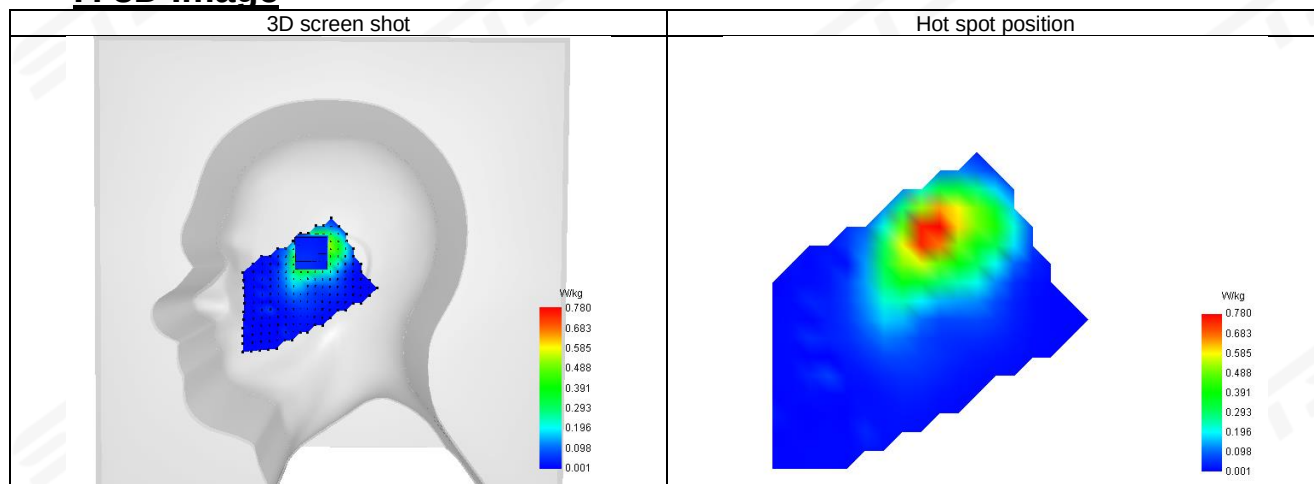



Plot 24: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-21
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 25
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1905
Relative permittivity (real part)	41.07
Conductivity (S/m)	1.41

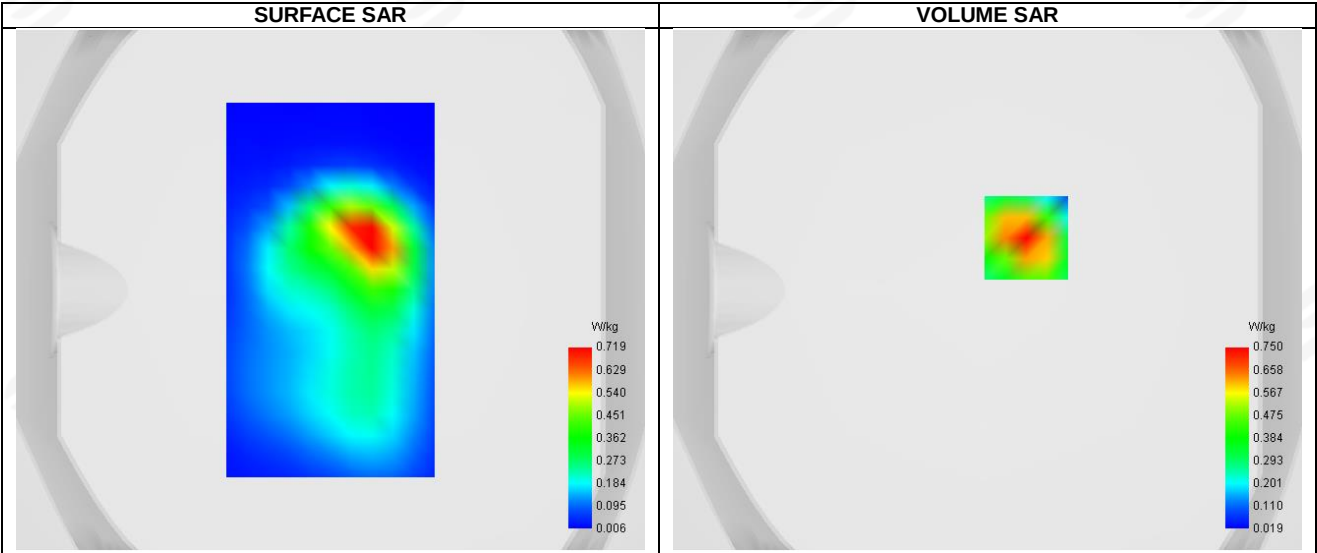


Maximum location: X=15.00, Y=20.00 ; SAR Peak: 1.17 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.372
SAR 1g (W/Kg)	0.701
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.990692

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.184	0.750	0.420	0.242	0.148	0.087	0.051

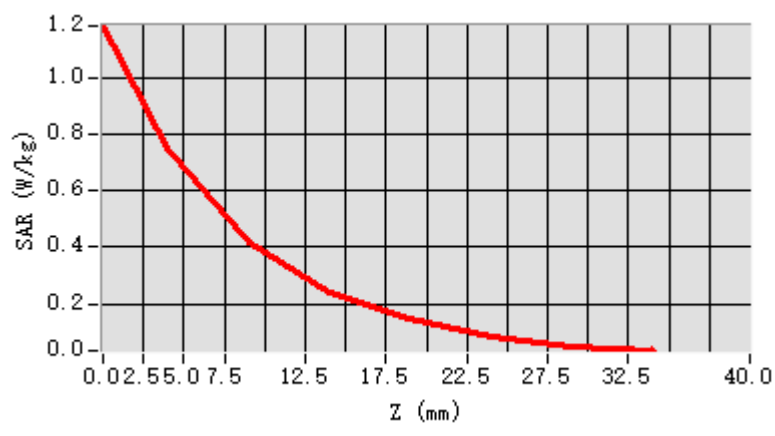


F. 3D Image

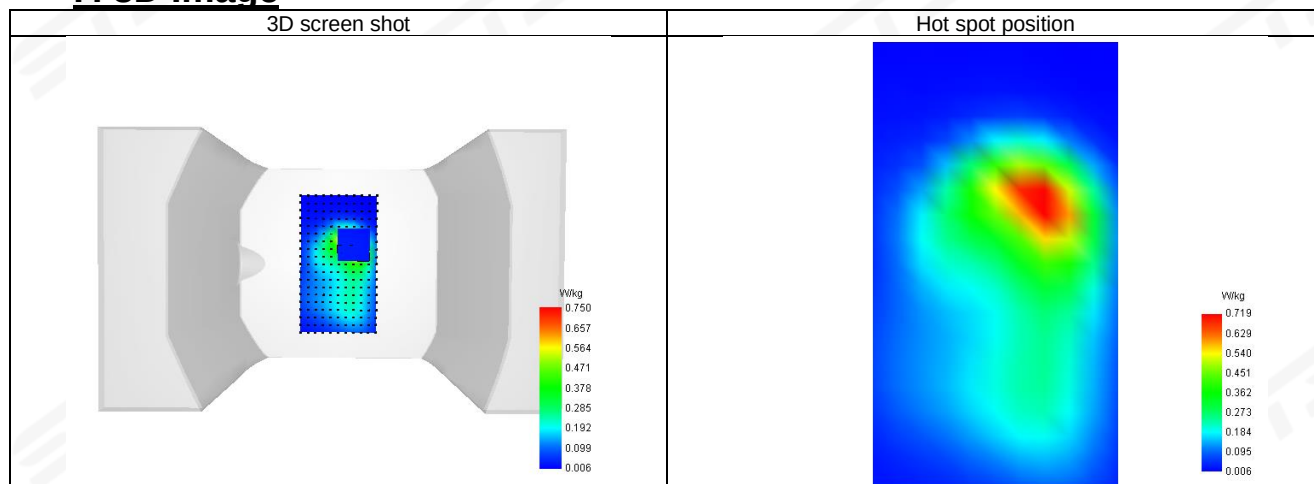

Plot 25: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	40.94
Conductivity (S/m)	0.88

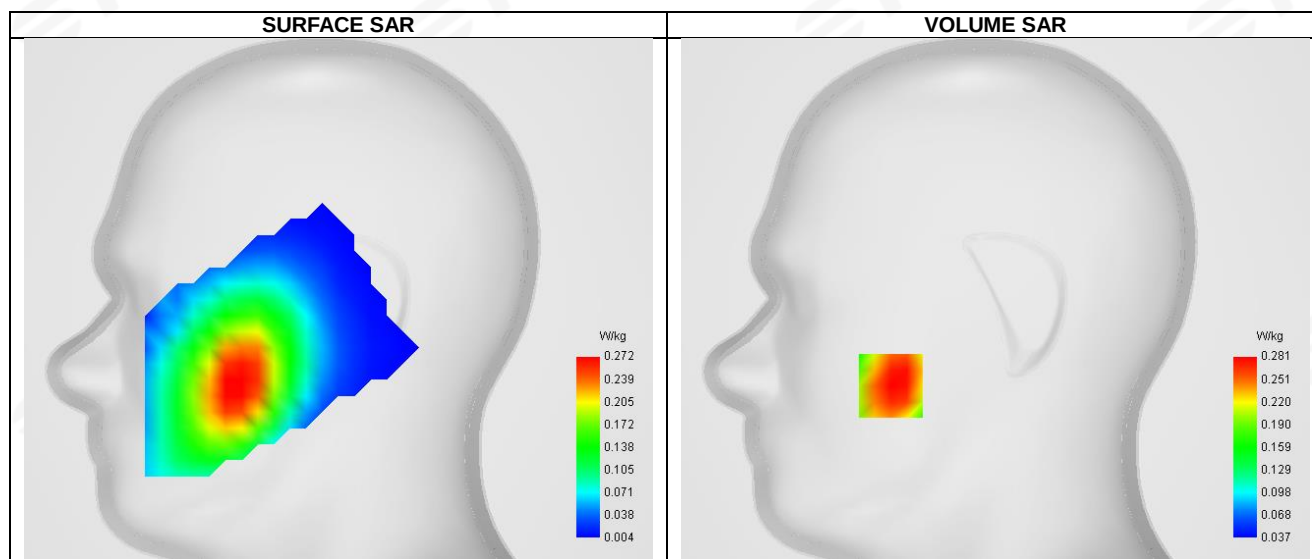


Maximum location: X=-52.00, Y=-43.00 ; SAR Peak: 0.36 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.205
SAR 1g (W/Kg)	0.279
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	79.359430

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.350	0.281	0.223	0.182	0.145	0.110	0.085

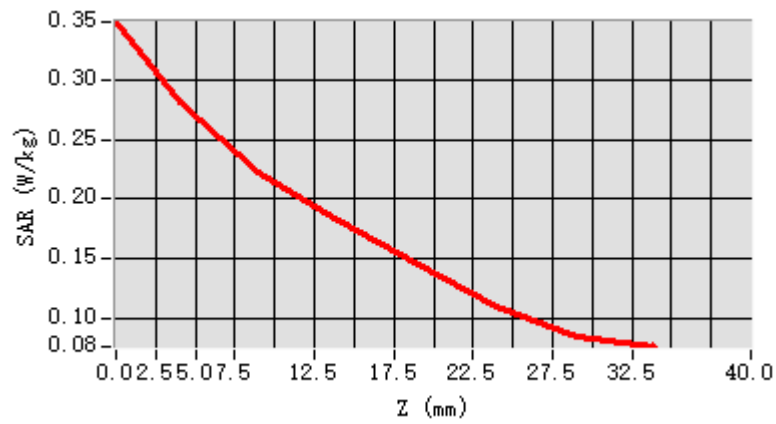


F. 3D Image

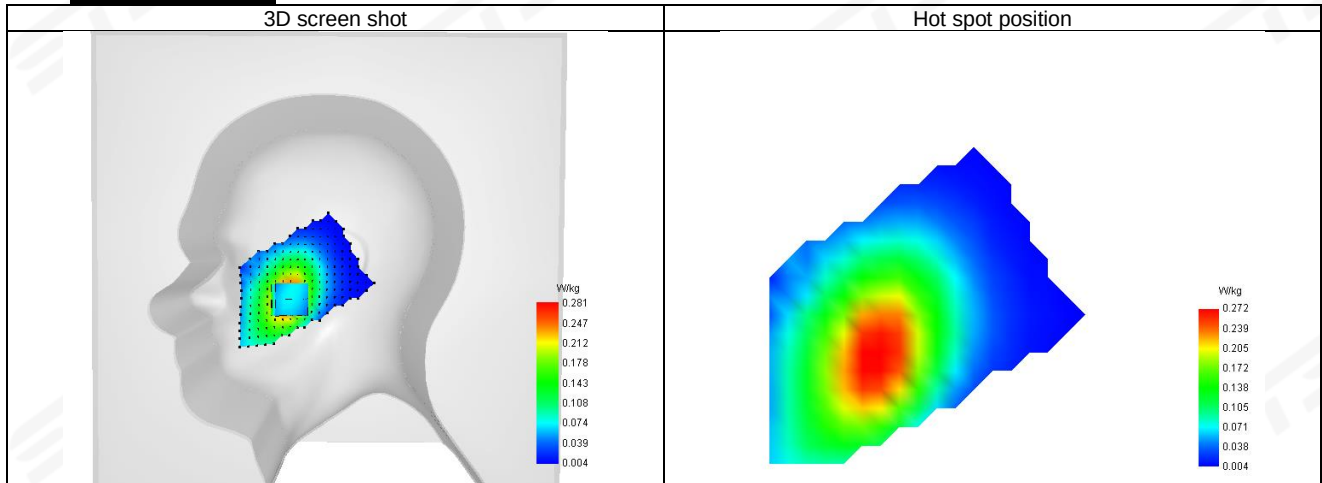



Plot 26: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-20
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 26 (RB 1)
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	841.5
Relative permittivity (real part)	40.94
Conductivity (S/m)	0.88

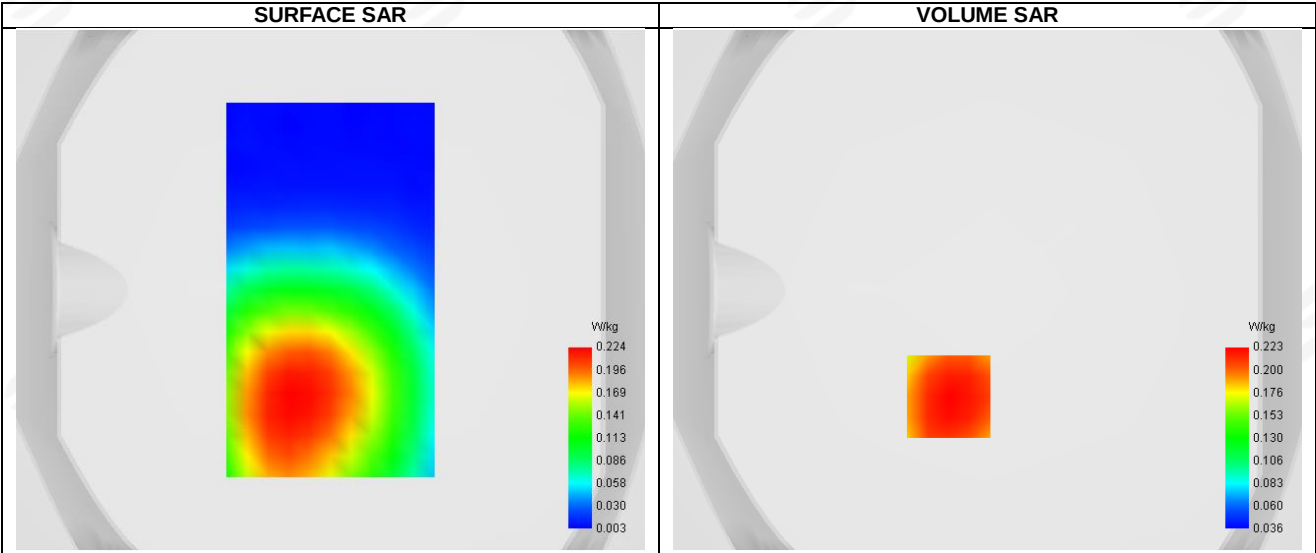


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.163
SAR 1g (W/Kg)	0.219
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	77.578475

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.280	0.223	0.173	0.135	0.105	0.077	0.056

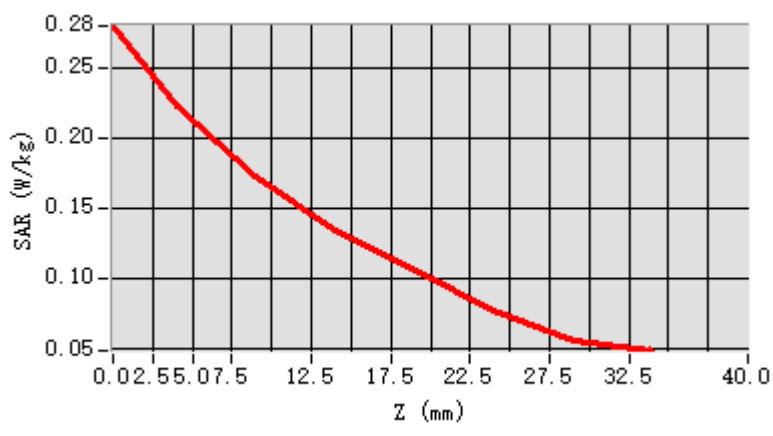


F. 3D Image

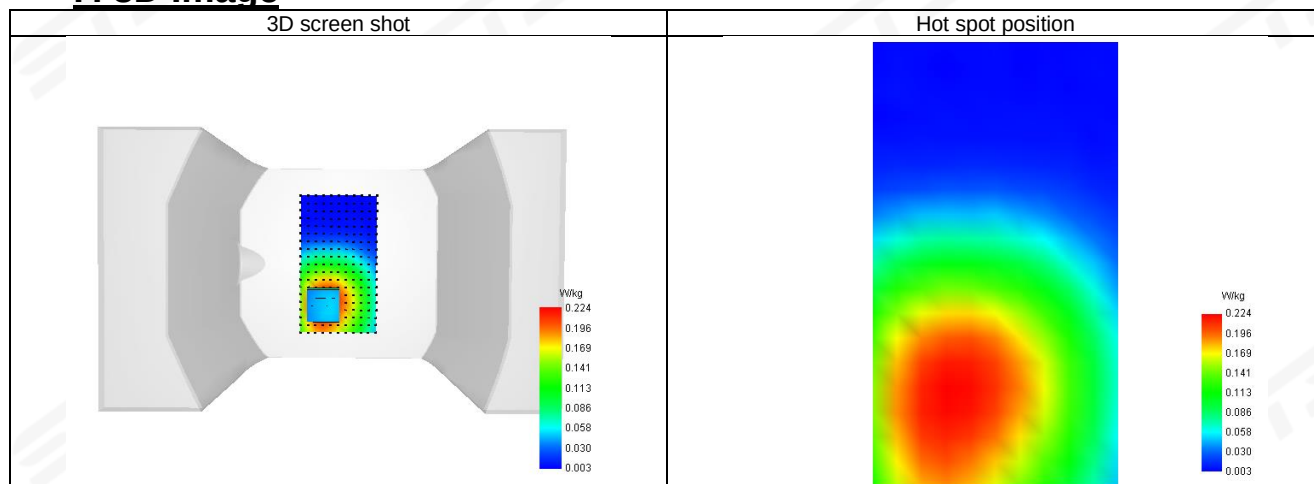



Plot 33: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-17
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	LTE Band 66/4
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1775
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.38

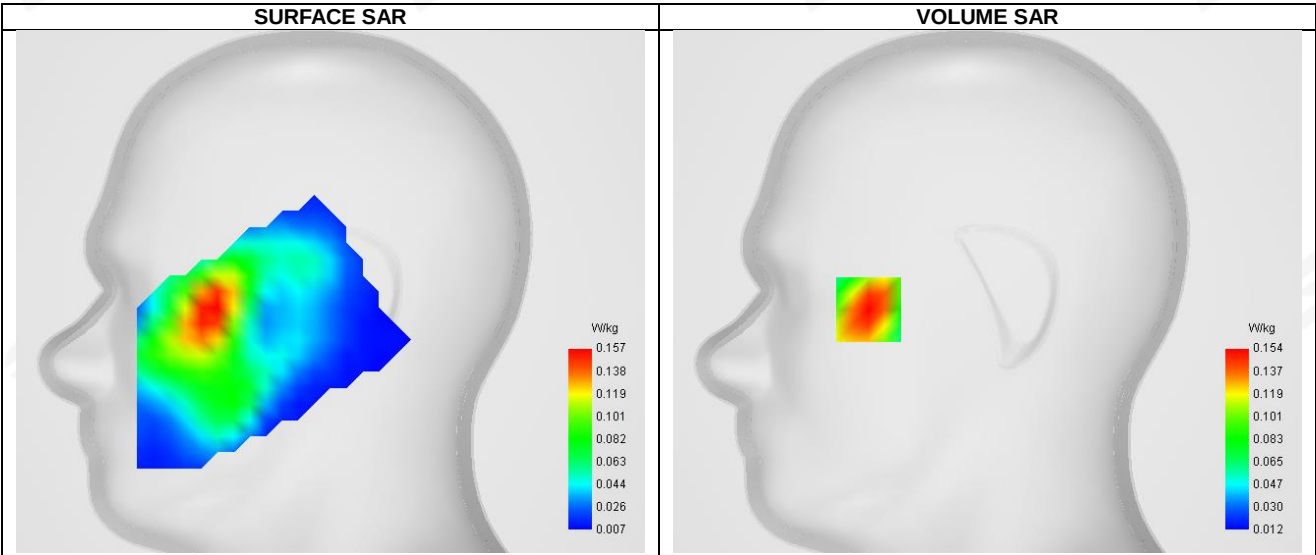


Maximum location: X=-59.00, Y=-9.00 ; SAR Peak: 0.20 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.096
SAR 1g (W/Kg)	0.146
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	73.054010

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.196	0.154	0.113	0.081	0.059	0.044	0.034

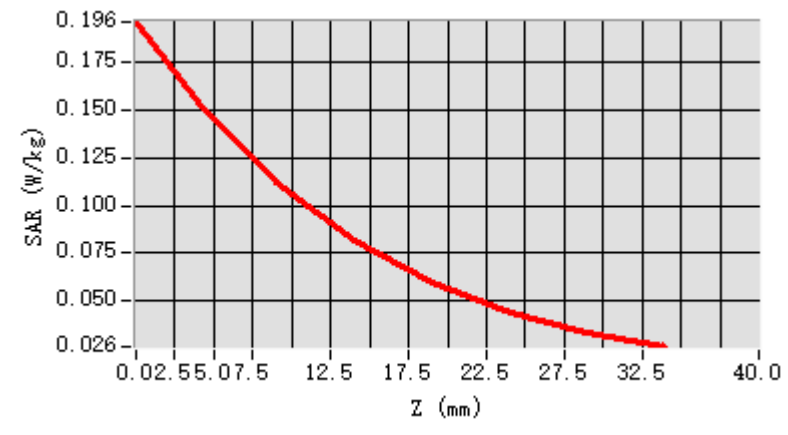


F. 3D Image

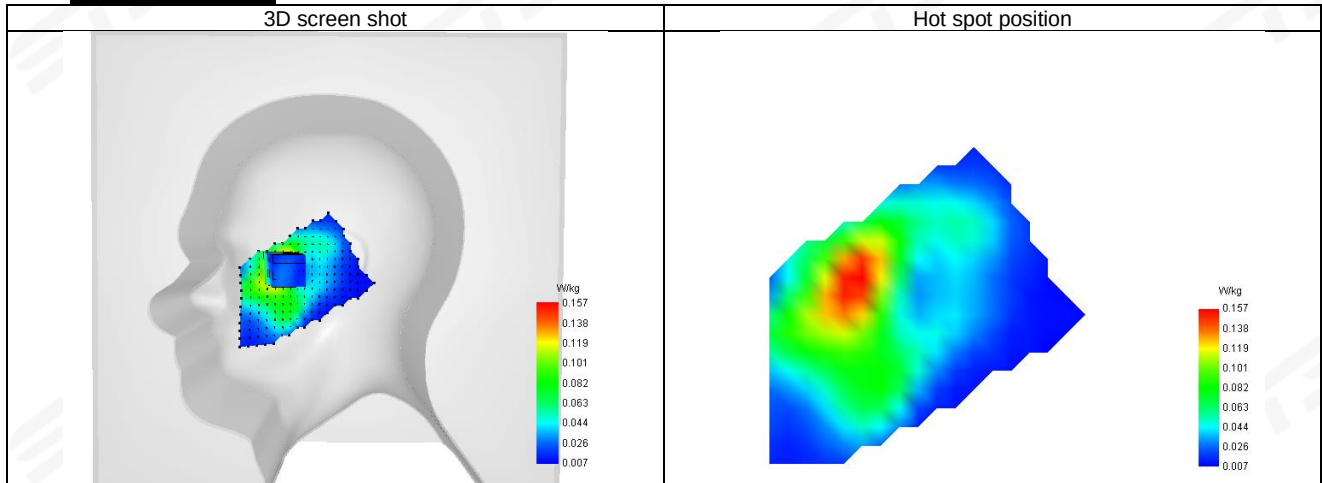



Plot 34: DUT: Smart Phone; EUT Model: C66

Test Date	2026-01-17
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE Band 66/4
Signal	LTE (Crest factor: 1.0)
Frequency (MHz)	1775
Relative permittivity (real part)	39.71
Conductivity (S/m)	1.38

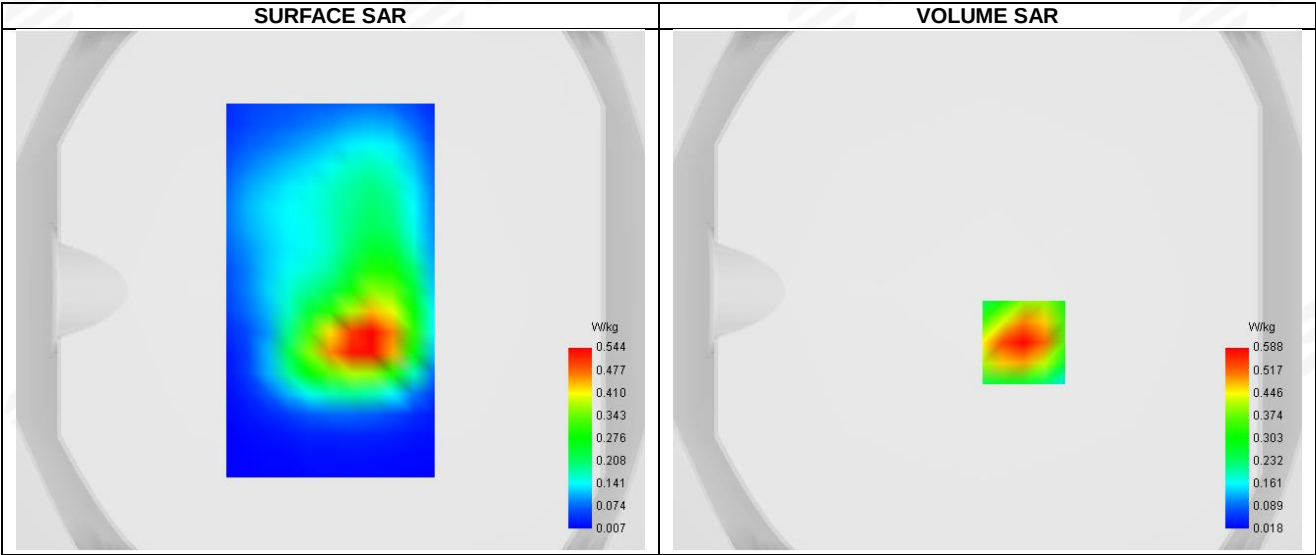

Maximum location: X=14.00, Y=-20.00 ; SAR Peak: 0.90 W/kg


D. SAR 1g & 10g

SAR 10g (W/Kg)	0.311
SAR 1g (W/Kg)	0.559
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	58.245801




E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.909	0.588	0.343	0.203	0.130	0.079	0.048

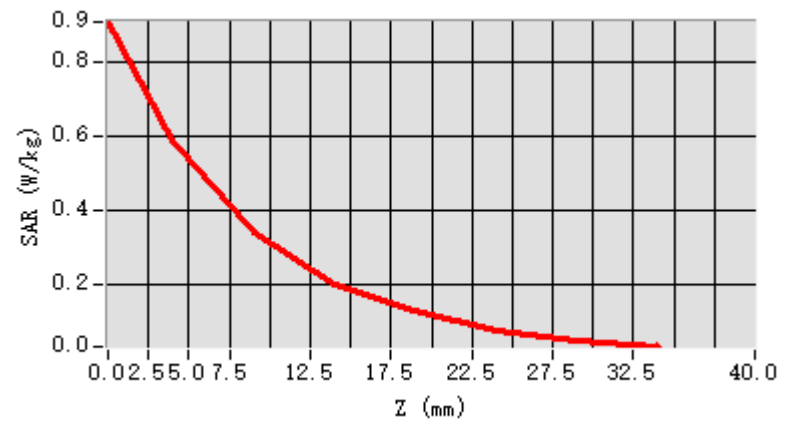

F. 3D Image

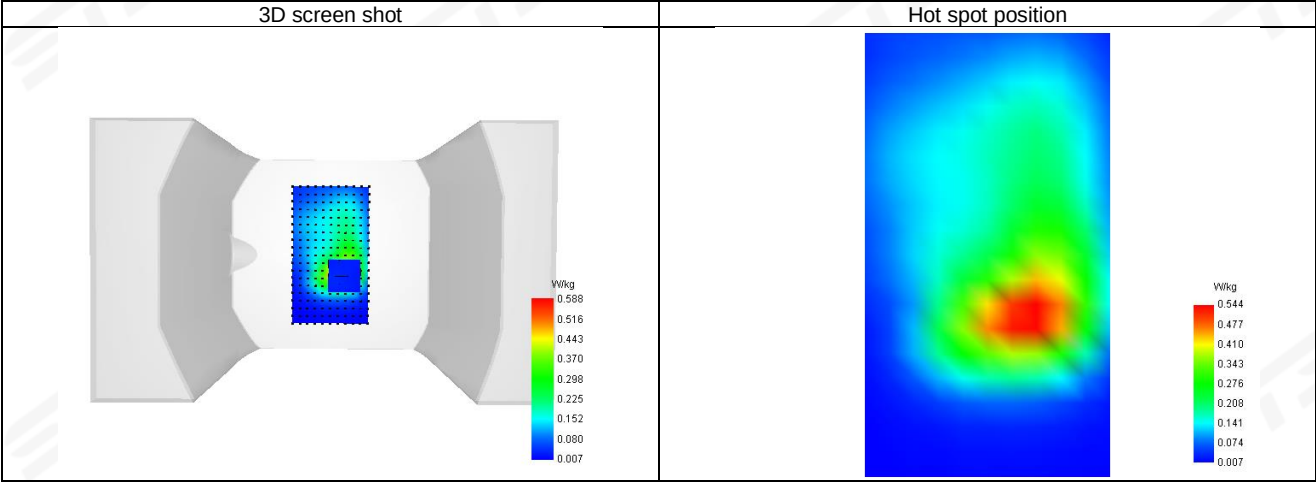



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※