



E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.420	1.023	0.688	0.467	0.329	0.226	0.156

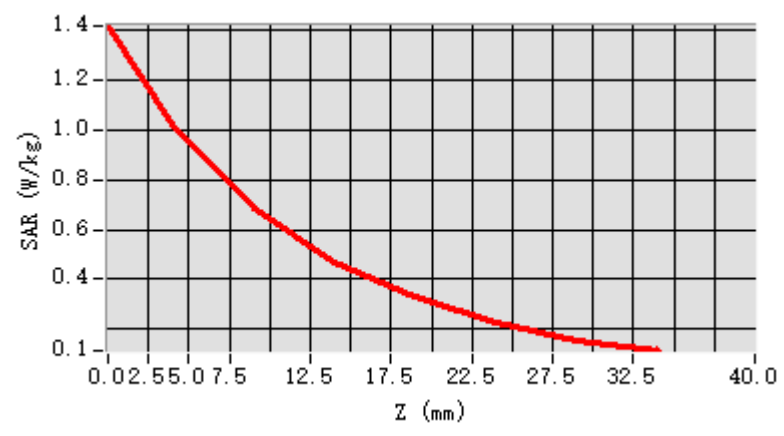

F. 3D Image

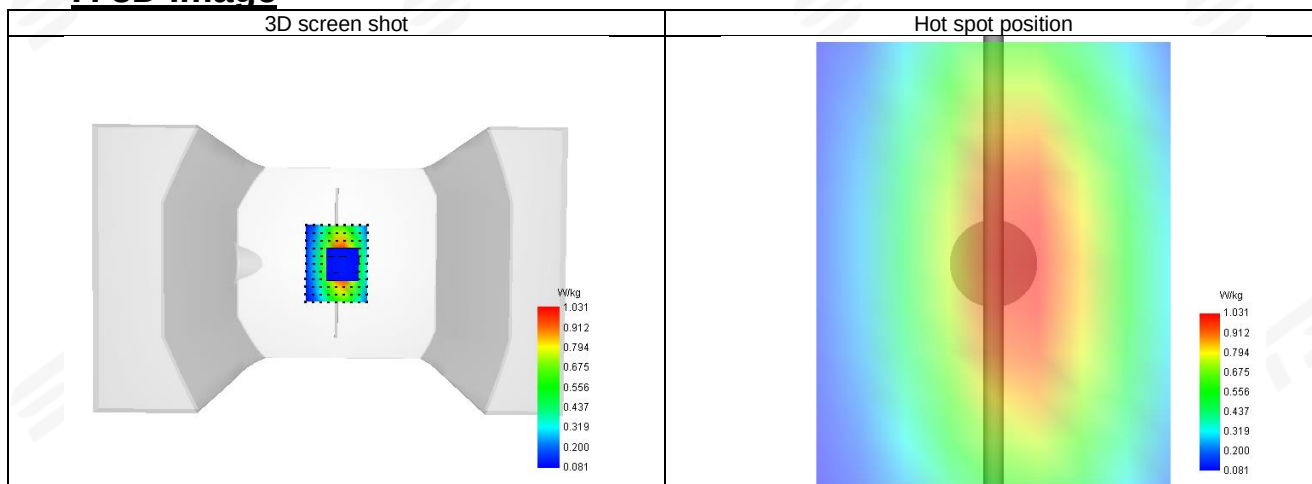

**System Performance Check Data(1800MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2026-01-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	1800MHz
Channels	Middle
Signal	CW
Frequency (MHz)	1800MHz
Relative permittivity	39.84
Conductivity (S/m)	1.38
Probe	SN 08/21 EPGO352
ConvF	1.54
Crest factor:	1:1

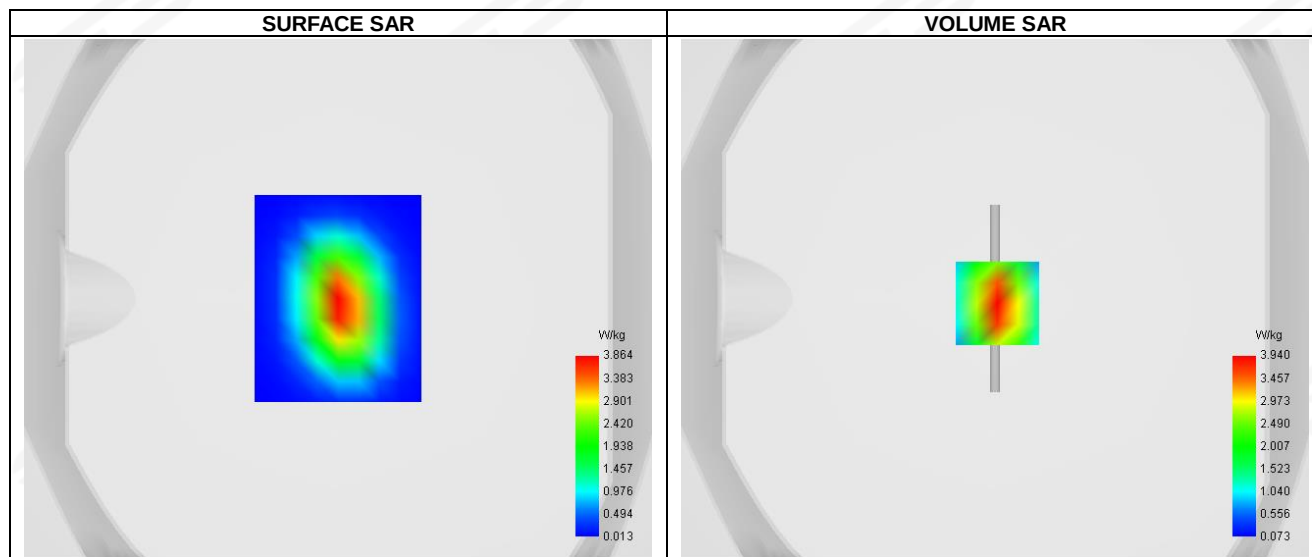


Maximum location: X=1.00, Y=-2.00 ; SAR Peak: 6.16 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.080
SAR 1g (W/Kg)	3.827
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	55.696752

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.212	3.940	2.195	1.255	0.742	0.427	0.246

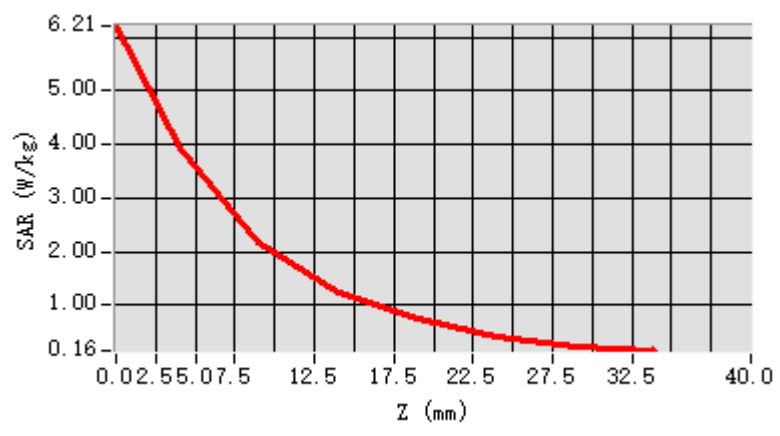

F. 3D Image

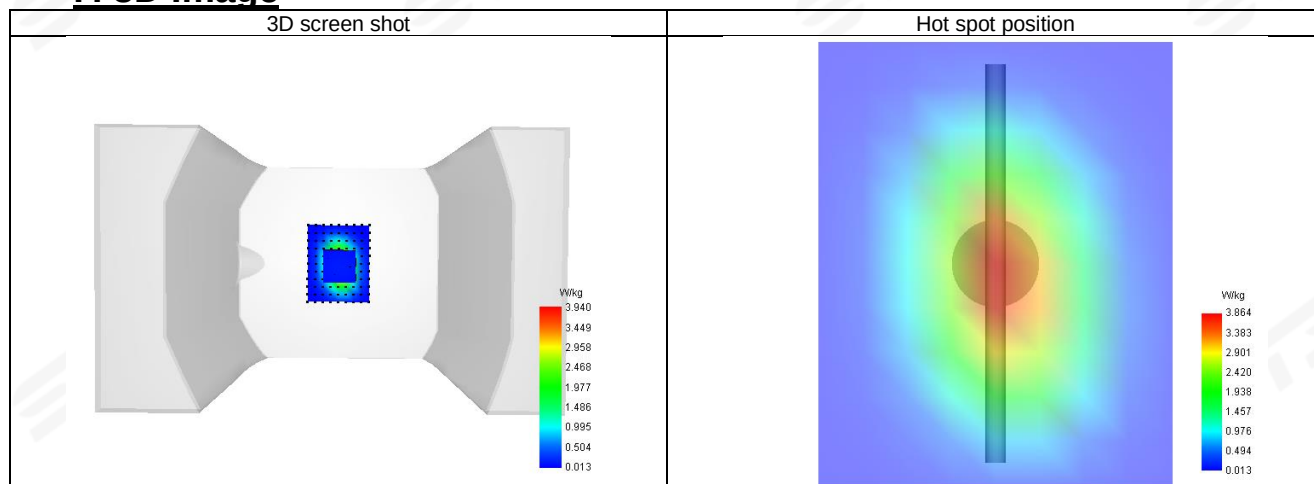

**System Performance Check Data (1900MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2026-01-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	1900MHz
Channels	Middle
Signal	CW
Frequency (MHz)	1900MHz
Relative permittivity	40.85
Conductivity (S/m)	1.38
Probe	SN 08/21 EPGO352
ConvF	1.73
Crest factor:	1:1

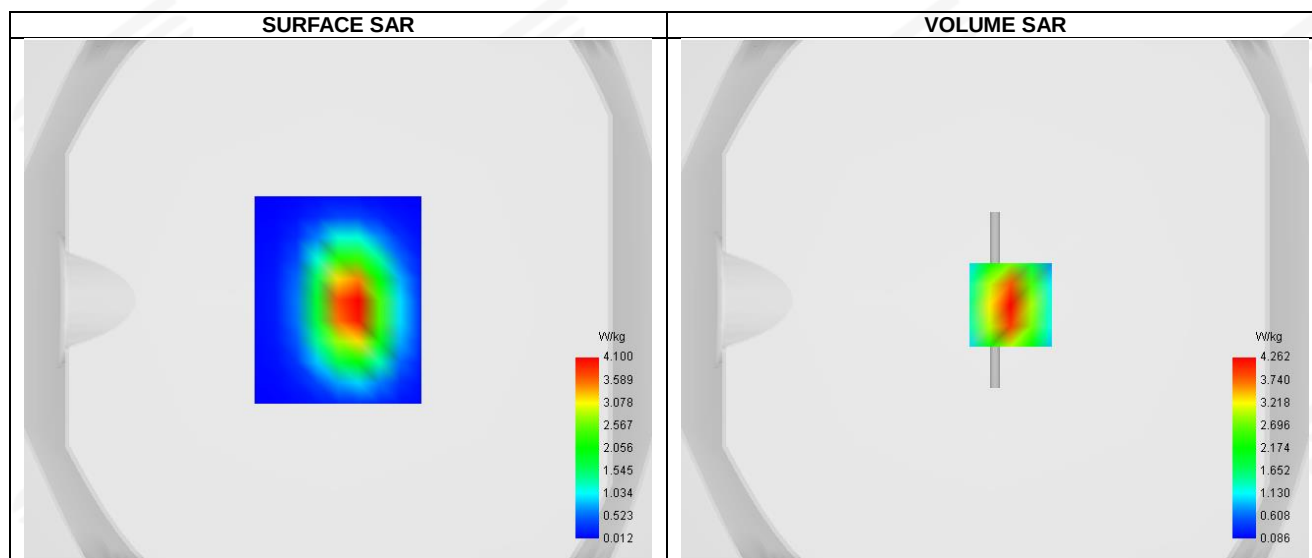


Maximum location: X=6.00, Y=-2.00 ; SAR Peak: 6.56 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	1.982
SAR 1g (W/Kg)	3.921
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.237522

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	6.604	4.262	2.440	1.453	0.877	0.520	0.308

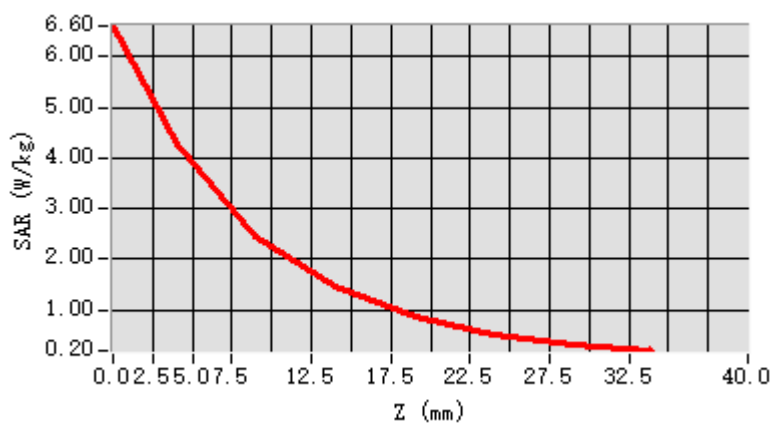

F. 3D Image

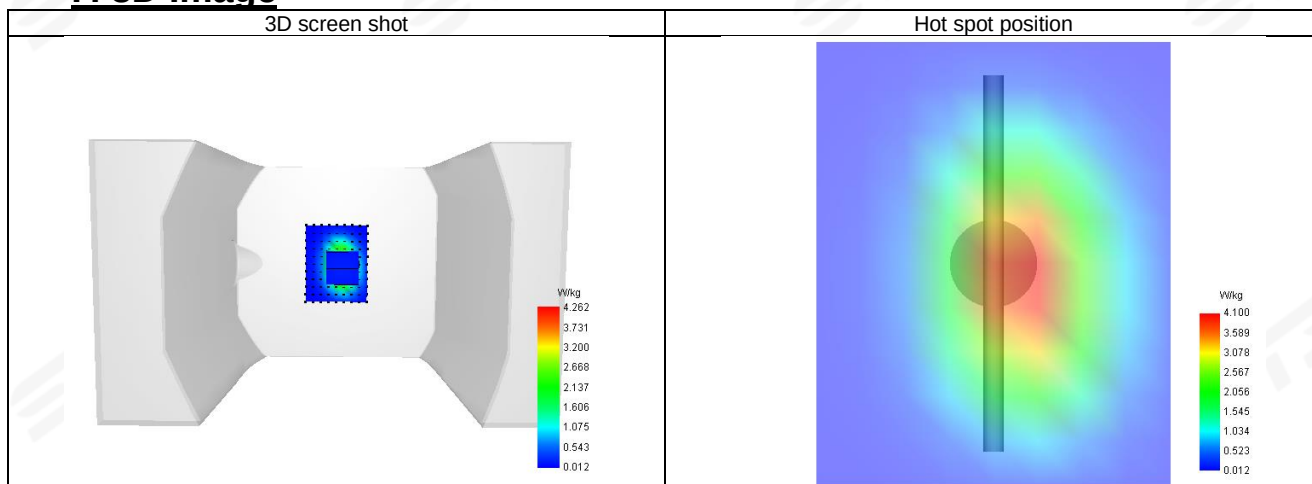

**System Performance Check Data (2450MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2026-01-26

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	2450MHz
Channels	Middle
Signal	CW
Frequency (MHz)	2450
Relative permittivity	40.01
Conductivity (S/m)	1.79
Probe	SN 08/21 EPGO352
ConvF	1.82
Crest factor:	1:1

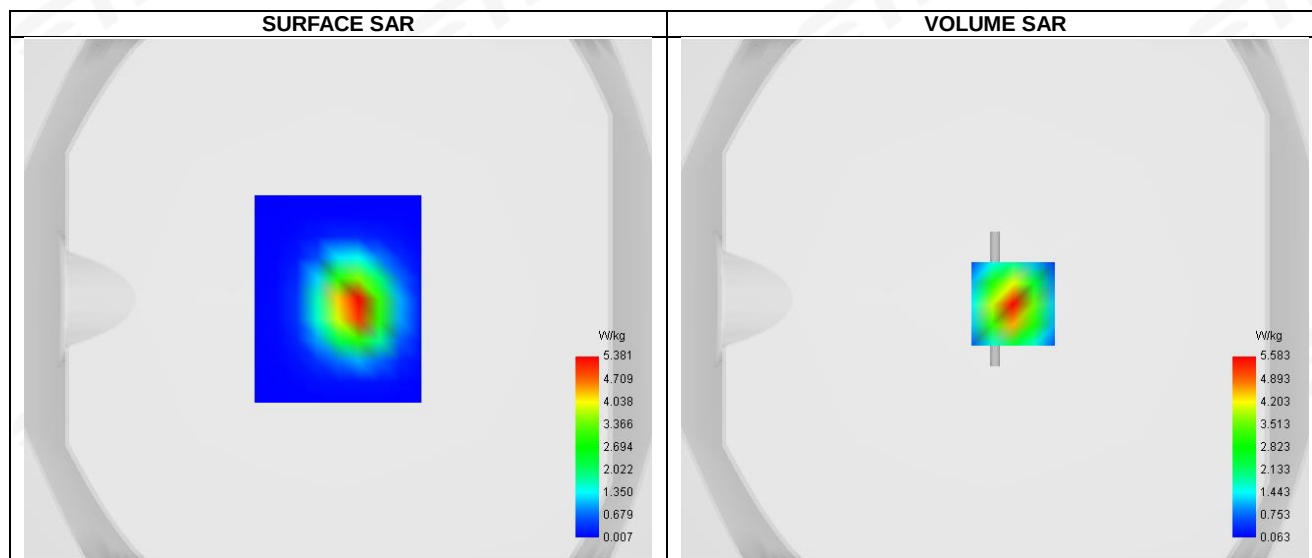


Maximum location: X=7.00, Y=-2.00 ; SAR Peak: 9.00 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.409
SAR 1g (W/Kg)	5.504
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.023541

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.077	5.583	2.960	1.712	0.956	0.533	0.298

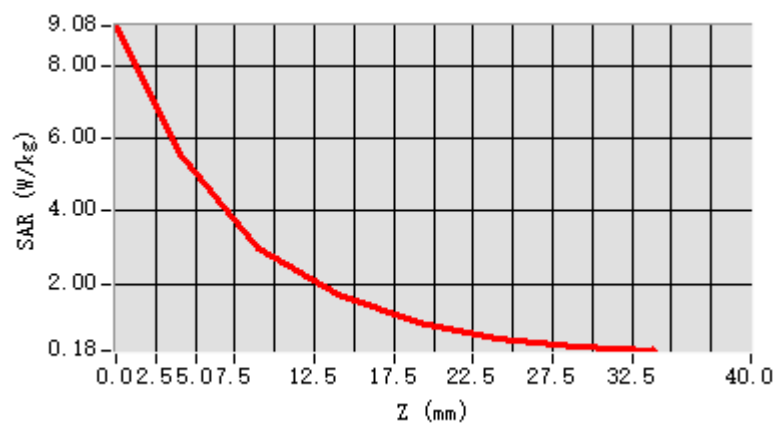

F. 3D Image

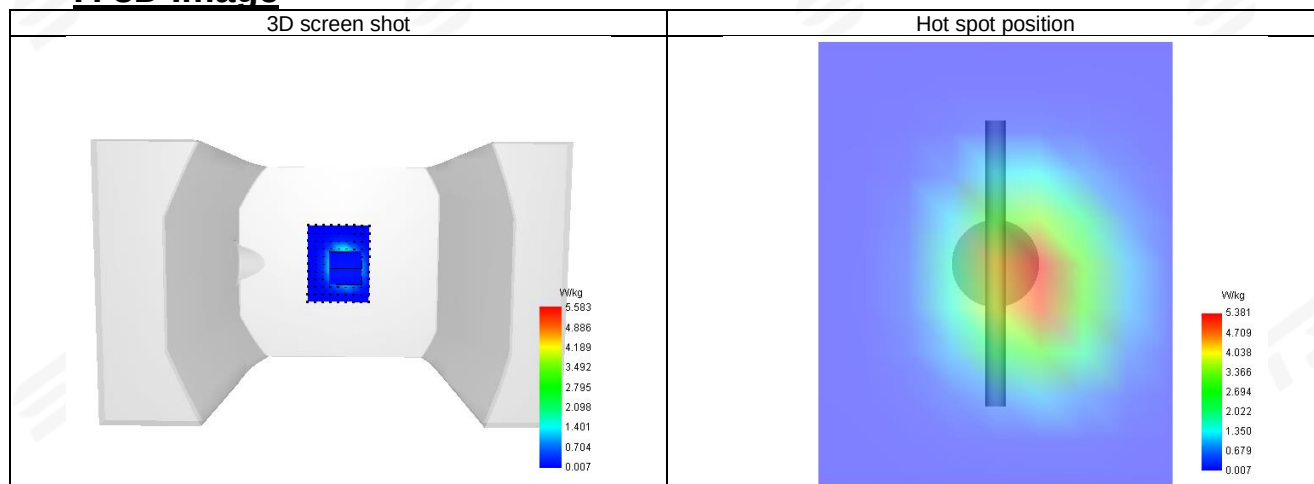

**System Performance Check Data(2600MHz)**

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2026-01-27

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	2600MHz
Channels	Middle
Signal	CW
Frequency (MHz)	2600
Relative permittivity	39.59
Conductivity (S/m)	1.94
Probe	SN 08/21 EPGO352
ConvF	1.70
Crest factor:	1:1

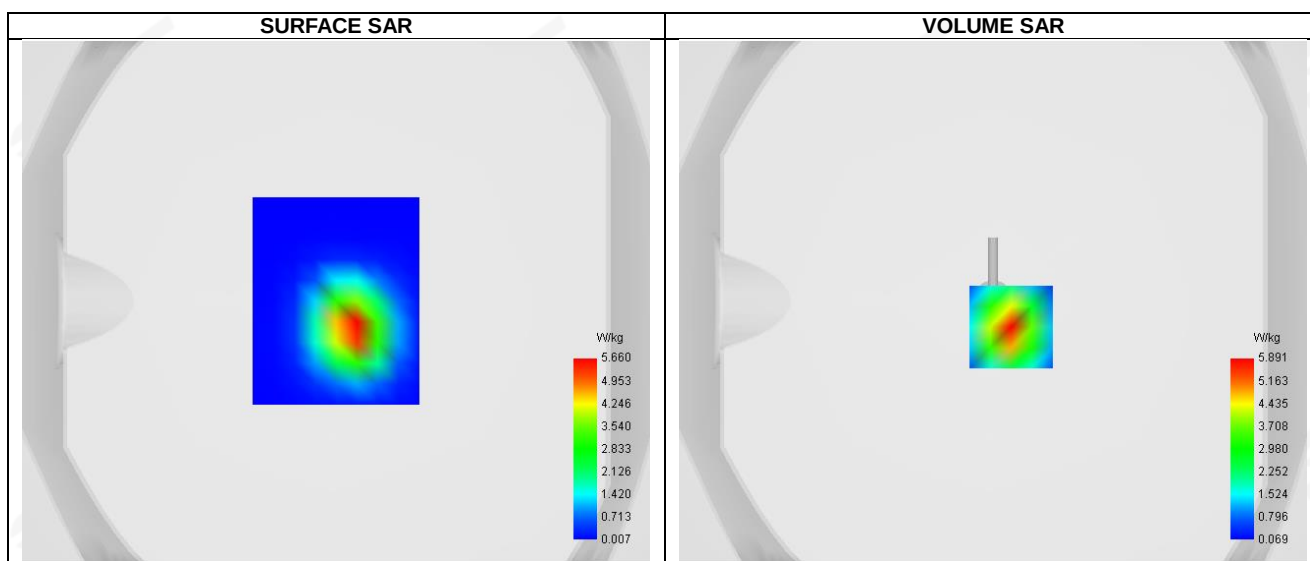


Maximum location: X=7.00, Y=-10.00 ; SAR Peak: 9.49 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	2.413
SAR 1g (W/Kg)	5.572
Horizontal validation criteria: minimum distance (mm)	11.313708
Vertical validation criteria: SAR ratio M2/M1 (%)	53.046880

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	9.576	5.891	3.125	1.810	1.011	0.565	0.316

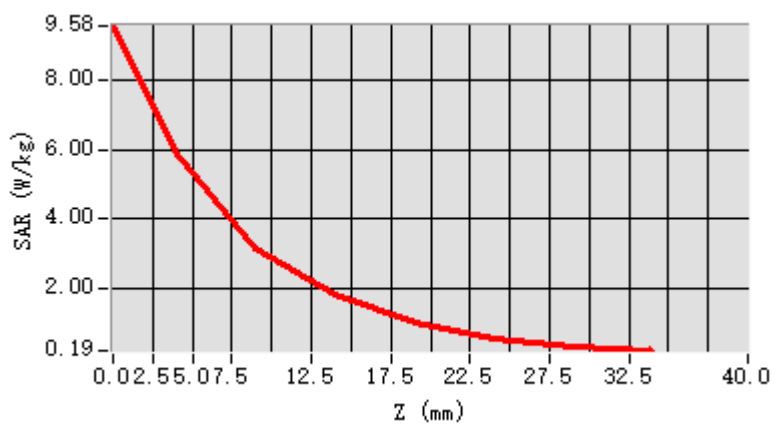


F. 3D Image

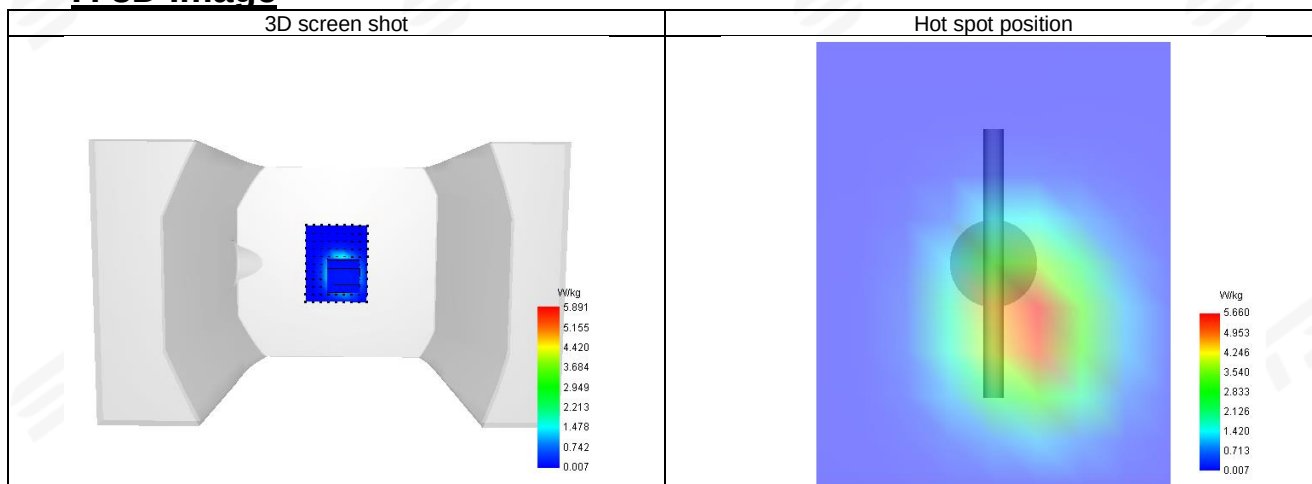

Appendix B. SAR Test Plots

Plot 1: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-25
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	GPRS 850
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	848.8
Relative permittivity (real part)	41.67
Conductivity (S/m)	0.92

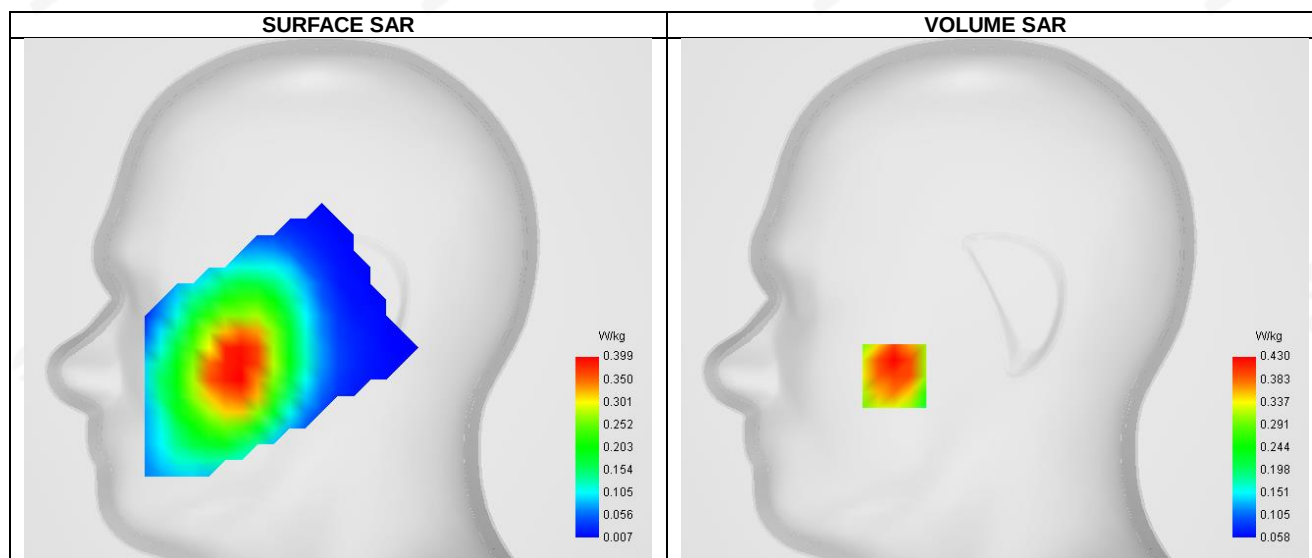


D. SAR 1g & 10g


SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.415
Horizontal validation criteria: minimum distance (mm)	28.844410
Vertical validation criteria: SAR ratio M2/M1 (%)	81.290226

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.640	0.430	0.295	0.294	0.204	0.198	0.130

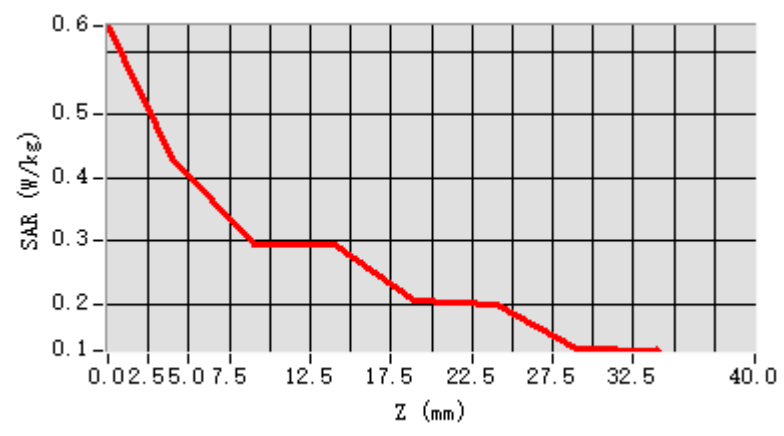


F. 3D Image

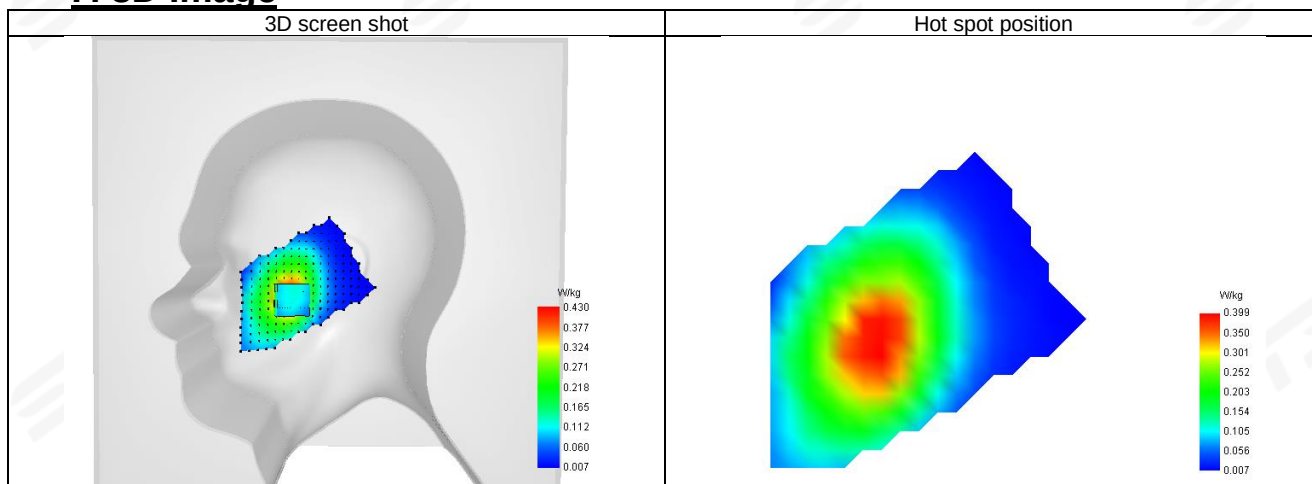



Plot 2: DUT: Smart Phone; EUT Model: C7


Test Date	2026-01-25
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 850
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	848.8
Relative permittivity (real part)	41.67
Conductivity (S/m)	0.92

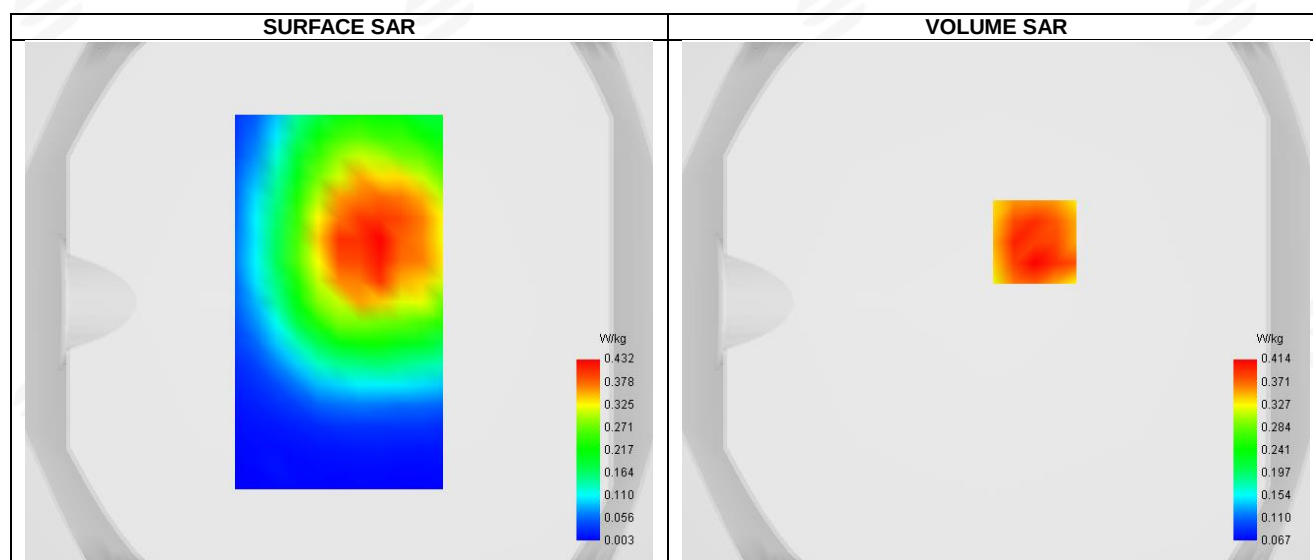**D. SAR 1g & 10g**


SAR 10g (W/Kg)	0.284
SAR 1g (W/Kg)	0.395
Horizontal validation criteria: minimum distance (mm)	11.355912
Vertical validation criteria: SAR ratio M2/M1 (%)	72.327044

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.521	0.414	0.318	0.230	0.191	0.149	0.118

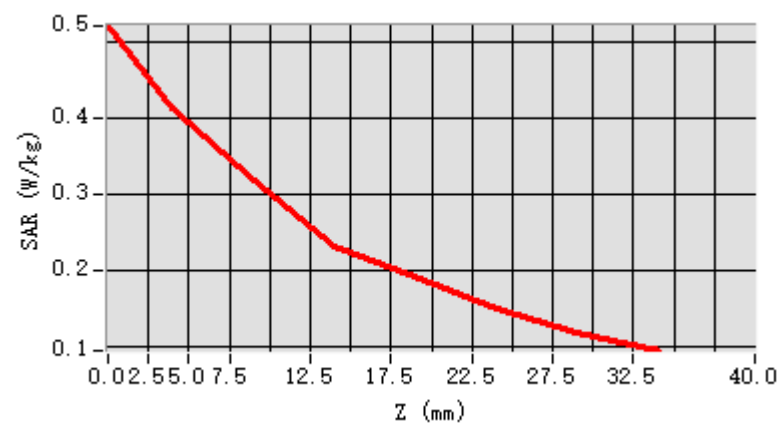


F. 3D Image

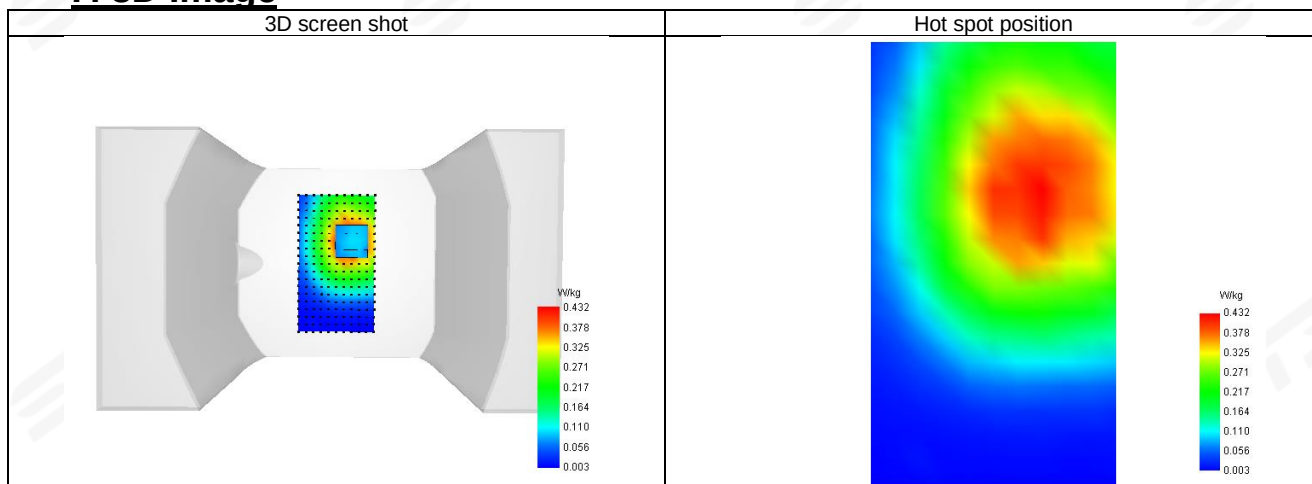

Plot 3: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-27
ConvF	1.73
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	GPRS 1900
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.89
Conductivity (S/m)	1.39

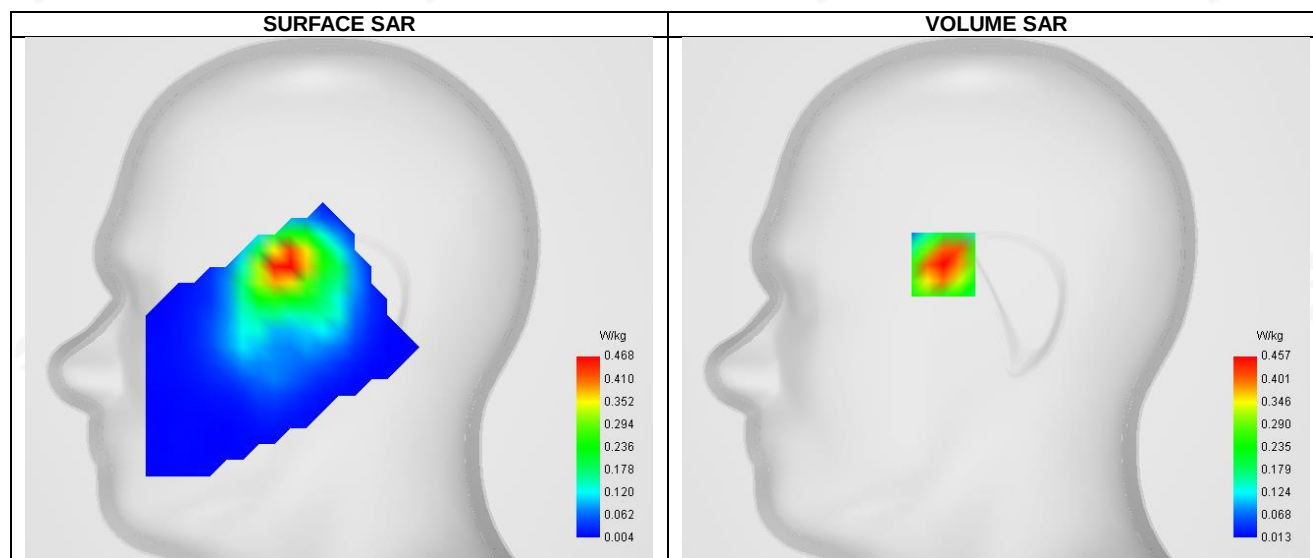


Maximum location: X=-26.00, Y=17.00 ; SAR Peak: 0.77 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.243
SAR 1g (W/Kg)	0.437
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	64.831353

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.629	0.457	0.296	0.243	0.141	0.095	0.064

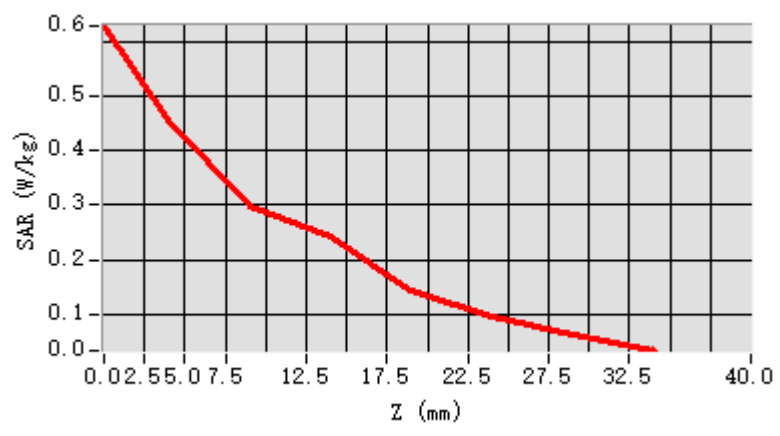


F. 3D Image

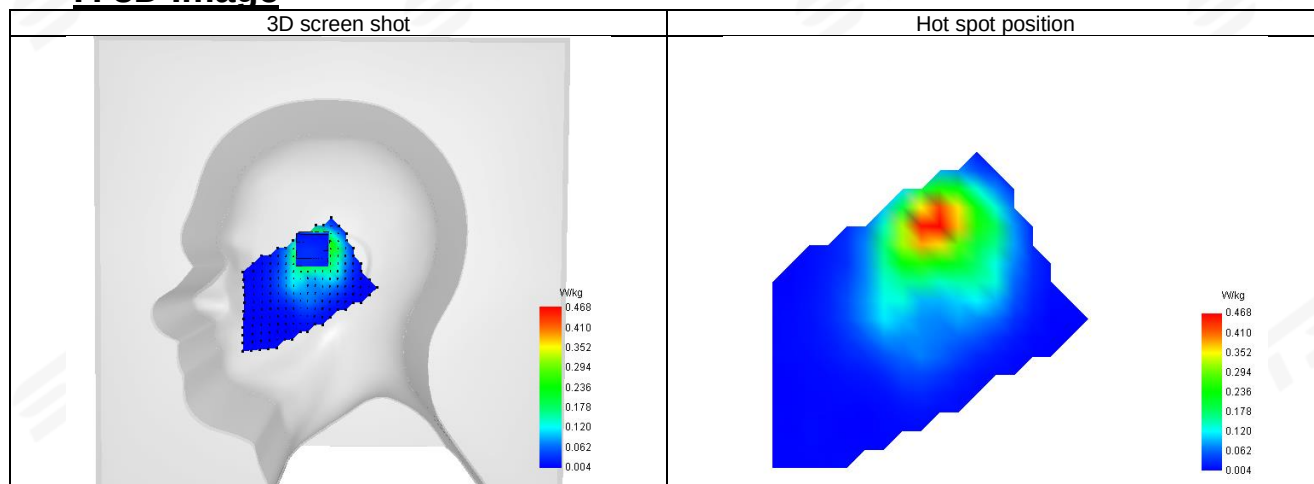

Plot 4: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-27
ConvF	1.73
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS 1900
Signal	Duty Cycle: 2.00 (Crest factor: 2.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.89
Conductivity (S/m)	1.39

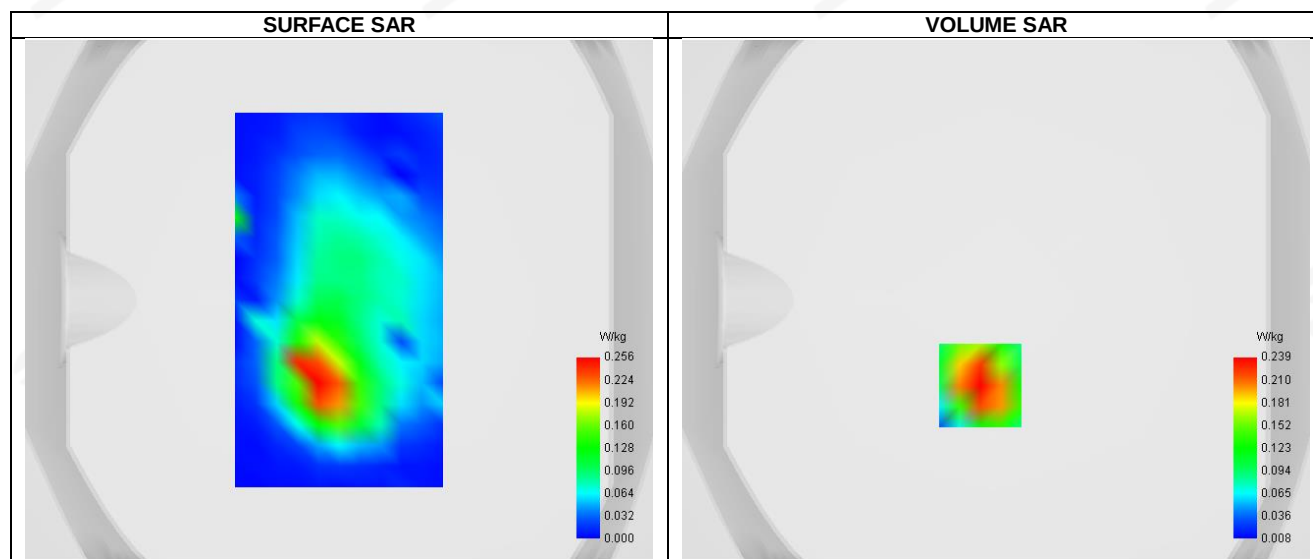


Maximum location: X=-6.00, Y=-33.00 ; SAR Peak: 0.37 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.227
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.795341

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.368	0.239	0.138	0.086	0.052	0.031	0.019

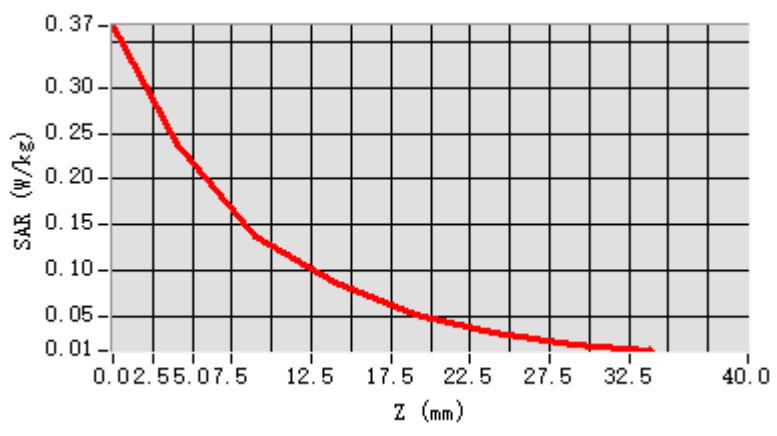


F. 3D Image

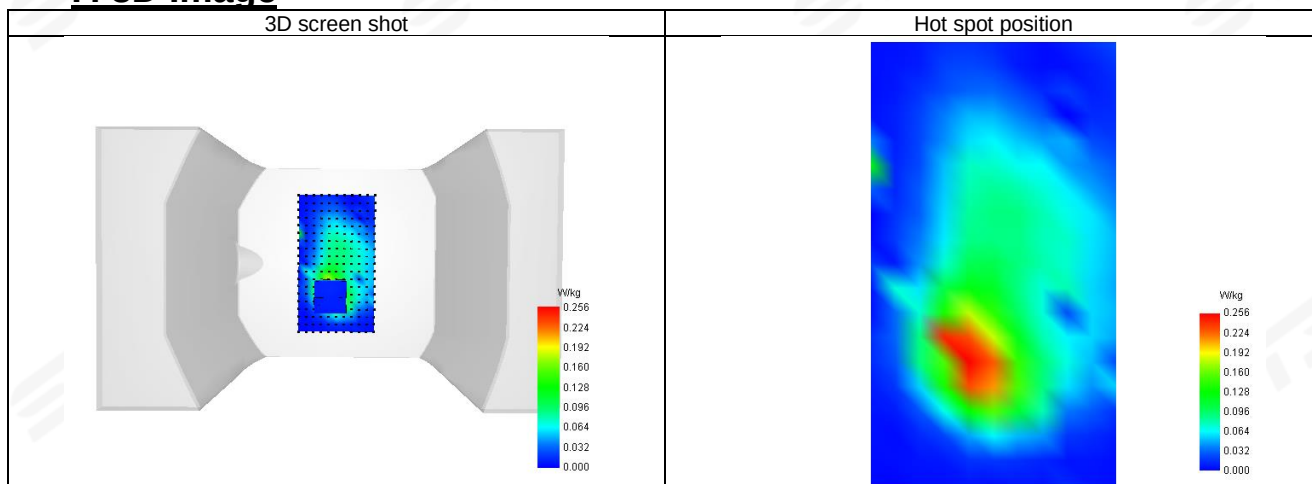

Plot 5: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-27
ConvF	1.73
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.89
Conductivity (S/m)	1.39

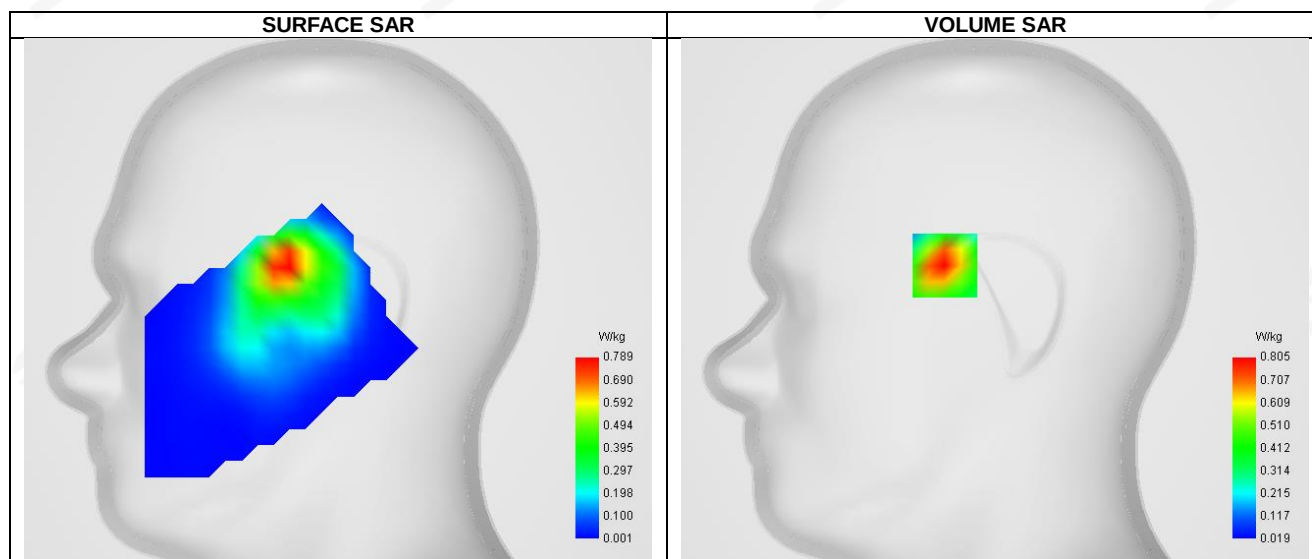


Maximum location: X=-25.00, Y=17.00 ; SAR Peak: 1.22 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.420
SAR 1g (W/Kg)	0.763
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	60.517601

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	1.190	0.805	0.487	0.295	0.180	0.110	0.067

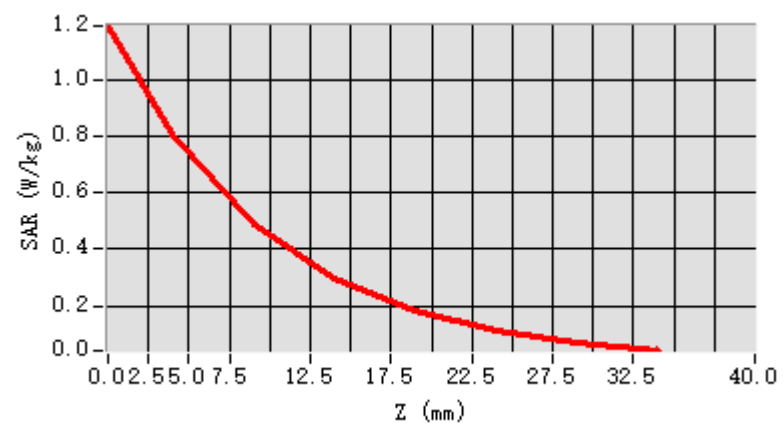


F. 3D Image

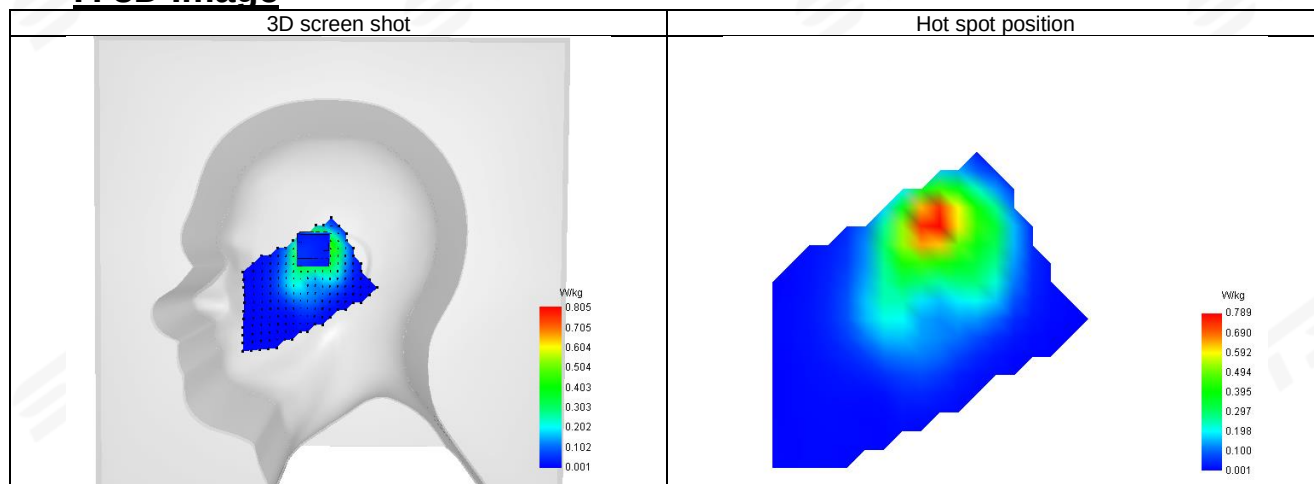

Plot 6: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-27
ConvF	1.73
Probe	SN 08/21 EPG0352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA II
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1880
Relative permittivity (real part)	40.89
Conductivity (S/m)	1.39

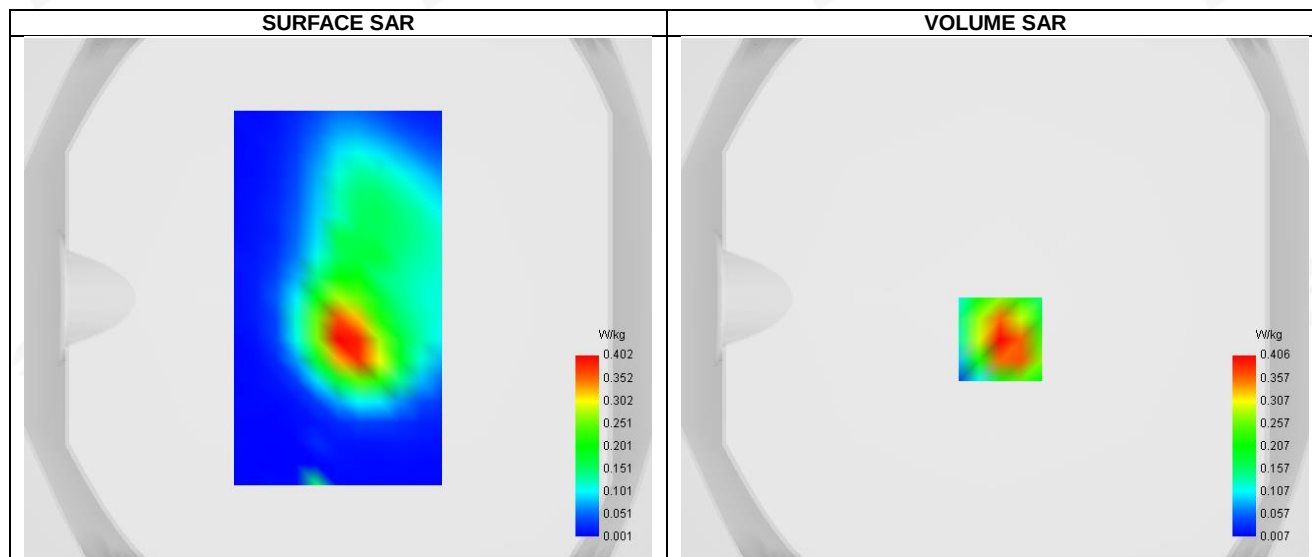


Maximum location: X=2.00, Y=-16.00 ; SAR Peak: 0.65 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.204
SAR 1g (W/Kg)	0.388
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	57.326176

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.627	0.406	0.233	0.133	0.080	0.046	0.027

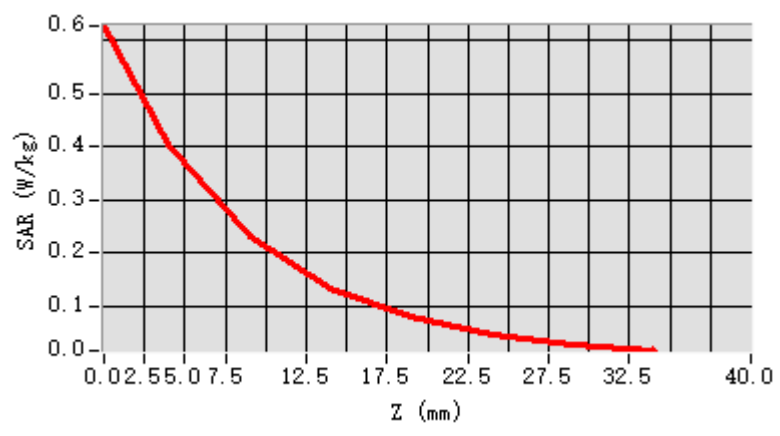


F. 3D Image

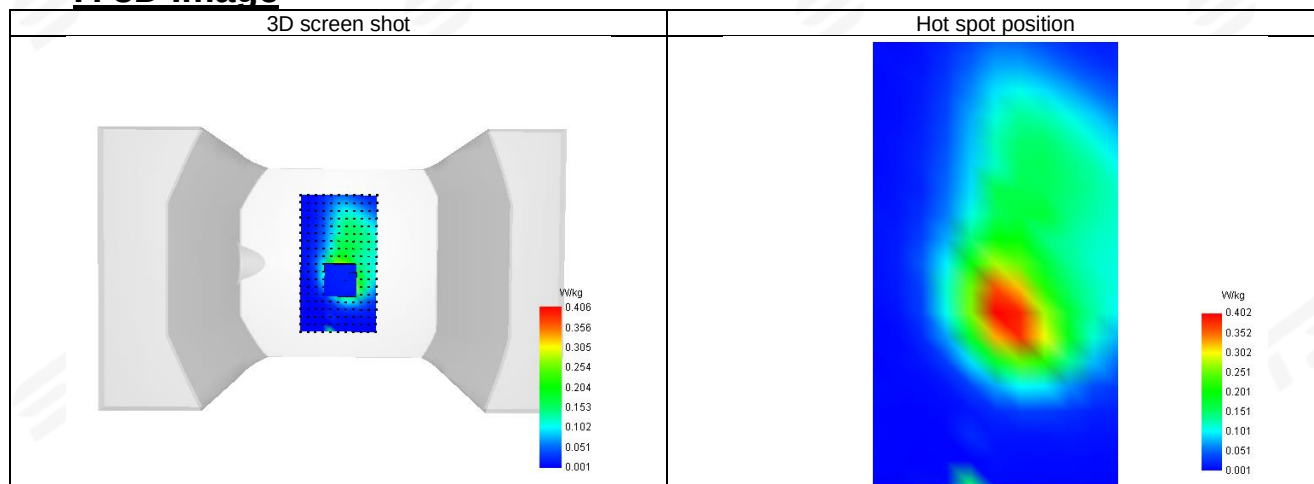

Plot 7: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-26
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right head
Device Position	Cheek
Band	WCDMA IV
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	40.68
Conductivity (S/m)	1.37

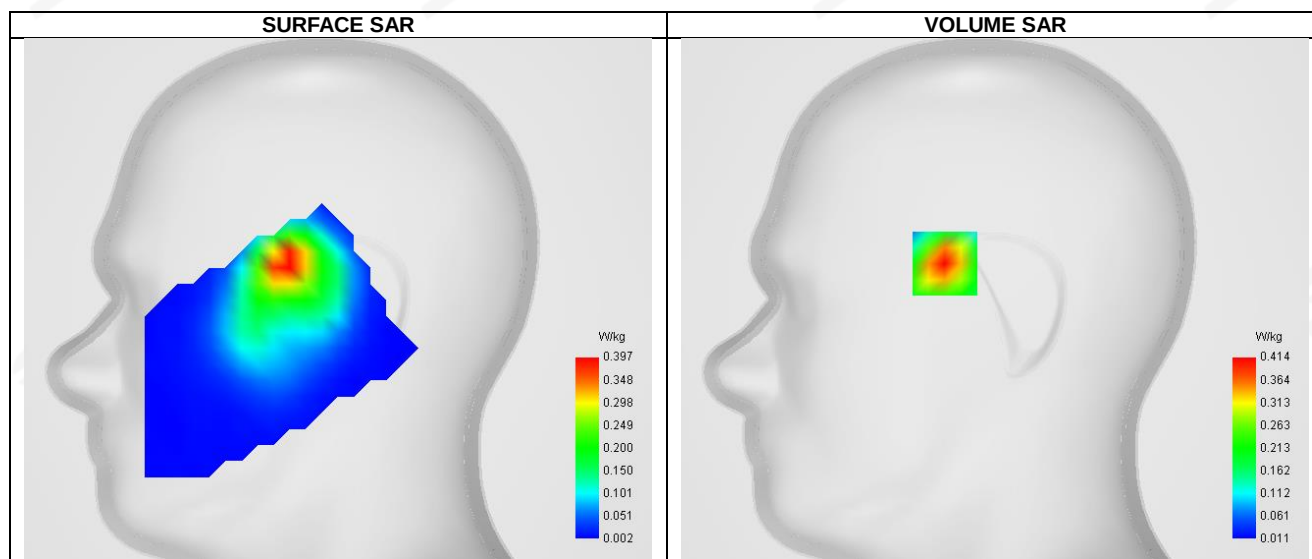


Maximum location: X=-25.00, Y=18.00 ; SAR Peak: 0.61 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.216
SAR 1g (W/Kg)	0.387
Horizontal validation criteria: minimum distance (mm)	16.000000
Vertical validation criteria: SAR ratio M2/M1 (%)	62.563791

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.596	0.414	0.259	0.158	0.099	0.062	0.038

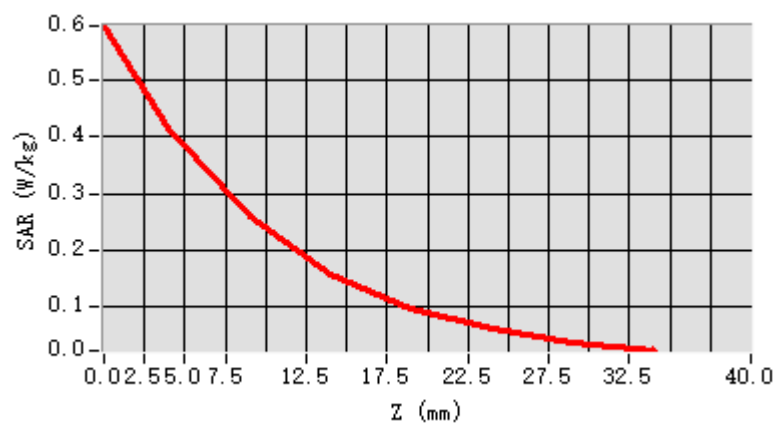


F. 3D Image

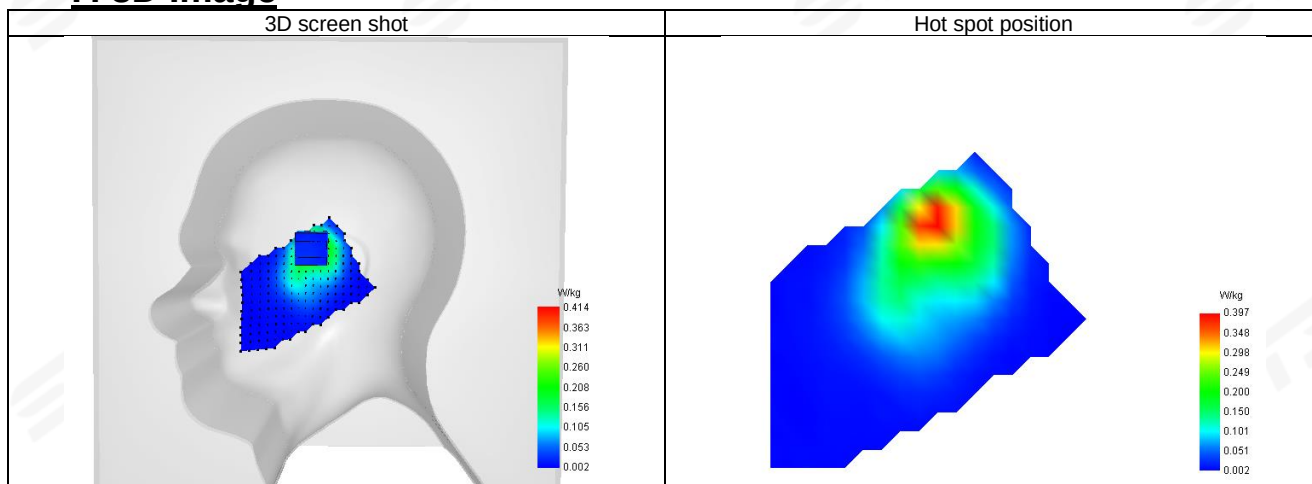



Plot 8: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-26
ConvF	1.54
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	WCDMA IV
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	1752.4
Relative permittivity (real part)	40.68
Conductivity (S/m)	1.37

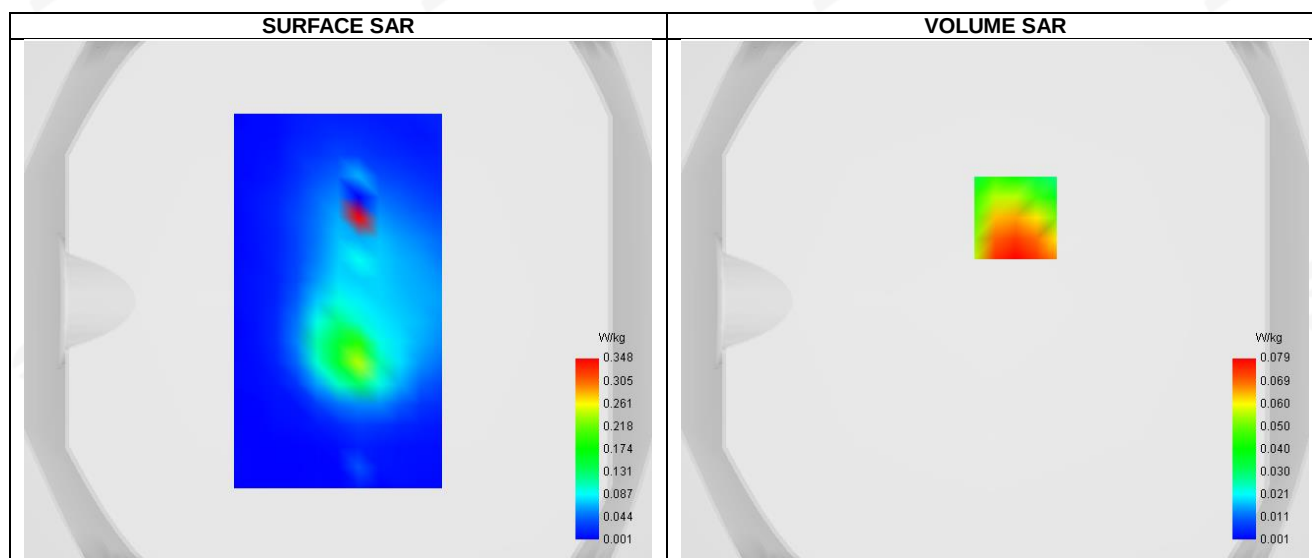


Maximum location: X=8.00, Y=32.00 ; SAR Peak: 0.10 W/kg

D. SAR 1g & 10g


SAR 10g (W/Kg)	0.038
SAR 1g (W/Kg)	0.073
Horizontal validation criteria: minimum distance (mm)	28.844410
Vertical validation criteria: SAR ratio M2/M1 (%)	72.398581

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.160	0.079	0.030	0.041	0.017	0.022	0.009

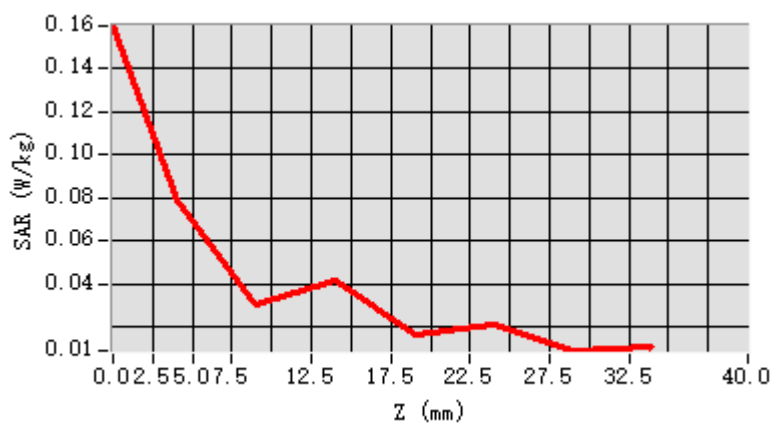


F. 3D Image

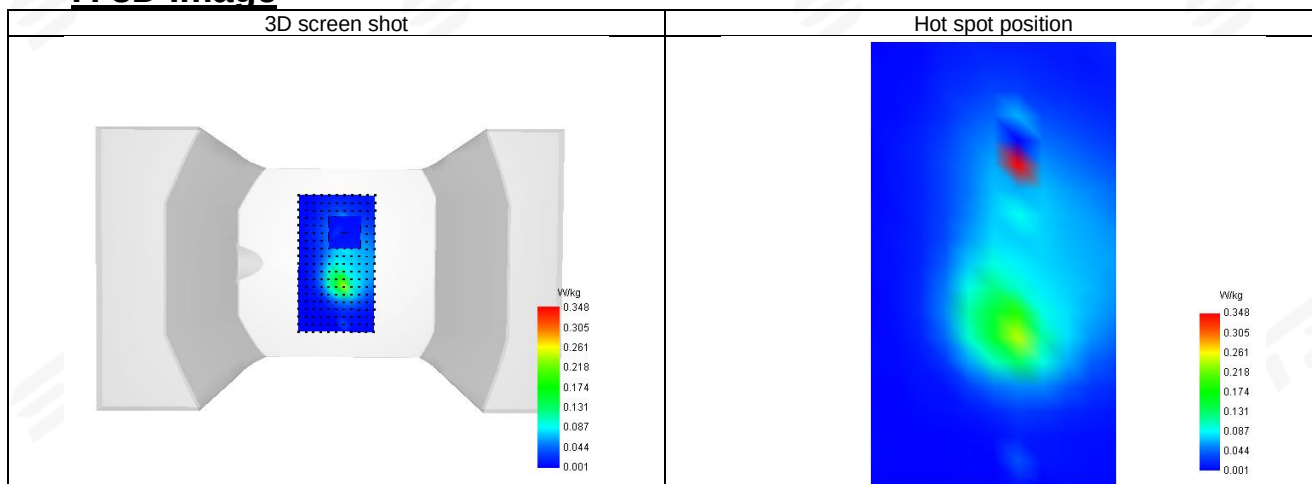

Plot 9: DUT: Smart Phone; EUT Model: C7

Test Date	2026-01-25
ConvF	1.49
Probe	SN 08/21 EPGO352
Area Scan	dx=8mm, dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7, dx=8mm, dy=8mm, dz=5mm
Phantom	Right Cheek
Device Position	Cheek
Band	WCDMA V
Signal	WCDMA (Crest factor: 1.0)
Frequency (MHz)	826.4
Relative permittivity (real part)	41.24
Conductivity (S/m)	0.89

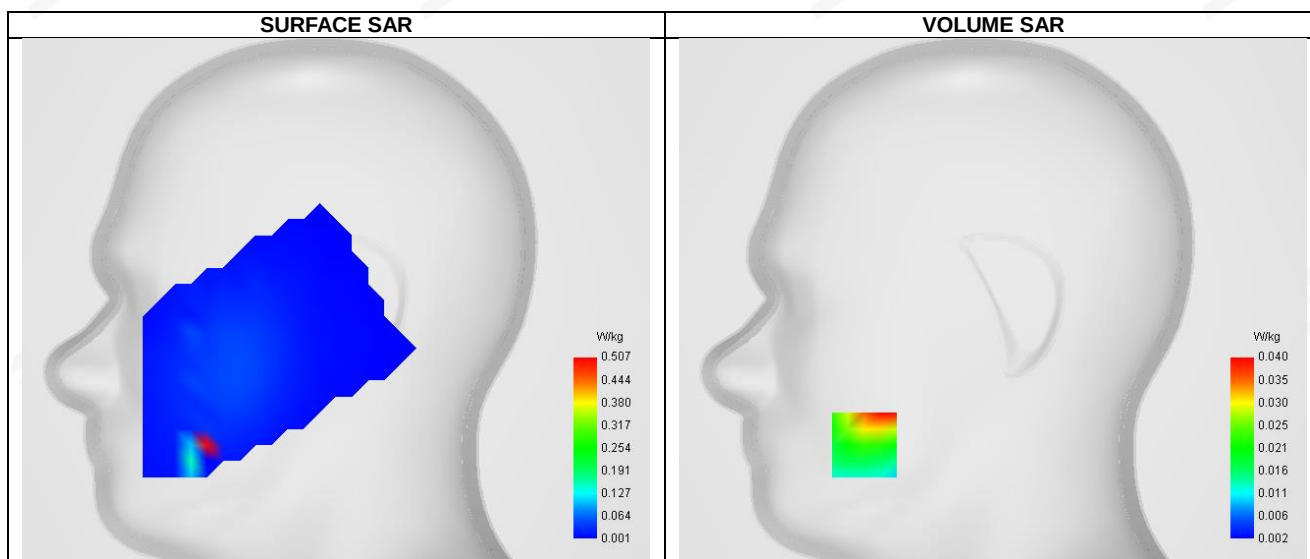


Maximum location: X=-64.00, Y=-72.00 ; SAR Peak: 0.05 W/kg

D. SAR 1g & 10g

SAR 10g (W/Kg)	0.016
SAR 1g (W/Kg)	0.036
Horizontal validation criteria: minimum distance (mm)	17.888544
Vertical validation criteria: SAR ratio M2/M1 (%)	82.233298

E. Z Axis Scan

Z (mm)	0.00	4.00	9.00	14.00	19.00	24.00	29.00
SAR (W/Kg)	0.099	0.040	0.009	0.027	0.004	0.018	0.002

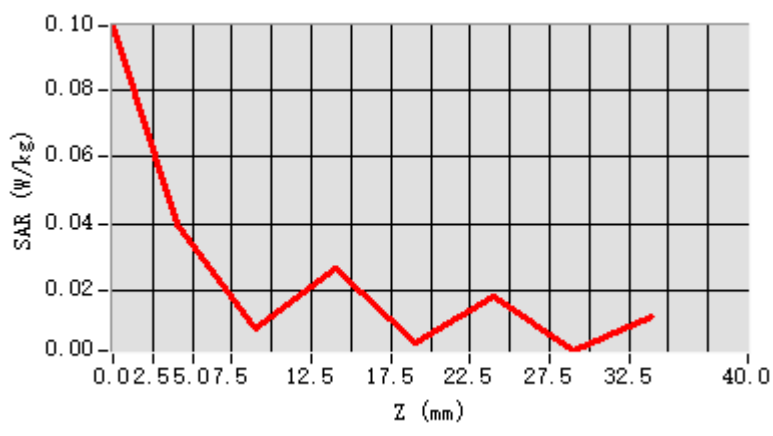

F. 3D Image

