



#31





Test Mode: LTE Band 66, 1RB, High channel(Head Left Cheek)

Product Description: Tablet

Model: RT1

Test Date: June 06, 2022

Medium(liquid type)	HSL _1800
Frequency (MHz)	1770.0000
Relative permittivity (real part)	56.12
Conductivity (S/m)	0.95
E-Field Probe	SN 31/17 EPG0324
Crest Factor	1.0
Conversion Factor	1.65
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.7500000
SAR 10g (W/Kg)	0.095313
SAR 1g (W/Kg)	0.153336
SURFACE SAR	VOLUME SAR

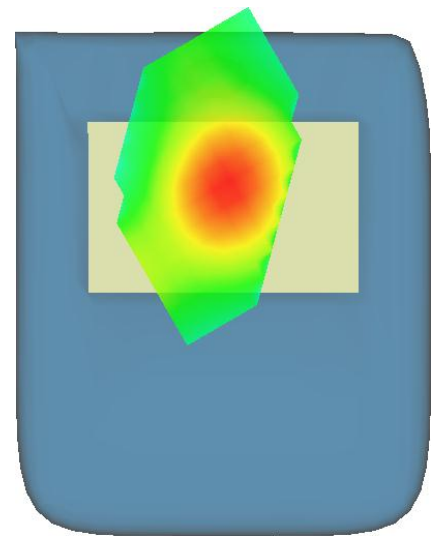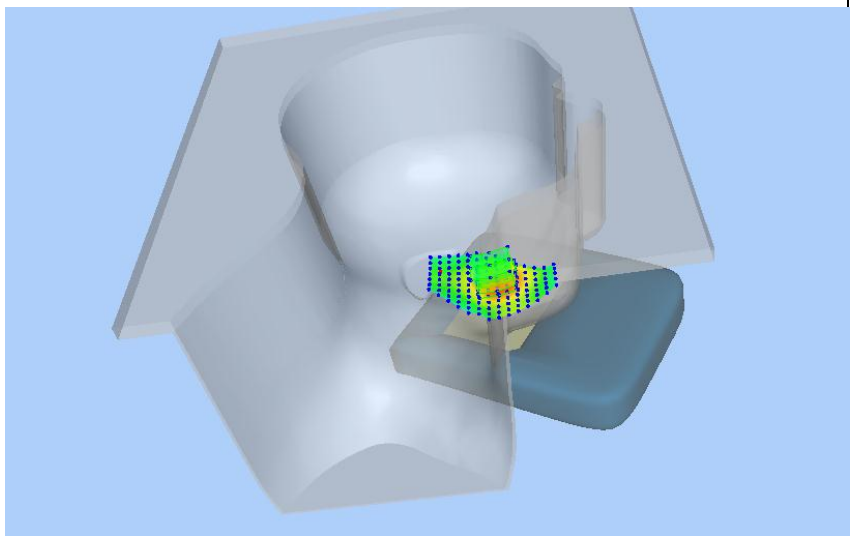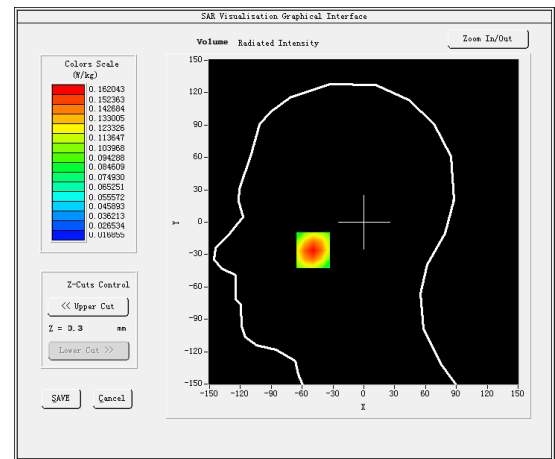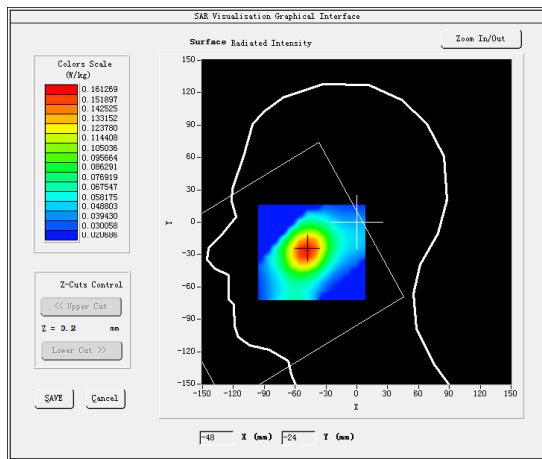



#32





Test Mode: LTE Band 66, 1RB, High channel(Body Rear Side)

Product Description: Tablet

Model:RT1

Test Date: June 06, 2022

Medium(liquid type)	HSL _1800
Frequency (MHz)	1770.0000
Relative permittivity (real part)	56.12
Conductivity (S/m)	0.95
E-Field Probe	SN 31/17 EPG0324
Crest Factor	1.0
Conversion Factor	1.65
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.790000
SAR 10g (W/Kg)	0.127552
SAR 1g (W/Kg)	0.212793
SURFACE SAR	VOLUME SAR

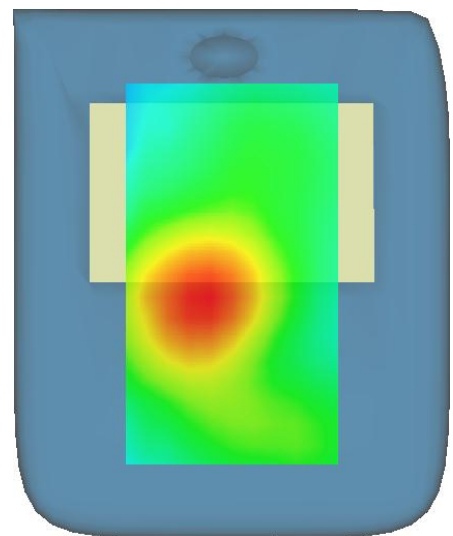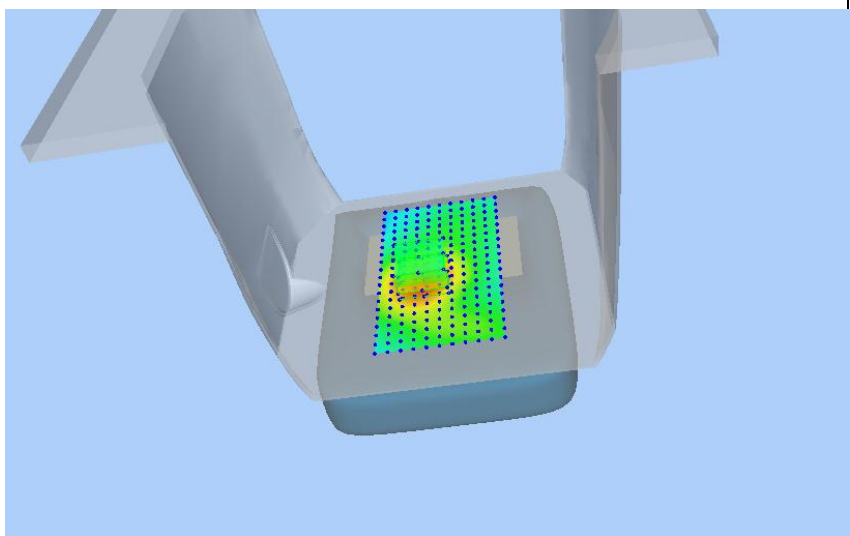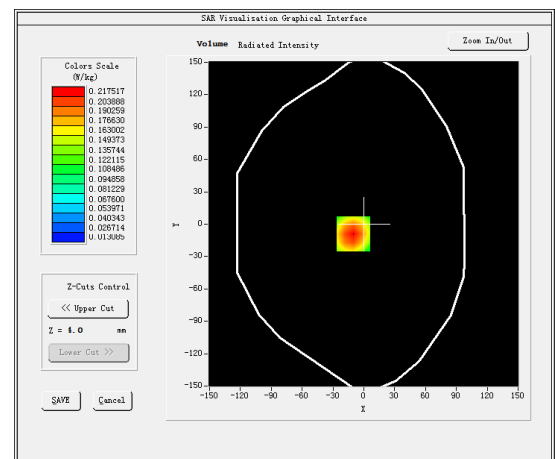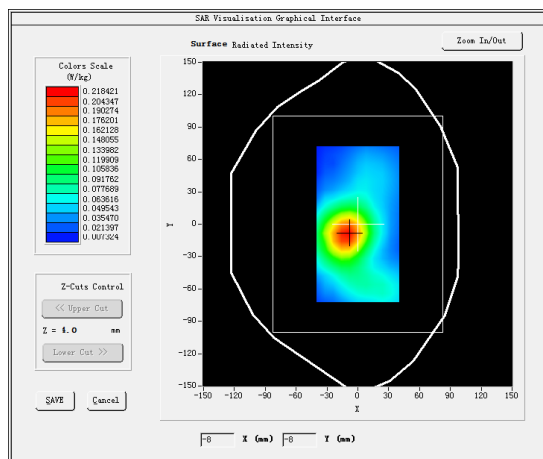



#33





Test Mode: 802.11g (WiFi2.4G),High channel(Head Left Cheek)

Product Description:Tablet

Model:RT1

Test Date: June 08, 2022

Medium(liquid type)	HSL_2450
Frequency (MHz)	2462.0000
Relative permittivity (real part)	40.03
Conductivity (S/m)	1.79
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.91
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.450000
SAR 10g (W/Kg)	0.061806
SAR 1g (W/Kg)	0.113350
SURFACE SAR	VOLUME SAR

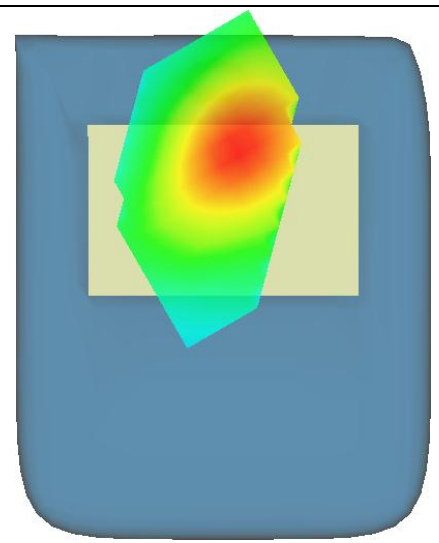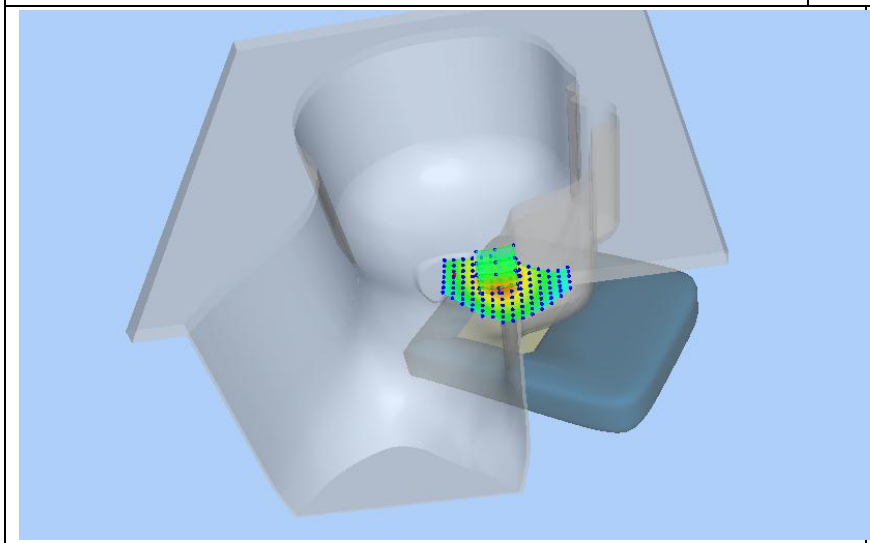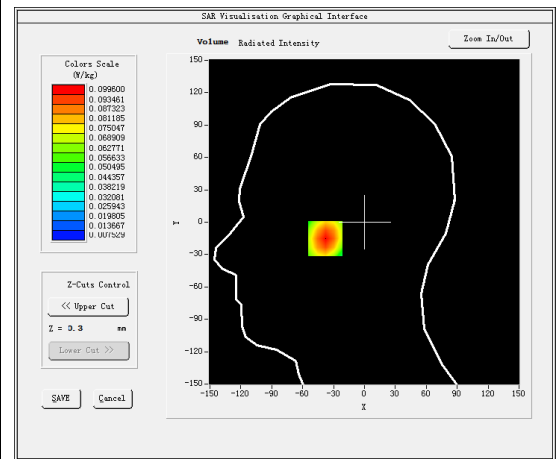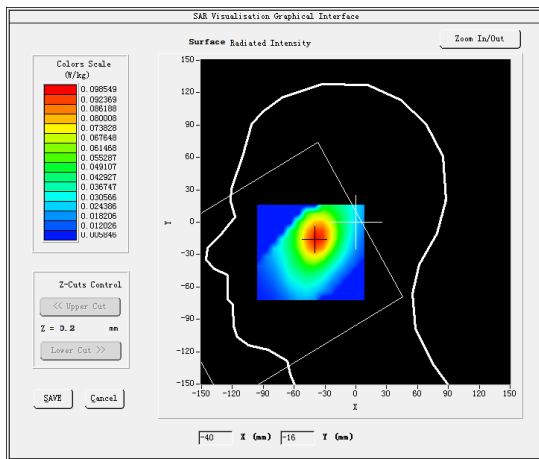



#34





Test Mode: 802.11g (WiFi2.4G),High channel(Body Rear Side)

Product Description:Tablet

Model:RT1

Test Date: June 08, 2022

Medium(liquid type)	HSL_2450
Frequency (MHz)	2462.0000
Relative permittivity (real part)	40.03
Conductivity (S/m)	1.79
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.91
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.520000
SAR 10g (W/Kg)	0.124962
SAR 1g (W/Kg)	0.257730
SURFACE SAR	VOLUME SAR

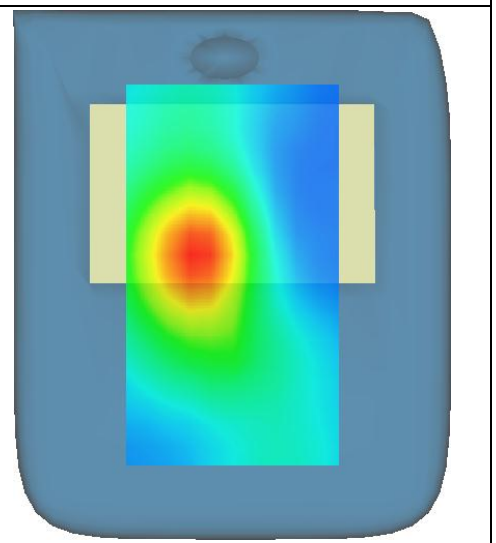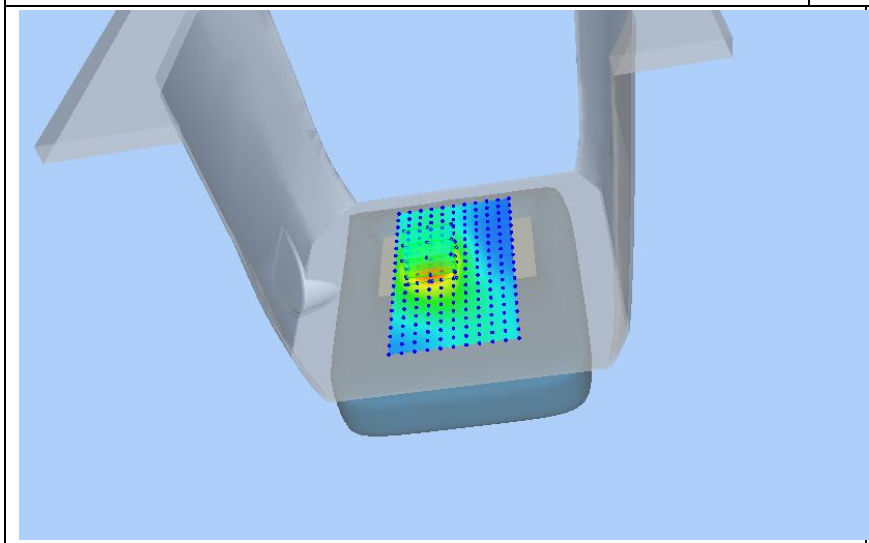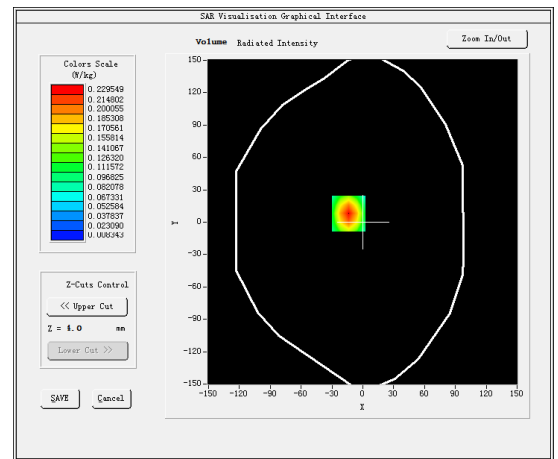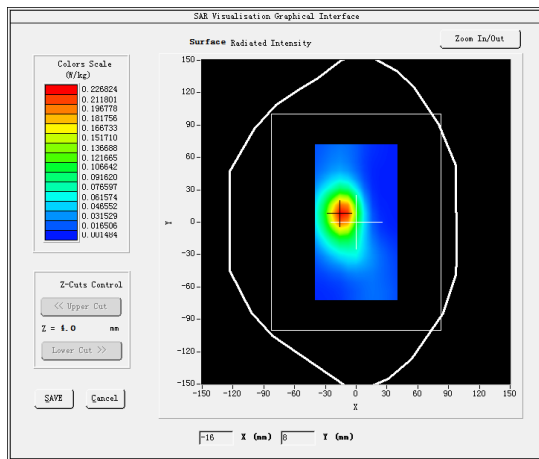



#35





Test Mode: 802.11n20(WiFi5.2G), Low channel (Head Left Cheek)

Product Description: Tablet

Model: RT1

Test Date: June 16, 2022

Medium(liquid type)	HSL_5200
Frequency (MHz)	5180.0000
Relative permittivity (real part)	49.05
Conductivity (S/m)	5.36
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.50
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-0.730000
SAR 10g (W/Kg)	0.062490
SAR 1g (W/Kg)	0.115131
SURFACE SAR	VOLUME SAR

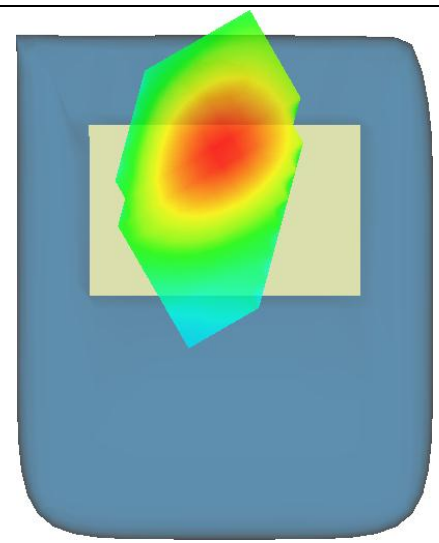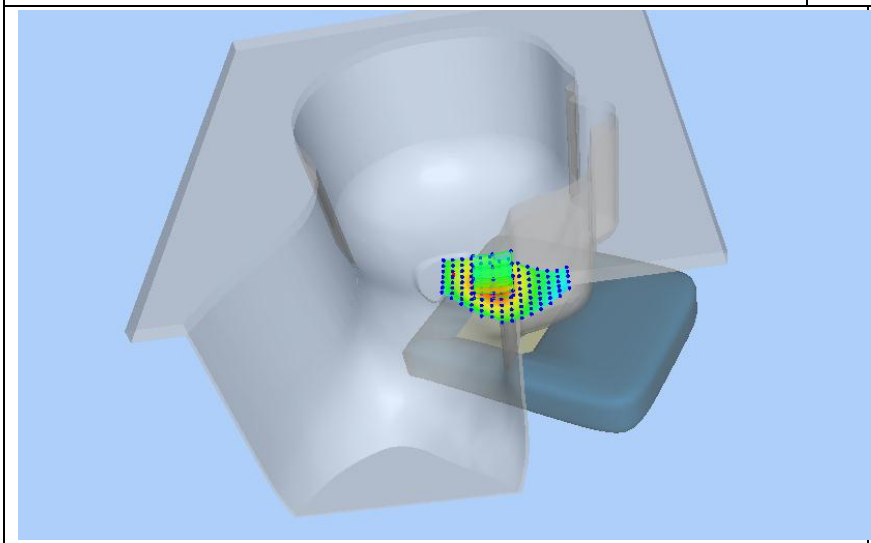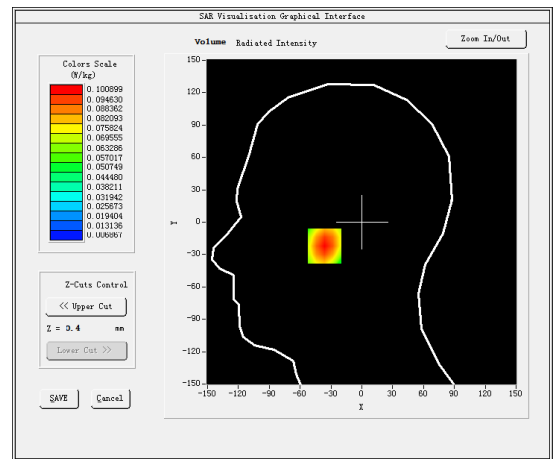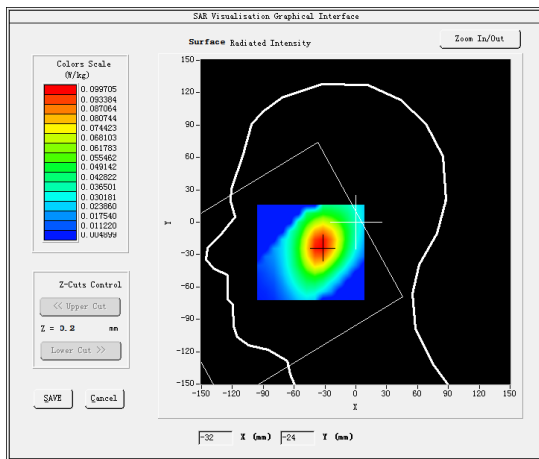



#36





Test Mode: 802.11n20(WiFi5.2G), Low channel (Body Rear Side)

Product Description: Tablet

Model: RT1

Test Date: June 16, 2022

Medium(liquid type)	HSL_5200
Frequency (MHz)	5180.0000
Relative permittivity (real part)	49.05
Conductivity (S/m)	5.36
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.50
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.020000
SAR 10g (W/Kg)	0.095447
SAR 1g (W/Kg)	0.222382
SURFACE SAR	VOLUME SAR

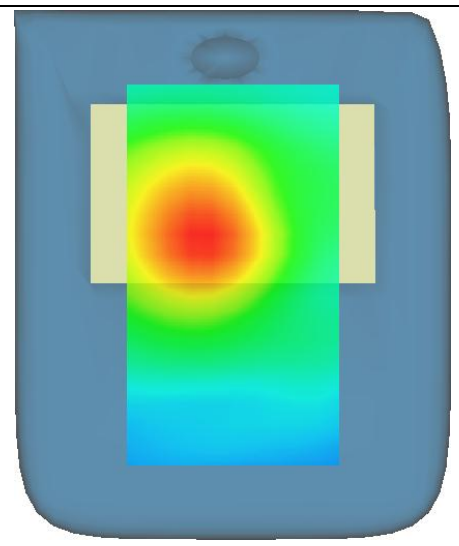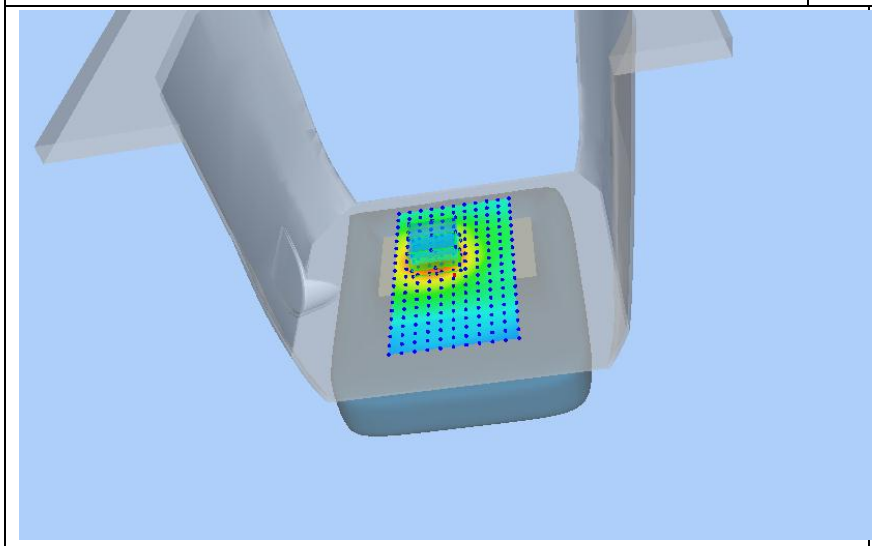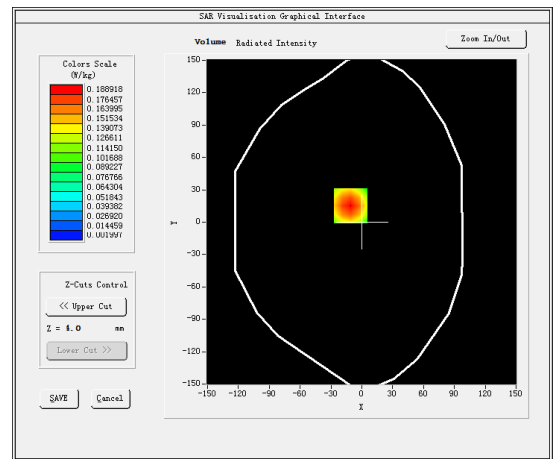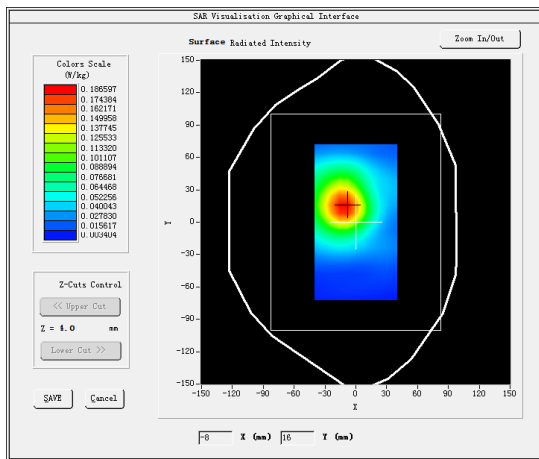



#37





Test Mode: 802.11a (WiFi5.8G), High channel (Head Left Cheek)

Product Description: Tablet

Model: RT1

Test Date: June 17, 2022

Medium(liquid type)	HSL_5800
Frequency (MHz)	5825.0000
Relative permittivity (real part)	48.26
Conductivity (S/m)	5.97
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.50
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.640000
SAR 10g (W/Kg)	0.017506
SAR 1g (W/Kg)	0.037753
SURFACE SAR	VOLUME SAR

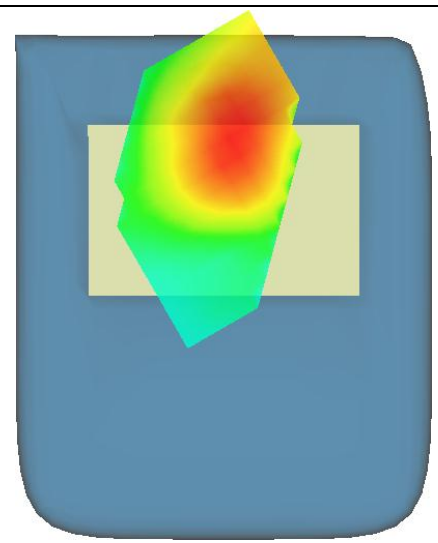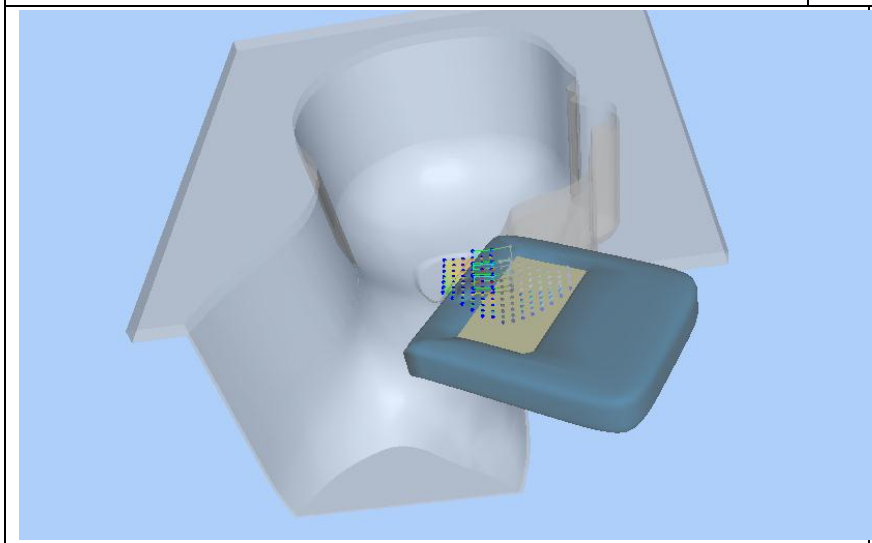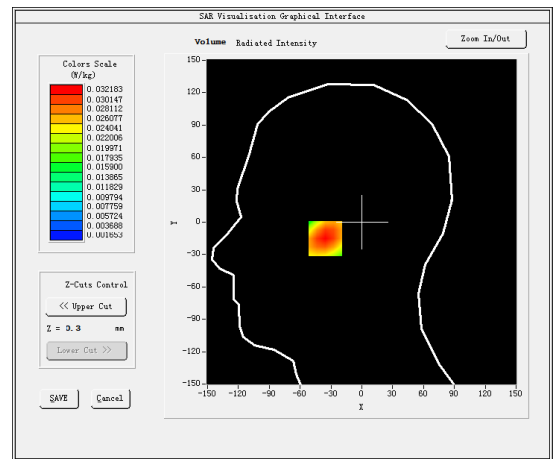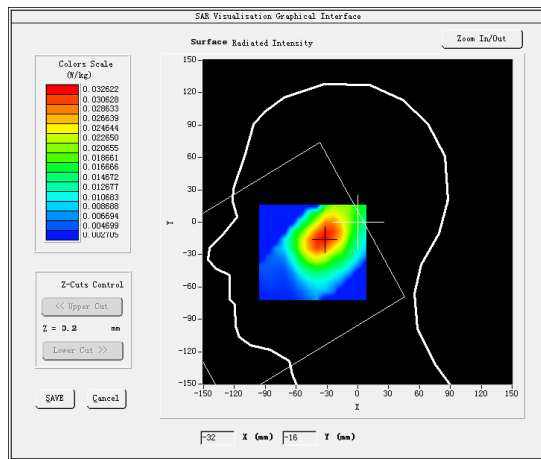



#38





Test Mode: 802.11a(WiFi5.8G), High channel (Body Rear Side)

Product Description: Tablet

Model: RT1

Test Date: June 17, 2022

Medium(liquid type)	HSL_5800
Frequency (MHz)	5825.0000
Relative permittivity (real part)	48.26
Conductivity (S/m)	5.97
E-Field Probe	SN 31/17 EPGO324
Crest Factor	1.0
Conversion Factor	1.50
Sensor	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.320000
SAR 10g (W/Kg)	0.056402
SAR 1g (W/Kg)	0.131869
SURFACE SAR	VOLUME SAR

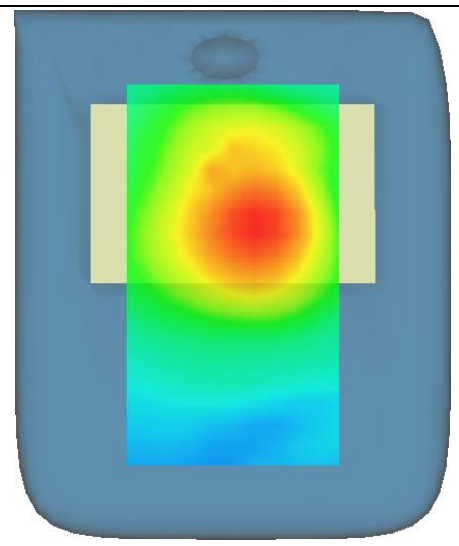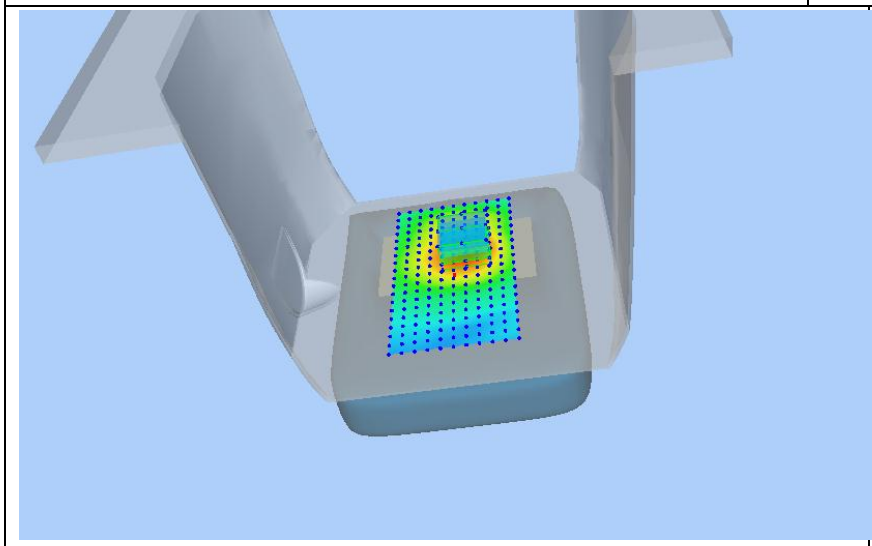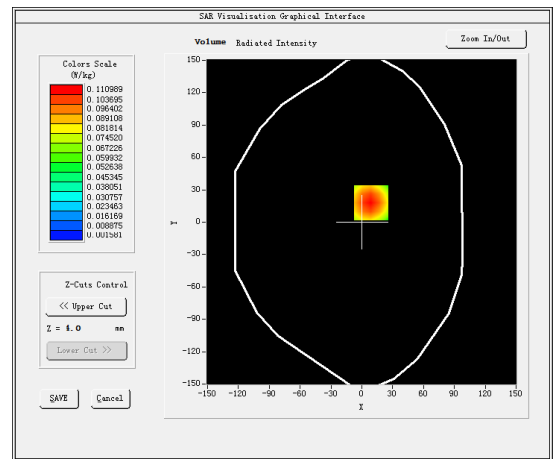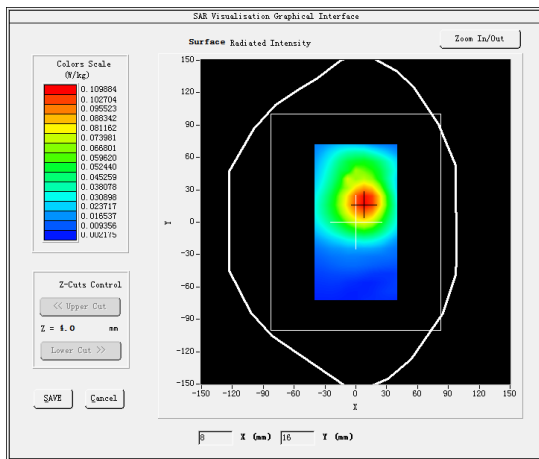



5. CALIBRATION CERTIFICATES

5.1 Probe-EPGO324 Calibration Certificate



COMOSAR E-Field Probe Calibration Report

Ref: ACR.281.2.18.SATU.A

SHENZHEN LCS COMPLIANCE TESTING LABORATORY LTD.

**1F., XINGYUAN INDUSTRIAL PARK, TONGDA ROAD,
BAO'AN BLVD**

BAO'AN DISTRICT, SHENZHEN, GUANGDONG, CHINA

MVG COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 31/17 EPG0324

Calibrated at MVG US

2105 Barrett Park Dr. - Kennesaw, GA 30144



Calibration Date: 10/06/2021

Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in MVG USA using the CALISAR / CALIBAIR test bench, for use with a COMOSAR system only. All calibration results are traceable to national metrology institutions.



COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.281.2.18.SATU.A

	<i>Name</i>	<i>Function</i>	<i>Date</i>	<i>Signature</i>
<i>Prepared by :</i>	Jérôme LUC	Product Manager	10/6/2021	<i>JS</i>
<i>Checked by :</i>	Jérôme LUC	Product Manager	10/6/2021	<i>JS</i>
<i>Approved by :</i>	Kim RUTKOWSKI	Quality Manager	10/6/2021	<i>Kim Rutkowski</i>

	<i>Customer Name</i>
<i>Distribution :</i>	Shenzhen LCS Compliance Testing Laboratory Ltd.

<i>Issue</i>	<i>Date</i>	<i>Modifications</i>
A	10/6/2021	Initial release

Page: 2/10

This document shall not be reproduced, except in full or in part, without the written approval of MVG.
The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of MVG.