

FCC CFR47 PART 22H, 27 CERTIFICATION TEST REPORT FCC ID: 2ANMU-WP63

Product: Smart phone

Trade Mark: OUKITEL

Model Number: WP63

Family Model: WP63 S, WP63 GT, WP63 Pro, WP63 Plus, WP63 Ultra, WP63 MAX, WP63 4G, WP63 5G, WP63 TITAN, WP63 Lite, WP63 Go, WP63 Pure

Report No.: N26052704325E

Issue Date: Sept. 10, 2026

Prepared for

SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE,
GUANLAN, LONGHUA SHENZHEN, 518XXX China

Prepared by


Shenzhen NTEK Testing Technology Co., Ltd.
No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street,
Baoan District, Shenzhen, Guangdong, People's Republic of China
Tel. 0755-23200050 Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
 INDUSTRIAL ZONE, GUANLAN,LONGHUA SHENZHEN, 518XXX
 China
Manufacturer's Name : SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address..... : A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU
 INDUSTRIAL ZONE, GUANLAN,LONGHUA SHENZHEN, 518XXX
 China
Product name : Smart phone
Trade Mark..... : OUKITEL
Model and/or type reference : WP63
Family Model : WP63 S, WP63 GT, WP63 Pro, WP63 Plus, WP63 Ultra, WP63
 MAX, WP63 4G, WP63 5G, WP63 TITAN, WP63 Lite, WP63 Go,
 WP63 Pure
Test Sample number : S2605280137-1#
Date of Test..... : Jun. 02, 2026 ~ Sept. 10, 2026
Standards : FCC CFR 47 Part 22H, Part 27
Test procedure ANSI C63.26:2015
 ANSI/TIA-603-E-2016

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Prepared : 
 By : _____
 Mary Hu
 (Project Engineer)

Reviewed : 
 By : _____
 Aaron Cheng
 (Supervisor)

Approved : 
 By : _____
 Alex Li
 (Manager)

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 RELATED SUBMITTAL(S) / GRANT (S)	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 MEASUREMENT UNCERTAINTY	6
1.6 SPECIAL ACCESSORIES.....	6
1.7 WORST-CASE CONFIGURATION AND MODE.....	7
1.8 SUMMARY OF TEST RESULTS	7
2. SYSTEM TEST CONFIGURATION	9
2.1 EUT CONFIGURATION.....	9
2.2 EUT EXERCISE	9
2.3 CONFIGURATION OF EUT SYSTEM.....	9
2.4 TEST SETUP	10
3.TEST AND MEASUREMENT EQUIPMENT	11
4. OUTPUT POWER.....	13
4.1 OUTPUT POWER MEASUREMENT	13
5. OCCUPIED BANDWIDTH	14
6. BANDEDGE AND EMISSION MASK	15
7. OUT OF BAND EMISSIONS	16
8. RADIATED MEASUREMENT	18
8.1. RADIATED POWER (ERP & EIRP)	18
8.2 NR Band5.....	19
8.3 NR BAND 78.....	21
8.4 NSA(DC_5A_n78A).....	25

9. SPURIOUS RADIATION EMISSION	27
9.1 NR BAND 5.....	29
9.2 NR BAND 78.....	33
10. FREQUENCY STABILITY	35
10.1 NR BAND 5.....	36
10.2 NR BAND 78.....	38
10.3 NSA(DC_5A_n78A)	40
11. PEAK-TO-AVERAGE RATIO.....	42
11.1 Description of the PAR Measurement.....	42
11.2 Measuring Instruments	42
11.3 Test Procedures.....	42
11.4 Test Setup.....	42
11.5 MODES TESTED	42

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Equipment	Smart phone
Trade Mark	OUKITEL
Model Name	WP63
Family Model	WP63 S, WP63 GT, WP63 Pro, WP63 Plus, WP63 Ultra, WP63 MAX, WP63 4G, WP63 5G, WP63 TITAN, WP63 Lite, WP63 Go, WP63 Pure
Model Difference	All models are the same circuit and RF module, except for model names.
FCC ID:	2ANMU-WP63
Frequency Bands:	U.S. Bands: LTE FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; NR FDD Band 5 Uplink: 824MHz-849MHz, Downlink: 869MHz-894MHz; NR TDD Band 78 Uplink/Downlink: 3450 MHz - 3550 MHz
Frequency Range:	☒ NR TDD 5, 78 ☒ EN-DC: DC_5A_n78A
Type of Modulation:	DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM CP-OFDM: QPSK/16-QAM/64QAM/256QAM
Subcarrier spacing	☒ 15KHz, ☒ 30KHz, ☐ 60KHz
NR architecture	☒ SA, ☒ NSA
Antenna:	FPC Antenna
Antenna gain:	Band5: -4.79dBi; Band78: 2.58dBi
Adapter	Model: HJ-PD33W-US Input: 100-240V~50/60Hz 0.6A Output: 5.0V---3.0A 15.0W OR 9.0V---3.0A 27.0W OR 12.0V---2.75A 33.0W MAX
Battery	DC 3.87V, 20000mAh, 77.4Wh
Power supply	DC 3.87V from battery or DC 5V/9V/12V from adapter
Extreme Vol. Limits:	DC 3.29V to DC 4.45V (Nominal DC 3.87V) (Note 1)
HW Version	N/A
SW Version	V04
** Note1: The High Voltage 4.45V and Low Voltage 3.29V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.	

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ANMU-WP63** filing to comply with the FCC Part 22H , Part 27.

1.3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 27, ANSI C63.26:2015.

1.4 TEST FACILITY

The test site used to collect the radiated data is located at:

ShenZhen NTEK Testing Technology Co., Ltd.

No. 24 Xinfu East Road, Xiangshan Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong, People's Republic of China.

The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.26:2015& ANSI C63.4: 2014.

FCC Registration No.:463705

IC Registration No.:9270A

CNAS Registration No.:L5516

1.5 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted output power	0.5dB
2	Occupied bandwidth	0.01
3	Spurious emissions at antenna terminals	2.71dB
4	Emission mask	2.71dB
5	Frequency stability	0.21ppm
8	Field strength of spurious radiation(30MHz ~ 1GHz)	5.1dB
9	Field strength of spurious radiation(1GHz ~ 18GHz)	4.9dB
10	Field strength of spurious radiation(18GHz ~ 40GHz)	5.76dB
11	Temperature	1°C
12	Humidity	5%

1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

1.7 WORST-CASE CONFIGURATION AND MODE

The worst-case scenario for all measurements is based on the investigation results.

The device has NR Bands of: Band 5/78.

The RB Size was selected to measure for peak or average ERP and EIRP, which was based on the conducted power verification baseline data.

For the fundamental investigation of radiated emissions, the EUT is investigated for vertical and horizontal antenna orientations and X Y and Z orientations of the EUT alone. After the investigations the worst case was determined to be at X orientation for all LTE bands.

1.8 SUMMARY OF TEST RESULTS

FCC Part 22H Part27, Subpart L, KDB 971168 D01 Power Meas License Digital Systems v03			
FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
27.50(d)(5) 22.913 KDB 971168 D01 Clause 5.7	Peak-to-Average Ratio	PASS	
2.1049,22.917 KDB 971168 D01 Clause 4.2	Occupied Bandwidth	PASS	
2.1051,22.917 27.53(c), (g), (h) KDB 971168 D01 Clause 6	Band Edge	PASS	
22.913,27.50(b)(10), (c)(10) KDB 971168 D01 Clause 5.6	Effective Radiated Power	PASS	
27.50(h)(2), (d)(4) KDB 971168 D01 Clause 5.6	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 7	Field Strength of Spurious Radiation	PASS	
2.1055,22.355 27.54 KDB 971168 D01 Clause 9	Frequency Stability for Temperature & Voltage	PASS	
2.1051,22.917 27.53(c)(g)(h)(m) KDB 971168 D01 Clause 6	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.3 CONFIGURATION OF EUT SYSTEM

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Smart phone	WP63	FCC ID: 2ANMU-WP63	EUT


*Note: All the accessories have been used during the test.
the following "EUT" in setup diagram means EUT system.*

2.4 TEST SETUP


For Radiated Test Cases




For Conducted Output Power

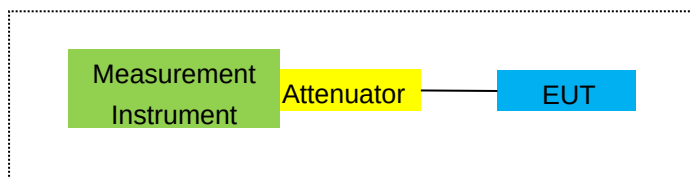

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

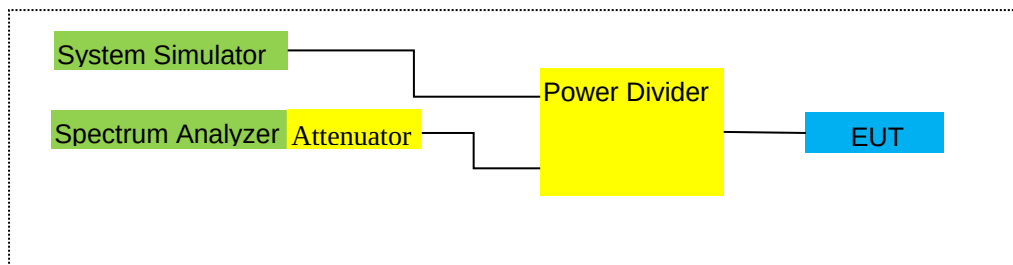

For Frequency Stability

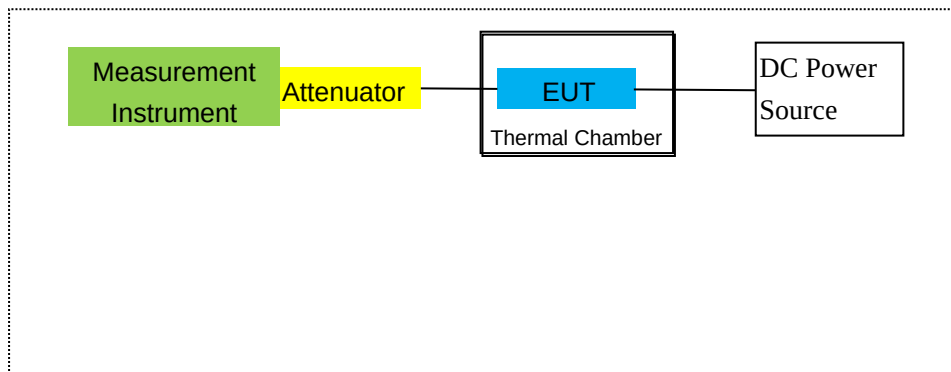

Note: EUT built-in battery-powered, the battery is fully-charged.

3.TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	MXA Signal Analyzer	Agilent	N9020A	MY49100060	2026.04.08	2027.04.07	1 year
2	Test Receiver	R&S	ESPI3	101417	2026.06.29	2027.06.28	1 year
3	Log-Periodic Antenna	SCHWARZBECK	VULB 9162	584	2026.04.11	2027.04.10	3 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2024.04.26	2027.04.25	3 year
5	Horn Antenna	EM	EM-AH-10180	2011071402	2024.05.12	2027.05.11	3 year
6	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2024.05.12	2027.05.11	3 year
7	Amplifier	EM	EM-30180	060538	2026.04.08	2027.04.07	1 year
8	Loop Antenna	ARA	PLA-1030/B	1029	2026.04.08	2027.04.07	1 year
9	Power Meter	R&S	NRVS	100696	2026.04.08	2027.04.07	1 year
10	Power Sensor	R&S	URV5-Z4	0395.1619.05	2026.04.08	2027.04.07	1 year
11	Test Cable	N/A	R-01	N/A	2024.06.16	2027.06.15	3 year
12	Test Cable	N/A	R-02	N/A	2024.06.16	2027.06.15	3 year
13	Test Cable	N/A	R-03	N/A	2024.06.16	2027.06.15	3 year
14	Test Receiver	R&S	ESCI	101160	2026.04.08	2027.04.07	1 year
15	LISN	R&S	ENV216	101313	2026.04.08	2027.04.07	1 year
16	LISN	EMCO	3816/2	00042990	2026.04.08	2027.04.07	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2026.04.08	2027.04.07	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2026.04.08	2027.04.07	1 year
19	Test Cable	N/A	C01	N/A	2024.05.06	2027.05.05	3 year
20	Test Cable	N/A	C02	N/A	2024.05.06	2027.05.05	3 year
21	Test Cable	N/A	C03	N/A	2024.05.06	2027.05.05	3 year
22	Attenuator	MCE	24-10-34	BN9258	2026.04.08	2027.04.07	1 year
23	Spectrum Analyzer	agilent	e4440a	us44300399	2026.04.08	2027.04.07	1 year
24	test receiver	R&S	ESCI	a0304218	2026.04.08	2027.04.07	1 year
25	Communication Tester	R&S	CMU200	A0304247	2026.04.08	2027.04.07	1 year

26	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2026.04.08	2027.04.07	1 year
27	DC Power Source	N/A	PS-6005D	20170402923	2024.05.06	2027.05.05	3 year
28	MXG Vector Signal Generator	Agilent	N5182A	MY47070317	2026.04.08	2027.04.07	1 year
29	Communication Tester	R&S	CMW500	148500	2026.04.27	2027.04.26	1 year
30	Log-Periodic Antenna	SCHWARZBECK	VULB 9168	1742	2025.11.01	2026.10.31	1 year
31	Horn Antenna	SCHWARZBECK	BBHA 9120 D	2816	2024.05.18	2027.05.17	3 year
32	PSG Analog Signal Generator	Agilent	E8257D	MY51110112	2026.04.27	2027.04.26	1 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable& DC Power Source which is scheduled for calibration every 3 years.

4. OUTPUT POWER

4.1 OUTPUT POWER MEASUREMENT

NR Measurement Procedure:

All NR bands conducted power peak and average are obtained from the MT8821C telecommunication test set. The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 38.521-1 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table Table 6.2.2.3-1: of the 3GPP TS 38.521-1 (V15.3.0) (07-2019).

Table 6.2.2.3-1: UE Power Class

EUTRA band	Class 1 (dBm)	Tolerance (dB)	Class 2 (dBm)	Tolerance (dB)	Class 3 (dBm)	Tolerance (dB)	Class 4 (dBm)	Tolerance (dB)
1					23	± 2		
2					23	$\pm 2^2$		
3					23	$\pm 2^2$		
4					23	± 2		
5					23	± 2		
6					23	± 2		
7					23	± 2		
8					23	± 2		
9					23	± 2		
10					23	± 2		
11					23	± 2		
12					23	± 2		
13					23	± 2		
14					23	± 2		
15					23	± 2		
16					23	± 2		
17					23	± 2		
18					23	± 2		
19					23	± 2		
20					23	± 2		
21					23	± 2		
22					23	± 2		
23					23	± 2		
24					23	± 2		
25					23	± 2		
26			26	± 2	23	± 2		
27					23	± 2		
28					23	± 2		
29					23	± 2		
30					23	± 2		
31					23	± 2		
32					23	± 2		
33					23	± 2		
34					23	± 2		
35					23	± 2		
36					23	± 2		
37					23	± 2		
38					23	± 2		
39					23	± 2		
40					23	± 2		
41					23	$\pm 2^2$		
42					23	$+2/-3$		
43					23	$+2/-3$		
44					23	$+2/[-3]$		
45					23	± 2		
46					23	± 2		
47			26	± 2	23	± 2		

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS 38.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Test data reference attachment.

5. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

MODES TESTED

NR Band 5/78, NSA(DC_5A_n78A)

RESULTS

PASS

Test data reference attachment.

6. BANDEDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917(a), §27.53(c)(g)(h)(m)

FCC: §2.1046,

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The transmitter output was connected to a CMW500Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:

Set the spectrum analyzer span to include the block edge frequency

Set a marker to point the corresponding band edge frequency in each test case.

Set display line

Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED

NR Band 5/78, NSA(DC_5A_n78A)

RESULTS

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

7. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.917(a), §27.53(c)(g)(h)(m)

LIMITS

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P[\text{Watts}])$, where P is the transmitter power in Watts.

The minimum permissible attenuation level for Band 7 is as following.

Per 27.53(g) for operations in the 698-746 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

Per 27.53(c.5) for operations in the 776-788 MHz band, in the 100 kHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least 30 kHz may be employed to demonstrate compliance with the out-of-band emissions limit.

For all plots showing emissions in the 763 – 775MHz and 793 – 805MHz band, the FCC limit per 27.53(c.4) is $65 + 10\log_{10}(P) = -35\text{dBm}$ in a 6.25kHz bandwidth.

Per 27.53(m) for operations in the BRS/EBS bands, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line

- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

MODES TESTED

NR Band 5/78, NSA(DC_5A_n78A)

MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

Test data reference attachment.

Note: Both DFT-s-OFDM:PI/2 BPSK/QPSK/16-QAM/64QAM/256QAM

CP-OFDM: QPSK/16-QAM/64QAM/256QAM has been tested, the worst case is CP_QPSK mode, the report just reported the worst case.

8. RADIATED MEASUREMENT

8.1. RADIATED POWER (ERP & EIRP)

RULE PART(S)

FCC: §2.1046, §22.913(a)(2), §27.50 (h)(2), (b)(10), (c)(10), (d)(4)

LIMITS:

22.913(a) (2)- The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
27.50 (c) (10) the following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band, the portable stations (hand-held devices) are limited to 3 watts ERP.
27.50 (b)(10) Portable stations (hand-held devices) transmitting in the 746–757 MHz, 758–763 MHz, 776–793 MHz, and 805–806 MHz bands are limited to 3 watts ERP.
27.50 (d)(4) The following power and antenna height requirements apply to stations transmitting in the 1710–1755 MHz and 2110–2155 MHz bands: Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.
27.50 (h)(2) Mobile and other user stations in the 2500–2570 MHz and 2620–2690 MHz bands. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

TEST PROCEDURE

ANSI/TIA-603-E Clause 2.2.17

KDB 971168 v02r01 RF power output using broadband peak and average power meter method.

KDB 971168 D01 Power Meas License Digital Systems v02r01, "Measurement Guidance for Certification of Licensed Digital Transmitters"

MODES TESTED

NR Band 5/78, NSA(DC_5A_n78A)

RESULTS

Pass

8.2 NR Band5

Radiated Power (EIRP) for N5 /SCS (15kHz)											
Mode	RB/ RB Position	Frequen cy	Result								Conclus ion
			SG Level (dBm)	Cable Loss (dBm)	Antenn a Gain (dB)	Corr ecti on (dB)	Max. ERP (dBm)	Max. ERP (mW)	Limit	Polarizati on Of Max. ERP	
									(W)		
5.0MHz DFT_QPSK	1@1	826.5	23.45	5.12	5.3	2.15	21.36	136.77	7	Horizontal	Pass
		836.5	23.53	5.18	5.3	2.15	20.11	102.57	7	Horizontal	Pass
		846.5	23.38	5.23	5.7	2.15	21.26	133.66	7	Horizontal	Pass
10.0MHz DFT_QPSK	1@1	829	24.45	5.12	5.3	2.15	22.36	172.19	7	Horizontal	Pass
		836.5	24.38	5.18	5.3	2.15	23.15	206.54	7	Horizontal	Pass
		844	23.72	5.22	5.7	2.15	22.11	162.55	7	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	831.5	23.3	5.13	5.3	2.15	22.35	171.79	7	Horizontal	Pass
		836.5	24.55	5.18	5.3	2.15	22.52	178.65	7	Horizontal	Pass
		841.5	24.1	5.21	5.7	2.15	22.14	163.68	7	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	834	23.3	5.13	5.3	2.15	21.69	147.57	7	Horizontal	Pass
		836.5	24.71	5.18	5.3	2.15	23.16	207.01	7	Horizontal	Pass
		839	22.89	5.21	5.7	2.15	22.16	164.44	7	Horizontal	Pass

Radiated Power (EIRP) for N5 /SCS (15kHz)											
Mode	RB/ RB Position	Frequenc y	Result							Conclusi on	
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dB)	Corr ectio n (dB)	Max. ERP (dBm)	Max. ERP (mW)	Limit		Polarizatio n Of Max. ERP
									(W)		
5.0MHz DFT_16QAM	1@1	826.5	24.03	5.12	5.30	2.15	20.56	113.76	7	Vertical	Pass
		836.5	24.18	5.18	5.30	2.15	21.69	147.57	7	Vertical	Pass
		846.5	23.25	5.23	5.70	2.15	22.65	184.08	7	Vertical	Pass
10.0MHz DFT_16QAM	1@1	829	23.87	5.12	5.30	2.15	20.69	117.22	7	Vertical	Pass
		836.5	24.34	5.18	5.30	2.15	22.36	172.19	7	Vertical	Pass
		844	23.39	5.22	5.70	2.15	20.57	114.02	7	Vertical	Pass
15.0MHz DFT_16QAM	1@1	831.5	24.08	5.13	5.30	2.15	20.65	116.14	7	Vertical	Pass
		836.5	23.63	5.18	5.30	2.15	20.36	108.64	7	Vertical	Pass
		841.5	23.81	5.21	5.70	2.15	21.57	143.55	7	Vertical	Pass
20.0MHz DFT_16QAM	1@1	834	24.06	5.13	5.30	2.15	21.65	146.22	7	Vertical	Pass
		836.5	24.39	5.18	5.30	2.15	23.12	205.12	7	Vertical	Pass
		839	23.23	5.21	5.70	2.15	21.35	136.46	7	Vertical	Pass

Radiated Power (EIRP) for N5 /SCS (30kHz)											
Mode	RB/ RB Position	Freque ncy	Result								Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. ERP (dBm)	Max. ERP (mW)	Lim it	Polarizati on Of Max. ERP	
									(W)		
10.0MHz DFT_QPSK	1@1	829	24.45	5.12	5.3	2.15	22.16	164.44	7	Horizontal	Pass
		836.5	24.38	5.18	5.3	2.15	22.16	164.44	7	Horizontal	Pass
		844	23.72	5.22	5.7	2.15	22.13	163.31	7	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	831.5	23.3	5.13	5.3	2.15	21.54	142.56	7	Horizontal	Pass
		836.5	24.55	5.18	5.3	2.15	22.13	163.31	7	Horizontal	Pass
		841.5	24.1	5.21	5.7	2.15	22.45	175.79	7	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	834	23.3	5.13	5.3	2.15	21.32	135.52	7	Horizontal	Pass
		836.5	24.71	5.18	5.3	2.15	22.63	183.23	7	Horizontal	Pass
		839	22.89	5.21	5.7	2.15	21.09	128.53	7	Horizontal	Pass

Radiated Power (EIRP) for N5 /SCS (30kHz)											
Mode	RB/ RB Position	Freque ncy	Result								Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Anten na Gain (dB)	Corre ction (dB)	Max. ERP (dBm)	Max. ERP (mW)	Lim i t	Polarizati on Of Max. ERP	
									(W)		
10.0MHz DFT_QPSK	1@1	829	23.87	5.12	5.30	2.15	22.13	163.31	7	Horizontal	Pass
		836.5	24.34	5.18	5.30	2.15	21.65	146.22	7	Horizontal	Pass
		844	23.39	5.22	5.70	2.15	21.84	152.76	7	Horizontal	Pass
15.0MHz DFT_QPSK	1@1	831.5	24.08	5.13	5.30	2.15	21.69	147.57	7	Horizontal	Pass
		836.5	23.63	5.18	5.30	2.15	22.03	159.59	7	Horizontal	Pass
		841.5	23.81	5.21	5.70	2.15	22.06	160.69	7	Horizontal	Pass
20.0MHz DFT_QPSK	1@1	834	24.06	5.13	5.30	2.15	22.13	163.31	7	Horizontal	Pass
		836.5	24.39	5.18	5.30	2.15	22.63	183.23	7	Horizontal	Pass
		839	23.23	5.21	5.70	2.15	22.16	164.44	7	Horizontal	Pass

8.3 NR BAND 78

Radiated Power (EIRP) for N78 /SCS (30kHz)										
Mode	RB/ RB Positio n	Freque ncy	Result							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP (dBm)	Max. EIRP (mW)	Polarizatio n Of Max. ERP	Limit (W)	
10.0MHz DFT_QPS K	1@1	3455	17.10	5.12	11	22.98	198.61	Horizontal	1	Pass
		3500	16.91	5.18	11	22.73	187.50	Horizontal	1	Pass
		3545	16.78	5.23	11	22.55	179.89	Horizontal	1	Pass
15.0MHz DFT_QPS K	1@1	3457.5	17.90	5.12	11	23.78	238.78	Horizontal	1	Pass
		3500	16.65	5.18	11	22.47	176.60	Horizontal	1	Pass
		3542.5	17.40	5.22	11	23.18	207.97	Horizontal	1	Pass
20.0MHz DFT_QPS K	1@1	3460	17.38	5.13	11	23.25	211.35	Horizontal	1	Pass
		3500	16.90	5.18	11	22.72	187.07	Horizontal	1	Pass
		3540	16.01	5.21	11	21.8	151.36	Horizontal	1	Pass
40.0MHz DFT_QPS K	1@1	3470	16.04	5.13	11	21.91	155.24	Horizontal	1	Pass
		3500	15.90	5.18	11	21.72	148.59	Horizontal	1	Pass
		3530	16.47	5.21	11	22.26	168.27	Horizontal	1	Pass
50.0MHz DFT_QPS K	1@1	3475	16.95	5.14	11	22.81	190.99	Horizontal	1	Pass
		3500	17.72	5.18	11	23.54	225.94	Horizontal	1	Pass
		3525	15.53	5.2	11	21.33	135.83	Horizontal	1	Pass
60.0MHz DFT_QPS K	1@1	3480	15.41	5.14	11	21.27	133.97	Horizontal	1	Pass
		3500	17.32	5.18	11	23.14	206.06	Horizontal	1	Pass
		3520	16.43	5.19	11	22.24	167.49	Horizontal	1	Pass
70.0MHz DFT_QPS K	1@1	3485	15.73	5.14	11	21.59	144.21	Horizontal	1	Pass
		3500	17.55	5.18	11	23.37	217.27	Horizontal	1	Pass
		3515	17.38	5.19	11	23.19	208.45	Horizontal	1	Pass
80.0MHz DFT_QPS K	1@1	3490	15.93	5.14	11	21.79	151.01	Horizontal	1	Pass
		3500	17.17	5.18	11	22.99	199.07	Horizontal	1	Pass
		3510	17.05	5.19	11	22.86	193.20	Horizontal	1	Pass
90.0MHz DFT_QPS K	1@1	3495	15.48	5.14	11	21.34	136.14	Horizontal	1	Pass
		3500	16.36	5.18	11	22.18	165.20	Horizontal	1	Pass
		3505	16.63	5.19	11	22.44	175.39	Horizontal	1	Pass
100.0MHz DFT_QPS K	1@1	3500	18.08	5.14	11	23.94	247.74	Horizontal	1	Pass

Radiated Power (EIRP) for N78/SCS (30kHz)										
Mode	RB/ RB Positio n	Frequenc y	Result							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP (dBm)	Max. EIRP (mW)	Polarizatio n Of Max. ERP	Limit (W)	
10.0MHz DFT_16QA M	1@1	3455	13.93	5.12	11	19.81	95.72	Vertical	1	Pass
		3500	15.70	5.18	11	21.52	141.91	Vertical	1	Pass
		3545	14.48	5.23	11	20.25	105.93	Vertical	1	Pass
15.0MHz DFT_16QA M	1@1	3457.5	14.82	5.12	11	20.7	117.49	Vertical	1	Pass
		3500	13.78	5.18	11	19.6	91.20	Vertical	1	Pass
		3542.5	14.63	5.22	11	20.41	109.90	Vertical	1	Pass
20.0MHz DFT_16QA M	1@1	3460	15.20	5.13	11	21.07	127.94	Vertical	1	Pass
		3500	15.29	5.18	11	21.11	129.12	Vertical	1	Pass
		3540	15.77	5.21	11	21.56	143.22	Vertical	1	Pass
40.0MHz DFT_16QA M	1@1	3470	14.41	5.13	11	20.28	106.66	Vertical	1	Pass
		3500	14.66	5.18	11	20.48	111.69	Vertical	1	Pass
		3530	13.84	5.21	11	19.63	91.83	Vertical	1	Pass
50.0MHz DFT_16QA M	1@1	3475	14.49	5.14	11	20.35	108.39	Vertical	1	Pass
		3500	15.10	5.18	11	20.92	123.59	Vertical	1	Pass
		3525	15.02	5.2	11	20.82	120.78	Vertical	1	Pass
60.0MHz DFT_16QA M	1@1	3480	16.15	5.14	11	22.01	158.85	Vertical	1	Pass
		3500	15.54	5.18	11	21.36	136.77	Vertical	1	Pass
		3520	15.34	5.19	11	21.15	130.32	Vertical	1	Pass
70.0MHz DFT_16QA M	1@1	3485	14.48	5.14	11	20.34	108.14	Vertical	1	Pass
		3500	14.21	5.18	11	20.03	100.69	Vertical	1	Pass
		3515	15.80	5.19	11	21.61	144.88	Vertical	1	Pass
80.0MHz DFT_16QA M	1@1	3490	14.30	5.14	11	20.16	103.75	Vertical	1	Pass
		3500	15.69	5.18	11	21.51	141.58	Vertical	1	Pass
		3510	13.74	5.19	11	19.55	90.16	Vertical	1	Pass
90.0MHz DFT_16QA M	1@1	3495	16.01	5.14	11	21.87	153.82	Horizontal	1	Pass
		3500	16.62	5.18	11	22.44	175.39	Horizontal	1	Pass
		3505	16.31	5.19	11	22.12	162.93	Horizontal	1	Pass
100.0MHz DFT_16QA M	1@1	3500	15.14	5.14	11	21	125.89	Horizontal	1	Pass

Radiated Power (EIRP) for N78 /SCS (15kHz)										
Mode	RB/ RB Positio n	Freque nc y	Result							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP (dBm)	Max. EIRP (mW)	Polarizatio n Of Max. ERP	Limit (W)	
10.0MHz DFT_QPS K	1@1	3455	15.12	5.12	11	21	125.89	Horizontal	1	Pass
		3500	15.65	5.18	11	21.47	140.28	Horizontal	1	Pass
		3545	16.26	5.23	11	22.03	159.59	Horizontal	1	Pass
15.0MHz DFT_QPS K	1@1	3457.5	16.35	5.12	11	22.23	167.11	Horizontal	1	Pass
		3500	15.57	5.18	11	21.39	137.72	Horizontal	1	Pass
		3542.5	15.32	5.22	11	21.1	128.82	Horizontal	1	Pass
20.0MHz DFT_QPS K	1@1	3460	14.79	5.13	11	20.66	116.41	Horizontal	1	Pass
		3500	14.94	5.18	11	20.76	119.12	Horizontal	1	Pass
		3540	15.01	5.21	11	20.8	120.23	Horizontal	1	Pass
40.0MHz DFT_QPS K	1@1	3470	14.35	5.13	11	20.22	105.20	Horizontal	1	Pass
		3500	14.53	5.18	11	20.35	108.39	Horizontal	1	Pass
		3530	16.09	5.21	11	21.88	154.17	Horizontal	1	Pass
50.0MHz DFT_QPS K	1@1	3475	13.91	5.14	11	19.77	94.84	Horizontal	1	Pass
		3500	15.28	5.18	11	21.1	128.82	Horizontal	1	Pass
		3525	14.62	5.2	11	20.42	110.15	Horizontal	1	Pass
60.0MHz DFT_QPS K	1@1	3480	15.26	5.14	11	21.12	129.42	Horizontal	1	Pass
		3500	14.97	5.18	11	20.79	119.95	Horizontal	1	Pass
		3520	14.67	5.19	11	20.48	111.69	Horizontal	1	Pass
70.0MHz DFT_QPS K	1@1	3485	14.41	5.14	11	20.27	106.41	Horizontal	1	Pass
		3500	14.14	5.18	11	19.96	99.08	Horizontal	1	Pass
		3515	14.92	5.19	11	20.73	118.30	Horizontal	1	Pass
80.0MHz DFT_QPS K	1@1	3490	16.67	5.14	11	22.53	179.06	Horizontal	1	Pass
		3500	14.00	5.18	11	19.82	95.94	Horizontal	1	Pass
		3510	15.06	5.19	11	20.87	122.18	Horizontal	1	Pass
90.0MHz DFT_QPS K	1@1	3495	14.95	5.14	11	20.81	120.50	Horizontal	1	Pass
		3500	15.40	5.18	11	21.22	132.43	Horizontal	1	Pass
		3505	15.42	5.19	11	21.23	132.74	Horizontal	1	Pass
100.0MHz DFT_QPS K	1@1	3500	16.65	5.14	11	22.51	178.24	Horizontal	1	Pass

Radiated Power (EIRP) for N78/SCS (15kHz)										
Mode	RB/ RB Positio n	Frequenc y	Result							Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Antenna Gain (dBi)	Max. EIRP (dBm)	Max. EIRP (mW)	Polarizatio n Of Max. ERP	Limit (W)	
10.0MHz DFT_16QA M	1@1	3455	13.93	5.12	11	19.81	95.72	Vertical	1	Pass
		3500	15.70	5.18	11	21.52	141.91	Vertical	1	Pass
		3545	14.48	5.23	11	20.25	105.93	Vertical	1	Pass
15.0MHz DFT_16QA M	1@1	3457.5	14.82	5.12	11	20.7	117.49	Vertical	1	Pass
		3500	13.78	5.18	11	19.6	91.20	Vertical	1	Pass
		3542.5	14.63	5.22	11	20.41	109.90	Vertical	1	Pass
20.0MHz DFT_16QA M	1@1	3460	15.20	5.13	11	21.07	127.94	Vertical	1	Pass
		3500	15.29	5.18	11	21.11	129.12	Vertical	1	Pass
		3540	15.77	5.21	11	21.56	143.22	Vertical	1	Pass
40.0MHz DFT_16QA M	1@1	3470	14.41	5.13	11	20.28	106.66	Vertical	1	Pass
		3500	14.66	5.18	11	20.48	111.69	Vertical	1	Pass
		3530	13.84	5.21	11	19.63	91.83	Vertical	1	Pass
50.0MHz DFT_16QA M	1@1	3475	14.49	5.14	11	20.35	108.39	Vertical	1	Pass
		3500	15.10	5.18	11	20.92	123.59	Vertical	1	Pass
		3525	15.02	5.2	11	20.82	120.78	Vertical	1	Pass
60.0MHz DFT_16QA M	1@1	3480	16.15	5.14	11	22.01	158.85	Vertical	1	Pass
		3500	15.54	5.18	11	21.36	136.77	Vertical	1	Pass
		3520	15.34	5.19	11	21.15	130.32	Vertical	1	Pass
70.0MHz DFT_16QA M	1@1	3485	14.48	5.14	11	20.34	108.14	Vertical	1	Pass
		3500	14.21	5.18	11	20.03	100.69	Vertical	1	Pass
		3515	15.80	5.19	11	21.61	144.88	Vertical	1	Pass
80.0MHz DFT_16QA M	1@1	3490	14.30	5.14	11	20.16	103.75	Vertical	1	Pass
		3500	15.69	5.18	11	21.51	141.58	Vertical	1	Pass
		3510	13.74	5.19	11	19.55	90.16	Vertical	1	Pass
90.0MHz DFT_16QA M	1@1	3495	16.01	5.14	11	21.87	153.82	Horizontal	1	Pass
		3500	16.62	5.18	11	22.44	175.39	Horizontal	1	Pass
		3505	16.31	5.19	11	22.12	162.93	Horizontal	1	Pass
100.0MHz DFT_16QA M	1@1	3500	15.14	5.14	11	21	125.89	Horizontal	1	Pass

8.4 NSA(DC_5A_n78A)

	Radiated Power (EIRP) for EN-DC: DC_5A_n78A										
Mode	RB/ RB Positio n	Frequenc y	Result							Conclusi on	
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Average (dBm)	Max. EIRP Average (mW)	Polarizatio n Of Max. ERP	Limit		
									(W)		
5+20.0MHz DFT_QPS K	1@LOW	1852.5	16.13	3.77	8.9	21.26	133.660	Horizontal	-	Pass	
	1@1	3460	-6.72	5.12	29.16	17.32	53.951	Horizontal	-	Pass	
						22.73	187.611	Horizontal	1	Pass	
40.0MHz DFT_QPS K	1@LOW	1880	-6.08	5.13	28.98	21.81	151.705	Horizontal	-	Pass	
	1@1	3500	-5.82	5.18	28.92	16.31	42.756	Horizontal	-	Pass	
						22.89	194.461	Horizontal	1	Pass	
50.0MHz DFT_QPS K	1@LOW	1907.5	-5.66	5.14	28.98	21.25	133.352	Horizontal	-	Pass	
	1@1	3540	-5.44	5.18	28.93	17.8	60.256	Horizontal	-	Pass	
						22.87	193.608	Horizontal	1	Pass	
60.0MHz DFT_QPS K	1@LOW	1860	-6.15	5.14	28.99	21.8	151.356	Horizontal	-	Pass	
	1@1	3500	-5.8	5.18	28.92	16.35	43.152	Horizontal	-	Pass	
						22.89	194.508	Horizontal	1	Pass	
80.0MHz DFT_QPS K	1@LOW	1880	-5.77	5.14	28.95	21.69	147.571	Horizontal	-	Pass	
	1@1	3500	-5.61	5.18	28.93	16.24	42.073	Horizontal	-	Pass	
						22.78	189.643	Horizontal	1	Pass	
90.0MHz DFT_QPS K	1@LOW	1900	-5.74	5.14	28.96	21.68	147.231	Horizontal	-	Pass	
	1@1	3500	-6.03	5.18	28.93	17	50.119	Horizontal	-	Pass	
						22.95	197.350	Horizontal	1	Pass	

Radiated Power (EIRP) for EN-DC: DC_5A_n78A										
Mode	RB/ RB Positio n	Frequenc y	Result						Limit (W)	Conclusi on
			SG Level (dBm)	Cable Loss (dBm)	Factor Gain (dB)	Max. EIRP Averag e (dBm)	Max. EIRP Average (mW)	Polarizatio n Of Max. ERP		
5+20.0MHz DFT_QPS K	1@LOW	1852.5	16.59	3.77	8.9	21.36	136.773	Horizontal	-	Pass
	1@1	3460	18.44	3.91	8.9	18.65	73.282	Horizontal	-	Pass
						23.22	210.055		1	Pass
40.0MHz DFT_QPS K	1@LOW	1880	-6.08	5.13	28.98	21.86	153.462	Horizontal	-	Pass
	1@1	3500	-5.82	5.18	28.92	17.03	50.466	Horizontal	-	Pass
						23.09	203.928		1	Pass
50.0MHz DFT_QPS K	1@LOW	1907.5	-5.66	5.14	28.98	21.34	136.144	Horizontal	-	Pass
	1@1	3540	-5.44	5.18	28.93	18.16	65.464	Horizontal	-	Pass
						23.05	201.608		1	Pass
60.0MHz DFT_QPS K	1@LOW	1860	-6.15	5.14	28.99	21.86	153.462	Horizontal	-	Pass
	1@1	3500	-5.8	5.18	28.92	16.16	41.305	Horizontal	-	Pass
						22.90	194.766		1	Pass
80.0MHz DFT_QPS K	1@LOW	1880	-5.77	5.14	28.95	20.67	116.681	Horizontal	-	Pass
	1@1	3500	-5.61	5.18	28.93	18.34	68.234	Horizontal	-	Pass
						22.67	184.915		1	Pass
90.0MHz DFT_QPS K	1@LOW	1900	-5.74	5.14	28.96	22.35	171.791	Horizontal	-	Pass
	1@1	3500	-6.03	5.18	28.93	17.32	53.951	Horizontal	-	Pass
						23.54	225.742	Horizontal	1	Pass

Note:

SG Level= Signal generator output

Max. EIRP Average (dBm)= Factor Gain (dB)+ SG Level (dBm)- Cable Loss(dBm)

Factor Gain(dB)=Antenna Gain(dB) + Amplifier Factor (dB)

9. SPURIOUS RADIATION EMISSION

RULE PART(S)

FCC: §2.1051, §22.917(a), §27.53(c)(g)(h)(m)

LIMIT

For Band 7, the minimum permissible attenuation level of any spurious emission is $55 + \log_{10}(P)$ [Watts]).

The minimum permissible attenuation level of any spurious emission is $43 + \log_{10}(P)$ [Watts]), where P is the transmitter power in Watts.

TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The unwanted emission power shall be measured with a resolution bandwidth of at least 1% of the occupied bandwidth in the 1 MHz band immediately outside and adjacent to the channel edge of the equipment. Beyond the 1 MHz band immediately outside the channel edge of the equipment, a resolution bandwidth of 1 MHz shall be employed. A narrower resolution bandwidth is allowed to be used provided that the measured power is integrated over the full required measurement bandwidth of 1 MHz or 1% of the occupied bandwidth as applicable.

The power of any unwanted emissions measured from the channel edge of the equipment shall be attenuated below the transmitter power, P (dBW), as follows:

- a. for base station and subscriber equipment, other than mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB; and
- b. for mobile subscriber equipment, the attenuation shall not be less than $43 + 10 \log_{10}(p)$, dB at the channel edges and $55 + 10 \log_{10}(p)$ at 5.5 MHz away and beyond the channel edges where p in (a) and (b) is the transmitter power measured in watts.

MODES TESTED

NR Band 5/78/ NSA(DC_5A_n78A)

RESULTS

PASS

9.1 NR BAND 5

QPSK NR n5 SCS15 (kHz) (5MHZ BANDWIDTH)

Test Results for Low Channel 826.5MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1653	-47.45	2.78	27.50	-22.73	-13	-9.73	Horizontal
1653	-52.78	2.78	27.50	-28.06	-13	-15.06	Vertical
2479.5	-57.38	2.90	27.80	-32.48	-13	-19.48	Vertical
2479.5	-53.39	2.90	27.80	-28.49	-13	-15.49	Horizontal
Test Results for Mid Channel 836.5MHz							
1673	-54.39	2.78	27.48	-29.69	-13	-16.69	Horizontal
1673	-49.84	2.78	27.48	-25.14	-13	-12.14	Vertical
2509.5	-57.49	2.91	27.70	-32.70	-13	-19.70	Vertical
2509.5	-54.21	2.91	27.70	-29.42	-13	-16.42	Horizontal
Test Results for High Channel 846.5MHz							
1696.6	-52.38	2.78	27.43	-27.73	-13	-14.73	Horizontal
1696.6	-52.08	2.78	27.43	-27.43	-13	-14.43	Vertical
2539.5	-55.84	2.92	27.74	-31.02	-13	-18.02	Vertical
2539.5	-56.79	2.92	27.74	-31.97	-13	-18.97	Horizontal

QPSK NR n 5 SCS15 (kHz) (20MHZ BANDWIDTH)

Test Results for Low Channel 834MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1668	-49.29	2.78	27.50	-24.57	-13	-11.57	Horizontal
1668	-48.28	2.78	27.50	-23.56	-13	-10.56	Vertical
2502	-49.51	2.90	27.80	-24.61	-13	-11.61	Vertical
2502	-49.12	2.90	27.80	-24.22	-13	-11.22	Horizontal
Test Results for Mid Channel 836.5MHz							
1673	-49.61	2.78	27.48	-24.91	-13	-11.91	Horizontal
1673	-51.15	2.78	27.48	-26.45	-13	-13.45	Vertical
2509.5	-54.67	2.91	27.70	-29.88	-13	-16.88	Vertical
2509.5	-54.01	2.91	27.70	-29.22	-13	-16.22	Horizontal
Test Results for High Channel 839MHz							
1678	-52.58	2.78	27.43	-27.93	-13	-14.93	Horizontal
1678	-52.94	2.78	27.43	-28.29	-13	-15.29	Vertical
2517	-53.84	2.92	27.74	-29.02	-13	-16.02	Vertical
2517	-53.06	2.92	27.74	-28.24	-13	-15.24	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + AR_{pl}(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

QPSK NR n5 SCS30 (kHz) (10MHZ BANDWIDTH)

Test Results for Low Channel 829MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658	-48.89	2.78	27.50	-24.17	-13	-11.17	Horizontal
1658	-53.19	2.78	27.50	-28.47	-13	-15.47	Vertical
2487	-53.72	2.90	27.80	-28.82	-13	-15.82	Vertical
2487	-53.63	2.90	27.80	-28.73	-13	-15.73	Horizontal
Test Results for Mid Channel 836.5MHz							
1673	-50.05	2.78	27.48	-25.35	-13	-12.35	Horizontal
1673	-47.28	2.78	27.48	-22.58	-13	-9.58	Vertical
2509.5	-50.27	2.91	27.70	-25.48	-13	-12.48	Vertical
2509.5	-56.14	2.91	27.70	-31.35	-13	-18.35	Horizontal
Test Results for High Channel 844MHz							
1688	-48.49	2.78	27.43	-23.84	-13	-10.84	Horizontal
1688	-53.88	2.78	27.43	-29.23	-13	-16.23	Vertical
2532	-49.64	2.92	27.74	-24.82	-13	-11.82	Vertical
2532	-56.44	2.92	27.74	-31.62	-13	-18.62	Horizontal

QPSK NR n 5 SCS30 (kHz) (20MHZ BANDWIDTH)

Test Results for Low Channel 834MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
1658	-48.39	2.78	27.50	-23.67	-13	-10.67	Horizontal
1658	-54.25	2.78	27.50	-29.53	-13	-16.53	Vertical
2487	-56.86	2.90	27.80	-31.96	-13	-18.96	Vertical
2487	-53.69	2.90	27.80	-28.79	-13	-15.79	Horizontal
Test Results for Mid Channel 836.5MHz							
1673	-47.10	2.78	27.48	-22.40	-13	-9.40	Horizontal
1673	-48.78	2.78	27.48	-24.08	-13	-11.08	Vertical
2509.5	-50.33	2.91	27.70	-25.54	-13	-12.54	Vertical
2509.5	-50.08	2.91	27.70	-25.29	-13	-12.29	Horizontal
Test Results for High Channel 839MHz							
1678	-48.04	2.78	27.43	-23.39	-13	-10.39	Horizontal
1678	-48.64	2.78	27.43	-23.99	-13	-10.99	Vertical
2517	-54.36	2.92	27.74	-29.54	-13	-16.54	Vertical
2517	-49.23	2.92	27.74	-24.41	-13	-11.41	Horizontal

Note: P_{Mea}(dBm)= Power(dBm)+ AR_{pl} (dBm)

. Over Limit= : P_{Mea}(dBm)-Limit(dBm)

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

9.2 NR BAND 78

QPSK NR N78 10MHZ SCS 30kHz

Test Results for Low Channel 3455MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
6910	-48.98	2.63	28.33	-23.28	-13	-10.28	Horizontal
6910	-54.80	2.63	28.33	-29.10	-13	-16.10	Vertical
10365	-50.83	3.38	28.26	-25.95	-13	-12.95	Vertical
10365	-57.14	3.38	28.26	-32.26	-13	-19.26	Horizontal
Test Results for Mid Channel 3500MHz							
7000	-48.17	2.63	28.33	-22.47	-13	-9.47	Horizontal
7000	-51.05	2.63	28.33	-25.35	-13	-12.35	Vertical
10500	-51.72	3.38	28.26	-26.84	-13	-13.84	Vertical
10500	-56.88	3.38	28.26	-32.00	-13	-19.00	Horizontal
Test Results for High Channel 3545MHz							
7090	-52.43	2.63	28.33	-26.73	-13	-13.73	Horizontal
7090	-54.91	2.63	28.33	-29.21	-13	-16.21	Vertical
10635	-53.12	3.38	28.26	-28.24	-13	-15.24	Vertical
10635	-54.25	3.38	28.26	-29.37	-13	-16.37	Horizontal

QPSK NR N78 100MHZ SCS 30kHz

Test Results for Mid Channel 3500MHz							
Frequency(MHz)	SG Level(dBm)	Cable Loss(dB)	Antenna Gain(dB)	Absolute Level(dBm)	Limit (dBm)	Margin(dBm)	Polarity
7000	-49.91	2.63	28.33	-24.21	-13	-11.21	Horizontal
7000	-50.19	2.63	28.33	-24.49	-13	-11.49	Vertical
10500	-53.19	3.38	28.26	-28.31	-13	-15.31	Vertical
10500	-50.13	3.38	28.26	-25.25	-13	-12.25	Horizontal

Note: $P_{Mea}(dBm) = Power(dBm) + ARpl(dBm)$

. Over Limit = : $P_{Mea}(dBm) - Limit(dBm)$

. We test both H direction and V direction, recorded worst case direction.

Both QPSK and 16QAM has been tested, the worst case is QPSK mode, the report just reported the worst case.

10. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §27.54

LIMITS

§22.355 - The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

Temp. = -30° to $+50^{\circ}\text{C}$

Voltage = low voltage, DC 3.29V, Normal, DC 3.87V and High voltage, DC 4.45V.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to -30°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

NR Band 5/78/ NSA(DC_5A_n78A)

RESULTS

See the following pages.

10.1 NR BAND 5

N5 QPSK, (20MHz CH 167300 RB Allocation 50@0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	836.5	9	0.010759	2.5
3.87	836.5	12	0.014345	2.5
4.45	836.5	15	0.017932	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	12	0.014345	2.5
Extreme (50C)	836.5	13	0.015541	2.5
Extreme (40C)	836.5	14	0.016736	2.5
Extreme (30C)	836.5	16	0.019127	2.5
Extreme (10C)	836.5	10	0.011955	2.5
Extreme (0C)	836.5	13	0.015541	2.5
Extreme (-10C)	836.5	15	0.017932	2.5
Extreme (-20C)	836.5	22	0.026300	2.5
Extreme (-30C)	836.5	23	0.027496	2.5

N5 16QPSK, (20MHz CH 167300 RB Allocation 50@0)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	836.5	15	0.017932	2.5
3.87	836.5	13	0.015541	2.5
4.45	836.5	11	0.013150	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	10	0.011955	2.5
Extreme (50C)	836.5	13	0.015541	2.5
Extreme (40C)	836.5	14	0.016736	2.5
Extreme (30C)	836.5	16	0.019127	2.5
Extreme (10C)	836.5	13	0.015541	2.5
Extreme (0C)	836.5	15	0.017932	2.5
Extreme (-10C)	836.5	13	0.015541	2.5
Extreme (-20C)	836.5	9	0.010759	2.5
Extreme (-30C)	836.5	13	0.015541	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.2 NR BAND 78

N78 QPSK, (100MHz CH 633334 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	3500	13	0.003714	2.5
3.87	3500	12	0.003429	2.5
4.45	3500	23	0.006571	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3500	12	0.003429	2.5
Extreme (50C)	3500	13	0.003714	2.5
Extreme (40C)	3500	15	0.004286	2.5
Extreme (30C)	3500	11	0.003143	2.5
Extreme (10C)	3500	13	0.003714	2.5
Extreme (0C)	3500	14	0.004000	2.5
Extreme (-10C)	3500	13	0.003714	2.5
Extreme (-20C)	3500	16	0.004571	2.5
Extreme (-30C)	3500	17	0.004857	2.5

N78 16QAM, (100MHz CH 633334 RB Allocation 135@67)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	3500	9	0.002571	2.5
3.87	3500	11	0.003143	2.5
4.45	3500	13	0.003714	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	3500	13	0.003714	2.5
Extreme (50C)	3500	16	0.004571	2.5
Extreme (40C)	3500	3	0.000857	2.5
Extreme (30C)	3500	9	0.002571	2.5
Extreme (10C)	3500	13	0.003714	2.5
Extreme (0C)	3500	15	0.004286	2.5
Extreme (-10C)	3500	8	0.002286	2.5
Extreme (-20C)	3500	10	0.002857	2.5
Extreme (-30C)	3500	16	0.004571	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

10.3 NSA(DC_5A_n78A)
n 78 QPSK, (20MHz CH 167300 RB Allocation 1@104)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	836.5	10	0.002857	2.5
3.87	836.5	11	0.003143	2.5
4.45	836.5	13	0.003714	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	6	0.001714	2.5
Extreme (50C)	836.5	9	0.002571	2.5
Extreme (40C)	836.5	13	0.003714	2.5
Extreme (30C)	836.5	16	0.004571	2.5
Extreme (10C)	836.5	19	0.005429	2.5
Extreme (0C)	836.5	11	0.003143	2.5
Extreme (-10C)	836.5	19	0.005429	2.5
Extreme (-20C)	836.5	10	0.002857	2.5
Extreme (-30C)	836.5	13	0.003714	2.5

n 78 16QAM, (20MHz CH 167300 RB Allocation 1@104)

Frequency error vs. Voltage

Voltage [Vdc]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
3.29	836.5	6	0.001714	2.5
3.87	836.5	13	0.003714	2.5
4.45	836.5	16	0.004571	2.5

Frequency error vs. Temperature

Temperature [°C]	Frequency [MHz]	Frequency* Error[Hz]	Frequency Error[ppm]	Limit [ppm]
Normal (25C)	836.5	13	0.003714	2.5
Extreme (50C)	836.5	11	0.003143	2.5
Extreme (40C)	836.5	3	0.000857	2.5
Extreme (30C)	836.5	14	0.004000	2.5
Extreme (10C)	836.5	15	0.004286	2.5
Extreme (0C)	836.5	11	0.003143	2.5
Extreme (-10C)	836.5	9	0.002571	2.5
Extreme (-20C)	836.5	16	0.004571	2.5
Extreme (-30C)	836.5	19	0.005429	2.5

***Note:** Frequency error measurements were made by using the build-in capability of the Wireless Communication Test Set.

11. Peak-to-Average Ratio

11.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


11.2 Measuring Instruments

See list of measuring instruments of this test report.

11.3 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. For GSM/EGPRS operating modes:
 - a. Set the RBW = 1MHz, VBW = 1MHz, Peak detector in spectrum analyzer.
 - b. Set EUT in maximum power output, and triggered the burst signal.
 - c. Measured respectively the Peak level and Mean level, and the deviation was recorded as Peak to Average Ratio.
4. For UMTS operating modes:
 - a. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
 - b. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.

11.4 Test Setup

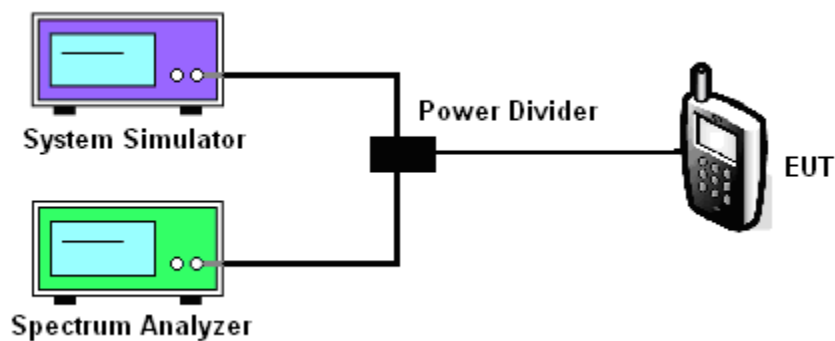

11.5 MODES TESTED

NR Band 5/78, NSA(DC_5A_n78A)

Test data reference attachment.

----END OF REPORT----