


Label Location On EUT

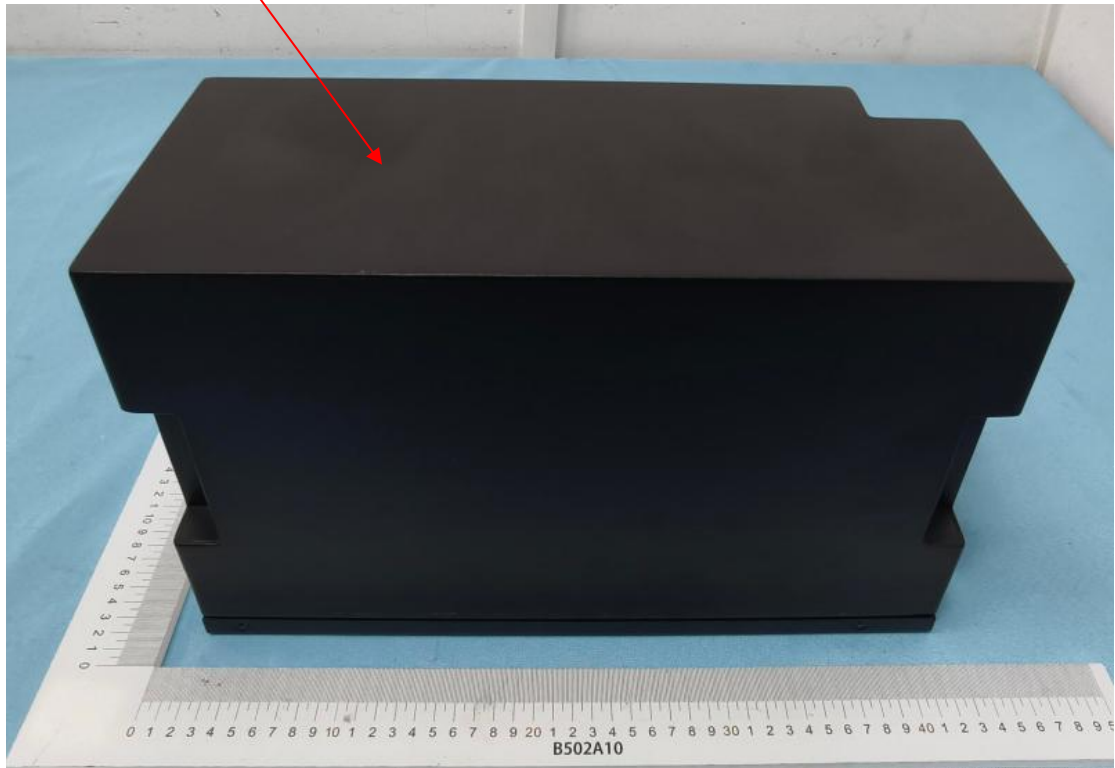

Label

2

3

4

5

6

7

8

A

B

C

D

PANTONE 7711C

PANTONE 311C

PANTONE 423C
PANTONE 106C



SOLID STATE
LITHIUM IRON PHOSPHATE

RBT12120LFP-SBH	
Nominal Voltage:	12.8V
Rated Capacity:	120Ah
Rated Energy:	1536Wh
Maximum Charge Current:	120A
Maximum Discharge Current:	120A
Surge Discharge Current:	350A@30S
Charging Temperature:	-20°C - 55°C
Discharging Temperature:	-20°C - 60°C

FEATURES

Semi-solid state cells and under-seat installations

Top grade cells of 6000+ cycles

10 years life span



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

 1.909.287.7111

 5050 S. Archibald Ave. Ontario, CA 91762, USA

 renogy.com

⚠ WARNING

- DO NOT disassemble after crush, puncture, or incinerate the battery
- DO NOT place the battery near fire or heat
- DO NOT allow the connector to contact metal objects.

FCC ID: 2ANPB-RBT12240LFP
IC: 25590-RBT12240LFP

SN: 50X8mm

JOIN OUR FACEBOOK COMMUNITY TODAY

Scan the QR code to connect with like-minded people and Renogy engineers:



- Priority access to our latest launches & special events
- Insider Q&A sessions with our engineers
- Endless solar project ideas & sources

120mm

215mm