

Conducted test results

No.1-4299/22-02-02_Annex_MR

October 20, 2023

Test Standard(s) FCC 15.247

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.



cn=Michael Dorongovski,
o=cetecom advanced GmbH,
ou=DOR-230601,
email=michael.dorongovski@cetec
omadvanced.com, c=DE
2023.10.20 11:53:49 +02'00'

Authorized

Michael Dorongovski

Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Maximum peak conducted output power ~ Generic 0G9 hopp	3
FCC 15.247 # Bandwidths ~ Generic 0G9 hopp	8
FCC 15.247 # TX spurious conducted 20dBc ~ Generic 0G9 hopp	18

FCC 15.247 # Maximum peak conducted output power ~ Generic 0G9 hopp

Test References

TC Start	21.06.2023 11:53:08
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	4.0.3.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted FHSS
Add. Information	

Test Parameter

Technology to test	Generic 0G9 hopp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 902.3
Frequency mid to test	True Freq [MHz] 908.5
Frequency high to test	True Freq [MHz] 914.9
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 902.3 MHz

RESULT: Reference Power cond.

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.35	dBm	INFO
Ref. Frequency	---	---	902.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.35 8.45 30
Start [MHz] Stop [MHz]	901.975 902.625
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 50 1001 SWE

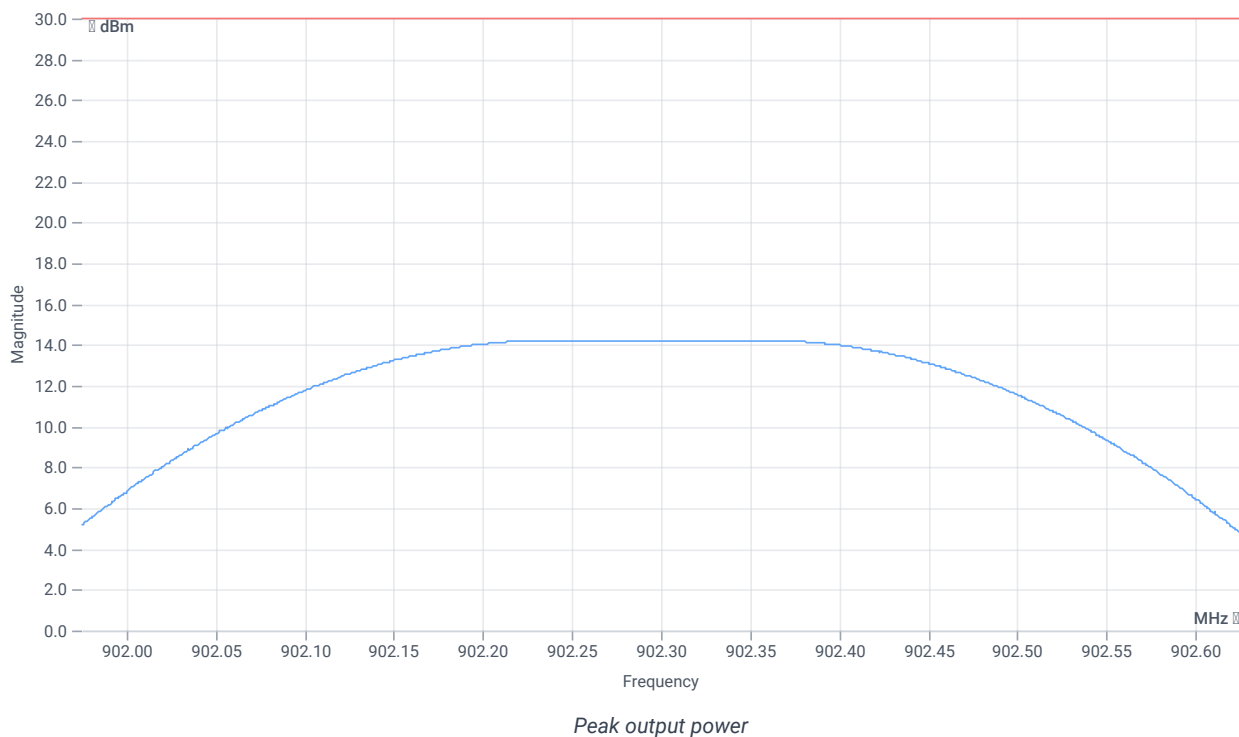

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30	14.22	dBm	PASS
Frequency at Peak	---	---	902.245	MHz	INFO


Test at TX 908.5 MHz

RESULT: Reference Power cond.

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.27	dBm	INFO
Ref. Frequency	---	---	908.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.27 8.46 30
Start [MHz] Stop [MHz]	908.175 908.825
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 50 1001 SWE

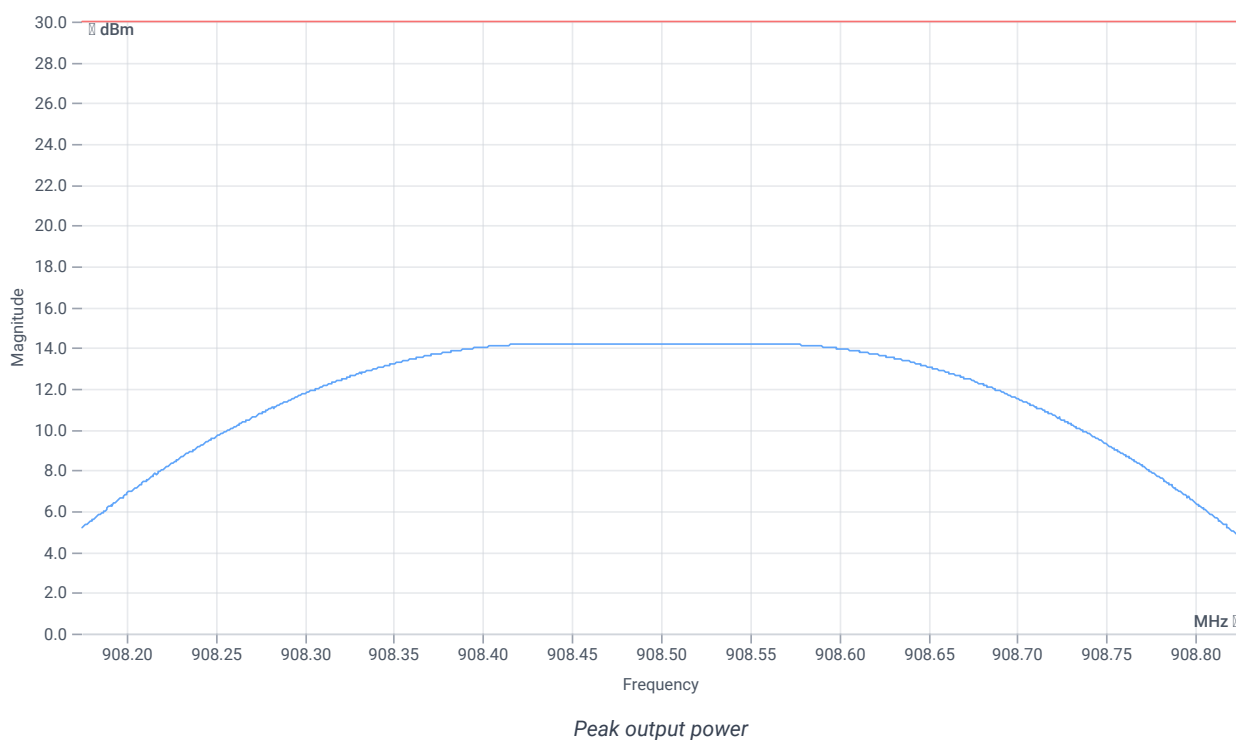

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30	14.21	dBm	PASS
Frequency at Peak	---	---	908.469	MHz	INFO


Test at TX 914.9 MHz

RESULT: Reference Power cond.

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.32	dBm	INFO
Ref. Frequency	---	---	914.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.32 8.47 30
Start [MHz] Stop [MHz]	914.575 915.225
RBW [MHz] VBW [MHz]	0.300000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 50 1001 SWE

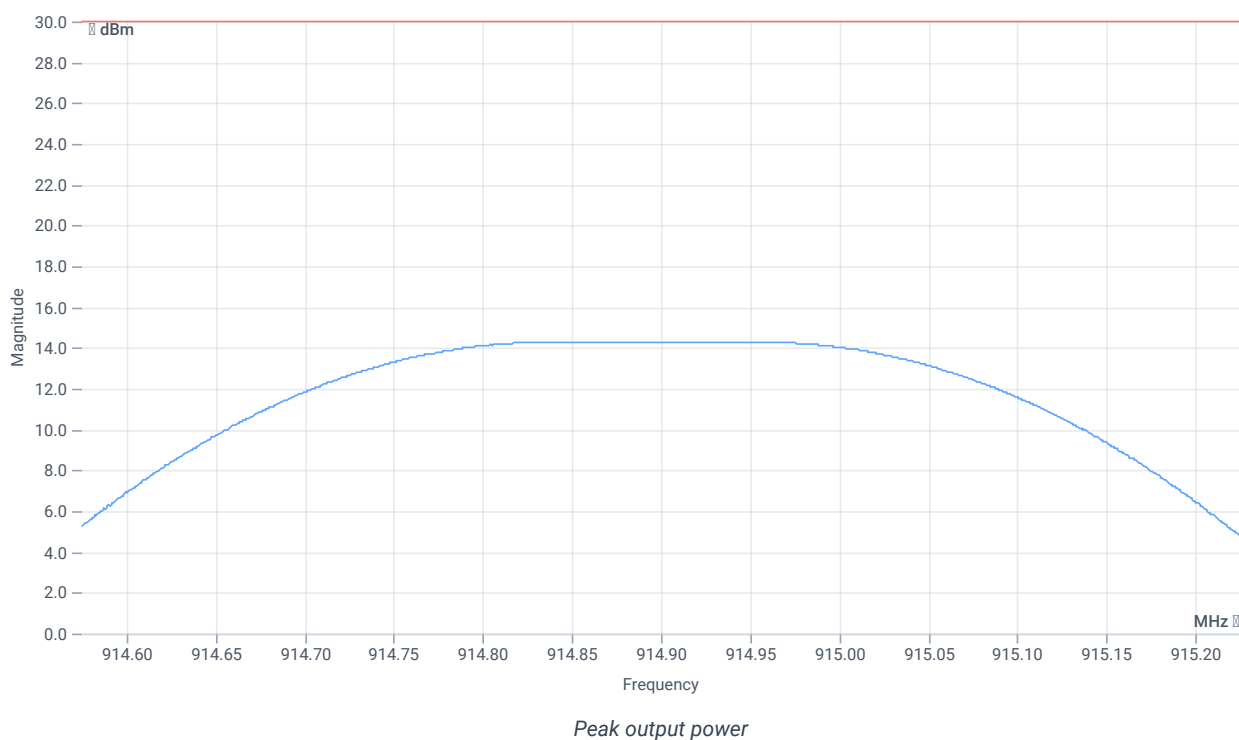

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak Power	---	30	14.28	dBm	PASS
Frequency at Peak	---	---	914.945	MHz	INFO

Verdict

PASS

FCC 15.247 # Bandwidths ~ Generic 0G9 hopp

Test References

TC Start	21.06.2023 13:20:56
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	4.0.3.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 Bandwidths FHSS
Add. Information	

Test Parameter

Technology to test	Generic 0G9 hopp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 902.3
Frequency mid to test	True Freq [MHz] 908.5
Frequency high to test	True Freq [MHz] 914.9
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI


Test at TX 902.3 MHz

RESULT: Reference Power cond.


TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.37	dBm	INFO
Ref. Frequency	---	---	902.300	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.37 8.45 30
Start [MHz] Stop [MHz]	901.975 902.625
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

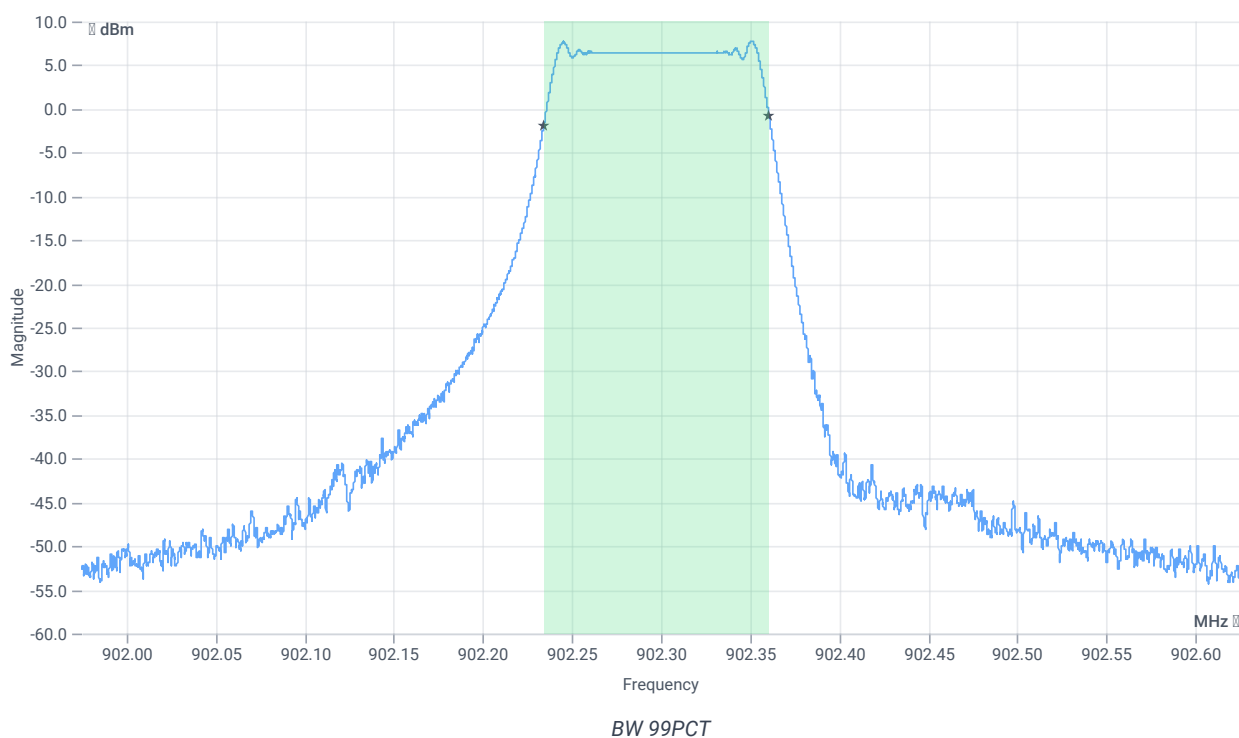


Plot: Bandwidth within Band

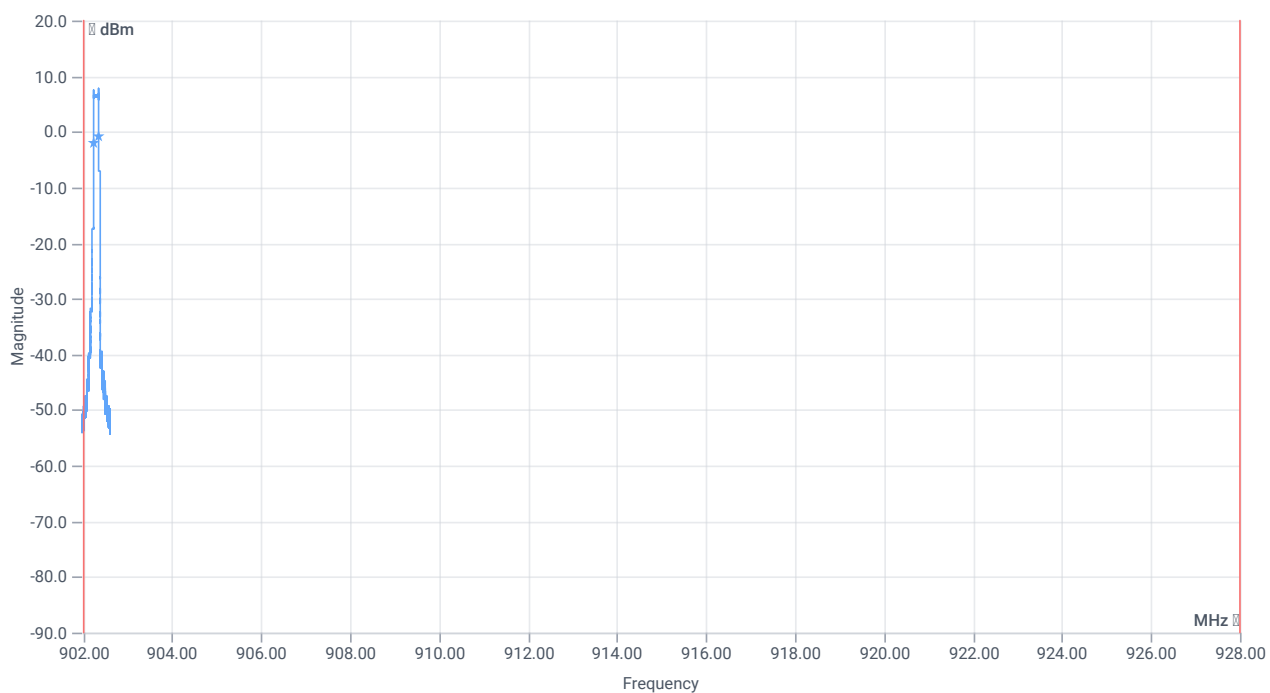


BW within Band 99PCT

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	126.542	kHz	INFO
T1 99%	902.000000	---	902.2341	MHz	PASS
T2 99%	---	928.000000	902.3606	MHz	PASS

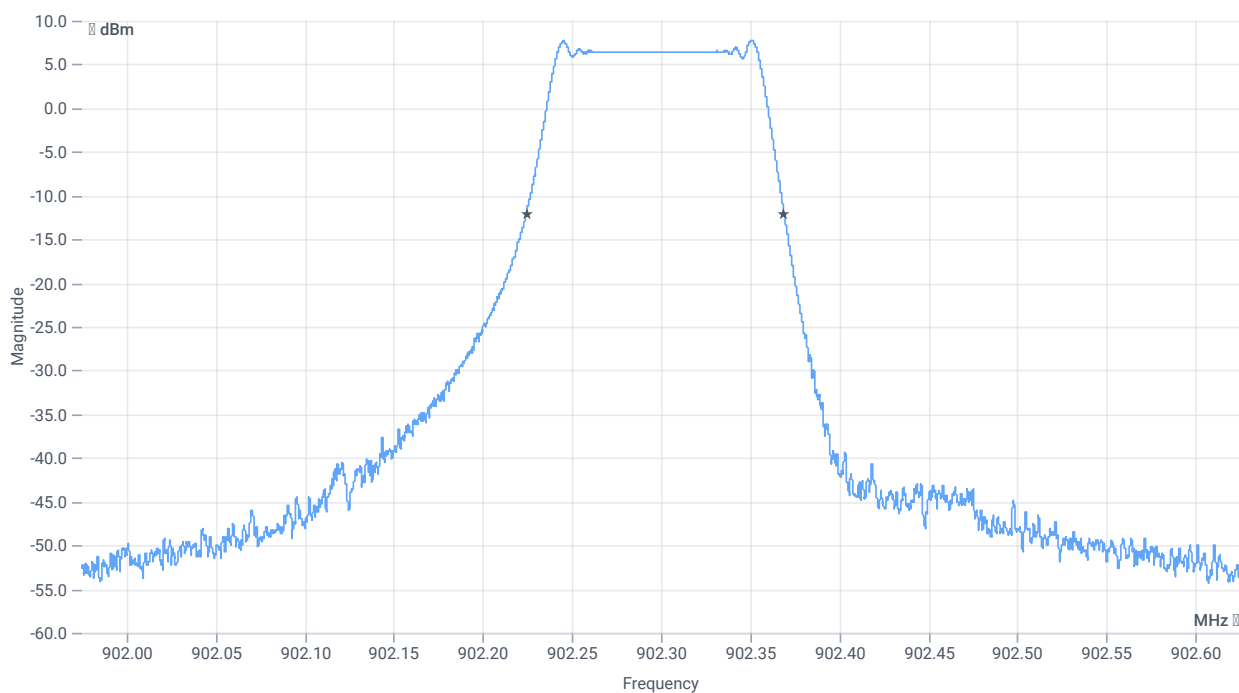

BW 20dB

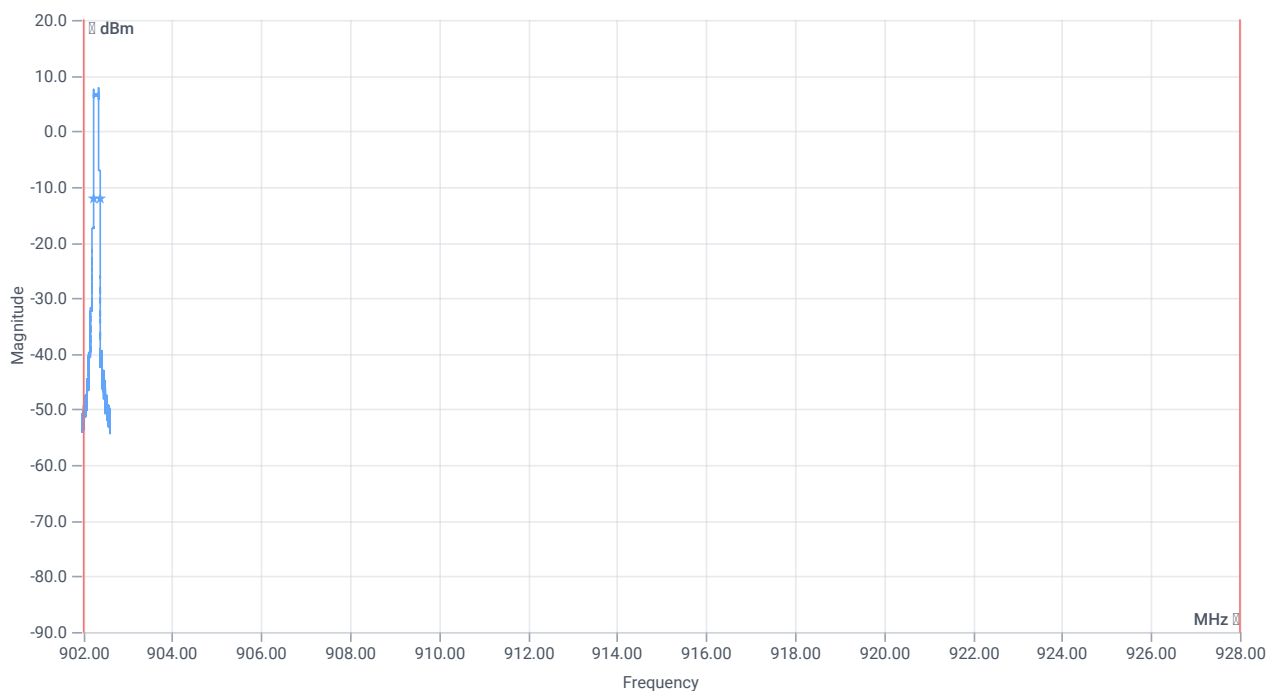

BW within Band 20dB

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	1500	145	kHz	PASS
T1 20dB	902.000000	---	902.2244	MHz	PASS
T2 20dB	---	928.000000	902.3692	MHz	PASS


Test at TX 908.5 MHz

RESULT: Reference Power cond.

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.27	dBm	INFO
Ref. Frequency	---	---	908.500	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.27 8.46 30
Start [MHz] Stop [MHz]	908.175 908.825
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

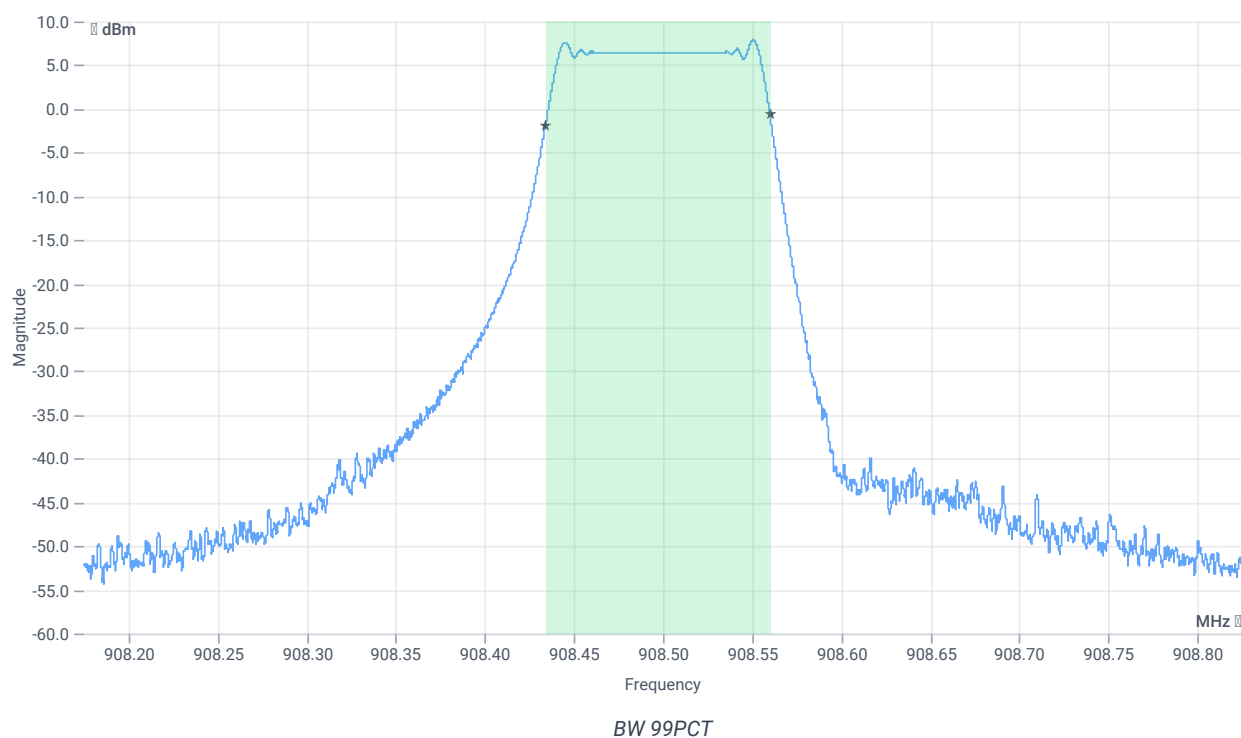


Plot: Bandwidth within Band



BW within Band 99PCT

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	126.022	kHz	INFO
T1 99%	902.000000	---	908.4340	MHz	PASS
T2 99%	---	928.000000	908.5600	MHz	PASS

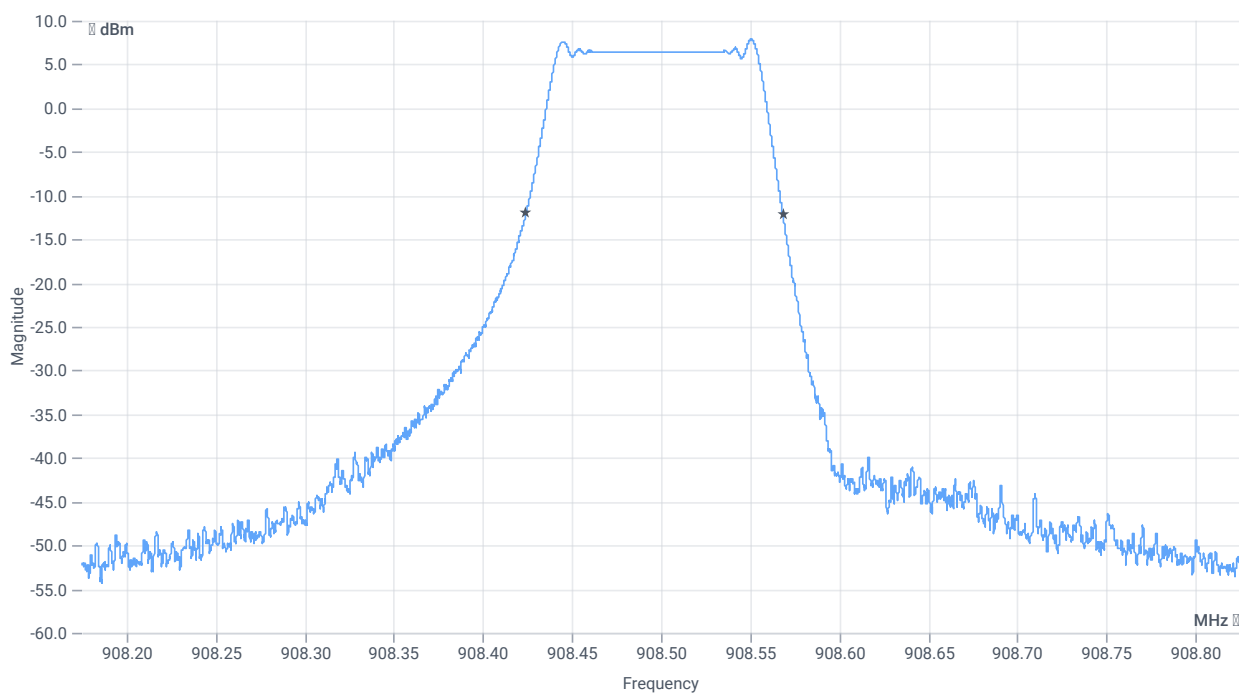

BW 20dB



BW within Band 20dB

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	1500	144	kHz	PASS
T1 20dB	902.000000	---	908.4241	MHz	PASS
T2 20dB	---	928.000000	908.5684	MHz	PASS


Test at TX 914.9 MHz

RESULT: Reference Power cond.

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.33	dBm	INFO
Ref. Frequency	---	---	914.900	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.33 8.47 30
Start [MHz] Stop [MHz]	914.575 915.225
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

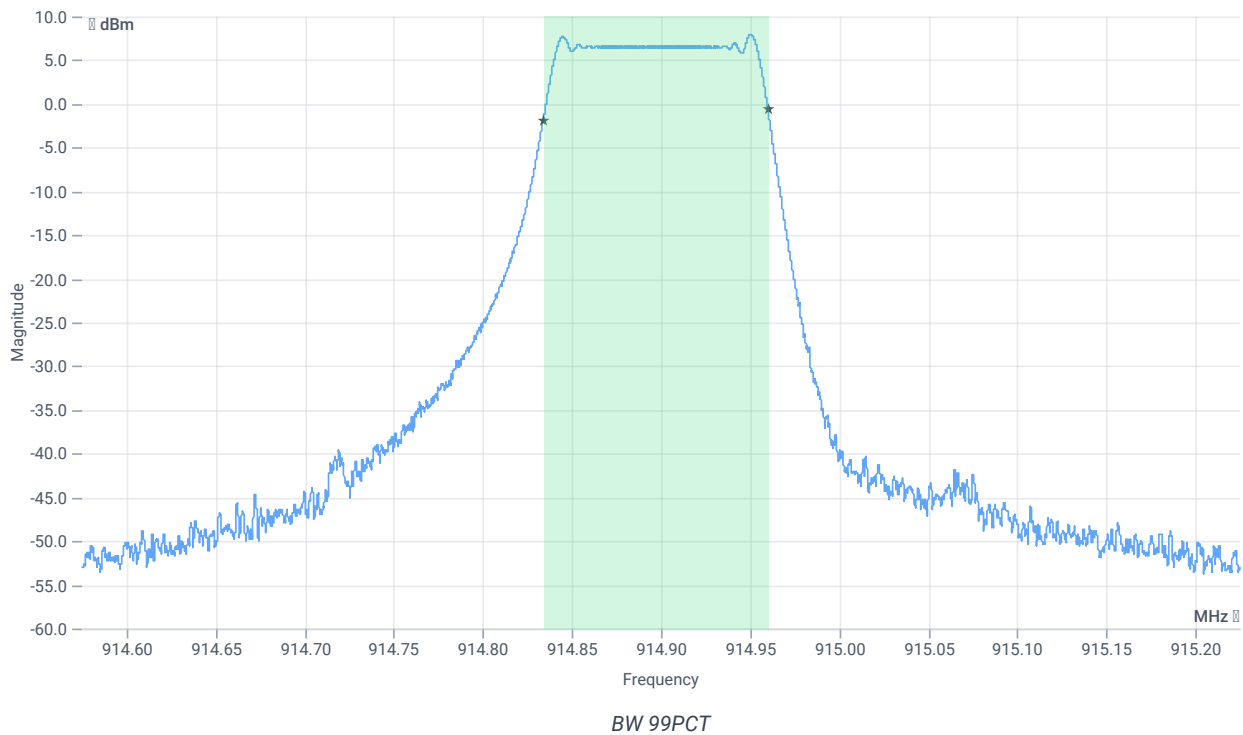


Plot: Bandwidth within Band



BW within Band 99PCT

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	126.152	kHz	INFO
T1 99%	902.000000	---	914.8338	MHz	PASS
T2 99%	---	928.000000	914.9600	MHz	PASS

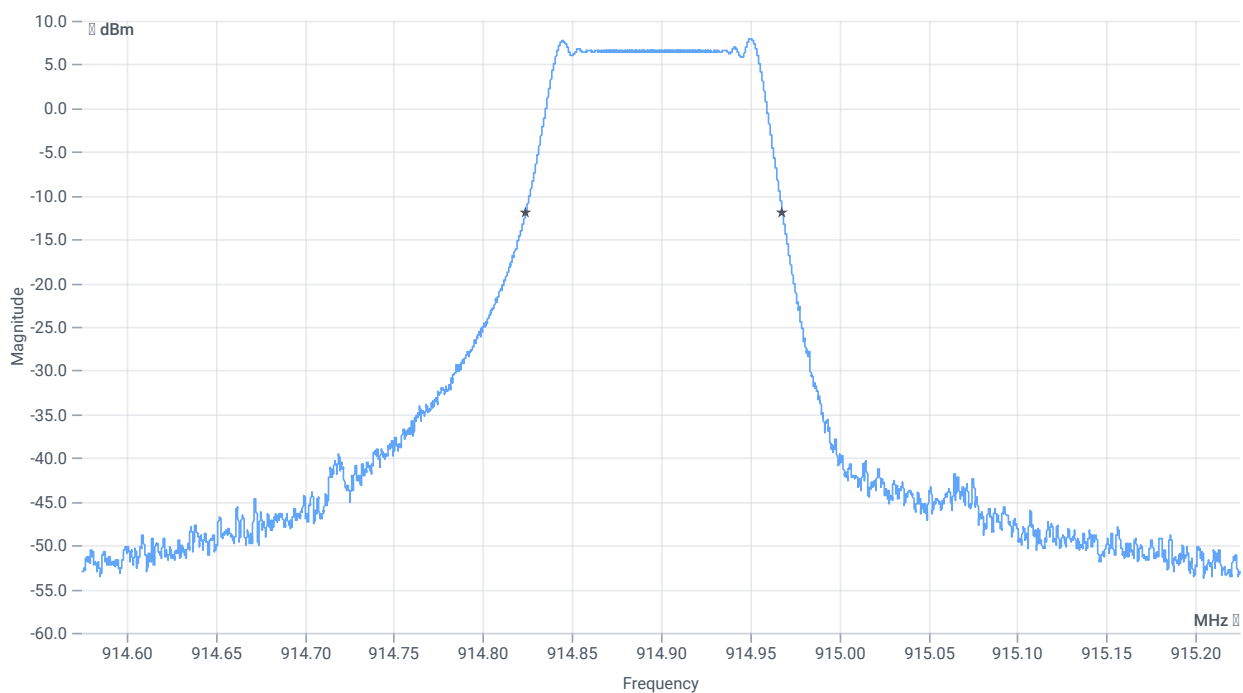

BW 20dB



BW within Band 20dB

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	1500	144	kHz	PASS
T1 20dB	902.000000	---	914.8241	MHz	PASS
T2 20dB	---	928.000000	914.9683	MHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ Generic 0G9 hopp

Test References

TC Start	21.06.2023 13:23:15
Ambit Temp [°C] Humidity [rel%]	0.0 0
System Version	4.0.3.0
Test Specification	FCC 15.247 -
Test Method	
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions conducted FHSS
Add. Information	

Test Parameter

Technology to test	Generic 0G9 hopp
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 902.3
Frequency mid to test	True Freq [MHz] 908.5
Frequency high to test	True Freq [MHz] 914.9
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Switch matrix,CTCadvanced,RSM-1 NI DAQ,31534892,NI

Test at TX 902.3 MHz

RESULT: Reference Power cond.


TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.34	dBm	INFO
Ref. Frequency	---	---	902.300	MHz	INFO

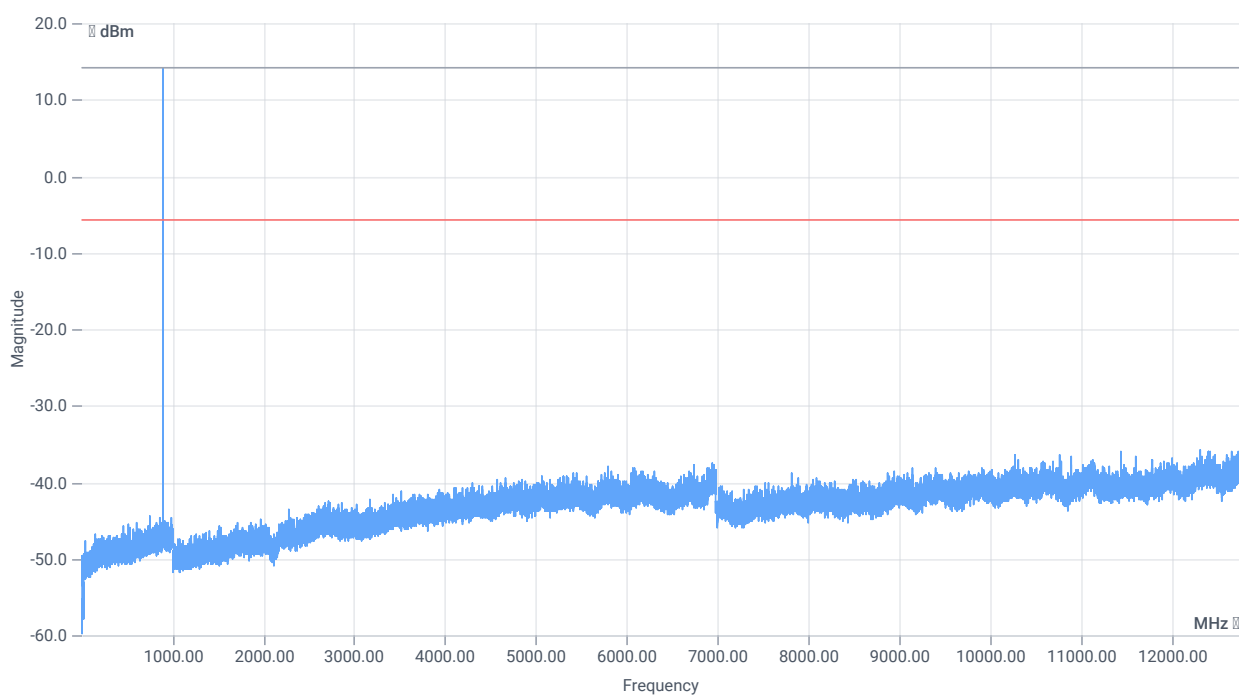

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.34 0 30
Start [MHz] Stop [MHz]	12505.000 12750.000
RBW [MHz] VBW [MHz]	0.100000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 20 2001 SWE

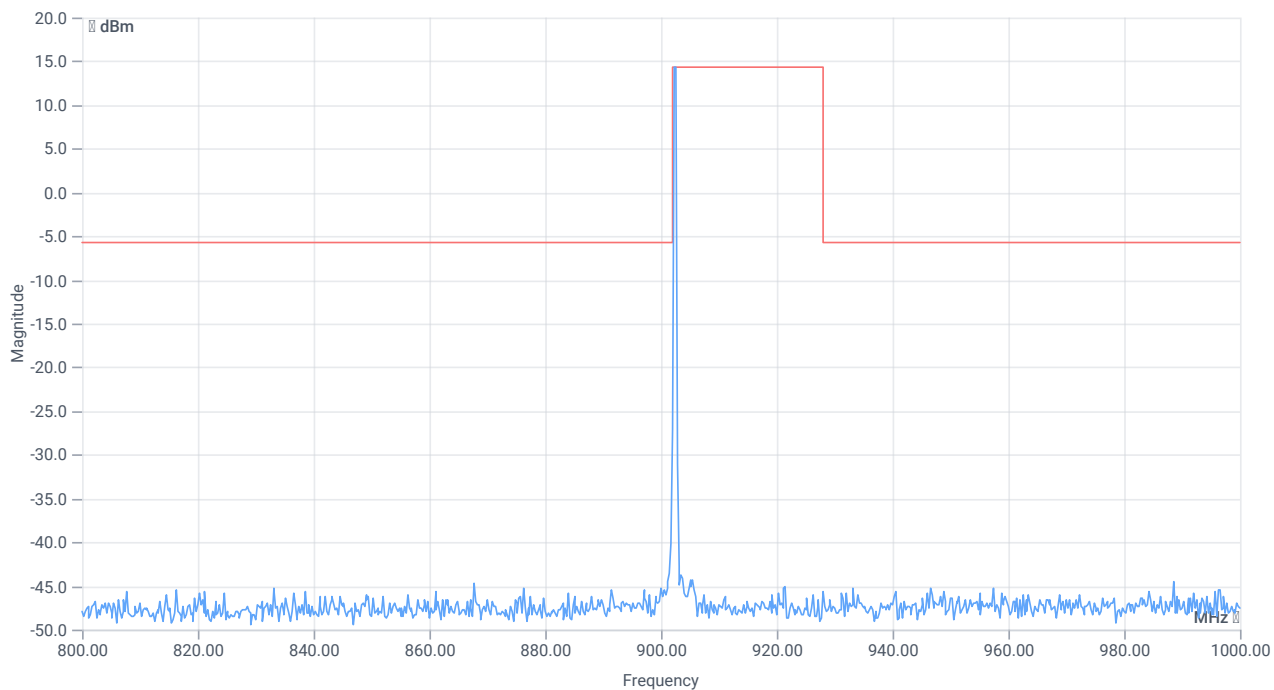


RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 902.25 MHz	---	---	14.23	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12319.75 MHz	0	---	30.06	dB	INFO

Test at TX 908.5 MHz

RESULT: Reference Power cond.


TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.26	dBm	INFO
Ref. Frequency	---	---	908.500	MHz	INFO

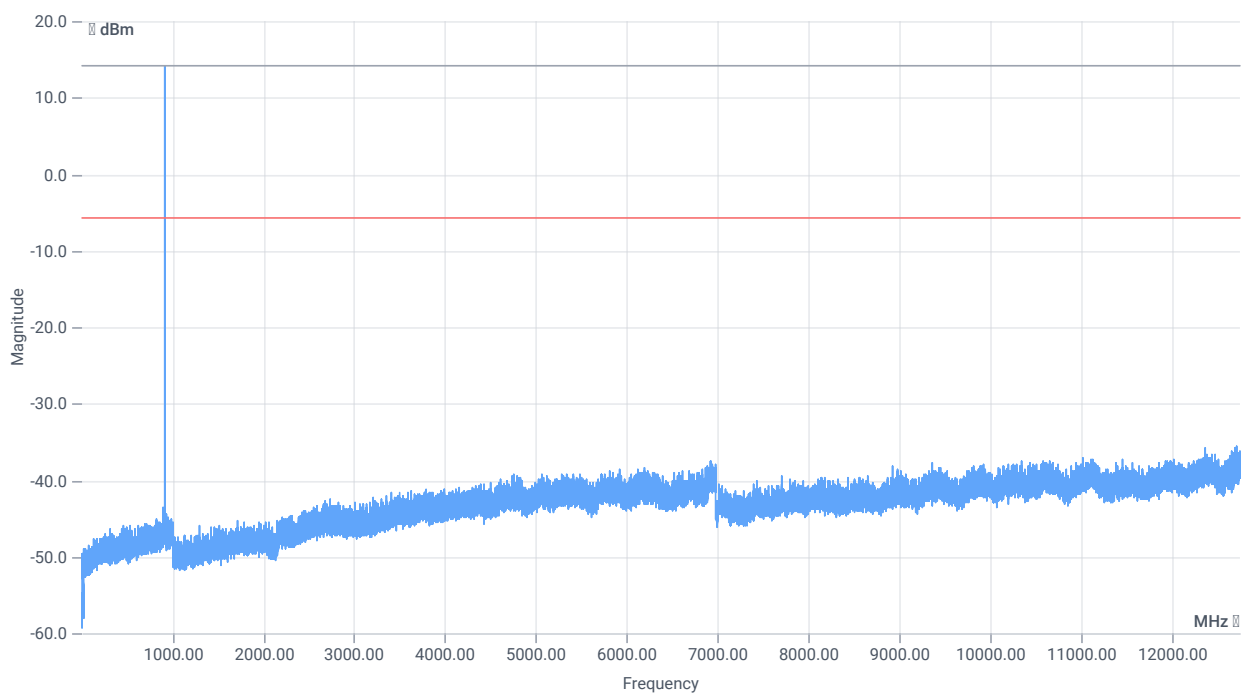

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.26 0 30
Start [MHz] Stop [MHz]	12505.000 12750.000
RBW [MHz] VBW [MHz]	0.100000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 20 2001 SWE

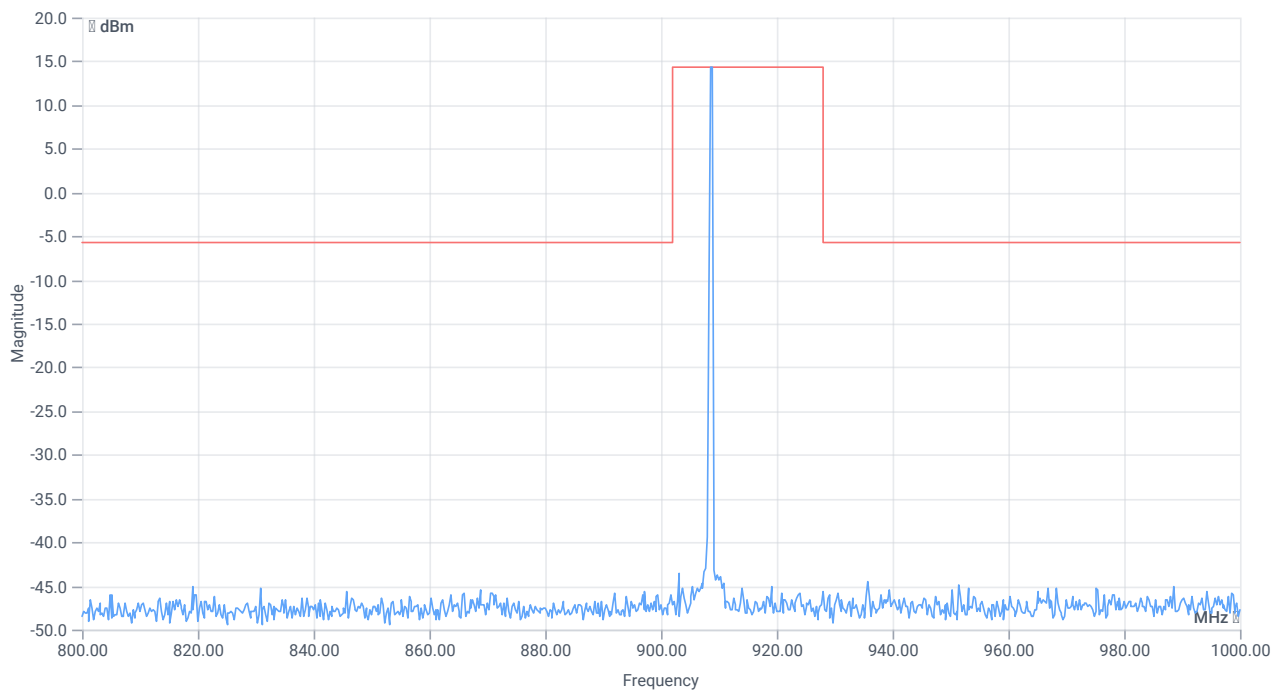

TX emissions band zoomed


RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 908.50 MHz	---	---	14.23	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 12712.882 MHz	0	---	29.91	dB	INFO

Test at TX 914.9 MHz

RESULT: Reference Power cond.


TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. Power 1MHz/1MHz cond.	---	---	14.32	dBm	INFO
Ref. Frequency	---	---	914.900	MHz	INFO

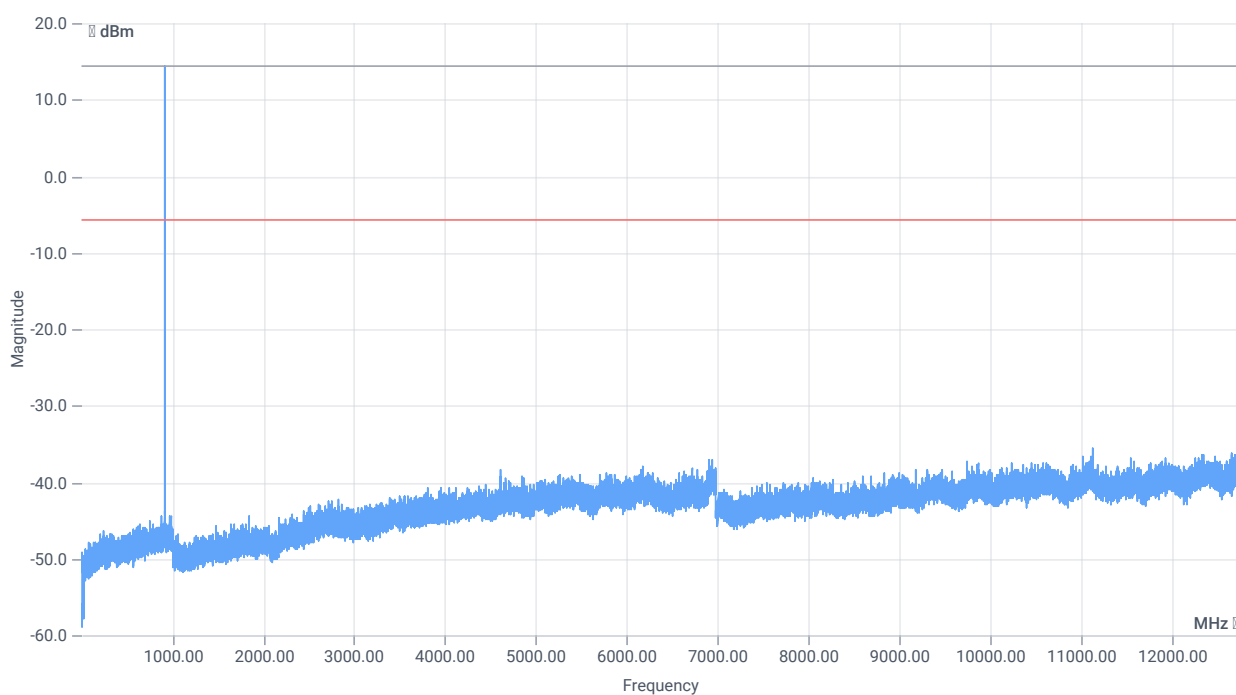

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.32 0 30
Start [MHz] Stop [MHz]	12505.000 12750.000
RBW [MHz] VBW [MHz]	0.100000 1.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	200 20 2001 SWE

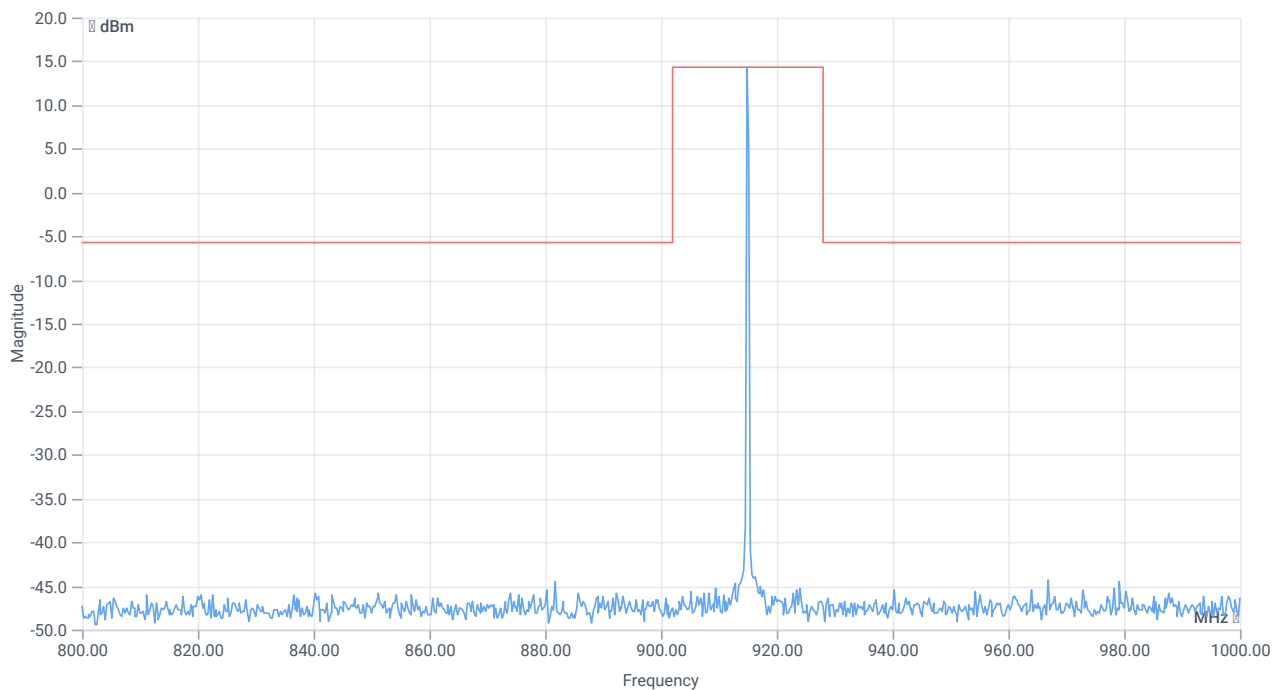

TX emissions band zoomed

RESULT

TEST DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 915.00 MHz	---	---	14.31	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 5 MHz	0	---	-143.24	dB	INFO

Verdict

PASS

- END OF DOCUMENT -