



Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No...... : **GTSR18070403-BT**

FCC ID..... : **2ANXU-SB6085**

Compiled by

(position+printed name+signature)..: File administrators Jimmy Wang


Supervised by

(position+printed name+signature)..: Test Engineer Aaron Tan

Approved by

(position+printed name+signature)..: Manager Jason Hu

Date of issue.....: Aug. 09, 2018



Representative Laboratory Name. : **Shenzhen Global Test Service Co., Ltd.**

Address.....: No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

Applicant's name.....: **Shenzhen Jiayinking Technology Holding Company., Limited**

Address.....: No.11, 11-1, Anye Road, Anliang village, Henggang Town, Longgang District, Shenzhen, China.

Test specification..... :

Standard.....: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen Global Test Service Co., Ltd.

Master TRF.....: Dated 2014-12

Shenzhen Global Test Service Co.,Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Global Test Service Co.,Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Global Test Service Co.,Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description.....: FLOOR STAND TURNTABLE WITH BLUETOOTH RECEIVER, CD PLAYER AND FM RADIO

Trade Mark.....: Studebaker

Manufacturer.....: Shenzhen Jiayinking Technology Holding Company., Limited

Model/Type reference.....: MT229

Listed Models: SB6085, SB6085TE, SB6085RD, SB6085XXXXX

Difference: Where xxxxx denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers.

Modulation Type.....: GFSK, II/4DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Rating.....: DC 12V from adapter

Result.....: **PASS**

TEST REPORT

Test Report No. : GTSR18070403-BT	Aug. 09, 2018
	Date of issue

Equipment under Test : FLOOR STAND TURNTABLE WITH BLUETOOTH RECEIVER, C
D PLAYER AND FM RADIO

Model /Type : MT229

Listed Models : SB6085, SB6085TE, SB6085RD, SB6085XXXXX (Where xxxxx
denote any printable characters in the ASCII Standard Character
Table to represent variances in cosmetics or buyers.)

Applicant : **Shenzhen Jiayinking Technology Holding Company Limited**

Address : No.11, 11-1, Anye Road, Anliang village, Henggang Town,
Longgang District, Shenzhen, China.

Manufacturer : **Shenzhen Jiayinking Technology Holding Company Limited**

Address : No.11, 11-1, Anye Road, Anliang village, Henggang Town,
Longgang District, Shenzhen, China.

Test Result:	PASS
---------------------	-------------

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test result without the written permission of the test
laboratory.

Contents

1. TEST STANDARDS	4
2. SUMMARY	5
2.1. General Remarks.....	5
2.2. Product Description.....	5
2.3. Equipment Under Test.....	5
2.4. Short description of the Equipment under Test (EUT).....	5
2.5. EUT operation mode.....	6
2.6. Block Diagram of Test Setup.....	7
2.7. Related Submittal(s) / Grant (s).....	7
2.8. EUT configuration.....	7
2.9. Modifications.....	7
3. TEST ENVIRONMENT	8
3.1. Address of the test laboratory.....	8
3.2. Test Facility.....	8
3.3. Environmental conditions.....	8
3.4. Summary of measurement results.....	9
3.5. Statement of the measurement uncertainty.....	10
3.6. Equipments Used during the Test.....	10
4. TEST CONDITIONS AND RESULTS	11
4.1. AC Power Conducted Emission.....	11
4.2. Radiated Emission.....	20
4.3. Maximum Peak Output Power.....	26
4.4. 20dB Bandwidth.....	27
4.5. Frequency Separation.....	30
4.6. Band Edge Compliance of RF Emission.....	32
4.7. Spurious RF Conducted Emission.....	36
4.8. Number of hopping frequency.....	40
4.9. Time Of Occupancy(Dwell Time).....	42
4.10. Pseudorandom Frequency Hopping Sequence.....	44
4.11. Antenna Requirement.....	45
5. TEST SETUP PHOTOS OF THE EUT	45
6. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	47

1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[DA 00-705](#): Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

2. SUMMARY

2.1. General Remarks

Date of receipt of test sample	:	Jul. 24, 2018
Testing commenced on	:	Jul. 28, 2018
Testing concluded on	:	Aug. 08, 2018

2.2. Product Description

Name of EUT	FLOOR STAND TURNTABLE WITH BLUETOOTH RECEIVER, CD PLAYER AND FM RADIO
Trade Mark:	Studebaker
Model Number	MT229
List Model:	SB6085, SB6085TE, SB6085RD, SB6085XXXXX (Where xxxxx denote any printable characters in the ASCII Standard Character Table to represent variances in cosmetics or buyers.)
FCC ID	2ANXU-SB6085
Antenna Type	PCB Antenna
Bluetooth FCC Operation frequency	2402MHz-2480MHz
Bluetooth Modulation	GFSK, $\pi/4$ DQPSK, 8DPSK
Bluetooth	BT V4.1 EDR
Antenna gain	0dBi
Adapter 1	
Manufacturer	SHENZHEN SHI GUANGKAIYUAN TECHNOLOGY., LTD.
M/N	GKYPB0200120US
Input	AC 100-240V~50/60Hz 0.8A Max
Output	DC 12V/2A
Adapter 2	
M/N	YeS04S-1200200UH
Input	AC 100-240V~50/60Hz 0.65A Max
Output	DC 12V/2A

2.3. Equipment Under Test

Power supply system utilised

Power supply voltage	:	☐ 230V / 50 Hz	☒ 120V / 60Hz
		☐ 12 V DC	☐ 24 V DC
		☐ Other (specified in blank below)	

2.4. Short description of the Equipment under Test (EUT)

This is a FLOOR STAND TURNTABLE WITH BLUETOOTH RECEIVER, CD PLAYER AND FM RADIO
For more details, refer to the user's manual of the EUT.


2.5. EUT operation mode

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT.

Channel 00/38/78 was selected to test.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
00	2402	40	2442
01	2403	41	2443
02	2404	42	2444
03	2405	43	2445
04	2406	44	2446
05	2407	45	2447
06	2408	46	2448
07	2409	47	2449
08	2410	48	2450
09	2411	49	2451
10	2412	50	2452
11	2413	51	2453
12	2414	52	2454
13	2415	53	2455
14	2416	54	2456
15	2417	55	2457
16	2418	56	2458
17	2419	57	2459
18	2420	58	2460
19	2421	59	2461
20	2422	60	2462
21	2423	61	2463
22	2424	62	2464
23	2425	63	2465
24	2426	64	2466
25	2427	65	2467
26	2428	66	2468
27	2429	67	2469
28	2430	68	2470
29	2431	69	2471
30	2432	70	2472
31	2433	71	2473
32	2434	72	2474
33	2435	73	2475
34	2436	74	2476
35	2437	75	2477
36	2438	76	2478
37	2439	77	2479
38	2440	78	2480
39	2441		

2.6. Block Diagram of Test Setup



2.7. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ANXU-SB6085** filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.8. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - Supplied by the lab

☐		M/N:	
☐		Manufacturer:	

2.9. Modifications

No modifications were implemented to meet testing criteria.

3. TEST ENVIRONMENT

3.1. Address of the test laboratory

Shenzhen Global Test Service Co.,Ltd.

No.7-101 and 8A-104, Building 7 and 8, DCC Cultural and Creative Garden, No.98, Pingxin North Road, Shangmugu Community, Pinghu Street, Longgang District, Shenzhen, Guangdong

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 165725

Shenzhen Global Test Service Co.,Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

A2LA-Lab Cert. No.: 4758.01

Shenzhen Global Test Service Co.,Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

CNAS-Lab Code: L8169

Shenzhen Global Test Service Co.,Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories. Date of Registration: Dec. 11, 2015. Valid time is until Dec. 10, 2018.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

3.4. Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Pass	Fail	NA	NP	Remark
§15.247(b)(4)	Antenna gain	GFSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.247(e)	Power spectral density	-/-	-/-	-/-	-/-	☐	☐	☒	☐	Not applicable for FHSS
§15.247(a)(1)	Carrier Frequency separation	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK 8DPSK	☒ Middle	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Number of Hopping channels	GFSK 8DPSK	☒ Full	GFSK 8DPSK	☒ Full	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK 8DPSK	☒ Middle	☒ ☒	☐	☐	☐	complies
§15.247(a)(1)	Spectrum bandwidth of a FHSS system 20dB bandwidth	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(b)(1)	Maximum output power	GFSK $\pi/4$ DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK $\pi/4$ DQPSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒ ☒	☐	☐	☐	complies
§15.247(d)	Band edge compliance conducted	GFSK 8DPSK	☒ Lowest ☒ Highest	GFSK 8DPSK	☒ Lowest ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.205	Band edge compliance radiated	GFSK 8DPSK	☒ Lowest ☒ Highest	GFSK	☒ Lowest ☒ Highest	☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions conducted	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	☒ ☒	☐	☐	☐	complies
§15.247(d)	TX spurious emissions radiated	GFSK 8DPSK	☒ Lowest ☒ Middle ☒ Highest	GFSK	☒ Lowest ☒ Middle ☒ Highest	☒	☐	☐	☐	complies
§15.109	RX spurious emissions radiated	-/-	-/-	-/-	-/-	☐	☐	☒	☐	complies
§15.209(a)	TX spurious Emissions radiated < 30 MHz	GFSK	-/-	GFSK	-/-	☒	☐	☐	☐	complies
§15.107(a) §15.207	Conducted Emissions < 30 MHz	GFSK	-/-	GFSK	-/-	☒	☐	☐	☐	complies

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report
4. For $\pi/4$ QPSK its same modulation type with 8-DPSK, and based exploratory test, there is no significant difference of that two types test result, so except output power, all other items final test were only performed with the worse case 8-DPSK and GFSK.

3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen GTS laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3.6. Equipments Used during the Test


Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.08	2017/09/20	2018/09/19
LISN	R&S	ESH2-Z5	893606/008	2017/09/20	2018/09/19
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2017/09/20	2018/09/19
EMI Test Receiver	R&S	ESCI	101102	2017/09/20	2018/09/19
Spectrum Analyzer	Agilent	N9020A	MY48010425	2017/09/20	2018/09/19
Controller	EM Electronics	Controller EM 1000	N/A	2017/09/20	2018/09/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2017/09/20	2018/09/19
Active Loop Antenna	SCHWARZBEC K	FMZB1519	1519-037	2017/09/20	2018/09/19
Amplifier	Agilent	8349B	3008A02306	2017/09/20	2018/09/19
Amplifier	Agilent	8447D	2944A10176	2017/09/20	2018/09/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2017/09/20	2018/09/19
High-Pass Filter	K&L	9SH10-2700/X12750-O/O	N/A	2017/09/20	2018/09/19
High-Pass Filter	K&L	41H10-1375/U12750-O/O	N/A	2017/09/20	2018/09/19
RF Cable	HUBER+SUHNER	RG214	N/A	2017/09/20	2018/09/19
Data acquisition card	Agilent	U2531A	TW53323507	2017/09/20	2018/09/19
Power Sensor	Agilent	U2021XA	MY5365004	2017/09/20	2018/09/19

Note: The Cal.Interval was one year.

4. TEST CONDITIONS AND RESULTS

4.1. AC Power Conducted Emission

TEST CONFIGURATION

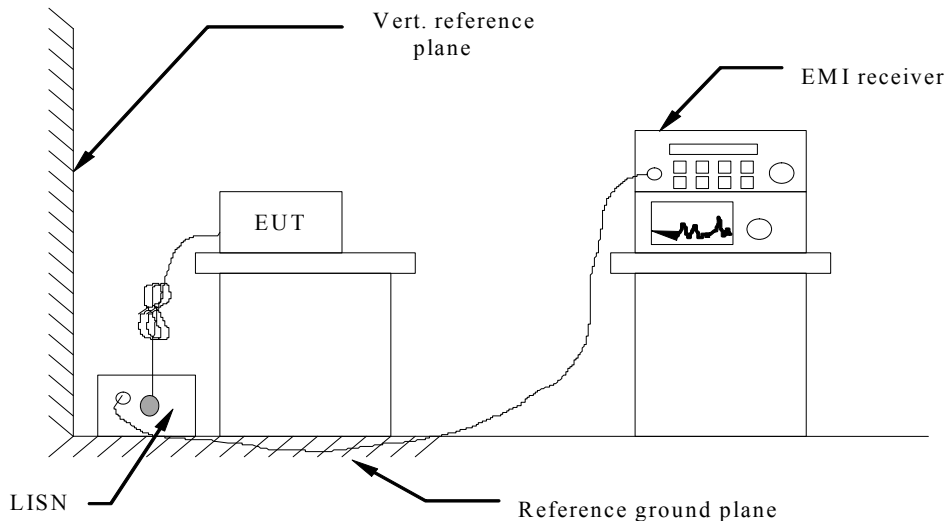

TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013.
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
- 4 The EUT received DC 5V power, the adapter received AC120V/60Hz or AC 240V/50Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST RESULTS

Remark: We measured Conducted Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode in DC 12V form adapter, the worst case was recorded .


Power supply:

AC 120V/60Hz

Polarization

L

Adapter 1(GKYPB0200120US)

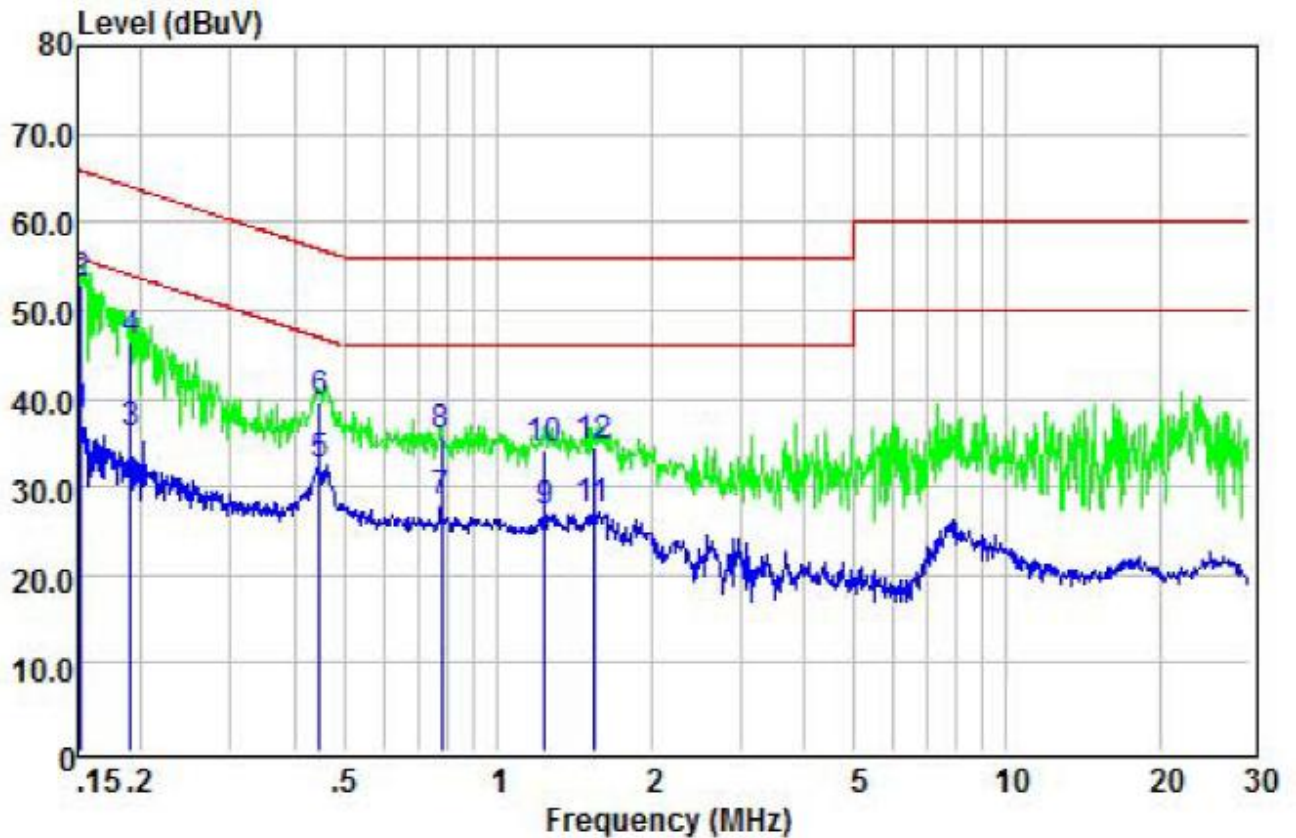

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	28.39	9.46	0.24	38.09	55.87	-17.78	Average
2	0.15	43.32	9.46	0.24	53.02	65.87	-12.85	QP
3	0.19	26.05	9.55	0.24	35.84	54.02	-18.18	Average
4	0.19	36.57	9.55	0.24	46.36	64.02	-17.66	QP
5	0.45	22.66	9.59	0.25	32.50	46.93	-14.43	Average
6	0.45	29.81	9.59	0.25	39.65	56.93	-17.28	QP
7	0.78	18.45	9.60	0.26	28.31	46.00	-17.69	Average
8	0.78	25.76	9.60	0.26	35.62	56.00	-20.38	QP
9	1.24	17.31	9.59	0.27	27.17	46.00	-18.83	Average
10	1.24	24.29	9.59	0.27	34.15	56.00	-21.85	QP
11	1.54	17.49	9.58	0.27	27.34	46.00	-18.66	Average
12	1.54	24.50	9.58	0.27	34.35	56.00	-21.65	QP


Power supply:

AC 120V/60Hz

Polarization

N

Adapter 1(GKYPB0200120US)

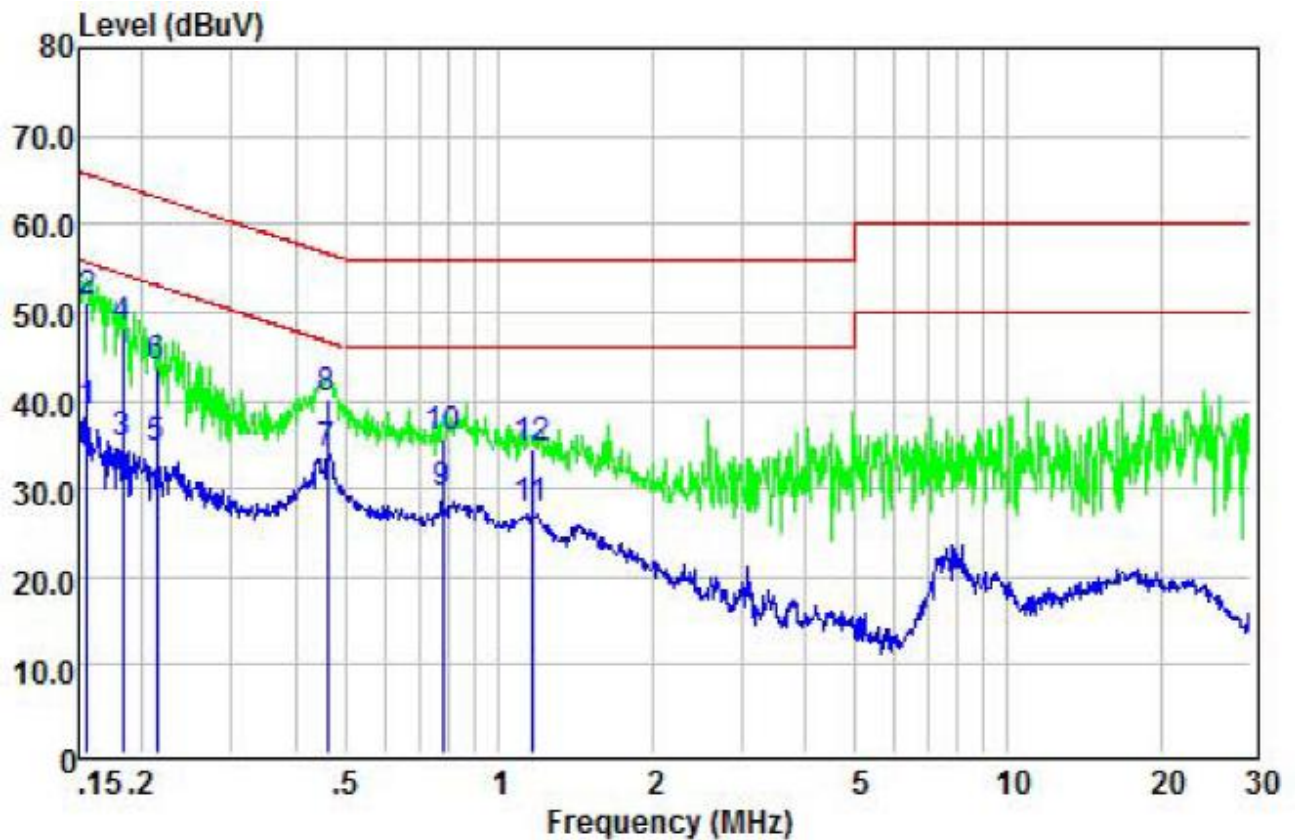

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	dBuV	Factor	Loss	dBuV	dBuV	Limit	Remark
1	0.16	28.60	9.69	0.24	38.53	55.69	-17.16	Average
2	0.16	41.10	9.69	0.24	51.03	65.69	-14.66	QP
3	0.18	25.09	9.66	0.24	34.99	54.37	-19.38	Average
4	0.18	38.13	9.66	0.24	48.03	64.37	-16.34	QP
5	0.21	24.56	9.64	0.25	34.45	53.05	-18.60	Average
6	0.21	33.73	9.64	0.25	43.62	63.05	-19.43	QP
7	0.46	24.17	9.59	0.25	34.01	46.67	-12.66	Average
8	0.46	30.39	9.59	0.25	40.23	56.67	-16.44	QP
9	0.78	19.47	9.60	0.26	29.33	46.00	-16.67	Average
10	0.78	25.95	9.60	0.26	35.81	56.00	-20.19	QP
11	1.17	17.79	9.59	0.27	27.65	46.00	-18.35	Average
12	1.17	24.78	9.59	0.27	34.64	56.00	-21.36	QP


Power supply:

AC 120V/60Hz

Polarization

L

Adapter 2(YeS04S-1200200UH)

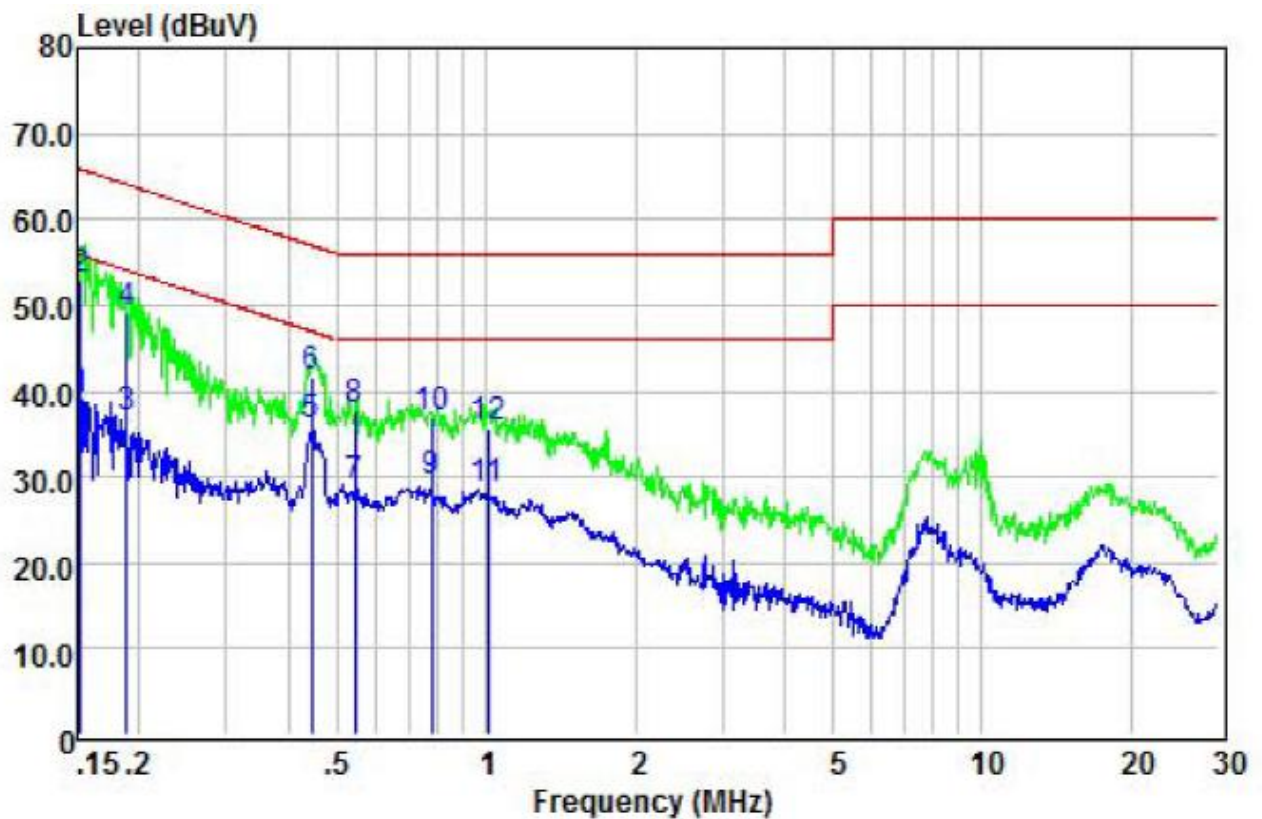

	Freq	Read	LISN	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Level	Line	Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	29.06	9.70	0.24	39.00	55.87	-16.87	Average
2	0.15	43.09	9.70	0.24	53.03	65.87	-12.84	QP
3	0.19	27.10	9.65	0.24	36.99	54.11	-17.12	Average
4	0.19	39.14	9.65	0.24	49.03	64.11	-15.08	QP
5	0.44	26.06	9.59	0.25	35.90	46.98	-11.08	Average
6	0.44	31.85	9.59	0.25	41.69	56.98	-15.29	QP
7	0.54	19.04	9.59	0.25	28.88	46.00	-17.12	Average
8	0.54	27.97	9.59	0.25	37.81	56.00	-18.19	QP
9	0.78	19.47	9.60	0.26	29.33	46.00	-16.67	Average
10	0.78	27.05	9.60	0.26	36.91	56.00	-19.09	QP
11	1.01	18.67	9.59	0.26	28.52	46.00	-17.48	Average
12	1.01	25.97	9.59	0.26	35.82	56.00	-20.18	QP


Power supply:

AC 120V/60Hz

Polarization

N

Adapter 2(YeS04S-1200200UH)

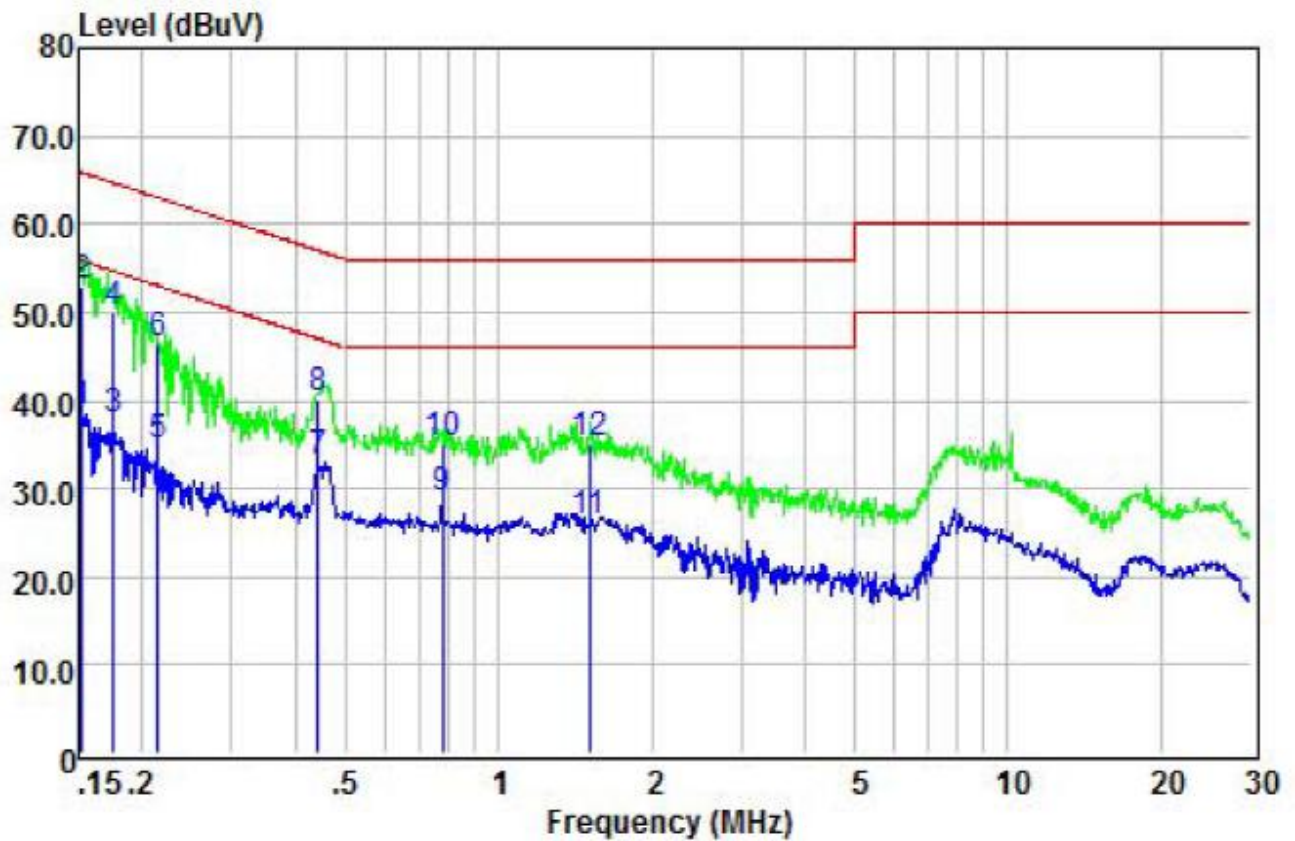

	Freq	Read	LISN	Cable	Level	Limit	Over	
	MHz	Level	Factor	Loss	Level	Line	Limit	Remark
		dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	28.84	9.46	0.24	38.54	55.87	-17.33	Average
2	0.15	43.32	9.46	0.24	53.02	65.87	-12.85	QP
3	0.18	28.12	9.52	0.24	37.88	54.68	-16.80	Average
4	0.18	40.25	9.52	0.24	50.01	64.68	-14.67	QP
5	0.22	25.01	9.57	0.25	34.83	53.01	-18.18	Average
6	0.22	36.54	9.57	0.25	46.36	63.01	-16.65	QP
7	0.44	23.19	9.59	0.25	33.03	47.02	-13.99	Average
8	0.44	30.19	9.59	0.25	40.03	57.02	-16.99	QP
9	0.78	18.94	9.60	0.26	28.80	46.00	-17.20	Average
10	0.78	25.09	9.60	0.26	34.95	56.00	-21.05	QP
11	1.51	16.35	9.58	0.27	26.20	46.00	-19.80	Average
12	1.51	25.36	9.58	0.27	35.21	56.00	-20.79	QP


Power supply:

AC 240V/50Hz

Polarization

L

Adapter 1(GKYPB0200120US)

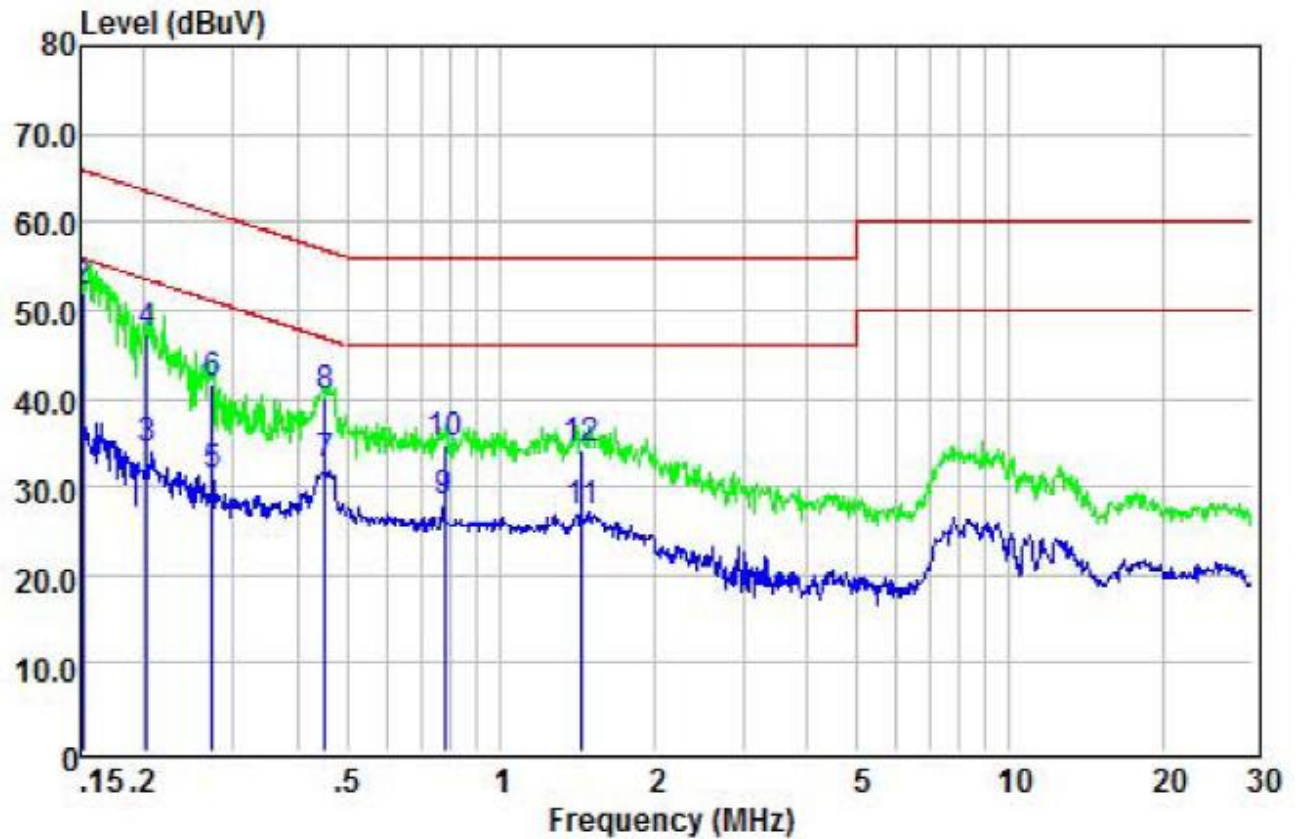

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	30.78	9.45	0.24	40.47	55.91	-15.44	Average
2	0.15	42.32	9.45	0.24	52.01	65.91	-13.90	QP
3	0.20	24.43	9.57	0.25	34.25	53.49	-19.24	Average
4	0.20	37.54	9.57	0.25	47.36	63.49	-16.13	QP
5	0.27	21.31	9.58	0.25	31.14	51.07	-19.93	Average
6	0.27	31.79	9.58	0.25	41.62	61.07	-19.45	QP
7	0.45	22.65	9.59	0.25	32.49	46.80	-14.31	Average
8	0.45	30.17	9.59	0.25	40.01	56.80	-16.79	QP
9	0.78	18.32	9.60	0.26	28.18	46.00	-17.82	Average
10	0.78	24.88	9.60	0.26	34.74	56.00	-21.26	QP
11	1.45	17.35	9.58	0.27	27.20	46.00	-18.80	Average
12	1.45	24.38	9.58	0.27	34.23	56.00	-21.77	QP


Power supply:

AC 240V/50Hz

Polarization

N

Adapter 1(GKYPB0200120US)

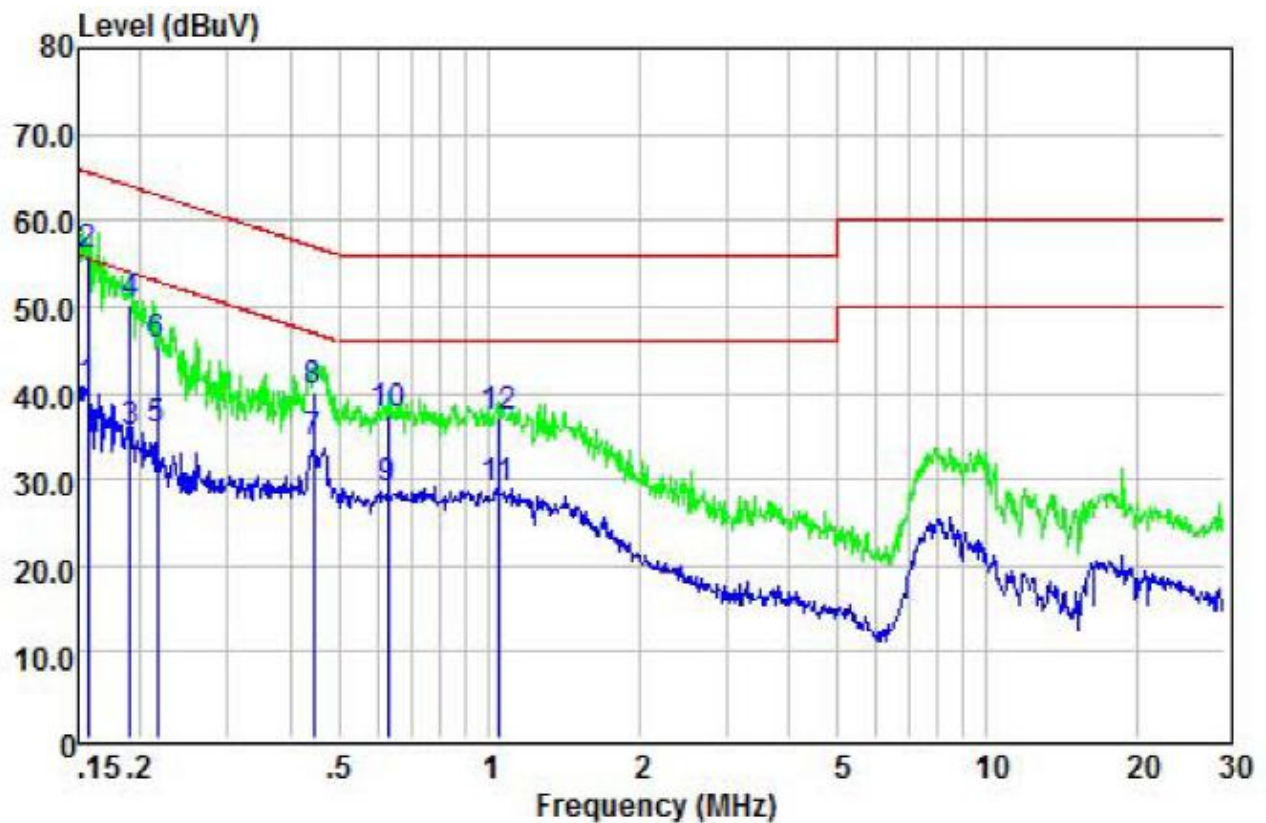

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.16	30.43	9.69	0.24	40.36	55.65	-15.29	Average
2	0.16	46.09	9.69	0.24	56.02	65.65	-9.63	QP
3	0.19	25.38	9.65	0.24	35.27	54.02	-18.75	Average
4	0.19	40.23	9.65	0.24	50.12	64.02	-13.90	QP
5	0.22	25.77	9.63	0.25	35.65	52.96	-17.31	Average
6	0.22	35.75	9.63	0.25	45.63	62.96	-17.33	QP
7	0.44	24.49	9.59	0.25	34.33	46.98	-12.65	Average
8	0.44	30.39	9.59	0.25	40.23	56.98	-16.75	QP
9	0.63	18.96	9.60	0.25	28.81	46.00	-17.19	Average
10	0.63	27.67	9.60	0.25	37.52	56.00	-18.48	QP
11	1.04	19.11	9.59	0.26	28.96	46.00	-17.04	Average
12	1.04	27.18	9.59	0.26	37.03	56.00	-18.97	QP


Power supply:

AC 240V/50Hz

Polarization

L

Adapter 2(YeS04S-1200200UH)

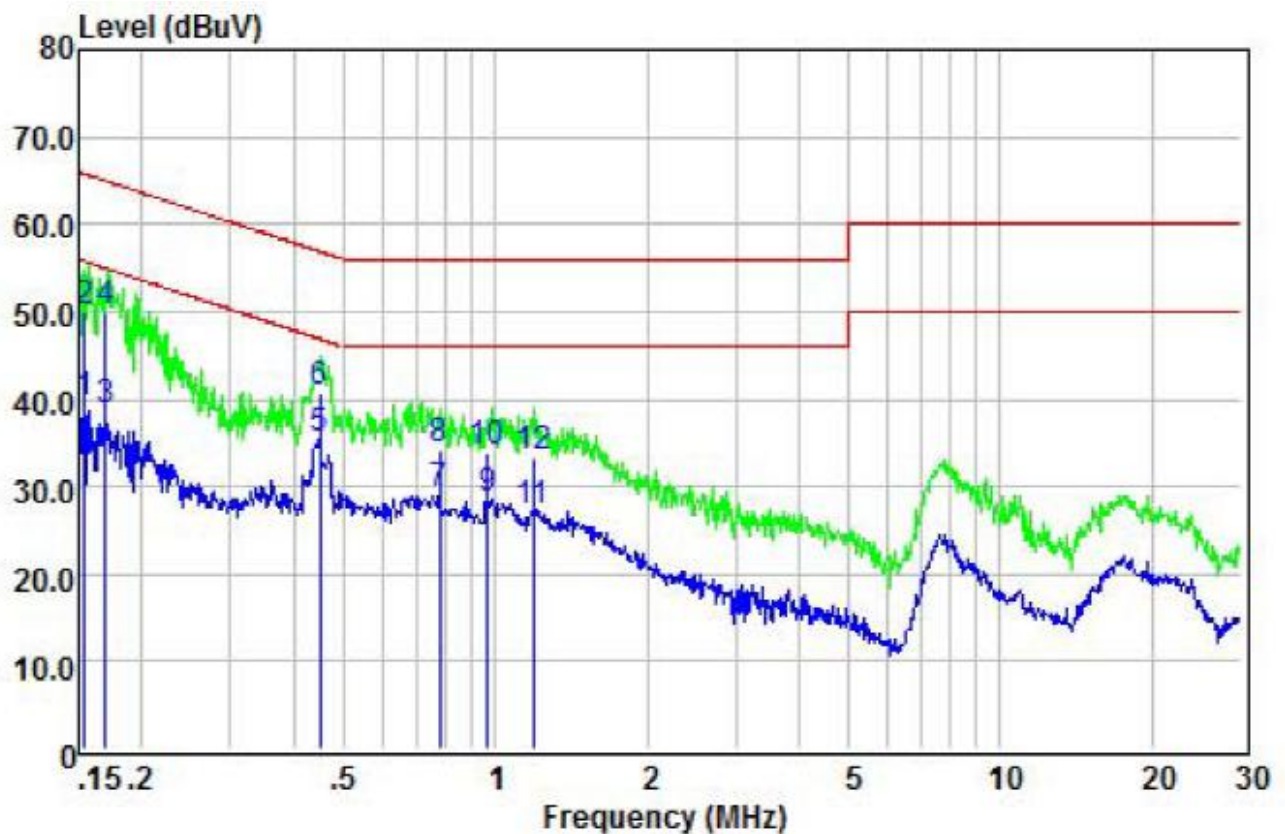

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	29.63	9.69	0.24	39.56	55.78	-16.22	Average
2	0.15	39.92	9.69	0.24	49.85	65.78	-15.93	QP
3	0.17	28.78	9.67	0.24	38.69	54.99	-16.30	Average
4	0.17	40.07	9.67	0.24	49.98	64.99	-15.01	QP
5	0.45	25.55	9.59	0.25	35.39	46.89	-11.50	Average
6	0.45	30.81	9.59	0.25	40.65	56.89	-16.24	QP
7	0.78	19.16	9.60	0.26	29.02	46.00	-16.98	Average
8	0.78	24.27	9.60	0.26	34.13	56.00	-21.87	QP
9	0.97	18.71	9.59	0.26	28.56	46.00	-17.44	Average
10	0.97	24.04	9.59	0.26	33.89	56.00	-22.11	QP
11	1.19	17.18	9.60	0.27	27.05	46.00	-18.95	Average
12	1.19	23.58	9.60	0.27	33.45	56.00	-22.55	QP


Power supply:

AC 240V/50Hz

Polarization

N

Adapter 2(YeS04S-1200200UH)

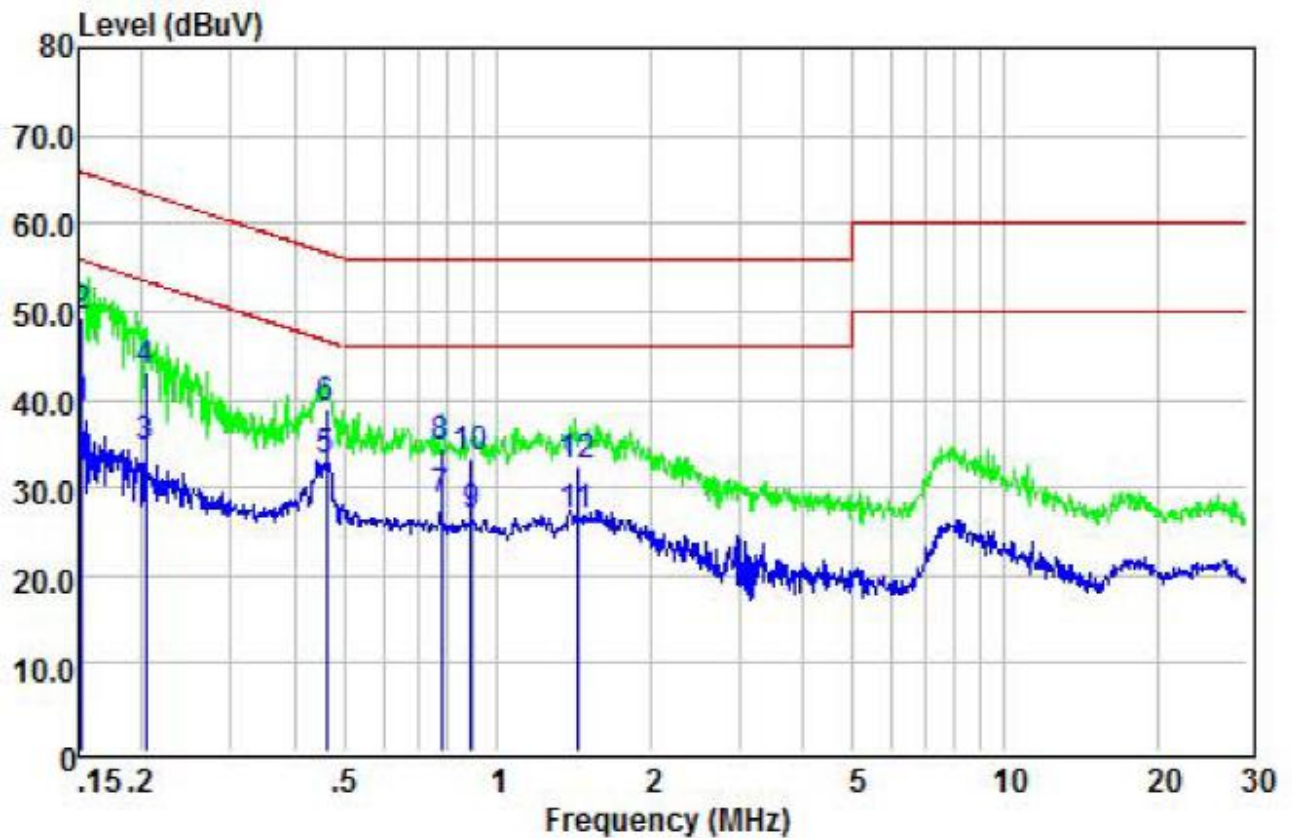


	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.15	29.29	9.46	0.24	38.99	55.87	-16.88	Average
2	0.15	39.55	9.46	0.24	49.25	65.87	-16.62	QP
3	0.20	24.78	9.57	0.25	34.60	53.45	-18.85	Average
4	0.20	33.30	9.57	0.25	43.12	63.45	-20.33	QP
5	0.46	23.29	9.59	0.25	33.13	46.67	-13.54	Average
6	0.46	29.11	9.59	0.25	38.95	56.67	-17.72	QP
7	0.78	18.67	9.60	0.26	28.53	46.00	-17.47	Average
8	0.78	24.77	9.60	0.26	34.63	56.00	-21.37	QP
9	0.89	16.91	9.60	0.26	26.77	46.00	-19.23	Average
10	0.89	23.35	9.60	0.26	33.21	56.00	-22.79	QP
11	1.44	16.88	9.58	0.27	26.73	46.00	-19.27	Average
12	1.44	22.66	9.58	0.27	32.51	56.00	-23.49	QP


4.2. Radiated Emission

TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

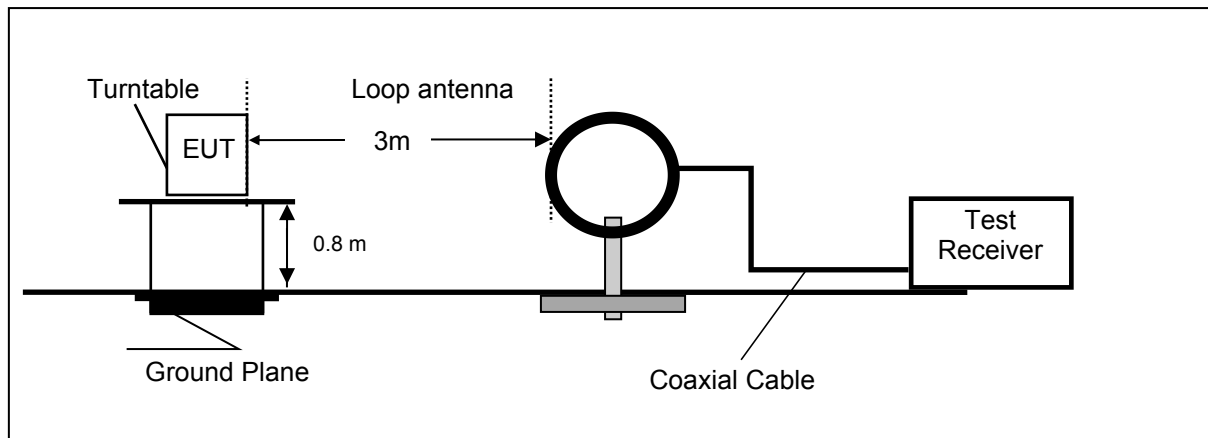

Frequency range 30MHz – 1000MHz

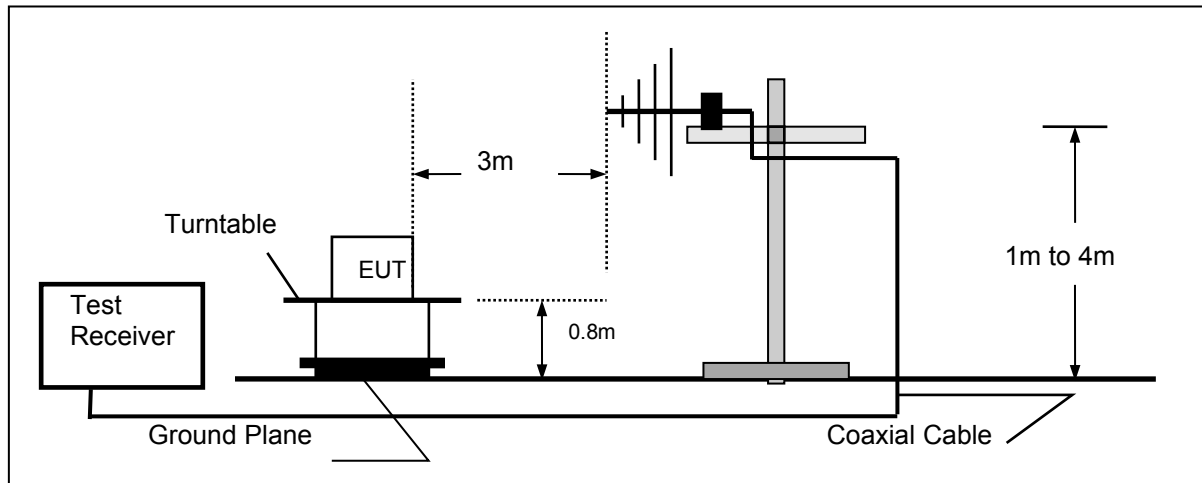

Frequency range above 1GHz-25GHz

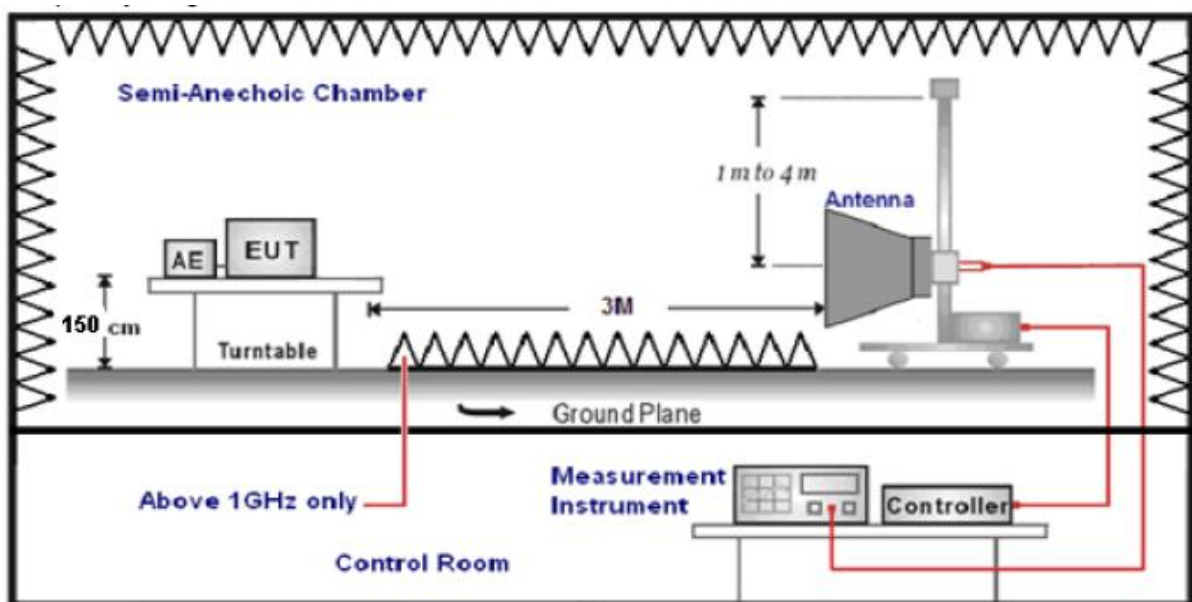

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST RESULTS

Remark: We measured Radiated Emission at GFSK, $\pi/4$ DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK mode.

For 9 KHz-30MHz

Remark: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

For 30MHz-1GHz


Adapter1(GKYPB0200120US)

Vertical

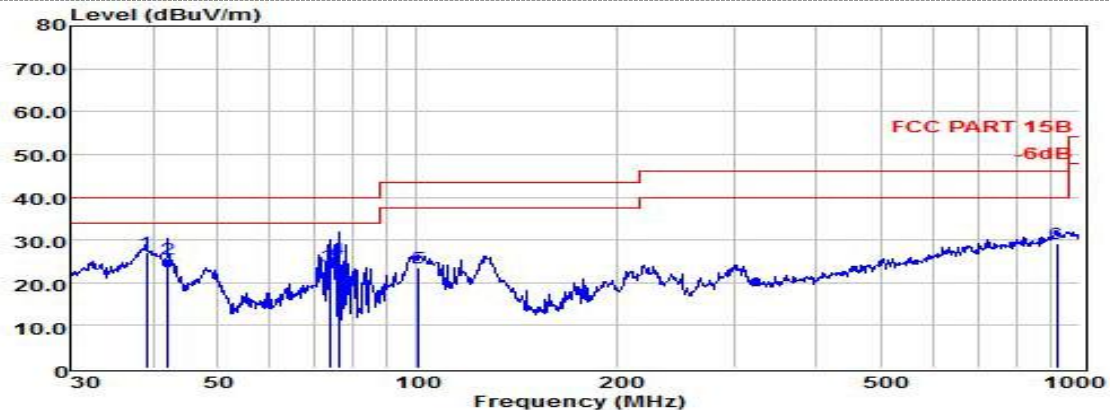

	Freq	ReadAntenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Remark
		dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	39.02	13.50	13.48	0.15	27.13	40.00	-12.87 QP
2	42.15	13.31	12.02	0.13	25.46	40.00	-14.54 QP
3	73.88	16.11	7.69	0.14	23.94	40.00	-16.06 QP
4	76.24	17.74	7.81	0.15	25.70	40.00	-14.30 QP
5	100.58	13.65	9.58	0.17	23.40	43.50	-20.10 QP
6	922.52	2.77	24.63	1.64	29.04	46.00	-16.96 QP


Horizontal

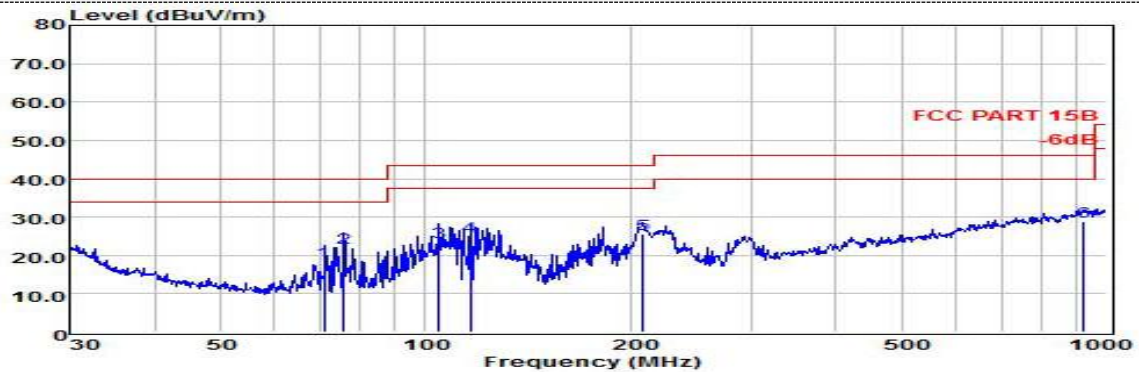

	Freq	ReadAntenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Remark
		dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	71.08	10.67	7.75	0.14	18.56	40.00	-21.44 QP
2	75.98	14.09	7.75	0.15	21.99	40.00	-18.01 QP
3	104.54	13.72	9.45	0.18	23.35	43.50	-20.15 QP
4	116.13	15.82	8.90	0.20	24.92	43.50	-18.58 QP
5	208.58	13.64	11.60	0.35	25.59	43.50	-17.91 QP
6	925.76	2.60	24.70	1.64	28.94	46.00	-17.06 QP


Adapter2(YeS04S-1200200UH)

Vertical

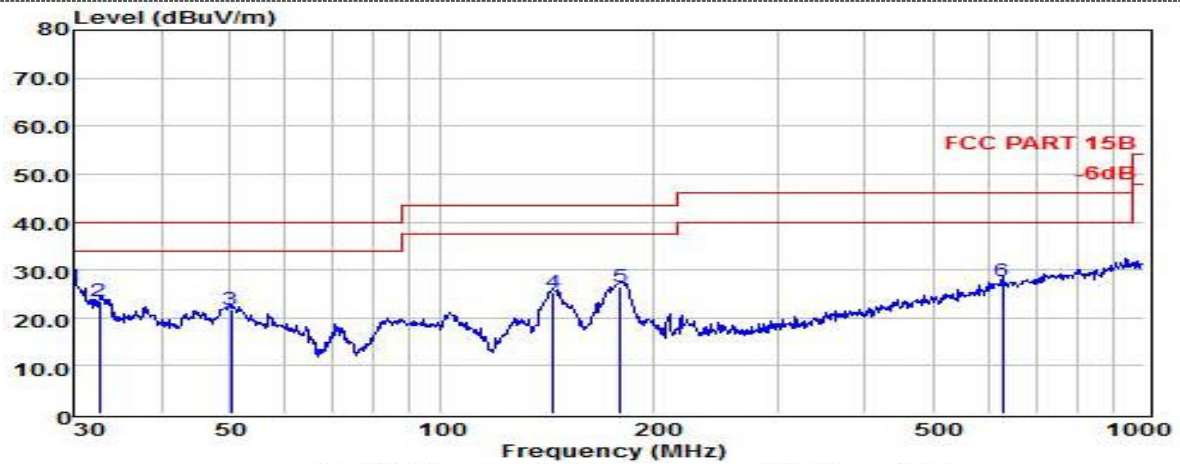

	Freq	ReadAntenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	30.00	7.19	18.80	0.34	26.33	40.00	-13.67 QP
2	32.63	5.92	17.25	0.28	23.45	40.00	-16.55 QP
3	50.23	12.81	8.77	0.12	21.70	40.00	-18.30 QP
4	144.33	16.37	8.66	0.23	25.26	43.50	-18.24 QP
5	180.02	15.93	10.40	0.24	26.57	43.50	-16.93 QP
6	627.27	5.25	21.31	1.16	27.72	46.00	-18.28 QP

Horizontal

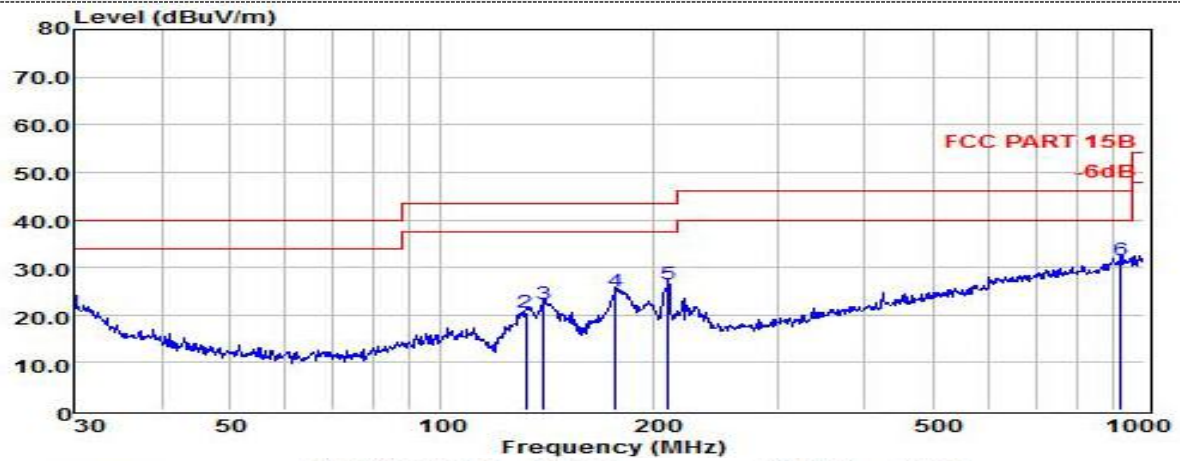

	Freq	ReadAntenna	Cable		Limit	Over	
	MHz	Level	Factor	Loss	Line	Limit	Remark
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	30.00	1.45	18.80	0.34	20.59	40.00	-19.41 QP
2	131.76	11.91	8.35	0.22	20.48	43.50	-23.02 QP
3	139.85	13.53	8.40	0.23	22.16	43.50	-21.34 QP
4	176.89	14.50	10.25	0.24	24.99	43.50	-18.51 QP
5	210.05	14.55	11.60	0.35	26.50	43.50	-17.00 QP
6	925.76	5.16	24.70	1.64	31.50	46.00	-14.50 QP

For 1GHz to 25GHz

[illegible][illegible][illegible][illegible][illegible][illegible]

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier
3. Margin value = Limit value - Emission level.
4. Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

4.3. Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:

The maximum peak conducted output power may be measured using a broadband peak RF power meter.

The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

The maximum Average conducted output power may be measured using a wideband RF power meter with a thermocouple derector or equivalent. The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

TEST RESULTS

Type	Channel	Peak Output power (dBm)	Limit (dBm)	Result
GFSK	Low	2.62	30	Pass
	Mid	2.52		
	High	2.09		
$\pi/4$ DQPSK	Low	1.83	21	Pass
	Mid	1.67		
	High	2.28		
8DPSK	Low	2.30	21	Pass
	Mid	1.62		
	High	2.14		

Note: The test results including the cable lose.

4.4. 20dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.


TEST RESULTS

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	Low	0.9126	Pass
	Mid	0.8878	
	High	0.8859	
8DPSK	Low	1.206	
	Mid	1.207	
	High	1.207	


GFSK Modulation

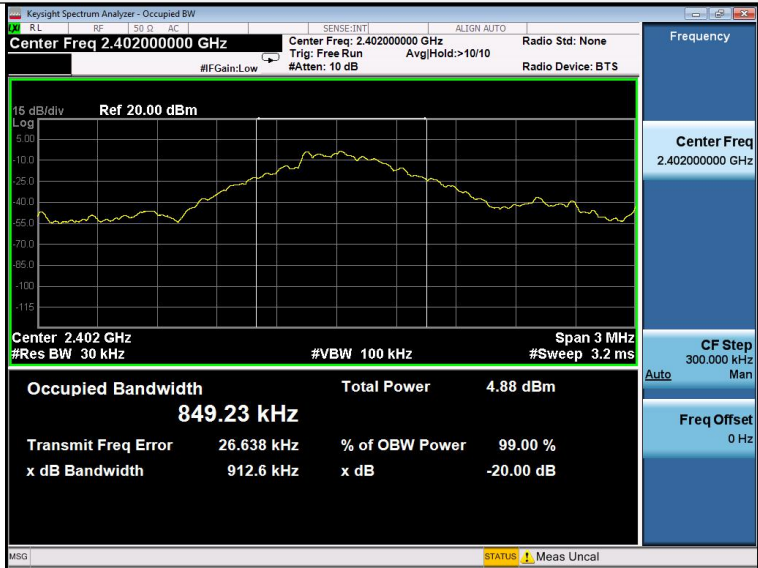

Low

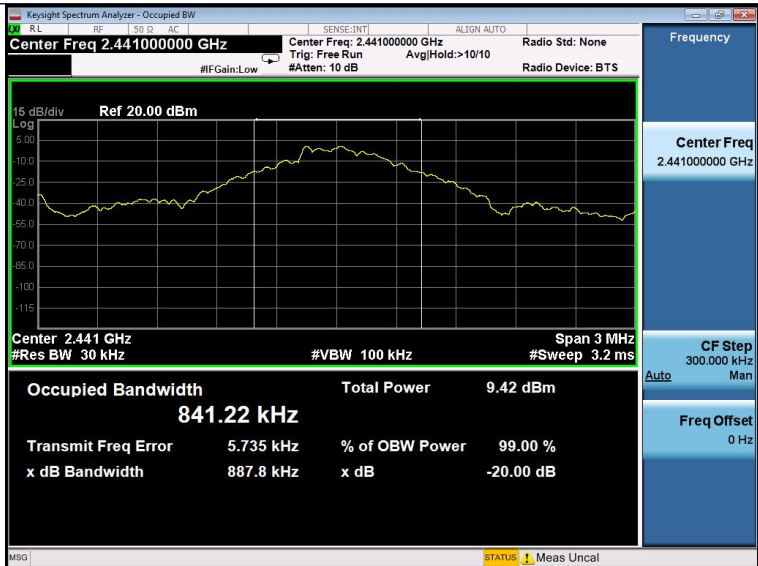


Mid

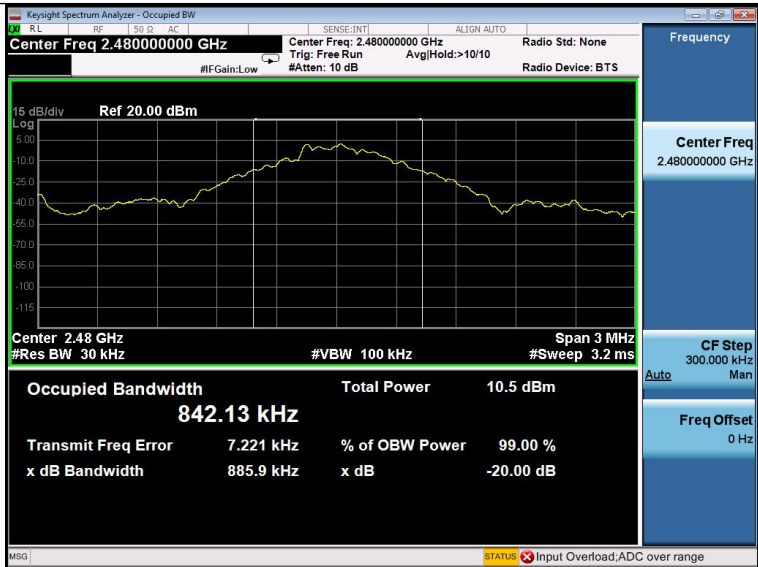


High

8DPSK Modulation

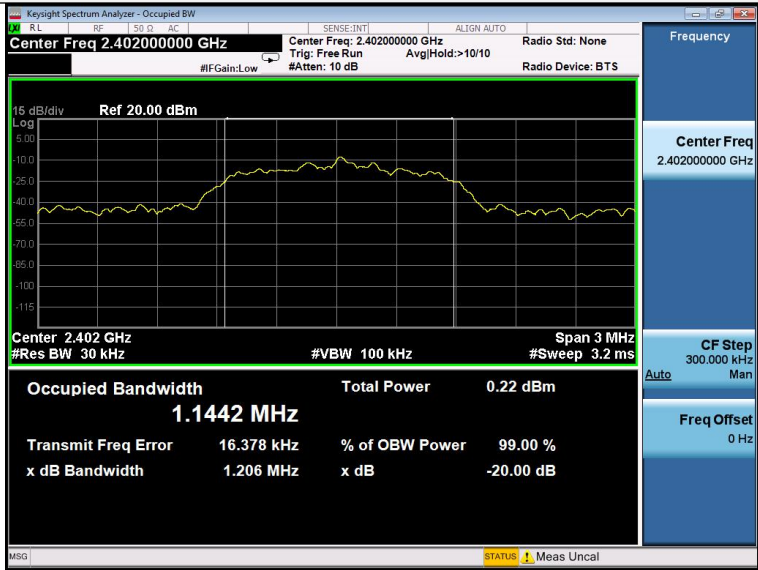

Low

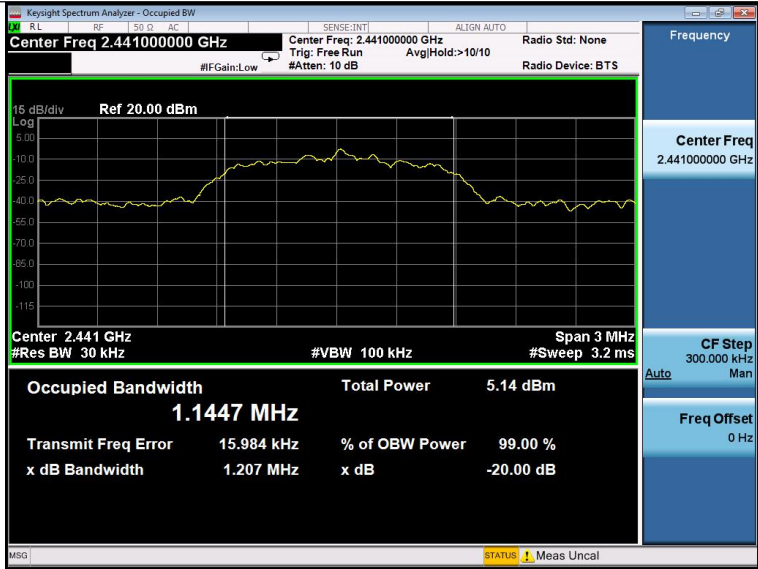

Mid



High

4.5. Frequency Separation

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30KHz and VBW=100KHz.

LIMIT


According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the $2/3 \times 20\text{dB}$ bandwidth of the hopping channel, whichever is greater.

TEST RESULTS

4.5.1 Test Data

Type/Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	0.998	0.913	pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.010	0.888	pass
	Adjacency Channel	2442			
	High Channel	2480	0.986	0.886	pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	0.992	0.804	pass
	Adjacency Channel	2403			
	Mid Channel	2441	1.004	0.805	pass
	Adjacency Channel	2442			
	High Channel	2480	1.008	0.805	pass
	Adjacency Channel	2479			

Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle

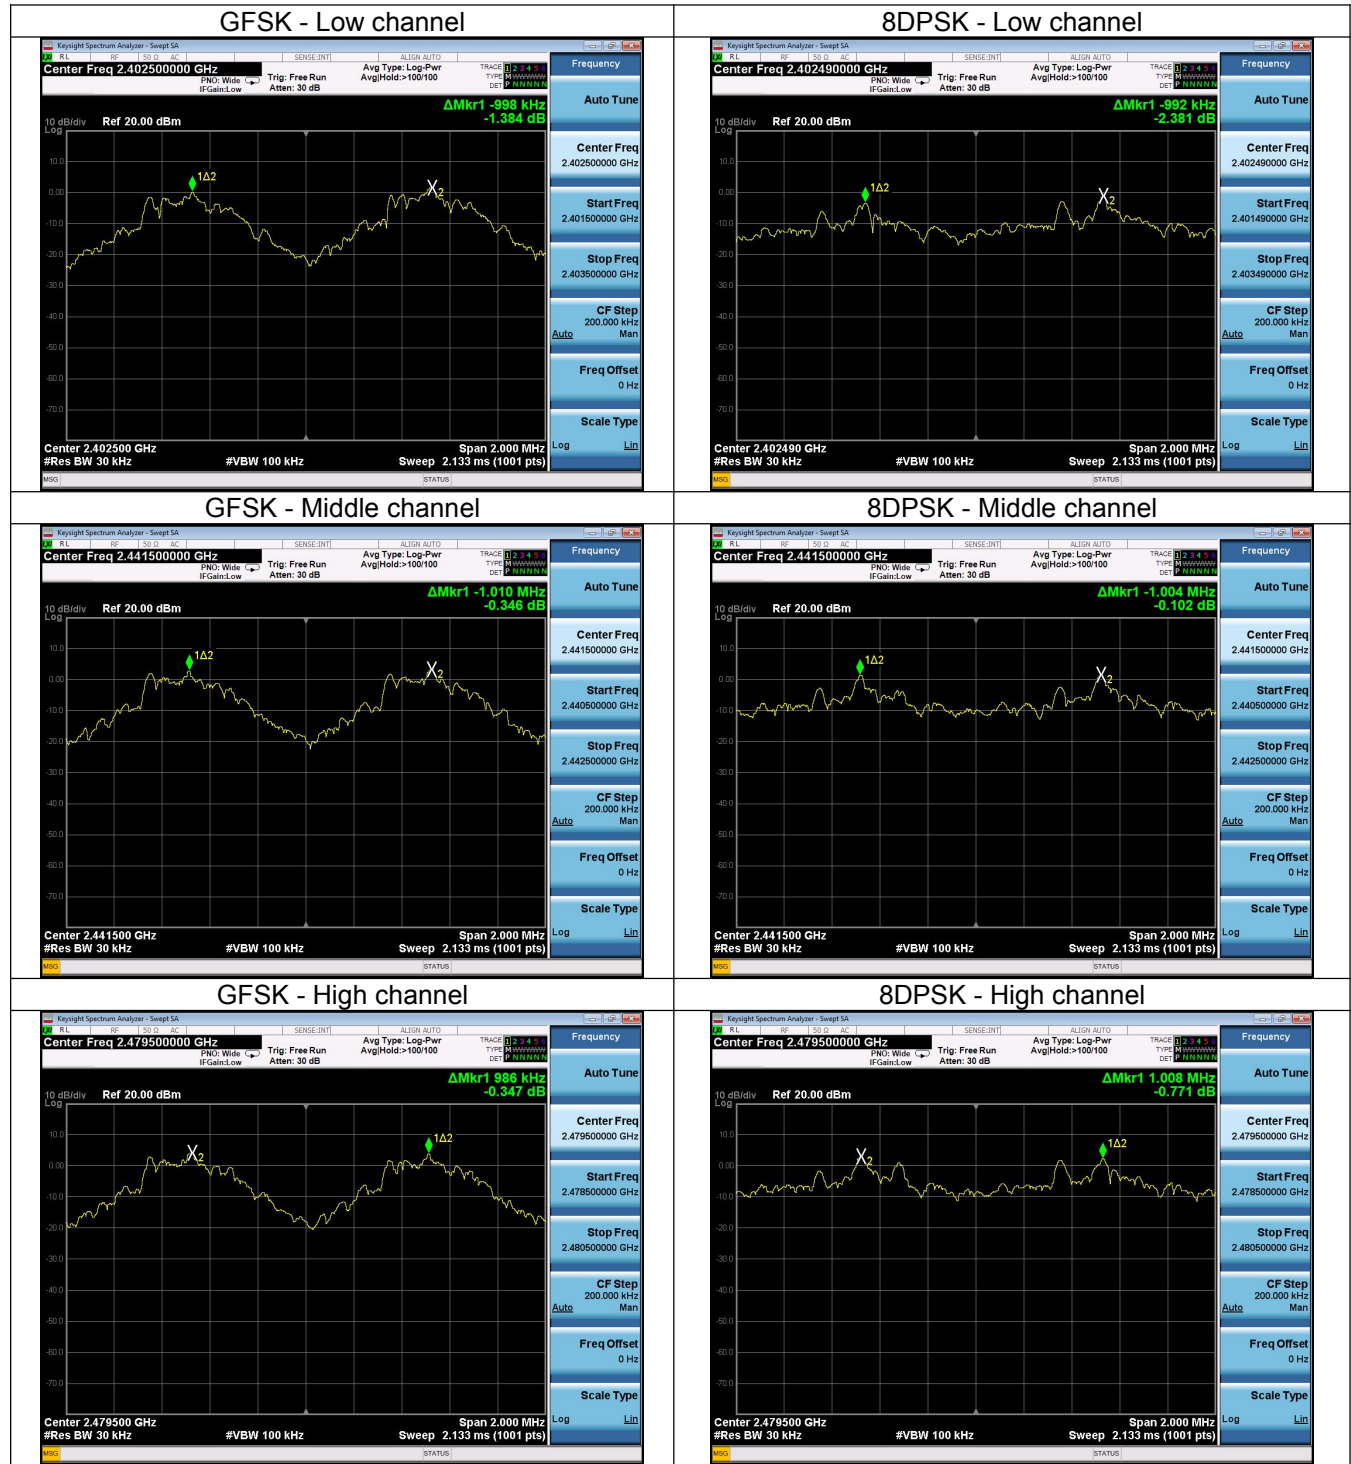


4.6. Band Edge Compliance of RF Emission

TEST REQUIREMENT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST CONFIGURATION

For Radiated

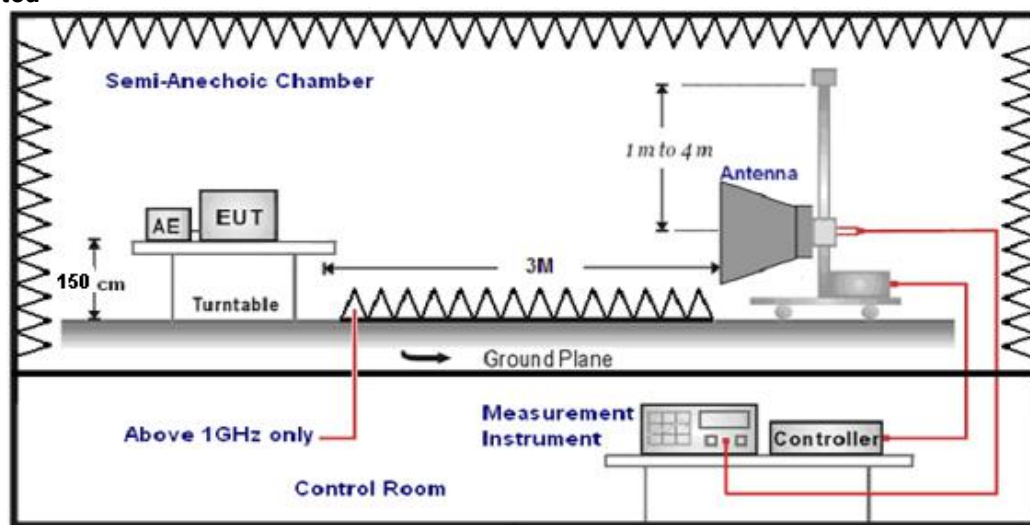

For Conducted



TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

TEST RESULTS

Remark: we measured all conditions(DH1,DH3,DH5) and recorded worst case at DH1.

4.6.1 For Radiated Bandedge Measurement

Remark: we tested radiated bandedge at both hopping and no-hopping modes,recorded worst case at no-hopping mode


GFSK

Frequency(MHz):			2402			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390	51.17	PK	74	22.83	1	122	56.63	27.49	3.32	36.22	-5.46
2390	40.72	AV	54	13.28	1	122	46.18	27.49	3.32	36.22	-5.46
Frequency(MHz):			2402			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2390	50.16	PK	74	24.26	1	97	55.62	27.49	3.32	36.22	-5.46
2390	40.75	AV	54	12.53	1	97	46.21	27.49	3.32	36.22	-5.46
Frequency(MHz):			2480			Polarity:			HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.5	51.01	PK	74	23.15	1	157	56.43	27.45	3.38	36.34	-5.42
2483.5	39.85	AV	54	14.52	1	157	45.27	27.45	3.38	36.34	-5.42
Frequency(MHz):			2480			Polarity:			VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier	Correction Factor (dB/m)
2483.5	51.89	PK	74	22.28	1	324	57.31	27.45	3.38	36.34	-5.42
2483.5	41.74	AV	54	12.64	1	324	47.46	27.45	3.38	36.34	-5.72

4.6.2 For Conducted Bandedge Measurement

Modulation		Frequency Band	Delta Peak to band emission (dBc)	>Limit (dBc)	Result
GFSK	Non-hopping	Left Band	48.96	20	Pass
		Right Band	49.14	20	Pass
	hopping	Left Band	49.78	20	Pass
		Right Band	60.74	20	Pass
8DPSK	Non-hopping	Left Band	42.66	20	Pass
		Right Band	59.57	20	Pass
	hopping	Left Band	42.07	20	Pass
		Right Band	60.04	20	Pass

GFSK

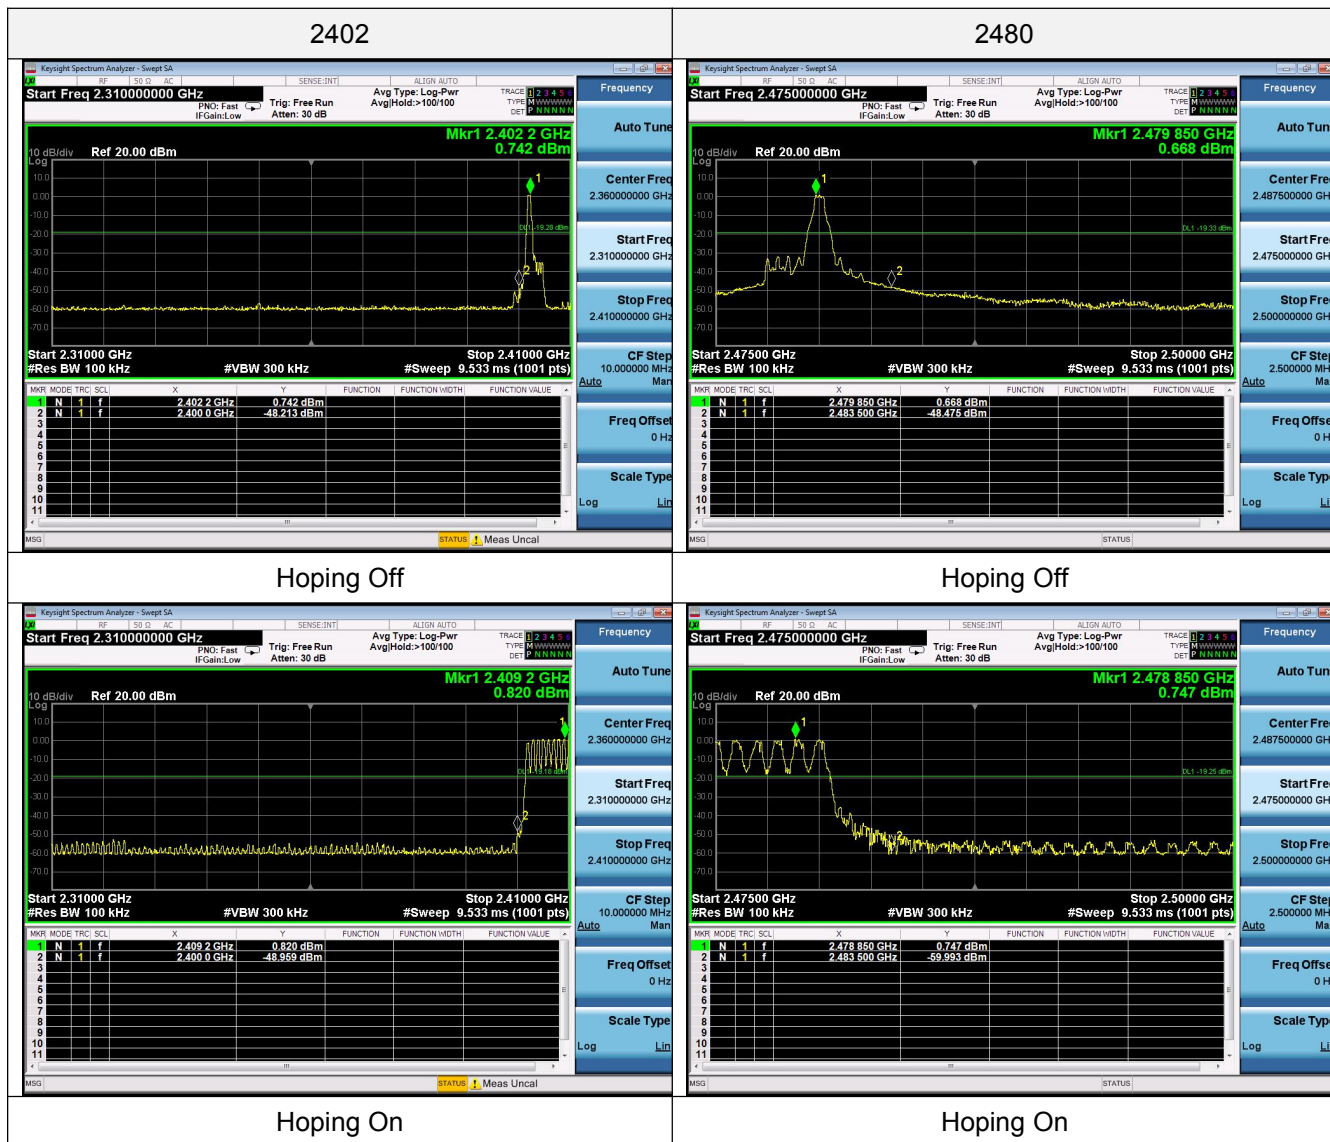

8DPSK

