



Report No.: R26S1002083-U201
Report Version: V01
Issue Date: 2026-09-24

RF MEASUREMENT REPORT

FCC ID: 2ANZQ-RFC88HF
Applicant: Contrinex AG
Product: RLH-C88TA-NHS
Model No.: RLH-C88TA-NHS
Brand Name: Contrinex
FCC Classification: Part 15 Low Power Communication Device Transmitter (DXX)
FCC Rule Part(s): Part 15 Subpart C (Section 15.225)
Result: Complies
Received Date: 2026-08-05
Test Date: 2026-08-09 ~ 2026-09-03

Prepared By:

Wene Yong

Wene Yong

Reviewed By:

Vincent Yu

Vincent Yu

Approved By:

Robin Wu

Robin Wu

The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R26S1002083-U201	V01	Initial Report	2026-09-24	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification.....	6
2. Test Configuration.....	7
2.1. Test Mode	7
2.2. Test Configuration and Software.....	7
2.3. Applied Standards	7
2.4. Test Environment Condition	8
3. Antenna Requirements	9
4. Measuring Instrument.....	10
5. Decision Rules and Measurement Uncertainty	11
5.1. Decision Rules	11
5.2. Measurement Uncertainty	11
6. Test Result	12
6.1. Summary	12
6.2. In-band Emission Measurement	13
6.2.1. Test Limit	13
6.2.2. Test Procedure	13
6.2.3. Test Setting.....	13
6.2.4. Test Setup	14
6.2.5. Test Result.....	14
6.3. Out-band Emission Measurement.....	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting.....	16
6.3.4. Test Setup	17
6.3.5. Test Result.....	17
6.4. 20 dB Bandwidth Measurement	18
6.4.1. Test Limit	18
6.4.2. Test Procedure	18
6.4.3. Test Setting.....	18

6.4.4.	Test Setup	19
6.4.5.	Test Result.....	19
6.5.	Frequency Tolerance Measurement	20
6.5.1.	Test Limit	20
6.5.2.	Test Procedure	20
6.5.3.	Test Setting.....	20
6.5.4.	Test Setup	21
6.5.5.	Test Result.....	21
6.6.	AC Conducted Emissions Measurement	22
6.6.1.	Test Limit	22
6.6.2.	Test Setup	22
6.6.3.	Test Result.....	22
Appendix A - Test Result		23
A.1	In-band Emission Test Result	23
A.2	Out-Band Emission Test Result.....	24
A.3	20 dB Bandwidth Test Result.....	26
A.4	Frequency Tolerance Test Result	27
A.5	AC Conducted Emissions Test Result	28
Appendix B - Test Setup Photograph.....		30
Appendix C - EUT Photograph.....		31

1. General Information

1.1. Applicant

Contrinex AG
Route du Paqui 3
CH-1720 Corminboeuf, Switzerland

1.2. Manufacturer

Contrinex AG
Route du Paqui 3
CH-1720 Corminboeuf, Switzerland

1.3. Testing Facility

Test Site - MRT Suzhou Laboratory

☐ **Laboratory Location (Suzhou - Wuzhong)**

D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China

☒ **Laboratory Location (Suzhou - SIP)**

4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China

☐ **Laboratory Location (Suzhou - Wujiang)**

Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China

Laboratory Accreditations

A2LA: 3628.01

CNAS: L10551

FCC: CN1166

ISED: CN0001

1.4. Product Information

Product Name	RLH-C88TA-NHS
Model No.	RLH-C88TA-NHS
EUT Identification No.	Y-260805-R020-03, Y-260805-R020-04
Brand Name	Contrinex
Hardware Version	2.0.0
Software Version	2.4.3
RFID Specification	13.56 MHz
Operating Temperature	-25 ~ 80 °C
Power Supply	11 ~ 32 VDC
Note: The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer.	

1.5. Radio Specification

Frequency Range	13.56 MHz
Channel Number	1
Modulation Type	ASK


2. Test Configuration

2.1. Test Mode

Test Mode
Mode 1: Transmit by RFID at 13.56 MHz

2.2. Test Configuration and Software

The device was tested per the guidance ANSI C63.10-2020 that was used to reference the appropriate EUT setup for radiated spurious emissions and AC line conducted emission testing.

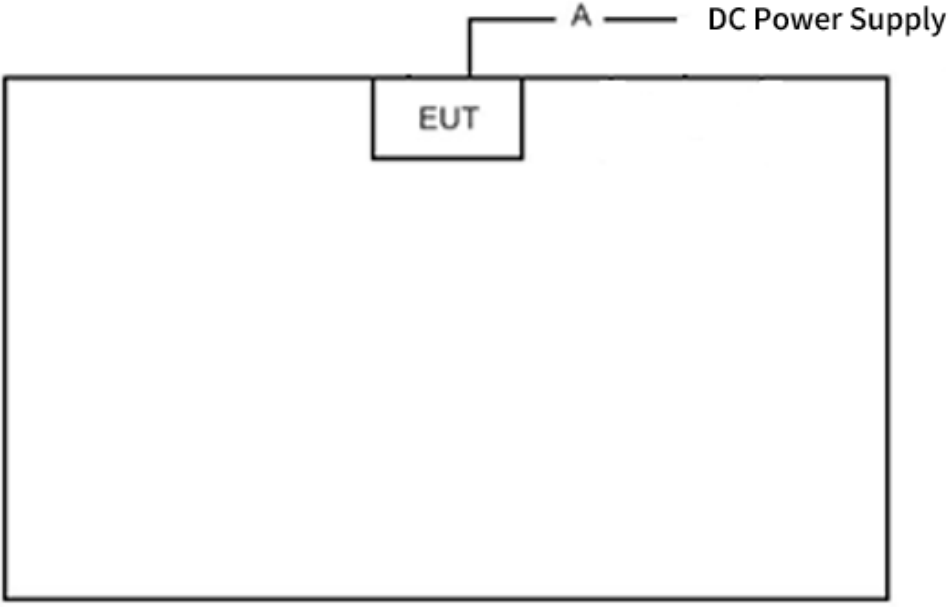Connection Diagram			
			
Cable Type		Cable Description	Length
A	DC Power Cable	Non-Shielded	2 m

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.225
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of this device is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2026-12-15	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2026-10-16	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2027-06-27	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2027-04-24	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2026-08-24	SIP-AC3
					2027-08-23	
Active Loop Antenna	Schwarzbeck	FMZB 1519-60D	MRTSUE07075	1 year	2026-11-18	SIP-AC3/SIP-TR1
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2027-01-17	SIP-TR1
Signal Analyzer	R&S	FSV40	MRTSUE06990	1 year	2026-08-24	SIP-TR1
					2027-08-23	
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2026-10-16	SIP-TR1
DC Power Supply	A-BF	SS-6010KD	MRTSUE06709	N/A	N/A	SIP-TR1
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2029-10-13	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2026-10-08	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2027-04-14	SIP-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2027-04-14	SIP-SR2

Software	Version	Function
e3	230711	RE & CE
Controller_MF 7802BS	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4:2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
9 kHz ~ 150 kHz:	3.59 dB
150 kHz ~ 30 MHz:	3.20 dB
Radiated Emission Measurement	
The maximum measurement uncertainty is evaluated as:	
Coaxial:	9 kHz ~ 30 MHz: 2.56 dB
Coplanar:	9 kHz ~ 30 MHz: 2.55 dB
Horizontal:	30 MHz ~ 200 MHz: 3.48 dB
	200 MHz ~ 1 GHz: 4.17 dB
Vertical:	30 MHz ~ 200 MHz: 4.09 dB
	200 MHz ~ 1 GHz: 5.30 dB
Occupied Bandwidth	
Measuring Uncertainty for a Level of Confidence of 95% ($U = 2 U_c(y)$): 2.6%	

6. Test Result

6.1. Summary

FCC Part Section(s)	Test Description	Test Condition	Verdict
15.225 (a), (b), (c)	In-Band Emission	Radiated ^{Note}	Pass
15.225 (d)	Out-Band Emission		Pass
15.215 (c)	20 dB Bandwidth		Pass
15.225 (e)	Frequency Tolerance		Pass
15.207	AC Conducted Emissions 150 kHz-30 MHz	Line Conducted ^{Note}	Pass

Note: Y-260805-R020-03 was tested for Radiated items, Y-260805-R020-04 was tested for Line Conducted item.

6.2. In-band Emission Measurement

6.2.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.225		
Frequency (MHz)	Distance (m)	Level ($\mu\text{V}/\text{m}$)
13.553 ~ 13.567	30	15848
13.410 ~ 13.553, 13.567 ~ 13.710	30	334
13.110 ~ 13.410, 13.710 ~ 14.010	30	106
Note 1: The lower limit shall apply at the transition frequency.		
Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.		
Note 3: E field strength (dB $\mu\text{V}/\text{m}$) = $20\log$ E field strength ($\mu\text{V}/\text{m}$)		

6.2.2. Test Procedure


ANSI C63.10 - 2020 - Section 6.4

6.2.3. Test Setting

1. RBW = 9 kHz or 10 kHz
2. VBW = $3 \times$ RBW
3. Detector = Peak
4. Trace mode = Max hold
5. Sweep = Auto couple
6. Allow the trace to stabilize

6.2.4. Test Setup

9 kHz ~ 30 MHz Test Setup:

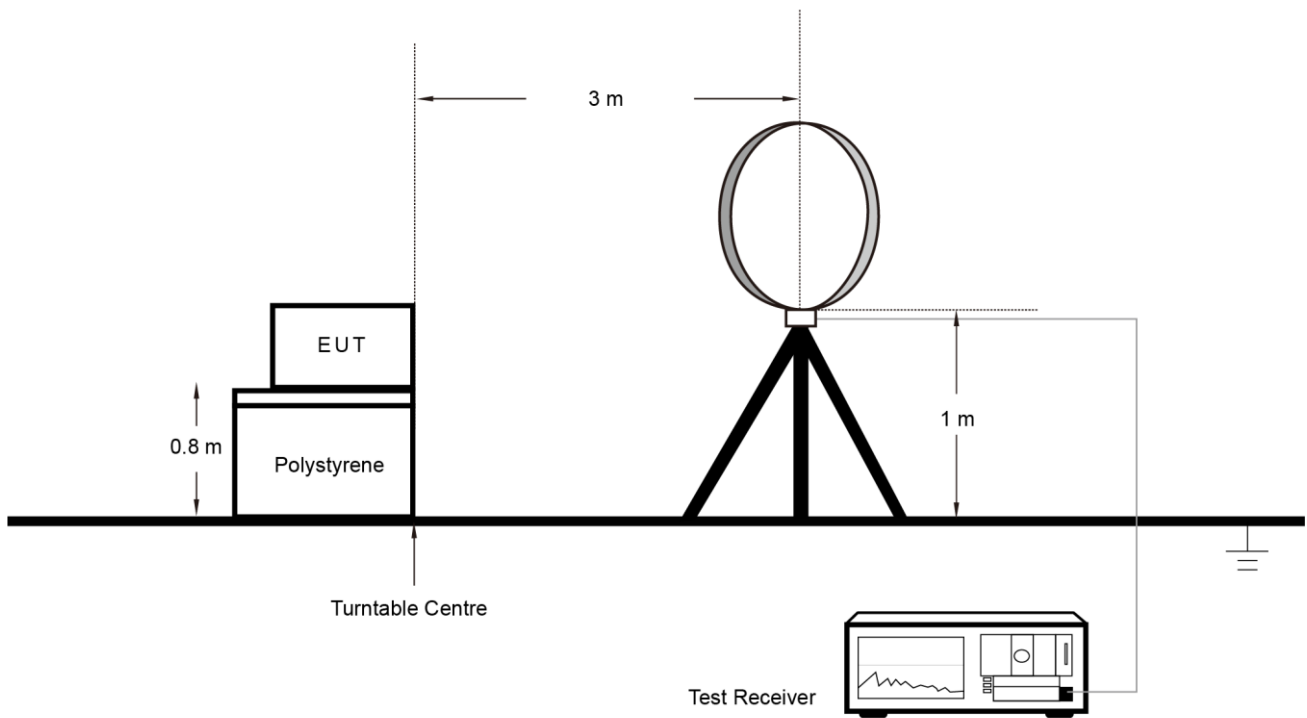

6.2.5. Test Result

Refer to Appendix A.1.

6.3. Out-band Emission Measurement

6.3.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.209		
Frequency (MHz)	Distance (m)	Level ($\mu\text{V/m}$)
0.009 ~ 0.490	300	2400/F (kHz)
0.490 ~ 1.705	30	24000/F (kHz)
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150

Note 1: The lower limit shall apply at the transition frequency.

Note 2: Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Note 3: E field strength (dB $\mu\text{V/m}$) = 20log E field strength ($\mu\text{V/m}$)

6.3.2. Test Procedure

ANSI C63.10 - 2020 - Section 6.3 (General Requirements)

ANSI C63.10 - 2020 - Section 6.4 (Standard test method below 30 MHz)

ANSI C63.10 - 2020 - Section 6.5 (Standard test method above 30 MHz to 1 GHz)

6.3.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz

Peak Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = as specified in Table 1
3. VBW = $3 \times \text{RBW}$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

Quasi-Peak Measurement


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1 MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

6.3.4. Test Setup

9 kHz ~ 30 MHz Test Setup:

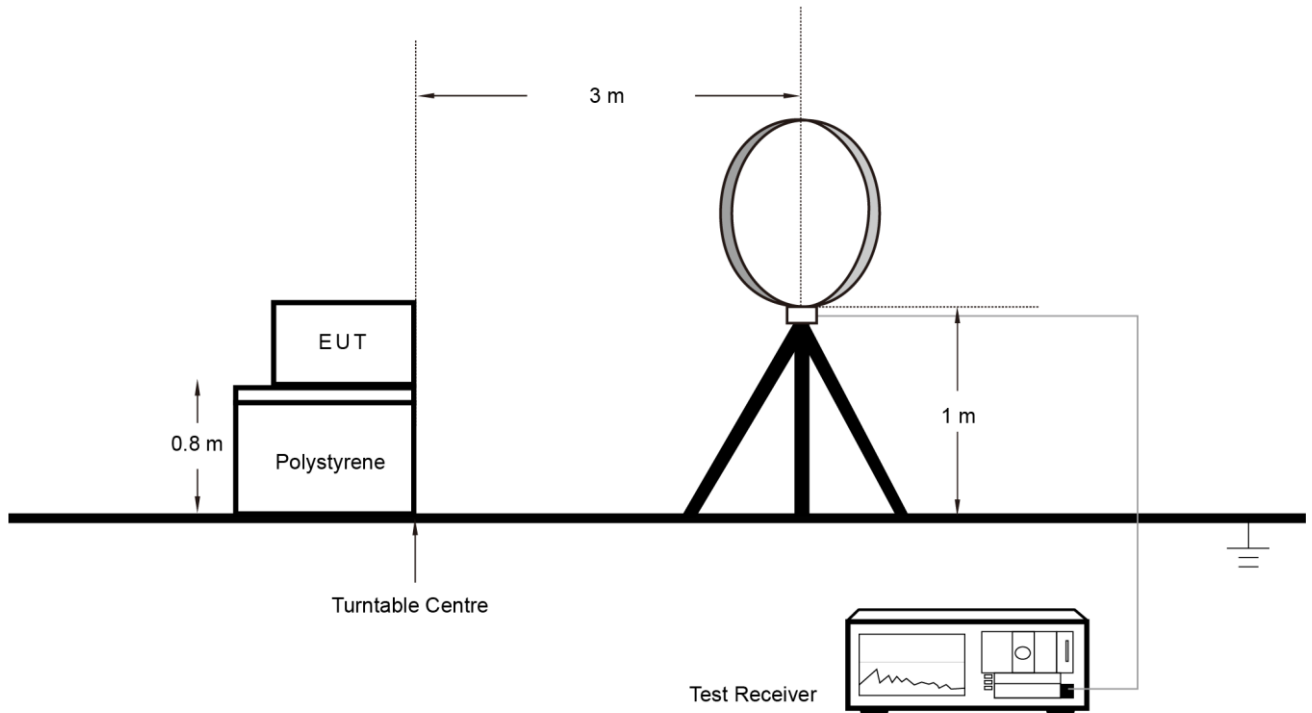

Above 30 MHz Test Setup:

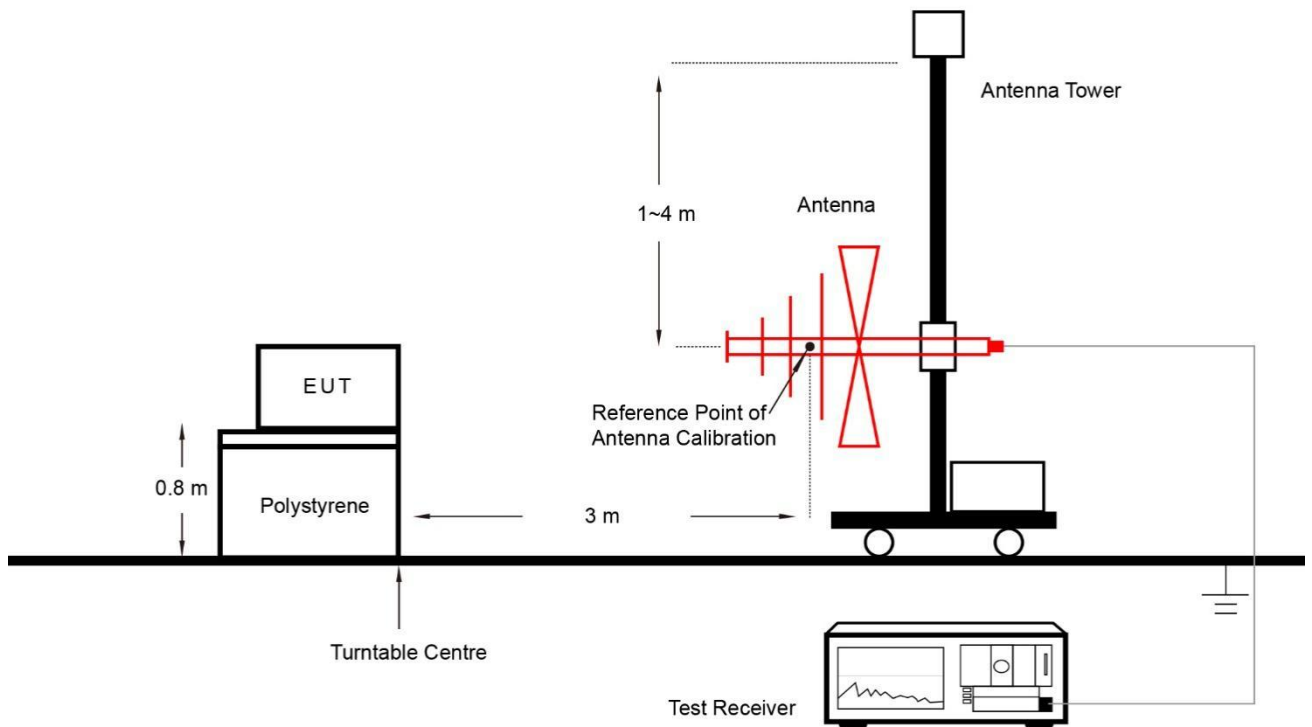

6.3.5. Test Result

Refer to Appendix A.2.

6.4. 20 dB Bandwidth Measurement

6.4.1. Test Limit

The occupied bandwidth is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequency.


6.4.2. Test Procedure

ANSI C63.10-2020 - Section 6.9.2

6.4.3. Test Setting

1. Set RBW $\geq$ 1% to 5% of the 20 dB bandwidth
2. VBW = approximately three times RBW
3. Span = approximately 2 to 5 times the 20 dB bandwidth
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace to stabilize
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.4.4. Test Setup

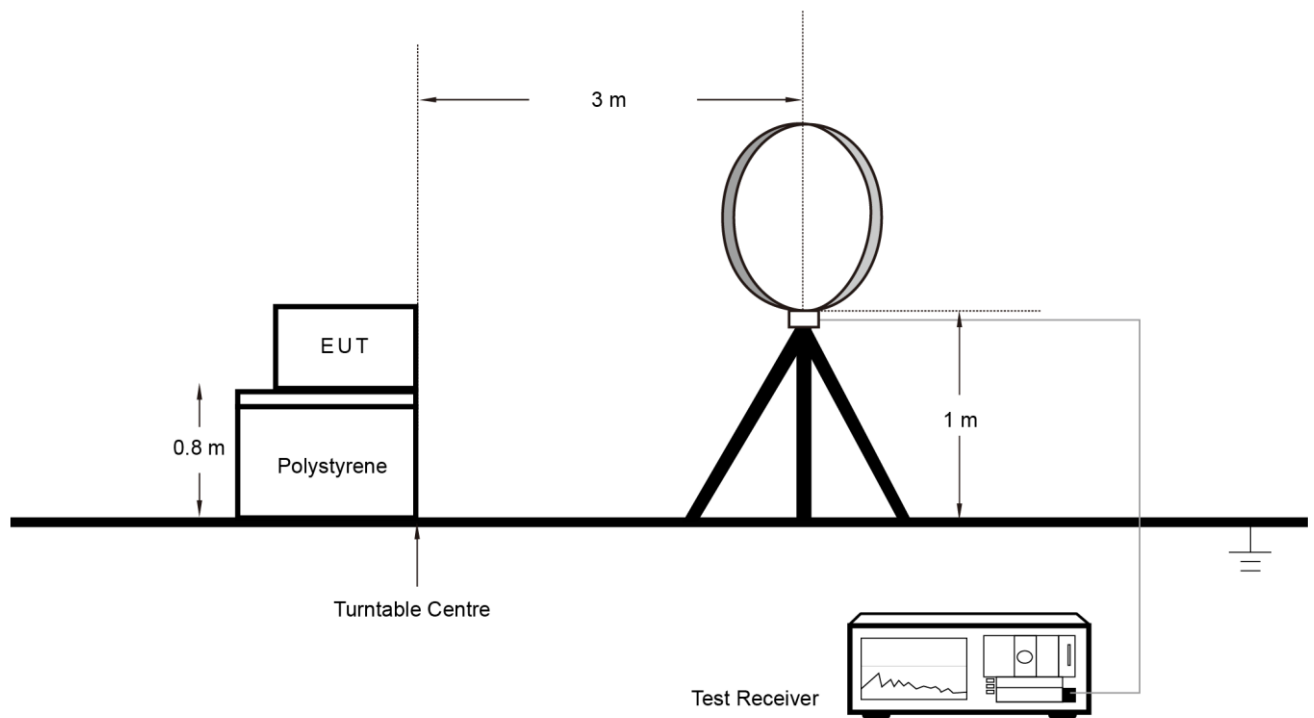

6.4.5. Test Result

Refer to Appendix A.3.

6.5. Frequency Tolerance Measurement

6.5.1. Test Limit

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency.

6.5.2. Test Procedure

ANSI C63.10-2020 - Section 6.8

6.5.3. Test Setting

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20 °C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10 °C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20 °C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change. For hand-carried battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

6.5.4. Test Setup

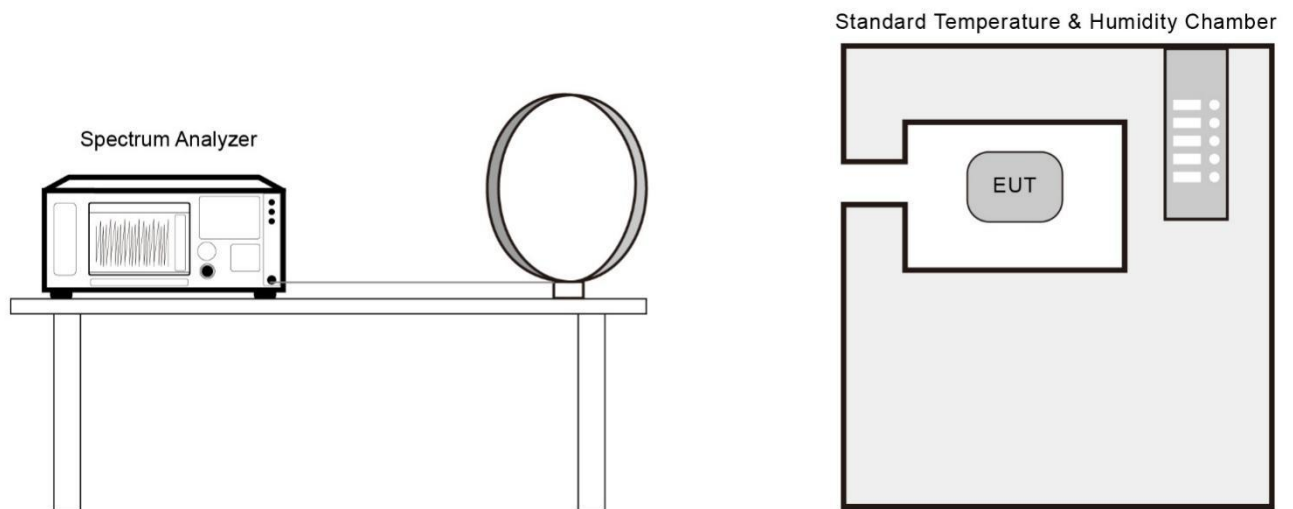

6.5.5. Test Result

Refer to Appendix A.4.

6.6. AC Conducted Emissions Measurement


6.6.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.6.2. Test Setup

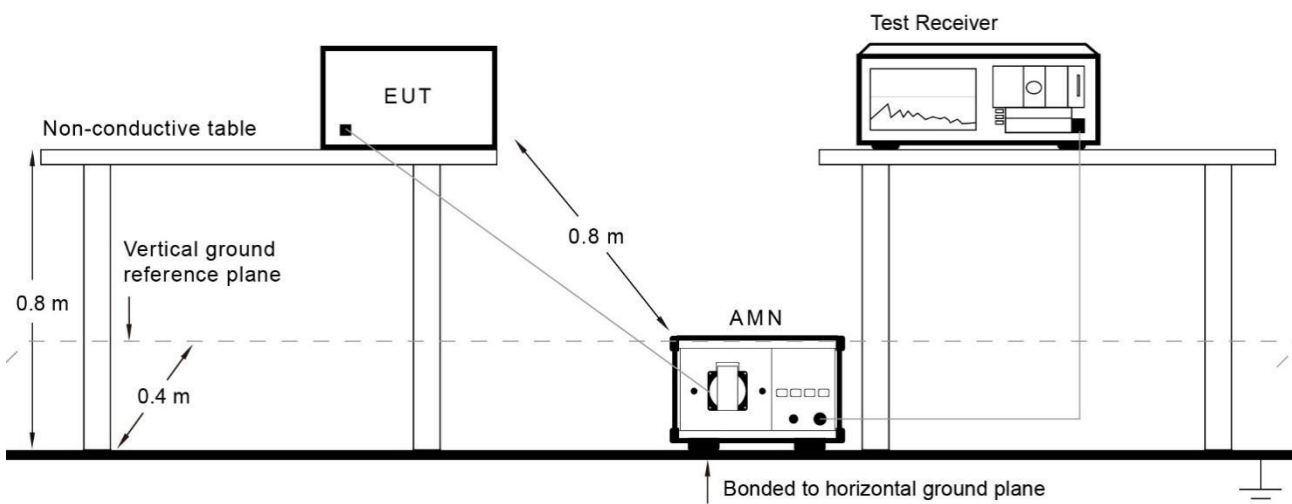

6.6.3. Test Result

Refer to Appendix A.5.

Appendix A - Test Result

A.1 In-band Emission Test Result

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-08-09	Test Mode	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level@3 m (dBμV/m)	Measure Level@30 m (dBμV/m)	Limit (dBμV/m)	Margin [dB]	Detector	Polarization
13.41	25.06	19.71	44.77	4.77	40.51	-35.74	Peak	Coaxial
13.55	45.28	19.72	65.00	25.00	50.48	-25.48	Peak	Coaxial
13.56	51.23	19.72	70.95	30.95	84.00	-53.05	Peak	Coaxial
13.57	45.71	19.72	65.43	25.43	50.48	-25.05	Peak	Coaxial
13.71	22.68	19.73	42.41	2.41	40.51	-38.10	Peak	Coaxial
13.41	22.90	19.71	42.61	2.61	40.51	-37.90	Peak	Coplanar
13.55	44.98	19.72	64.70	24.70	50.48	-25.78	Peak	Coplanar
13.56	50.89	19.72	70.61	30.61	84.00	-53.39	Peak	Coplanar
13.57	45.21	19.72	64.93	24.93	50.48	-25.55	Peak	Coplanar
13.71	24.80	19.73	44.53	4.53	40.51	-35.98	Peak	Coplanar

Notes:

- All measurements were performed using a loop antenna. The antenna was positioned in two orthogonal (coaxial and coplanar) and the position with the highest emission level was recorded.
- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)
- Measurements were tested at 3 m and the data was extrapolated to the specified measurement distance of 30 m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in §15.31 (f)(2).
Extrapolation Factor = $40 \times \log(30/3) = 40$ dB
- All measurements were recorded using an EMI test receiver employing a peak detector.

A.2 Out-Band Emission Test Result

Test Site	SIP-AC3	Test Engineer	Ryan Wang
Test Date	2026-08-09	Test Mode	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level@3 m (dBμV/m)	Measure Level@300 m (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Frequency Range: 9 kHz ~ 490 kHz								
0.02	33.13	-60.28	52.85	-27.15	41.36	-68.51	Peak	Coaxial
0.07	22.72	-60.61	42.11	-37.89	30.19	-68.08	Peak	Coaxial
0.01	40.29	-59.57	60.72	-19.28	47.56	-66.84	Peak	Coplanar
0.23	32.56	-60.65	51.91	-28.09	20.35	-48.44	Peak	Coplanar

Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level@3 m (dBμV/m)	Measure Level@30 m (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
Frequency Range: 490 kHz ~ 30 MHz								
1.27	20.92	-20.66	40.26	0.26	25.55	-25.29	Peak	Coaxial
5.78	21.03	-20.43	40.60	0.60	29.50	-28.90	Peak	Coaxial
0.70	22.37	-20.69	41.68	1.68	30.70	-29.02	Peak	Coplanar
1.73	20.22	-20.62	39.60	-0.40	29.50	-29.90	Peak	Coplanar

Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurements were tested at 3 m and the data was extrapolated to the specified measurement distance of 30 m or 300 m using the square of an inverse linear extrapolation factor (40 dB/decade) as specified in §15.31 (f)(2). Extrapolation Factor = $40 \times \log(300/3) = 80$ dB for range 0.009 ~ 0.490 MHz,
Extrapolation Factor = $40 \times \log(30/3) = 40$ dB for range 0.490 ~ 30 MHz
- Below 30 MHz measurement was performed using a loop antenna. The antenna was positioned in two orthogonal (Coaxial and Coplanar) and the position with the highest emission level was recorded.
- All measurements were recorded using an EMI test receiver employing a peak detector.

Out-Band Emission Above 30 MHz							
Polarization	Frequency (MHz)	Reading Level (dBμV/m)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
Horizontal	40.67	3.89	17.83	21.72	40.00	-18.28	QP
Horizontal	67.79	14.31	16.57	30.88	40.00	-9.12	QP
Horizontal	162.73	1.20	18.12	19.32	43.50	-24.18	QP
Horizontal	271.23	7.32	17.82	25.14	46.00	-20.86	QP
Horizontal	352.57	2.59	19.92	22.51	46.00	-23.49	QP
Horizontal	610.35	3.05	26.08	29.13	46.00	-16.87	QP
Vertical	40.67	15.94	17.83	33.77	40.00	-6.23	QP
Vertical	54.22	19.47	18.25	37.72	40.00	-2.28	QP
Vertical	67.79	17.57	16.57	34.14	40.00	-5.86	QP
Vertical	135.60	17.92	17.38	35.30	43.50	-8.20	QP
Vertical	176.33	15.61	17.16	32.77	43.50	-10.73	QP
Vertical	352.57	11.24	19.92	31.16	46.00	-14.84	QP

Note 1: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 2: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m)

A.3 20 dB Bandwidth Test Result

Test Site	SIP-AC3	Test Engineer	Yuuki Qiu
Test Date	2026-09-03	Test Mode	Mode 1

Frequency (MHz)	20 dB Occupied Bandwidth (kHz)
13.56	53.97




A.4 Frequency Tolerance Test Result

Test Site	SIP-TR1	Test Engineer	Yoniter Yang
Test Date	2026-08-12 & 2026-08-31	Test Mode	Mode 1

Reference Voltage: 24 V						
Deviation Limit: -1356 ~ +1356 Hz						
Voltage (%)	Power Battery	Temp (°C)	Frequency Deviation (Hz)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	24 V	-20	113.643	134.034	120.631	110.276
		-10	109.569	115.373	112.785	133.850
		0	108.818	104.660	104.095	110.906
		+10	109.073	104.143	106.685	111.333
		+20	116.683	114.284	118.945	126.473
		+30	125.551	122.598	139.218	152.440
		+40	134.730	146.158	156.014	176.592
		+50	110.704	160.332	170.701	202.764
85%	20.4 V	+20	109.546	105.250	107.706	112.339
115%	27.6 V	+20	110.896	106.127	108.914	113.440
Test Result			Pass	Pass	Pass	Pass

A.5 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2026-08-19
Temperature	22.4 °C	Humidity	66.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Line
Test Mode	Mode 1		

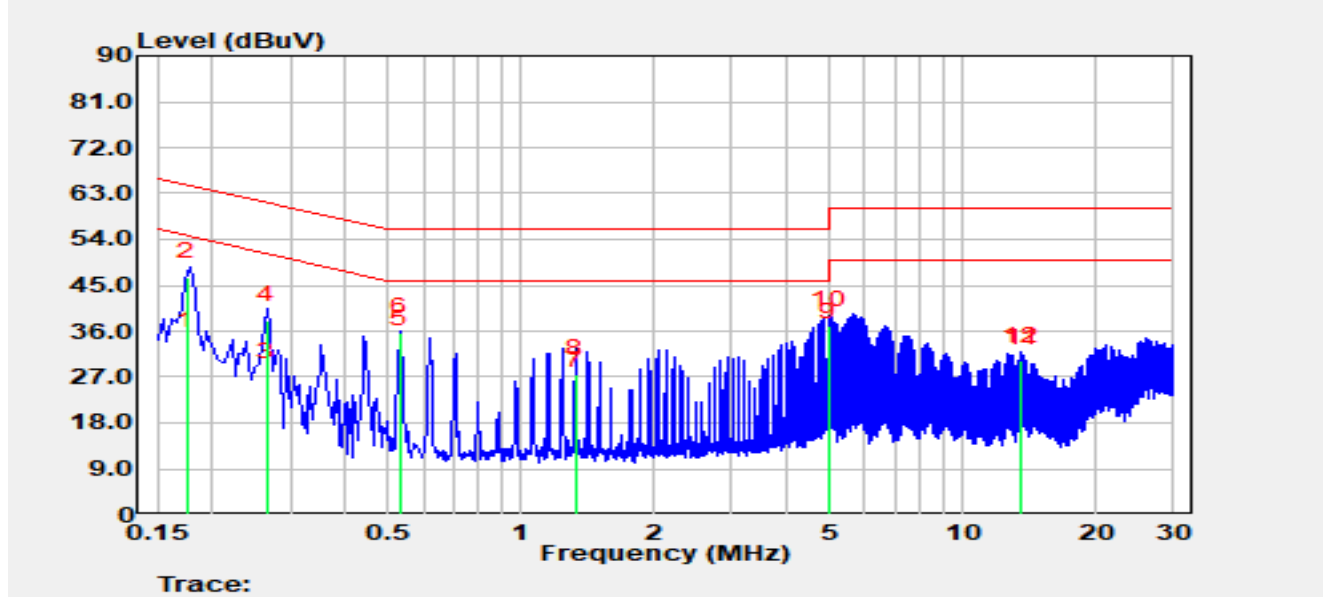


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.175	23.57	9.70	33.27	-21.46	54.72	Average
2		0.175	37.00	9.70	46.69	-18.03	64.72	QP
3		0.266	17.27	9.68	26.94	-24.30	51.24	Average
4		0.266	28.48	9.68	38.16	-23.08	61.24	QP
5		0.530	23.89	9.66	33.55	-12.45	46.00	Average
6		0.530	26.17	9.66	35.83	-20.17	56.00	QP
7		1.329	15.62	9.68	25.30	-20.70	46.00	Average
8		1.329	17.90	9.68	27.59	-28.41	56.00	QP
9	*	4.952	25.00	9.95	34.95	-11.05	46.00	Average
10		4.952	27.13	9.95	37.08	-18.92	56.00	QP
11		13.560	19.68	10.08	29.76	-20.24	50.00	Average
12		13.560	20.12	10.08	30.20	-29.80	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	SIP-SR2	Test Date	2026-08-19
Temperature	22.4 °C	Humidity	66.9%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Poli Cai
Test Voltage	AC 120 V/60 Hz	Polarity	Neutral
Test Mode	Mode 1		

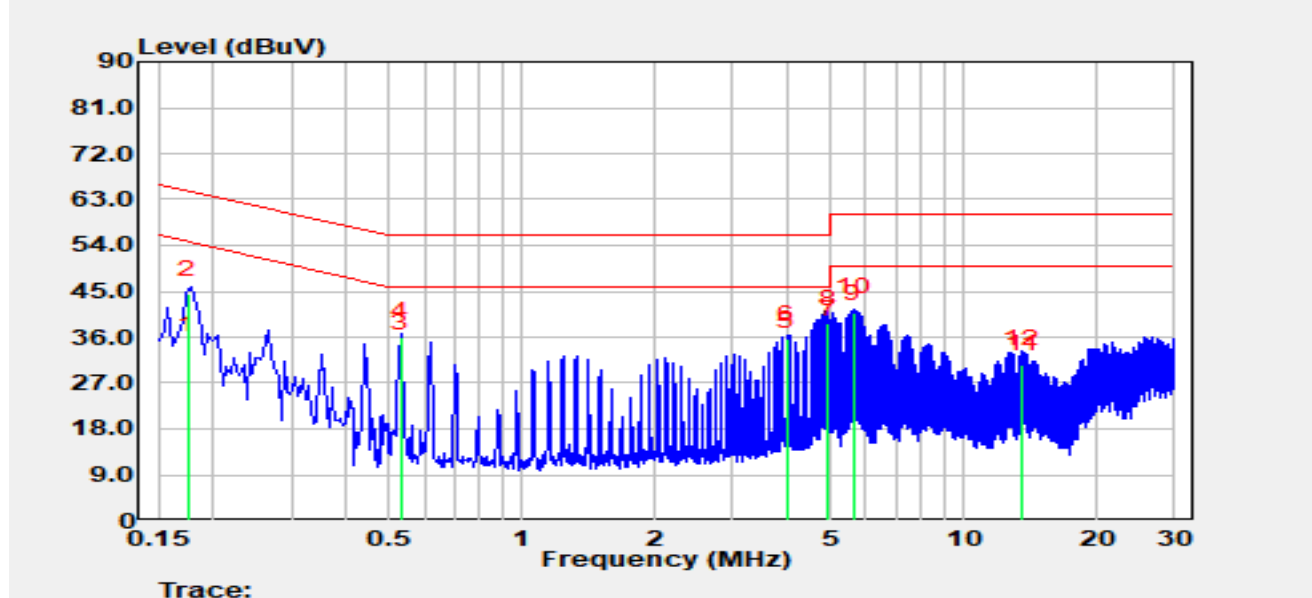

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.175	23.76	9.65	33.42	-21.32	54.73	Average
2		0.175	34.80	9.65	44.45	-20.29	64.73	QP
3		0.530	24.20	9.62	33.82	-12.18	46.00	Average
4		0.530	26.39	9.62	36.01	-19.99	56.00	QP
5		3.968	24.35	9.87	34.23	-11.77	46.00	Average
6		3.968	25.67	9.87	35.54	-20.46	56.00	QP
7	*	4.936	26.57	9.94	36.51	-9.49	46.00	Average
8		4.936	28.72	9.94	38.66	-17.34	56.00	QP
9		5.643	29.54	9.94	39.48	-10.52	50.00	Average
10		5.643	30.89	9.94	40.84	-19.16	60.00	QP
11		13.560	19.79	10.08	29.87	-20.13	50.00	Average
12		13.560	20.59	10.08	30.67	-29.33	60.00	QP

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R26S1002083-UT" file.

Appendix C - EUT Photograph

Refer to "R26S1002083-UE" file.

The End