

BLUETOOTH TEST REPORT

Report Number: 103291273LEX-029.2
Project Number: G103291273

Report Issue Date: 5/17/2018

Product Name: Handheld Remote

Standards: Title 47 CFR Part 15 Subpart C
RSS-247 Issue 2

Tested by:
Intertek Testing Services NA, Inc.
731 Enterprise Drive
Lexington, KY 40510

Client:
SPR Therapeutics, Inc.
22901 Millcreek Blvd, Suite 110
Cleveland, OH 44122

Report prepared by



Brian Lackey, Project Engineer

Report reviewed by



Bryan Taylor, Team Leader



This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TABLE OF CONTENTS

1	<i>Introduction and Conclusion</i>	3
2	<i>Test Summary</i>	3
3	<i>Description of Equipment Under Test.....</i>	4
4	<i>System setup including cable interconnection details, support equipment and simplified block diagram</i>	5
5	<i>Peak Output Power</i>	6
6	<i>Occupied Bandwidth</i>	9
7	<i>Time of Occupancy.....</i>	13
8	<i>Conducted Spurious Emissions.....</i>	16
9	<i>Power Spectral Density</i>	19
10	<i>Radiated Spurious Emissions (Transmitter).....</i>	22
11	<i>Radiated Spurious Emissions (Receiver)</i>	30
12	<i>Antenna Requirement per FCC Part 15.203</i>	34
13	<i>Measurement Uncertainty.....</i>	35
14	<i>Revision History</i>	36

1 Introduction and Conclusion

The tests indicated in section 2 were performed on the product constructed as described in section 3. The remaining test sections are the verbatim text from the actual data sheets used during the investigation. These test sections include the test name, the specified test method, a list of the actual test equipment used, documentation photos, results and raw data. No additions, deviations, or exclusions have been made from the standard(s) unless specifically noted.

Based on the results of our investigation, we have concluded the product tested complied with the requirements of the standard(s) indicated. The results obtained in this test report pertain only to the item(s) tested.

The INTERTEK-Lexington is located at 731 Enterprise Drive, Lexington Kentucky, 40510. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1 and ANSI C63.4. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters. The test site is listed with the FCC under registration number 485103. The test site is listed with Industry Canada under site number IC 2042M-1.

2 Test Summary

Page	Test full name	FCC Reference	IC Reference	Result
6	Peak Output Power	§ 15.247(b)(1)	RSS-247 § 5.4(b)	Pass
9	Occupied Bandwidth	§ 15.247(a)(1)	RSS-247 § 5.2(a)	Pass
13	Time of Occupancy	§ 15.247(a)(1)(iii)	RSS-247 § 5.1(d)	Pass
16	Conducted Spurious Emissions	§ 15.247(d)	RSS-Gen § 7.1.3	Pass
19	Power Spectral Density	§ 15.247(e)	RSS-247 § 5.2(b)	Pass
19	Radiated Spurious Emissions (Transmitter)	§ 15.247(d), § 15.209, and § 15.205	RSS-247 § 5.5	Pass
30	Radiated Spurious Emissions (Receiver)	§ 15.109	RSS-Gen § 7.1.2	Pass
-	AC Mains Conducted Emissions	§ 15.107, § 15.207	RSS-Gen § 8.8	NA ¹
34	Antenna Requirement per FCC Part 15.203	§ 15.203	RSS-Gen § 8.3	Pass

¹ Test is not applicable. Device does not connect to AC mains.

3 Description of Equipment Under Test

Equipment Under Test	
Manufacturer	SPR Therapeutics, Inc.
Model Number	9620
Serial Number	17440004
Receive Date	11/10/2017
Test Start Date	11/10/2017
Test End Date	11/17/2017
Device Received Condition	Good
Test Sample Type	Production
Frequency Band	2402 – 2480MHz
Mode(s) of Operation	Bluetooth Low Energy (BTLE)
Modulation Type	DTS
Transmission Control	Test Commands
Maximum Output Power	3.85dBm
Test Channels	0, 19, 39
Antenna Type (15.203)	Internal
Operating Voltage	Battery

Description of Equipment Under Test
This is a stop-watch like wireless patient remote control for the EPG

Operating modes of the EUT:

No.	Descriptions of EUT Exercising
1	Bluetooth low energy (BTLE) transmitting on low, mid, and high channels
2	Receive / idle mode

4 System setup including cable interconnection details, support equipment and simplified block diagram

4.1 EUT Block Diagram:



Handheld
Remote

4.2 Cables:

No cables were used in this test configuration.

4.3 Support Equipment:

Support Equipment			
Description	Manufacturer	Model Number	Serial Number
Laptop	HP	-	-

5 Peak Output Power

5.1 Test Limits

§ 15.247(b): The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

5.2 Test Procedure

ANSI C63.10: 2013. The peak output power was measured using the marker to peak function of the spectrum analyzer.

5.3 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESI26	9/20/2017	9/20/2018

5.4 Test Results

The device was found to be **compliant**. The output power was less than the limit.

5.5 Test Conditions


Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery

Test Date: 11/10/2017
Ambient Temperature: 22.1C
Relative Humidity: 35.2%
Atmospheric Pressure: 992.0mbar


5.6 Test Data

Channel	Frequency (MHz)	Output Power (mW)	Limit (mW)	Pass / Fail
0	2402	2.43	125	Pass
19	2440	2.21	125	Pass
39	2480	2.28	125	Pass


Max Output Power Channel 0

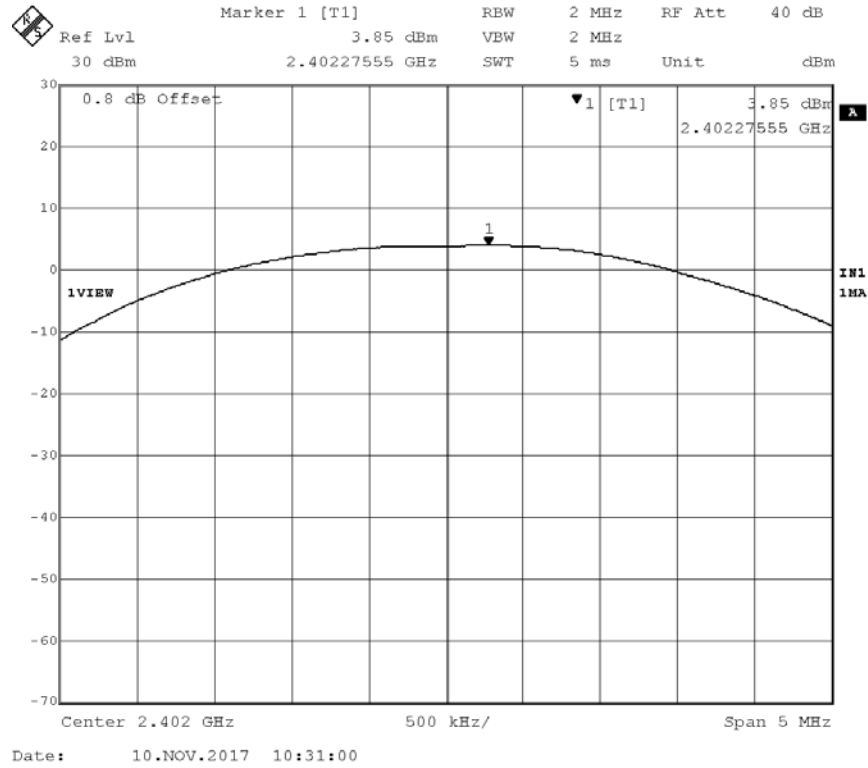

Max Output Power Channel 19

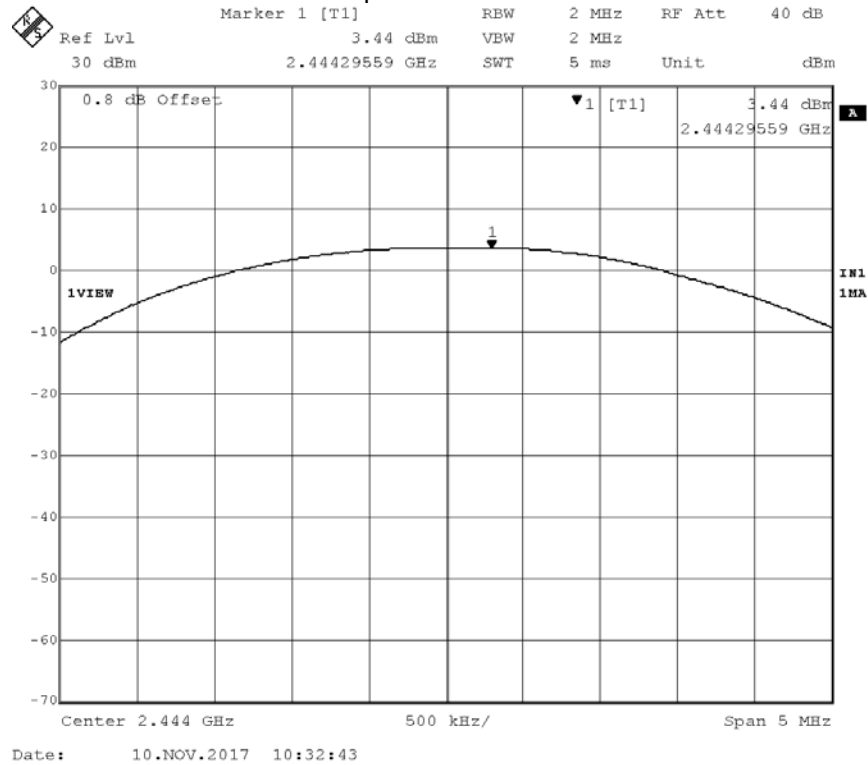

Max Output Power Channel 39

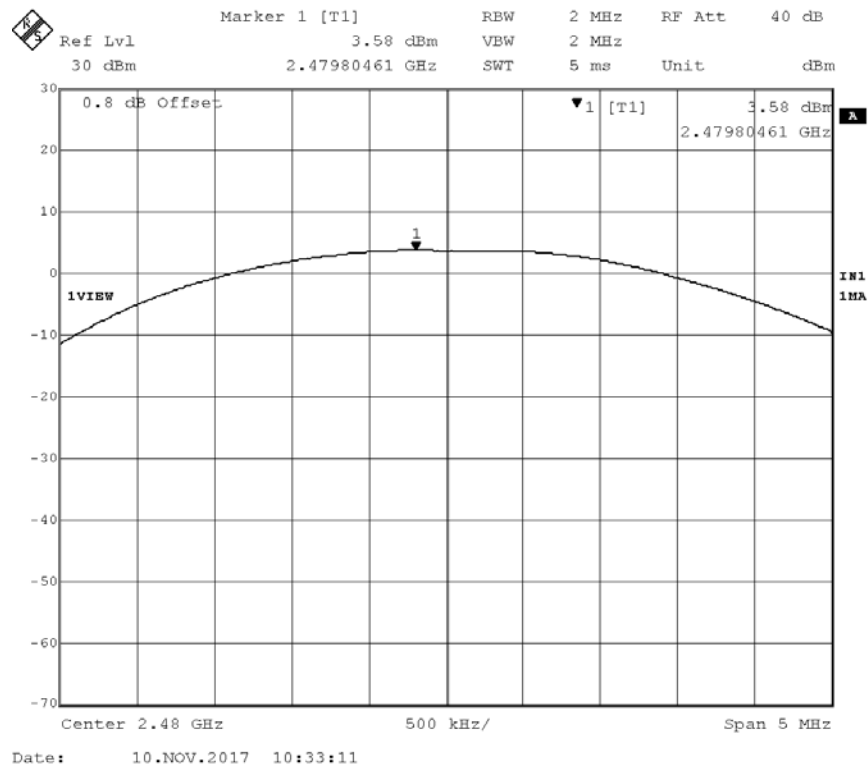

6 Occupied Bandwidth

6.1 Test Limits

§ 15.247(a): Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

6.2 Test Procedure

ANSI C63.10: 2013.

6.3 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ES126	9/20/2017	9/20/2018

6.4 Test Results

The 20dB bandwidth measurements are shown below. A 99% bandwidth measurement was also performed.

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)
0	2402	0.731	1.222
19	2440	0.721	1.222
39	2480	0.711	1.232


6.5 Test Conditions

Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery


Test Date: 11/10/2017
Ambient Temperature: 22.1C
Relative Humidity: 35.2%
Atmospheric Pressure: 992.0mbar

6.6 Test Data


6dB Bandwidth (left) and 20dB Bandwidth (right), Channel 0

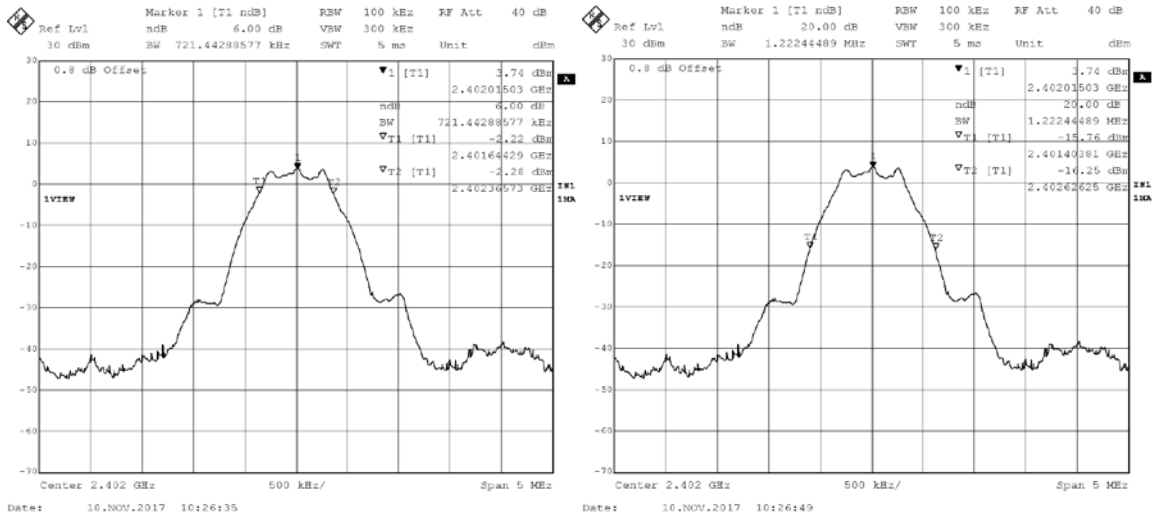


6dB Bandwidth (left) and 20dB Bandwidth (right), Channel 19

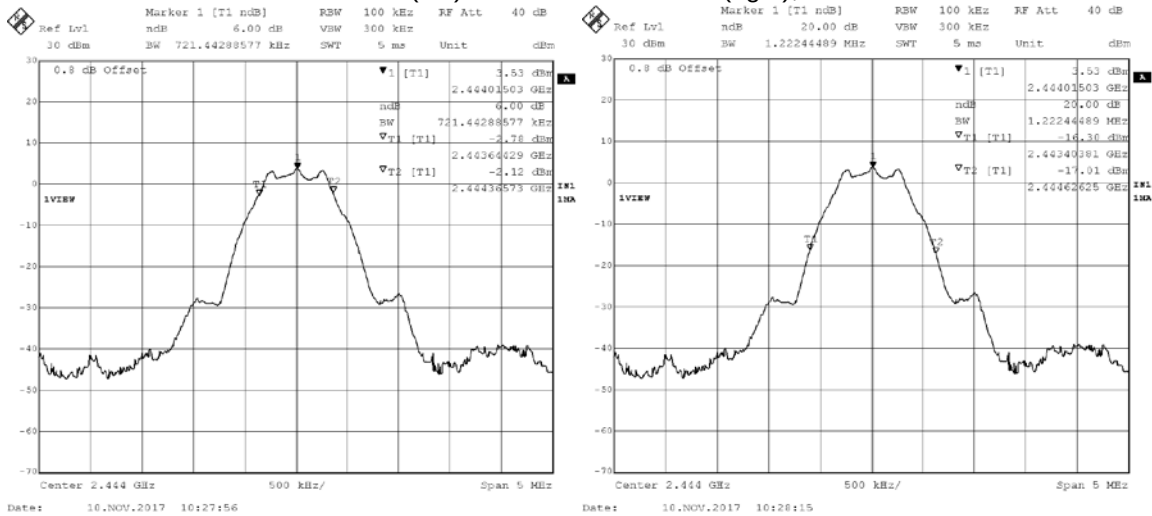


6dB Bandwidth (left) and 20dB Bandwidth (right), Channel 39

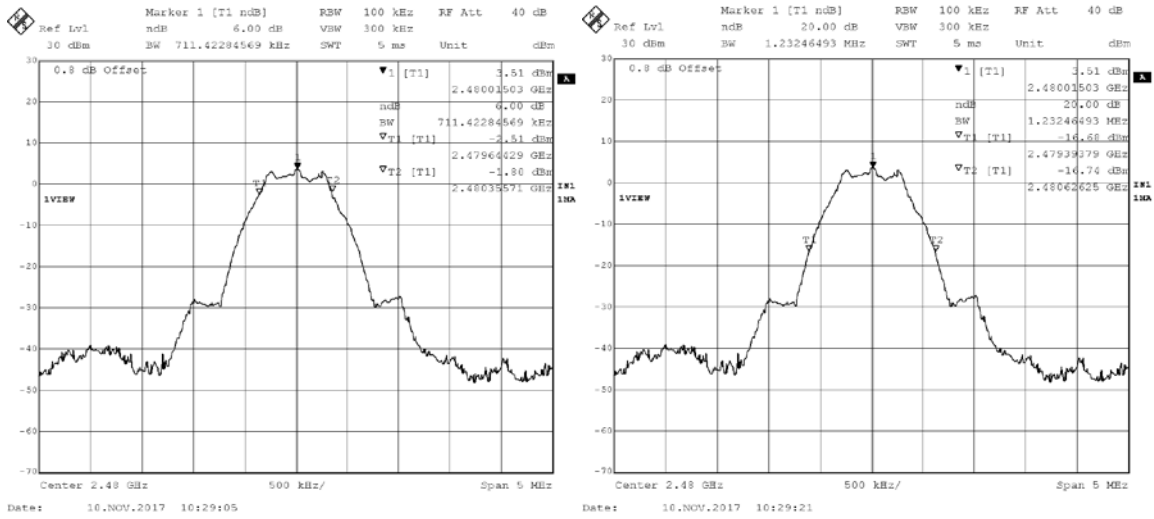


99% Bandwidth, Channel 0

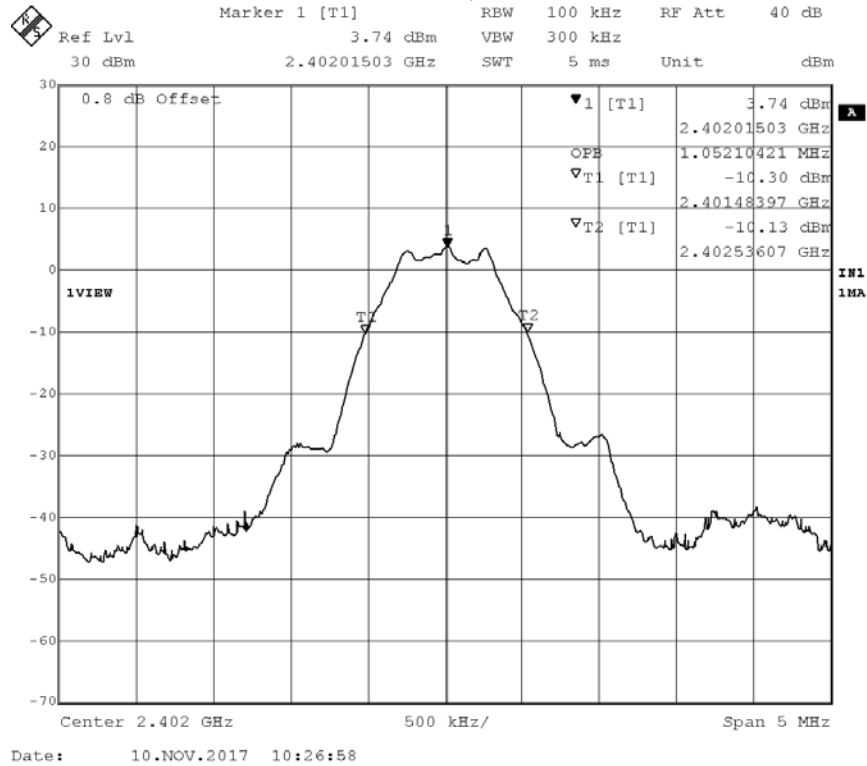

99% Bandwidth, Channel 19

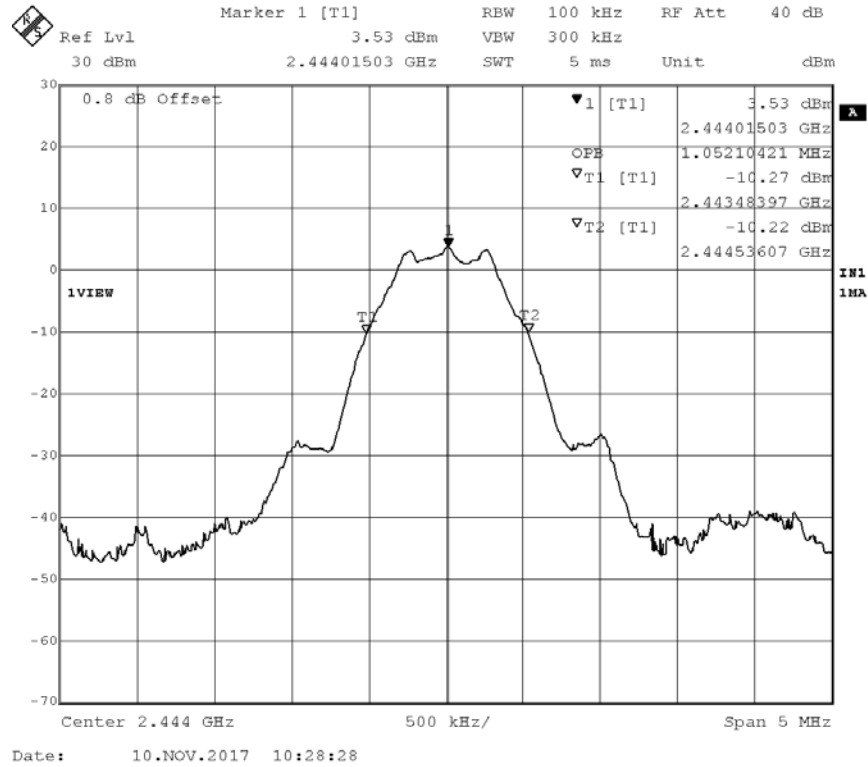

99% Bandwidth, Channel 39

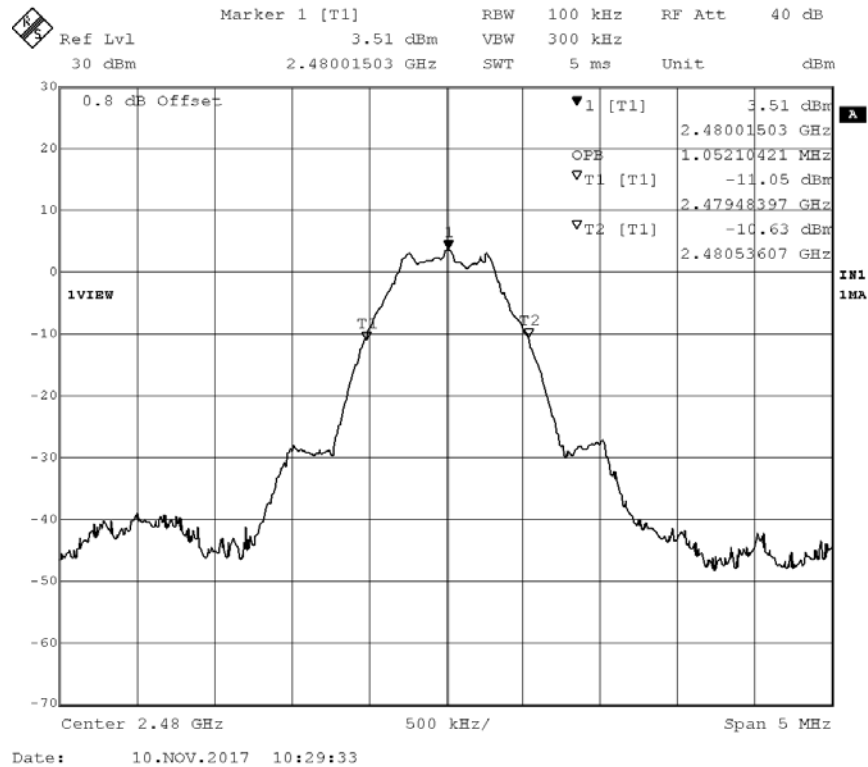

7 Time of Occupancy

7.1 Test Limits

§ 15.247(a): Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1)(iii) Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used

7.2 Test Procedure

ANSI C63.10: 2013.

7.3 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESI26	9/20/2017	9/20/2018

7.4 Test Results

The device was found to be **compliant**. The time of occupancy was less than the limit.

7.5 Test Conditions


Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery

Test Date: 11/14/2017
Ambient Temperature: 21.2C
Relative Humidity: 29.7%
Atmospheric Pressure: 985.4mbar


7.6 Test Data

Mode	Number of Transmissions in a 16s Frame (80 Hopping Ch x 0.4s)	Transmission Time (ms)	Result (ms)	Limit (ms)
BTLE	2 (times in 0.4sec) * (16sec / 0.4sec) = 80	0.2315	18.52	400
Time of occupancy = Transmission Time x Number of Transmissions				

Dwell Time, BTLE

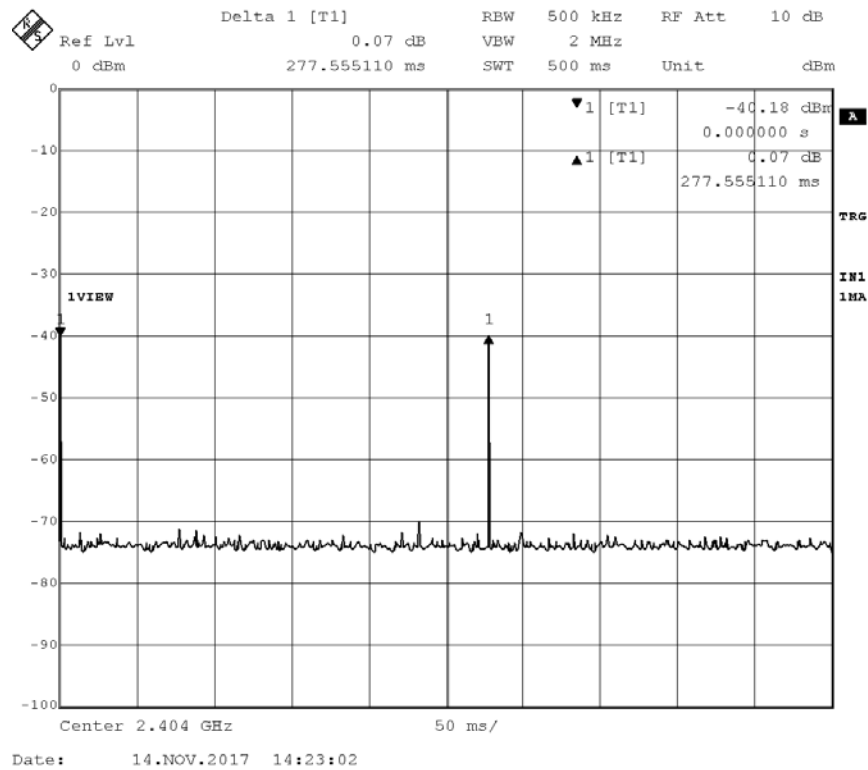

Dwell Time (Single Pulse)

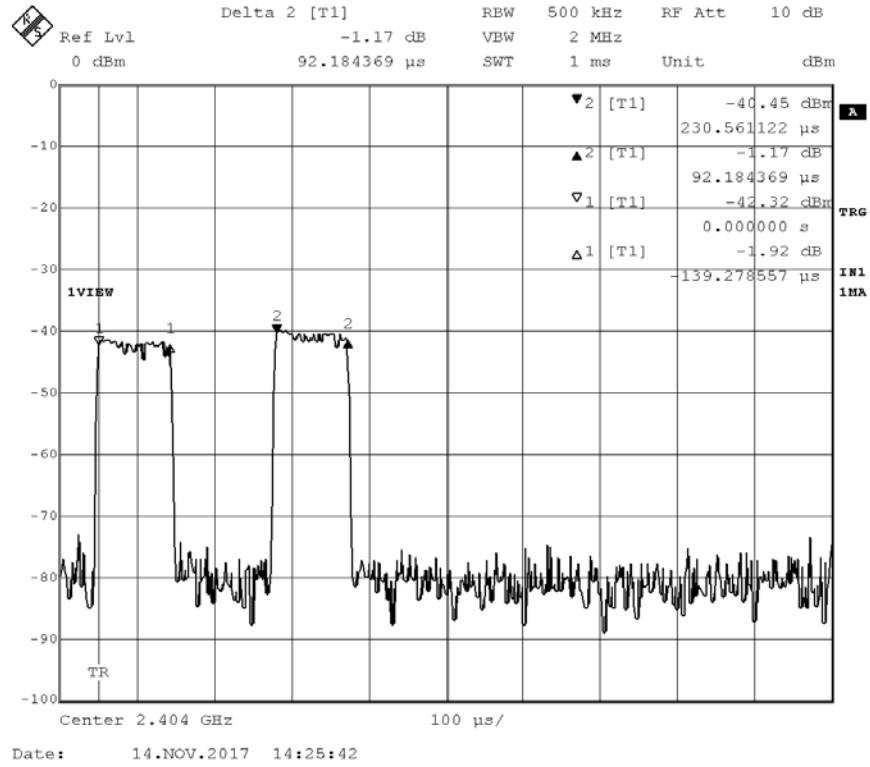

8 Conducted Spurious Emissions

8.1 Test Limits

§ 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.2 Test Procedure

ANSI C63.10: 2013.

8.3 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ESI26	9/20/2017	9/20/2018

8.4 Test Results

The device was found to be **compliant**. The following plots show that there are no conducted spurious emissions exceeding the 20dB down criteria. Plots are also presented showing the band edge compliance.


8.5 Test Conditions

Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery


Test Date: 11/10/2017
Ambient Temperature: 22.1C
Relative Humidity: 35.2%
Atmospheric Pressure: 992.0mbar

8.6 Test Data


Conducted Spurious Emissions at Antenna Port Channel 0

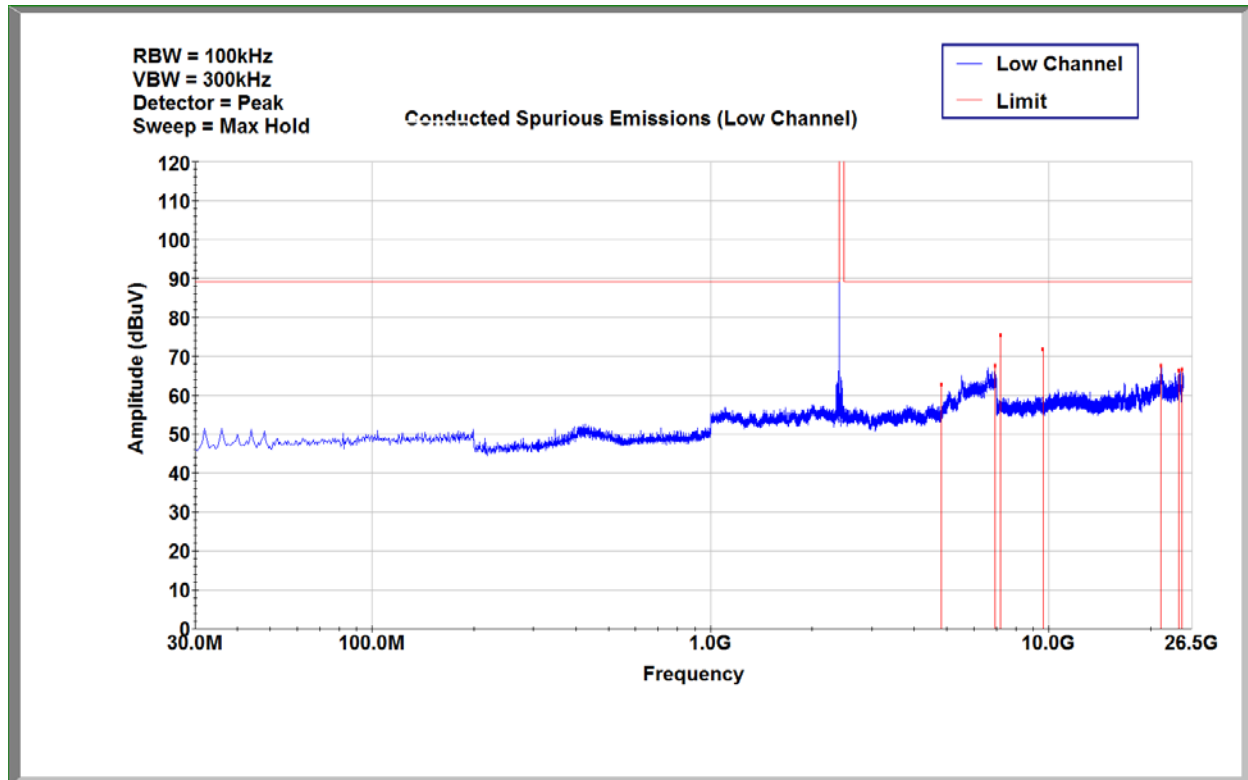


Conducted Spurious Emissions at Antenna Port Channel 19

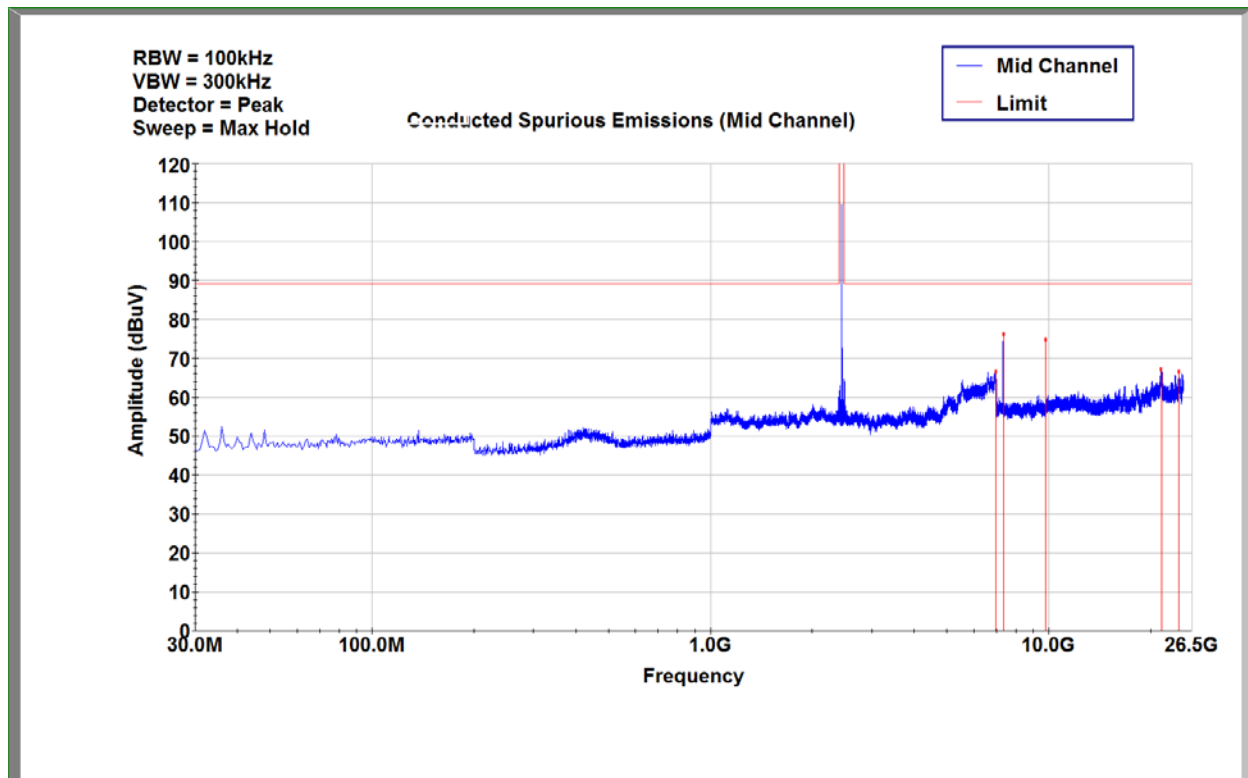

Conducted Spurious Emissions at Antenna Port Channel 39

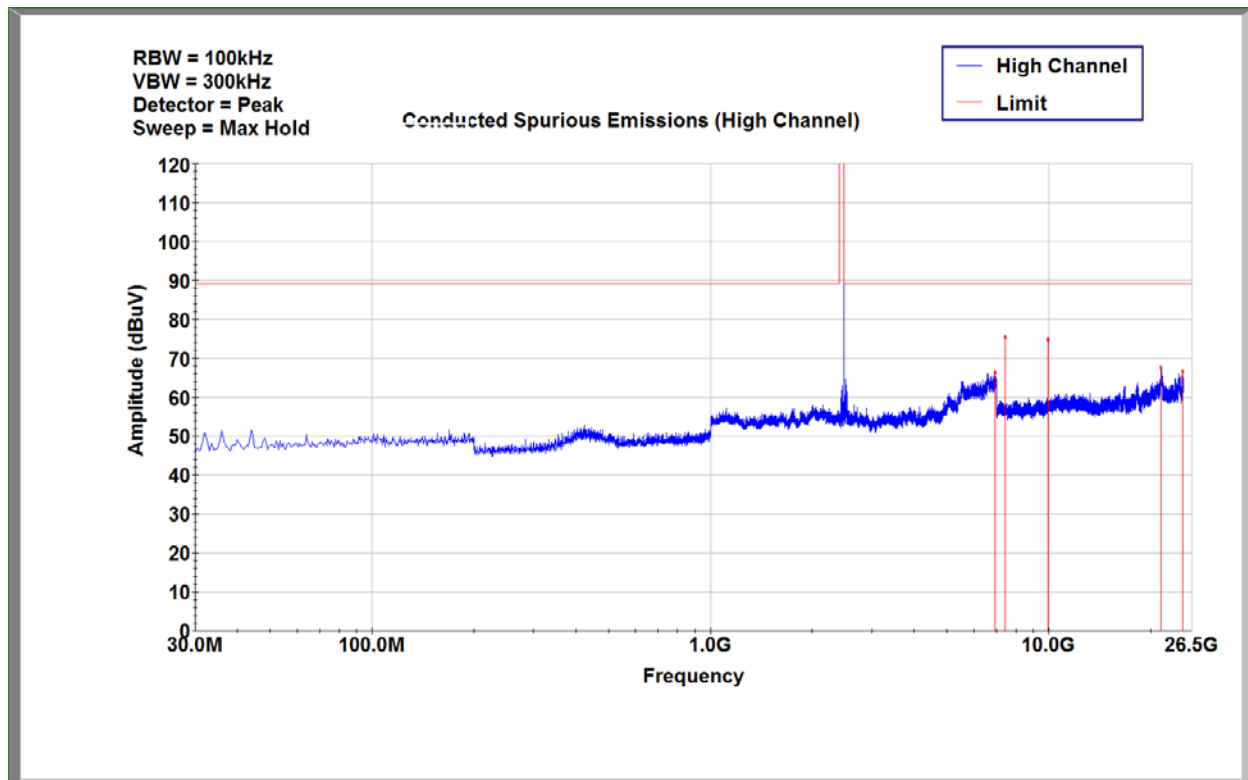

Band Edge Plot

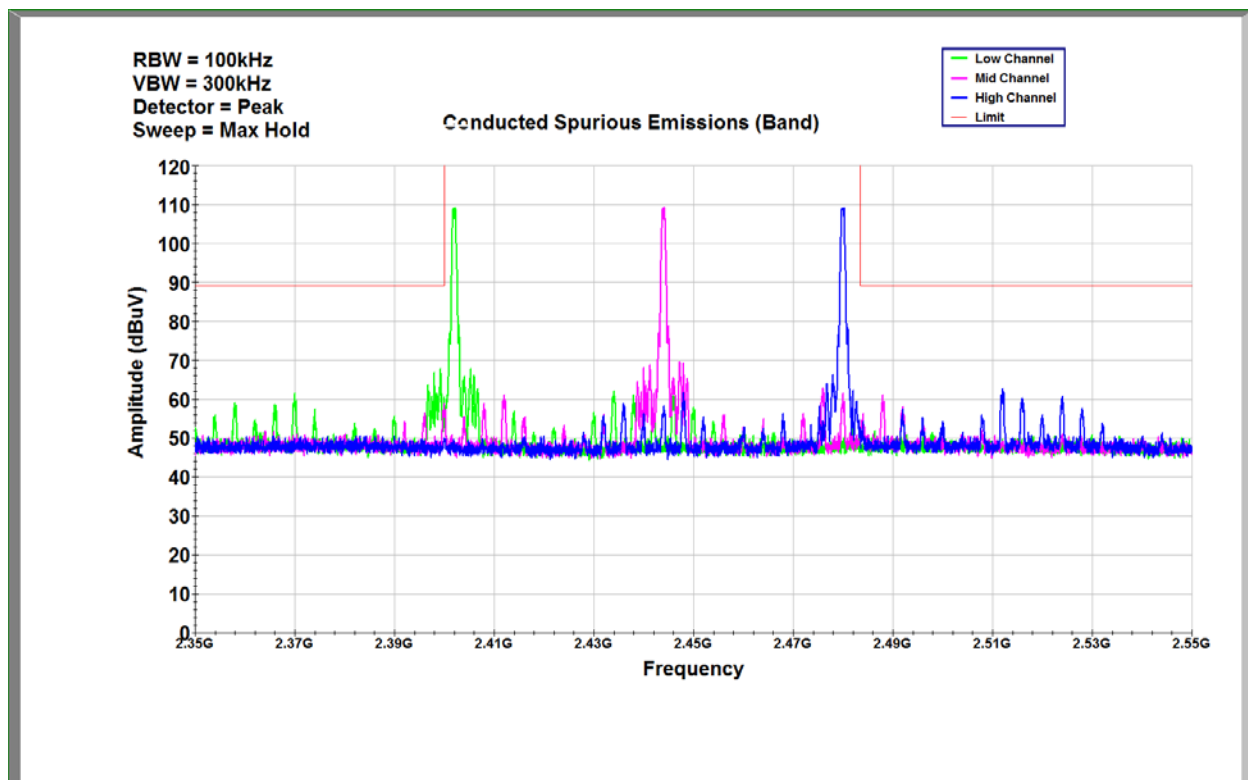

9 Power Spectral Density

9.1 Test Limits

§ 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

9.2 Test Procedure

ANSI C63.10: 2013.

9.3 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	10887490.26	Rohde & Schwarz	ES126	9/20/2017	9/20/2018

9.4 Test Results

The device was found to be **compliant**. The peak power spectral density was less than the limit.


9.5 Test Conditions


Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery

Test Date: 11/10/2017
Ambient Temperature: 22.1C
Relative Humidity: 35.2%
Atmospheric Pressure: 992.0mbar


9.6 Test Data

Mode	Channel Number	Frequency (MHz)	PSD in 3kHz BW (dBm)	Limit (dBm)	Margin (dBm)	Result
BLE	0	2402	-12.221	8	20.221	Pass
BLE	19	2440	-12.387	8	20.387	Pass
BLE	39	2480	-12.430	8	20.430	Pass

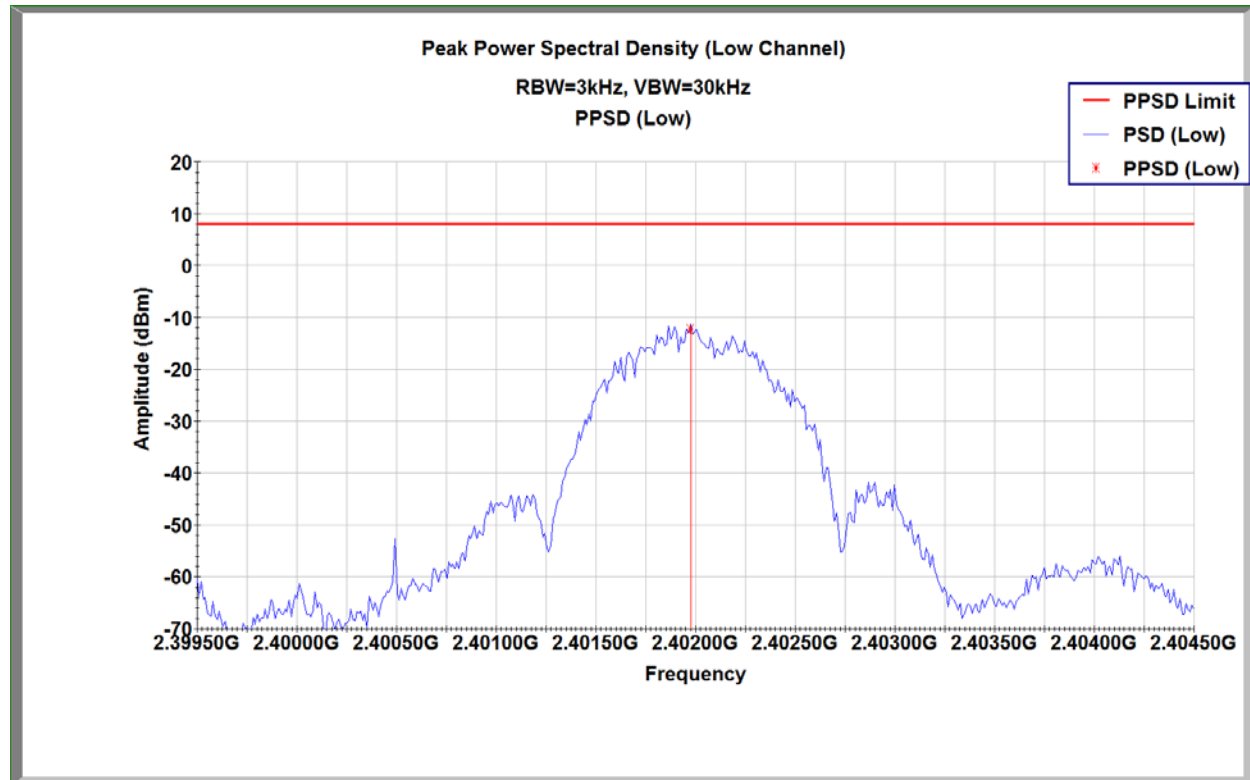

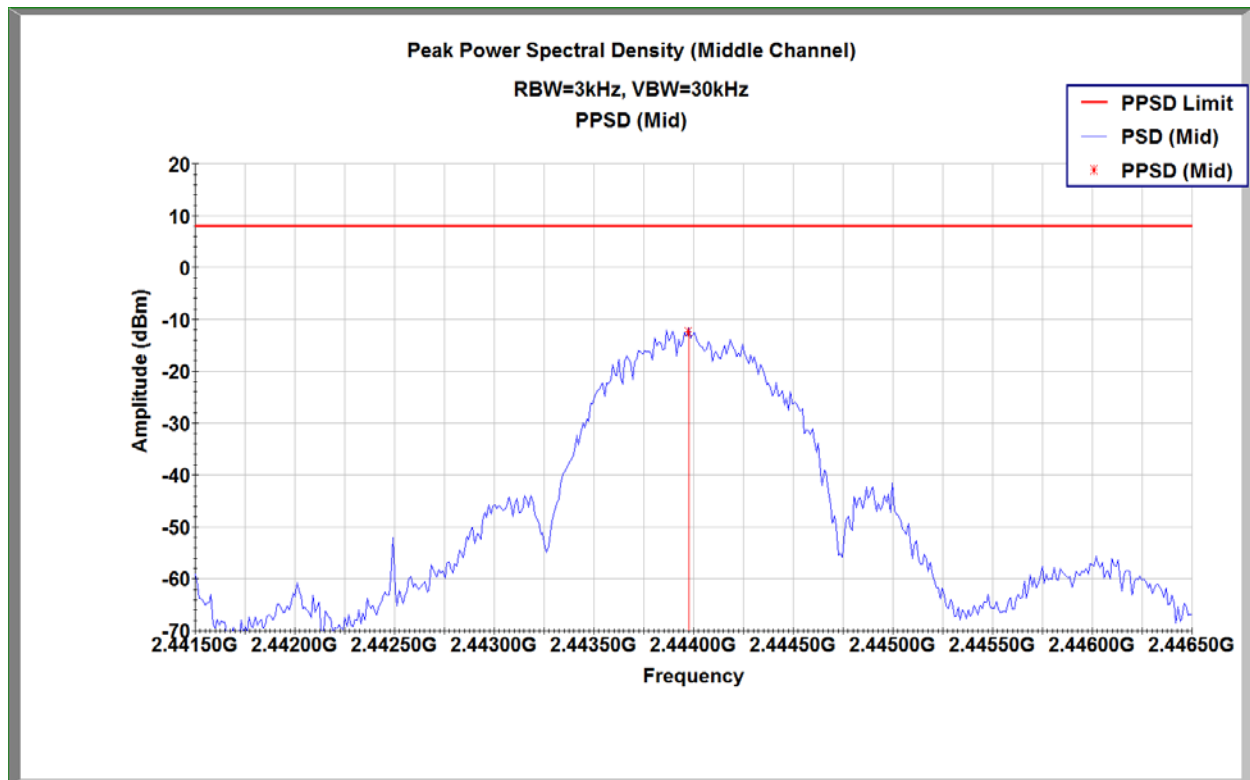

Power Spectral Density – Channel 19

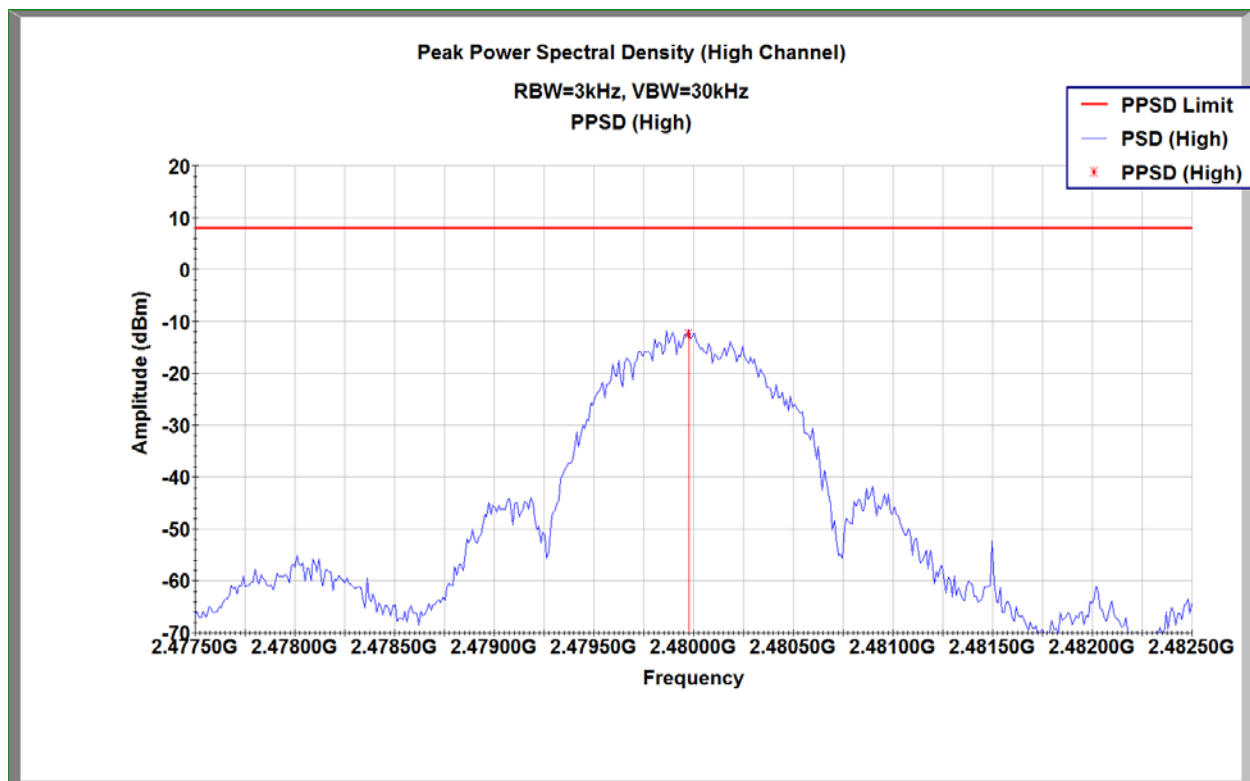

Power Spectral Density – Channel 39

10 Radiated Spurious Emissions (Transmitter)

10.1 Test Limits

§ 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Part 15.205(a): Restricted Bands of Operations

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	(²)
13.36–13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490–0.510 MHz.

² Above 38.6

Part 15.209(a): Field Strength Limits for Restricted Bands of Operation

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 - 0.490	2,400 / F (kHz)	300
0.490 - 1.705	24,000 / F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

10.2 Test Procedure

ANSI C63.10: 2013.

10.3 Example of Field Strength Calculation Method

The measured field strength was calculated by summing the readings taken from the spectrum analyzer with the appropriate correction factors associated with the antenna losses and cable losses. The calculation formula and sample calculations are listed below:

Formula:

$$FS = RA + AF + CF$$

FS = Field Strength in dB μ V/m

RA = Receiver Amplitude in dB μ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB (Including preamplifier and filter attenuation)

Example Calculation:

RA = 19.48 dB μ V

AF = 18.52 dB

CF = 0.78 dB

$$FS = 19.48 + 18.52 + 0.78 = 38.78 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(38.78 \text{ dB}\mu\text{V/m})/20] = 86.89 \mu\text{V/m}$$

10.4 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	1302.6005.40	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018
Preamplifier	122005	Rohde&Schwarz	TS-PR18	11/17/2016	11/17/2017
Biconnilog Antenna	9610-1102	ETS	3142	2/25/2016	2/25/2018
Horn Antenna (1 GHz – 18GHz)	154521	ETS	3117	11/14/2016	11/14/2017
Horn Antenna (18 GHz – 40GHz)	3779	ETS	3116c	6/5/2017	6/5/2018
Preamplifier	3921	Rohde&Schwarz	TS-PR40	12/1/2017	12/1/2018
System Controller	121701-1	Sunol Sciences	SC99V	Verify at Time of Use	Verify at Time of Use
3m Cable Antenna→Preamp	3074			11/17/2016	11/17/2017
3m Cable Preamp→Chamber	2588			11/17/2016	11/17/2017
3m Cable Chamber→Control Room	2593			11/17/2016	11/17/2017
3m Cable Control Room→Receiver	2592			11/17/2016	11/17/2017
10m Cable Antenna→Preamp	3339			11/17/2016	11/17/2017
10m Cable Preamp→Chamber	3172			11/17/2016	11/17/2017
10m Cable Chamber→Control Room	2590			11/17/2016	11/17/2017
10m Cable Control Room→Receiver	2589			11/17/2016	11/17/2017

10.5 Test Results

The device was found to be **compliant**. All spurious emissions were attenuated by at least 20dB below the level of the fundamental as required by Part 15.247(d). Additionally, all emissions falling within restricted bands of operation and at the band edges were found to be below the limit specified in Part 15.209(a). The spurious emissions listed in the following table are the worst case emissions.

10.6 Test Conditions

Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery

Test Date: 11/10/2017

Ambient Temperature: 21.4C
Relative Humidity: 26.6%
Atmospheric Pressure: 998.0mbar

10.7 Test Data**Worst Case Spurious Measurements**

*Emissions were investigated with the test sample in its worst operating position across 3 orthogonal axes.

Bluetooth Channel 0 (2402MHz) Spurious Emissions**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4804.568500	51.58	74.00	22.42	1000.000	200.0	V	36.0	7.5
7205.979000	52.15	74.00	21.85	1000.000	128.0	V	0.0	10.4
9608.919500	54.83	74.00	19.17	1000.000	160.0	V	50.0	13.6
12002.876500	49.51	74.00	24.49	1000.000	158.0	V	50.0	17.5
14414.527500	48.97	74.00	25.03	1000.000	155.0	V	50.0	17.0
16819.023500	53.50	74.00	20.50	1000.000	152.0	H	22.0	21.5

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4804.568500	39.78	54.00	14.22	1000.000	200.0	V	36.0	7.5
7205.979000	40.12	54.00	13.88	1000.000	128.0	V	0.0	10.4
9608.919500	42.00	54.00	12.00	1000.000	160.0	V	50.0	13.6
12002.876500	36.87	54.00	17.13	1000.000	158.0	V	50.0	17.5
14414.527500	36.38	54.00	17.62	1000.000	155.0	V	50.0	17.0
16819.023500	40.74	54.00	13.26	1000.000	152.0	H	22.0	21.5

Bluetooth Channel 19 (2440MHz) Spurious Emissions**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4888.369000	48.38	74.00	25.62	1000.000	200.0	V	50.0	7.4
7332.043500	53.75	74.00	20.25	1000.000	128.0	V	30.0	10.5
9777.032000	56.63	74.00	17.37	1000.000	162.0	V	33.0	13.8
12221.714500	49.53	74.00	24.47	1000.000	166.0	V	39.0	17.2
14668.633500	49.21	74.00	24.79	1000.000	157.0	V	50.0	17.4
17104.046000	52.33	74.00	21.67	1000.000	200.0	V	50.0	21.2

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4888.369000	36.89	54.00	17.11	1000.000	200.0	V	50.0	7.4
7332.043500	41.77	54.00	12.23	1000.000	128.0	V	30.0	10.5
9777.032000	43.62	54.00	10.38	1000.000	162.0	V	33.0	13.8
12221.714500	36.80	54.00	17.20	1000.000	166.0	V	39.0	17.2
14668.633500	36.78	54.00	17.22	1000.000	157.0	V	50.0	17.4
17104.046000	39.60	54.00	14.40	1000.000	200.0	V	50.0	21.2

Bluetooth Channel 39 (2480MHz) Spurious Emissions

Peak

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4957.211500	42.25	74.00	31.75	1000.000	151.0	V	30.0	7.2
7439.254500	53.35	74.00	20.65	1000.000	135.0	V	23.0	10.9
9919.101500	56.72	74.00	17.28	1000.000	161.0	V	30.0	14.0
12400.105000	49.08	74.00	24.92	1000.000	187.0	V	25.0	16.9
14878.099500	50.10	74.00	23.90	1000.000	160.0	V	28.0	18.2
17356.350500	53.02	74.00	20.98	1000.000	158.0	V	34.0	20.6

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
4957.211500	29.44	54.00	24.56	1000.000	151.0	V	30.0	7.2
7439.254500	41.71	54.00	12.29	1000.000	135.0	V	23.0	10.9
9919.101500	44.95	54.00	9.05	1000.000	161.0	V	30.0	14.0
12400.105000	36.46	54.00	17.54	1000.000	187.0	V	25.0	16.9
14878.099500	37.31	54.00	16.69	1000.000	160.0	V	28.0	18.2
17356.350500	39.84	54.00	14.16	1000.000	158.0	V	34.0	20.6

Bluetooth Low Band Edge, Transmitting on Channel 0 (2402MHz)**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2390.000000	53.07	74.00	20.93	1000.000	347.0	H	202.0	37.7

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2390.000000	41.60	54.00	12.40	1000.000	347.0	H	202.0	37.7

Bluetooth Low Band Edge, Frequency Hopping Enabled**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2390.000000	52.43	74.00	21.57	1000.000	226.0	H	256.0	37.7

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2390.000000	41.73	54.00	12.27	1000.000	226.0	H	256.0	37.7

Bluetooth High Band Edge, Transmitting on Channel 39 (2480MHz)**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2483.500000	58.09	74.00	15.91	1000.000	299.0	V	218.0	37.8

Average


Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2483.500000	44.79	54.00	9.21	1000.000	299.0	V	218.0	37.8

Bluetooth High Band Edge, Frequency Hopping Enabled**Peak**

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2483.500000	54.14	74.00	19.86	1000.000	410.0	H	273.0	37.8

Average

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
2483.500000	42.45	54.00	11.55	1000.000	410.0	H	273.0	37.8

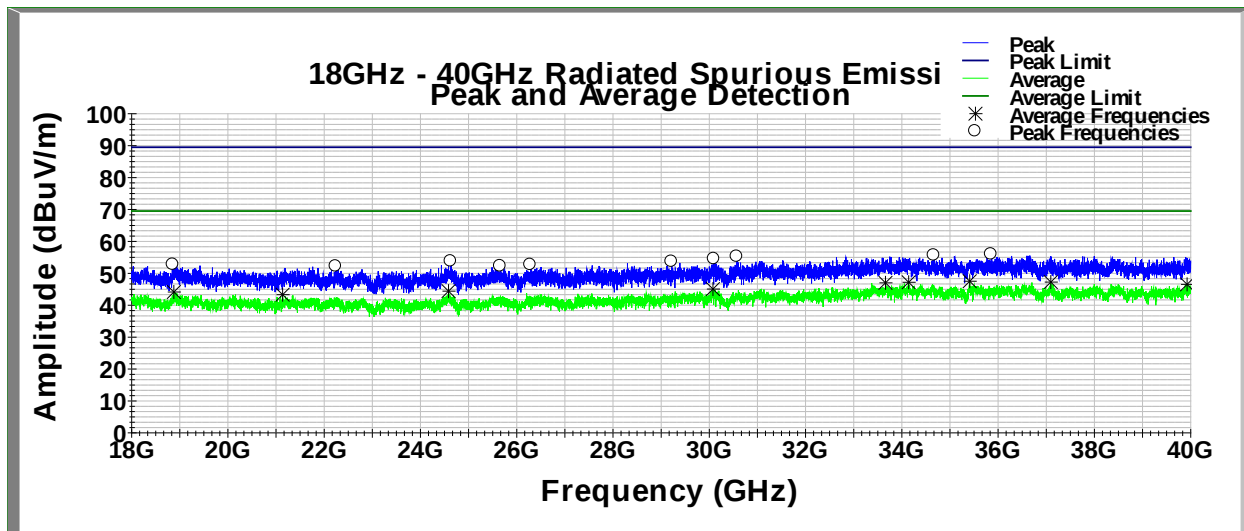

18-40GHz spurious emissions data, representative of the worst case of all transmission modes measured in 3 orthogonal axes.

11 Radiated Spurious Emissions (Receiver)

11.1 Test Limits

§ 15.109: Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of emission (MHz)	Field strength (microvolts/meter)	Field strength (dBuV/m)
30–88	100	40
88–216	150	43.5
216–960	200	46
Above 960	500	54

These limits are identical to those in RSS-GEN

11.2 Test Procedure

ANSI C63.4: 2014

11.3 Example of Field Strength Calculation Method

The measured field strength was calculated by summing the readings taken from the spectrum analyzer with the appropriate correction factors associated with the antenna losses and cable losses. The calculation formula and sample calculations are listed below:

Formula:

$$FS = RA + AF + CF$$

FS = Field Strength in dB μ V/m

RA = Receiver Amplitude in dB μ V

AF = Antenna Factor in dB

CF = Cable Attenuation Factor in dB (Including preamplifier and filter attenuation)

Example Calculation:

RA = 19.48 dB μ V

AF = 18.52 dB

CF = 0.78 dB

$$FS = 19.48 + 18.52 + 0.78 = 38.78 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(38.78 \text{ dB}\mu\text{V/m})/20] = 86.89 \mu\text{V/m}$$

11.4 Test Equipment Used

Description	Serial Number	Manufacturer	Model	Cal. Date	Cal. Due
EMI Test Receiver	1302.6005.40	Rohde & Schwarz	ESU40	10/12/2017	10/12/2018
Preamplifier	122005	Rohde&Schwarz	TS-PR18	11/17/2016	11/17/2017
Biconnilog Antenna	9610-1102	ETS	3142	2/25/2016	2/25/2018
Horn Antenna	154521	ETS	3117	11/14/2016	11/14/2017
System Controller	121701-1	Sunol Sciences	SC99V	Verify at Time of Use	Verify at Time of Use
3m Cable Antenna→Preamp	3074			11/17/2016	11/17/2017
3m Cable Preamp→Chamber	2588			11/17/2016	11/17/2017
3m Cable Chamber→Control Room	2593			11/17/2016	11/17/2017
3m Cable Control Room→Receiver	2592			11/17/2016	11/17/2017
10m Cable Antenna→Preamp	3339			11/17/2016	11/17/2017
10m Cable Preamp→Chamber	3172			11/17/2016	11/17/2017
10m Cable Chamber→Control Room	2590			11/17/2016	11/17/2017
10m Cable Control Room→Receiver	2589			11/17/2016	11/17/2017

11.5 Test Results


All spurious emissions with the test sample in receive mode were below the limits specified in Part 15.109 for a class B digital device and RSS-GEN Section 6.1. All peak detected emissions were at least 15dB below the limit.

11.6 Test Conditions

Test Personnel: Brian Lackey
 Supervising/Reviewing Engineer:
 (Where Applicable) NA
 Input Voltage: Battery


Test Date: 11/13/2017
 Ambient Temperature: 20.6C
 Relative Humidity: 36.1%
 Atmospheric Pressure: 988.8mbar

11.7 Test Data

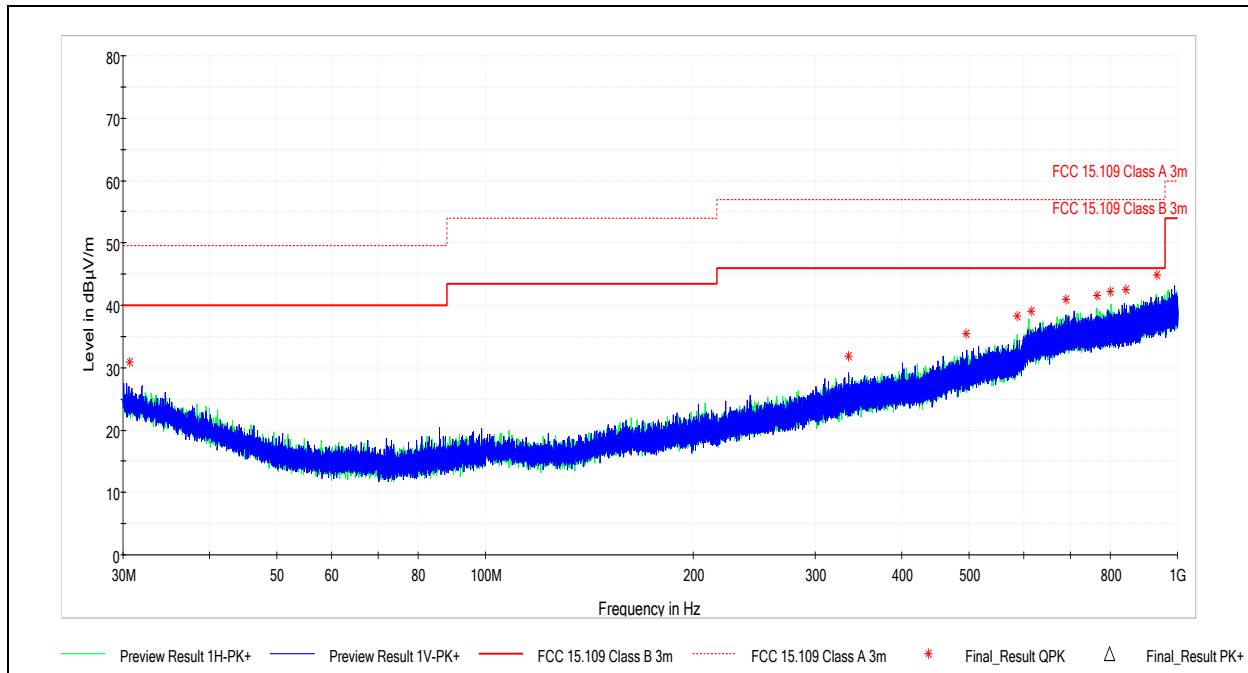

Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.640000	30.91	40.00	9.09	120.000	272.1	V	102.0	24.2
334.460000	31.92	46.02	14.10	120.000	220.9	V	285.0	24.9
495.400000	35.52	46.02	10.50	120.000	381.4	V	312.0	28.3
586.940000	38.22	46.02	7.80	120.000	405.0	H	111.0	30.5
614.460000	39.04	46.02	6.98	120.000	107.7	H	158.0	31.3
690.300000	40.90	46.02	5.12	120.000	394.4	V	99.0	33.3
765.670000	41.58	46.02	4.44	120.000	225.4	H	5.0	33.6
800.400000	42.14	46.02	3.88	120.000	118.0	H	90.0	34.2
841.460000	42.53	46.02	3.49	120.000	165.3	V	328.0	34.5
933.160000	44.80	46.02	1.22	120.000	405.1	H	118.0	36.2

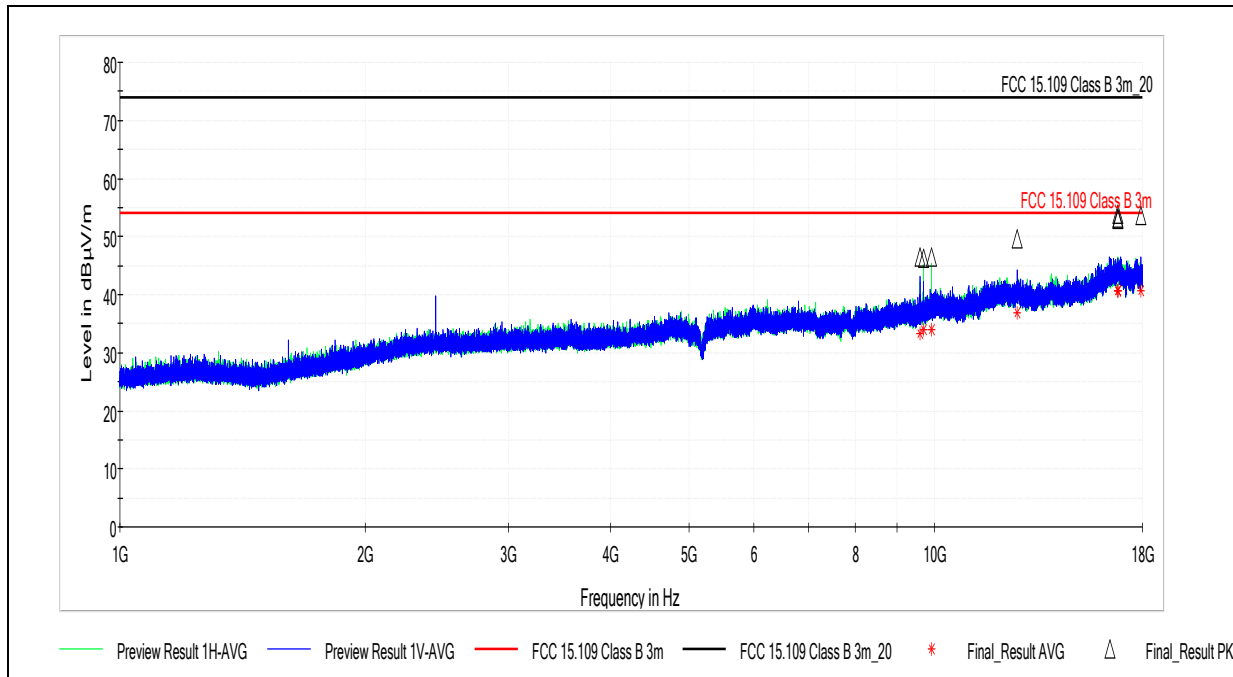

Final_Result_PK+

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
9605.926000	46.57	74.00	27.43	1000.000	200.0	V	50.0	13.6
9698.370000	46.19	74.00	27.81	1000.000	160.0	V	0.0	13.6
9909.724000	46.39	74.00	27.61	1000.000	100.0	V	38.0	14.0
12632.958000	49.54	74.00	24.46	1000.000	148.0	H	50.0	17.1
16788.969500	53.92	74.00	20.08	1000.000	154.0	H	27.0	21.5
16789.211000	53.28	74.00	20.72	1000.000	164.0	V	0.0	21.5
16790.004500	53.06	74.00	20.94	1000.000	229.0	H	0.0	21.5
17936.218500	53.67	74.00	20.33	1000.000	171.0	V	50.0	22.4

Final_Result_AVG

Frequency (MHz)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
9605.926000	33.28	54.00	20.72	1000.000	200.0	V	50.0	13.6
9698.370000	33.86	54.00	20.14	1000.000	160.0	V	0.0	13.6
9909.724000	33.93	54.00	20.07	1000.000	100.0	V	38.0	14.0
12632.958000	36.77	54.00	17.23	1000.000	148.0	H	50.0	17.1
16788.969500	40.73	54.00	13.27	1000.000	154.0	H	27.0	21.5
16789.211000	40.74	54.00	13.26	1000.000	164.0	V	0.0	21.5
16790.004500	40.76	54.00	13.24	1000.000	229.0	H	0.0	21.5
17936.218500	40.72	54.00	13.28	1000.000	171.0	V	50.0	22.4

12 Antenna Requirement per FCC Part 15.203

12.1 Test Limits

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

12.2 Test Results

The sample tested met the antenna requirement. The antenna used was internal to the sample and permanently attached to the PCB.

12.3 Test Conditions

Test Personnel: Brian Lackey
Supervising/Reviewing
Engineer:
(Where Applicable) NA
Input Voltage: Battery

Test Date: 11/13/2017
Ambient Temperature: 20.6C
Relative Humidity: 36.1%
Atmospheric Pressure: 988.8mbar

13 Measurement Uncertainty

The measured value related to the corresponding limit will be used to decide whether the equipment meets the requirements.

The measurement uncertainty figures were calculated and correspond to a coverage factor of $k = 2$, providing a confidence level of respectively 95.45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian).

Measurement uncertainty Table

Parameter	Uncertainty	Notes
Radiated emissions, 30 to 1000 MHz	+3.9dB	
Radiated emissions, 1 to 18 GHz	+4.2dB	
Radiated emissions, 18 to 40 GHz	+4.3dB	
Power Port Conducted emissions, 150kHz to 30 MHz	± 2.8 dB	

14 Revision History

Revision Level	Date	Report Number	Notes
0	11/27/2018	103291273LEX-029	Original Issue
1	5/9/2018	103291273LEX-029.1	Added 18-40GHz radiated emissions data.
2	5/17/2018	103291273LEX-029.2	Removed FHSS data. Added 6dB Bandwidth.