

TEST REPORT

Product : Keon by Kiiroo
Trade mark : Kiiroo
Model/Type reference : KEON
Serial Number : N/A
Report Number : EED32M80046002
FCC ID : 2AO5N-KEON
Date of Issue: : Nov. 30, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

Feel Robotics B.V.
Amstelplein 62, 30th Floor,
Amsterdam, 1096BC, Netherlands

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Reviewed by:

Tom Chen

Sunlight Sun

Tom Chen

Approved by:

Aaron Ma

Date:

Nov. 30, 2020

Aaron Ma



Check No.:3143021120

2 Version

Version No.	Date	Description
00	Nov. 30, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15, Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15, Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15, Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.

The products have two kinds of delivery way: One is with Stroker, The other is without Stroker. In addition, Stroker does not contain any electronic components.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP	5
5.1.1 For Conducted test setup	5
5.1.2 For Radiated Emissions test setup	5
5.1.3 For Conducted Emissions test setup	6
5.2 TEST ENVIRONMENT	6
5.3 TEST CONDITION	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION	7
6.2 GENERAL DESCRIPTION OF EUT	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	7
6.4 DESCRIPTION OF SUPPORT UNITS	9
6.5 TEST LOCATION	9
6.6 DEVIATION FROM STANDARDS	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	9
6.9 MEASUREMENT UNCERTAINTY(95% CONFIDENCE LEVELS, $k=2$)	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A): 20dB Occupied Bandwidth	14
Appendix B): Carrier Frequency Separation	19
Appendix C): Dwell Time	24
Appendix D): Hopping Channel Number	29
Appendix E): Conducted Peak Output Power	31
Appendix F): Band-edge for RF Conducted Emissions	36
Appendix G): RF Conducted Spurious Emissions	42
Appendix H) Pseudorandom Frequency Hopping Sequence	52
Appendix I) Antenna Requirement	53
Appendix J) AC Power Line Conducted Emission	54
Appendix K) Restricted bands around fundamental frequency (Radiated)	57
Appendix L) Radiated Spurious Emissions	74
PHOTOGRAPHS OF TEST SETUP	79
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	82

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

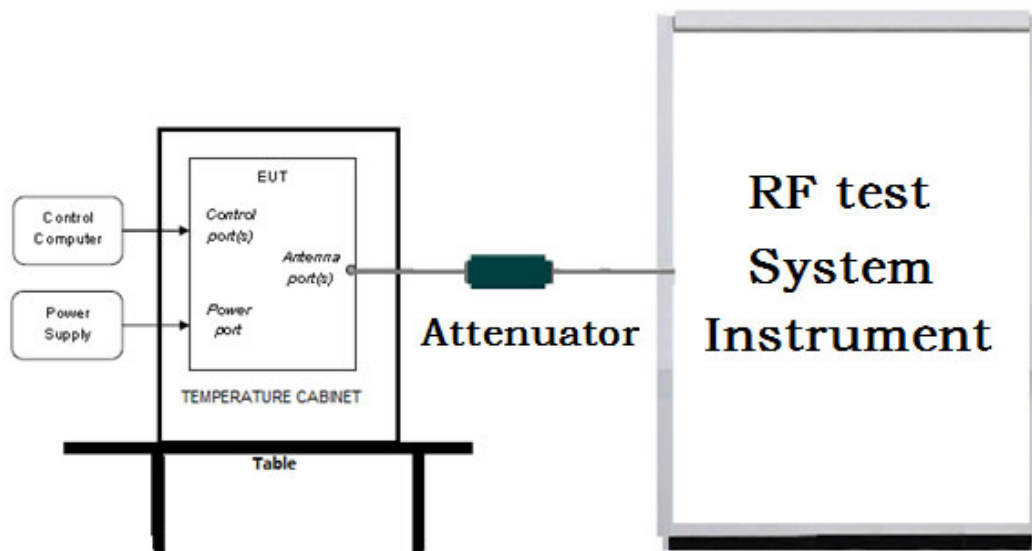

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

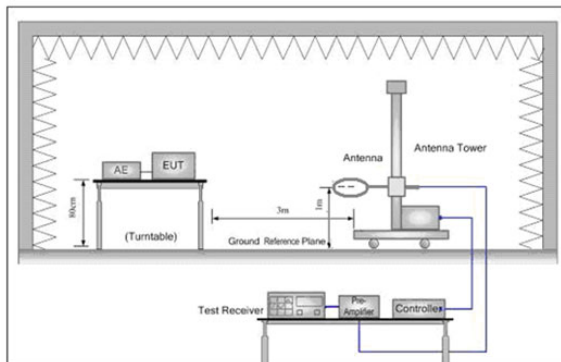


Figure 1. Below 30MHz

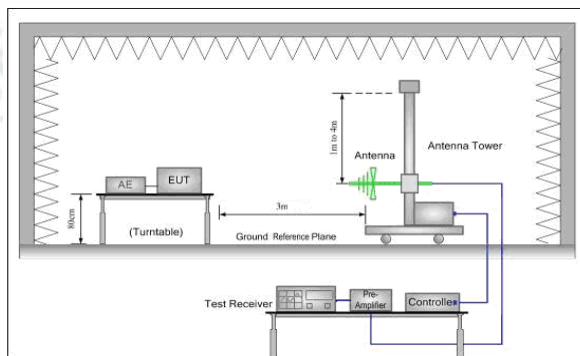


Figure 2. 30MHz to 1GHz


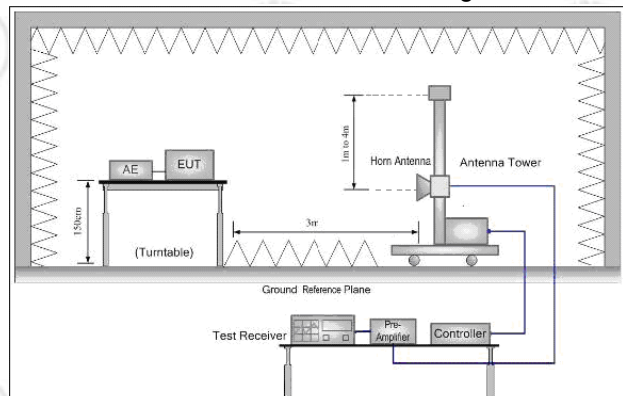


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

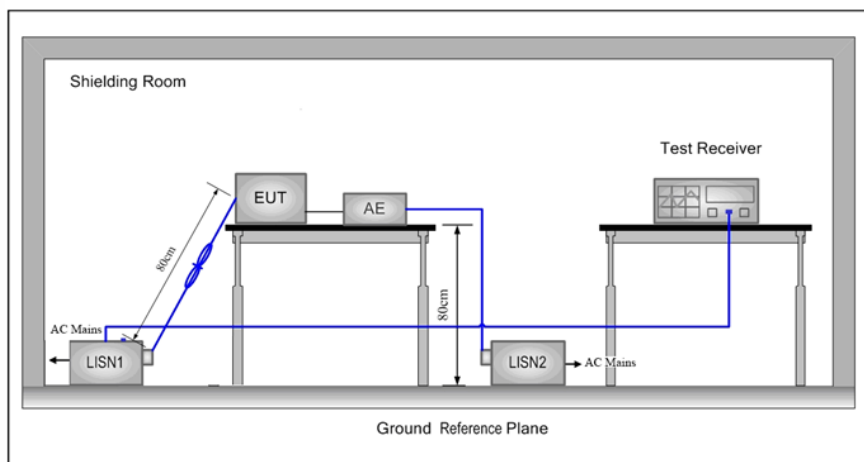

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/8DPSK (DH1, DH3, DH5)	2402MHz ~2480 MHz	Channel 0	Channel 39	Channel 78
		2402MHz	2441MHz	2480MHz

6 General Information

6.1 Client Information

Applicant:	Feel Robotics B.V.
Address of Applicant:	Amstelplein 62, 30th Floor, Amsterdam, 1096BC, Netherlands
Manufacturer:	Assembling Manufacturing & Sourcing Group B.V.
Address of Manufacturer:	Asterweg 20 S3 1031 HN Amsterdam, Netherlands
Factory:	AMS Product Assembly (Foshan) Co. LTD
Address of Factory:	North Chuangye Road Songxia Industry District – Nanhai Area 528234 Foshan PR China

6.2 General Description of EUT

Product Name:	Keon by Kiiroo	
Model No.(EUT):	KEON	
Tark mark:	Kiiroo	
EUT Supports Radios application:	2402MHz to 2480MHz	
Power Supply:	DC 5V	
	Li-ion battery	Model:SH553055-4S 14.8V 700mAh/10.36Wh
Sample Received Date:	Nov. 02, 2020	
Sample tested Date:	Nov. 02, 2020 to Nov. 14, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	4.2
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Test Power Grade:	Default
Test Software of EUT:	esPRFTool.exe
Antenna Type and Gain:	Type: PCB antenna Gain:2dBi
Test Voltage:	DC 5V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	20	2422MHz	40	2442MHz	60	2462MHz
1	2403MHz	21	2423MHz	41	2443MHz	61	2463MHz
2	2404MHz	22	2424MHz	42	2444MHz	62	2464MHz
3	2405MHz	23	2425MHz	43	2445MHz	63	2465MHz
4	2406MHz	24	2426MHz	44	2446MHz	64	2466MHz
5	2407MHz	25	2427MHz	45	2447MHz	65	2467MHz
6	2408MHz	26	2428MHz	46	2448MHz	66	2468MHz
7	2409MHz	27	2429MHz	47	2449MHz	67	2469MHz
8	2410MHz	28	2430MHz	48	2450MHz	68	2470MHz
9	2411MHz	29	2431MHz	49	2451MHz	69	2471MHz
10	2412MHz	30	2432MHz	50	2452MHz	70	2472MHz
11	2413MHz	31	2433MHz	51	2453MHz	71	2473MHz
12	2414MHz	32	2434MHz	52	2454MHz	72	2474MHz
13	2415MHz	33	2435MHz	53	2455MHz	73	2475MHz
14	2416MHz	34	2436MHz	54	2456MHz	74	2476MHz
15	2417MHz	35	2437MHz	55	2457MHz	75	2477MHz
16	2418MHz	36	2438MHz	56	2458MHz	76	2478MHz
17	2419MHz	37	2439MHz	57	2459MHz	77	2479MHz
18	2420MHz	38	2440MHz	58	2460MHz	78	2480MHz
19	2421MHz	39	2441MHz	59	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below

Associated equipment name		Manufacture	model	S/N serial number	Supplied by	Certification
AE1	Notebook	HP	HP ProBook 430 G3	5CG5192QSM	CTI	IC&FCC
AE2	Power supply Unit	OPPO	Ak933JH	J51642000007	CTI	IC&FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty(95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18NM 12-0398-002	---	---	---
High-pass filter	MICRO- TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980597	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-16-2020	10-15-2021
Multi device Controller	maturo	NCD/070/10711 112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudo random Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A): 20dB Occupied Bandwidth

Test Limit

According to §15.247(a) (1)

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

Test Procedure

Test method Refer as Section 8.1 and ANSI C63.10: 2013 clause 7.8.7,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =30kHz, VBW = 100kHz and Detector = Peak, to measurement 20dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 20 dB Bandwidth and 99% Bandwidth. in the test report.


Test Setup









Test Result


Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9455	0.84237	PASS
GFSK	MCH	0.9441	0.84261	PASS
GFSK	HCH	0.9470	0.84505	PASS
$\pi/4$ DQPSK	LCH	1.316	1.1764	PASS
$\pi/4$ DQPSK	MCH	1.319	1.1774	PASS
$\pi/4$ DQPSK	HCH	1.313	1.1788	PASS
8DPSK	LCH	1.310	1.1824	PASS
8DPSK	MCH	1.311	1.1821	PASS
8DPSK	HCH	1.309	1.1808	PASS

Test Graph

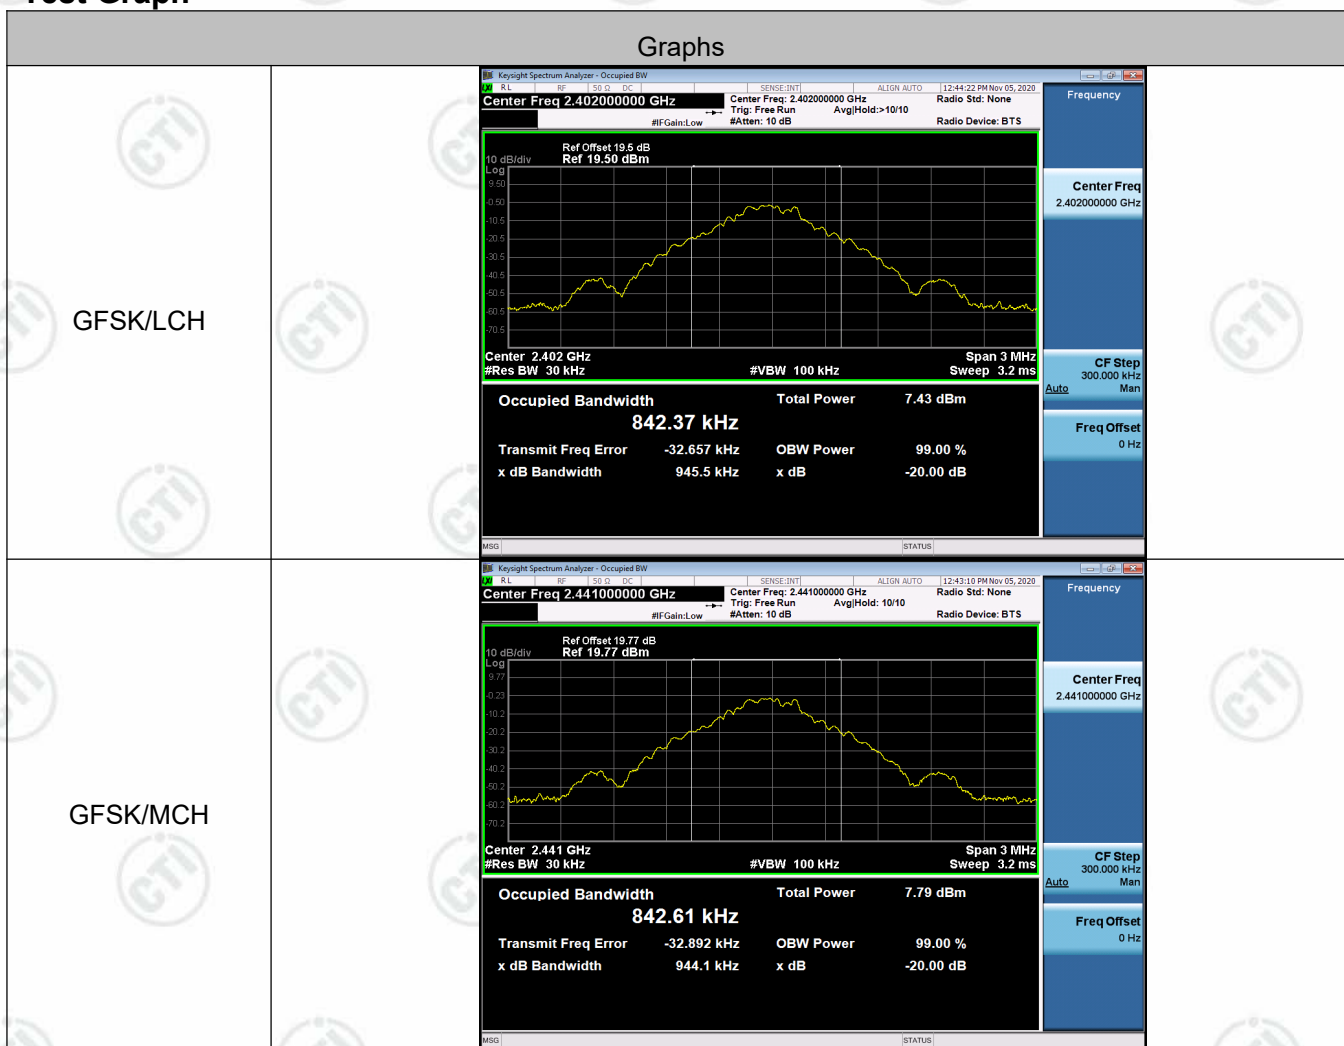

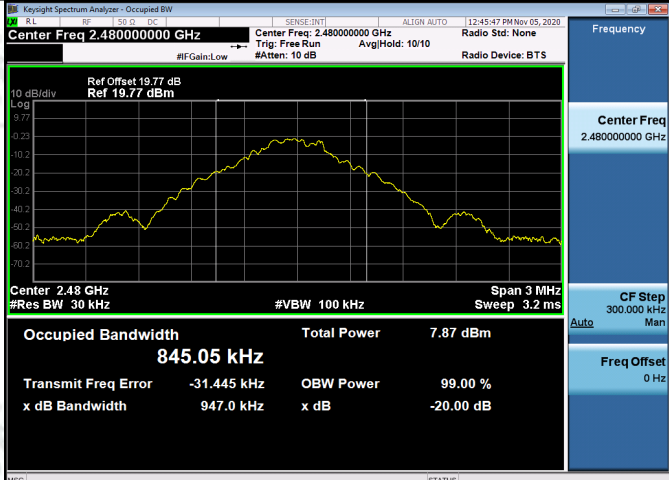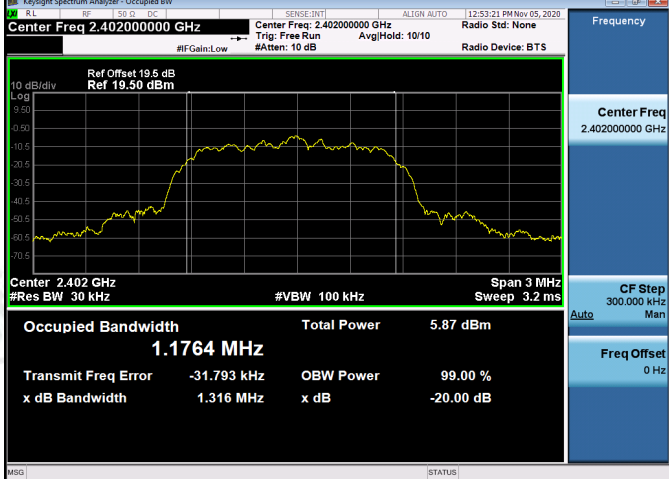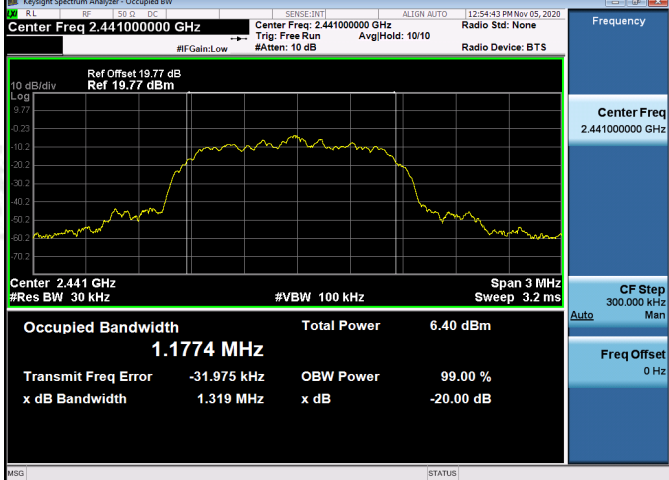GFSK/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.48 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth: 845.05 kHz Total Power: 7.87 dBm Transmit Freq Error: -31.445 kHz OBW Power: 99.00 % x dB Bandwidth: 947.0 kHz x dB: -20.00 dB
π/4DQPSK/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset 19.5 dB Ref 19.50 dBm Center 2.402 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth: 1.1764 MHz Total Power: 5.87 dBm Transmit Freq Error: -31.793 kHz OBW Power: 99.00 % x dB Bandwidth: 1.316 MHz x dB: -20.00 dB
π/4DQPSK/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Center 2.441 GHz #Res BW 30 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth: 1.1774 MHz Total Power: 6.40 dBm Transmit Freq Error: -31.975 kHz OBW Power: 99.00 % x dB Bandwidth: 1.319 MHz x dB: -20.00 dB

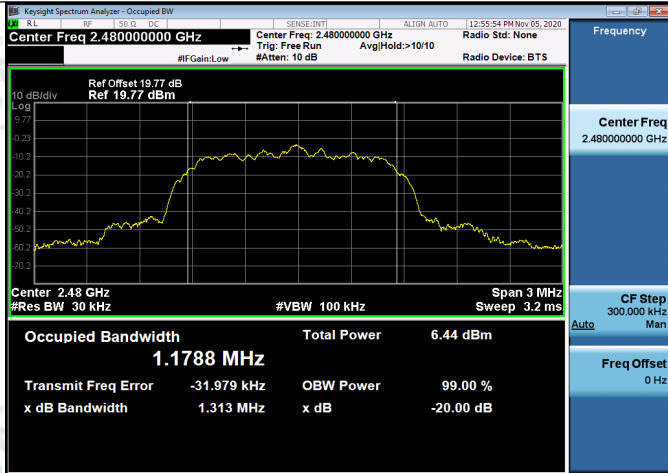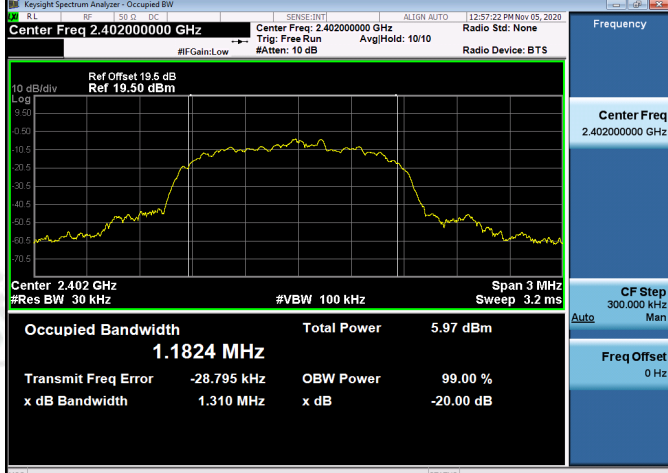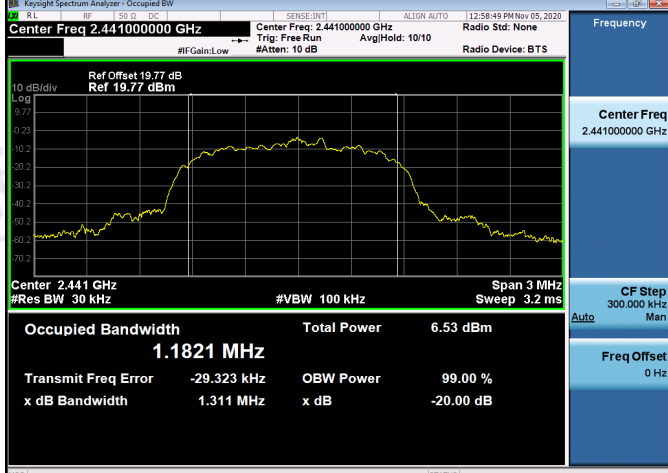$\pi/4$DQPSK/HCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 19.77 dB Ref: 19.77 dBm Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1788 MHz Total Power: 6.44 dBm Transmit Freq Error: -31.979 kHz OBW Power: 99.00 % x dB Bandwidth: 1.313 MHz x dB: -20.00 dB
8DPSK/LCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 19.5 dB Ref: 19.50 dBm Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1824 MHz Total Power: 5.97 dBm Transmit Freq Error: -28.795 kHz OBW Power: 99.00 % x dB Bandwidth: 1.310 MHz x dB: -20.00 dB
8DPSK/MCH	 Keyight Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 19.77 dB Ref: 19.77 dBm Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1821 MHz Total Power: 6.53 dBm Transmit Freq Error: -29.323 kHz OBW Power: 99.00 % x dB Bandwidth: 1.311 MHz x dB: -20.00 dB

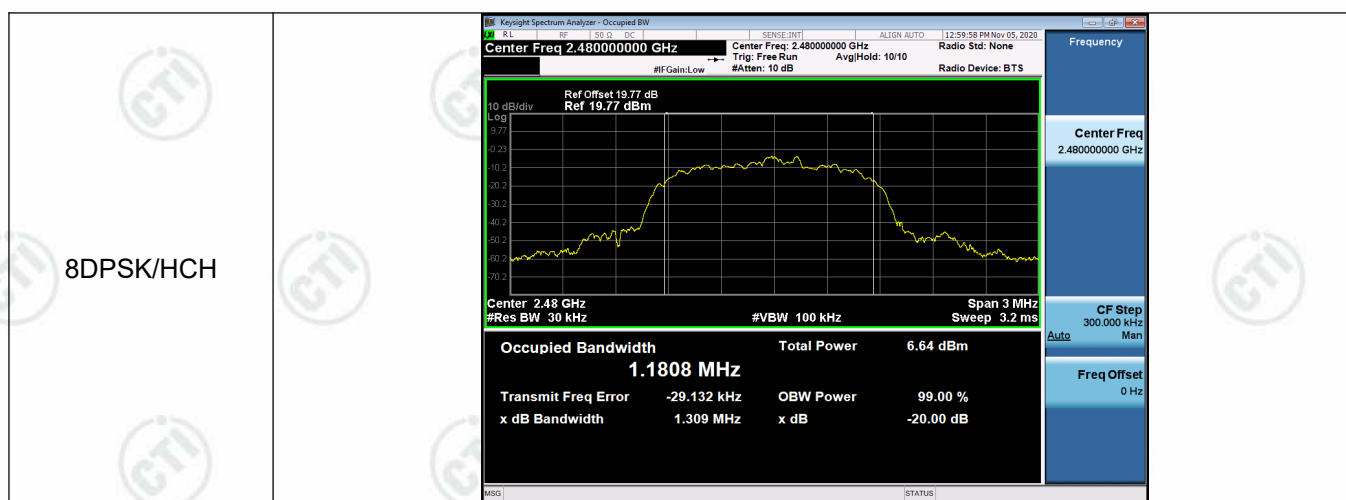

Appendix B): Carrier Frequency Separation

Test Limit

According to §15.247(a)(1)


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency


Test Setup








Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.002	PASS
GFSK	MCH	1.032	PASS
GFSK	HCH	1.066	PASS
$\pi/4$ DQPSK	LCH	1.054	PASS
$\pi/4$ DQPSK	MCH	1.184	PASS
$\pi/4$ DQPSK	HCH	0.968	PASS
8DPSK	LCH	0.988	PASS
8DPSK	MCH	1.004	PASS
8DPSK	HCH	1.010	PASS


Test Graph

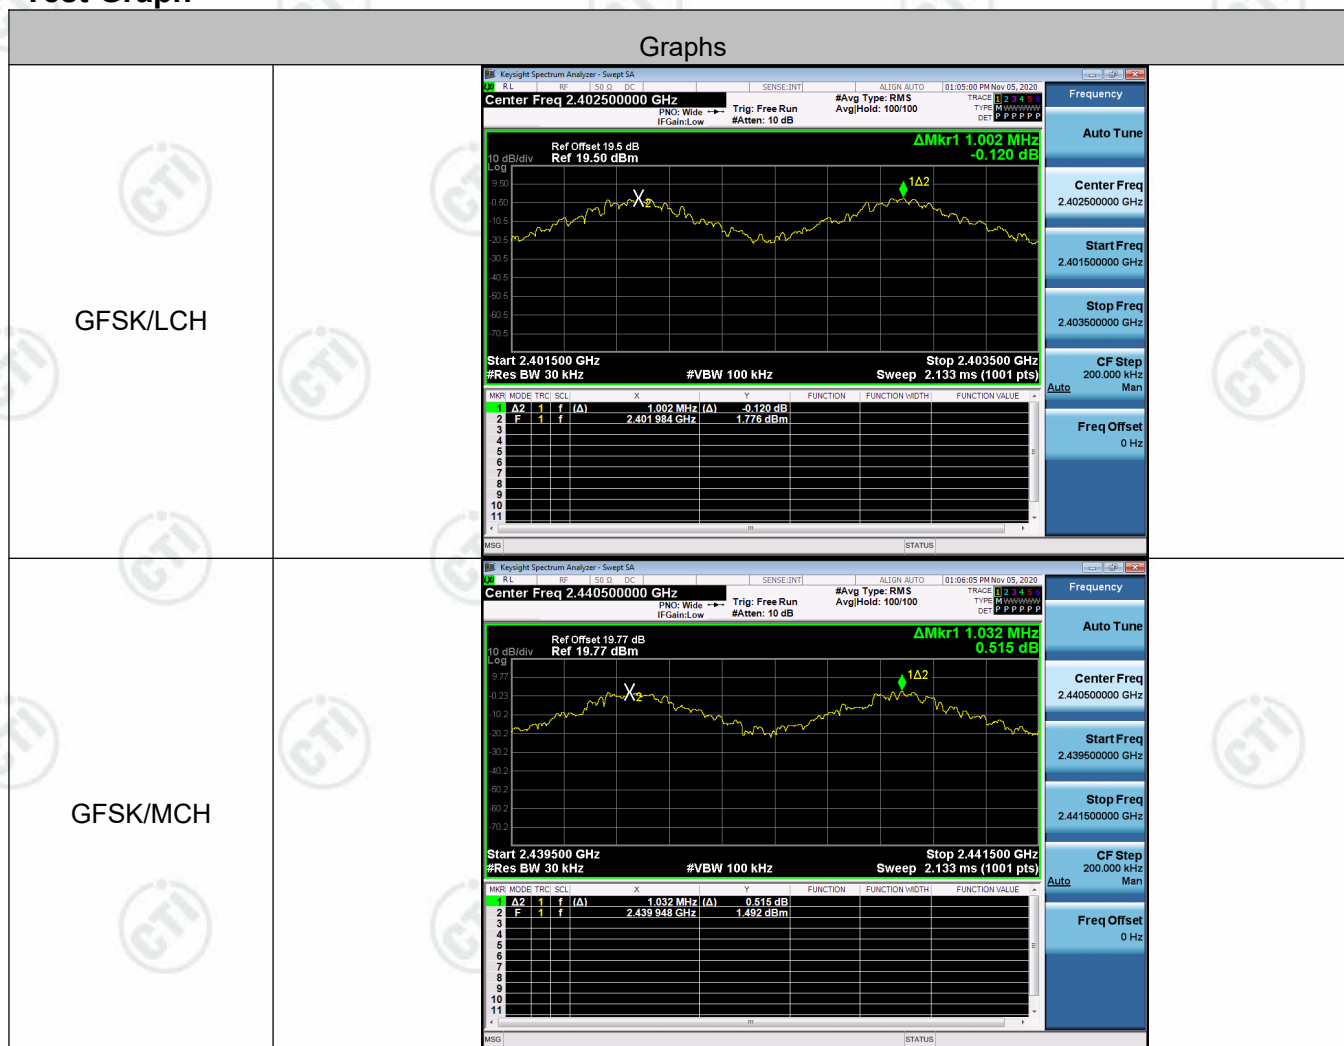

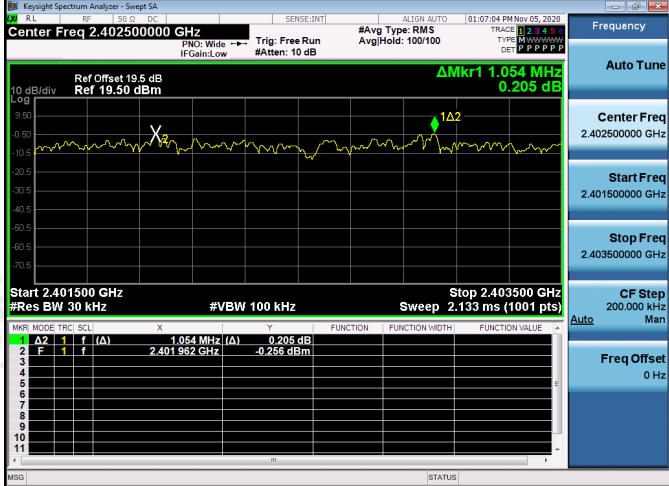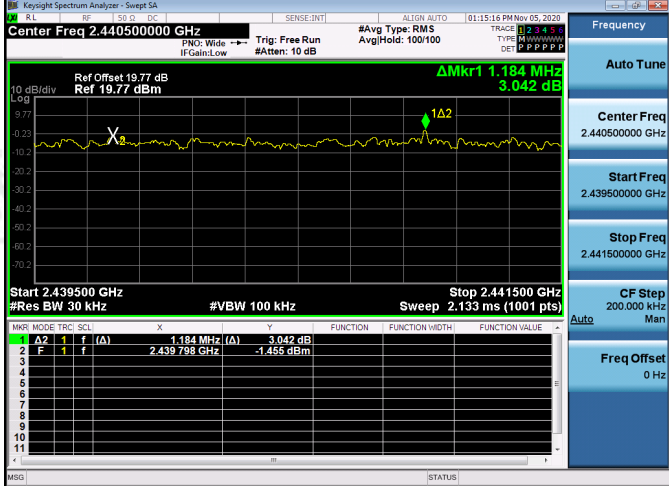GFSK/HCH	
$\pi/4$ DQPSK/LCH	
$\pi/4$ DQPSK/MCH	

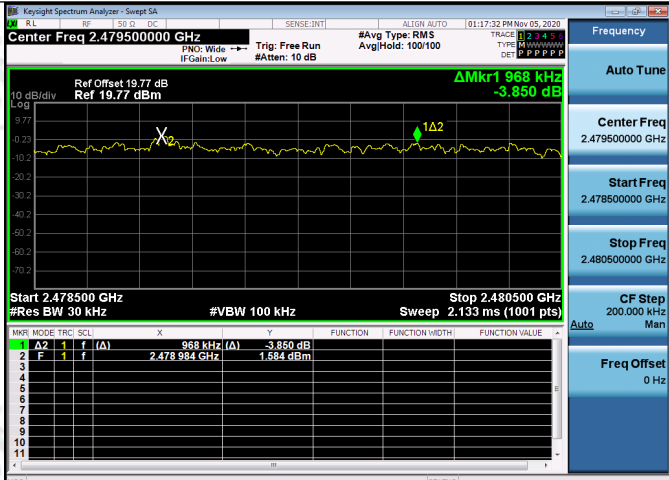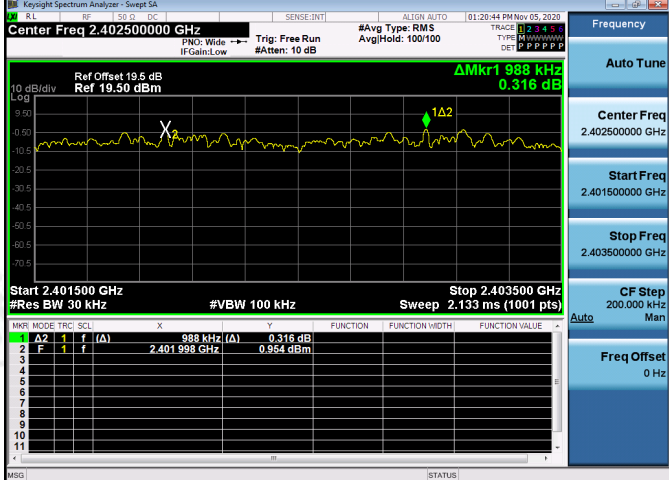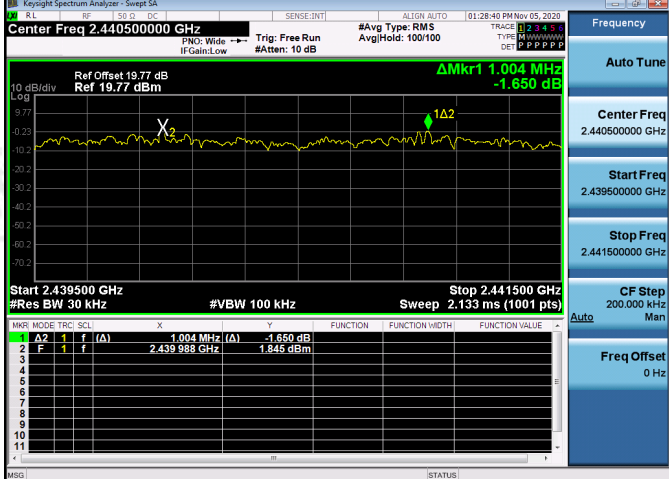$\pi/4$DQPSK/HCH	
8DPSK/LCH	
8DPSK/MCH	

8DPSK/HCH

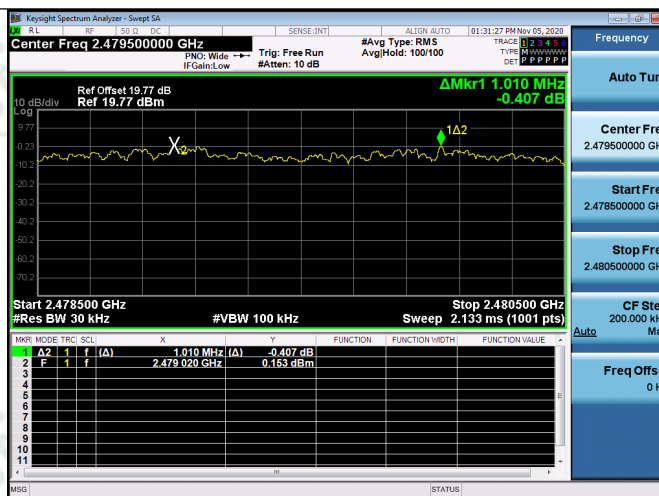

Appendix C): Dwell Time

Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


Test Setup

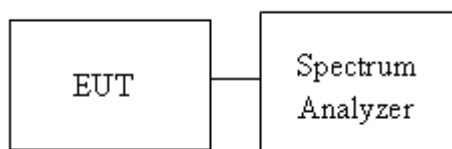

Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.3762	320	0.12	0.10	PASS
GFSK	DH1	MCH	0.37493	320	0.12	0.12	PASS
GFSK	DH1	HCH	0.3762	320	0.12	0.12	PASS
GFSK	DH3	LCH	1.63147	160	0.261	0.52	PASS
GFSK	DH3	MCH	1.63146	160	0.261	0.52	PASS
GFSK	DH3	HCH	1.63147	160	0.261	0.43	PASS
GFSK	DH5	LCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	MCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	HCH	2.8612	106.7	0.305	0.46	PASS

Test Graph

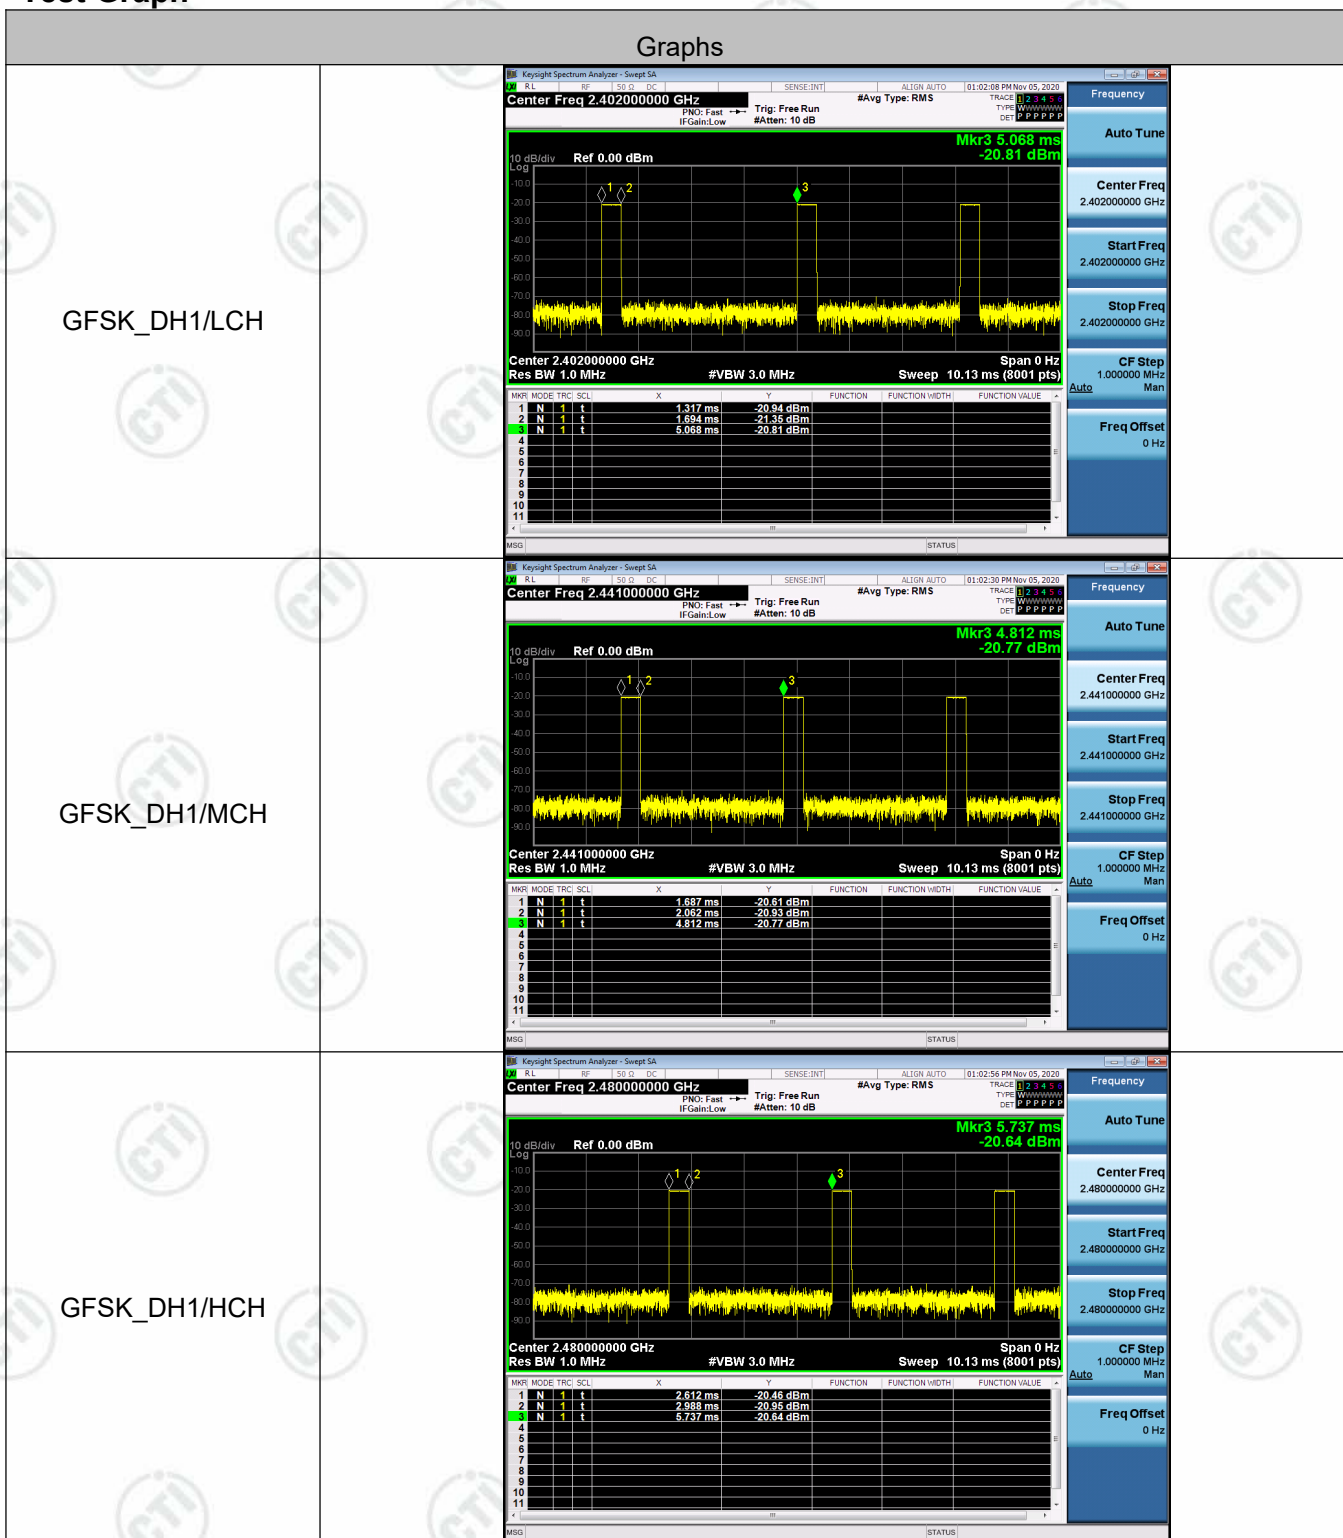

GFSK_DH3/LCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 4.284 ms -21.22 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.159 ms</td><td>-21.09 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>2.790 ms</td><td>-21.43 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>4.284 ms</td><td>-21.22 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.159 ms	-21.09 dBm				2	N	1	t	2.790 ms	-21.43 dBm				3	N	1	t	4.284 ms	-21.22 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	1.159 ms	-21.09 dBm																																
2	N	1	t	2.790 ms	-21.43 dBm																																
3	N	1	t	4.284 ms	-21.22 dBm																																
GFSK_DH3/MCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 5.680 ms -20.72 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.555 ms</td><td>-20.96 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.185 ms</td><td>-21.24 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.680 ms</td><td>-20.72 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.555 ms	-20.96 dBm				2	N	1	t	4.185 ms	-21.24 dBm				3	N	1	t	5.680 ms	-20.72 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	2.555 ms	-20.96 dBm																																
2	N	1	t	4.185 ms	-21.24 dBm																																
3	N	1	t	5.680 ms	-20.72 dBm																																
GFSK_DH3/HCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 6.535 ms -20.56 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 10.13 ms (8001 pts) <table><thead><tr><th>MKR</th><th>MODE</th><th>TRG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>2.784 ms</td><td>-20.83 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.418 ms</td><td>-21.12 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>6.535 ms</td><td>-20.56 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	2.784 ms	-20.83 dBm				2	N	1	t	4.418 ms	-21.12 dBm				3	N	1	t	6.535 ms	-20.56 dBm			
MKR	MODE	TRG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																													
1	N	1	t	2.784 ms	-20.83 dBm																																
2	N	1	t	4.418 ms	-21.12 dBm																																
3	N	1	t	6.535 ms	-20.56 dBm																																

GFSK_DH5/LCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref 0.00 dBm Mkr3 9.090 ms -19.03 dBm Center 2.402000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>5.336 ms</td><td>-19.27 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>8.197 ms</td><td>-19.34 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>9.090 ms</td><td>-19.03 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.402000000 GHz Start Freq 2.402000000 GHz Stop Freq 2.402000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	5.336 ms	-19.27 dBm				2	N	1	t	8.197 ms	-19.34 dBm				3	N	1	t	9.090 ms	-19.03 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	5.336 ms	-19.27 dBm																																																																																																								
2	N	1	t	8.197 ms	-19.34 dBm																																																																																																								
3	N	1	t	9.090 ms	-19.03 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
GFSK_DH5/MCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref 0.00 dBm Mkr3 5.032 ms -19.03 dBm Center 2.441000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>1.288 ms</td><td>-19.11 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>4.149 ms</td><td>-19.18 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>5.032 ms</td><td>-19.03 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.441000000 GHz Stop Freq 2.441000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	1.288 ms	-19.11 dBm				2	N	1	t	4.149 ms	-19.18 dBm				3	N	1	t	5.032 ms	-19.03 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	1.288 ms	-19.11 dBm																																																																																																								
2	N	1	t	4.149 ms	-19.18 dBm																																																																																																								
3	N	1	t	5.032 ms	-19.03 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													
GFSK_DH5/HCH	Keysight Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref 0.00 dBm Mkr3 9.522 ms -18.72 dBm Center 2.480000000 GHz Res BW 1.0 MHz #VBW 3.0 MHz Sweep 73.60 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRIG</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>t</td><td>3.275 ms</td><td>-18.89 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>t</td><td>6.136 ms</td><td>-18.95 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>t</td><td>9.522 ms</td><td>-18.72 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>7</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>8</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>9</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>10</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>11</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table> Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.480000000 GHz Stop Freq 2.480000000 GHz CF Step 1.000000 MHz Man Freq Offset 0 Hz	MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	t	3.275 ms	-18.89 dBm				2	N	1	t	6.136 ms	-18.95 dBm				3	N	1	t	9.522 ms	-18.72 dBm				4									5									6									7									8									9									10									11								
MNR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																																					
1	N	1	t	3.275 ms	-18.89 dBm																																																																																																								
2	N	1	t	6.136 ms	-18.95 dBm																																																																																																								
3	N	1	t	9.522 ms	-18.72 dBm																																																																																																								
4																																																																																																													
5																																																																																																													
6																																																																																																													
7																																																																																																													
8																																																																																																													
9																																																																																																													
10																																																																																																													
11																																																																																																													

Appendix D): Hopping Channel Number

Test Limit

According to §15.247(a)(1)(iii)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

Test Procedure

Test method Refer as ANSI C63.10: 2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.


Test Setup

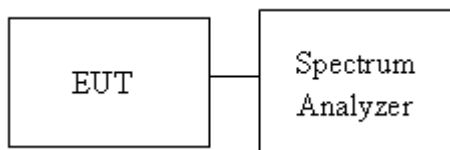

Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

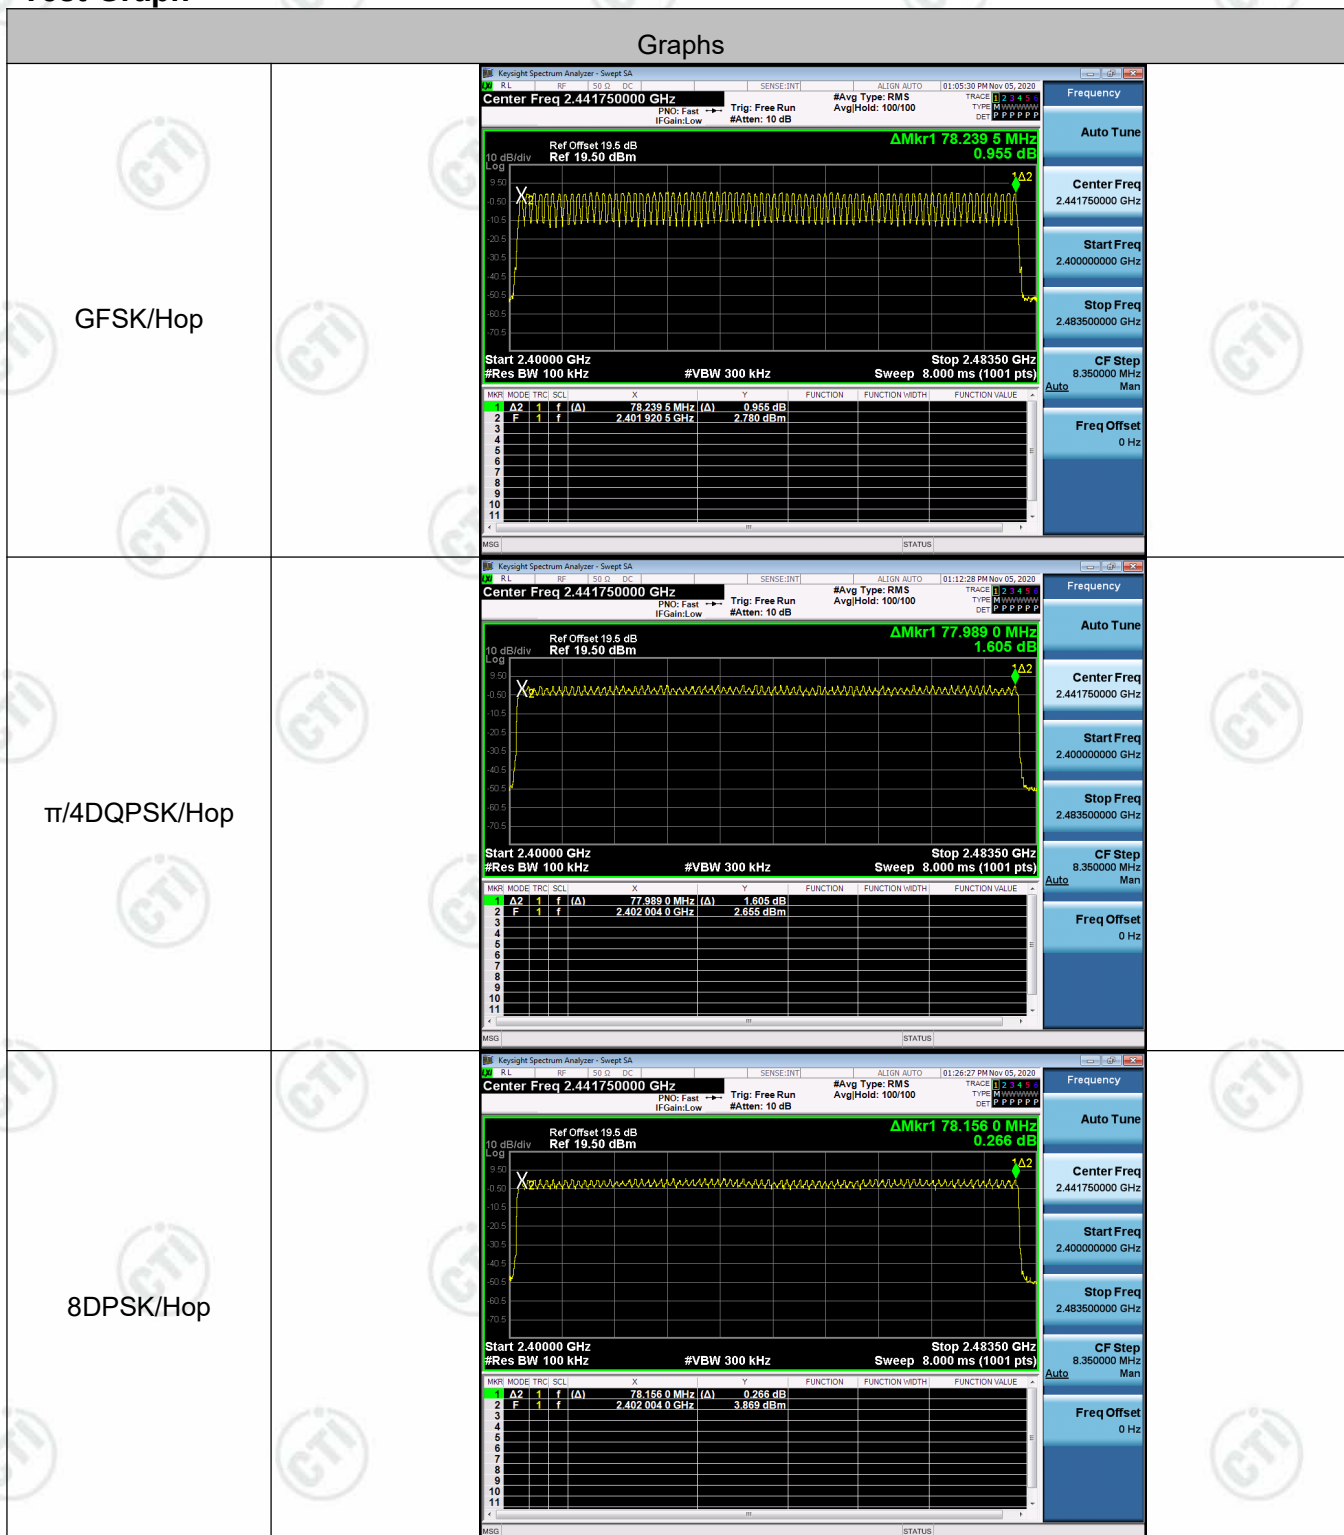

Appendix E): Conducted Peak Output Power

Test Limit

According to §15.247(b)(1).

Peak output power:

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

Test Procedure

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT.
3. Spectrum analyzer settings are as follows :
 - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - b) RBW > 20 dB bandwidth of the emission being measured.
 - c) VBW ≥ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
 - g) Allow trace to stabilize.
 - h) Use the marker-to-peak function to set the marker to the peak of the emission
4. Measure and record the result in the test report.

Test Setup




Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	0.745	PASS
GFSK	MCH	0.983	PASS
GFSK	HCH	0.721	PASS
$\pi/4$ DQPSK	LCH	0.833	PASS
$\pi/4$ DQPSK	MCH	1.414	PASS
$\pi/4$ DQPSK	HCH	1.461	PASS
8DPSK	LCH	1.353	PASS
8DPSK	MCH	1.862	PASS
8DPSK	HCH	1.986	PASS

Test Graph

Graphs	
GFSK/LCH	Keyight Spectrum Analyzer - Swept SA Center Freq 2.40200000 GHz Ref Offset 19.6 dB Ref 19.50 dBm Mkr1 2.402 151 875 GHz 0.745 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Frequency Auto Tune Center Freq 2.40200000 GHz Start Freq 2.399500000 GHz Stop Freq 2.404500000 GHz CF Step 500.000 kHz Auto Man Freq Offset 0 Hz
GFSK/MCH	Keyight Spectrum Analyzer - Swept SA Center Freq 2.441000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.441 035 000 GHz 0.983 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Frequency Auto Tune Center Freq 2.441000000 GHz Start Freq 2.438500000 GHz Stop Freq 2.443500000 GHz CF Step 500.000 kHz Auto Man Freq Offset 0 Hz
GFSK/HCH	Keyight Spectrum Analyzer - Swept SA Center Freq 2.480000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr1 2.480 056 875 GHz 0.721 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts) Frequency Auto Tune Center Freq 2.480000000 GHz Start Freq 2.477500000 GHz Stop Freq 2.482500000 GHz CF Step 500.000 kHz Auto Man Freq Offset 0 Hz

$\pi/4$DQPSK/LCH	
$\pi/4$DQPSK/MCH	
$\pi/4$DQPSK/HCH	

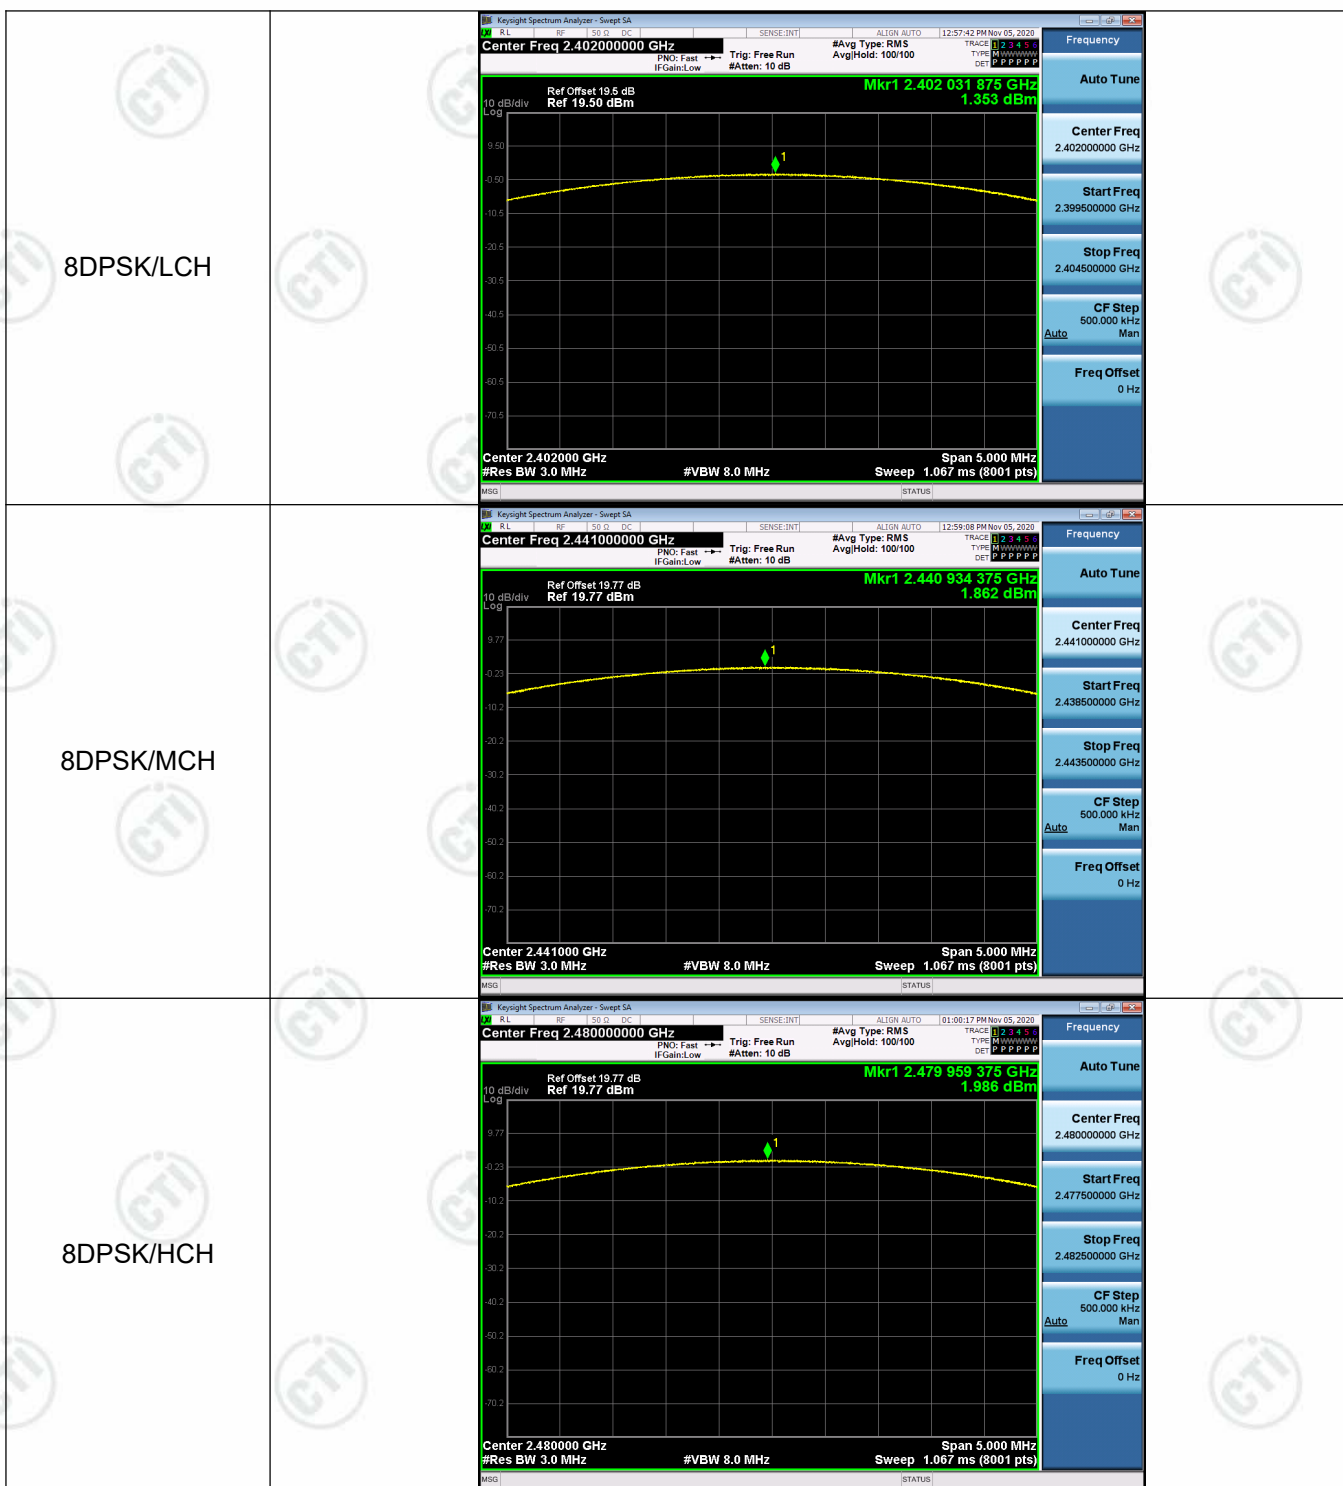

Appendix F): Band-edge for RF Conducted Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.


Test Setup

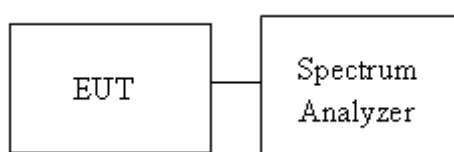




Result Table




Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	0.186	Off	-58.916	-19.81	PASS
			3.671	On	-58.939	-16.33	PASS
GFSK	HCH	2480	0.929	Off	-51.009	-19.07	PASS
			4.315	On	-49.977	-15.69	PASS
π /4DQPSK	LCH	2402	-1.889	Off	-59.789	-21.89	PASS
			4.001	On	-58.223	-16	PASS
π /4DQPSK	HCH	2480	-1.301	Off	-54.086	-21.3	PASS
			4.809	On	-48.522	-15.19	PASS
8DPSK	LCH	2402	-1.833	Off	-59.832	-21.83	PASS
			3.939	On	-57.777	-16.06	PASS
8DPSK	HCH	2480	-0.993	Off	-54.571	-20.99	PASS
			4.913	On	-48.310	-15.09	PASS


Test Graph

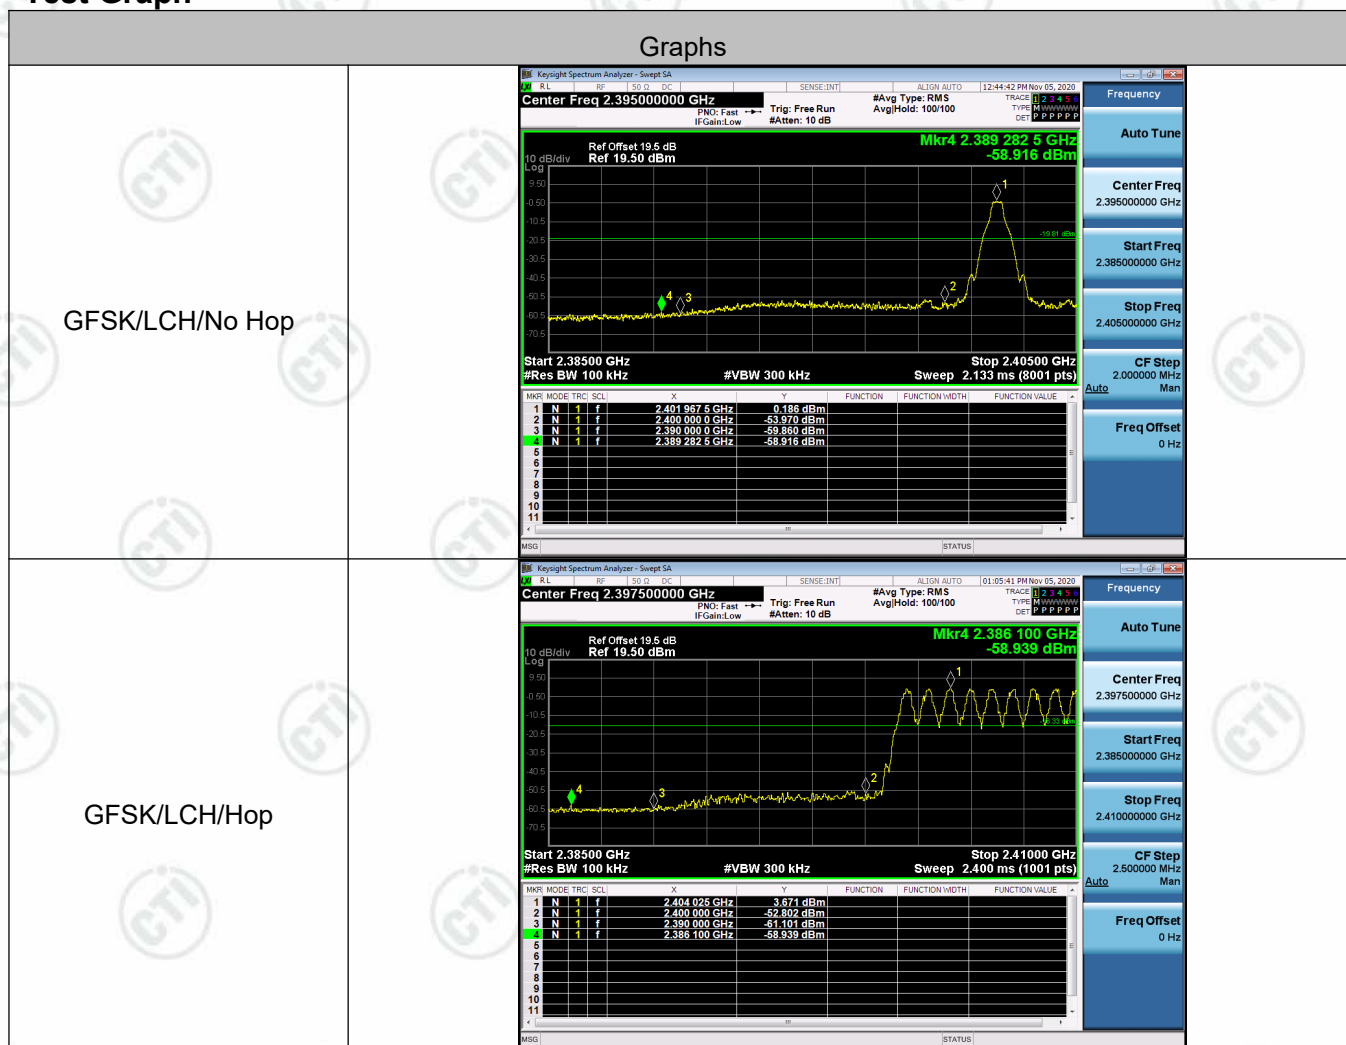

GFSK/HCH/No Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.487500000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.487 809 GHz -51.009 dBm Start 2.47500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.667 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480128 GHz</td><td>0.929 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-54.582 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-61.273 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.487809 GHz</td><td>-51.009 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480128 GHz	0.929 dBm				2	N	1	f	2.483500 GHz	-54.582 dBm				3	N	1	f	2.500000 GHz	-61.273 dBm				4	N	1	f	2.487809 GHz	-51.009 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480128 GHz	0.929 dBm																																									
2	N	1	f	2.483500 GHz	-54.582 dBm																																									
3	N	1	f	2.500000 GHz	-61.273 dBm																																									
4	N	1	f	2.487809 GHz	-51.009 dBm																																									
GFSK/HCH/Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.485000000 GHz Ref Offset 19.77 dB Ref 19.77 dBm Mkr4 2.486 20 GHz -49.977 dBm Start 2.47000 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.50000 GHz Sweep 2.933 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.476396 GHz</td><td>-43.115 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483500 GHz</td><td>-52.888 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500000 GHz</td><td>-60.047 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.486200 GHz</td><td>-49.977 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476396 GHz	-43.115 dBm				2	N	1	f	2.483500 GHz	-52.888 dBm				3	N	1	f	2.500000 GHz	-60.047 dBm				4	N	1	f	2.486200 GHz	-49.977 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.476396 GHz	-43.115 dBm																																									
2	N	1	f	2.483500 GHz	-52.888 dBm																																									
3	N	1	f	2.500000 GHz	-60.047 dBm																																									
4	N	1	f	2.486200 GHz	-49.977 dBm																																									
π /4DQPSK/LCH/No Hop	KeySight Spectrum Analyzer - Swept SA Center Freq 2.395000000 GHz Ref Offset 19.50 dB Ref 19.50 dBm Mkr4 2.388 402 5 GHz -59.789 dBm Start 2.38500 GHz #Res BW 100 kHz #VBW 300 kHz Stop 2.40500 GHz Sweep 2.133 ms (8001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4019875 GHz</td><td>-1.889 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400000 GHz</td><td>-55.826 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390000 GHz</td><td>-61.767 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.3884025 GHz</td><td>-59.789 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4019875 GHz	-1.889 dBm				2	N	1	f	2.400000 GHz	-55.826 dBm				3	N	1	f	2.390000 GHz	-61.767 dBm				4	N	1	f	2.3884025 GHz	-59.789 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4019875 GHz	-1.889 dBm																																									
2	N	1	f	2.400000 GHz	-55.826 dBm																																									
3	N	1	f	2.390000 GHz	-61.767 dBm																																									
4	N	1	f	2.3884025 GHz	-59.789 dBm																																									

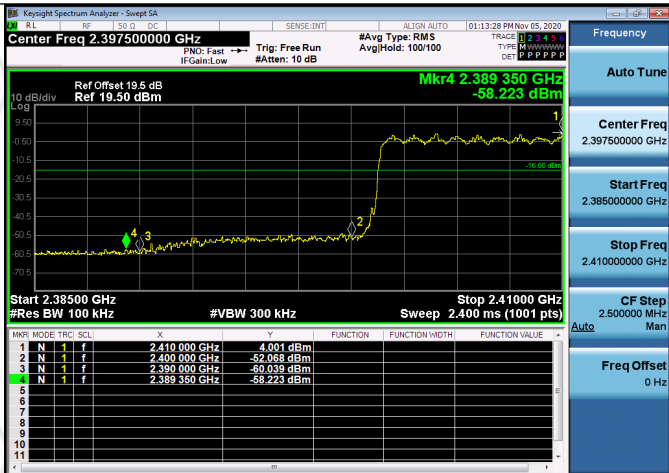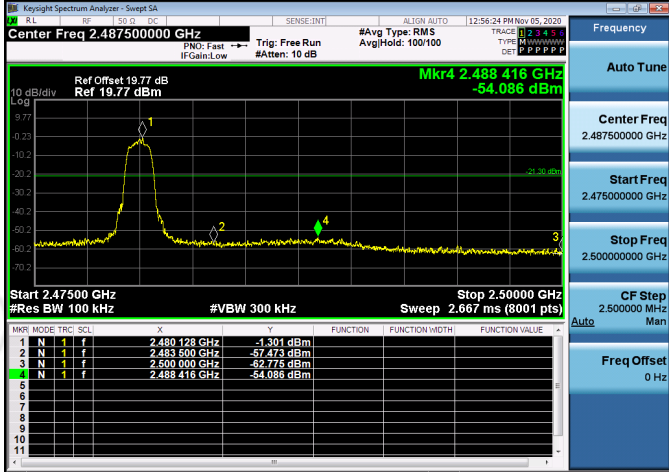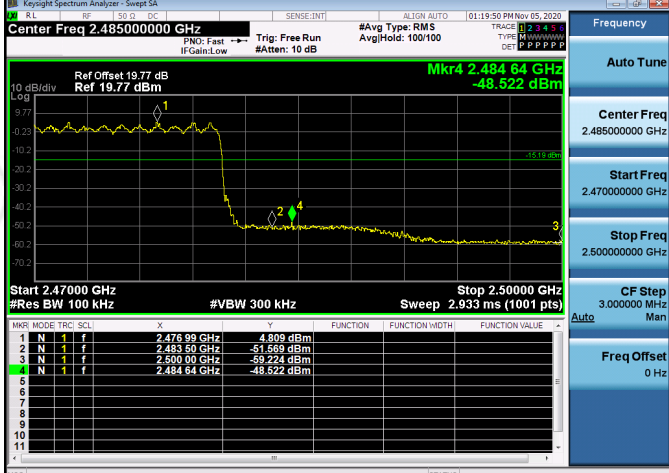$\pi/4$ DQPSK/LCH/Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.410 000 GHz</td><td>4.001 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-52.068 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-60.039 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.389 350 GHz</td><td>-58.223 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.410 000 GHz	4.001 dBm				2	N	1	f	2.400 000 GHz	-52.068 dBm				3	N	1	f	2.390 000 GHz	-60.039 dBm				4	N	1	f	2.389 350 GHz	-58.223 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.410 000 GHz	4.001 dBm																																									
2	N	1	f	2.400 000 GHz	-52.068 dBm																																									
3	N	1	f	2.390 000 GHz	-60.039 dBm																																									
4	N	1	f	2.389 350 GHz	-58.223 dBm																																									
$\pi/4$ DQPSK/HCH/No Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.480 128 GHz</td><td>-1.801 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-57.473 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-62.775 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488 416 GHz</td><td>-54.086 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.480 128 GHz	-1.801 dBm				2	N	1	f	2.483 500 GHz	-57.473 dBm				3	N	1	f	2.500 000 GHz	-62.775 dBm				4	N	1	f	2.488 416 GHz	-54.086 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.480 128 GHz	-1.801 dBm																																									
2	N	1	f	2.483 500 GHz	-57.473 dBm																																									
3	N	1	f	2.500 000 GHz	-62.775 dBm																																									
4	N	1	f	2.488 416 GHz	-54.086 dBm																																									
$\pi/4$ DQPSK/HCH/Hop	 <table><tr><th>MKR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.476 99 GHz</td><td>4.800 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 50 GHz</td><td>-51.569 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 00 GHz</td><td>-59.224 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.484 64 GHz</td><td>-48.522 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.476 99 GHz	4.800 dBm				2	N	1	f	2.483 50 GHz	-51.569 dBm				3	N	1	f	2.500 00 GHz	-59.224 dBm				4	N	1	f	2.484 64 GHz	-48.522 dBm			
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.476 99 GHz	4.800 dBm																																									
2	N	1	f	2.483 50 GHz	-51.569 dBm																																									
3	N	1	f	2.500 00 GHz	-59.224 dBm																																									
4	N	1	f	2.484 64 GHz	-48.522 dBm																																									

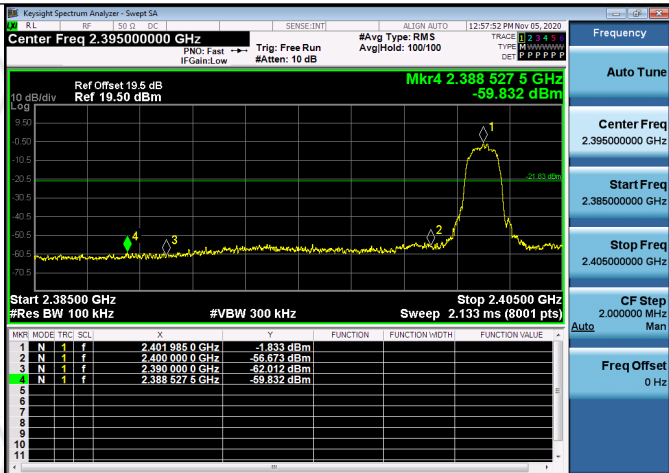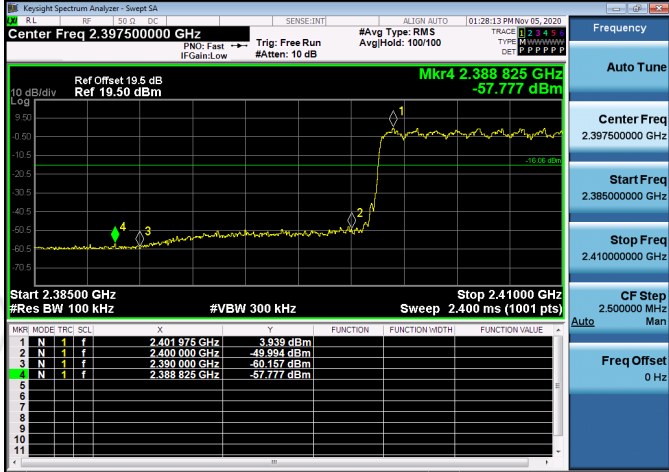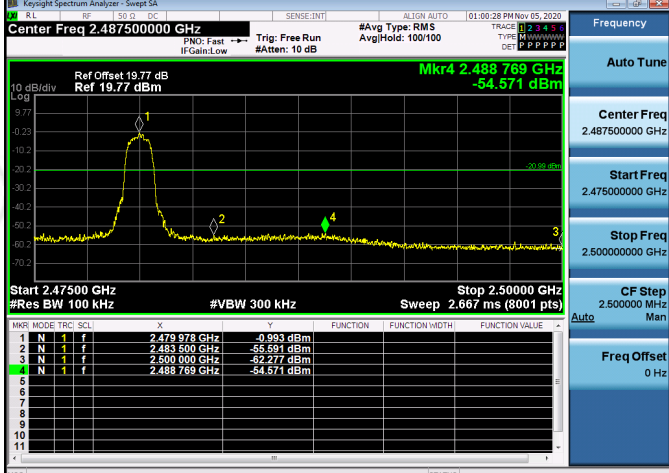8DPSK/LCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 985 0 GHz</td><td>-1.833 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 0 GHz</td><td>-56.673 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 0 GHz</td><td>-62.012 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 527 5 GHz</td><td>-59.832 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 985 0 GHz	-1.833 dBm				2	N	1	f	2.400 000 0 GHz	-56.673 dBm				3	N	1	f	2.390 000 0 GHz	-62.012 dBm				4	N	1	f	2.388 527 5 GHz	-59.832 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 985 0 GHz	-1.833 dBm																																									
2	N	1	f	2.400 000 0 GHz	-56.673 dBm																																									
3	N	1	f	2.390 000 0 GHz	-62.012 dBm																																									
4	N	1	f	2.388 527 5 GHz	-59.832 dBm																																									
8DPSK/LCH/Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.401 975 GHz</td><td>-3.839 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.400 000 GHz</td><td>-49.894 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.390 000 GHz</td><td>-60.157 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.388 825 GHz</td><td>-57.777 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.401 975 GHz	-3.839 dBm				2	N	1	f	2.400 000 GHz	-49.894 dBm				3	N	1	f	2.390 000 GHz	-60.157 dBm				4	N	1	f	2.388 825 GHz	-57.777 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.401 975 GHz	-3.839 dBm																																									
2	N	1	f	2.400 000 GHz	-49.894 dBm																																									
3	N	1	f	2.390 000 GHz	-60.157 dBm																																									
4	N	1	f	2.388 825 GHz	-57.777 dBm																																									
8DPSK/HCH/No Hop	 <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.479 978 GHz</td><td>-0.993 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.483 500 GHz</td><td>-55.591 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.500 000 GHz</td><td>-62.277 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.488 769 GHz</td><td>-54.571 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.479 978 GHz	-0.993 dBm				2	N	1	f	2.483 500 GHz	-55.591 dBm				3	N	1	f	2.500 000 GHz	-62.277 dBm				4	N	1	f	2.488 769 GHz	-54.571 dBm			
MNR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.479 978 GHz	-0.993 dBm																																									
2	N	1	f	2.483 500 GHz	-55.591 dBm																																									
3	N	1	f	2.500 000 GHz	-62.277 dBm																																									
4	N	1	f	2.488 769 GHz	-54.571 dBm																																									

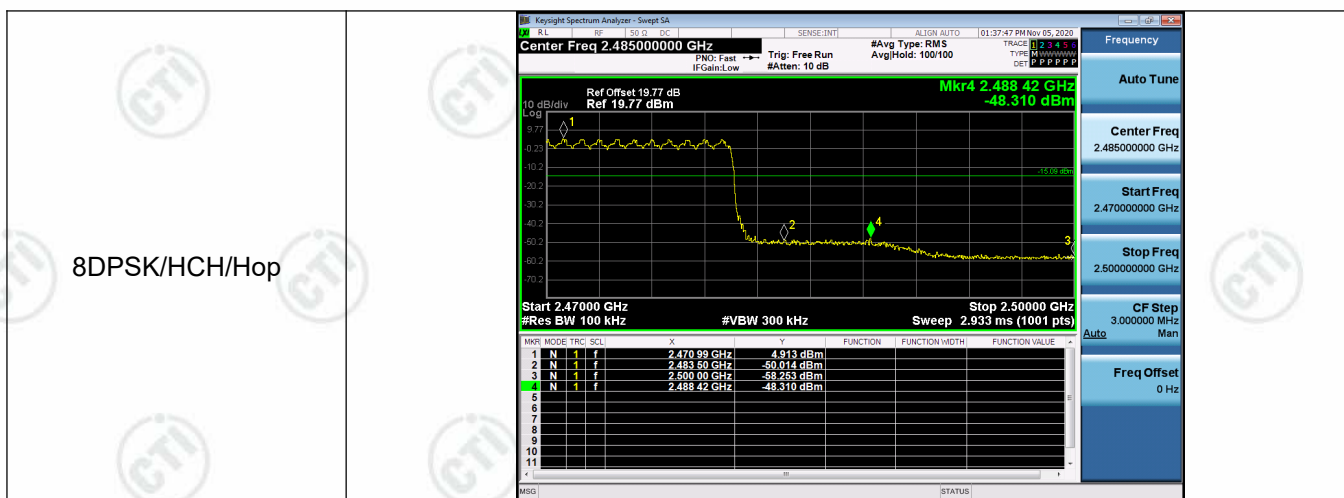

Appendix G): RF Conducted Spurious Emissions

Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

Test Procedure

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.


Test Setup



Result Table


Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	0.423	<Limit	PASS
GFSK	MCH	0.643	<Limit	PASS
GFSK	HCH	0.784	<Limit	PASS
$\pi/4$ DQPSK	LCH	-2.02	<Limit	PASS
$\pi/4$ DQPSK	MCH	-1.133	<Limit	PASS
$\pi/4$ DQPSK	HCH	-1.19	<Limit	PASS
8DPSK	LCH	-1.837	<Limit	PASS
8DPSK	MCH	-1.119	<Limit	PASS
8DPSK	HCH	-1.236	<Limit	PASS


Test Graph

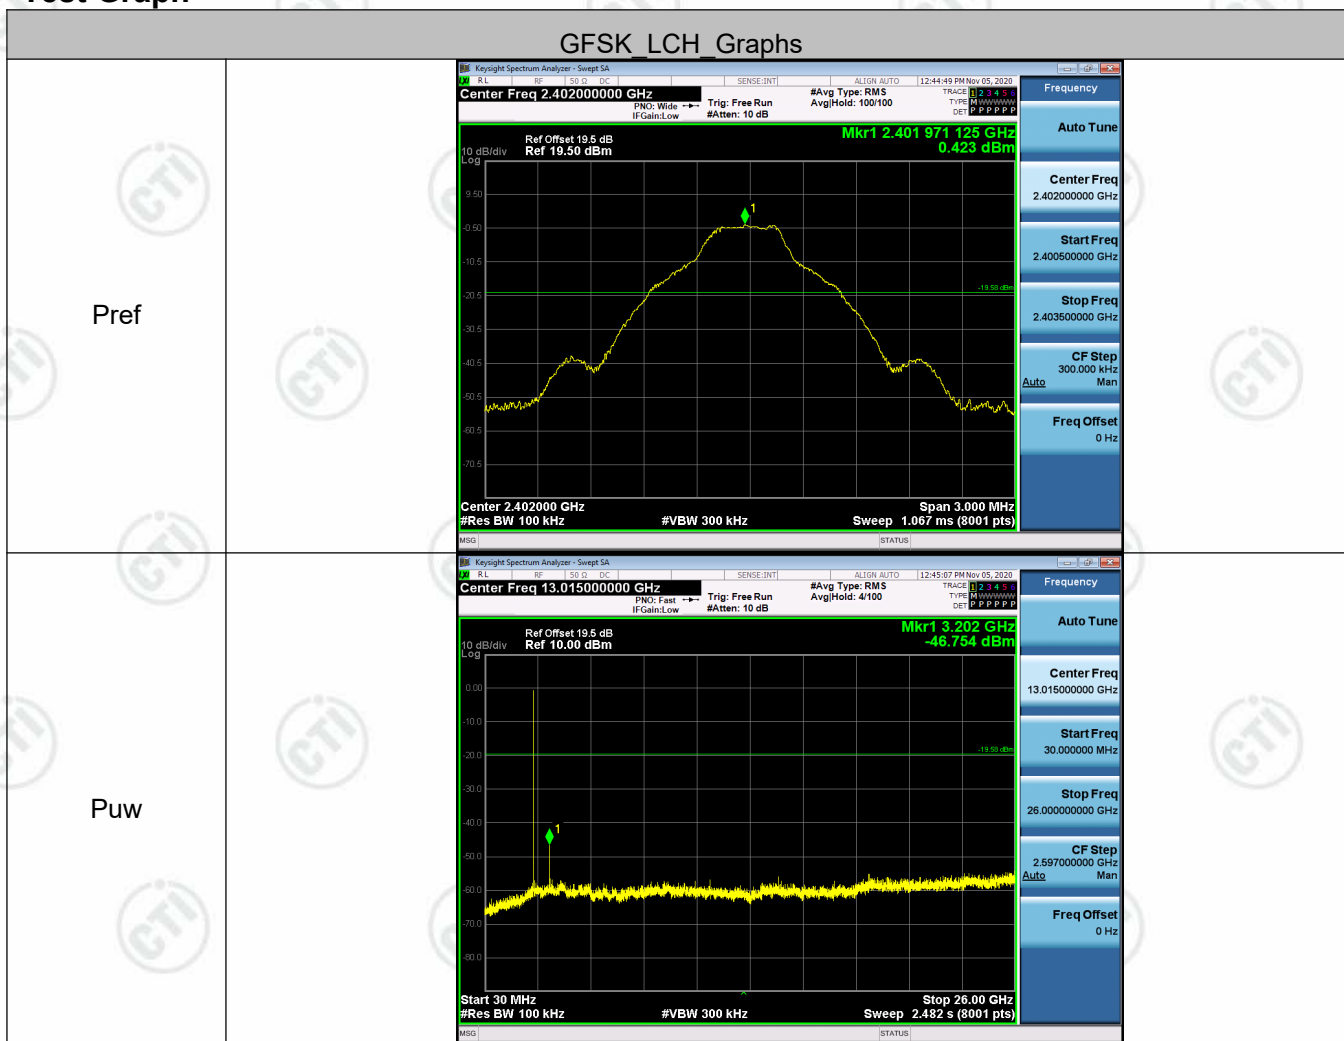






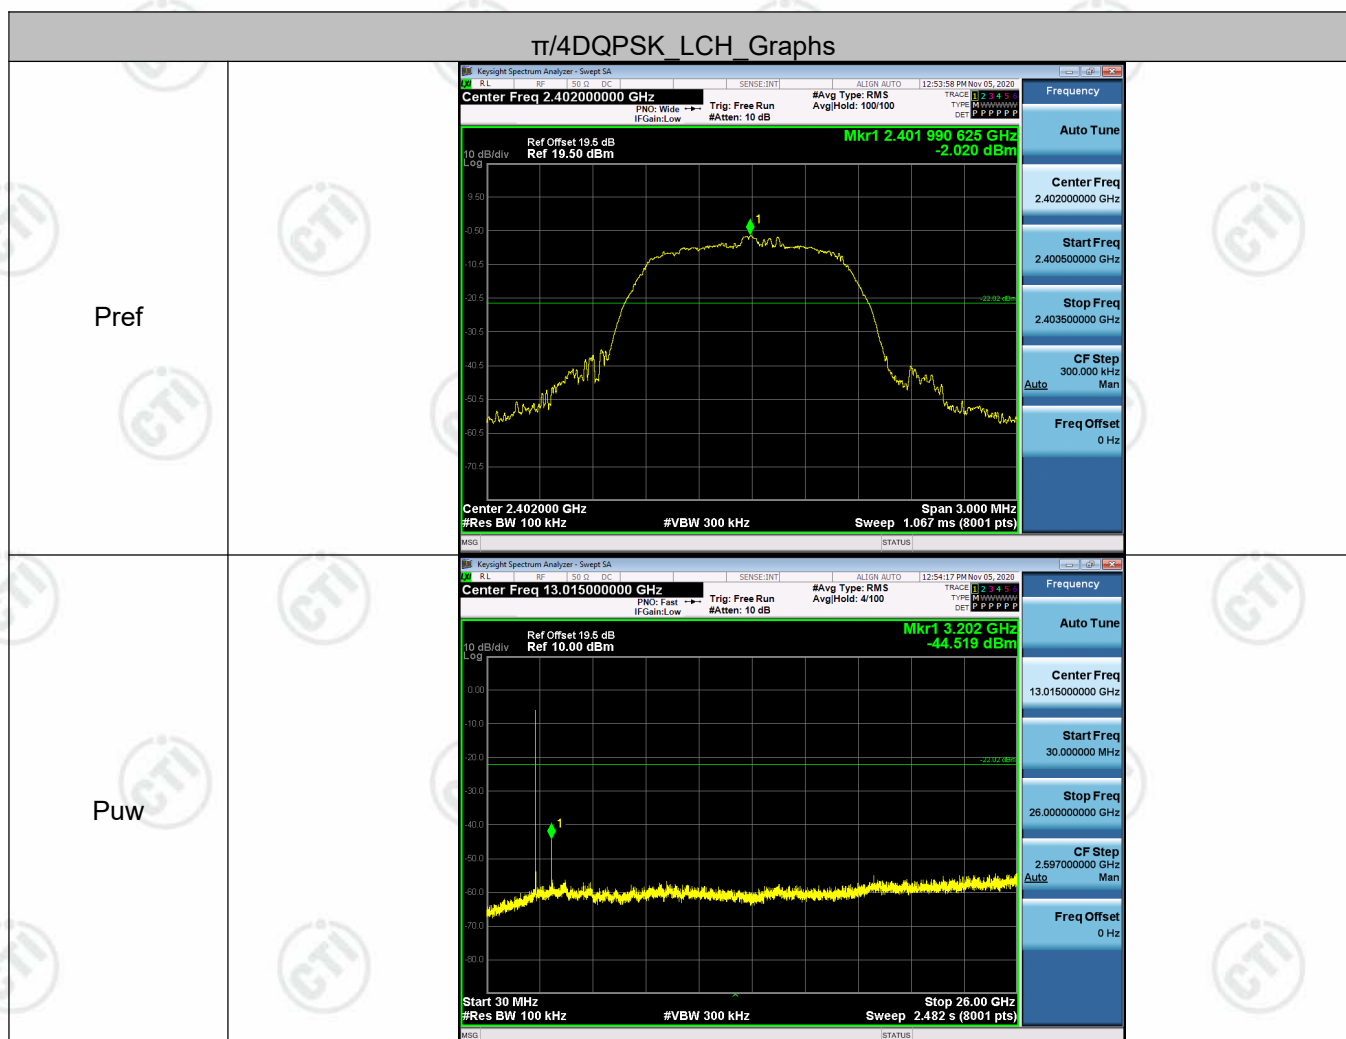

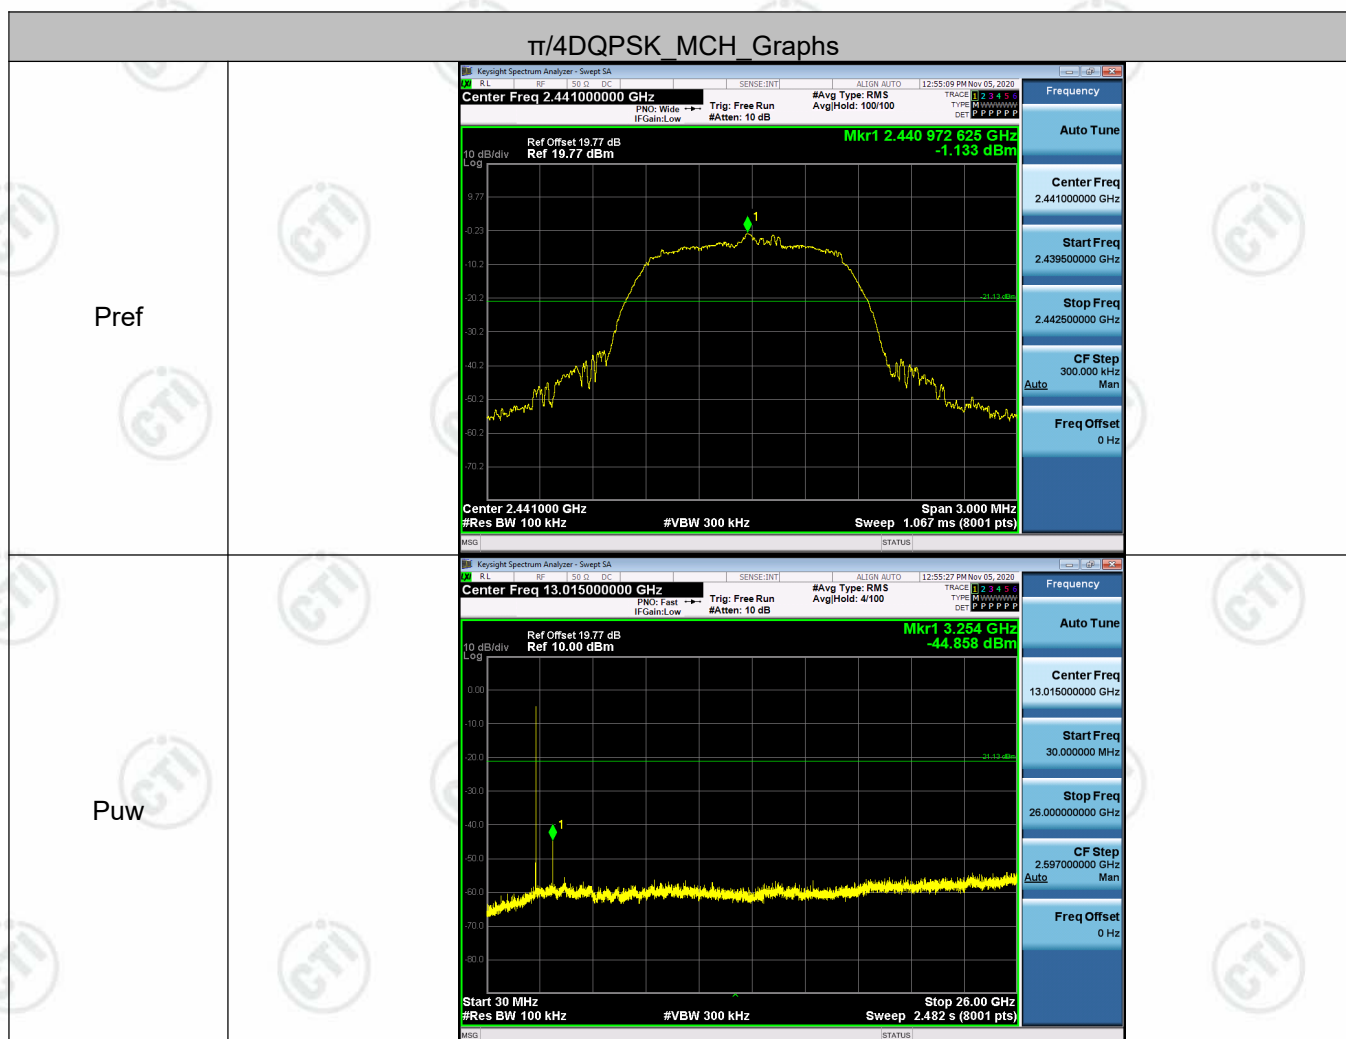

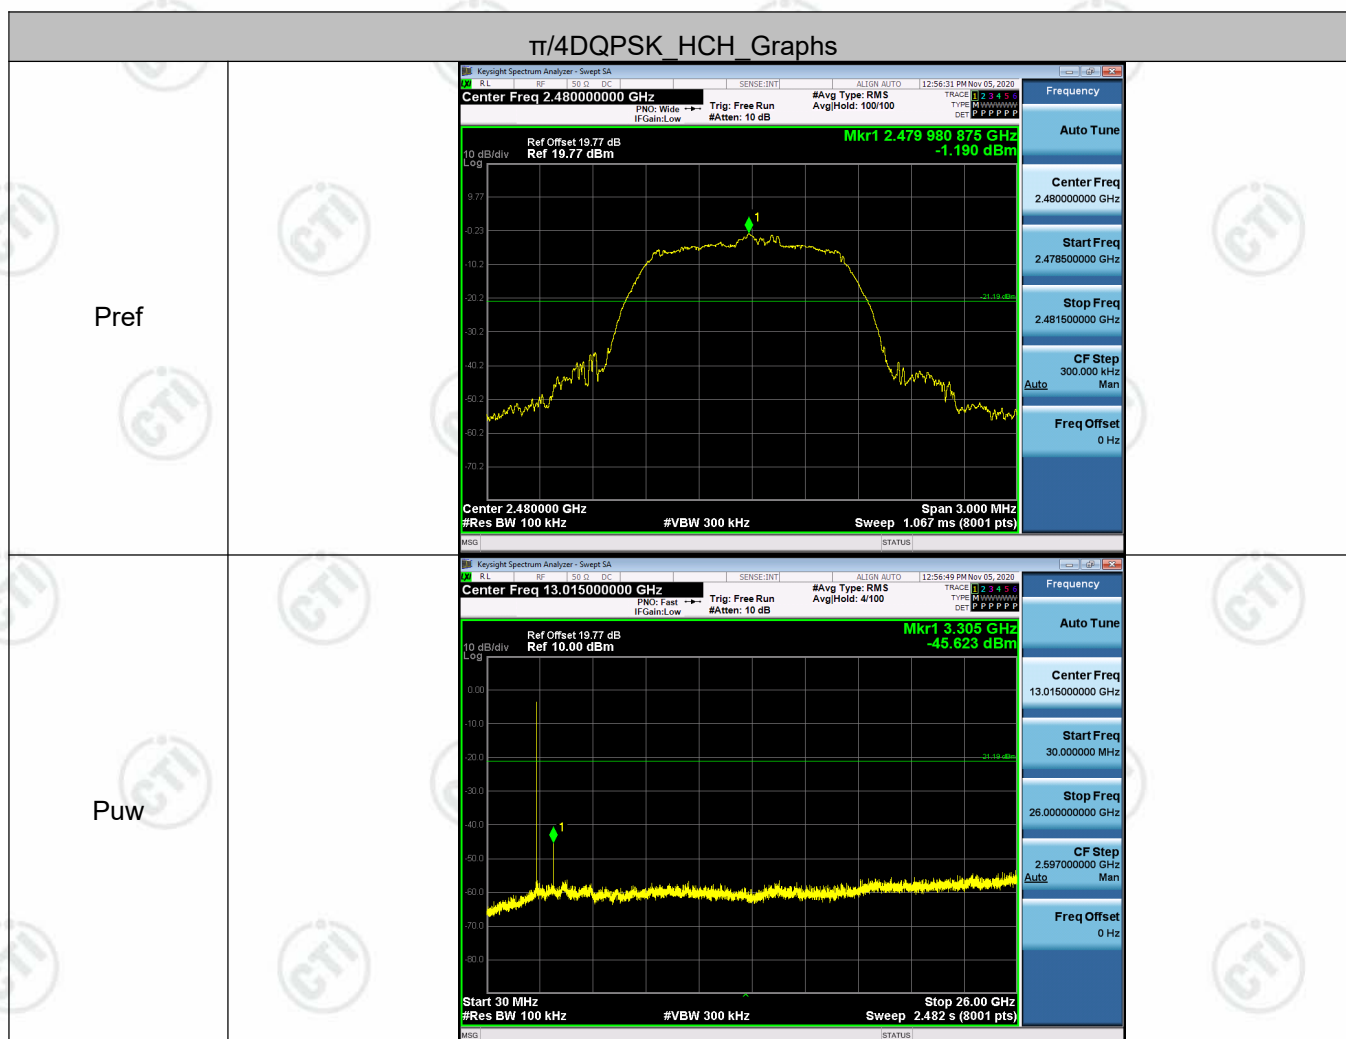







Appendix H) Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.	
EUT Pseudorandom Frequency Hopping Sequence	
The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones. • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <i>Linear Feedback Shift Register for Generation of the PRBS sequence</i> An example of Pseudorandom Frequency Hopping Sequence as follow: Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals. The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.	

Appendix I) Antenna Requirement


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

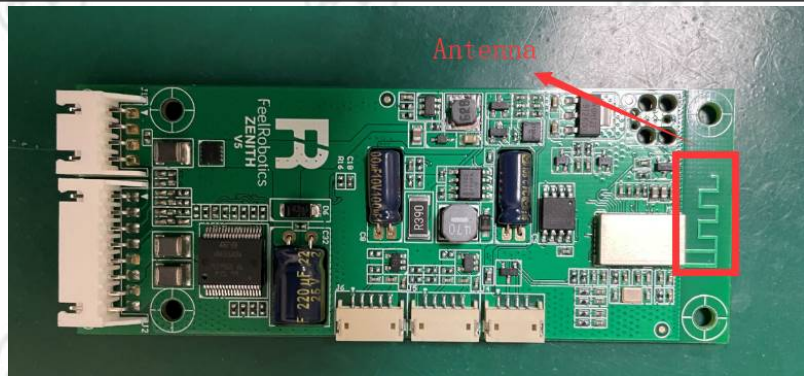

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.

Appendix J) AC Power Line Conducted Emission

Test Procedure:	Test frequency range :150KHz-30MHz 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency			


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were


detected.

Live line:

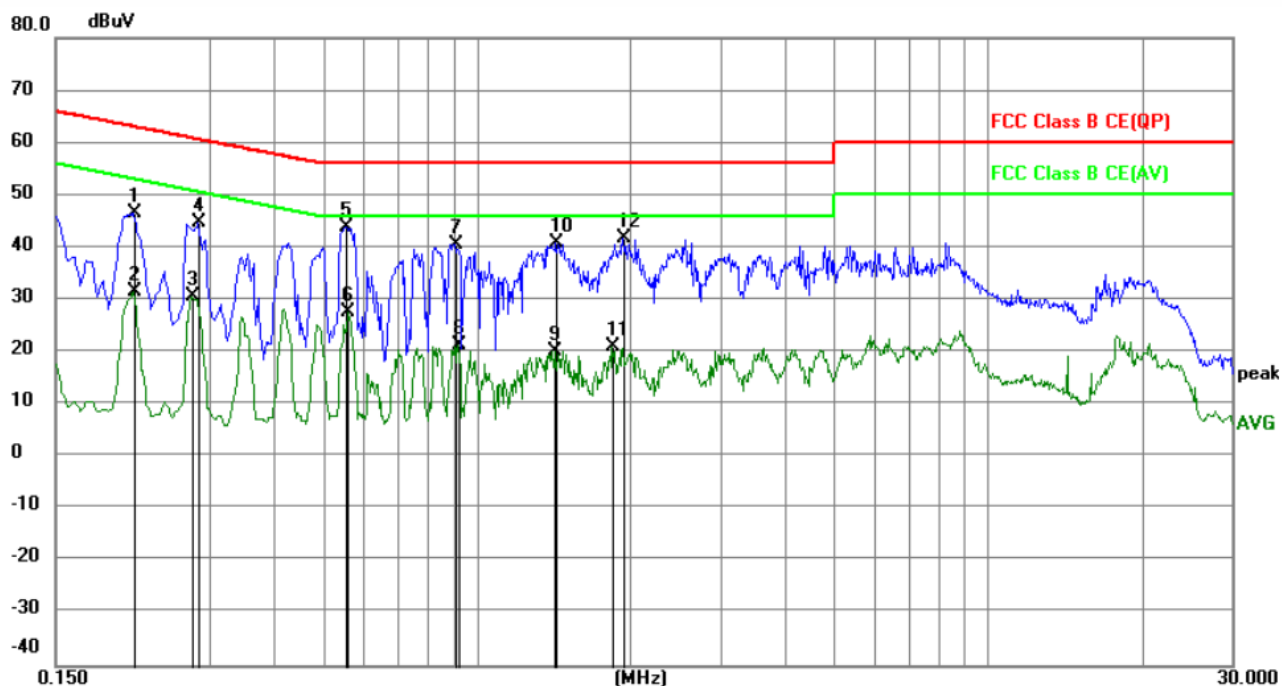

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	36.60	9.90	46.50	63.09	-16.59	QP	
2		0.2130	21.72	9.90	31.62	53.09	-21.47	AVG	
3		0.2760	20.57	10.02	30.59	50.94	-20.35	AVG	
4		0.2850	34.65	10.04	44.69	60.67	-15.98	QP	
5	*	0.5550	33.93	10.02	43.95	56.00	-12.05	QP	
6		0.5595	17.52	10.02	27.54	46.00	-18.46	AVG	
7		0.9060	30.83	9.85	40.68	56.00	-15.32	QP	
8		0.9195	11.61	9.85	21.46	46.00	-24.54	AVG	
9		1.4235	10.47	9.81	20.28	46.00	-25.72	AVG	
10		1.4280	31.03	9.81	40.84	56.00	-15.16	QP	
11		1.8465	11.18	9.80	20.98	46.00	-25.02	AVG	
12		1.9320	31.94	9.79	41.73	56.00	-14.27	QP	

Neutral line:

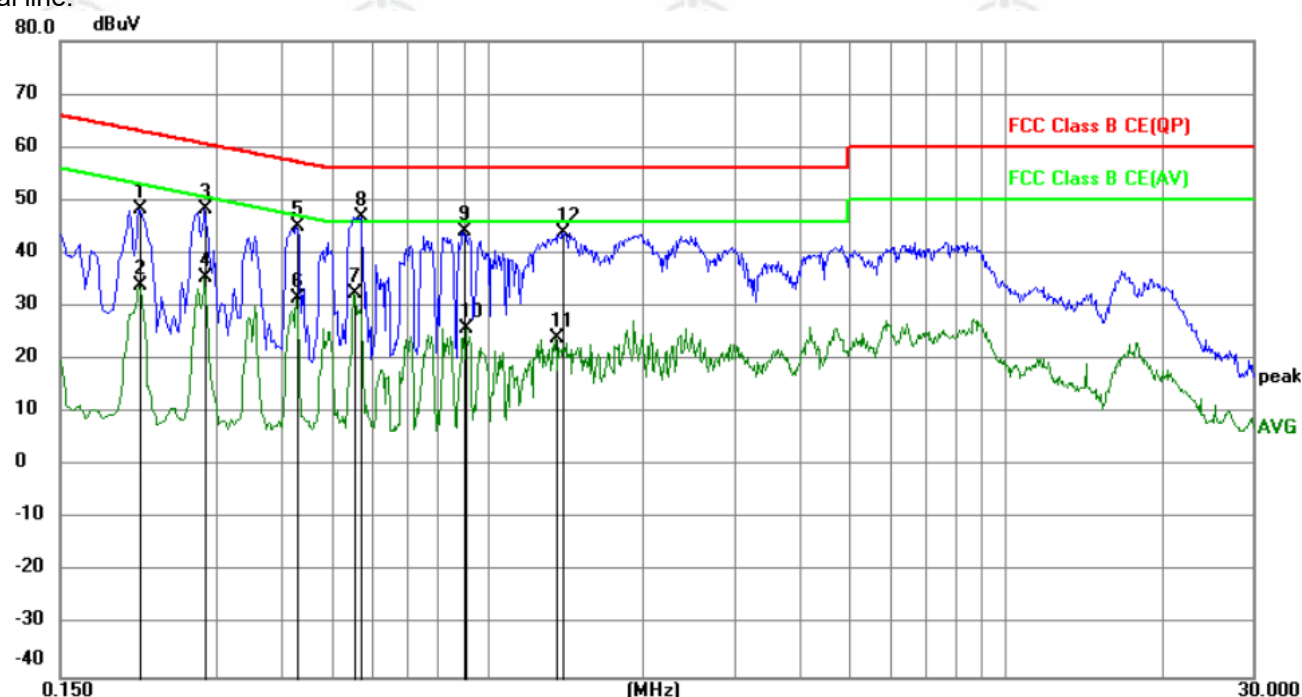

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.2130	38.48	9.90	48.38	63.09	-14.71	QP	
2		0.2130	24.15	9.90	34.05	53.09	-19.04	AVG	
3		0.2850	38.17	10.04	48.21	60.67	-12.46	QP	
4		0.2850	25.47	10.04	35.51	50.67	-15.16	AVG	
5		0.4290	35.14	9.96	45.10	57.27	-12.17	QP	
6		0.4290	21.59	9.96	31.55	47.27	-15.72	AVG	
7		0.5550	22.34	10.02	32.36	46.00	-13.64	AVG	
8	*	0.5730	36.78	10.04	46.82	56.00	-9.18	QP	
9		0.9015	34.20	9.85	44.05	56.00	-11.95	QP	
10		0.9105	15.97	9.85	25.82	46.00	-20.18	AVG	
11		1.3560	14.29	9.82	24.11	46.00	-21.89	AVG	
12		1.3965	34.04	9.81	43.85	56.00	-12.15	QP	

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	Below 1GHz test procedure as below: - The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. - The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. - Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel Above 1GHz test procedure as below: - Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). b. Test the EUT in the lowest channel , the Highest channel - The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. - Repeat above procedures until all frequencies measured was complete.				
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-88MHz	40.0		Quasi-peak Value	
	88MHz-216MHz	43.5		Quasi-peak Value	
	216MHz-960MHz	46.0		Quasi-peak Value	
	960MHz-1GHz	54.0		Quasi-peak Value	
	Above 1GHz	54.0		Average Value	
		74.0		Peak Value	

Test plot as follows:

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

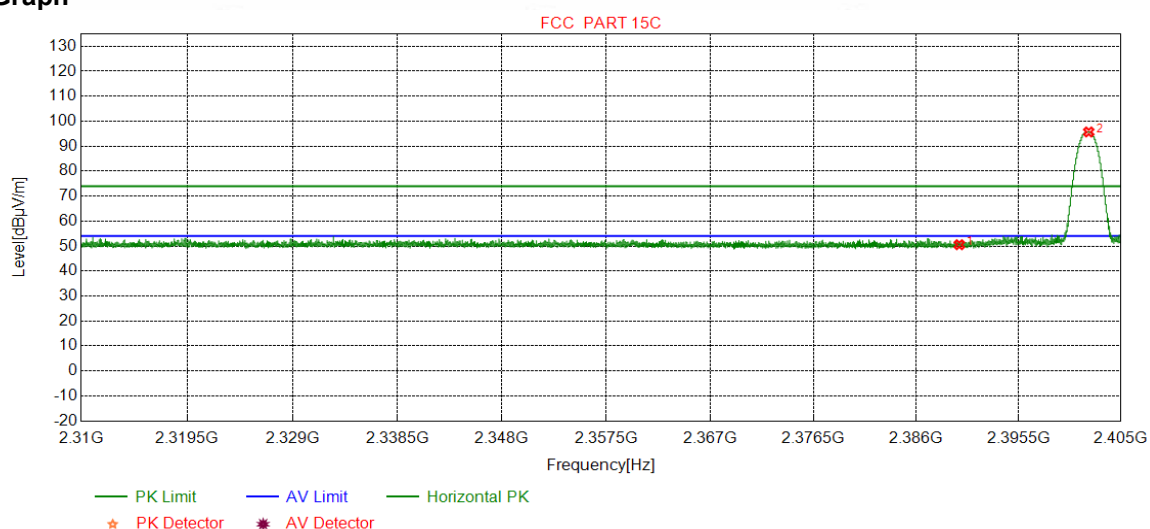

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	48.05	50.55	74.00	23.45	Pass	Horizontal
2	2402.0168	32.26	13.31	-43.12	93.23	95.68	74.00	-21.68	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

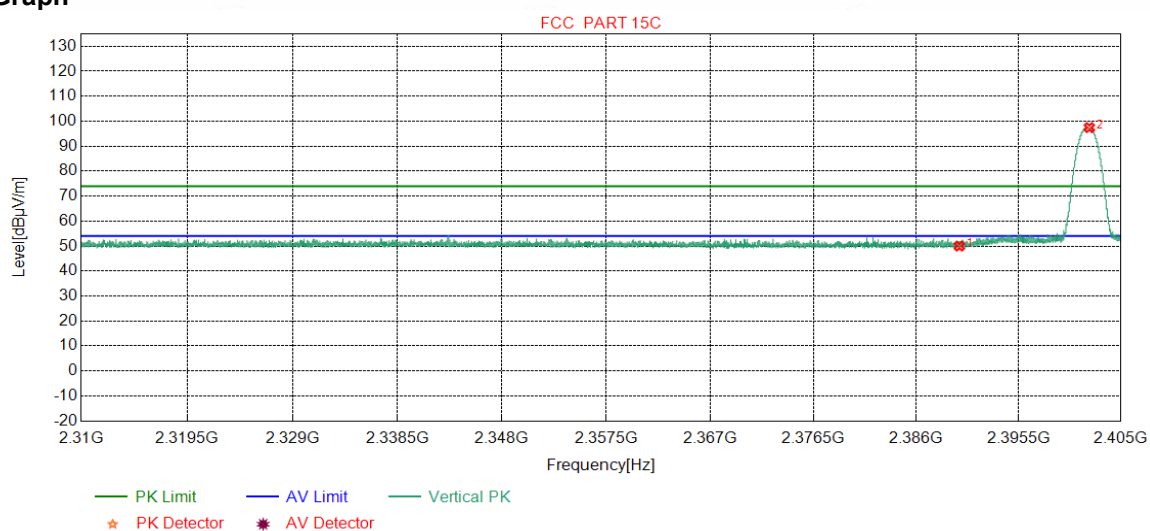

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.49	49.99	74.00	24.01	Pass	Vertical
2	2402.0738	32.26	13.31	-43.12	94.99	97.44	74.00	-23.44	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

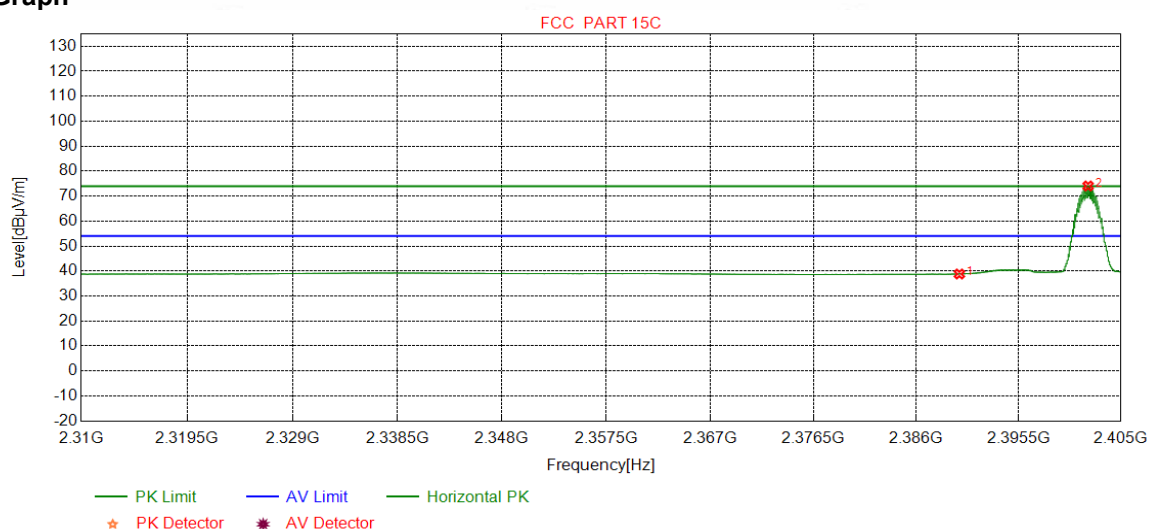

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.31	38.81	54.00	15.19	Pass	Horizontal
2	2401.9598	32.26	13.31	-43.12	71.62	74.07	54.00	-20.07	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

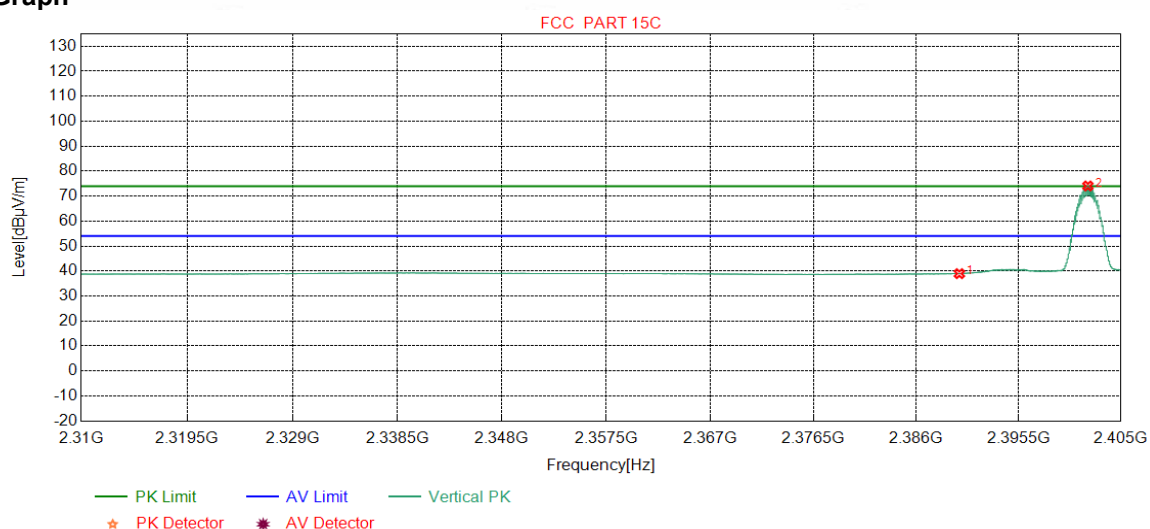

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.46	38.96	54.00	15.04	Pass	Vertical
2	2401.9408	32.26	13.31	-43.12	71.62	74.07	54.00	-20.07	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

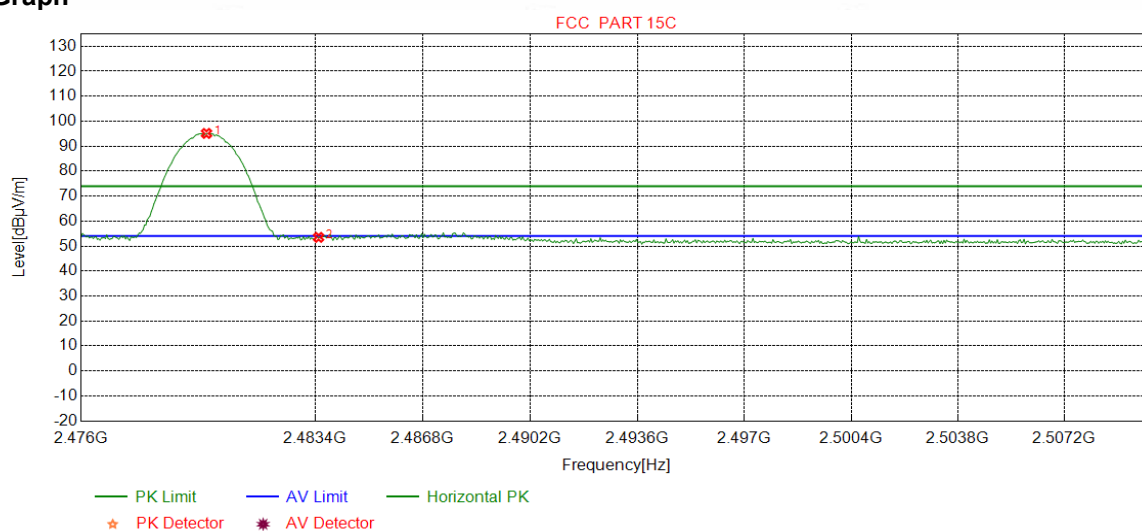

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	92.45	95.11	74.00	-21.11	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	50.83	53.48	74.00	20.52	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

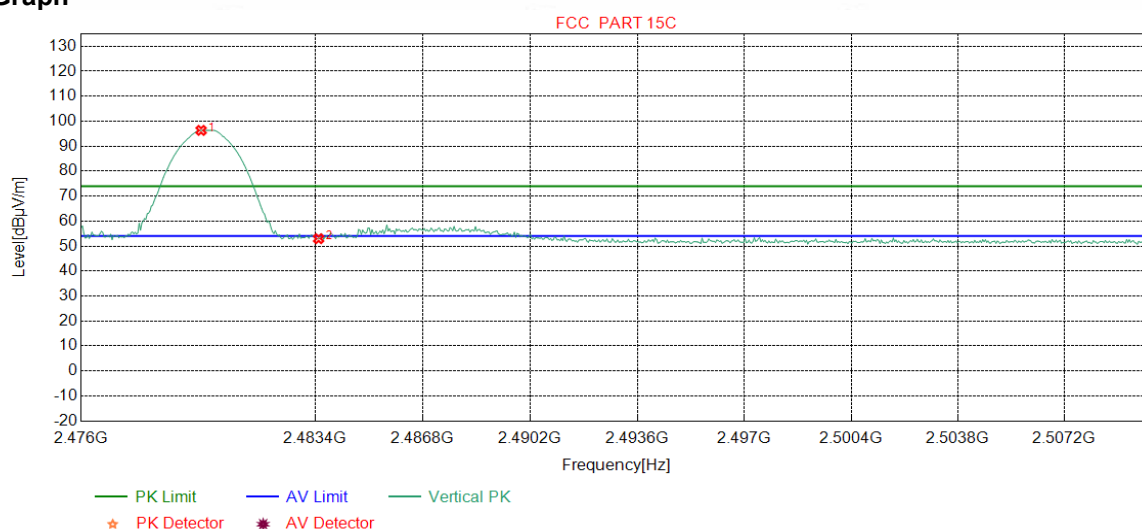

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.7872	32.37	13.39	-43.10	93.66	96.32	74.00	-22.32	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	50.31	52.96	74.00	21.04	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

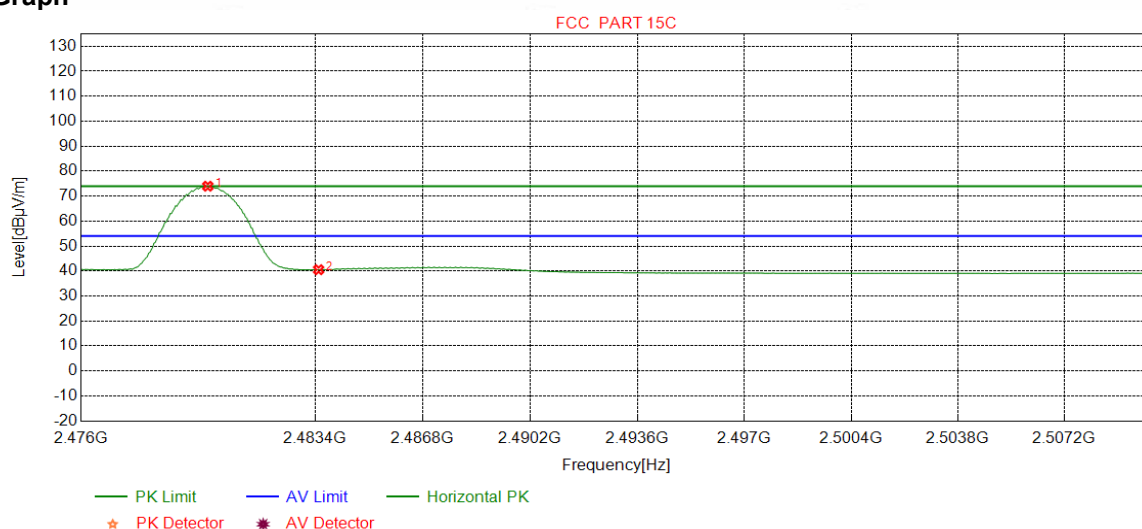

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	71.31	73.97	54.00	-19.97	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	37.89	40.54	54.00	13.46	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

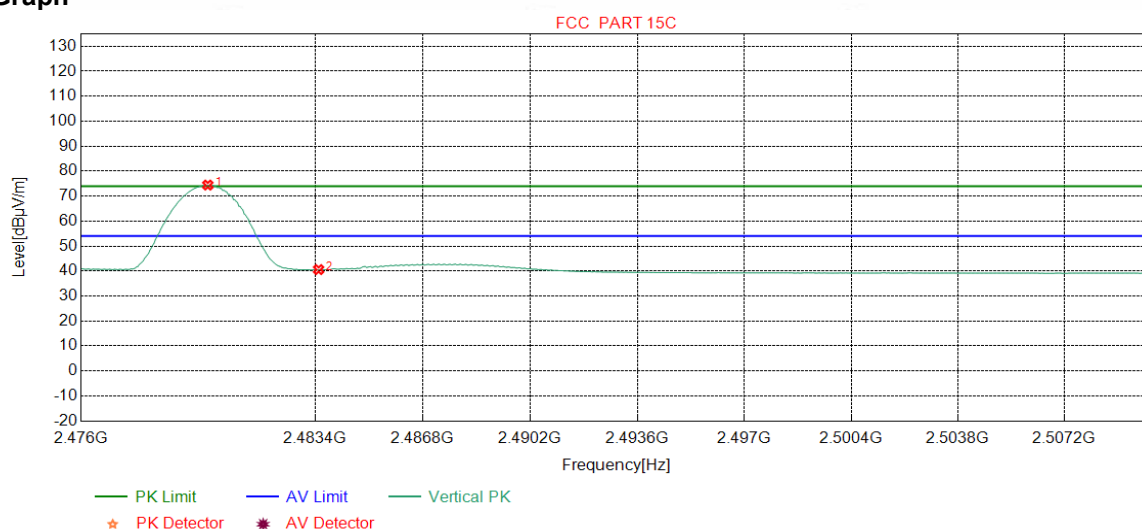

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	71.76	74.42	54.00	-20.42	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	37.94	40.59	54.00	13.41	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

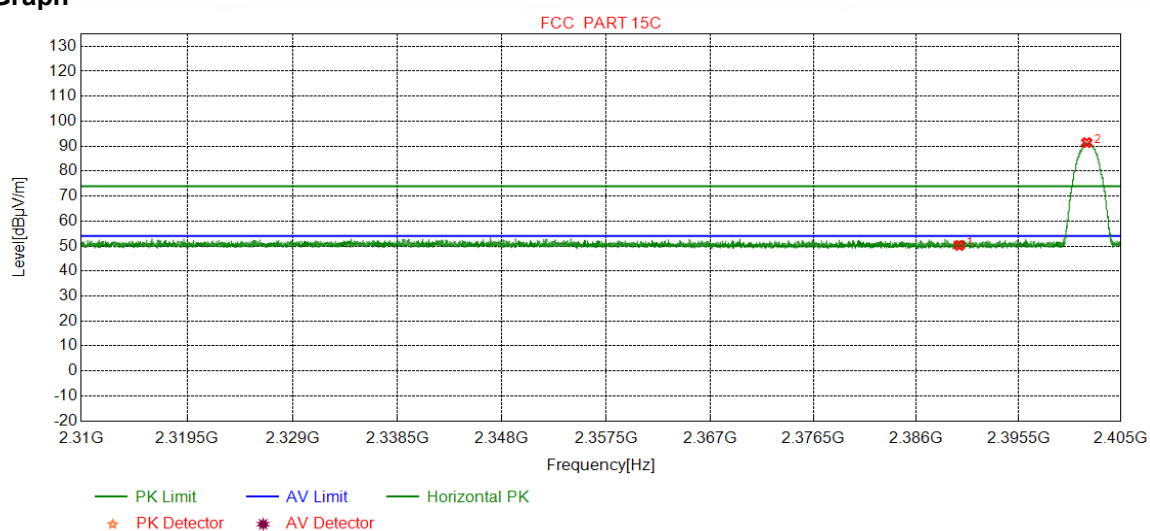

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.76	50.26	74.00	23.74	Pass	Horizontal
2	2401.8331	32.26	13.31	-43.12	88.96	91.41	74.00	-17.41	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	PK		


Test Graph

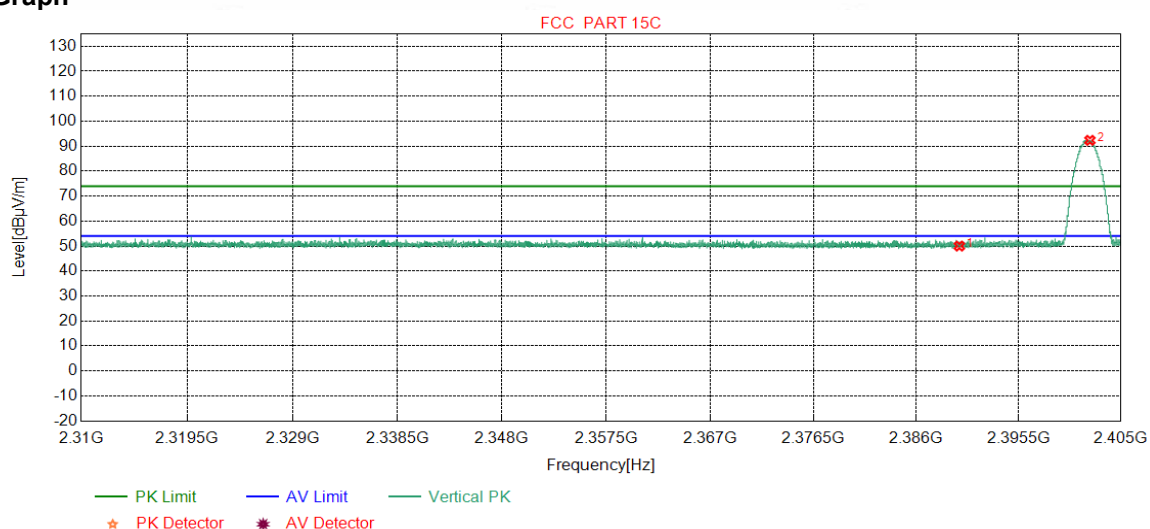

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	47.50	50.00	74.00	24.00	Pass	Vertical
2	2402.1308	32.26	13.31	-43.12	89.89	92.34	74.00	-18.34	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

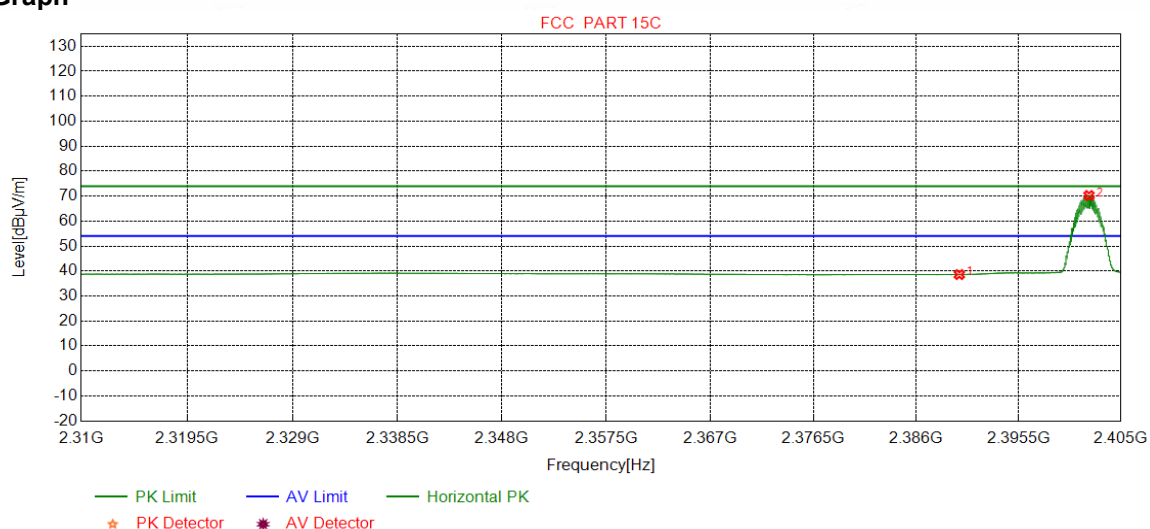

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.09	38.59	54.00	15.41	Pass	Horizontal
2	2402.0421	32.26	13.31	-43.12	67.81	70.26	54.00	-16.26	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	AV		


Test Graph

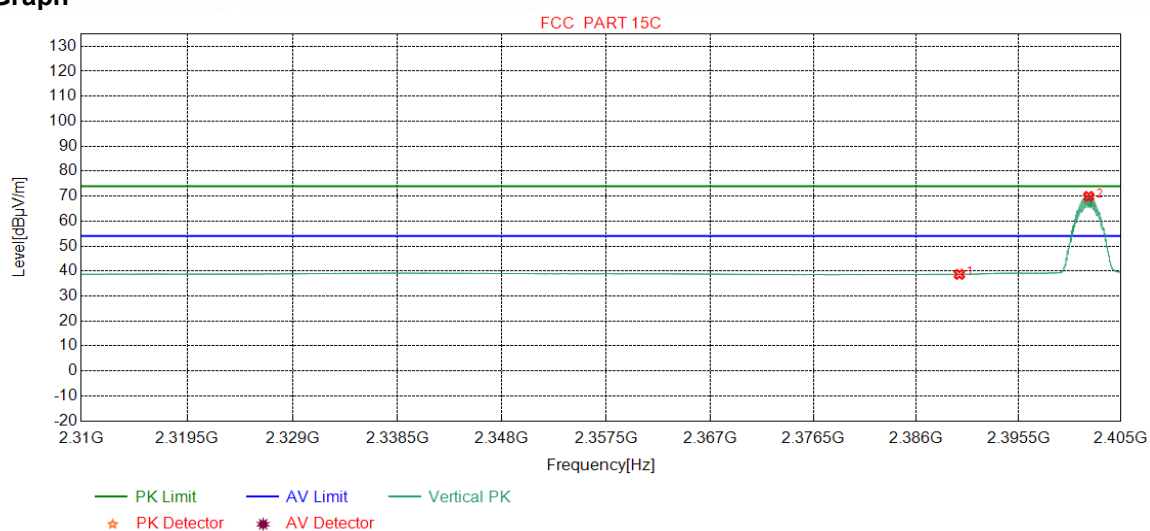

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2390.0000	32.25	13.37	-43.12	36.16	38.66	54.00	15.34	Pass	Vertical
2	2402.0231	32.26	13.31	-43.12	67.44	69.89	54.00	-15.89	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

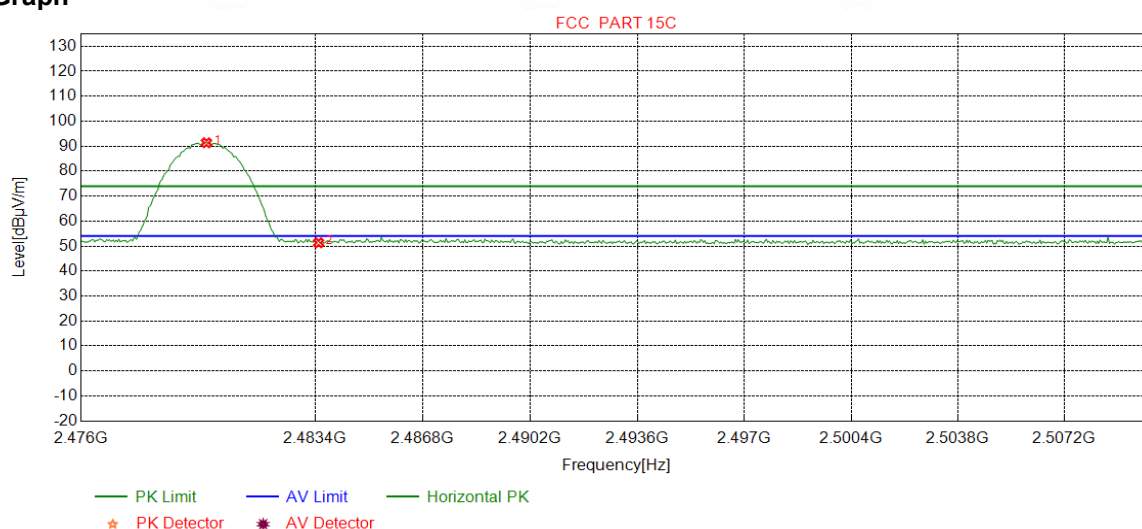

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9574	32.37	13.39	-43.10	88.69	91.35	74.00	-17.35	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	48.65	51.30	74.00	22.70	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	PK		


Test Graph

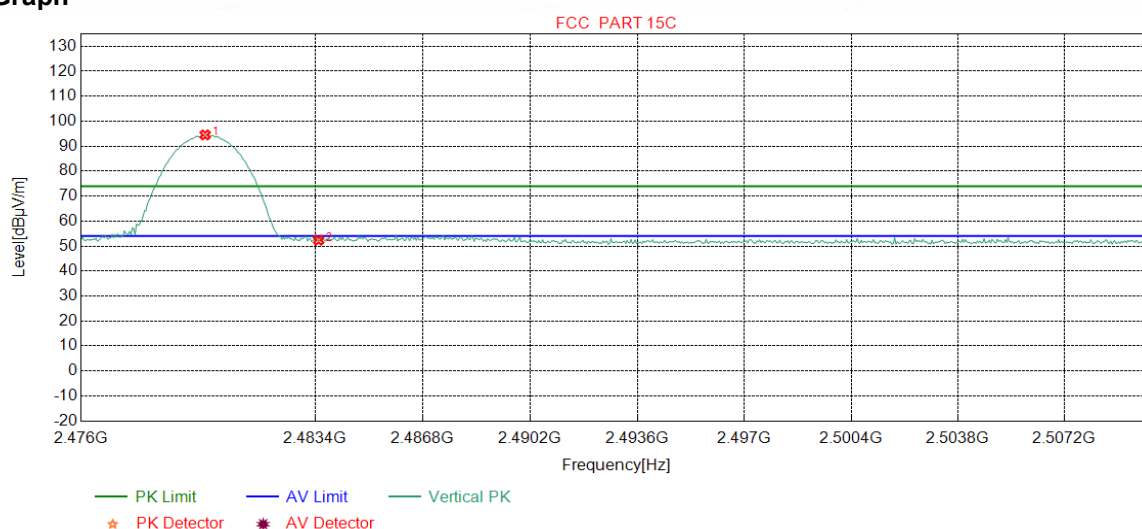

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2479.9149	32.37	13.39	-43.10	91.85	94.51	74.00	-20.51	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	49.69	52.34	74.00	21.66	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		


Test Graph

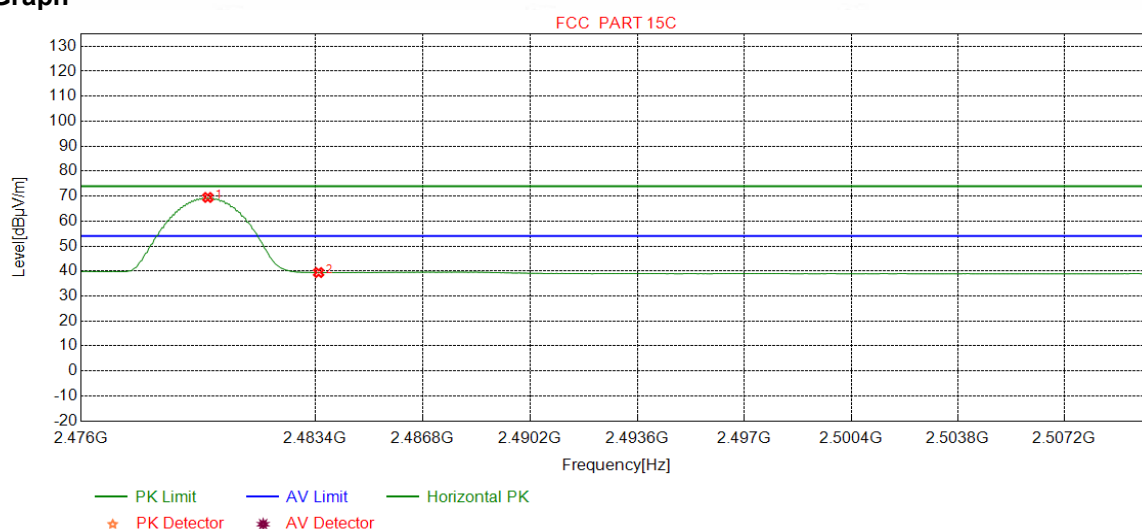

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	66.80	69.46	54.00	-15.46	Pass	Horizontal
2	2483.5000	32.38	13.38	-43.11	36.75	39.40	54.00	14.60	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	AV		

Test Graph

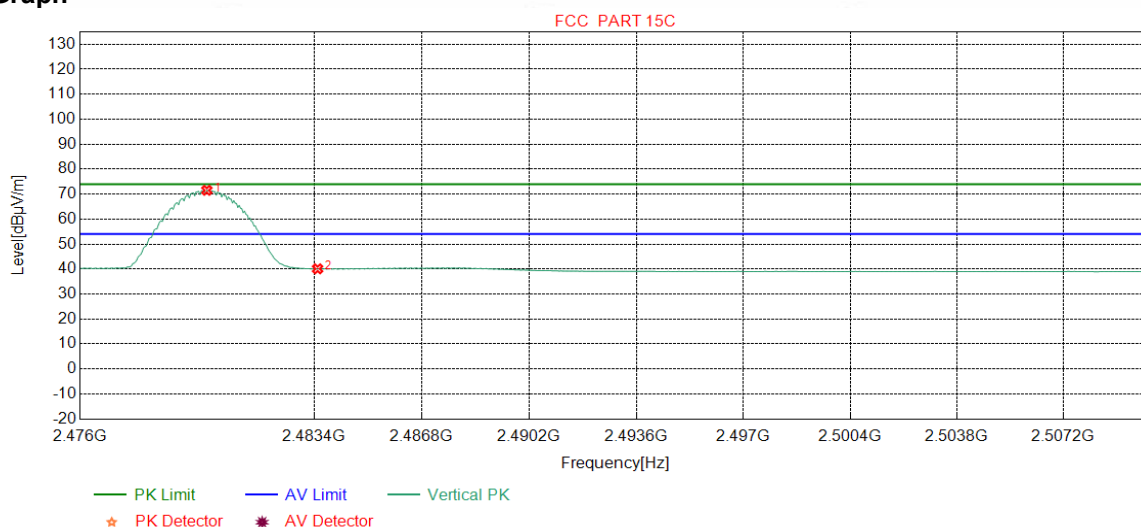

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity
1	2480.0000	32.37	13.39	-43.10	68.86	71.52	54.00	-17.52	Pass	Vertical
2	2483.5000	32.38	13.38	-43.11	37.44	40.09	54.00	13.91	Pass	Vertical

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the DH5 of data type is the worse case of GFSK and 8DPSK modulation type in charge + transmitter mode.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.					
Above 1GHz test procedure as below:					
g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre). h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. j. Repeat above procedures until all frequencies measured was complete.					
Limit:	Frequency	Field strength	Limit	Remark	Measurement
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
	Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

Radiated Spurious Emissions test Data:

Radiated Emission below 1GHz

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	36.5967	11.21	0.67	-31.38	45.07	25.57	40.00	14.43	Pass	H	PK
2	47.9468	13.20	0.78	-31.95	44.35	26.38	40.00	13.62	Pass	H	PK
3	120.0250	9.20	1.30	-32.07	56.47	34.90	43.50	8.60	Pass	H	PK
4	159.9930	7.90	1.47	-31.98	58.72	36.11	43.50	7.39	Pass	H	PK
5	319.9620	13.64	2.12	-31.83	57.22	41.15	46.00	4.85	Pass	H	PK
6	639.9970	19.32	3.07	-32.11	45.88	36.16	46.00	9.84	Pass	H	PK
7	36.5967	11.21	0.67	-31.38	44.84	25.34	40.00	14.66	Pass	V	PK
8	53.5734	12.63	0.83	-32.01	38.19	19.64	40.00	20.36	Pass	V	PK
9	120.0250	9.20	1.30	-32.07	45.11	23.54	43.50	19.96	Pass	V	PK
10	159.9930	7.90	1.47	-31.98	49.21	26.60	43.50	16.90	Pass	V	PK
11	319.9620	13.64	2.12	-31.83	51.74	35.67	46.00	10.33	Pass	V	PK
12	600.0290	19.00	2.96	-31.50	40.49	30.95	46.00	15.05	Pass	V	PK

Radiated Emission Above 1GHz

Mode:			GFSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1447.2447	28.35	2.95	-42.88	51.10	39.52	74.00	34.48	Pass	H	PK
2	1960.8961	31.44	3.43	-43.10	50.36	42.13	74.00	31.87	Pass	H	PK
3	3203.0135	33.28	4.64	-43.10	52.67	47.49	74.00	26.51	Pass	H	PK
4	4804.1203	34.50	4.55	-42.80	50.62	46.87	74.00	27.13	Pass	H	AV
5	7413.2942	36.51	5.85	-42.11	48.84	49.09	74.00	24.91	Pass	H	PK
6	9291.4194	37.64	6.63	-42.05	49.42	51.64	74.00	22.36	Pass	H	PK
7	1990.6991	31.64	3.46	-43.18	56.07	47.99	74.00	26.01	Pass	V	PK
8	3191.0127	33.28	4.64	-43.11	51.87	46.68	74.00	27.32	Pass	V	PK
9	4804.1203	34.50	4.55	-42.80	52.68	48.93	74.00	25.07	Pass	V	PK
10	6879.2586	36.05	5.72	-42.27	49.51	49.01	74.00	24.99	Pass	V	PK
11	9252.4168	37.65	6.60	-42.05	48.84	51.04	74.00	22.96	Pass	V	AV
12	10417.4945	38.38	7.14	-42.01	48.97	52.48	74.00	21.52	Pass	V	PK

Mode:			GFSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2045.7046	31.76	3.55	-43.18	50.34	42.47	74.00	31.53	Pass	H	PK
2	3255.0170	33.30	4.46	-43.09	50.69	45.36	74.00	28.64	Pass	H	PK
3	4997.1331	34.50	4.82	-42.80	50.51	47.03	74.00	26.97	Pass	H	PK
4	6739.2493	36.00	5.65	-42.36	49.17	48.46	74.00	25.54	Pass	H	AV
5	7346.2898	36.45	5.85	-42.13	49.10	49.27	74.00	24.73	Pass	H	PK
6	1992.4993	31.65	3.46	-43.18	57.41	49.34	74.00	24.66	Pass	H	PK
7	3255.0170	33.30	4.46	-43.09	52.63	47.30	74.00	26.70	Pass	V	PK
8	5596.1731	35.15	5.10	-42.60	49.39	47.04	74.00	26.96	Pass	V	AV
9	6987.2658	36.09	5.71	-42.20	49.56	49.16	74.00	24.84	Pass	V	PK
10	9322.4215	37.64	6.63	-42.07	48.79	50.99	74.00	23.01	Pass	V	PK
11	10578.5052	38.52	6.95	-42.00	48.79	52.26	74.00	21.74	Pass	V	PK
12	1992.4993	31.65	3.46	-43.18	57.41	49.34	74.00	24.66	Pass	V	AV

Mode:			GFSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1820.8821	30.52	3.35	-42.77	51.42	42.52	74.00	31.48	Pass	H	PK
2	3307.0205	33.32	4.57	-43.10	51.32	46.11	74.00	27.89	Pass	H	PK
3	4959.1306	34.50	4.82	-42.80	51.67	48.19	74.00	25.81	Pass	H	PK
4	7787.3192	36.49	6.14	-42.17	48.88	49.34	74.00	24.66	Pass	H	AV
5	9302.4202	37.64	6.64	-42.06	49.15	51.37	74.00	22.63	Pass	H	PK
6	10648.5099	38.53	7.01	-42.00	49.63	53.17	74.00	20.83	Pass	H	PK
7	1994.2994	31.66	3.46	-43.18	56.94	48.88	74.00	25.12	Pass	V	PK
8	3306.0204	33.32	4.57	-43.09	52.99	47.79	74.00	26.21	Pass	V	AV
9	4960.1307	34.50	4.82	-42.80	51.35	47.87	74.00	26.13	Pass	V	PK
10	6335.2223	35.87	5.46	-42.54	49.14	47.93	74.00	26.07	Pass	V	PK
11	7872.3248	36.45	5.99	-42.17	49.06	49.33	74.00	24.67	Pass	V	PK
12	10431.4954	38.40	7.09	-42.01	48.79	52.27	74.00	21.73	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2402	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1908.6909	31.10	3.42	-42.98	50.78	42.32	74.00	31.68	Pass	H	PK
2	3202.0135	33.28	4.64	-43.10	51.38	46.20	74.00	27.80	Pass	H	PK
3	5004.1336	34.50	4.82	-42.79	50.49	47.02	74.00	26.98	Pass	H	PK
4	6413.2275	35.88	5.37	-42.52	49.28	48.01	74.00	25.99	Pass	H	AV
5	7932.3288	36.43	6.10	-42.19	50.13	50.47	74.00	23.53	Pass	H	PK
6	10360.4907	38.30	6.98	-42.02	50.09	53.35	74.00	20.65	Pass	H	PK
7	1792.8793	30.33	3.31	-42.71	54.37	45.30	74.00	28.70	Pass	V	PK
8	2402.1402	32.26	3.92	-43.12	55.72	48.78	74.00	25.22	Pass	V	PK
9	3203.0135	33.28	4.64	-43.10	51.82	46.64	74.00	27.36	Pass	V	PK
10	5060.1373	34.56	4.86	-42.78	50.99	47.63	74.00	26.37	Pass	V	PK
11	7682.3122	36.53	6.22	-42.14	48.91	49.52	74.00	24.48	Pass	V	AV
12	10370.4914	38.32	7.03	-42.02	49.78	53.11	74.00	20.89	Pass	V	PK

Mode:			8DPSK Transmitting					Channel:		2441	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1804.4804	30.41	3.33	-42.73	51.25	42.26	74.00	31.74	Pass	H	PK
2	3254.0169	33.30	4.46	-43.10	51.75	46.41	74.00	27.59	Pass	H	PK
3	5006.1337	34.51	4.83	-42.80	50.85	47.39	74.00	26.61	Pass	H	PK
4	6882.2588	36.05	5.74	-42.27	49.56	49.08	74.00	24.92	Pass	H	AV
5	8433.3622	36.57	6.38	-42.03	49.07	49.99	74.00	24.01	Pass	H	PK
6	10350.4900	38.29	6.92	-42.03	49.41	52.59	74.00	21.41	Pass	H	PK
7	1993.2993	31.66	3.46	-43.18	57.44	49.38	74.00	24.62	Pass	V	PK
8	3269.0179	33.31	4.50	-43.10	52.13	46.84	74.00	27.16	Pass	V	AV
9	5028.1352	34.53	4.85	-42.79	51.27	47.86	74.00	26.14	Pass	V	PK
10	6459.2306	35.89	5.51	-42.51	49.30	48.19	74.00	25.81	Pass	V	PK
11	7702.3135	36.52	6.26	-42.14	49.32	49.96	74.00	24.04	Pass	V	PK
12	10242.4828	38.14	6.83	-42.06	49.76	52.67	74.00	21.33	Pass	V	AV

Mode:			8DPSK Transmitting					Channel:		2480	
NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	1960.4961	31.44	3.43	-43.10	51.10	42.87	74.00	31.13	Pass	H	PK
2	3307.0205	33.32	4.57	-43.10	51.62	46.41	74.00	27.59	Pass	H	PK
3	5004.1336	34.50	4.82	-42.79	50.44	46.97	74.00	27.03	Pass	H	PK
4	6937.2625	36.07	5.83	-42.23	49.76	49.43	74.00	24.57	Pass	H	AV
5	9157.4105	37.67	6.45	-42.03	48.93	51.02	74.00	22.98	Pass	H	PK
6	11130.5420	38.68	7.23	-42.00	49.37	53.28	74.00	20.72	Pass	H	PK
7	1793.8794	30.34	3.31	-42.71	53.20	44.14	74.00	29.86	Pass	V	PK
8	3307.0205	33.32	4.57	-43.10	51.38	46.17	74.00	27.83	Pass	V	AV
9	4588.1059	34.50	4.98	-42.80	48.99	45.67	74.00	28.33	Pass	V	PK
10	5069.1379	34.57	4.84	-42.77	50.99	47.63	74.00	26.37	Pass	V	PK
11	6903.2602	36.06	5.88	-42.26	49.50	49.18	74.00	24.82	Pass	V	PK
12	10258.4839	38.16	6.83	-42.05	50.07	53.01	74.00	20.99	Pass	V	AV

Note:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

2) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.