



BUREAU  
VERITAS

# RF Test Report

## 5 GHz WLAN

**Report No.** : FCCCPXY-WAY-P24050169R1  
**Customer** : GNET SYSTEM.CO.,LTD  
**Address** : 2-603,6F,Lotte IT Castle II,550-1,98, Gasan digital 2-ro,Geumcheon-gu Seoul South Korea  
**Use of Report** : Certification  
**Model Name** : GN-WW77  
**FCC ID** : 2A07Z-GN-WW77  
**Date of Test** : 2024.05.21 to 2024.08.08  
**Test Method Used** : FCC 47 CFR PART 15 Subpart E (Section §15.407)  
KDB 789033 D02 v02r01  
ANSI C63.10-2013  
**Testing Environment** : Refer to the Test Condition

**Test Result** : ☒ Pass ☐ Fail

**ISSUED BY:** BV CPS ADT Korea Ltd., EMC/RF Laboratory

**ADDRESS:** Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu, Suwon-si, Gyeonggi-do, Korea 16675

**TEST LOCATION:** HeungAn-daero 49, DongAn-gu, Anyang-si, Gyeonggi-do, Korea, 14119

Tested by

Name : Kwangmin JUNG

(Signature)

Technical Manager

Name : Donghwa SHIN

(Signature)

2024. 08. 09

**BV CPS ADT Korea Ltd.**

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <https://www.cps-bureauveritas.com/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

## RELEASE CONTROL RECORD

| REPORT NO.              | REASON FOR CHANGE    | DATE ISSUED |
|-------------------------|----------------------|-------------|
| FCCCPXY-WAY-P24050169   | Original release     | 2024.07.25  |
| FCCCPXY-WAY-P24050169R1 | Update the test plot | 2024.08.09  |
|                         |                      |             |

# Table of Contents

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| <b>RELEASE CONTROL RECORD .....</b>                             | <b>2</b>  |
| <b>1 SUMMARY OF TEST RESULTS.....</b>                           | <b>4</b>  |
| 1.1 DECISION RULES FOR STATEMENT OF CONFORMITY .....            | 5         |
| 1.2 MEASUREMENT UNCERTAINTY .....                               | 5         |
| <b>2 GENERAL INFORMATION.....</b>                               | <b>6</b>  |
| 2.1 GENERAL DESCRIPTION OF EUT .....                            | 6         |
| 2.2 TESTED SAMPLE AND TESTED COMPANION DEVICE INFORMATION ..... | 6         |
| 2.3 DESCRIPTION OF TEST MODE .....                              | 7         |
| 2.4 TESTED FREQUENCY INFORMATION.....                           | 7         |
| 2.5 INSTRUMENT CALIBRATION.....                                 | 7         |
| 2.6 EUT CONFIGURATION.....                                      | 7         |
| 2.7 GENERAL DESCRIPTION OF APPLIED STANDARDS .....              | 7         |
| 2.8 TEST EQUIPMENT .....                                        | 8         |
| <b>3 TEST RESULTS .....</b>                                     | <b>9</b>  |
| 3.1 ANTENNA REQUIREMENT .....                                   | 9         |
| 3.2 26 dB BANDWIDTH .....                                       | 10        |
| 3.3 6 dB BANDWIDTH.....                                         | 12        |
| 3.4 MAXIMUM CONDUCTED OUTPUT POWER.....                         | 14        |
| 3.5 MAXIMUM POWER SPECTRAL DENSITY .....                        | 16        |
| 3.6 DUTY CYCLE.....                                             | 19        |
| 3.7 SPURIOUS EMISSION, BAND EDGE AND RESTRICTED BANDS.....      | 21        |
| 3.8 AC CONDUCTED EMISSIONS (150 KHz TO 30 MHz).....             | 29        |
| <b>APPENDIX – INFORMATION OF THE TESTING LABORATORIES .....</b> | <b>30</b> |

# 1 Summary of Test Results


The EUT has been tested according to the following specifications

| Applied Standard : FCC Part 15, Subpart E 15.407 |                                                                               |                                                                                                                                                                                              |                   |                     |             |
|--------------------------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------|-------------|
| FCC Part Section(s)                              | Test Description                                                              | Limit                                                                                                                                                                                        | Test Condition    | Test Result         | Reference   |
| 15.407(a)                                        | Emission Bandwidth (26 dB Bandwidth)                                          | N/A                                                                                                                                                                                          | Conducted         | PASS                | Section 3.2 |
| 15.407(e)                                        | Minimum Emission Bandwidth (6 dB Bandwidth)                                   | > 500 kHz in 5725 ~ 5850 MHz                                                                                                                                                                 |                   | PASS                | Section 3.3 |
| 15.407(a)                                        | Maximum Conducted Output Power                                                | 5150 ~ 5250 MHz : < 30.00 dBm<br>5250 ~ 5350 & 5470 ~ 5725 MHz : < 250 mW or < 11 + 10 log <sub>10</sub> (B) dBm, whichever power is less. (B is the 26dB BW.)<br>5725 ~ 5850 MHz : < 30 dBm |                   | PASS                | Section 3.4 |
| 15.407(a)                                        | Peak Power Spectral Density                                                   | 5150 ~ 5250 MHz : 17 dBm/MHz<br>5250 ~ 5350 MHz : 11 dBm/MHz<br>5470 ~ 5725 MHz : 11 dBm/MHz<br>5725 ~ 5850 MHz : 30 dBm/500kHz                                                              |                   | PASS                | Section 3.5 |
| 15.407(h)                                        | Dynamic Frequency Selection                                                   | FCC 15.407(h)                                                                                                                                                                                |                   | NA <sup>Note3</sup> | -           |
| 15.407(b)                                        | Undesirable Emissions                                                         | 5150 ~ 5725 MHz: < -27 dBm/MHz EIRP<br>5725 ~ 5850 MHz: < -27 dBm/MHz or < 10 dBm/MHz or 15.6 dBm/MHz < 27dBm/MHz EIRP                                                                       | Radiated          | PASS                | Section 3.7 |
| 15.205<br>15.209<br>15.407(b)                    | General Field Strength Limits (Restricted Bands and Radiated Emission Limits) | Emissions in restricted bands must meet the radiated limits detailed in 15.209                                                                                                               |                   | PASS                | Section 3.7 |
| 15.207                                           | AC Conducted Emissions (150 kHz – 30 MHz)                                     | < FCC 15.207 limits                                                                                                                                                                          | AC Line Conducted | PASS                | Section 3.8 |
| 15.203                                           | Antenna Requirement                                                           | FCC 15.203                                                                                                                                                                                   | -                 | PASS                | Section 3.1 |

## NOTES

- 1) The general test methods used to test on this devices are ANSI C63.10.
- 2) Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- 3) This equipment does not use a DFS Band.

## 1.1 Decision Rules for Statement of Conformity

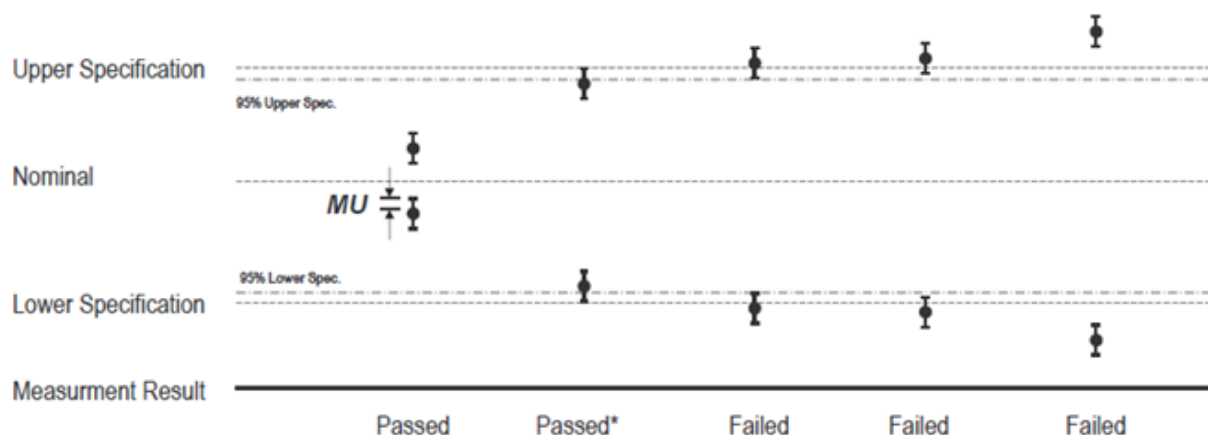

**QUA-52 Decision Rule(QA Document) was applied.**

**Step 1) :** Reference Check, Daily Check, Peripheral device Check

**Step 2) :** Re-test Procedure (Repeat the test maximum 3 times, Different Test Engineer)

- 1) If the original test results are subject to retesting and the judgement is unclear, the retest is carried out.
- 2) If the result of the first retest is the same as the initial test, the judgement is made based on the value.
- 3) If the result of the first retest differ from the results of the initial test, the second re-test is carried out.
- 4) After completion of the second retest, the average of the three test results is determined as the final result. However, if the deviation of the three test values is more than 5 % of the reference value, the technical manager should review the reproducibility of the test from the beginning.

## 1.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2

| Measurement Items           | Frequency Range      | Expanded Uncertainty<br>$U = kU_c (k = 2)$ |
|-----------------------------|----------------------|--------------------------------------------|
| Radiated Spurious Emissions | 9 kHz – 30 MHz       | 2.06                                       |
|                             | 30 MHz – 1 GHz       | 4.28                                       |
|                             | 1 GHz – 18 GHz       | 5.40                                       |
|                             | 18 GHz – 40 GHz      | 5.08                                       |
| Measurement Items           |                      | Expanded Uncertainty<br>$U = kU_c (k = 2)$ |
| Conducted                   | Maximum Output Power | 1.20                                       |
| Measurement Items           | Frequency Range      | Expanded Uncertainty<br>$U = kU_c (k = 2)$ |
| AC Conducted Emissions      | 150 kHz ~ 30 MHz     | 3.10                                       |

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of  $k = 2$ .

## 2 General Information

### 2.1 General Description of EUT

|                                           |                                                      |
|-------------------------------------------|------------------------------------------------------|
| <b>Equipment Class</b>                    | Unlicensed National Information Infrastructure (NII) |
| <b>Product name</b>                       | WI-FI Dongle                                         |
| <b>FCC ID</b>                             | 2A07Z-GN-WW77                                        |
| <b>Model</b>                              | GN-WW77                                              |
| <b>Additional model name</b>              | -                                                    |
| <b>Power Supply</b>                       | DC 5 V                                               |
| <b>Modulation Type</b>                    | OFDM : 802.11ac(VTH80)                               |
| <b>Transfer Rate</b>                      | MCS0 to MCS9 (802.11ac) / SISO                       |
| <b>Operating Frequency</b>                | NII 1: 5 180 MHz to 5 240 MHz                        |
| <b>Output Power<br/>(Conducted Power)</b> | NII 1: -6.68 dBm                                     |
| <b>Antenna Type</b>                       | Internal Antenna                                     |
| <b>Antenna Gain</b>                       | NII 1: 1.45 dBi                                      |
| <b>H/W Version</b>                        | WW77 REV1.0                                          |
| <b>S/W Version</b>                        | (24.1.0)                                             |

**NOTE 1:** For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

**NOTE 2:** For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

### 2.2 Tested sample and Tested companion device information

| Type                    | Model   | Note              |
|-------------------------|---------|-------------------|
| Test sample (Conducted) | GN-WW77 | SN: WW77-2406-001 |
| Test sample (Radiated)  | GN-WW77 | SN: WW77-2406-001 |

## 2.3 Description of Test Mode

The EUT has been tested with all modes of operating conditions to determine the worst case emission characteristics.

| Test Mode |                 | Worst case data rate |
|-----------|-----------------|----------------------|
| TM 1      | 802.11ac(VHT80) | MCS 0                |

Note1: This device support SISO.

## 2.4 Tested Frequency Information

| 5 GHz Band | Mode            | Tested Frequency (MHz) |   |   |
|------------|-----------------|------------------------|---|---|
| NII 1      | 802.11ac(VHT80) | 5 210                  | - | - |

## 2.5 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipments, which is traceable to recognized national standards.

## 2.6 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

## 2.7 General Description of Applied Standards

Generally the tests were performed according to the specifications of the standard, it must comply with the requirements of the following standards.

**FCC CFR 47 Part 15, Subpart E (§15.407)**  
**KDB 789033 D02 General UNII Test Procedures New Rules v02r01**  
**ANSI C63.10-2013**

All test items in this test report have been performed and recorded as per the above standards.

## 2.8 Test Equipment

Test Equipment is traceable to the National Institute of Standards and Technology (NIST). Measurement antenna used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

| Equipment Name                    | Manufacturer          | Model No.           | Serial No.   | Next Cal. Date |
|-----------------------------------|-----------------------|---------------------|--------------|----------------|
| Spectrum Analyzer                 | R&S                   | FSW50               | 101403       | 2024-11-22     |
| Signal Analyzer                   | Keysight Technologies | N9020B              | MY62150135   | 2025-05-22     |
| Signal Analyzer                   | Keysight Technologies | N9030B              | MY57142476   | 2024-11-22     |
| MXG Vector Signal Generator       | Keysight Technologies | N5182B              | MY53051310   | 2024-11-22     |
| Signal Generator                  | R&S                   | SMB100A             | MY41006053   | 2025-05-21     |
| DC Power Supply                   | Keysight Technologies | E3632A              | MY62216181   | 2025-05-21     |
| Attenuator                        | Aeroflex              | 40AH2W-10           | 1            | 2024-11-22     |
| True-RMS Digital Multimeter       | Fluke                 | 177                 | 43240434     | 2025-05-21     |
| High Pass Filter                  | Micro-Tronics         | HPM17543            | 28           | 2025-05-22     |
| High Pass Filter                  | Wt Microwave          | WT-A1698-HS         | WT190313-6-4 | 2024-11-22     |
| Humidity Barometer TEMP Meter     | LUTRON                | MHB-382SD           | AJ.38475     | 2024-11-21     |
| Humidity Barometer TEMP Meter     | LUTRON                | MHB-382SD           | AJ.38459     | 2023-11-29     |
| EMI Test Receiver                 | R&S                   | ESW8                | 101170       | 2024-11-21     |
| EMI Test Receiver                 | R&S                   | ESW44               | 101812       | 2024-11-22     |
| Active Loop Antenna               | R&S                   | HFH2-Z2E            | 100881       | 2025-02-03     |
| Trilog Antenna (with 6 dB ATT.)   | Schwarzbeck           | VULB 9163           | 1100         | 2025-02-08     |
| Horn Antenna                      | R&S                   | HF907               | 102773       | 2024-12-05     |
| BBHA 9170 Broad-Band Horn Antenna | Schwarzbeck           | BBHA9170            | 00955        | 2024-11-27     |
| Signal Conditioning Unit          | R&S                   | SCU-18F             | 180112       | 2024-11-21     |
| Signal Conditioning Unit          | R&S                   | SCU08F2             | 08400015     | 2024-11-21     |
| Amplifier                         | L3 Narda-MITEQ        | JS44-18004000-33-8P | 2142086      | 2024-11-22     |
| Power Meter                       | R&S                   | NRX                 | 103577       | 2024-11-22     |
| Power Sensor                      | R&S                   | NRP-Z211            | 102377       | 2024-11-22     |
| EMC 32                            | R&S                   | EMC32               | 1000         | -              |
| EMC 32                            | R&S                   | EMC32               | 1040         | -              |

### 3 Test Results

#### 3.1 Antenna Requirement

**Except from §15.203 of the FCC Rules/Regulations:**

An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of the section.

- The antenna(s) of the EUT are Permanently attached.
- There are no provisions for connection to an external antenna.

**Result**

The EUT complies with the requirement of §15.203

## 3.2 26 dB Bandwidth

### 3.2.1 Test Procedure


The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating in transmission mode at the appropriate frequencies. The 26 dB bandwidth is used to determine the conducted output power limit.

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of KDB789033

1. Set resolution bandwidth (RBW) = approximately 1 % of the EBW.
2. Set the video bandwidth (VBW) > RBW.
3. Detector = Peak.
4. Trace mode = max hold.

Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 3.2.2 Test Setup

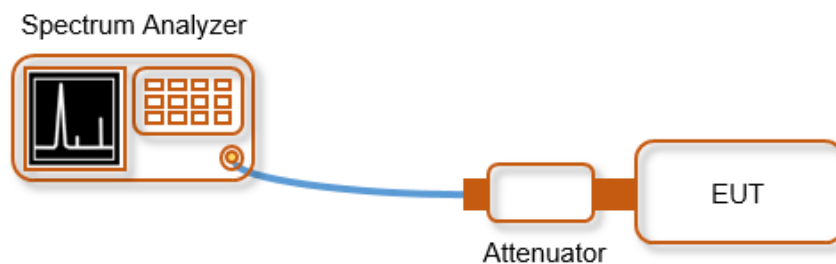


### 3.2.3 Test Result

#### [Test Data of 26 dB Bandwidth]

| Test Mode | Band  | Tested Frequency [MHz] | 26 dB Bandwidth [MHz] |
|-----------|-------|------------------------|-----------------------|
| TM 1      | NII 1 | 5 210                  | 171.60                |

# [Test Plot of 26 dB Bandwidth]

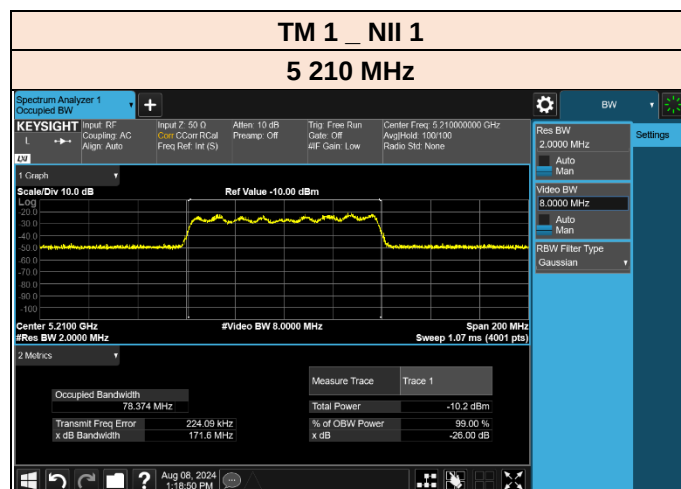

### 3.3 6 dB Bandwidth

#### 3.3.1 Regulation

Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


#### 3.3.2 Test Procedure

The transmitter output is connected to the Spectrum Analyzer and used following test procedure of KDB789033

1. Set resolution bandwidth (RBW) = 100 kHz
2. Set the video bandwidth  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.3.3 Test Setup

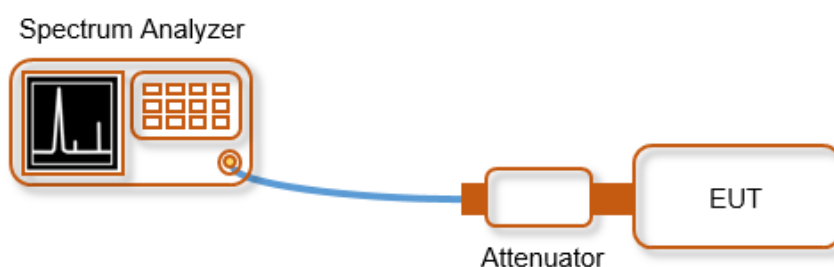


#### 3.3.4 Test Result

[Test Data of 6 dB Bandwidth]

| Test Mode | Tested Frequency [MHz] | 6 dB Bandwidth [MHz] |
|-----------|------------------------|----------------------|
| TM 1      | 5 210                  | 76.38                |

## [Test Plot of 6 dB Bandwidth]

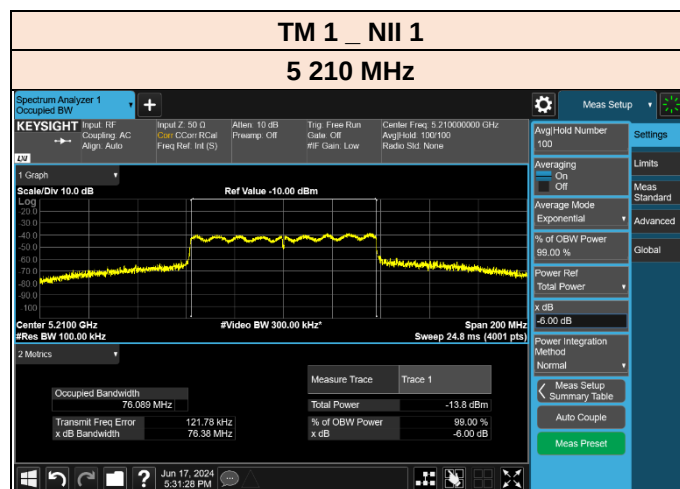

## 3.4 Maximum Conducted Output Power

### 3.4.1 Regulation

Part. 15.407(a)

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

**(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.**

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


(3) For the band 5.725 - 5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### 3.4.2 Test Procedure

#### Method PM-G of KDB789033

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

### 3.4.3 Test Setup

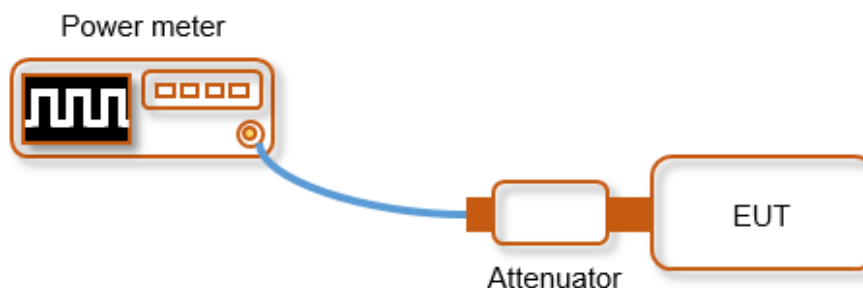

### 3.4.4 Test Result

#### [Test Result of Maximum Conducted Output Power]

Limit:

| 5 GHz Band | Power Limit [mW] | Calculated Limit [dBm] | Antenna Gain (Worst case) [dBi] | Conducted Limit [dBm] |
|------------|------------------|------------------------|---------------------------------|-----------------------|
| NII 1      | 250              | 23.97                  | 1.45                            | 23.97                 |

| Test Mode       | Band  | Tested Frequency | Measured Power [dBm] |        |
|-----------------|-------|------------------|----------------------|--------|
|                 |       |                  | Average              | Result |
| 802.11ac(VHT80) | NII 1 | 5 210            | -8.13                | -6.68  |

Note 1: The intent is to test at 100 % duty cycle.

Note 2: Result = Average Power + Duty cycle factor

## 3.5 Maximum Power Spectral Density

### 3.5.1 Regulation

Part. 15.407(a)

(1) For the band 5.15 - 5.25 GHz.

(i) For an outdoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. note1

(ii) For an indoor access point operating in the band 5.15 - 5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 MHz band. note1

(iii) For fixed point-to-point access points operating in the band 5.15 - 5.25 GHz, transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi.

**(iv) For mobile and portable client devices in the 5.15 - 5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 MHz band. note1**

(2) For the 5.25 - 5.35 GHz and 5.47 - 5.725 GHz bands, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. note1

(3) For the band 5.725 - 5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. note1, note2

Note1: If transmitting antennas of directional gain greater than 6 dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note2: Fixed point - to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information.

### 3.5.2 Test Procedure

Maximum Power Spectral Density is measured using Measurement Procedure of KDB789033 D02v02r01

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA - 1, SA - 2, SA - 3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power...". (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)

2) Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3) Make the following adjustments to the peak value of the spectrum, if applicable:

a) If Method SA - 2 or SA - 2 Alternative was used, add  $10 \log(1 / x)$ , where x is the duty cycle, to the peak of the spectrum.

b) If Method SA - 3 Alternative was used and the linear mode was used in step II.E.2.g (viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.

4) The result is the Maximum PSD over 1 MHz reference bandwidth.


5) For devices operating in the bands 5.15 - 5.25 GHz, 5.25 - 5.35 GHz, and 5.47 - 5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in §15.407(a)(5). For devices operating in the band 5.725 - 5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may

need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 kHz bandwidth, the following adjustments to the procedures apply:

- Set  $RBW \geq 1 / T$ , where T is defined in section II.B.1.a). (Refer to Appendix II)
- Set  $VBW \geq 3 RBW$ .
- If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500 \text{ kHz} / RBW)$  to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10 \log(1 \text{ MHz} / RBW)$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since RBW = 100 kHz is available on nearly all spectrum analyzers.

### 3.5.3 Test Setup

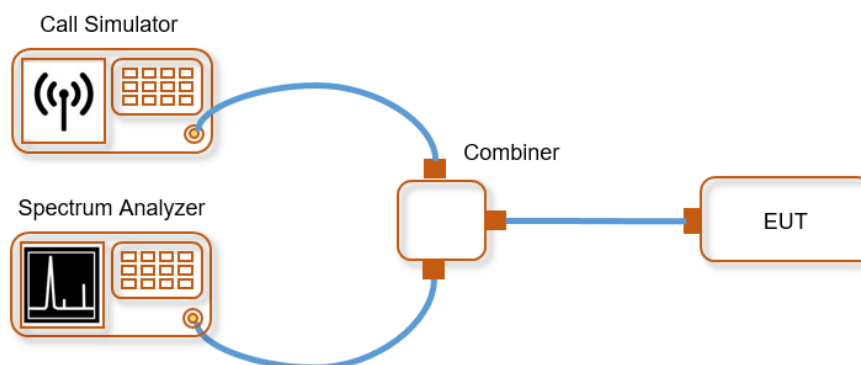

### 3.5.4 Test Result

#### [Test Result of Maximum Power Spectral Density]

##### Limit


| Band  | Limit [dBm] | Antenna Gain (Worst case) [dBi] | Determined Limit [dBm] |
|-------|-------------|---------------------------------|------------------------|
| NII 1 | 11.00       | 1.45                            | 11.00                  |

| Test Mode | Band  | Tested Frequency | Measured Power [dBm] |     |        |
|-----------|-------|------------------|----------------------|-----|--------|
|           |       |                  | Reading              | T.F | Result |
| TM 1      | NII 1 | 5 210            | -31.19               | NA  | -31.19 |

Note 1: The intent is to test at 100 % duty cycle.

Note 2: Test Result = Measurement Data + T.F

## [Test Plot of Maximum Power Spectral Density]

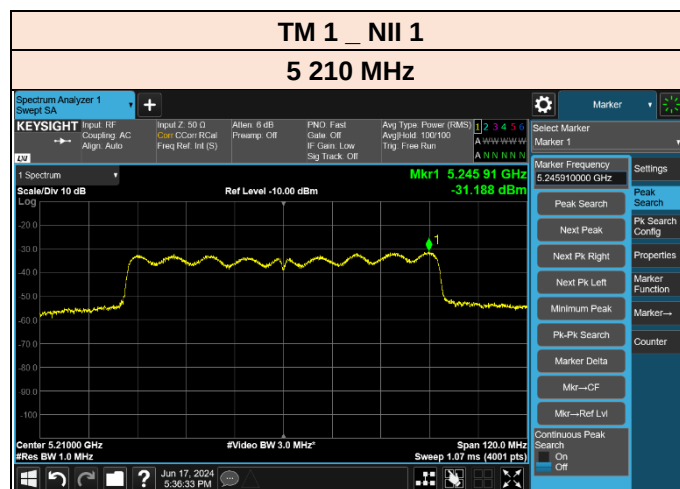

## 3.6 Duty Cycle

### 3.6.1 Test Procedure


Duty Cycle [ $X = \text{On Time} / (\text{On} + \text{Off time})$ ] is measured using Measurement Procedure of KDB789033 D02v02r01

1. Set the center frequency of the spectrum analyzer to the center frequency of the transmission.
2. Set RBW  $\geq$  EBW if possible; otherwise, set RBW to the largest available value.
3. Set VBW  $\geq$  RBW. Set detector = peak.
4. Note : The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$ , where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if  $T \leq 16.7$  microseconds.)

T : The minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

(T = On time of the above table since the EUT operates with above fixed Duty Cycle and it is the minimum On time)


### 3.6.2 Test Setup

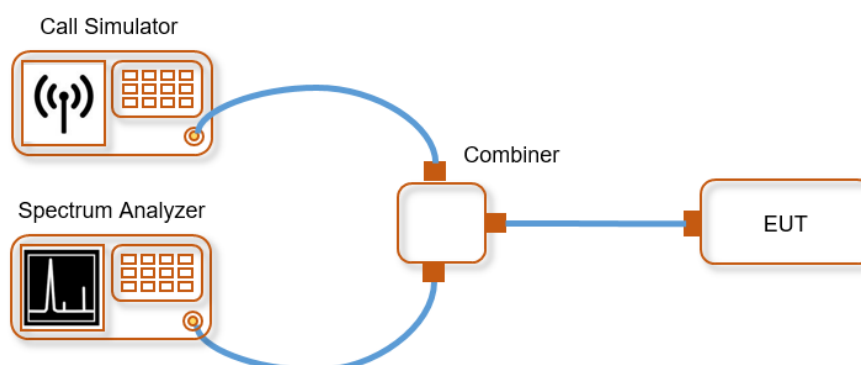

### 3.6.3 Test Result

| Test Mode | On Time [ms] | Period [ms] | Duty Cycle [X] | Duty Cycle [D] | DCCF [dB] |
|-----------|--------------|-------------|----------------|----------------|-----------|
| TM 1      | 1            | 1           | 1.000          | 100.00         | 0.00      |

## [Test Plot of Duty Cycle]

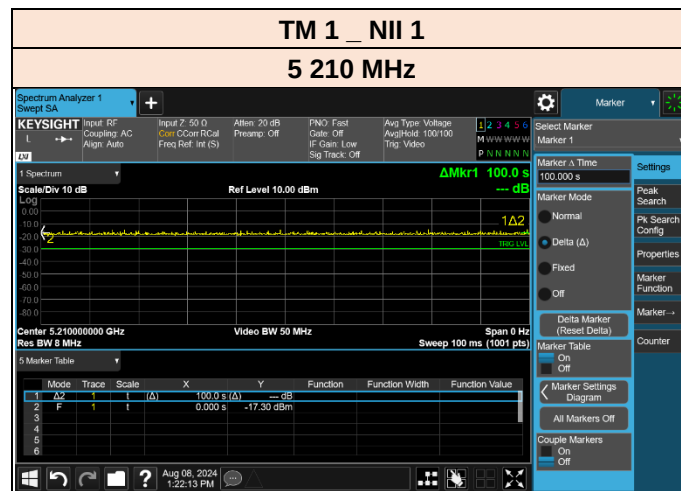

## 3.7 Spurious Emission, Band edge and Restricted Bands

### 3.7.1 Regulation

§15.209(a) : Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field strength (microvolts/meter) | Measurement distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100**                             | 3                             |
| 88-216          | 150**                             | 3                             |
| 216-960         | 200**                             | 3                             |
| Above 960       | 500                               | 3                             |

\*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§15.231 and 15.241.

§15.205(a) : Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| MHz                      | MHz                 | MHz           | GHz              |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110              | 16.42-16.423        | 399.9-410     | 4.5-5.15         |
| <sup>1</sup> 0.495-0.505 | 16.69475-16.69525   | 608-614       | 5.35-5.46        |
| 2.1735-2.1905            | 16.80425-16.80475   | 960-1240      | 7.25-7.75        |
| 4.125-4.128              | 25.5-25.67          | 1300-1427     | 8.025-8.5        |
| 4.17725-4.17775          | 37.5-38.25          | 1435-1626.5   | 9.0-9.2          |
| 4.20725-4.20775          | 73-74.6             | 1645.5-1646.5 | 9.3-9.5          |
| 6.215-6.218              | 74.8-75.2           | 1660-1710     | 10.6-12.7        |
| 6.26775-6.26825          | 108-121.94          | 1718.8-1722.2 | 13.25-13.4       |
| 6.31175-6.31225          | 123-138             | 2200-2300     | 14.47-14.5       |
| 8.291-8.294              | 149.9-150.05        | 2310-2390     | 15.35-16.2       |
| 8.362-8.366              | 156.52475-156.52525 | 2483.5-2500   | 17.7-21.4        |
| 8.37625-8.38675          | 156.7-156.9         | 2690-2900     | 22.01-23.12      |
| 8.41425-8.41475          | 162.0125-167.17     | 3260-3267     | 23.6-24.0        |
| 12.29-12.293             | 167.72-173.2        | 3332-3339     | 31.2-31.8        |
| 12.51975-12.52025        | 240-285             | 3345.8-3358   | 36.43-36.5       |
| 12.57675-12.57725        | 322-335.4           | 3600-4400     | ( <sup>2</sup> ) |
| 13.36-13.41              |                     |               |                  |

<sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6

§15.205 (b) : Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated

based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

FCC Part 15.407 (b): Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in Section 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in Section 15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### 3.7.2 Test Procedure

1. The EUT is placed on a non-conductive table. For emission measurements at or below 1 GHz, the table height is 80 cm. For emission measurements above 1 GHz, the table height is 1.5 m.
2. The turn table shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 1m or 3 m away from the receiving antenna, which is varied from 1m to 4 m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

Radiated spurious emission measured using following Measurement Procedure of KDB789033 D02v02r01

► **General Requirements for Unwanted Emissions Measurements**

The following requirements apply to all unwanted emissions measurements, both in and outside of the restricted bands:

▪ **EUT Duty Cycle**

- (1) The EUT shall be configured or modified to transmit continuously except as stated in (ii), below. The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.
- (2) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations of the EUT (e.g., overheating), the following additions to the measurement and reporting procedures are required:
  - The EUT shall be configured to operate at the maximum achievable duty cycle.
  - Measure the duty cycle,  $x$ , of the transmitter output signal.
  - Adjustments to measurement procedures (e.g., increasing test time and number of traces averaged) shall be performed as described in the procedures below.
  - The test report shall include the following additional information:
    - The reason for the duty cycle limitation.
    - The duty cycle achieved for testing and the associated transmit duration and interval between transmissions.
    - The sweep time and the amount of time used for trace stabilization during max-hold measurements for peak emission measurements.
- (3) Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

► **Measurements below 1000 MHz**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

► **Measurements Above 1000 MHz (Peak)**

- a) Follow the requirements in section II.G.3, "General Requirements for Unwanted Emissions Measurements".
- b) Peak emission levels are measured by setting the analyzer as follows:
  - (i) RBW = 1 MHz.
  - (ii) VBW  $\geq$  3 MHz.
  - (iii) Detector = Peak.
  - (iv) Sweep time = Auto.
  - (v) Trace mode = Max hold.
  - (vi) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately  $1/x$ , where  $x$  is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

► **Measurements Above 1000 MHz (Method AD)**

- (i) RBW = 1 MHz.
- (ii) VBW  $\geq$  3 MHz.
- (iii) Detector = RMS, if  $\text{span} / (\# \text{ of points in sweep}) \leq \text{RBW} / 2$ . Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, the detector mode shall be set to peak.
- (iv) Averaging type = power (i.e., RMS)
  - As an alternative, the detector and averaging type may be set for linear voltage averaging. Some analyzers require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- (v) Sweep time = Auto.

(vi) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, the number of traces shall be increased by a factor of  $1/x$ , where  $x$  is the duty cycle. For example, with 50 percent duty cycle, at least 200 traces shall be averaged.


(vii) If tests are performed with the EUT transmitting at a duty cycle less than 98 percent, a correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle. The correction factor is computed as follows:

- If power averaging (RMS) mode was used in step (iv) above, the correction factor is  $10 \log(1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 3 dB must be added to the measured emission levels.
- If linear voltage averaging mode was used in step (iv) above, the correction factor is  $20 \log(1/x)$ , where  $x$  is the duty cycle. For example, if the transmit duty cycle was 50 percent, then 6 dB must be added to the measured emission levels.
- If a specific emission is demonstrated to be continuous (100 percent duty cycle) rather than turning on and off with the transmit cycle, no duty cycle correction is required for that emission.


#### **- Sample Calculation**

- Field Strength Level [dB $\mu$ V/m] = Analyzer Level [dBm] + 107 + AFCL [dB/m] + Duty Cycle Correction [dB]
- AFCL [dB/m] = Antenna Factor [dB/m] + Cable loss [dB]
- Margin [dB] = Field Strength Level [dB $\mu$ V/m] – Limit [dB $\mu$ V/m]



### 3.7.3 Test Setup

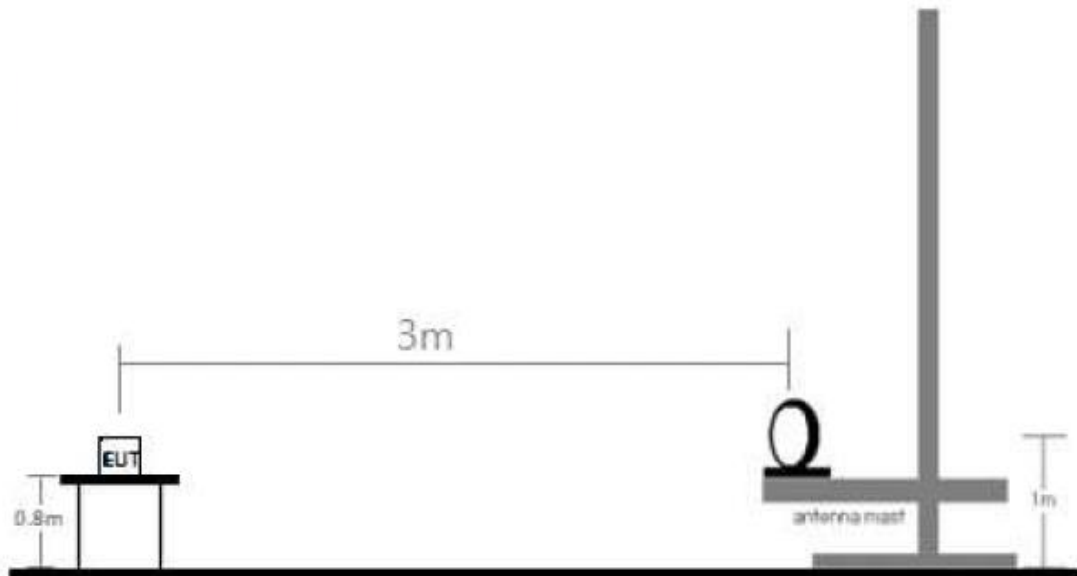

**[Radiated Emission Test Setup Below 30 MHz]**

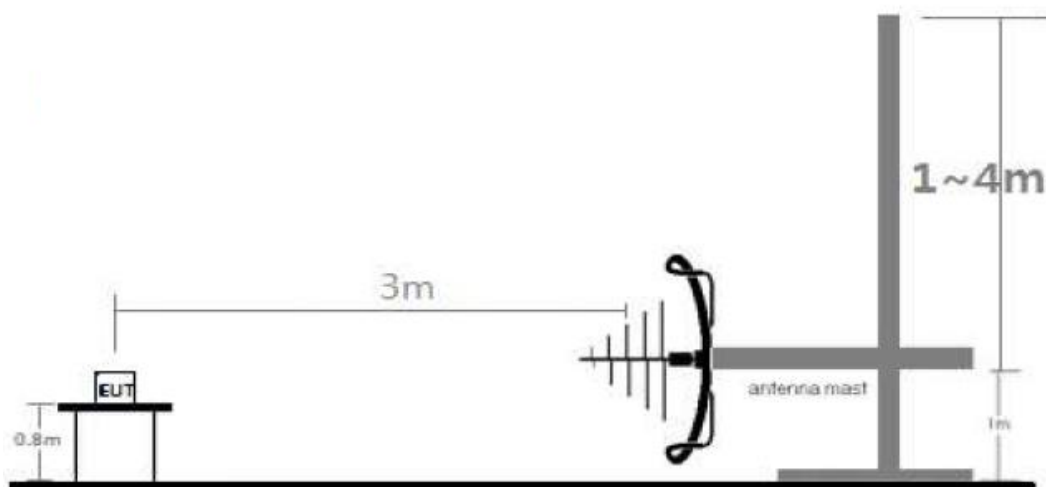

**[Radiated Emission Test Setup Below 1 GHz]**

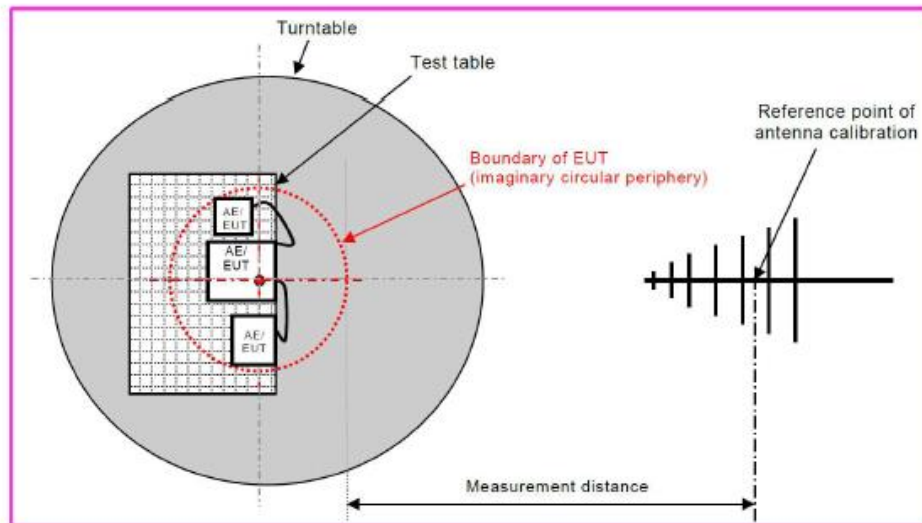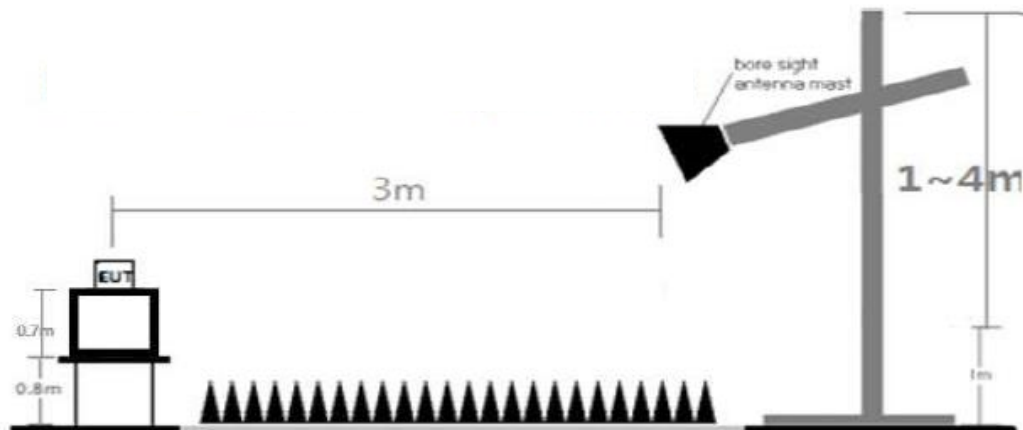

**[Radiated Emission Test Setup Above 1 GHz]**


### 3.7.4 Test Result of Radiated Spurious Emission

#### Remarks

1. Field Strength (dB $\mu$ V/m) = S/A Reading Value(dB $\mu$ V) + Total Factor(dB/m) + DCCF(dB)
2. Total Factor(dB/m) = T.F (dB/m) = Antenna Factor(dB/m) + Cable Loss(dB) – Pre-Amplifier Gain(dB)
3. Margin(dB) = Field Strength (dB $\mu$ V/m) – Limit (dB $\mu$ V/m)
4. Measurement Distance = 3 m
5. Duty Cycle > 98 % (Refer to section 3.7)
6. DCCF = Duty Cycle Correction Factor.
7. No other spurious and harmonic emissions were found greater than listed emissions on above table
8. If the measured peak value satisfies the AVG LIMIT, the AVG value was not written.

### 3.7.4.1 Radiated Emissions (Below 1 GHz)

#### Worst case – RSE (Below 1 GHz)\_TM 1\_SISO (NII 1)

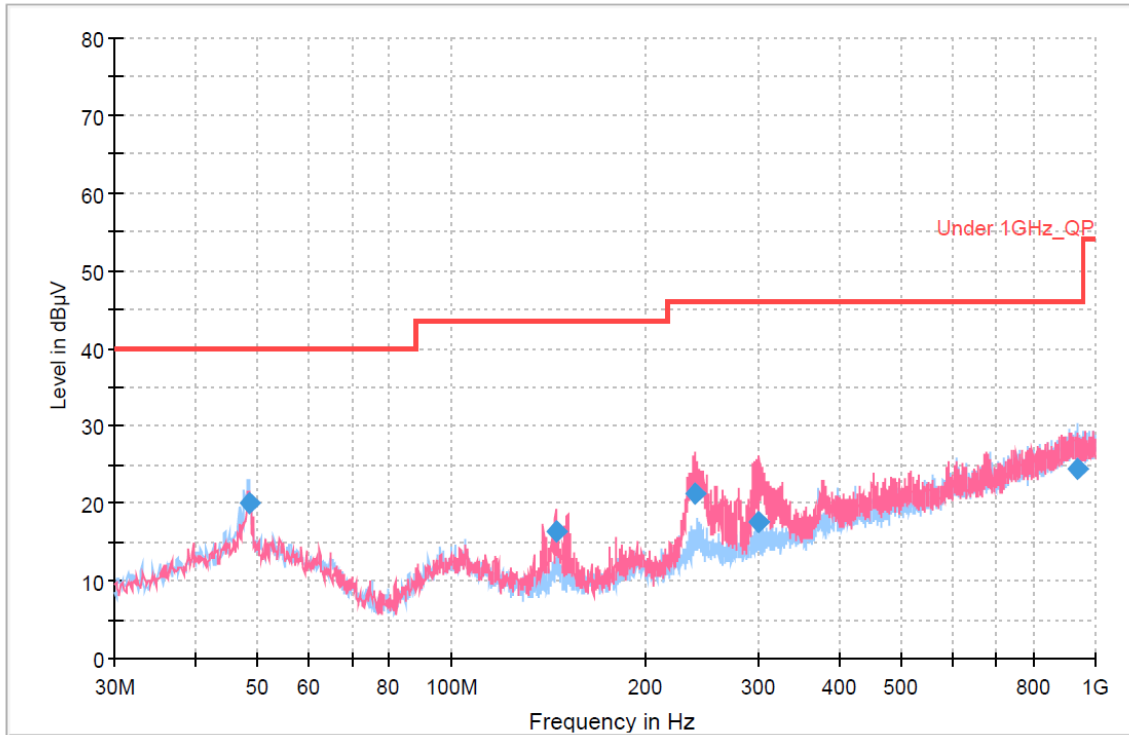


| Tested Frequency [MHz] | Frequency [MHz] | Reading Value [dBμV] | Pol [H/V] | EUT Axis | Detector Mode | DCCF [dB] | T.F [dB] | Result [dBμV/m] | Limit [dBμV/m] | Margin [dB]  |
|------------------------|-----------------|----------------------|-----------|----------|---------------|-----------|----------|-----------------|----------------|--------------|
| 5 210                  | 0.4784          | 24.67                | H         | Z        | Quasi Peak    | 0.00      | -59.80   | -35.13          | 14.01          | 49.14        |
|                        | 0.4784          | 20.10                | V         | Z        | Quasi Peak    | 0.00      | -59.80   | -39.70          | 14.01          | 53.71        |
|                        | 1.5156          | 12.25                | V         | Z        | Quasi Peak    | 0.00      | -19.70   | -7.45           | 23.99          | 31.44        |
|                        | 1.7022          | 8.72                 | H         | Z        | Quasi Peak    | 0.00      | -19.70   | -10.98          | 22.98          | 33.96        |
|                        | 21.0263         | 9.59                 | V         | Z        | Quasi Peak    | 0.00      | -17.10   | -7.51           | 30.00          | 37.51        |
|                        | 21.0749         | 8.84                 | H         | Z        | Quasi Peak    | 0.00      | -17.10   | -8.26           | 30.00          | 38.26        |
|                        | 48.4300         | 39.26                | H         | Z        | Quasi Peak    | 0.00      | -19.10   | 20.16           | 40.00          | <b>19.84</b> |
|                        | 145.1875        | 41.64                | V         | Z        | Quasi Peak    | 0.00      | -25.20   | 16.44           | 43.52          | 27.08        |
|                        | 239.0350        | 41.52                | V         | Z        | Quasi Peak    | 0.00      | -20.30   | 21.22           | 46.02          | 24.80        |
|                        | 300.8725        | 36.72                | V         | Z        | Quasi Peak    | 0.00      | -19.00   | 17.72           | 46.02          | 28.30        |
|                        | 935.2525        | 32.14                | H         | Z        | Quasi Peak    | 0.00      | -7.70    | 24.44           | 46.02          | 21.58        |

### 3.7.4.2 Radiated Emissions (Above 1 GHz)

#### TM 1

| 5 GHz Band | Tested Frequency [MHz] | Frequency [MHz] | Reading Value [dBuV] | Pol [H/V] | EUT Axis | Detector Mode | DCCF [dB] | T.F [dB] | Result [dBuV/m] | Limit [dBuV/m] | Margin [dB] |
|------------|------------------------|-----------------|----------------------|-----------|----------|---------------|-----------|----------|-----------------|----------------|-------------|
| NII 1      | 5 210                  | 5 146.26        | 51.06                | H         | Z        | Peak          | 0.00      | 12.60    | 63.66           | 74.00          | 10.34       |
|            |                        | 5 146.26        | 38.45                | H         | Z        | Average       | 0.00      | 12.60    | 51.05           | 54.00          | <b>2.95</b> |
|            |                        | 5 466.91        | 42.23                | H         | Z        | Peak          | 0.00      | 13.50    | 55.73           | 74.00          | 18.27       |
|            |                        | 5 466.91        | 29.34                | H         | Z        | Average       | 0.00      | 13.50    | 42.84           | 54.00          | 11.16       |
|            |                        | 10 419.38       | 47.93                | H         | Z        | Peak          | 0.00      | 11.90    | 59.83           | 74.00          | 14.17       |
|            |                        | 10 419.38       | 36.64                | H         | Z        | Average       | 0.00      | 11.90    | 48.54           | 54.00          | 5.46        |

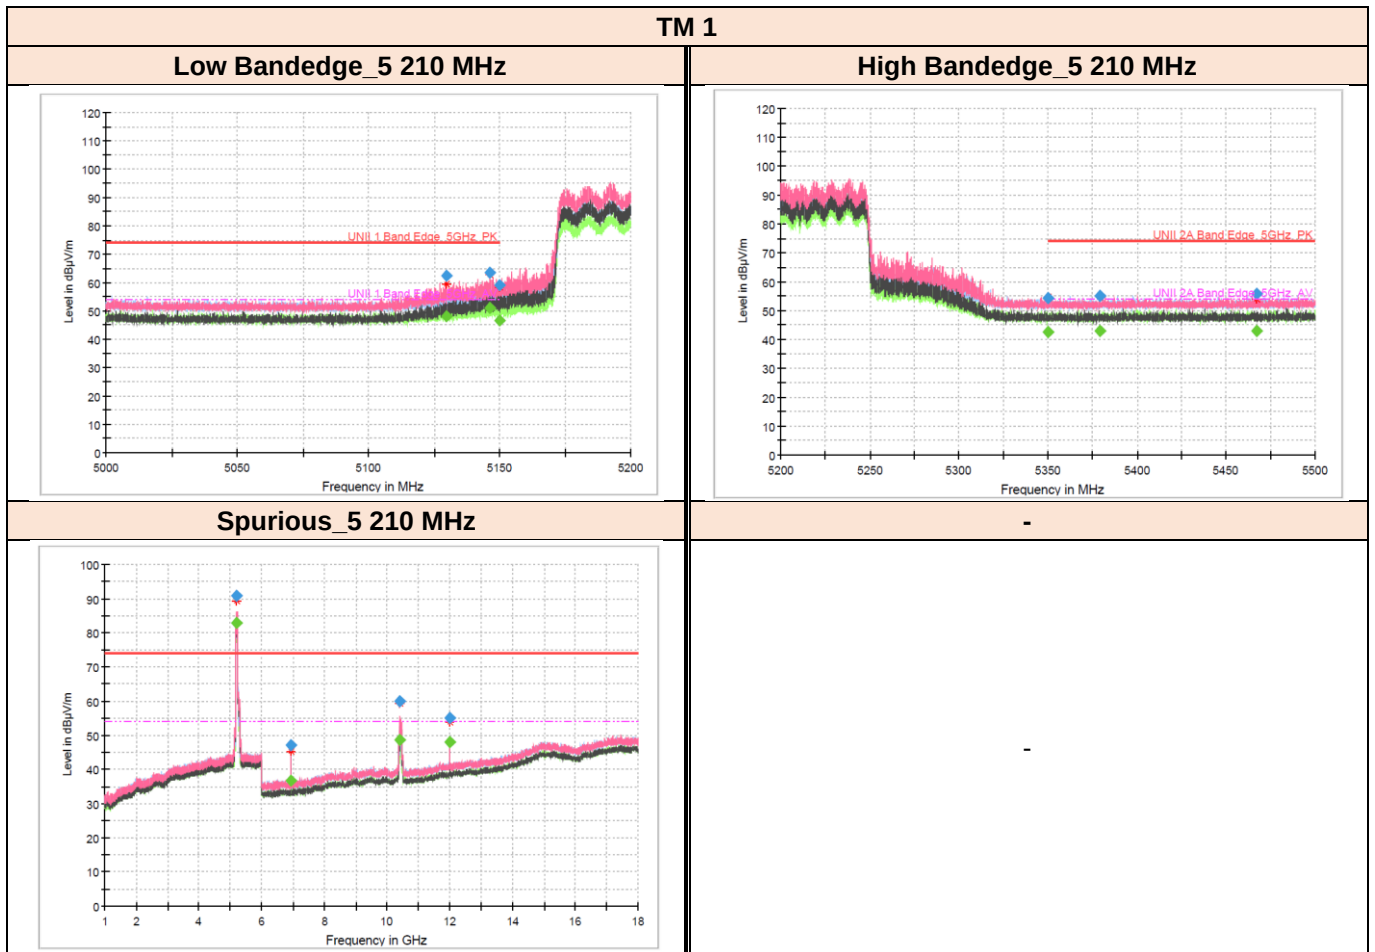

## 3.8 AC Conducted Emissions (150 kHz to 30 MHz)

### 3.8.1 Regulation

§15.207(a) : Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |


\* Decreases with the logarithm of the frequency.

### 3.8.2 Test Procedure

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm / 50  $\mu$ H of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.


**Remark :** The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz – 30 MHz.

### 3.8.3 Test Setup

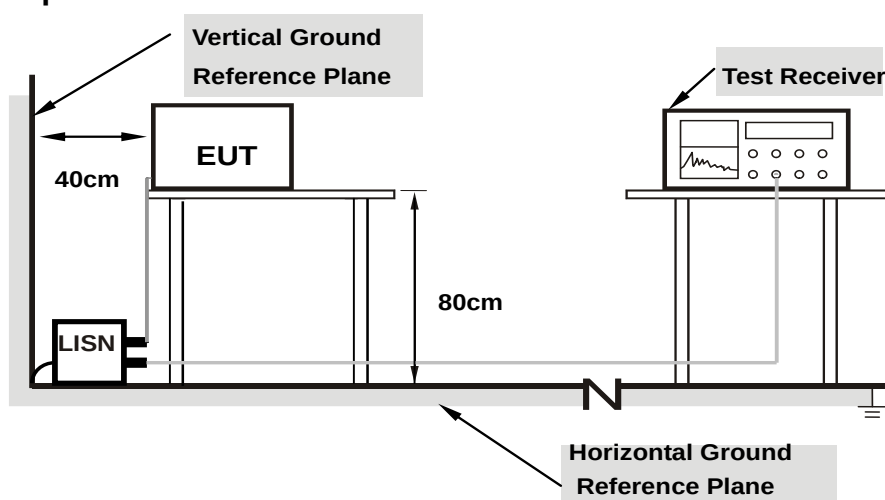

### 3.8.4 Test Result

#### TM 1

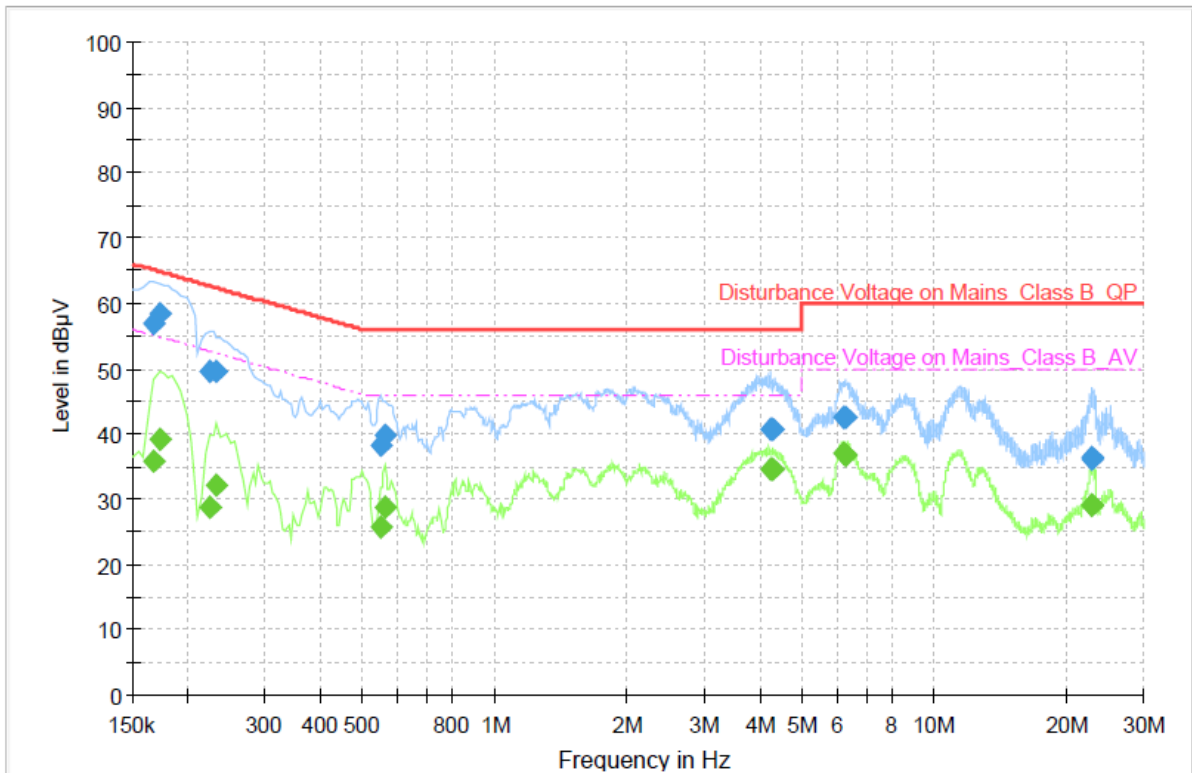

| Tested Frequency [MHz] | Frequency [MHz] | Reading Value [dBµV] | Line | Detector Mode | T.F [dB/M] | Result [dBµV] | Limit [dBµV] | Margin [dB] |
|------------------------|-----------------|----------------------|------|---------------|------------|---------------|--------------|-------------|
| 5 210                  | 0.171 949       | 48.10                | N    | QP            | 10.20      | 58.30         | 64.87        | 6.57        |
|                        | 0.171 949       | 29.03                | N    | AV            | 10.20      | 39.23         | 54.87        | 15.64       |
|                        | 4.258 765       | 24.62                | N    | AV            | 9.90       | 34.52         | 46.00        | 11.48       |
|                        | 4.271 934       | 30.81                | N    | QP            | 9.90       | 40.71         | 56.00        | 15.29       |
|                        | 6.247 302       | 27.02                | N    | AV            | 9.90       | 36.92         | 50.00        | 13.08       |
|                        | 6.308 757       | 32.61                | N    | QP            | 10.00      | 42.61         | 60.00        | 17.39       |

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services Korea. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

**Test Firm Name : BV CPS ADT Korea Ltd.**

**Address : Innoplex No.2 106, Sinwon-ro 306, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675 KOREA**

**FCC**

**Designation Number : KR0158**

**Test Firm Registration Number : 666061**

**ISED**

**Designation Number : KR0158**

**Test Firm Registration Number : 25944**

If you have any comments, please feel free to contact us at the following:

**Email:** [Meyer.Shin@bureauveritas.com](mailto:Meyer.Shin@bureauveritas.com)

**Web Site:** [www.bureauveritas.co.kr/cps/eaw](http://www.bureauveritas.co.kr/cps/eaw)

The address and road map of all our labs can be found in our web site also.

**- End of report -**