



MOKO SMART

Small Size Tough Performance

M9 Series Rugged Asset Tag

Introducing the small M9 series asset tracking tag. With IP68 waterproof and IK06 capability, this beacon shows great reliability in harsh environments. Powered by a replaceable battery, M9 is able to deliver a durable 5-years lifespan. It supports various installation methods, including screw mounting and sticking via 3M tape. Perfect for tracking tools, equipment, and inventory in warehouses, construction sites, or cold storage facilities, the M9 ensures clear visibility of your assets.

Application



Factory



Warehouse

*Battery lifespan estimates are based on the default settings without any sensors under 20°C conditions ~ 1 active slot, 1000ms ADV interval and 0dBm Tx Power.



IP68 waterproof



Compact size




IK06 shock resistance



Long lifespan

General Specs


Connectivity:	BLE 5.0
Dimension (mm):	M9: 60.0*39.2*17.2 M9A: Φ38*16
Color:	M9: Black M9A: White
IP rating:	IP68
Shock resistance:	IK06
Sensor:	Accelerometer
LED:	Red
Battery capacity:	1000mAh Replaceable battery
Battery lifespan*:	5 years
Operating temperature:	-20°C/60°C
Transmission range:	Up to 150m (Without any obstacles)
Installation:	M9: Sticker & screw M9A: Sticker
Certification:	FCC CE RoHS WEEE

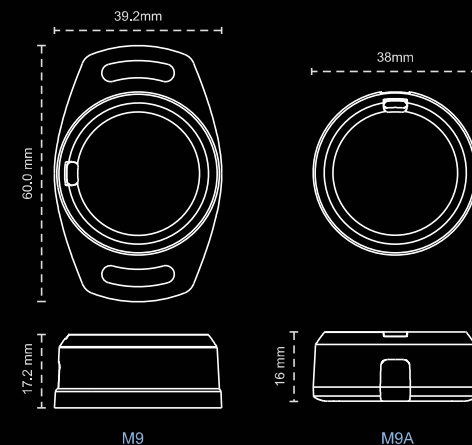



Small Size Tough Performance

M8 Series Compact Rugged Asset Tag

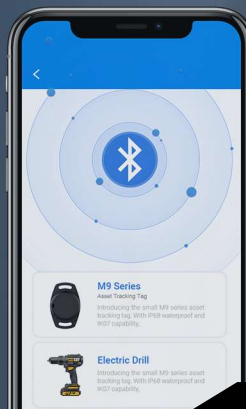

Introducing the small M8 series compact rugged asset tag. With IP68/IP69K waterproof and IK06 shock resistance capability, this beacon shows great reliability in harsh environments. Powered by a replaceable battery, M8 is able to deliver a durable 3-year lifespan. It supports various installation methods, including screw mounting and sticking via 3M tape. Perfect for tracking tools, equipment, and inventory in warehouses, construction sites, or cold storage facilities, the M8 ensures clear visibility of your assets.

Application



Hospital



Warehouse



IP68/IP69K waterproof



Compact size




IK06 shock resistance



Long lifespan

General Specs

Connectivity:	BLE 5.0
Dimension (mm):	M8: 60*39.2*14.7 M8A: Φ38*13.5
Color:	M8: Black M8A: White
IP rating:	IP68/IP69K
Shock resistance:	IK06
Sensor:	Accelerometer
LED:	Red
Battery capacity:	600mAh Replaceable battery
Battery lifespan:	3 years*
Operating temperature:	-20°C/60°C
Transmission range:	Up to 150m (Without any obstacles)
Installation:	M8: Sticker & screw M8A: Sticker
Certification:	FCC CE RoHS WEEE

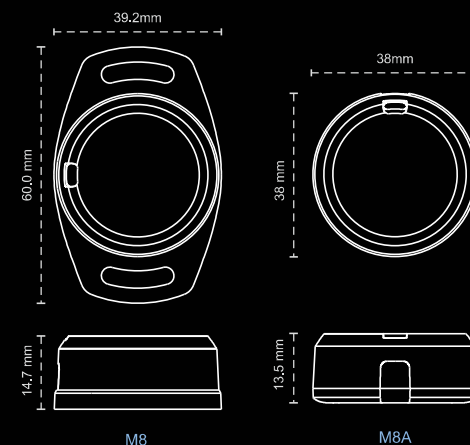

*Battery lifespan estimates are based on the default settings without any sensors under 20°C conditions ~ 1 active slot, 1000ms ADV interval and 0dBm Tx Power.

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver. Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.