



REPORT No.: SZ25020269S01

Annex D Plots of Maximum SAR Test Results

WLAN 2.4GHz_802.11b 1Mbps_Top Side_5mm_Ch11

Communication System: UID 0, WLAN 2.4GHz 802.11b (0); Frequency: 2462 MHz; Duty Cycle: 1:1.011

Medium: HSL_2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 38.846$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.75, 4.75, 4.75) @ 2462 MHz; Calibrated: 2024/7/17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024/7/5
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch11/Area Scan (61x81x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.511 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.25 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.747 W/kg

SAR(1 g) = 0.417 W/kg; SAR(10 g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 58.6%

Maximum value of SAR (measured) = 0.476 W/kg

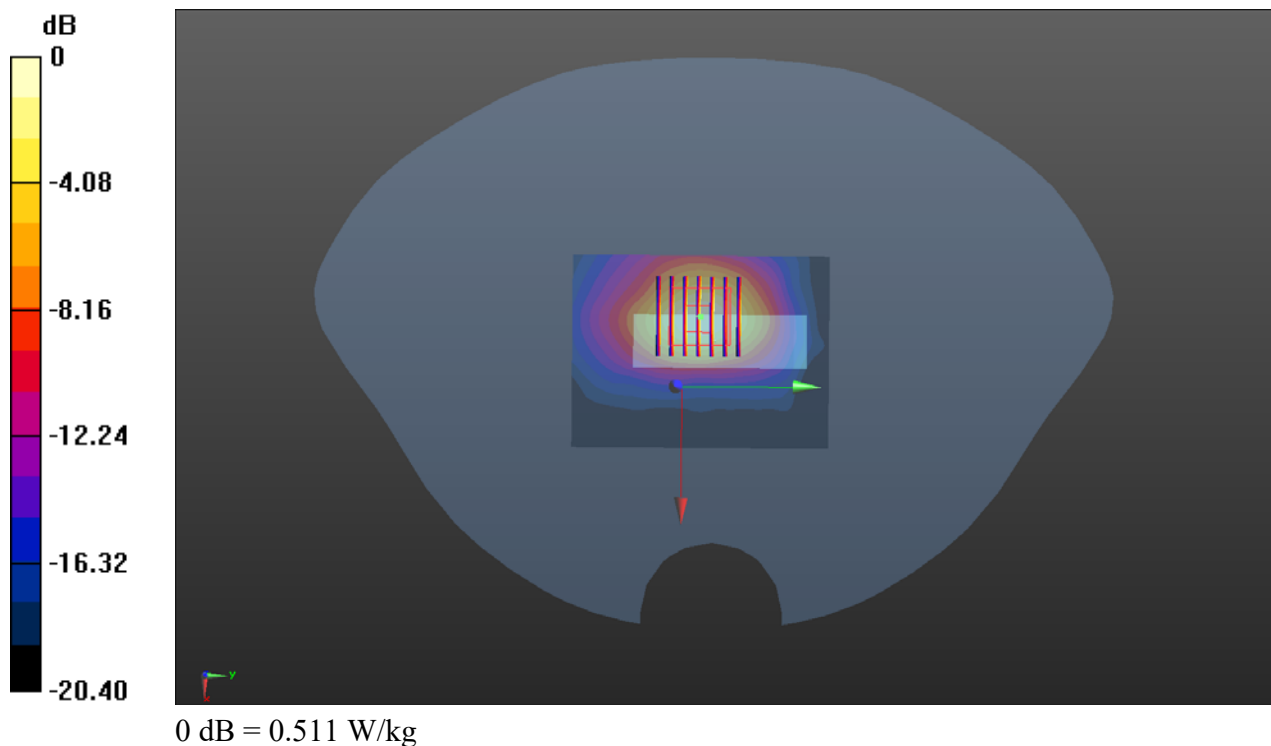

Bluetooth_DH5 1Mbps_Top Side_5mm_Ch78

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.068
Medium: HSL_2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 38.575$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3295; ConvF(4.75, 4.75, 4.75) @ 2480 MHz; Calibrated: 2024/7/17
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2024/7/5
- Phantom: SAM 1; Type: QD000P40CD; Serial: 1811
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Ch78/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.0226 W/kg

Ch78/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.235 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.0320 W/kg

SAR(1 g) = 0.018 W/kg; SAR(10 g) = 0.009 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.0198 W/kg

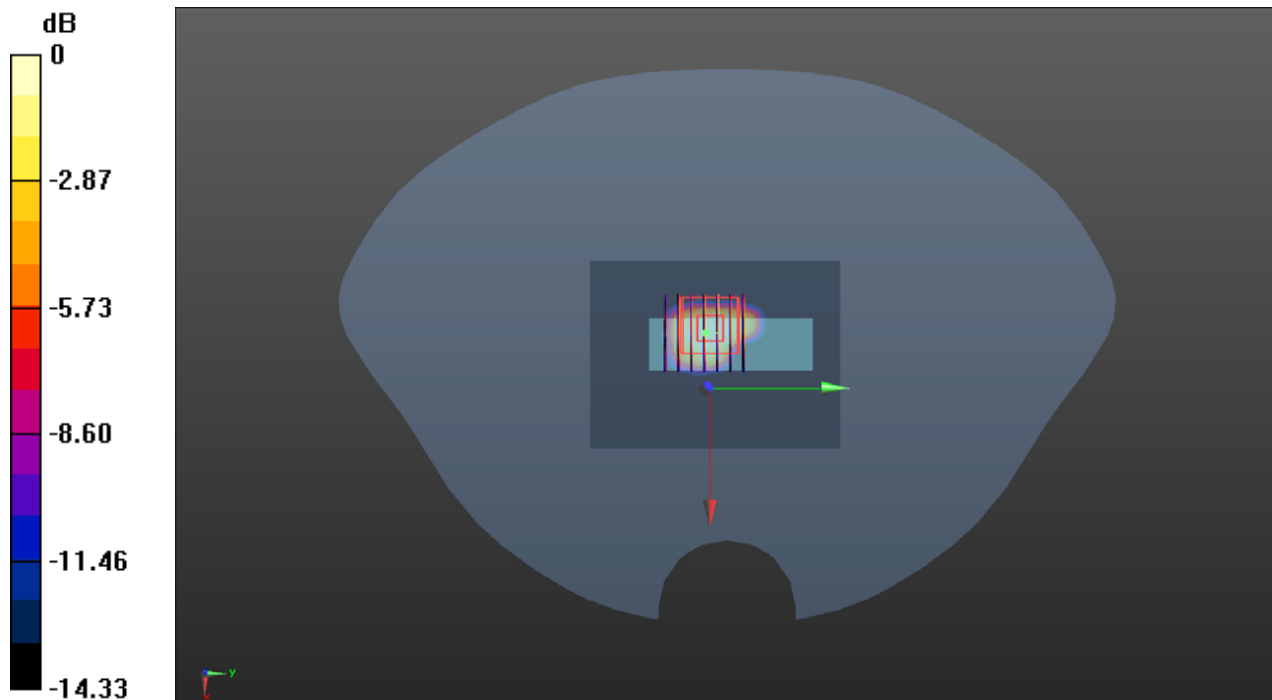

0 dB = 0.0198 W/kg