

FCC Radio Test Report

FCC ID : 2AODLH12110
Equipment : PoE Wi-Fi 7 Access Point
Brand Name : Schneider Electric
Model Name : SAH121101
Applicant / Manufacturer : Schneider Electric USA, Inc.
201 Washington Street, One Boston Place, Suite
2700, Boston, Massachusetts, United States 02108
Standard : 47 CFR FCC Part 15.247

The product was received on Jan. 12, 2026, and testing was started from May 14, 2026 and completed on Jun. 23, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.


Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	8
1.3 Testing Location Information	8
1.4 Measurement Uncertainty	8
2 TEST CONFIGURATION OF EUT.....	9
2.1 Test Channel Mode	9
2.2 The Worst Case Measurement Configuration.....	11
2.3 Accessories	12
2.4 Support Equipment.....	12
2.5 Test Setup Diagram	13
3 TRANSMITTER TEST RESULT	14
3.1 AC Power-line Conducted Emissions	14
3.2 DTS Bandwidth.....	16
3.3 Maximum Conducted Output Power	17
3.4 Power Spectral Density	19
3.5 Emissions in Non-restricted Frequency Bands	20
3.6 Emissions in Restricted Frequency Bands.....	21
4 TEST EQUIPMENT AND CALIBRATION DATA.....	25
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
APPENDIX G. TEST RESULTS OF RADIATED EMISSION CO-LOCATION	
APPENDIX H. TEST PHOTOS	
PHOTOGRAPHS OF EUT V01	



History of this test report

Report No.	Version	Description	Issued Date
FR5D2917AC	01	Initial issue of report	Jul. 03, 2026
FR5D2917AC	02	Revised typo (This report is the latest version replacing for the report issued on Jul. 03, 2026)	Jul. 13, 2026

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.247(a)	DTS Bandwidth	PASS	-
3.3	15.247(b)	Maximum Conducted Output Power	PASS	-
3.4	15.247(e)	Power Spectral Density	PASS	-
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	-
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

The EUT supports beamforming and CDD modes, and the CDD mode is the worst case. Therefore, all test items are evaluated in the report. The beamforming mode only evaluates the output power.

Reviewed by: Ben Tseng

Report Producer: Amber Chiu

1 General Description

1.1 Information

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), VHT20, ax(HEW20), be (EHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), VHT40, ax(HEW40), be (EHT40)	2422-2452	3-9 [7]

Non-Beamforming

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	2TX
2.4-2.4835GHz	802.11g	20	2TX
2.4-2.4835GHz	802.11be EHT20	20	2TX
2.4-2.4835GHz	802.11be EHT40	40	2TX

Beamforming

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11be EHT20-BF	20	2TX
2.4-2.4835GHz	802.11be EHT40-BF	40	2TX

Note:

- 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- EHT20, EHT40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- BWch is the nominal channel bandwidth.
- Evaluated EHT20/EHT40 mode only due to the similar modulation. The power setting of HT20/HT40/VHT20/VHT40/HEW20/HEW40 mode are the same or lower than EHT20/EHT40.

1.1.2 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Support
1	PSA	WA2202	Dipole	I-Pex	Thread
2	PSA	WA2202	PIFA	I-Pex	2.4G+5G
3	PSA	WA2202	PIFA	I-Pex	2.4G+5G

Ant.	Port	Gain (dBi)		
		2.4G	5G	802.15.4
1	1	-	-	3.75
2	1	3.42	4.53	-
3	2	3.12	4.78	-

For 2.4GHz function:

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX)

Ant. 2(port 1) and Ant 3(port 2) could transmit/receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX)

Ant. 2(port 1) and Ant 3(port 2) could transmit/receive simultaneously.

For 802.15.4 function:

For IEEE 802.15.4 mode (1TX/1RX)

Ant. 1(port 1) could transmit/receive.

Note 1: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for N ANT ≤ 4	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{BT}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

1.1.3 EUT Information

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☒ Point-to-multipoint	☐ Point-to-point	
Beamforming Function	☒ With beamforming	☐ Without beamforming	
Resource Unit	☒ Full RU	☐ Partial RU	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		...
☐	Other:		

1.1.4 Mode Test Duty Cycle

Non-Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11b_Nss1,(1Mbps)_2TX	0.999	0.01	12.627m	10Hz (DC>=0.98)
802.11g_Nss1,(6Mbps)_2TX	0.992	0.03	1.978m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz)_1/T
802.11be EHT20-BF	0.997	0.01	5.455m	10Hz (DC>=0.98)
802.11be EHT40-BF	0.997	0.01	5.455m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024

The following reference test guidance is not within the scope of accreditation of TAF:

- ♦ KDB 558074 D01 v05r02
- ♦ KDB 662911 D01 v02r0
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Rian Chung	20.6~23.5°C / 53~58%	13/Jun/2026
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Wayne Chiu	23.4~23.9°C / 52~55%	10/Jun/2026
Radiated	03CH26-HY	Andy Wang	22.6~23.3°C / 52~57%	14/May/2026~02/Jun/2026
Radiated (Co-location)	03CH26-HY	Lego Lin	23.7~25.1°C / 56~59%	23/Jun/2026

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.24 dB	Confidence levels of 95%
Conducted Output Power	1.12 dB	Confidence levels of 95%
Bandwidth	0.07 MHz	Confidence levels of 95%
Conducted Emission	1.12 dB	Confidence levels of 95%
Power Spectral Density	1.22 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	1.76 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.38 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	4.94 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	4.92 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099
-----------------------	------------------------------------

Non-Beamforming

Mode	Power Setting
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	26.5
2437MHz	26.5
2457MHz	26.5
2462MHz	26
802.11g_Nss1,(6Mbps)_2TX	-
2412MHz	23
2417MHz	23.5
2437MHz	26
2457MHz	22.5
2462MHz	21.5
802.11be EHT20_Nss1,(MCS0)_2TX	-
2412MHz	21.5
2417MHz	24
2437MHz	25.5
2457MHz	22
2462MHz	21.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
2422MHz	22
2437MHz	22
2447MHz	21.5
2452MHz	21

**Beamforming**

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
2412MHz	21.5
2417MHz	24
2437MHz	25.5
2457MHz	22
2462MHz	21.5
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
2422MHz	22
2437MHz	22
2447MHz	21.5
2452MHz	21

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	PoE Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis
Test Condition	Radiated measurement
Operating Mode	CTX
1	2.4G+5G+802.15.4
Refer to Sporton Test Report No.: FA5D2917 for Co-location RF Exposure Evaluation and Appendix G for Radiated Emission Co-location.	

2.3 Accessories

Accessories				
Screw Kit	Brand Name	Schneider Electric	Model Name	SAH121101

Reminder: Regarding to more detail and other information, please refer to user manual.



2.4 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-
2	PoE	PHIHONG	POE20U-560(G)	-	-
3	AC power cable	Power sync	PW-GPC180-3	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-
2	PoE (Remote)	PHIHONG	POE20U-560(G)	-	-
3	AC power cable (Remote)	Power sync	PW-GPC180-3	-	-

2.5 Test Setup Diagram

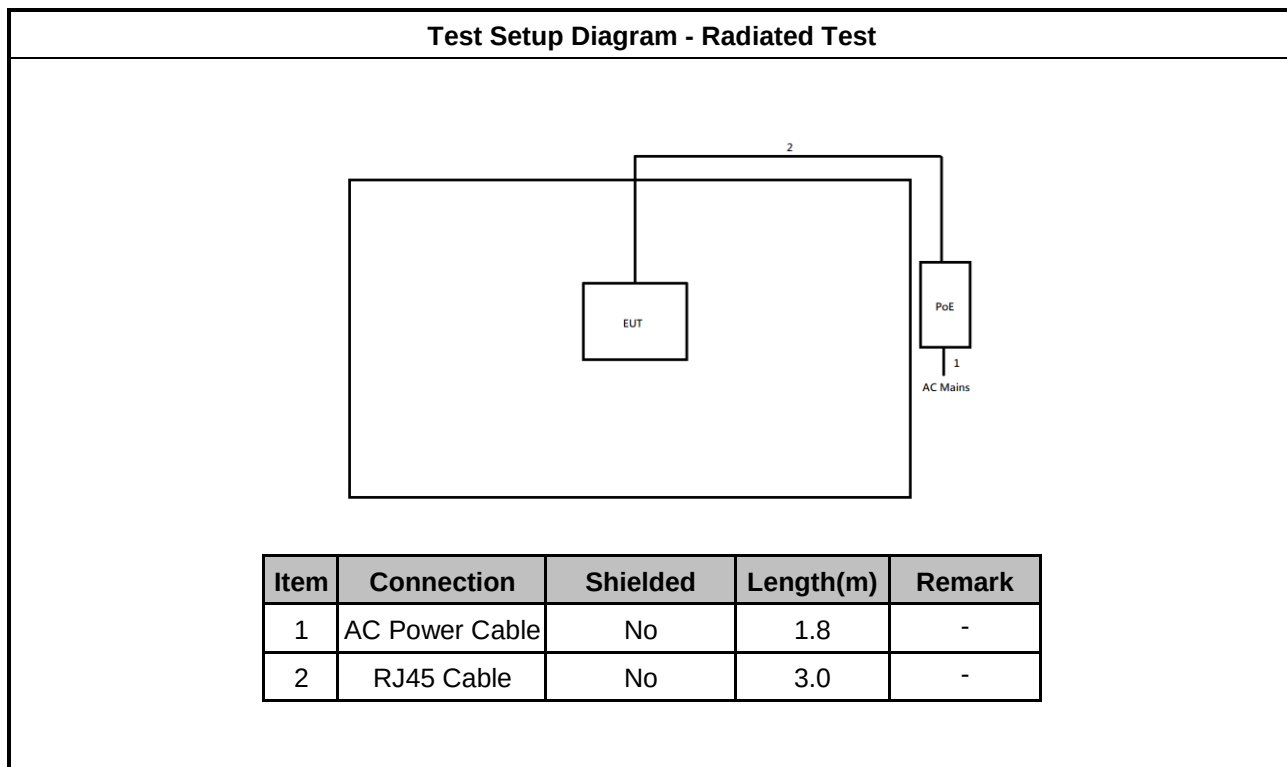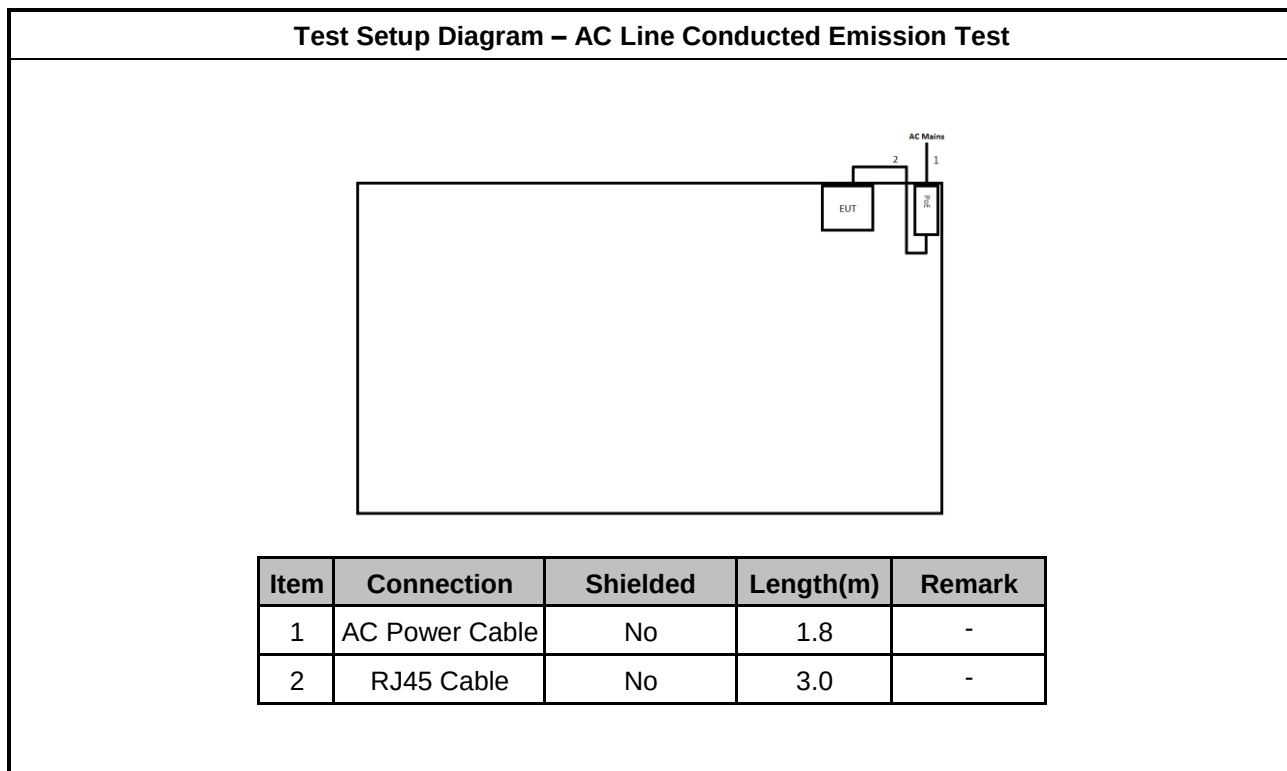

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

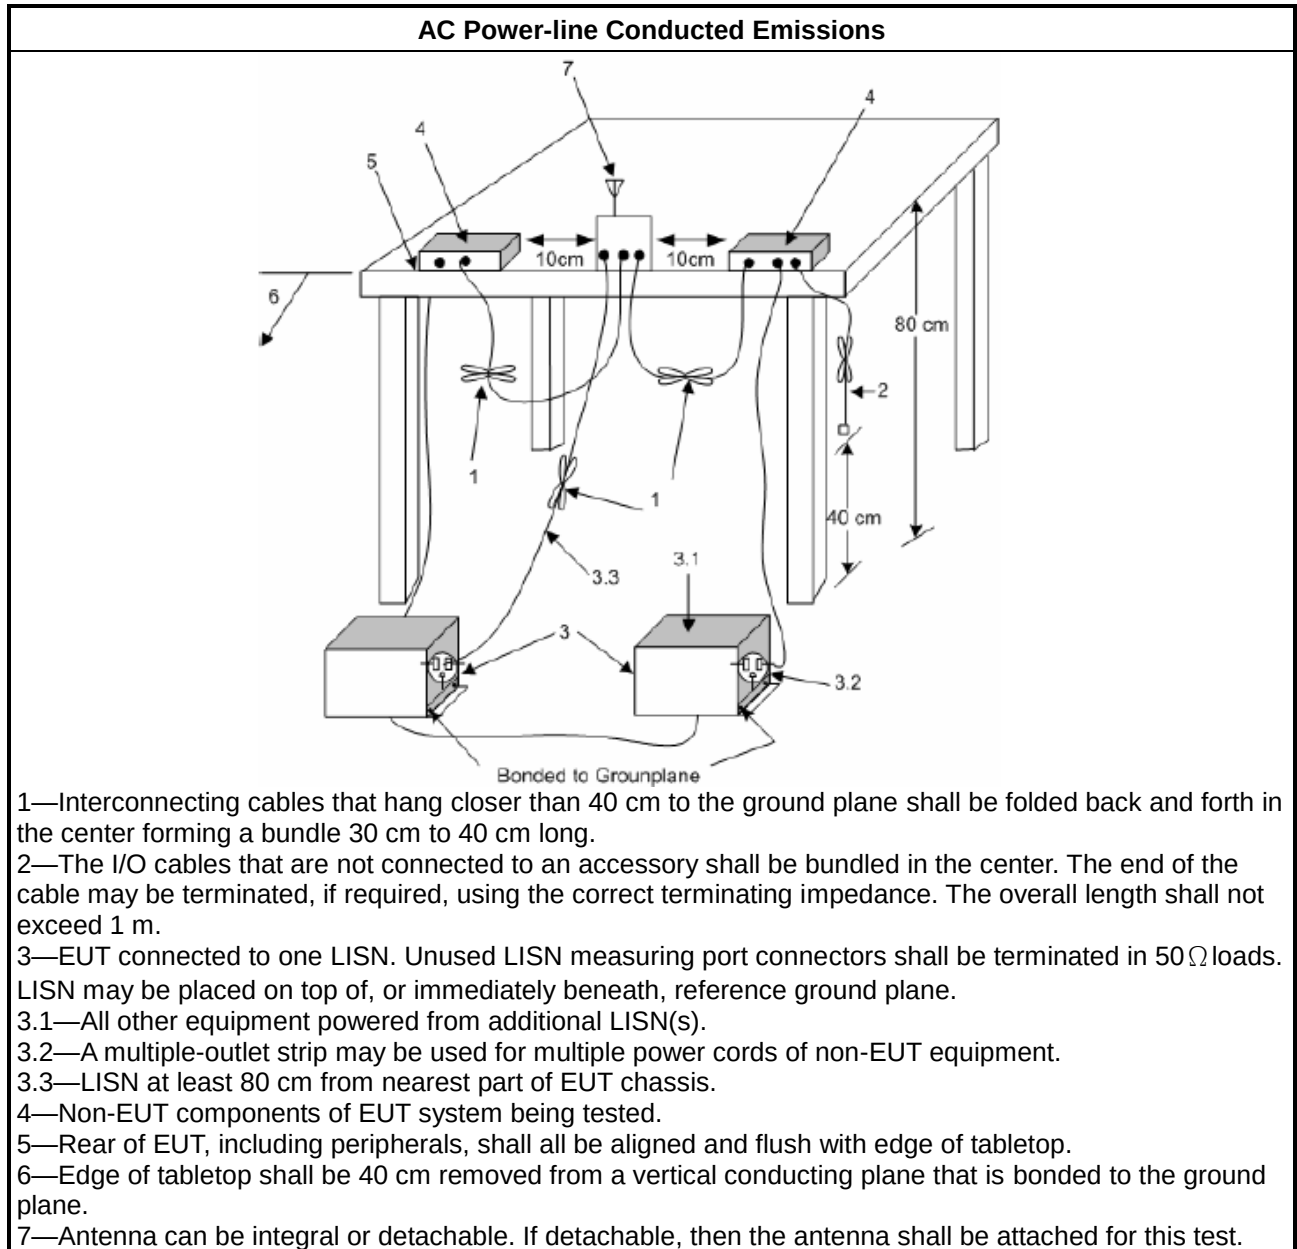

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as KDB 558074. clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
☐	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

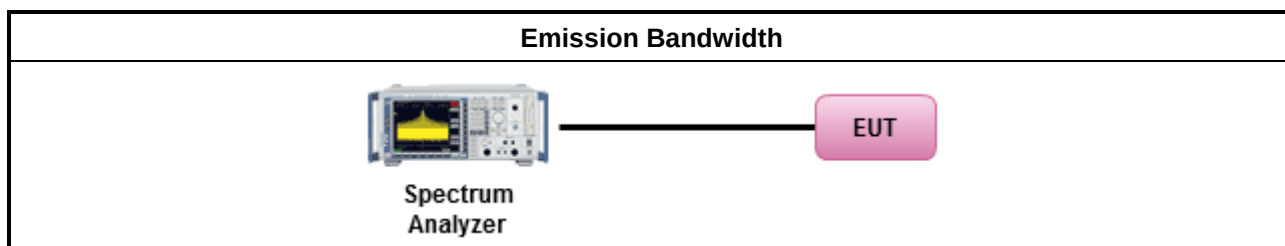

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit	
	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	Smart antenna system (SAS):
	- Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	- Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dBm
e.i.r.p. Power Limit:	
	2400-2483.5 MHz Band
	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	Smart antenna system (SAS)
	- Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	- Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.	


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
☐	Refer as KDB 558074, clause 8.3.1.2 integrated band power method.
☐	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.2 of ANSI C63.10) peak power meter.
Maximum Average Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
☒	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

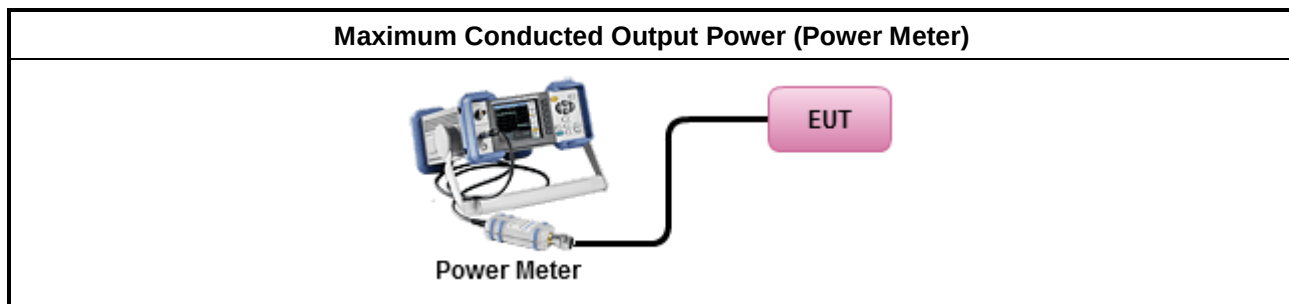

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Max. PSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
▪	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

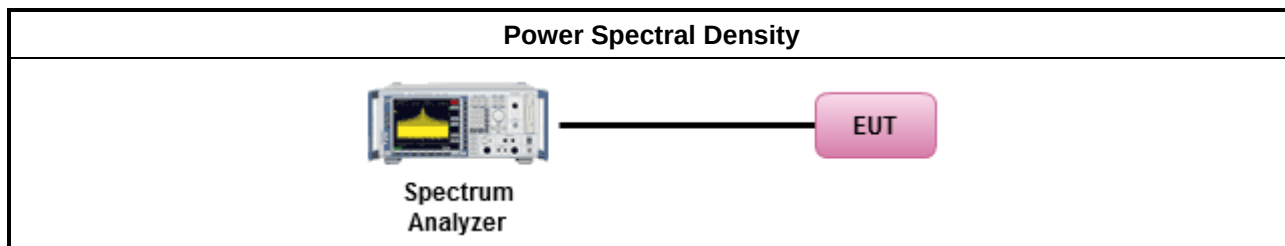

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

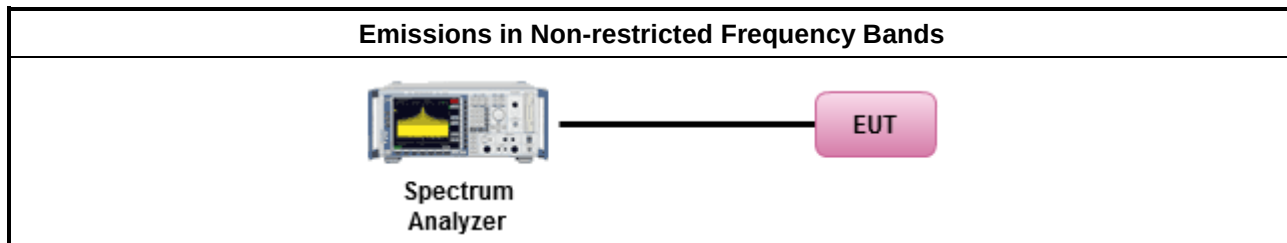

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Test Method	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31(f)(2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.6.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamplifier Factor)

3.6.5 Test Setup

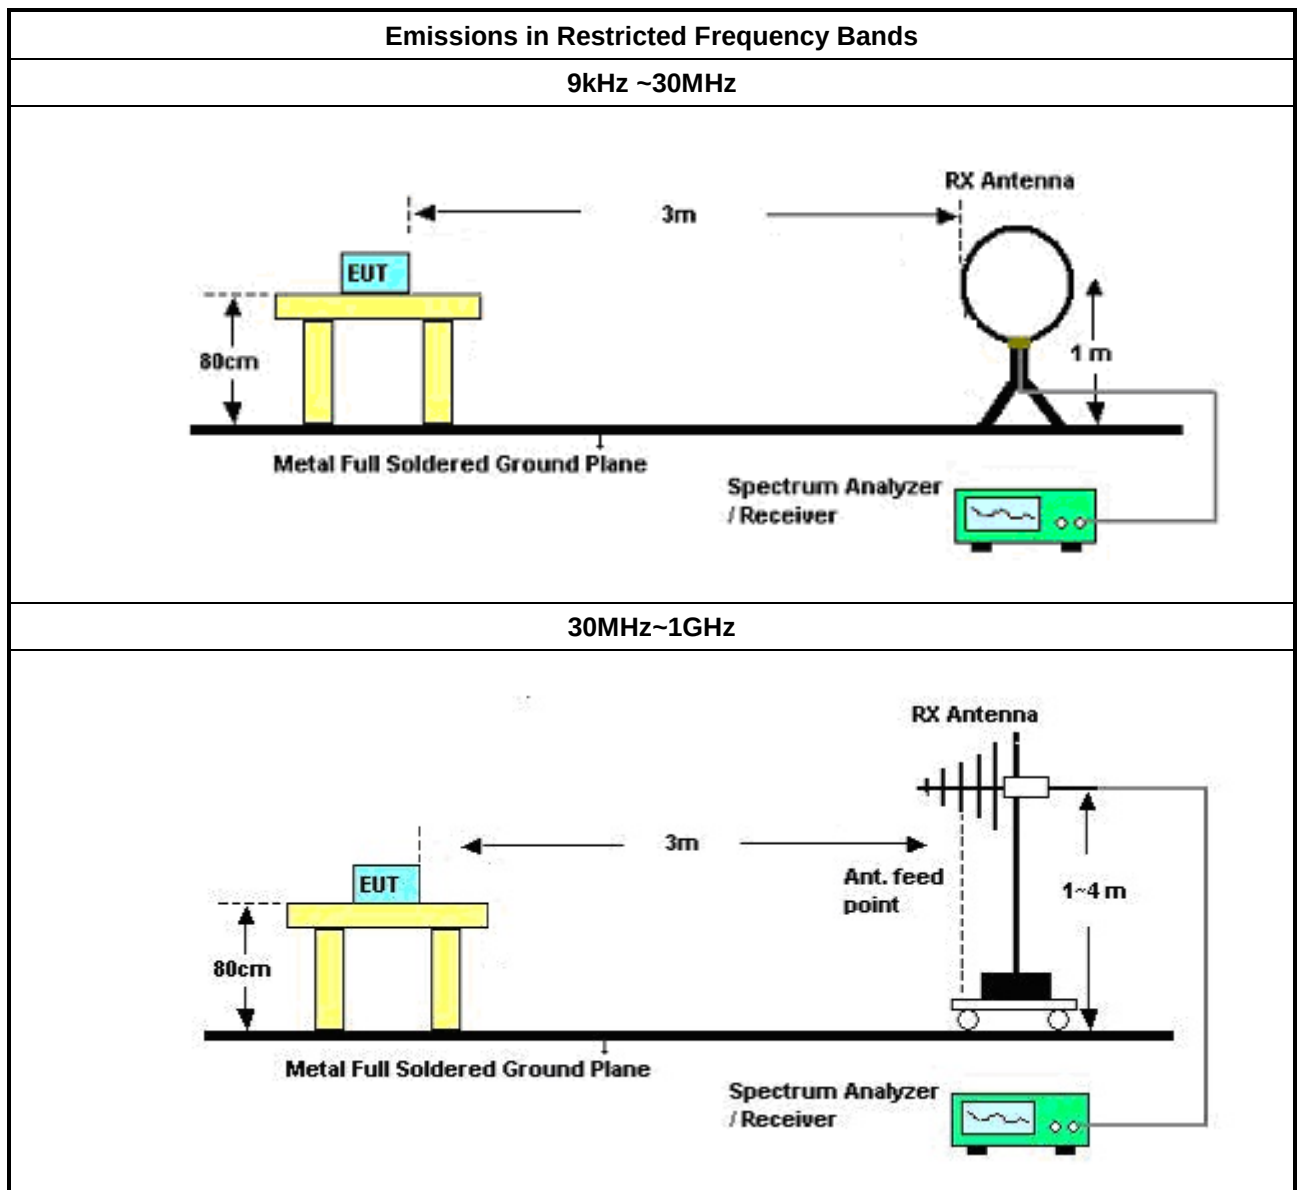

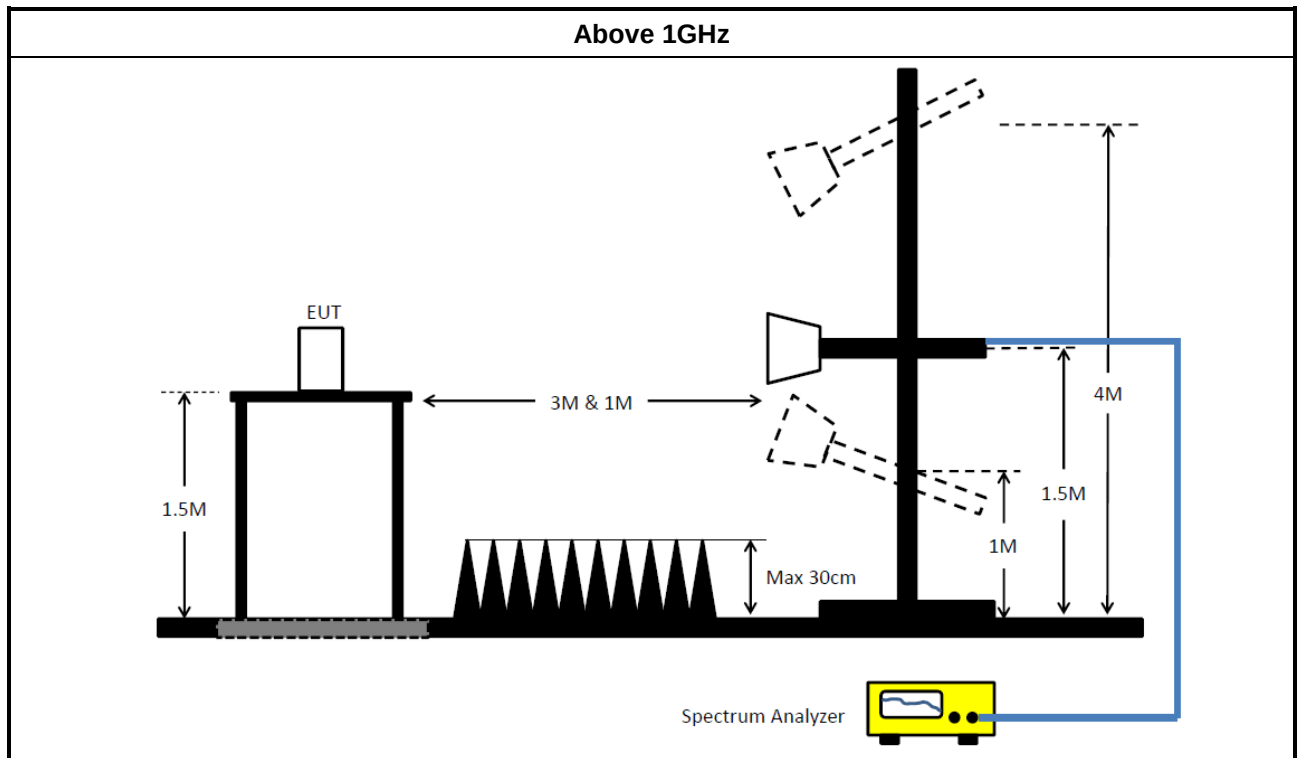

3.6.6 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR7	102956	9kHz ~ 3.6GHz	26/Aug/2025	25/Aug/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	25/Feb/2026	24/Feb/2027
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	1056	9kHz ~ 30MHz	25/Jun/2025	24/Jun/2026
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2025	29/Oct/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	26/Mar/2026	25/Mar/2027
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	26/Mar/2026	25/Mar/2027
SENSE-15247_DTS	Sporton	V5.11.27	N/A	N/A	N/A	N/A

**Instrument for Radiated Test (03CH26-HY)**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	30MHz~1GHz 3m	06/Aug/2025	05/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102318	9kHz~3.6GHz	08/Dec/2025	07/Dec/2026
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	16/Mar/2026	15/Mar/2027
Bilog Antenna & 6dB Attenuator	TESEQ & VGT	CBL 6111D & VFA 04002-06	63540/002	30MHz~1GHz	04/Jun/2025	03/Jun/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	9kHz~1GHz	03/Oct/2025	02/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 903	20230515-2	30MHz~1GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	21/May/2025	20/May/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-15247-DTS	Sporton	V5.11.27	NA	NA	NA	NA

Instrument for Radiated Test (Co-location)

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH26-HY	1GHz~18GHz 3m	06/Aug/2025	05/Aug/2026
Signal Analyzer	ROHDE& SCHWARZ	FSV3044	101411	10Hz~44GHz	30/Sep/2025	29/Sep/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02877	1GHz~18GHz	02/Jul/2025	01/Jul/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+ SUHNER	SUOFLEX 104	CB009	1GHz~40GHz	03/Oct/2025	02/Oct/2026
Preamplifier	SGH	PRAMP 118-H	20230515-4	1GHz ~18GHz	20/May/2026	21/May/2027
Amplifier	EM	EM18G40G	060874	18GHz ~ 40GHz	27/Apr/2026	26/Apr/2027
SENSE-EMI	Sporton	V5.11.9	NA	NA	NA	NA



Conducted Emissions at Powerline

Appendix A


Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	28.57M	41.70	50.00	-8.30	Line

Result


Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	163.12k	43.66	65.31	-21.65	Line
Mode 1	Pass	AV	163.12k	36.42	55.31	-18.89	Line
Mode 1	Pass	QP	318.98k	40.22	59.73	-19.51	Line
Mode 1	Pass	AV	318.98k	34.78	49.73	-14.95	Line
Mode 1	Pass	QP	540.27k	38.84	56.00	-17.16	Line
Mode 1	Pass	AV	540.27k	27.53	46.00	-18.47	Line
Mode 1	Pass	QP	2.07M	28.24	56.00	-27.76	Line
Mode 1	Pass	AV	2.07M	24.94	46.00	-21.06	Line
Mode 1	Pass	QP	4.27M	27.14	56.00	-28.86	Line
Mode 1	Pass	AV	4.27M	16.01	46.00	-29.99	Line
Mode 1	Pass	QP	28.57M	42.58	60.00	-17.42	Line
Mode 1	Pass	AV	28.57M	41.70	50.00	-8.30	Line
Mode 1	Pass	QP	151.2k	45.41	65.92	-20.51	Neutral
Mode 1	Pass	AV	151.2k	37.36	55.92	-18.56	Neutral
Mode 1	Pass	QP	253.05k	39.04	61.66	-22.62	Neutral
Mode 1	Pass	AV	253.05k	34.11	51.66	-17.55	Neutral
Mode 1	Pass	QP	542.43k	37.62	56.00	-18.38	Neutral
Mode 1	Pass	AV	542.43k	27.74	46.00	-18.26	Neutral
Mode 1	Pass	QP	1.22M	30.90	56.00	-25.10	Neutral
Mode 1	Pass	AV	1.22M	26.22	46.00	-19.78	Neutral
Mode 1	Pass	QP	3.98M	23.10	56.00	-32.90	Neutral
Mode 1	Pass	AV	3.98M	15.75	46.00	-30.25	Neutral
Mode 1	Pass	QP	28.57M	42.59	60.00	-17.41	Neutral
Mode 1	Pass	AV	28.57M	41.09	50.00	-8.91	Neutral

Conducted Emissions at Powerline_Mode 1

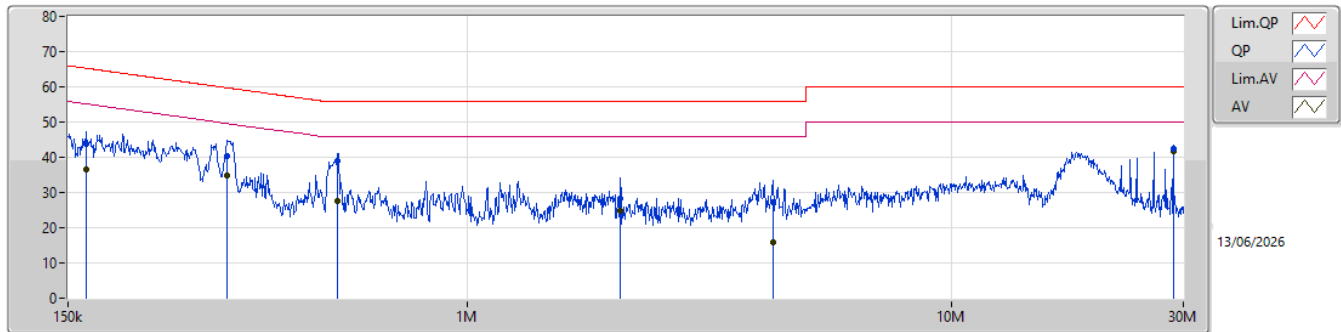

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	163.12k	43.66	65.31	-21.65	19.92	Line	23.74	9.64	0.16	10.12								
AV	163.12k	36.42	55.31	-18.89	19.92	Line	16.50	9.64	0.16	10.12								
QP	318.98k	40.22	59.73	-19.51	19.86	Line	20.36	9.63	0.11	10.12								
AV	318.98k	34.78	49.73	-14.95	19.86	Line	14.92	9.63	0.11	10.12								
QP	540.27k	38.84	56.00	-17.16	19.84	Line	19.00	9.63	0.09	10.12								
AV	540.27k	27.53	46.00	-18.47	19.84	Line	7.69	9.63	0.09	10.12								
QP	2.07M	28.24	56.00	-27.76	19.82	Line	8.42	9.65	0.04	10.13								
AV	2.07M	24.94	46.00	-21.06	19.82	Line	5.12	9.65	0.04	10.13								
QP	4.27M	27.14	56.00	-28.86	19.93	Line	7.21	9.66	0.14	10.13								
AV	4.27M	16.01	46.00	-29.99	19.93	Line	-3.92	9.66	0.14	10.13								
QP	28.57M	42.58	60.00	-17.42	19.94	Line	22.64	9.46	0.35	10.13								
AV	28.57M	41.70	50.00	-8.30	19.94	Line	21.76	9.46	0.35	10.13								

Conducted Emissions at Powerline_Mode 1

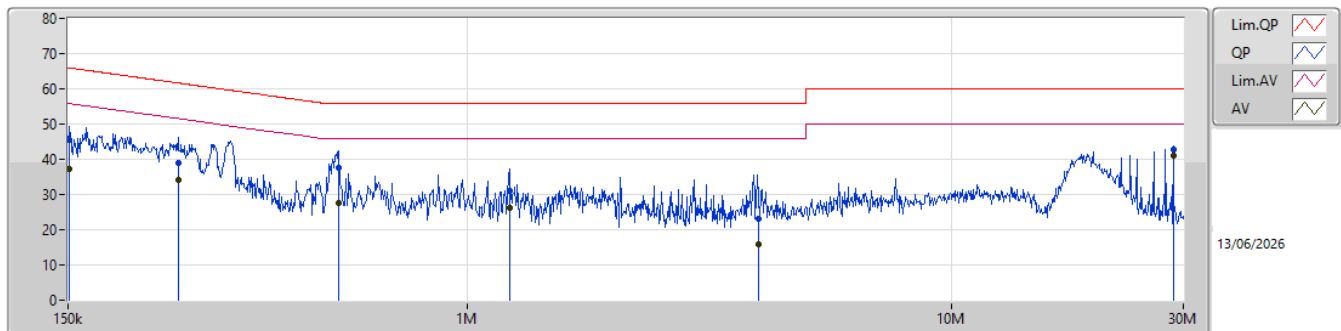

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)								
QP	151.2k	45.41	65.92	-20.51	19.93	Neutral	25.48	9.64	0.17	10.12								
AV	151.2k	37.36	55.92	-18.56	19.93	Neutral	17.43	9.64	0.17	10.12								
QP	253.05k	39.04	61.66	-22.62	19.87	Neutral	19.17	9.63	0.12	10.12								
AV	253.05k	34.11	51.66	-17.55	19.87	Neutral	14.24	9.63	0.12	10.12								
QP	542.43k	37.62	56.00	-18.38	19.84	Neutral	17.78	9.63	0.09	10.12								
AV	542.43k	27.74	46.00	-18.26	19.84	Neutral	7.90	9.63	0.09	10.12								
QP	1.22M	30.90	56.00	-25.10	19.82	Neutral	11.08	9.64	0.06	10.12								
AV	1.22M	26.22	46.00	-19.78	19.82	Neutral	6.40	9.64	0.06	10.12								
QP	3.98M	23.10	56.00	-32.90	19.92	Neutral	3.18	9.66	0.13	10.13								
AV	3.98M	15.75	46.00	-30.25	19.92	Neutral	-4.17	9.66	0.13	10.13								
QP	28.57M	42.59	60.00	-17.41	20.15	Neutral	22.44	9.67	0.35	10.13								
AV	28.57M	41.09	50.00	-8.91	20.15	Neutral	20.94	9.67	0.35	10.13								

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	8.305M	13.138M	13M1G1D	8.14M	12.919M
802.11g_Nss1,(6Mbps)_2TX	15.84M	16.987M	17M0D1D	15.125M	16.767M
802.11be EHT20_Nss1,(MCS0)_2TX	18.59M	19.075M	19M1D1D	16.115M	18.911M
802.11be EHT40_Nss1,(MCS0)_2TX	36.96M	37.821M	37M8D1D	33.22M	37.491M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.14M	13.138M	8.305M	13.083M
2437MHz	Pass	500k	8.14M	13.028M	8.25M	13.138M
2462MHz	Pass	500k	8.195M	12.919M	8.14M	13.083M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	15.455M	16.767M	15.675M	16.822M
2437MHz	Pass	500k	15.785M	16.987M	15.84M	16.877M
2462MHz	Pass	500k	15.675M	16.822M	15.125M	16.822M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.26M	18.911M	17.105M	19.075M
2437MHz	Pass	500k	18.59M	18.966M	16.115M	18.966M
2462MHz	Pass	500k	17.545M	18.911M	18.205M	18.911M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	34.65M	37.711M	35.86M	37.491M
2437MHz	Pass	500k	36.3M	37.711M	33.22M	37.821M
2452MHz	Pass	500k	36.96M	37.711M	34.1M	37.821M


Port X-N dB = Port X 6dB down bandwidth;
Port X-OBW = Port X 99% occupied bandwidth

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

10/06/2026

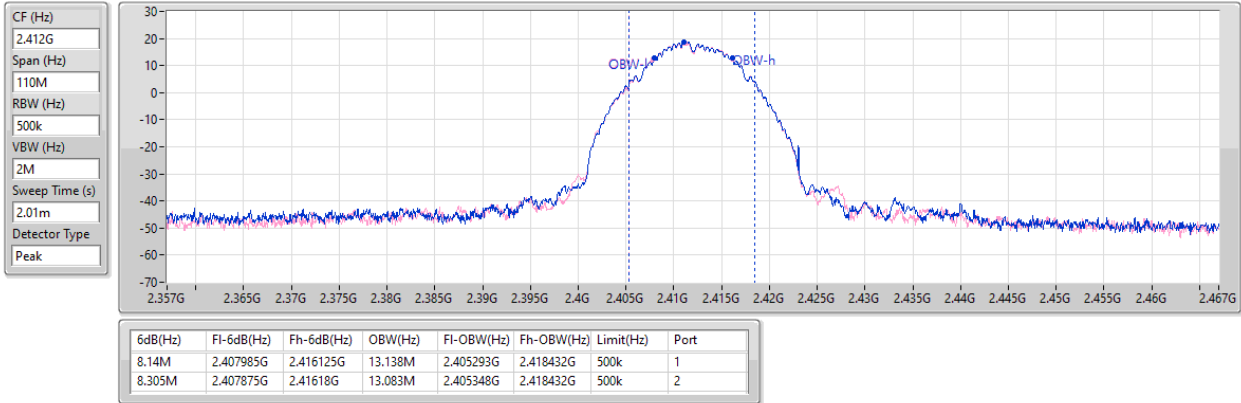

2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX
EBW
2437MHz

10/06/2026

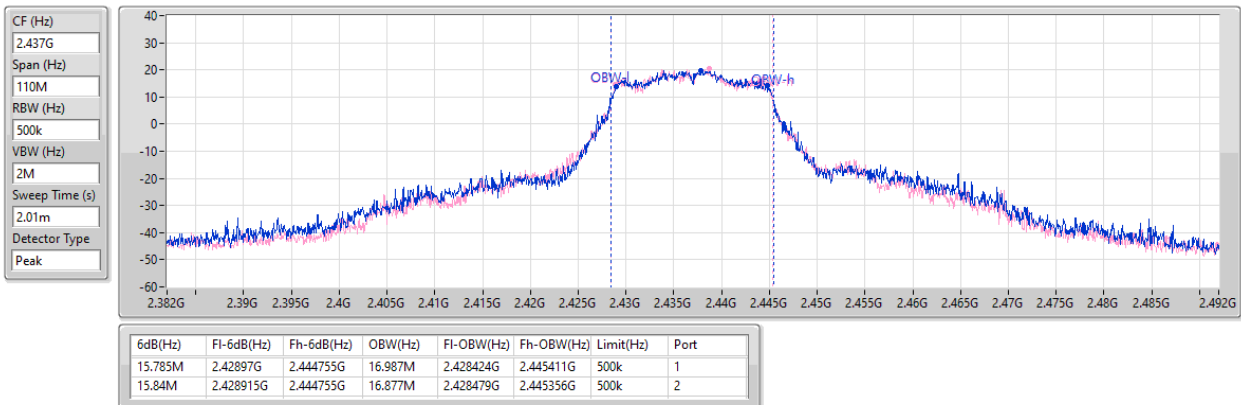


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX
EBW
2437MHz

10/06/2026

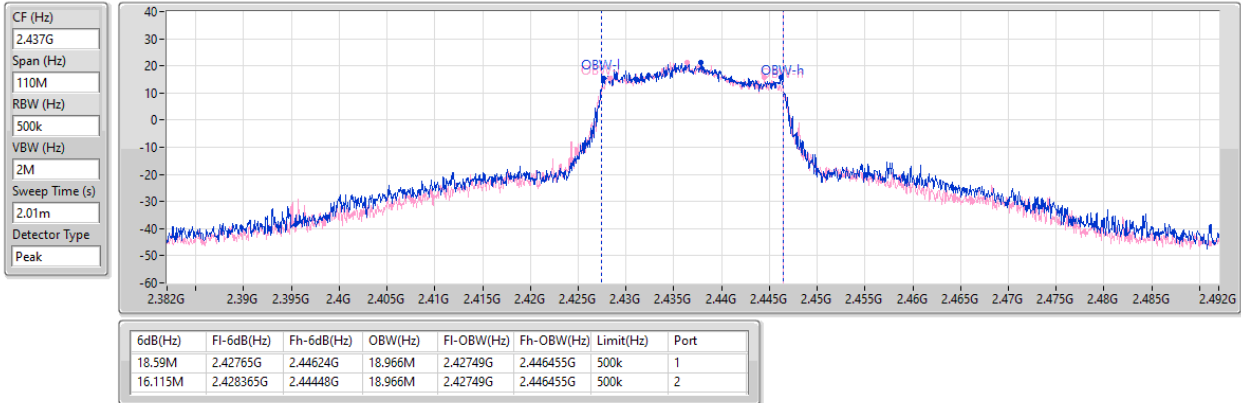
2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX
EBW
2452MHz

10/06/2026

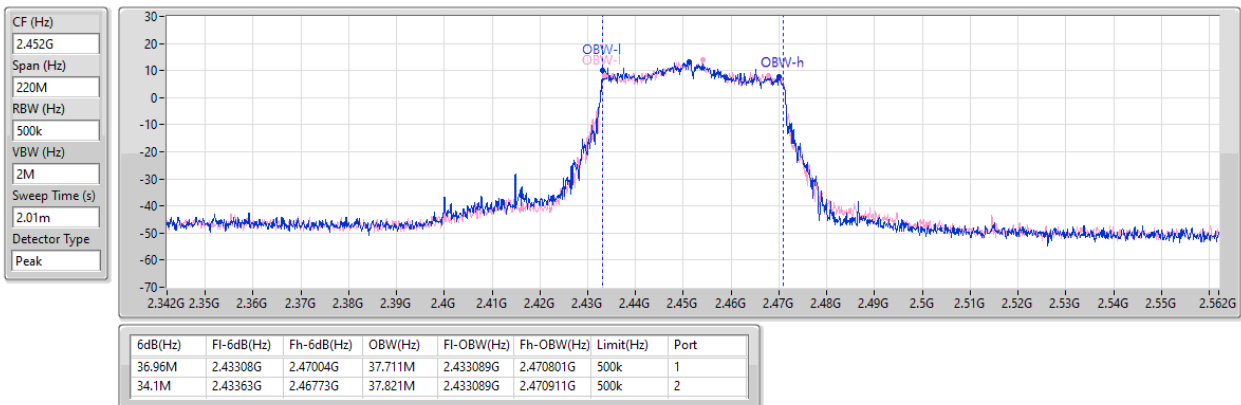



Average Power Non-Beamforming

Appendix C.1

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	28.51	0.70958
802.11g_Nss1,(6Mbps)_2TX	28.25	0.66834
802.11be EHT20_Nss1,(MCS0)_2TX	27.78	0.59979
802.11be EHT40_Nss1,(MCS0)_2TX	24.35	0.27227



Average Power Non-Beamforming

Appendix C.1

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.42	25.67	25.29	28.49	30.00
2437MHz	Pass	3.42	25.69	25.31	28.51	30.00
2457MHz	Pass	3.42	24.92	25.41	28.18	30.00
2462MHz	Pass	3.42	25.15	25.14	28.16	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.42	22.50	22.31	25.42	30.00
2417MHz	Pass	3.42	23.01	22.91	25.97	30.00
2437MHz	Pass	3.42	25.41	25.06	28.25	30.00
2457MHz	Pass	3.42	22.01	21.92	24.98	30.00
2462MHz	Pass	3.42	21.00	20.93	23.98	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	3.42	20.91	20.90	23.92	30.00
2417MHz	Pass	3.42	23.51	23.60	26.57	30.00
2437MHz	Pass	3.42	24.88	24.66	27.78	30.00
2457MHz	Pass	3.42	21.47	21.47	24.48	30.00
2462MHz	Pass	3.42	21.23	21.06	24.16	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	3.42	21.55	21.04	24.31	30.00
2437MHz	Pass	3.42	21.46	21.22	24.35	30.00
2447MHz	Pass	3.42	20.86	20.87	23.88	30.00
2452MHz	Pass	3.42	20.53	20.49	23.52	30.00

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	27.78	0.59979
802.11be EHT40-BF_Nss1,(MCS0)_2TX	24.35	0.27227



Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.28	20.91	20.9	23.92	29.72
2417MHz	Pass	6.28	23.51	23.6	26.57	29.72
2437MHz	Pass	6.28	24.88	24.66	27.78	29.72
2457MHz	Pass	6.28	21.47	21.47	24.48	29.72
2462MHz	Pass	6.28	21.23	21.06	24.16	29.72
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	6.28	21.55	21.04	24.31	29.72
2437MHz	Pass	6.28	21.46	21.22	24.35	29.72
2447MHz	Pass	6.28	20.86	20.87	23.88	29.72
2452MHz	Pass	6.28	20.53	20.49	23.52	29.72

DG = Directional Gain; Port X = Port X output power;
Inf = There's no restriction for the limit.

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	1.77
802.11g_Nss1,(6Mbps)_2TX	1.76
802.11be EHT20_Nss1,(MCS0)_2TX	2.16
802.11be EHT40_Nss1,(MCS0)_2TX	-3.22

RBW = 3kHz;

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.28	-1.69	-0.96	1.09	7.72
2437MHz	Pass	6.28	-1.81	-2.32	0.94	7.72
2462MHz	Pass	6.28	-0.32	-0.32	1.77	7.72
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.28	-3.37	-2.21	-0.83	7.72
2437MHz	Pass	6.28	-1.07	-1.43	1.76	7.72
2462MHz	Pass	6.28	-5.31	-4.47	-2.41	7.72
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	6.28	-2.98	-3.79	-2.18	7.72
2437MHz	Pass	6.28	0.57	0.53	2.16	7.72
2462MHz	Pass	6.28	-3.52	-3.64	-1.63	7.72
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	6.28	-6.15	-7.26	-4.21	7.72
2437MHz	Pass	6.28	-5.29	-5.75	-3.22	7.72
2452MHz	Pass	6.28	-6.50	-6.79	-4.43	7.72


DG = Directional Gain; RBW = 3kHz;
 PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
 Inf = There's no restriction for the limit.

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

10/06/2026

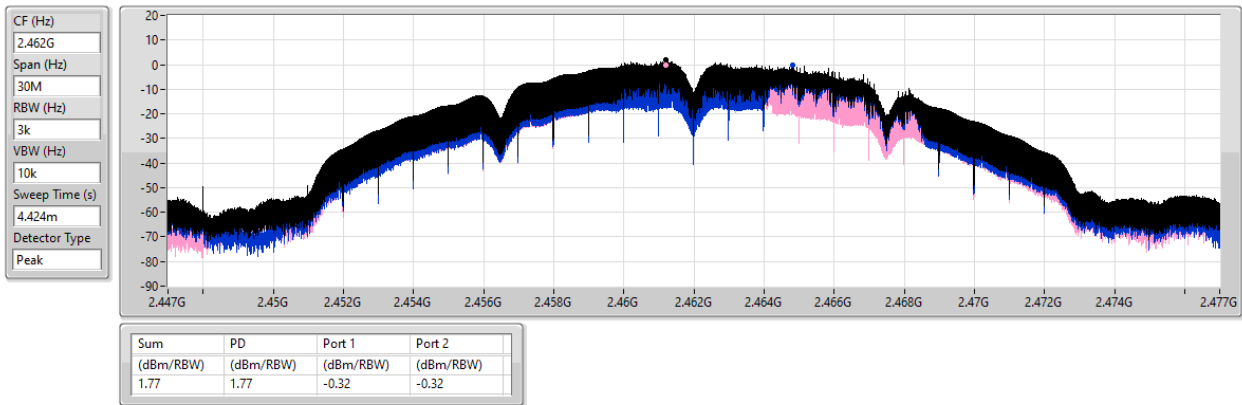


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

10/06/2026

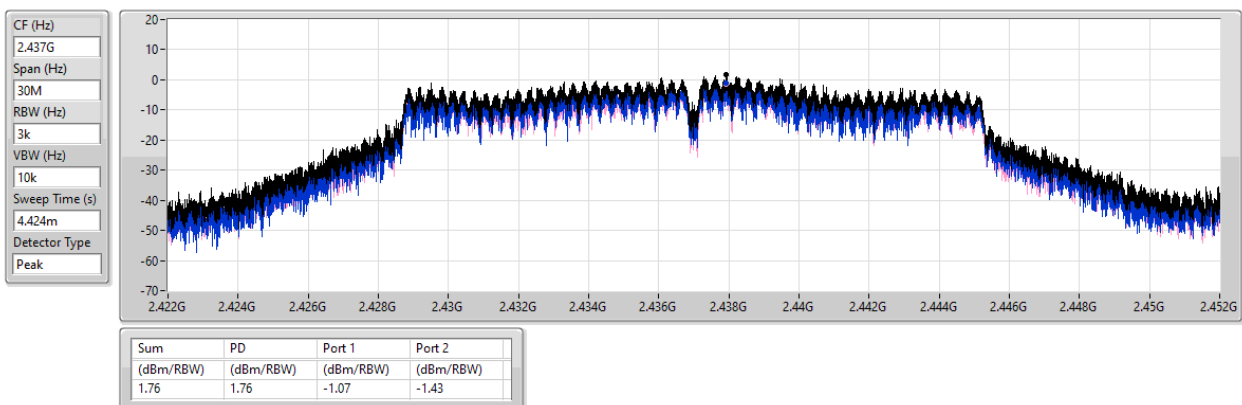


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

PSD

2437MHz

10/06/2026

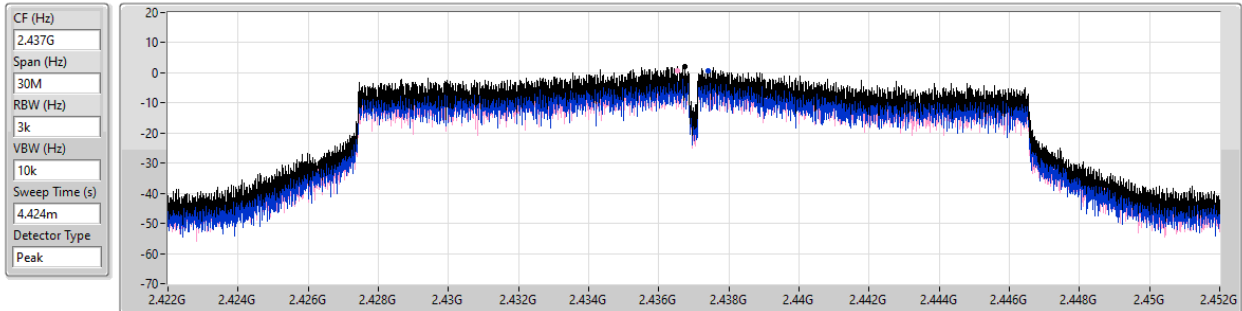


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
2.16	2.16	0.57	0.53

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

PSD

2437MHz

10/06/2026

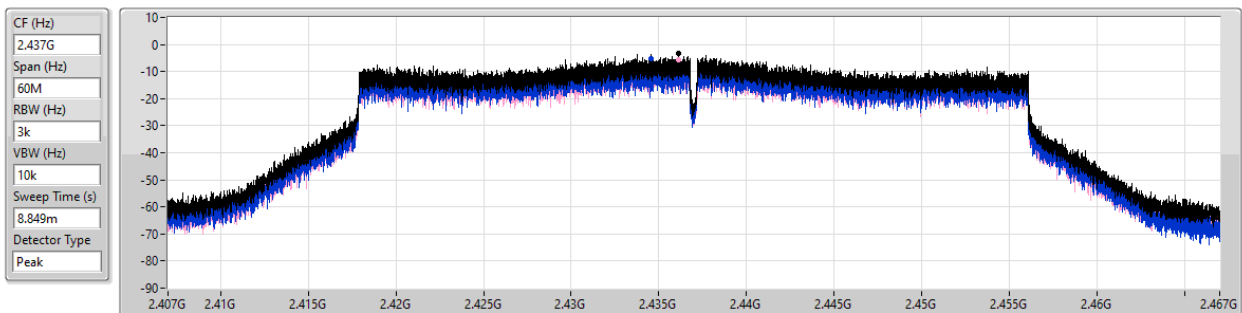

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.22	-3.22	-5.29	-5.75



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	2.4354G	16.07	-13.93	2.18991G	-50.08	2.4G	-33.74	2.4G	-33.88	2.50814G	-52.35	16.96746G	-41.80	2
802.11g_Nss1,(6Mbps)_2TX	Pass	2.43574G	15.82	-14.18	2.30408G	-48.48	2.39984G	-21.33	2.4G	-20.75	2.51622G	-52.17	23.31988G	-41.62	2
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	2.43574G	14.69	-15.31	2.30525G	-51.60	2.39952G	-20.77	2.4G	-21.79	2.52302G	-52.85	21.6791G	-41.21	2
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	2.4344G	9.28	-20.72	39.16M	-47.81	2.39984G	-22.78	2.4G	-21.26	2.50014G	-52.91	17.61839G	-41.64	2

Result


Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4354G	16.07	-13.93	2.30408G	-48.87	2.39856G	-37.02	2.4G	-38.77	2.5123G	-52.38	16.21169G	-41.16	1
2412MHz	Pass	2.4354G	16.07	-13.93	2.18991G	-50.08	2.4G	-33.74	2.4G	-33.88	2.50814G	-52.35	16.96746G	-41.80	2
2437MHz	Pass	2.4354G	16.07	-13.93	2.30408G	-49.13	2.4G	-45.75	2.4G	-45.88	2.51014G	-52.54	16.2735G	-41.94	1
2437MHz	Pass	2.4354G	16.07	-13.93	2.30758G	-50.30	2.398G	-50.14	2.4G	-50.81	2.50838G	-52.35	16.2454G	-41.16	2
2462MHz	Pass	2.4354G	16.07	-13.93	2.30292G	-48.76	2.4G	-44.00	2.4G	-43.76	2.51926G	-52.24	16.88317G	-41.12	1
2462MHz	Pass	2.4354G	16.07	-13.93	2.30991G	-46.45	2.4G	-48.38	2.4G	-49.32	2.50134G	-51.57	16.25383G	-41.08	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	15.82	-14.18	2.30525G	-48.07	2.39992G	-21.87	2.4G	-21.16	2.50078G	-52.22	16.23136G	-41.34	1
2412MHz	Pass	2.43574G	15.82	-14.18	2.30408G	-48.48	2.39984G	-21.33	2.4G	-20.75	2.51622G	-52.17	23.31988G	-41.62	2
2437MHz	Pass	2.43574G	15.82	-14.18	2.30175G	-48.06	2.39952G	-40.14	2.4G	-40.33	2.50102G	-49.63	24.56171G	-41.96	1
2437MHz	Pass	2.43574G	15.82	-14.18	2.30525G	-45.28	2.39952G	-41.28	2.4G	-43.76	2.5103G	-51.04	23.30583G	-41.63	2
2462MHz	Pass	2.43574G	15.82	-14.18	2.30641G	-49.33	2.4G	-45.69	2.4G	-46.49	2.50526G	-52.21	16.60503G	-41.74	1
2462MHz	Pass	2.43574G	15.82	-14.18	2.30874G	-47.71	2.4G	-49.52	2.4G	-48.12	2.50422G	-51.53	16.57974G	-41.66	2
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	14.69	-15.31	2.30408G	-52.27	2.4G	-23.91	2.4G	-22.78	2.5175G	-52.68	16.54603G	-41.88	1
2412MHz	Pass	2.43574G	14.69	-15.31	2.30525G	-51.60	2.39952G	-20.77	2.4G	-21.79	2.52302G	-52.85	21.6791G	-41.21	2
2437MHz	Pass	2.43574G	14.69	-15.31	2.30758G	-46.70	2.39848G	-33.93	2.4G	-37.68	2.50382G	-49.81	16.61065G	-41.14	1
2437MHz	Pass	2.43574G	14.69	-15.31	2.30758G	-46.40	2.39888G	-38.08	2.4G	-38.77	2.50094G	-51.60	16.2735G	-40.84	2
2462MHz	Pass	2.43574G	14.69	-15.31	2.30641G	-50.48	2.4G	-46.43	2.4G	-44.93	2.50398G	-52.12	16.20888G	-42.00	1
2462MHz	Pass	2.43574G	14.69	-15.31	2.30059G	-47.45	2.39512G	-48.70	2.4G	-49.39	2.50318G	-51.02	16.22855G	-40.74	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.4344G	9.28	-20.72	2.30512G	-49.72	2.4G	-23.25	2.4G	-21.77	2.50894G	-52.67	16.24416G	-41.62	1
2422MHz	Pass	2.4344G	9.28	-20.72	39.16M	-47.81	2.39984G	-22.78	2.4G	-21.26	2.50014G	-52.91	17.61839G	-41.64	2
2437MHz	Pass	2.4344G	9.28	-20.72	2.30512G	-47.76	2.39984G	-39.71	2.4G	-40.76	2.50142G	-50.66	23.30044G	-41.61	1
2437MHz	Pass	2.4344G	9.28	-20.72	39.16M	-50.07	2.39968G	-37.24	2.4G	-39.73	2.5035G	-52.04	23.29202G	-41.61	2
2452MHz	Pass	2.4344G	9.28	-20.72	2.30054G	-51.04	2.4G	-45.81	2.4G	-44.87	2.50686G	-52.37	16.24696G	-41.24	1
2452MHz	Pass	2.4344G	9.28	-20.72	2.30626G	-50.35	2.39936G	-49.00	2.4G	-48.65	2.50014G	-49.71	16.24416G	-41.04	2

2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

CSEndB

2412MHz

10/06/2026

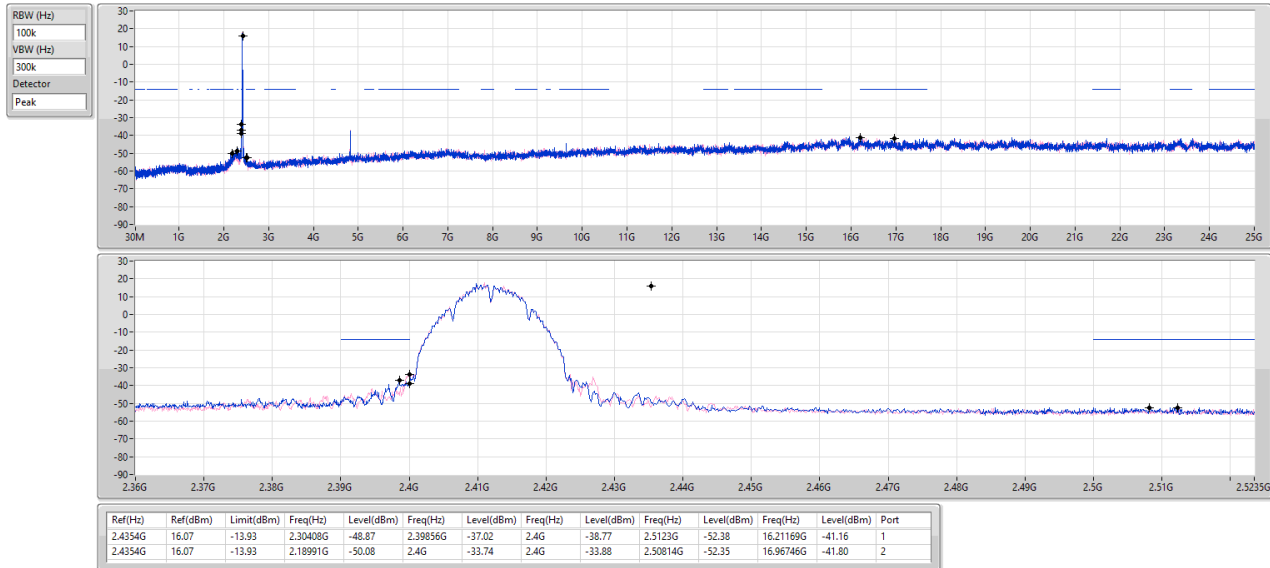


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

CSEndB

2412MHz

10/06/2026

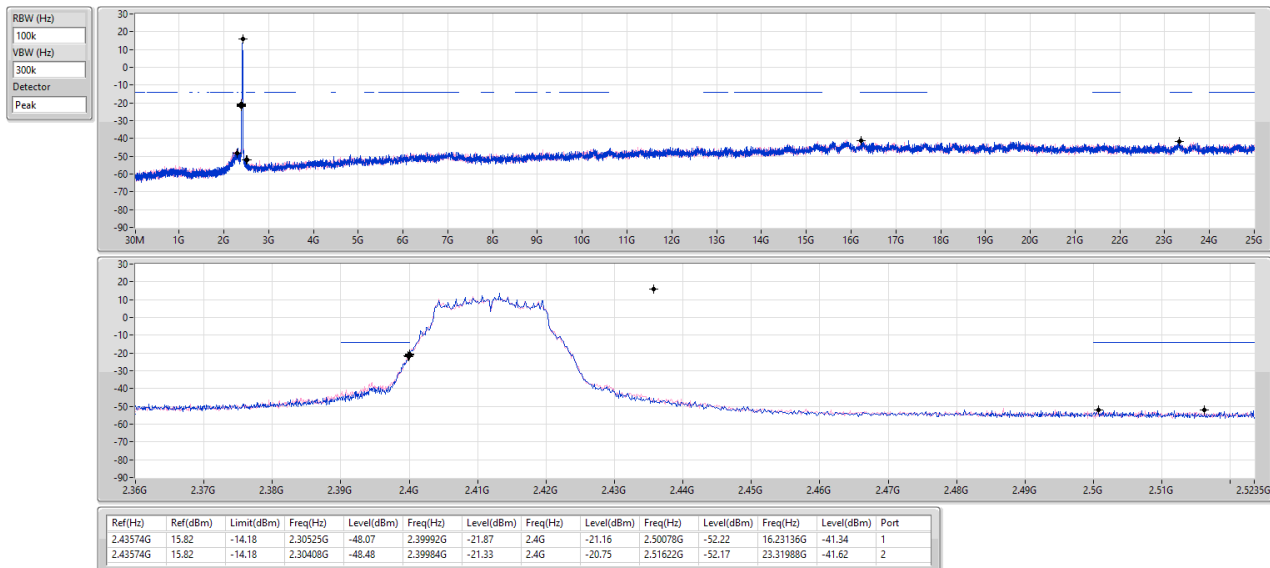


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

CSEndB

2412MHz

10/06/2026

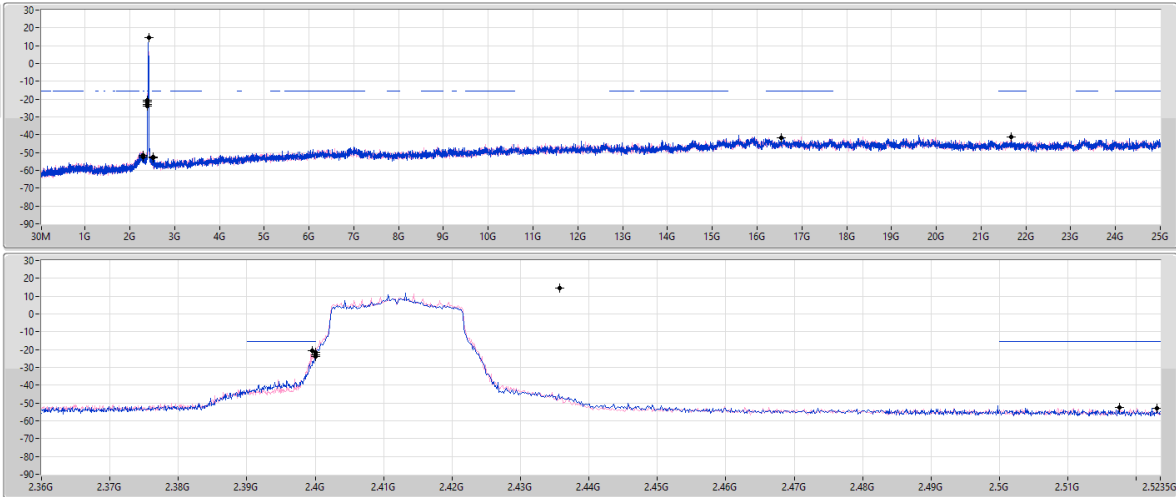RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	14.69	-15.31	2.30408G	-52.27	2.4G	-23.91	2.4G	-22.78	2.5175G	-52.68	16.54603G	-41.88	1
2.43574G	14.69	-15.31	2.30525G	-51.60	2.39952G	-20.77	2.4G	-21.79	2.52302G	-52.85	21.6791G	-41.21	2

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

CSEndB

2422MHz

10/06/2026

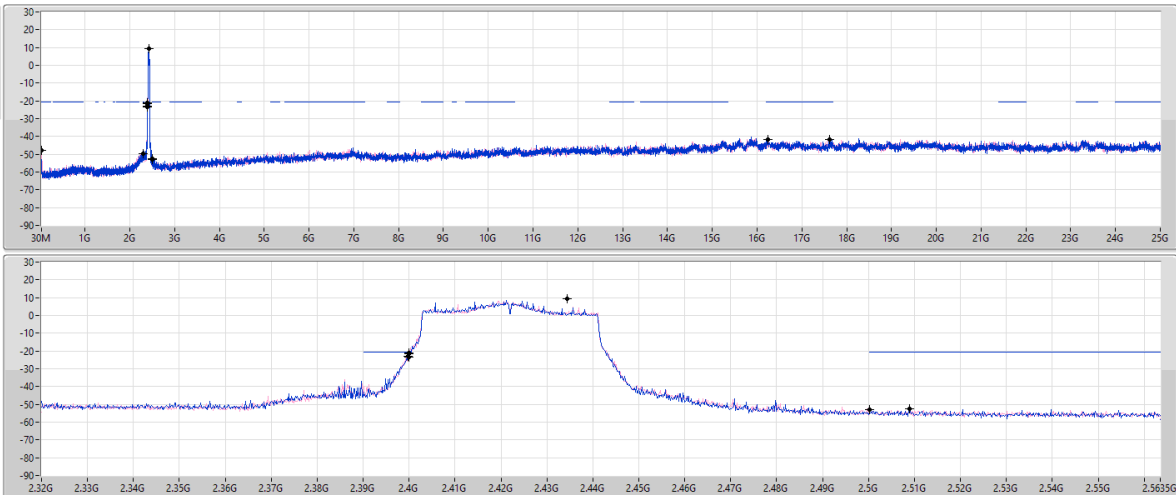RBW (Hz)
100k
VBW (Hz)
300k
Detector
PeakPort 1
Port 2

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4344G	9.28	-20.72	2.30512G	-49.72	2.4G	-23.25	2.4G	-21.77	2.50894G	-52.67	16.24416G	-41.62	1
2.4344G	9.28	-20.72	39.16M	-47.81	2.39984G	-22.78	2.4G	-21.26	2.50014G	-52.91	17.61839G	-41.64	2



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	QP	31.94M	36.38	40.00	-3.62	3	Horizontal	145	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
2437MHz_PoE	Pass	PK	53.28M	34.20	40.00	-5.80	3	Vertical	360	1.00
2437MHz_PoE	Pass	PK	119.24M	23.64	43.50	-19.86	3	Vertical	360	1.00
2437MHz_PoE	Pass	PK	472.32M	33.58	46.00	-12.42	3	Vertical	360	1.00
2437MHz_PoE	Pass	PK	497.54M	31.97	46.00	-14.03	3	Vertical	360	1.00
2437MHz_PoE	Pass	PK	538.28M	30.42	46.00	-15.58	3	Vertical	360	1.00
2437MHz_PoE	Pass	QP	30M	30.66	40.00	-9.34	3	Vertical	34	1.00
2437MHz_PoE	Pass	PK	92.08M	23.73	43.50	-19.77	3	Horizontal	360	1.00
2437MHz_PoE	Pass	PK	156.1M	23.16	43.50	-20.34	3	Horizontal	360	1.00
2437MHz_PoE	Pass	PK	478.14M	34.66	46.00	-11.34	3	Horizontal	360	1.00
2437MHz_PoE	Pass	PK	538.28M	28.74	46.00	-17.26	3	Horizontal	360	1.00
2437MHz_PoE	Pass	PK	903M	30.27	46.00	-15.73	3	Horizontal	360	1.00
2437MHz_PoE	Pass	QP	31.94M	36.38	40.00	-3.62	3	Horizontal	145	1.00


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_PoE

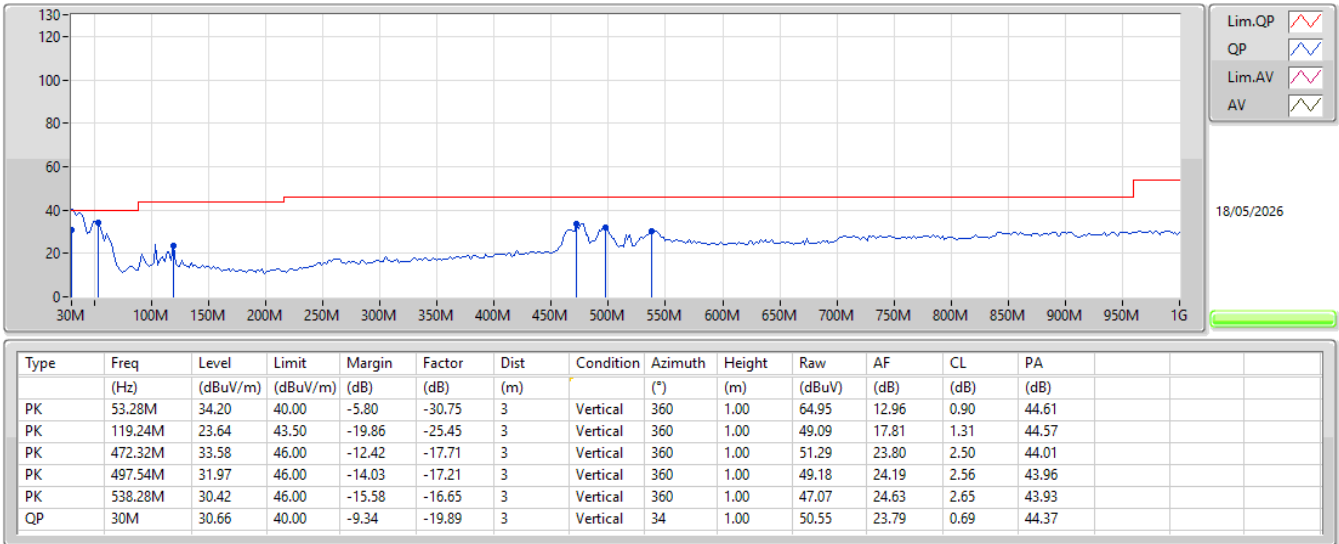

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2437MHz_PoE

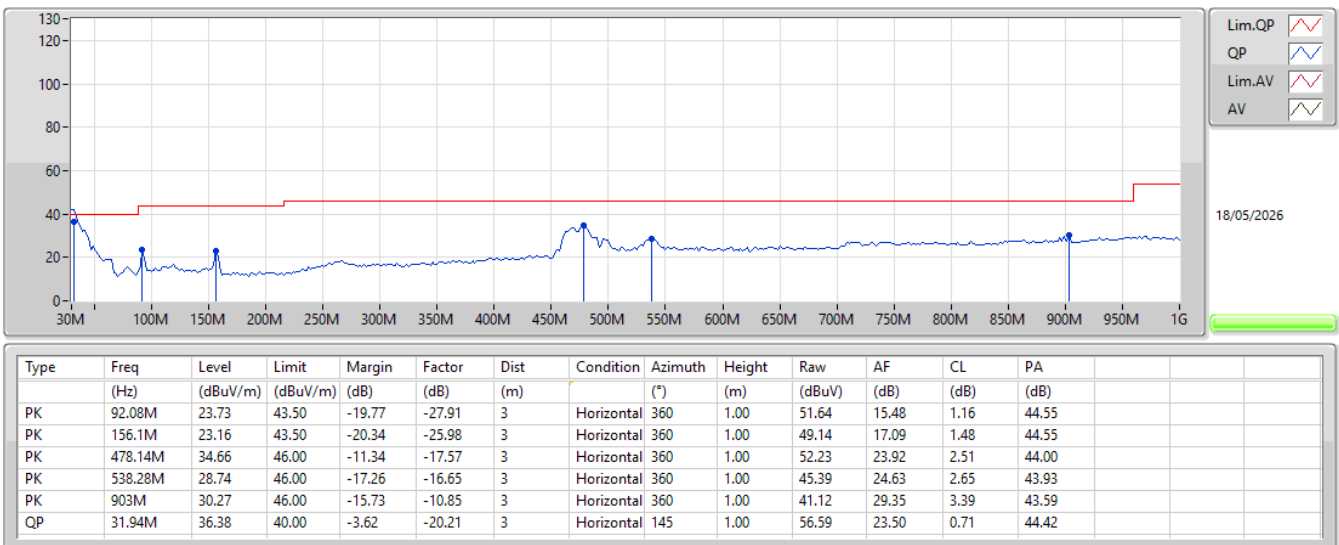

**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	Pass	AV	2.4868G	53.57	54.00	-0.43	3	Horizontal	313	2.92
802.11g_Nss1,(6Mbps)_2TX	Pass	AV	2.39G	53.27	54.00	-0.73	3	Horizontal	304	1.08
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	AV	2.3898G	53.78	54.00	-0.22	3	Horizontal	56	1.87
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	AV	2.3804G	53.59	54.00	-0.41	3	Horizontal	296	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	48.42	54.00	-5.58	3	Vertical	296	1.42
2412MHz	Pass	AV	2.4112G	111.07	Inf	-Inf	3	Vertical	296	1.42
2412MHz	Pass	PK	2.3886G	59.43	74.00	-14.57	3	Vertical	296	1.42
2412MHz	Pass	PK	2.411G	114.31	Inf	-Inf	3	Vertical	296	1.42
2412MHz	Pass	AV	2.39G	51.86	54.00	-2.14	3	Horizontal	309	2.83
2412MHz	Pass	AV	2.4102G	116.19	Inf	-Inf	3	Horizontal	309	2.83
2412MHz	Pass	PK	2.3898G	62.00	74.00	-12.00	3	Horizontal	309	2.83
2412MHz	Pass	PK	2.41G	119.18	Inf	-Inf	3	Horizontal	309	2.83
2412MHz	Pass	AV	4.82396G	35.66	54.00	-18.34	3	Vertical	14	1.50
2412MHz	Pass	PK	4.82392G	44.71	74.00	-29.29	3	Vertical	14	1.50
2412MHz	Pass	AV	4.82392G	34.75	54.00	-19.25	3	Horizontal	32	1.50
2412MHz	Pass	PK	4.82404G	44.67	74.00	-29.33	3	Horizontal	32	1.50
2437MHz	Pass	AV	2.3898G	46.08	54.00	-7.92	3	Vertical	47	1.44
2437MHz	Pass	AV	2.4386G	113.35	Inf	-Inf	3	Vertical	47	1.44
2437MHz	Pass	AV	2.4934G	46.87	54.00	-7.13	3	Vertical	47	1.44
2437MHz	Pass	PK	2.347G	58.47	74.00	-15.53	3	Vertical	47	1.44
2437MHz	Pass	PK	2.4386G	115.60	Inf	-Inf	3	Vertical	47	1.44
2437MHz	Pass	PK	2.4894G	59.36	74.00	-14.64	3	Vertical	47	1.44
2437MHz	Pass	AV	2.3418G	47.41	54.00	-6.59	3	Horizontal	323	2.46
2437MHz	Pass	AV	2.4378G	118.28	Inf	-Inf	3	Horizontal	323	2.46
2437MHz	Pass	AV	2.4858G	47.28	54.00	-6.72	3	Horizontal	323	2.46
2437MHz	Pass	PK	2.369G	59.21	74.00	-14.79	3	Horizontal	323	2.46
2437MHz	Pass	PK	2.4378G	120.69	Inf	-Inf	3	Horizontal	323	2.46
2437MHz	Pass	PK	2.4906G	58.80	74.00	-15.20	3	Horizontal	323	2.46
2437MHz	Pass	AV	4.87392G	34.10	54.00	-19.90	3	Vertical	39	1.50
2437MHz	Pass	AV	7.312G	37.09	54.00	-16.91	3	Vertical	156	1.50
2437MHz	Pass	PK	4.87448G	44.04	74.00	-29.96	3	Vertical	39	1.50
2437MHz	Pass	PK	7.31016G	49.79	74.00	-24.21	3	Vertical	156	1.50
2437MHz	Pass	AV	4.87396G	34.57	54.00	-19.43	3	Horizontal	25	1.83
2437MHz	Pass	AV	7.3126G	39.41	54.00	-14.59	3	Horizontal	25	1.02
2437MHz	Pass	PK	4.87336G	45.10	74.00	-28.90	3	Horizontal	25	1.83
2437MHz	Pass	PK	7.31232G	50.20	74.00	-23.80	3	Horizontal	25	1.02
2457MHz	Pass	AV	2.4562G	116.33	Inf	-Inf	3	Vertical	75	1.01
2457MHz	Pass	AV	2.4854G	50.29	54.00	-3.71	3	Vertical	75	1.01
2457MHz	Pass	PK	2.4562G	118.62	Inf	-Inf	3	Vertical	75	1.01
2457MHz	Pass	PK	2.4836G	61.26	74.00	-12.74	3	Vertical	75	1.01
2457MHz	Pass	AV	2.4552G	116.70	Inf	-Inf	3	Horizontal	295	1.00
2457MHz	Pass	AV	2.4868G	53.19	54.00	-0.81	3	Horizontal	295	1.00
2457MHz	Pass	PK	2.4542G	118.97	Inf	-Inf	3	Horizontal	295	1.00
2457MHz	Pass	PK	2.4934G	62.74	74.00	-11.26	3	Horizontal	295	1.00
2462MHz	Pass	AV	2.4638G	113.62	Inf	-Inf	3	Vertical	59	1.40
2462MHz	Pass	AV	2.4852G	50.89	54.00	-3.11	3	Vertical	59	1.40
2462MHz	Pass	PK	2.4636G	115.84	Inf	-Inf	3	Vertical	59	1.40
2462MHz	Pass	PK	2.4862G	61.45	74.00	-12.55	3	Vertical	59	1.40
2462MHz	Pass	AV	2.4608G	118.21	Inf	-Inf	3	Horizontal	313	2.92
2462MHz	Pass	AV	2.4868G	53.57	54.00	-0.43	3	Horizontal	313	2.92
2462MHz	Pass	PK	2.4606G	120.80	Inf	-Inf	3	Horizontal	313	2.92
2462MHz	Pass	PK	2.494G	61.82	74.00	-12.18	3	Horizontal	313	2.92
2462MHz	Pass	AV	4.92096G	35.34	54.00	-18.66	3	Vertical	19	1.50
2462MHz	Pass	AV	7.38516G	37.09	54.00	-16.91	3	Vertical	6	1.17
2462MHz	Pass	PK	4.92096G	45.18	74.00	-28.82	3	Vertical	19	1.50
2462MHz	Pass	PK	7.3864G	49.59	74.00	-24.41	3	Vertical	6	1.17
2462MHz	Pass	AV	4.92392G	33.88	54.00	-20.12	3	Horizontal	18	1.59
2462MHz	Pass	AV	7.38672G	40.27	54.00	-13.73	3	Horizontal	291	1.95
2462MHz	Pass	PK	4.92728G	44.79	74.00	-29.21	3	Horizontal	18	1.59
2462MHz	Pass	PK	7.38572G	50.75	74.00	-23.25	3	Horizontal	291	1.95
2462MHz	Pass	AV	20.78745G	36.30	54.00	-17.70	3	Vertical	101	1.75
2462MHz	Pass	PK	20.79331G	48.48	74.00	-25.52	3	Vertical	101	1.75
2462MHz	Pass	AV	20.15008G	35.04	54.00	-18.96	3	Horizontal	120	2.03
2462MHz	Pass	PK	20.15263G	48.25	74.00	-25.75	3	Horizontal	120	2.03

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11g_Nss1_(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	48.46	54.00	-5.54	3	Vertical	45	1.50
2412MHz	Pass	AV	2.4108G	107.19	Inf	-Inf	3	Vertical	45	1.50
2412MHz	Pass	PK	2.39G	58.94	74.00	-15.06	3	Vertical	45	1.50
2412MHz	Pass	PK	2.4106G	115.32	Inf	-Inf	3	Vertical	45	1.50
2412MHz	Pass	AV	2.39G	53.27	54.00	-0.73	3	Horizontal	304	1.08
2412MHz	Pass	AV	2.411G	110.74	Inf	-Inf	3	Horizontal	304	1.08
2412MHz	Pass	PK	2.3898G	69.48	74.00	-4.52	3	Horizontal	304	1.08
2412MHz	Pass	PK	2.411G	118.80	Inf	-Inf	3	Horizontal	304	1.08
2412MHz	Pass	AV	4.82148G	28.95	54.00	-25.05	3	Vertical	6	1.05
2412MHz	Pass	PK	4.82112G	41.76	74.00	-32.24	3	Vertical	6	1.05
2412MHz	Pass	AV	4.82024G	29.11	54.00	-24.89	3	Horizontal	0	1.50
2412MHz	Pass	PK	4.81676G	41.72	74.00	-32.28	3	Horizontal	0	1.50
2412MHz	Pass	AV	22.34976G	35.32	54.00	-18.68	3	Vertical	217	2.21
2412MHz	Pass	PK	22.35306G	49.74	74.00	-24.26	3	Vertical	217	2.21
2412MHz	Pass	AV	22.70547G	36.72	54.00	-17.28	3	Horizontal	323	1.73
2412MHz	Pass	PK	22.70794G	49.93	74.00	-24.07	3	Horizontal	323	1.73
2417MHz	Pass	AV	2.3884G	48.20	54.00	-5.80	3	Vertical	48	1.50
2417MHz	Pass	AV	2.4178G	107.86	Inf	-Inf	3	Vertical	48	1.50
2417MHz	Pass	PK	2.388G	61.71	74.00	-12.29	3	Vertical	48	1.50
2417MHz	Pass	PK	2.4176G	115.89	Inf	-Inf	3	Vertical	48	1.50
2417MHz	Pass	AV	2.3892G	53.11	54.00	-0.89	3	Horizontal	308	1.02
2417MHz	Pass	AV	2.4184G	110.22	Inf	-Inf	3	Horizontal	308	1.02
2417MHz	Pass	PK	2.3892G	66.63	74.00	-7.37	3	Horizontal	308	1.02
2417MHz	Pass	PK	2.4188G	118.35	Inf	-Inf	3	Horizontal	308	1.02
2437MHz	Pass	AV	2.3886G	50.41	54.00	-3.59	3	Vertical	57	1.44
2437MHz	Pass	AV	2.4378G	112.85	Inf	-Inf	3	Vertical	57	1.44
2437MHz	Pass	AV	2.4835G	52.89	54.00	-1.11	3	Vertical	57	1.44
2437MHz	Pass	PK	2.389G	67.54	74.00	-6.46	3	Vertical	57	1.44
2437MHz	Pass	PK	2.4378G	120.70	Inf	-Inf	3	Vertical	57	1.44
2437MHz	Pass	PK	2.4838G	69.40	74.00	-4.60	3	Vertical	57	1.44
2437MHz	Pass	AV	2.3894G	53.25	54.00	-0.75	3	Horizontal	323	2.45
2437MHz	Pass	AV	2.4386G	114.58	Inf	-Inf	3	Horizontal	323	2.45
2437MHz	Pass	AV	2.4835G	53.24	54.00	-0.76	3	Horizontal	323	2.45
2437MHz	Pass	PK	2.389G	72.11	74.00	-1.89	3	Horizontal	323	2.45
2437MHz	Pass	PK	2.4382G	122.62	Inf	-Inf	3	Horizontal	323	2.45
2437MHz	Pass	PK	2.4842G	71.79	74.00	-2.21	3	Horizontal	323	2.45
2437MHz	Pass	AV	4.87144G	30.56	54.00	-23.44	3	Vertical	355	1.97
2437MHz	Pass	AV	7.321G	34.69	54.00	-19.31	3	Vertical	216	1.50
2437MHz	Pass	PK	4.87232G	42.80	74.00	-31.20	3	Vertical	355	1.97
2437MHz	Pass	PK	7.30868G	47.89	74.00	-26.11	3	Vertical	216	1.50
2437MHz	Pass	AV	4.87016G	29.45	54.00	-24.55	3	Horizontal	352	1.50
2437MHz	Pass	AV	7.31196G	35.50	54.00	-18.50	3	Horizontal	332	1.50
2437MHz	Pass	PK	4.874G	41.42	74.00	-32.58	3	Horizontal	352	1.50
2437MHz	Pass	PK	7.31732G	47.76	74.00	-26.24	3	Horizontal	332	1.50
2457MHz	Pass	AV	2.4576G	108.37	Inf	-Inf	3	Vertical	61	1.36
2457MHz	Pass	AV	2.4835G	48.15	54.00	-5.85	3	Vertical	61	1.36
2457MHz	Pass	PK	2.4578G	116.51	Inf	-Inf	3	Vertical	61	1.36
2457MHz	Pass	PK	2.4874G	61.55	74.00	-12.45	3	Vertical	61	1.36
2457MHz	Pass	AV	2.4586G	109.99	Inf	-Inf	3	Horizontal	301	1.00
2457MHz	Pass	AV	2.484G	49.31	54.00	-4.69	3	Horizontal	301	1.00
2457MHz	Pass	PK	2.4582G	118.09	Inf	-Inf	3	Horizontal	301	1.00
2457MHz	Pass	PK	2.4842G	62.77	74.00	-11.23	3	Horizontal	301	1.00
2462MHz	Pass	AV	2.4606G	107.86	Inf	-Inf	3	Vertical	46	1.33
2462MHz	Pass	AV	2.484G	49.89	54.00	-4.11	3	Vertical	46	1.33
2462MHz	Pass	PK	2.4606G	116.23	Inf	-Inf	3	Vertical	46	1.33
2462MHz	Pass	PK	2.4836G	63.83	74.00	-10.17	3	Vertical	46	1.33
2462MHz	Pass	AV	2.463G	111.33	Inf	-Inf	3	Horizontal	321	2.78
2462MHz	Pass	AV	2.4835G	53.04	54.00	-0.96	3	Horizontal	321	2.78
2462MHz	Pass	PK	2.463G	119.25	Inf	-Inf	3	Horizontal	321	2.78
2462MHz	Pass	PK	2.4835G	66.80	74.00	-7.20	3	Horizontal	321	2.78
2462MHz	Pass	AV	4.91704G	29.61	54.00	-24.39	3	Vertical	40	1.60


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2462MHz	Pass	AV	7.3762G	34.58	54.00	-19.42	3	Vertical	259	1.08
2462MHz	Pass	PK	4.91616G	42.92	74.00	-31.08	3	Vertical	40	1.60
2462MHz	Pass	PK	7.39184G	47.04	74.00	-26.96	3	Vertical	259	1.08
2462MHz	Pass	AV	4.93172G	29.57	54.00	-24.43	3	Horizontal	273	1.50
2462MHz	Pass	AV	7.37624G	34.62	54.00	-19.38	3	Horizontal	63	1.50
2462MHz	Pass	PK	4.91616G	42.01	74.00	-31.99	3	Horizontal	273	1.50
2462MHz	Pass	PK	7.39348G	46.88	74.00	-27.12	3	Horizontal	63	1.50
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	AV	2.39G	49.64	54.00	-4.36	3	Vertical	45	2.36
2412MHz	Pass	AV	2.411G	105.31	Inf	-Inf	3	Vertical	45	2.36
2412MHz	Pass	PK	2.39G	62.11	74.00	-11.89	3	Vertical	45	2.36
2412MHz	Pass	PK	2.411G	115.51	Inf	-Inf	3	Vertical	45	2.36
2412MHz	Pass	AV	2.39G	53.06	54.00	-0.94	3	Horizontal	302	1.07
2412MHz	Pass	AV	2.4108G	108.06	Inf	-Inf	3	Horizontal	302	1.07
2412MHz	Pass	PK	2.3892G	68.57	74.00	-5.43	3	Horizontal	302	1.07
2412MHz	Pass	PK	2.4114G	118.99	Inf	-Inf	3	Horizontal	302	1.07
2412MHz	Pass	AV	4.82968G	28.63	54.00	-25.37	3	Vertical	83	1.50
2412MHz	Pass	PK	4.81628G	41.68	74.00	-32.32	3	Vertical	83	1.50
2412MHz	Pass	AV	4.8304G	28.70	54.00	-25.30	3	Horizontal	323	1.88
2412MHz	Pass	PK	4.81536G	42.05	74.00	-31.95	3	Horizontal	323	1.88
2417MHz	Pass	AV	2.385G	49.84	54.00	-4.16	3	Vertical	47	1.50
2417MHz	Pass	AV	2.4178G	107.41	Inf	-Inf	3	Vertical	47	1.50
2417MHz	Pass	PK	2.3872G	64.89	74.00	-9.11	3	Vertical	47	1.50
2417MHz	Pass	PK	2.418G	118.33	Inf	-Inf	3	Vertical	47	1.50
2417MHz	Pass	AV	2.3828G	53.55	54.00	-0.45	3	Horizontal	62	2.83
2417MHz	Pass	AV	2.4164G	112.17	Inf	-Inf	3	Horizontal	62	2.83
2417MHz	Pass	PK	2.38G	70.99	74.00	-3.01	3	Horizontal	62	2.83
2417MHz	Pass	PK	2.4162G	123.71	Inf	-Inf	3	Horizontal	62	2.83
2437MHz	Pass	AV	2.3898G	50.04	54.00	-3.96	3	Vertical	48	2.63
2437MHz	Pass	AV	2.4362G	110.51	Inf	-Inf	3	Vertical	48	2.63
2437MHz	Pass	AV	2.491G	48.73	54.00	-5.27	3	Vertical	48	2.63
2437MHz	Pass	PK	2.3898G	62.93	74.00	-11.07	3	Vertical	48	2.63
2437MHz	Pass	PK	2.4378G	121.30	Inf	-Inf	3	Vertical	48	2.63
2437MHz	Pass	PK	2.4906G	64.93	74.00	-9.07	3	Vertical	48	2.63
2437MHz	Pass	AV	2.3898G	53.78	54.00	-0.22	3	Horizontal	56	1.87
2437MHz	Pass	AV	2.4362G	115.06	Inf	-Inf	3	Horizontal	56	1.87
2437MHz	Pass	AV	2.4835G	51.73	54.00	-2.27	3	Horizontal	56	1.87
2437MHz	Pass	PK	2.3898G	69.64	74.00	-4.36	3	Horizontal	56	1.87
2437MHz	Pass	PK	2.4362G	125.75	Inf	-Inf	3	Horizontal	56	1.87
2437MHz	Pass	PK	2.4886G	67.08	74.00	-6.92	3	Horizontal	56	1.87
2437MHz	Pass	AV	4.87024G	29.62	54.00	-24.38	3	Vertical	344	2.55
2437MHz	Pass	AV	7.31736G	34.83	54.00	-19.17	3	Vertical	102	1.50
2437MHz	Pass	PK	4.87164G	41.80	74.00	-32.20	3	Vertical	344	2.55
2437MHz	Pass	PK	7.30464G	47.52	74.00	-26.48	3	Vertical	102	1.50
2437MHz	Pass	AV	4.8698G	29.29	54.00	-24.71	3	Horizontal	69	1.50
2437MHz	Pass	AV	7.31396G	35.29	54.00	-18.71	3	Horizontal	332	2.57
2437MHz	Pass	PK	4.87056G	41.76	74.00	-32.24	3	Horizontal	69	1.50
2437MHz	Pass	PK	7.32092G	47.69	74.00	-26.31	3	Horizontal	332	2.57
2437MHz	Pass	AV	22.53491G	37.55	54.00	-16.45	3	Vertical	117	2.48
2437MHz	Pass	PK	22.52944G	50.66	74.00	-23.34	3	Vertical	117	2.48
2437MHz	Pass	AV	22.27256G	35.03	54.00	-18.97	3	Horizontal	203	1.64
2437MHz	Pass	PK	22.27444G	49.58	74.00	-24.42	3	Horizontal	203	1.64
2457MHz	Pass	AV	2.4492G	105.55	Inf	-Inf	3	Vertical	65	1.33
2457MHz	Pass	AV	2.4842G	51.72	54.00	-2.28	3	Vertical	65	1.33
2457MHz	Pass	PK	2.4492G	117.55	Inf	-Inf	3	Vertical	65	1.33
2457MHz	Pass	PK	2.488G	66.98	74.00	-7.02	3	Vertical	65	1.33
2457MHz	Pass	AV	2.456G	111.12	Inf	-Inf	3	Horizontal	298	1.01
2457MHz	Pass	AV	2.4904G	50.71	54.00	-3.29	3	Horizontal	298	1.01
2457MHz	Pass	PK	2.456G	123.32	Inf	-Inf	3	Horizontal	298	1.01
2457MHz	Pass	PK	2.4912G	69.34	74.00	-4.66	3	Horizontal	298	1.01
2462MHz	Pass	AV	2.4604G	105.56	Inf	-Inf	3	Vertical	48	1.95
2462MHz	Pass	AV	2.4835G	50.00	54.00	-4.00	3	Vertical	48	1.95

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2462MHz	Pass	PK	2.4602G	116.43	Inf	-Inf	3	Vertical	48	1.95
2462MHz	Pass	PK	2.4852G	63.51	74.00	-10.49	3	Vertical	48	1.95
2462MHz	Pass	AV	2.461G	109.89	Inf	-Inf	3	Horizontal	308	1.00
2462MHz	Pass	AV	2.4835G	52.06	54.00	-1.94	3	Horizontal	308	1.00
2462MHz	Pass	PK	2.4612G	120.83	Inf	-Inf	3	Horizontal	308	1.00
2462MHz	Pass	PK	2.4836G	65.47	74.00	-8.53	3	Horizontal	308	1.00
2462MHz	Pass	AV	4.91668G	29.54	54.00	-24.46	3	Vertical	172	1.50
2462MHz	Pass	AV	7.37852G	34.55	54.00	-19.45	3	Vertical	20	1.50
2462MHz	Pass	PK	4.91544G	42.26	74.00	-31.74	3	Vertical	172	1.50
2462MHz	Pass	PK	7.38764G	46.85	74.00	-27.15	3	Vertical	20	1.50
2462MHz	Pass	AV	4.93088G	29.56	54.00	-24.44	3	Horizontal	121	1.43
2462MHz	Pass	AV	7.37604G	34.52	54.00	-19.48	3	Horizontal	199	3.00
2462MHz	Pass	PK	4.91896G	41.83	74.00	-32.17	3	Horizontal	121	1.43
2462MHz	Pass	PK	7.3908G	47.49	74.00	-26.51	3	Horizontal	199	3.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	AV	2.3868G	50.58	54.00	-3.42	3	Vertical	59	1.17
2422MHz	Pass	AV	2.4228G	103.93	Inf	-Inf	3	Vertical	59	1.17
2422MHz	Pass	AV	2.484G	47.69	54.00	-6.31	3	Vertical	59	1.17
2422MHz	Pass	PK	2.386G	64.64	74.00	-9.36	3	Vertical	59	1.17
2422MHz	Pass	PK	2.4244G	114.85	Inf	-Inf	3	Vertical	59	1.17
2422MHz	Pass	PK	2.4932G	59.46	74.00	-14.54	3	Vertical	59	1.17
2422MHz	Pass	AV	2.3804G	53.59	54.00	-0.41	3	Horizontal	296	1.00
2422MHz	Pass	AV	2.4208G	107.34	Inf	-Inf	3	Horizontal	296	1.00
2422MHz	Pass	AV	2.496G	47.72	54.00	-6.28	3	Horizontal	296	1.00
2422MHz	Pass	PK	2.3852G	72.91	74.00	-1.09	3	Horizontal	296	1.00
2422MHz	Pass	PK	2.4196G	119.37	Inf	-Inf	3	Horizontal	296	1.00
2422MHz	Pass	PK	2.4996G	59.41	74.00	-14.59	3	Horizontal	296	1.00
2422MHz	Pass	AV	4.85672G	29.16	54.00	-24.84	3	Vertical	194	2.44
2422MHz	Pass	AV	7.25668G	36.93	54.00	-17.07	3	Vertical	126	1.61
2422MHz	Pass	PK	4.85424G	41.43	74.00	-32.57	3	Vertical	194	2.44
2422MHz	Pass	PK	7.27332G	49.08	74.00	-24.92	3	Vertical	126	1.61
2422MHz	Pass	AV	4.864G	29.12	54.00	-24.88	3	Horizontal	252	1.43
2422MHz	Pass	AV	7.2568G	36.93	54.00	-17.07	3	Horizontal	179	2.51
2422MHz	Pass	PK	4.85296G	41.14	74.00	-32.86	3	Horizontal	252	1.43
2422MHz	Pass	PK	7.2576G	48.71	74.00	-25.29	3	Horizontal	179	2.51
2422MHz	Pass	AV	22.53373G	36.92	54.00	-17.08	3	Vertical	198	1.27
2422MHz	Pass	PK	22.52944G	50.46	74.00	-23.54	3	Vertical	198	1.27
2422MHz	Pass	AV	22.26562G	34.67	54.00	-19.33	3	Horizontal	80	1.37
2422MHz	Pass	PK	22.27444G	49.38	74.00	-24.62	3	Horizontal	80	1.37
2437MHz	Pass	AV	2.3876G	50.59	54.00	-3.41	3	Vertical	59	1.17
2437MHz	Pass	AV	2.4232G	103.98	Inf	-Inf	3	Vertical	59	1.17
2437MHz	Pass	AV	2.4844G	47.76	54.00	-6.24	3	Vertical	59	1.17
2437MHz	Pass	PK	2.3868G	65.08	74.00	-8.92	3	Vertical	59	1.17
2437MHz	Pass	PK	2.4248G	115.43	Inf	-Inf	3	Vertical	59	1.17
2437MHz	Pass	PK	2.4868G	60.12	74.00	-13.88	3	Vertical	59	1.17
2437MHz	Pass	AV	2.3898G	52.62	54.00	-1.38	3	Horizontal	306	1.01
2437MHz	Pass	AV	2.4358G	107.80	Inf	-Inf	3	Horizontal	306	1.01
2437MHz	Pass	AV	2.4902G	49.04	54.00	-4.96	3	Horizontal	306	1.01
2437MHz	Pass	PK	2.3898G	64.83	74.00	-9.17	3	Horizontal	306	1.01
2437MHz	Pass	PK	2.4354G	119.37	Inf	-Inf	3	Horizontal	306	1.01
2437MHz	Pass	PK	2.4898G	62.55	74.00	-11.45	3	Horizontal	306	1.01
2437MHz	Pass	AV	4.86984G	29.37	54.00	-24.63	3	Vertical	29	1.50
2437MHz	Pass	AV	7.293G	35.14	54.00	-18.86	3	Vertical	325	1.50
2437MHz	Pass	PK	4.88G	41.72	74.00	-32.28	3	Vertical	29	1.50
2437MHz	Pass	PK	7.3274G	47.01	74.00	-26.99	3	Vertical	325	1.50
2437MHz	Pass	AV	4.8712G	29.37	54.00	-24.63	3	Horizontal	9	1.50
2437MHz	Pass	AV	7.29276G	35.16	54.00	-18.84	3	Horizontal	267	1.50
2437MHz	Pass	PK	4.86144G	41.33	74.00	-32.67	3	Horizontal	9	1.50
2437MHz	Pass	PK	7.32404G	47.58	74.00	-26.42	3	Horizontal	267	1.50
2447MHz	Pass	AV	2.387G	47.38	54.00	-6.62	3	Vertical	67	1.31
2447MHz	Pass	AV	2.4478G	105.86	Inf	-Inf	3	Vertical	67	1.31
2447MHz	Pass	AV	2.4838G	51.56	54.00	-2.44	3	Vertical	67	1.31

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
2447MHz	Pass	PK	2.3694G	59.99	74.00	-14.01	3	Vertical	67	1.31
2447MHz	Pass	PK	2.4482G	116.90	Inf	-Inf	3	Vertical	67	1.31
2447MHz	Pass	PK	2.4835G	66.03	74.00	-7.97	3	Vertical	67	1.31
2447MHz	Pass	AV	2.3518G	49.66	54.00	-4.34	3	Horizontal	66	2.81
2447MHz	Pass	AV	2.4462G	108.61	Inf	-Inf	3	Horizontal	66	2.81
2447MHz	Pass	AV	2.4835G	53.33	54.00	-0.67	3	Horizontal	66	2.81
2447MHz	Pass	PK	2.347G	61.41	74.00	-12.59	3	Horizontal	66	2.81
2447MHz	Pass	PK	2.4478G	120.87	Inf	-Inf	3	Horizontal	66	2.81
2447MHz	Pass	PK	2.4838G	66.55	74.00	-7.45	3	Horizontal	66	2.81
2452MHz	Pass	AV	2.39G	47.03	54.00	-6.97	3	Vertical	62	1.16
2452MHz	Pass	AV	2.4532G	105.27	Inf	-Inf	3	Vertical	62	1.16
2452MHz	Pass	AV	2.4888G	51.72	54.00	-2.28	3	Vertical	62	1.16
2452MHz	Pass	PK	2.376G	58.45	74.00	-15.55	3	Vertical	62	1.16
2452MHz	Pass	PK	2.4528G	116.64	Inf	-Inf	3	Vertical	62	1.16
2452MHz	Pass	PK	2.484G	64.05	74.00	-9.95	3	Vertical	62	1.16
2452MHz	Pass	AV	2.352G	49.40	54.00	-4.60	3	Horizontal	306	1.09
2452MHz	Pass	AV	2.45G	106.11	Inf	-Inf	3	Horizontal	306	1.09
2452MHz	Pass	AV	2.484G	52.41	54.00	-1.59	3	Horizontal	306	1.09
2452MHz	Pass	PK	2.3844G	61.47	74.00	-12.53	3	Horizontal	306	1.09
2452MHz	Pass	PK	2.4488G	116.68	Inf	-Inf	3	Horizontal	306	1.09
2452MHz	Pass	PK	2.4852G	65.21	74.00	-8.79	3	Horizontal	306	1.09
2452MHz	Pass	AV	4.90224G	29.71	54.00	-24.29	3	Vertical	26	1.50
2452MHz	Pass	AV	7.3656G	34.92	54.00	-19.08	3	Vertical	300	1.50
2452MHz	Pass	PK	4.90408G	41.55	74.00	-32.45	3	Vertical	26	1.50
2452MHz	Pass	PK	7.36504G	47.25	74.00	-26.75	3	Vertical	300	1.50
2452MHz	Pass	AV	4.90368G	29.75	54.00	-24.25	3	Horizontal	13	1.50
2452MHz	Pass	AV	7.33672G	34.93	54.00	-19.07	3	Horizontal	322	1.16
2452MHz	Pass	PK	4.92216G	42.35	74.00	-31.65	3	Horizontal	13	1.50
2452MHz	Pass	PK	7.36256G	48.56	74.00	-25.44	3	Horizontal	322	1.16


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

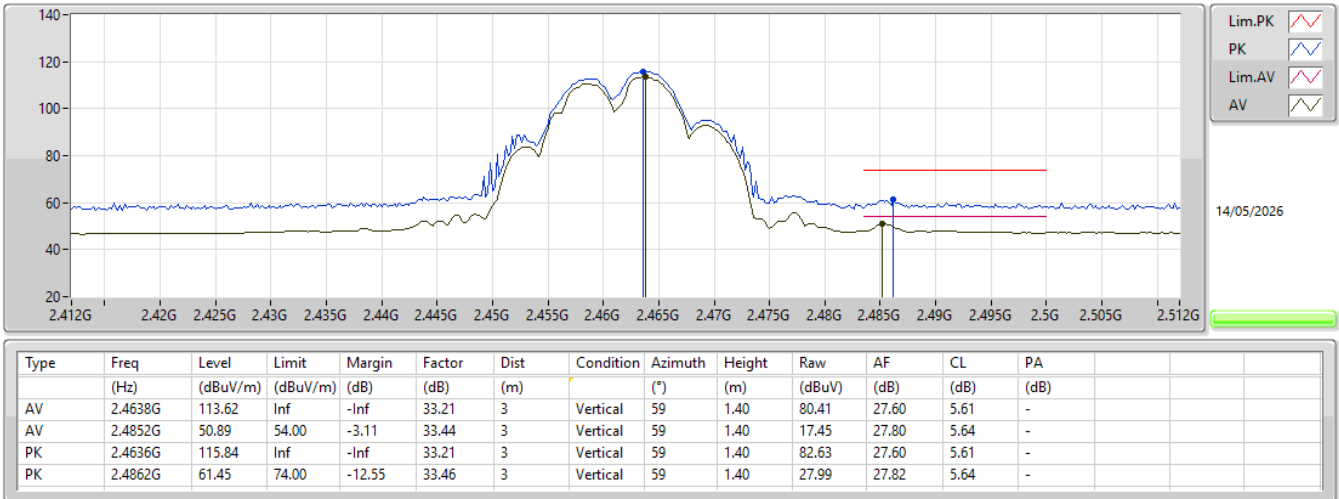


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

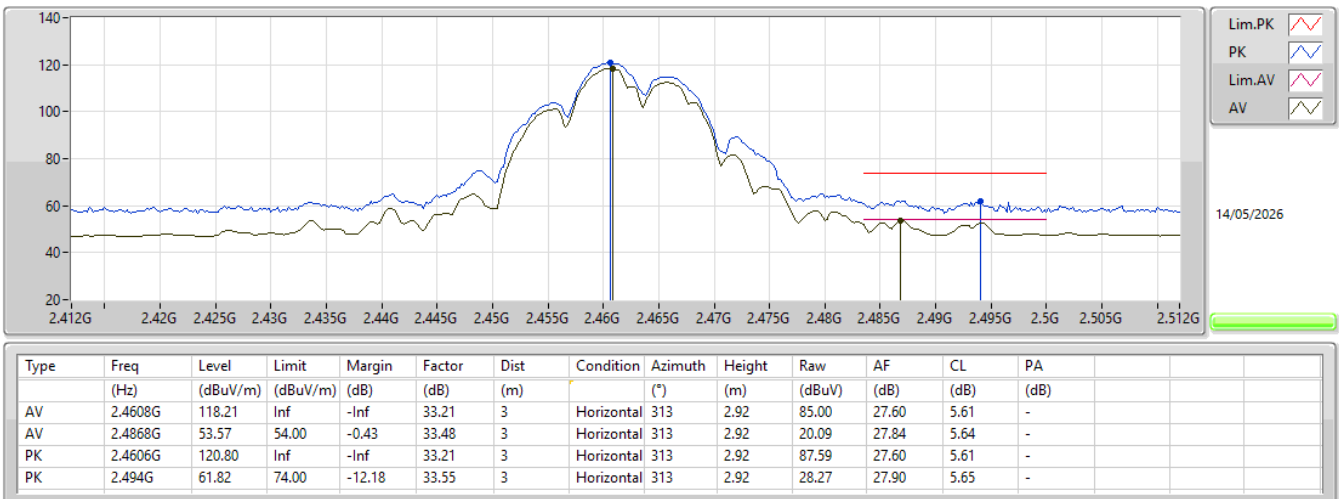


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

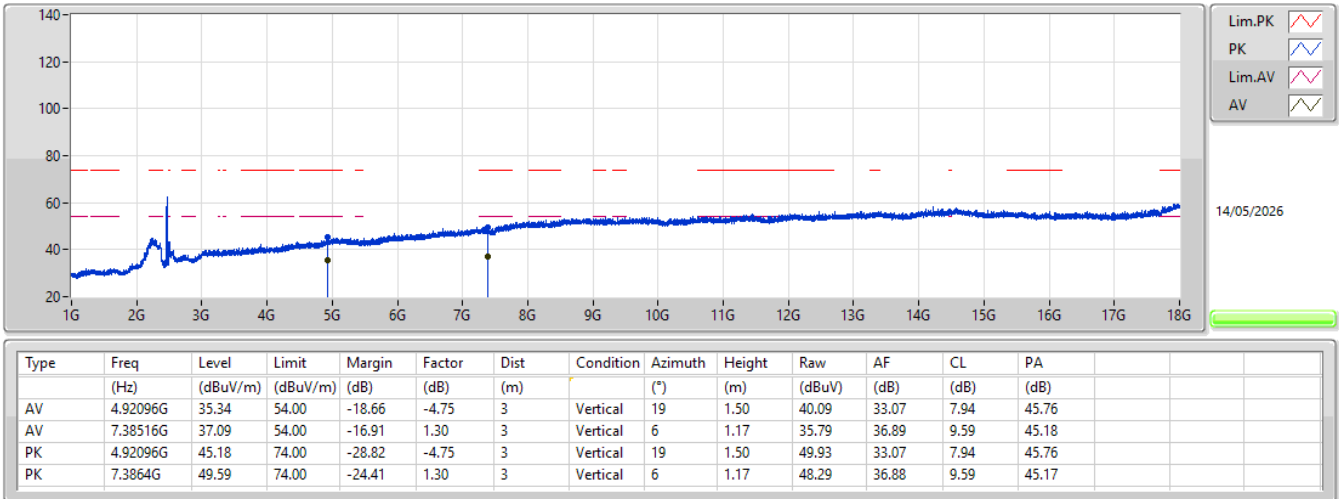


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

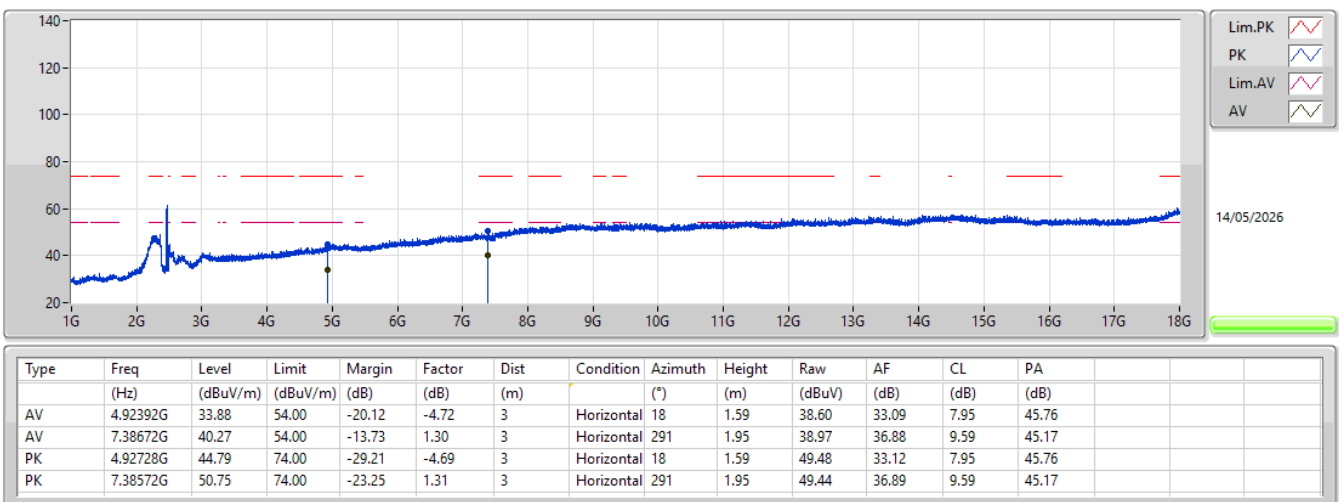


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

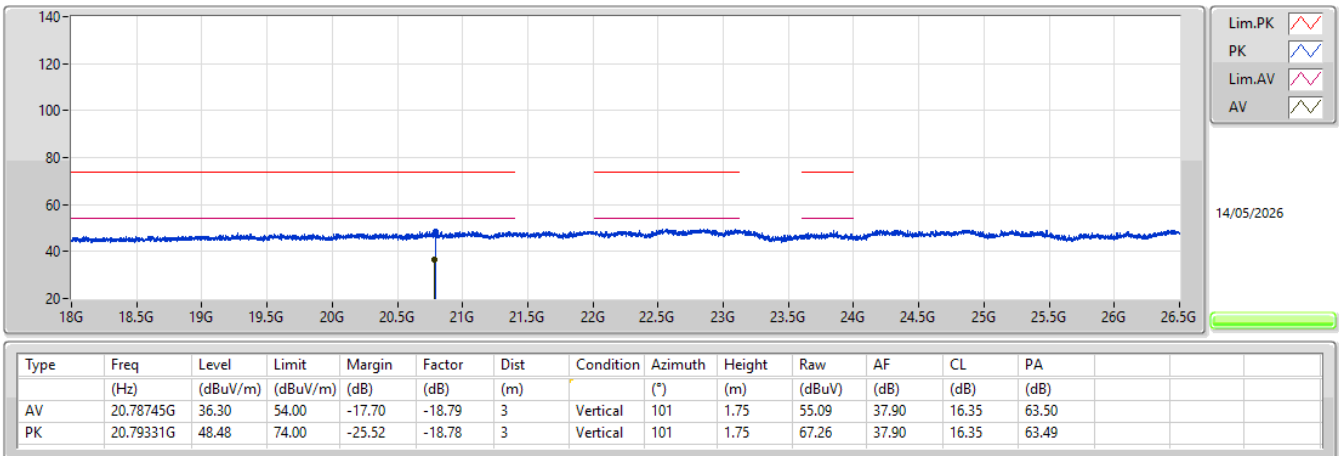


2.4-2.4835GHz_802.11b_Nss1,(1Mbps)_2TX

2462MHz_TX

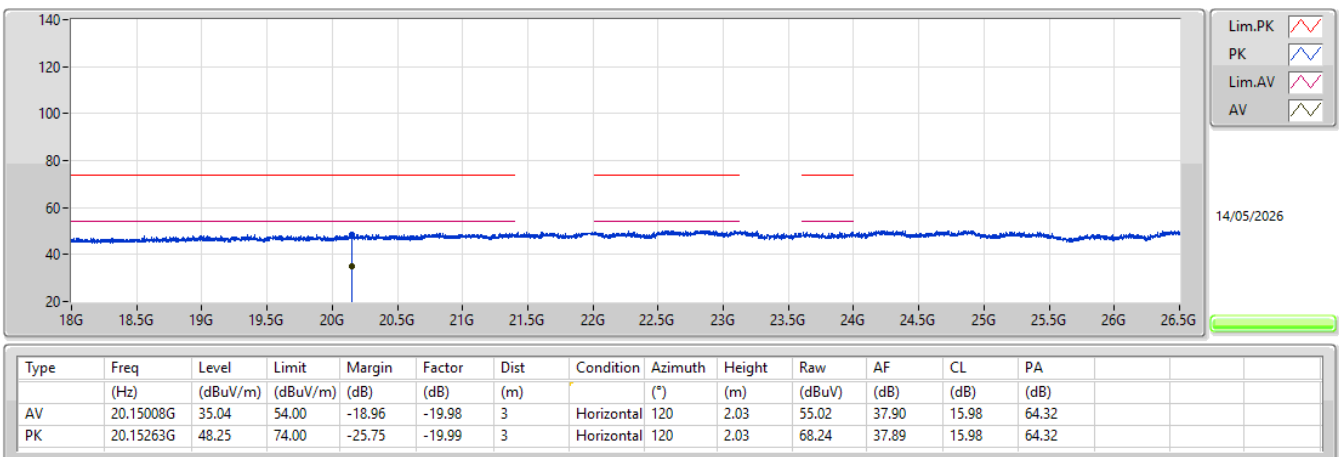


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

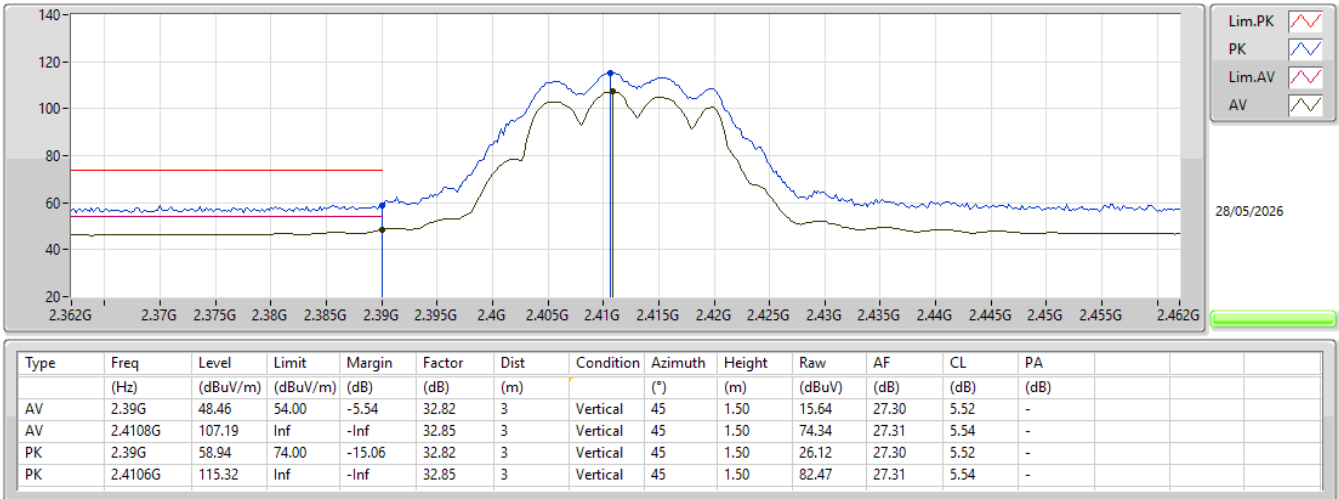


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

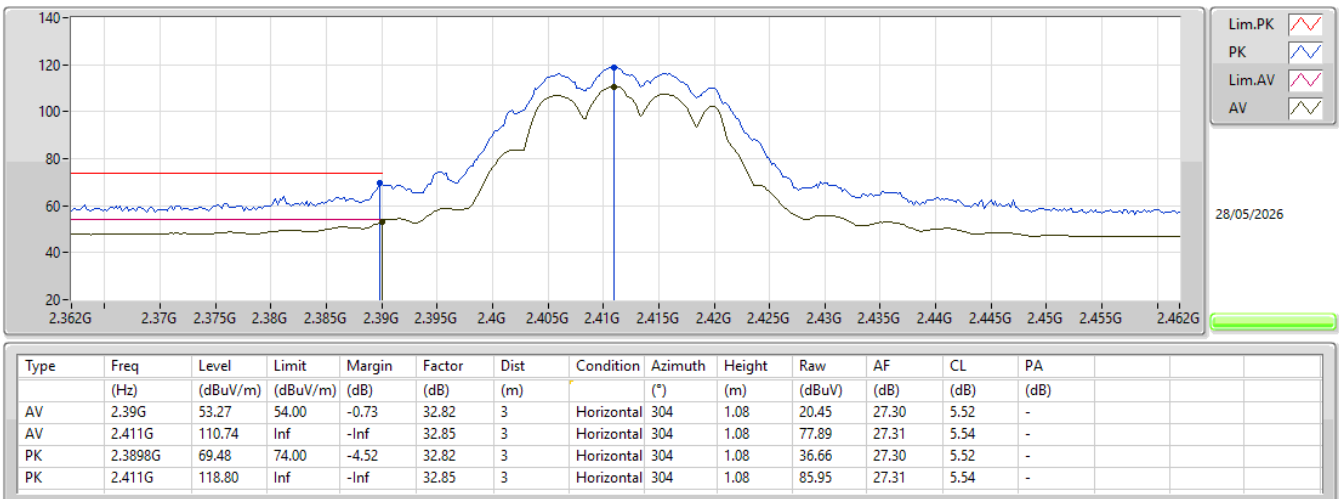


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

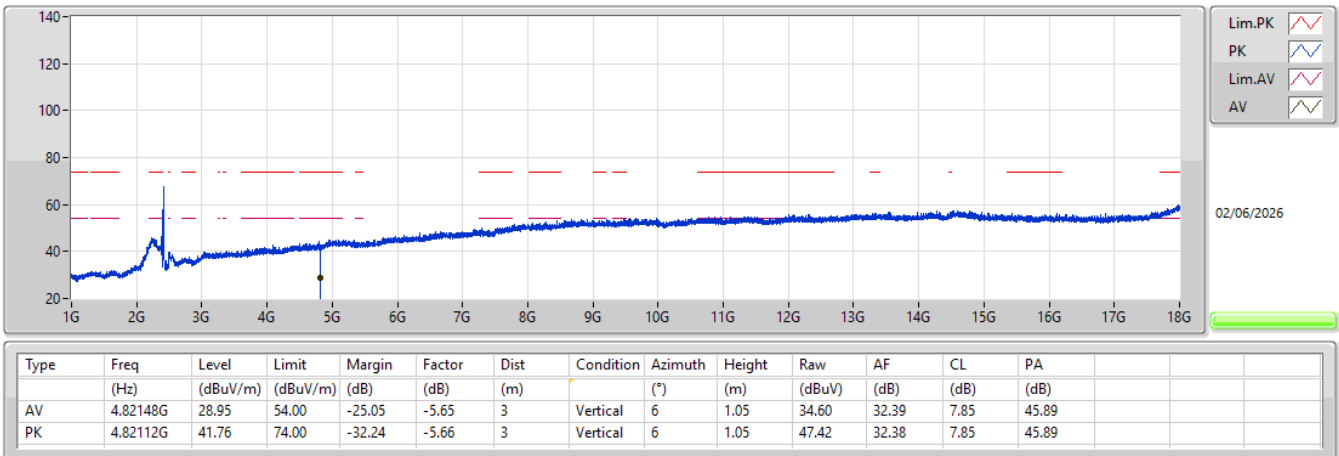


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

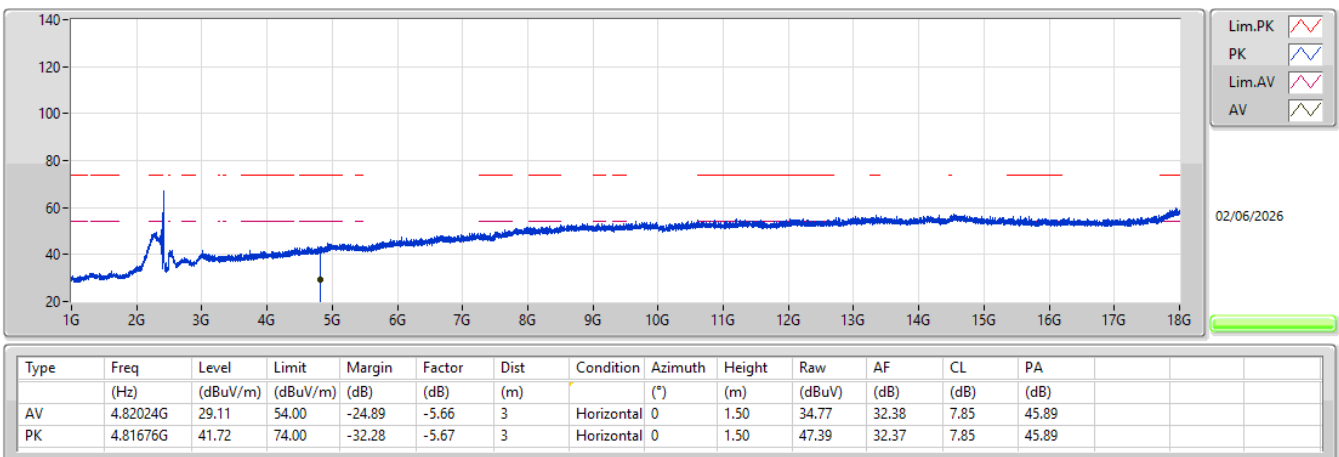


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

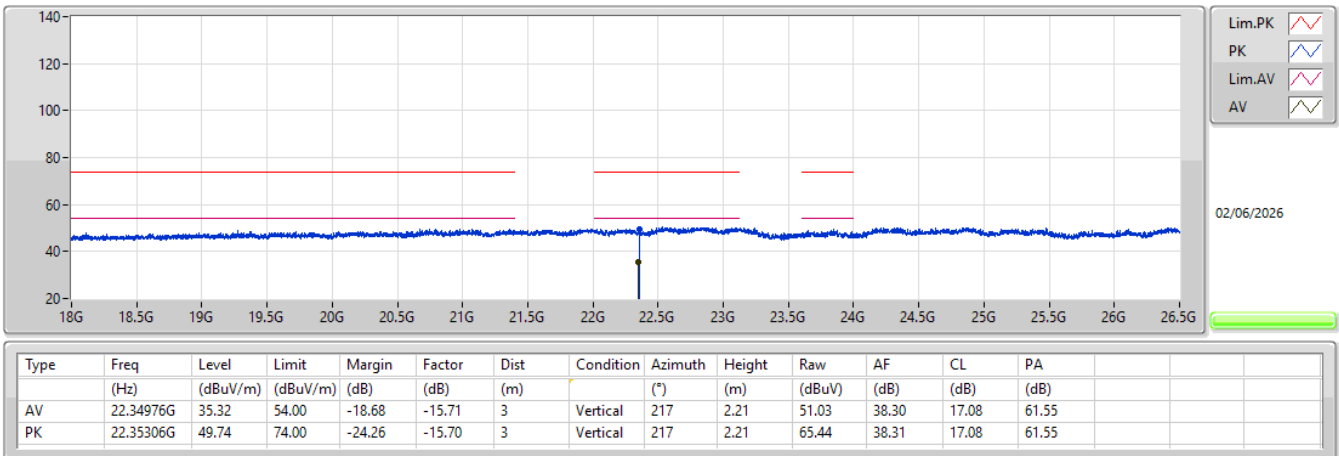


2.4-2.4835GHz_802.11g_Nss1,(6Mbps)_2TX

2412MHz_TX

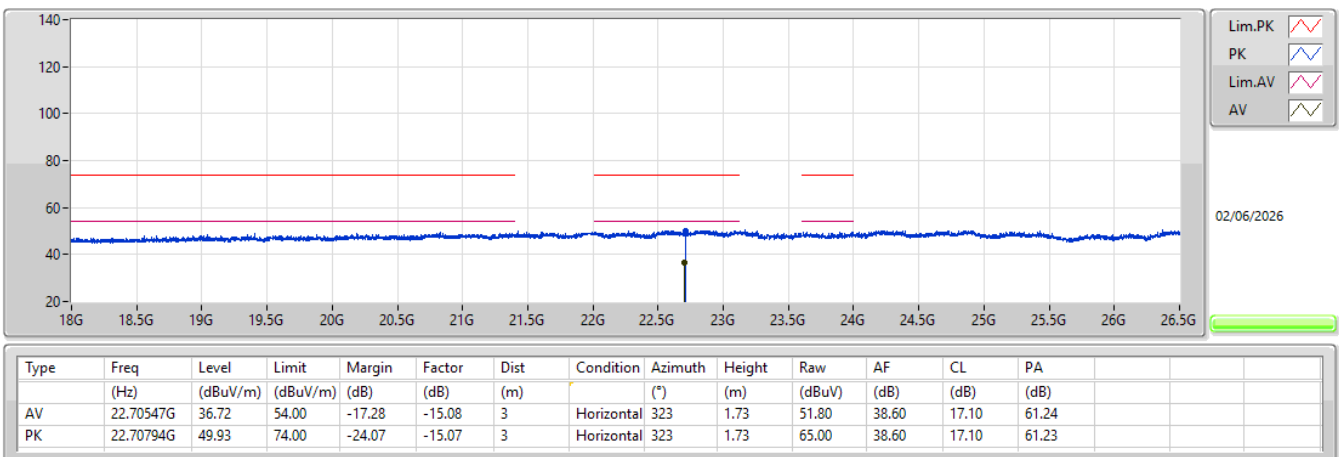

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX


2437MHz_TX

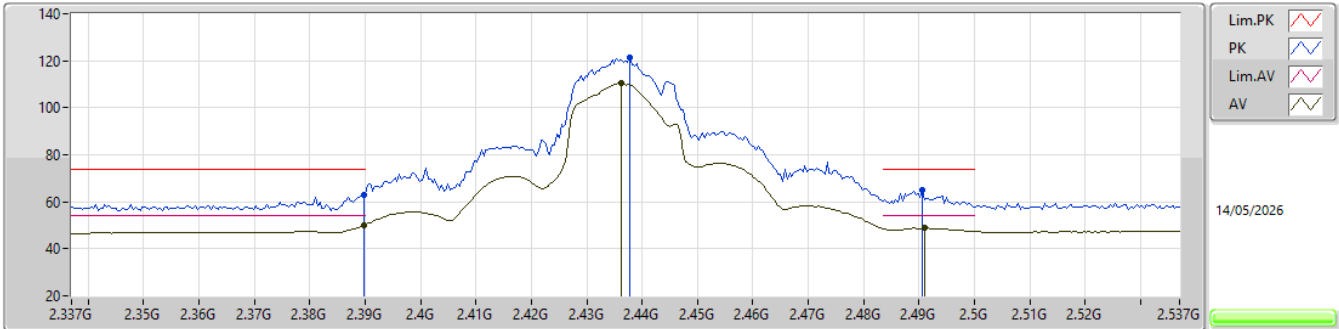

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3898G	50.04	54.00	-3.96	32.82	3	Vertical	48	2.63	17.22	27.30	5.52	-
AV	2.4362G	110.51	Inf	-Inf	33.08	3	Vertical	48	2.63	77.43	27.50	5.58	-
AV	2.491G	48.73	54.00	-5.27	33.54	3	Vertical	48	2.63	15.19	27.90	5.64	-
PK	2.3898G	62.93	74.00	-11.07	32.82	3	Vertical	48	2.63	30.11	27.30	5.52	-
PK	2.4378G	121.30	Inf	-Inf	33.08	3	Vertical	48	2.63	88.22	27.50	5.58	-
PK	2.4906G	64.93	74.00	-9.07	33.54	3	Vertical	48	2.63	31.39	27.90	5.64	-

2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX


2437MHz_TX

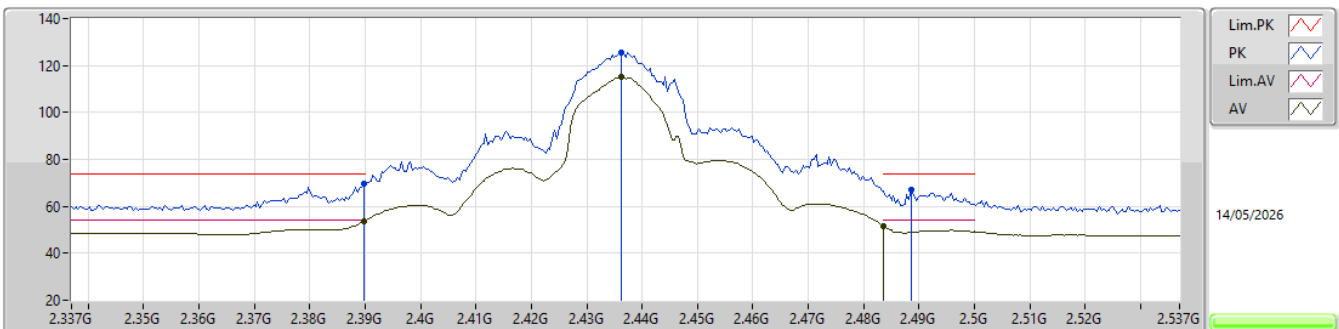

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	2.3898G	53.78	54.00	-0.22	32.82	3	Horizontal	56	1.87	20.96	27.30	5.52	-
AV	2.4362G	115.06	Inf	-Inf	33.08	3	Horizontal	56	1.87	81.98	27.50	5.58	-
AV	2.4835G	51.73	54.00	-2.27	33.40	3	Horizontal	56	1.87	18.33	27.77	5.63	-
PK	2.3898G	69.64	74.00	-4.36	32.82	3	Horizontal	56	1.87	36.82	27.30	5.52	-
PK	2.4362G	125.75	Inf	-Inf	33.08	3	Horizontal	56	1.87	92.67	27.50	5.58	-
PK	2.4886G	67.08	74.00	-6.92	33.51	3	Horizontal	56	1.87	33.57	27.87	5.64	-


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

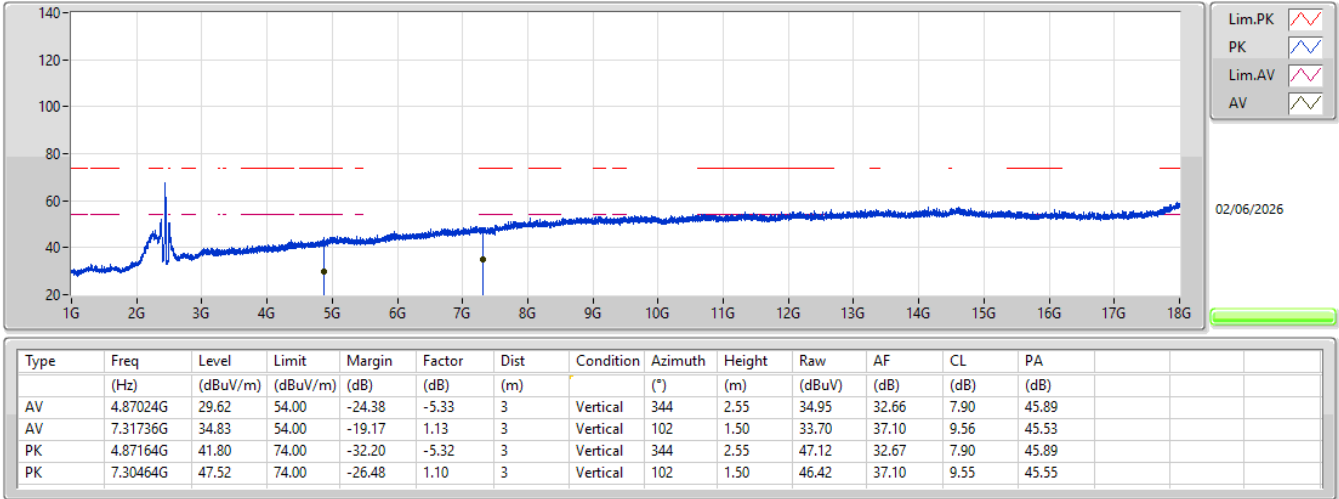


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

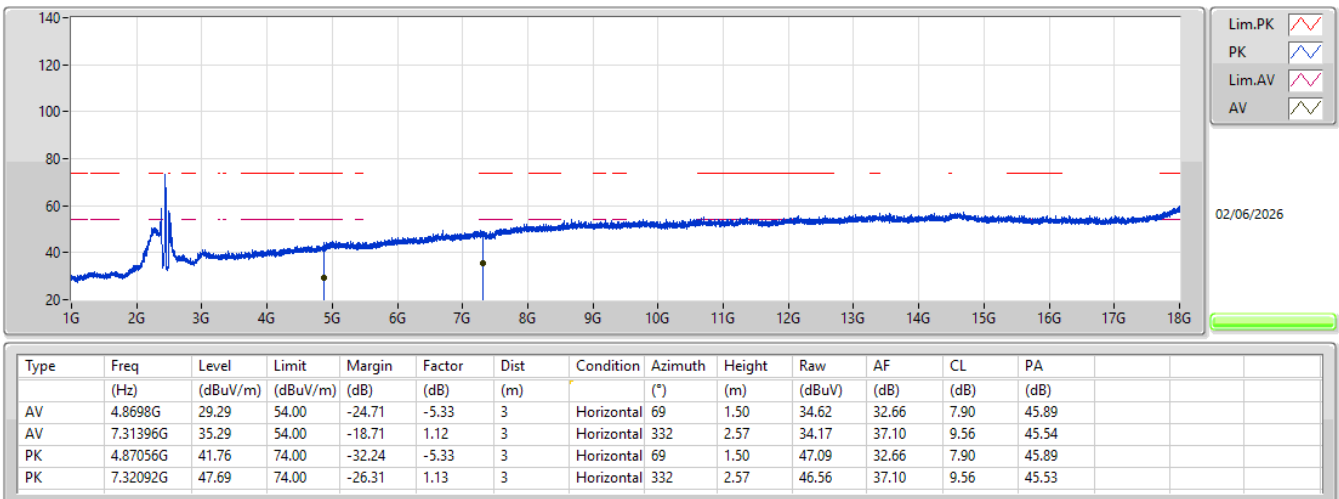


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

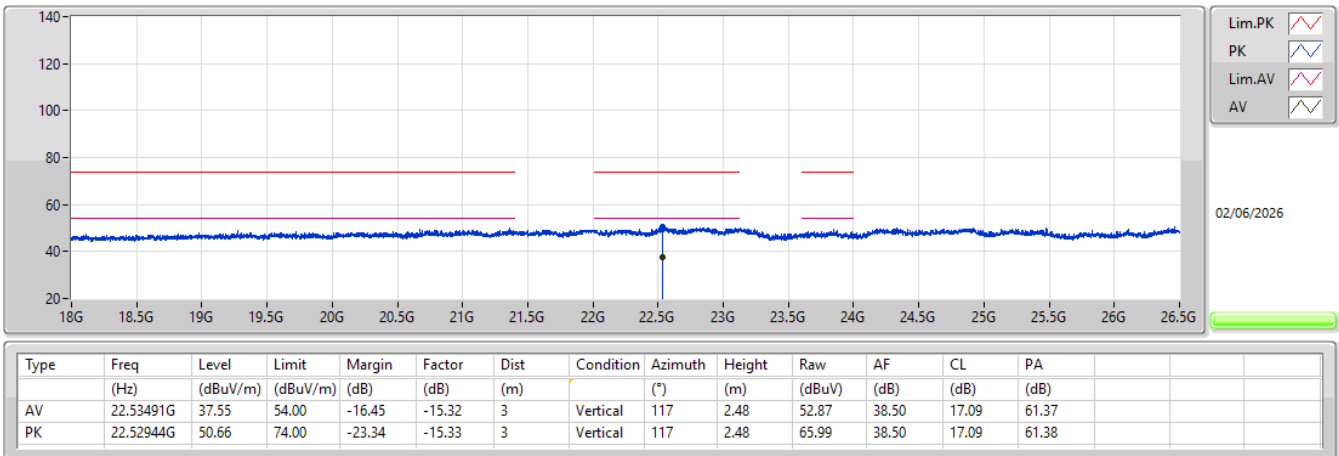


2.4-2.4835GHz_802.11be EHT20_Nss1,(MCS0)_2TX

2437MHz_TX

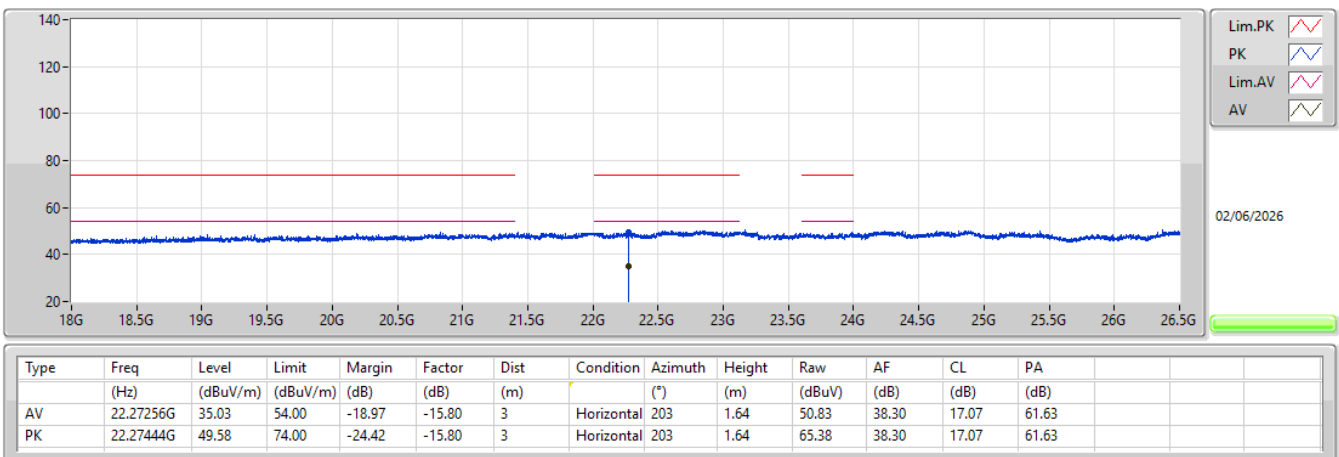


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

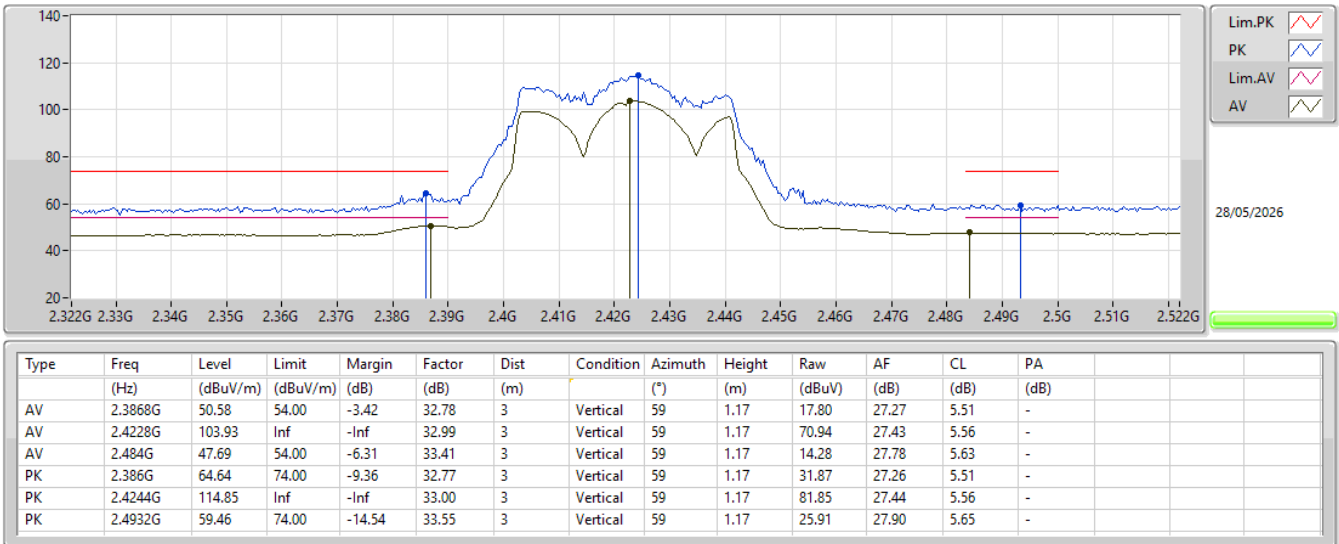


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

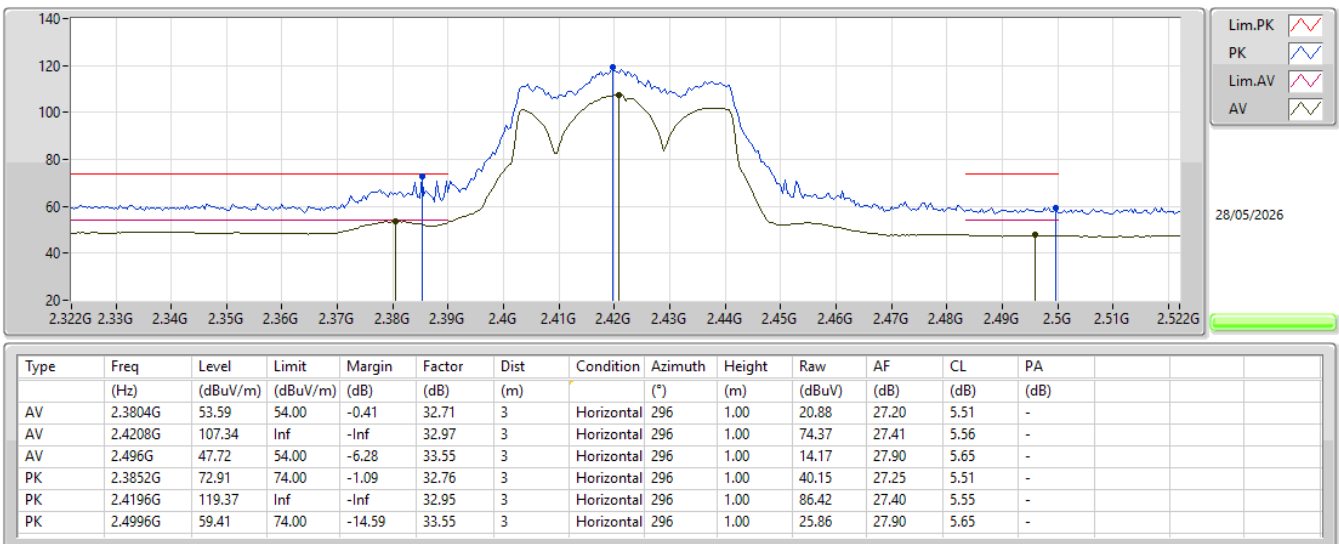


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

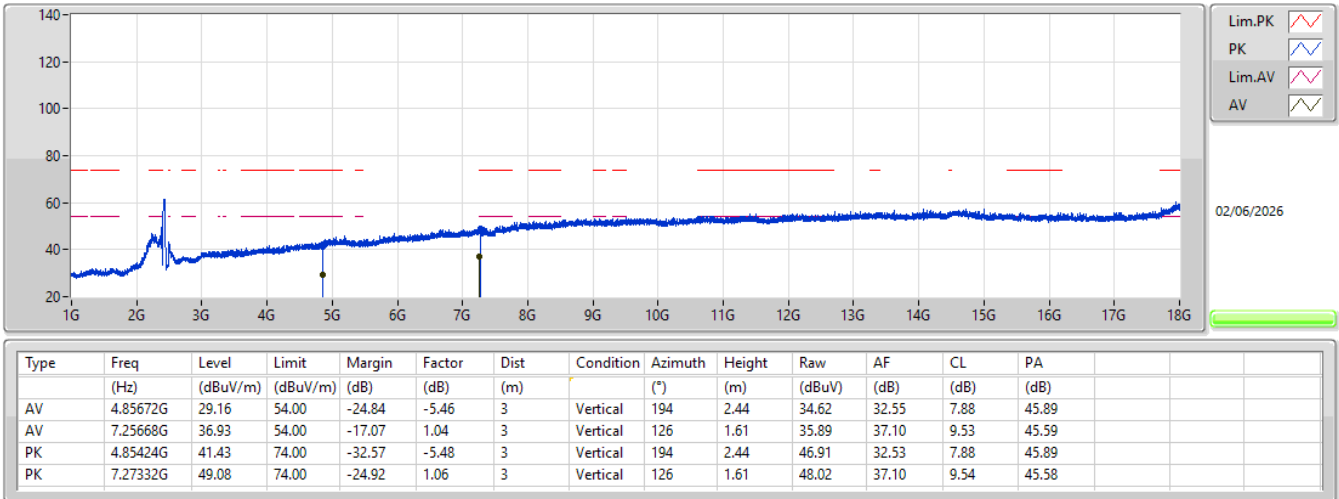


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

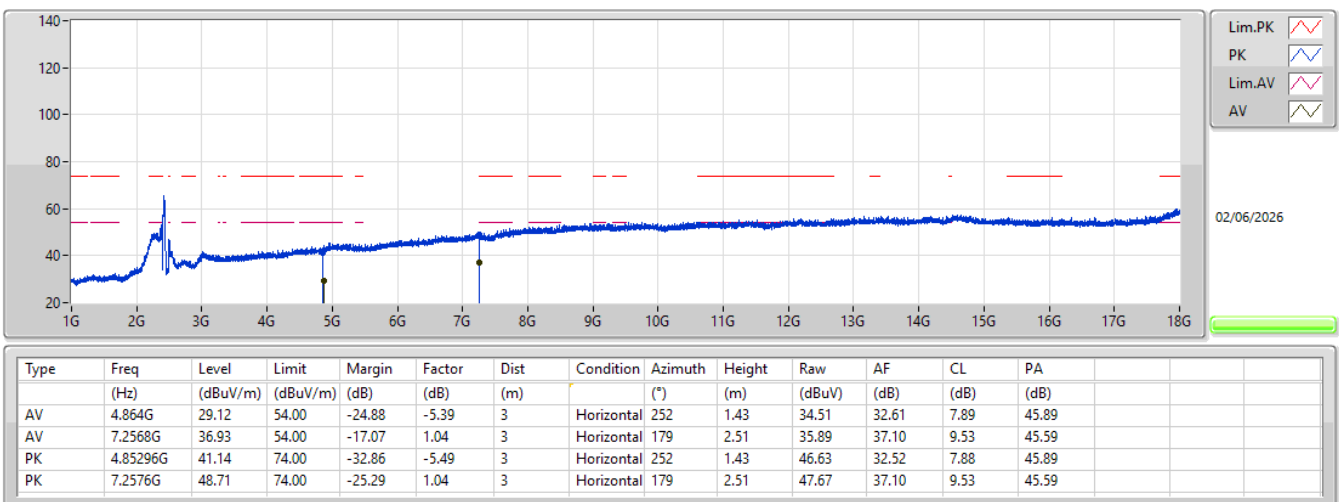


2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

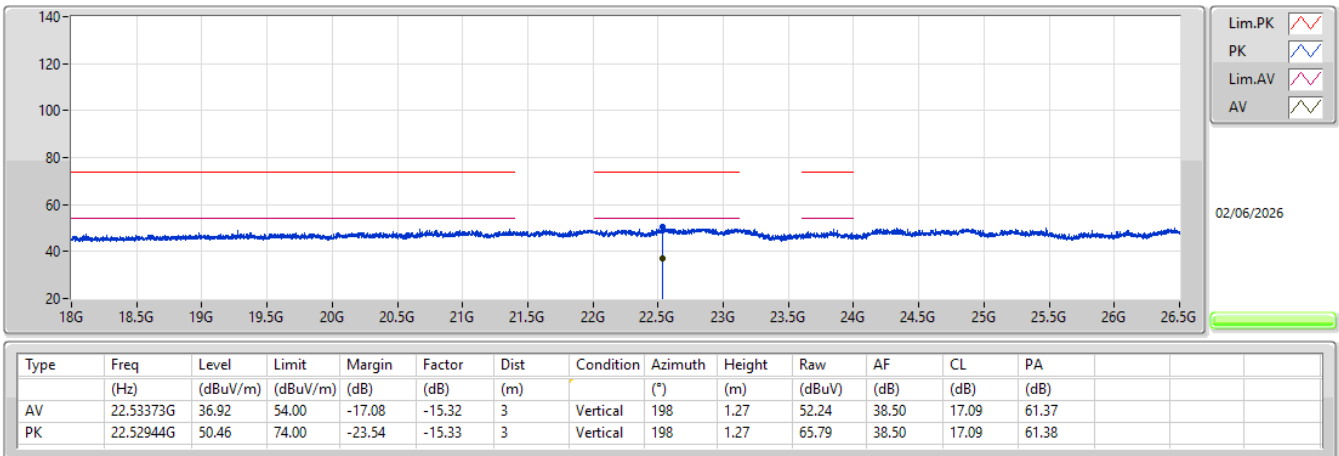

2.4-2.4835GHz_802.11be EHT40_Nss1,(MCS0)_2TX

2422MHz_TX

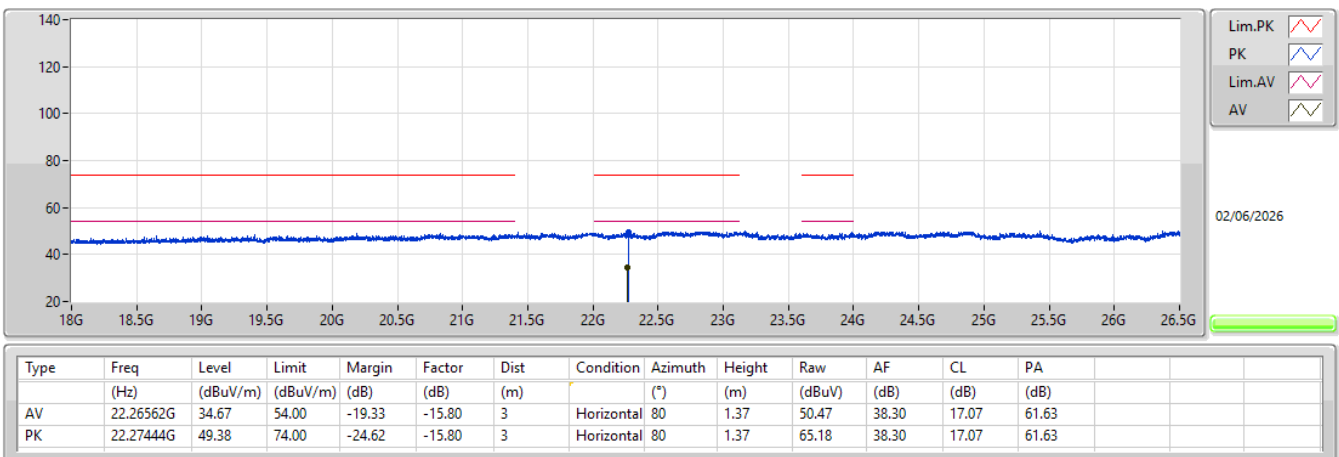




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	AV	11.48976G	45.59	54.00	-8.41	Horizontal

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
Mode 1	Pass	AV	4.92399G	34.89	54.00	-19.11	3	Vertical	330	2.50
Mode 1	Pass	AV	4.96132G	33.19	54.00	-20.81	3	Vertical	95	2.02
Mode 1	Pass	AV	7.38445G	36.79	54.00	-17.21	3	Vertical	42	1.50
Mode 1	Pass	AV	11.492G	44.38	54.00	-9.62	3	Vertical	350	2.87
Mode 1	Pass	PK	4.92194G	44.86	74.00	-29.14	3	Vertical	330	2.50
Mode 1	Pass	PK	4.96067G	45.53	74.00	-28.47	3	Vertical	95	2.02
Mode 1	Pass	PK	7.38694G	49.42	74.00	-24.58	3	Vertical	42	1.50
Mode 1	Pass	PK	11.48808G	56.61	74.00	-17.39	3	Vertical	350	2.87
Mode 1	Pass	AV	4.92395G	36.58	54.00	-17.42	3	Horizontal	1	1.00
Mode 1	Pass	AV	4.96122G	33.55	54.00	-20.45	3	Horizontal	337	1.50
Mode 1	Pass	AV	7.38685G	37.99	54.00	-16.01	3	Horizontal	66	1.03
Mode 1	Pass	AV	11.48976G	45.59	54.00	-8.41	3	Horizontal	37	1.75
Mode 1	Pass	PK	4.92398G	45.75	74.00	-28.25	3	Horizontal	1	1.00
Mode 1	Pass	PK	4.95933G	45.98	74.00	-28.02	3	Horizontal	337	1.50
Mode 1	Pass	PK	7.38741G	48.92	74.00	-25.08	3	Horizontal	66	1.03
Mode 1	Pass	PK	11.49006G	57.57	74.00	-16.43	3	Horizontal	37	1.75

Radiated Emissions above 1GHz_Mode 1

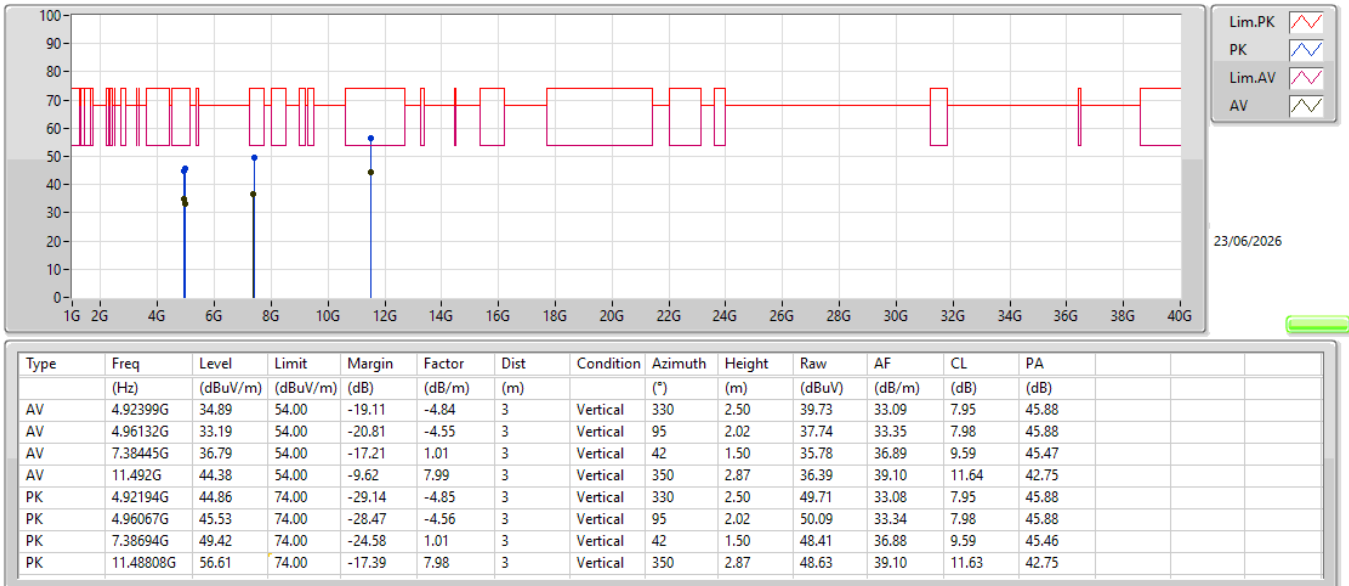

Radiated Emissions above 1GHz_Mode 1

