



REPORT No. : SZ17110101S01

TEST REPORT

APPLICANT : ETERNAL GAIN PLASTICS CO., LTD

PRODUCT NAME : Wireless Charger

MODEL NAME : 6MT0600524

BRAND NAME : N/A

FCC ID : 2AODM6MT0600524

STANDARD(S) : 47CFR 2.1093
KDB 680106

TEST DATE : 2017-12-20

ISSUE DATE : 2017-12-21

Tested by:

Peng Fuwei (Test engineer)

Approved by:

Peng Huarui (Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Fax: 86-755-36698525

Http://www.morlab.cn

E-mail: service@morlab.cn



DIRECTORY

1. Technical Information	3
1.1. Applicant and Manufacturer Information	3
1.2. Equipment Under Test (EUT) Description	3
1.3. Photographs of the EUT	3
1.4. Applied Reference Documents	3
2. FCC MPE REQUIREMENT	4
2.1. GENERAL INFORMATION	4
2.2. LIMIT	4
2.3. Measurement Uncertainty (95% confidence levels, k=2)	5
2.4. Test Information	5
2.5. Test Setup	5
3. ASSESS RESULTS	6
Annex A General Information	
Annex B Test Setup Photos	

Change History		
Issue	Date	Reason for change
1.0	2017-12-21	First edition



1. Technical Information

Note: Provide by manufacturer.

1.1. Applicant and Manufacturer Information

Applicant:	ETERNAL GAIN PLASTICS CO ., LTD
Applicant Address:	No.678, Wen Zhou Road, Zhou Wu Industrial Park, Dong Cheng, Dong Guan City, Guang Dong Province, China
Manufacturer:	ETERNAL GAIN PLASTICS CO ., LTD
Manufacturer Address:	No.678, Wen Zhou Road, Zhou Wu Industrial Park, Dong Cheng, Dong Guan City, Guang Dong Province, China

1.2. Equipment Under Test (EUT) Description

EUT Type:	Wireless Charger		
Model Name:	6MT0600524		
Frequency Bands:	110 KHz - 205 KHz		
MPE:	H-field	0.568	Limit: 2.3 (uT)

Note: For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.

1.3. Photographs of the EUT

Please refer to the External Photos for the Photos of the EUT

1.4. Applied Reference Documents

Leading reference documents for testing:

No.	Identity	Document Title
1	47 CFR§2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
2	680106 D01	RF Exposure Wireless Charging Apps v02

2. FCC MPE REQUIREMENT

2.1. GENERAL INFORMATION

For devices designed for typical desktop applications, such a wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of 10 cm. E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 10 cm measured from the center of the probe(s) to the edge of the device. Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63 A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.

2.2. LIMIT

Basic Restrictions Reference levels

Basic Restriction for electric, magnetic and electromagnetic fields(0Hz to 300GHz)

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30

f = frequency in MHz * = Plane-wave equivalent power density


2.3. Measurement Uncertainty (95% confidence levels, k=2)

Test Item	Uncertainty
Uncertainty for Radiated Spurious Emission test in RF chamber	3.6dB
Uncertainty for test site temperature and humidity	0.6 °C
	3%

2.4. Test Information

The EUT working at normal charging mode, use the E-Probe measure the H-field Strength, E-field Strength separately. The measure distance is 10cm.

2.5. Test Setup

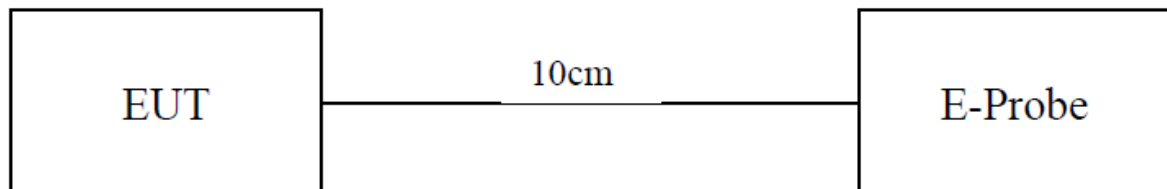



3. ASSESS RESULTS

EUT: Wireless charger	M/N: 6MT0600524
Date: 2017.12.19	
Temperature: 23.0+-0.6 °C Humidity: 54+-3.0%	

H-field strength results(Frequency: 1Hz- 400 KHz)				
Exposure Position	Distance (cm)	H-field Strength (Max. μ T)	Limit (μ T)	Result
Front Side	10	0.532	2.3	PASS
Back Side	10	0.568	2.3	PASS
Left Side	10	0.402	2.3	PASS
Right Side	10	0.451	2.3	PASS
Top Side	10	0.396	2.3	PASS
Bottom Side	10	0.395	2.3	PASS



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China


2. Test Equipment List

No.	Equipment	Manufacturer	Model	Last Cal.	Due Date
1	Filed meter	Nadar	ELT-400	2017.09.28	2018.09.27
2	ELT Probe	Nadar	N/A	2017.09.28	2018.09.27


NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

Annex B Photographs of Test Setup


1. Back Side Position

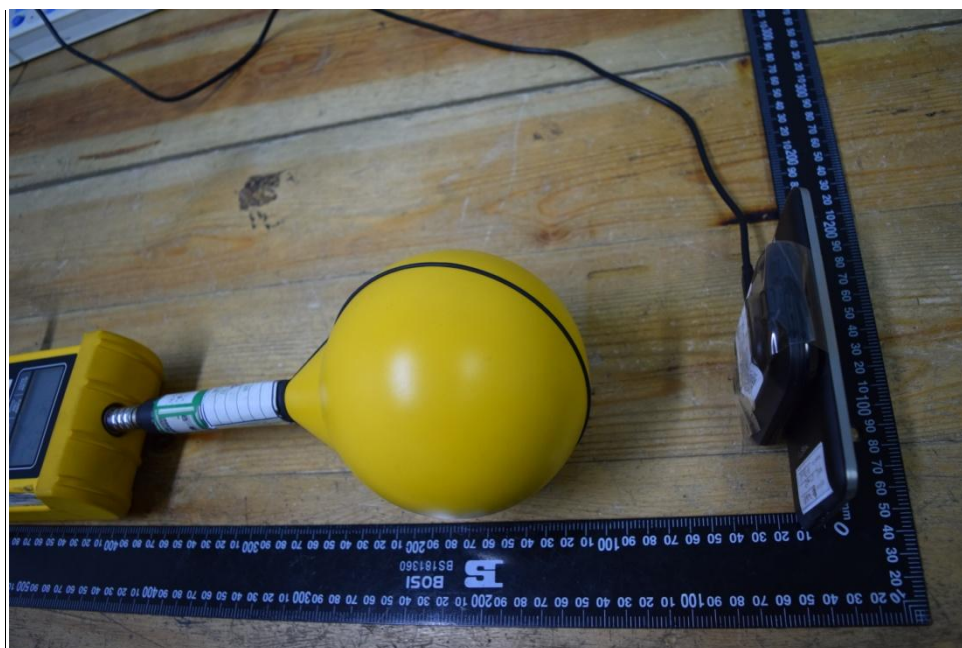


2. Face Side Position

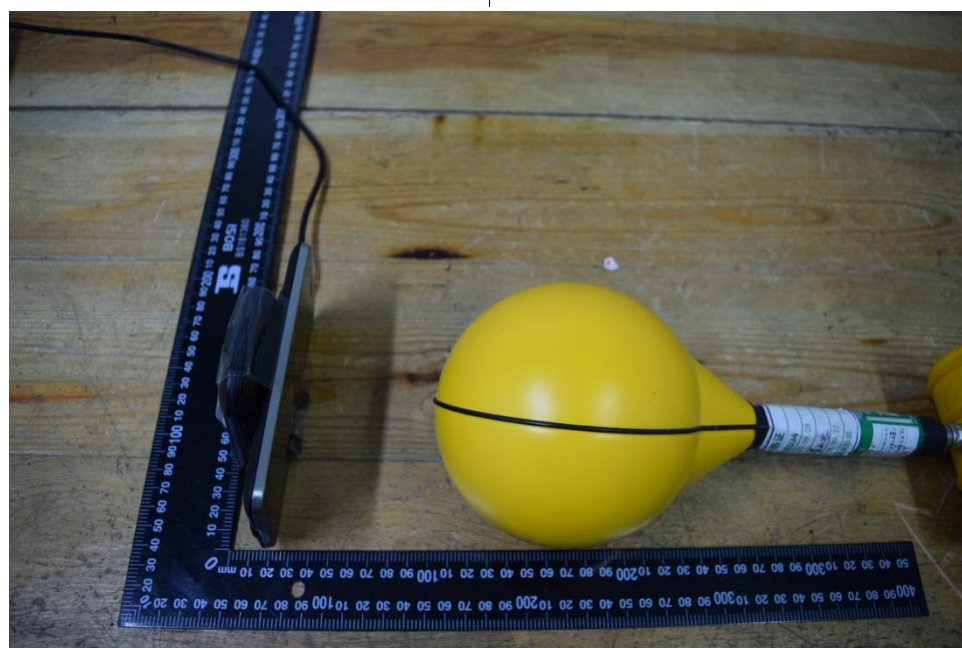


3. Top Edge

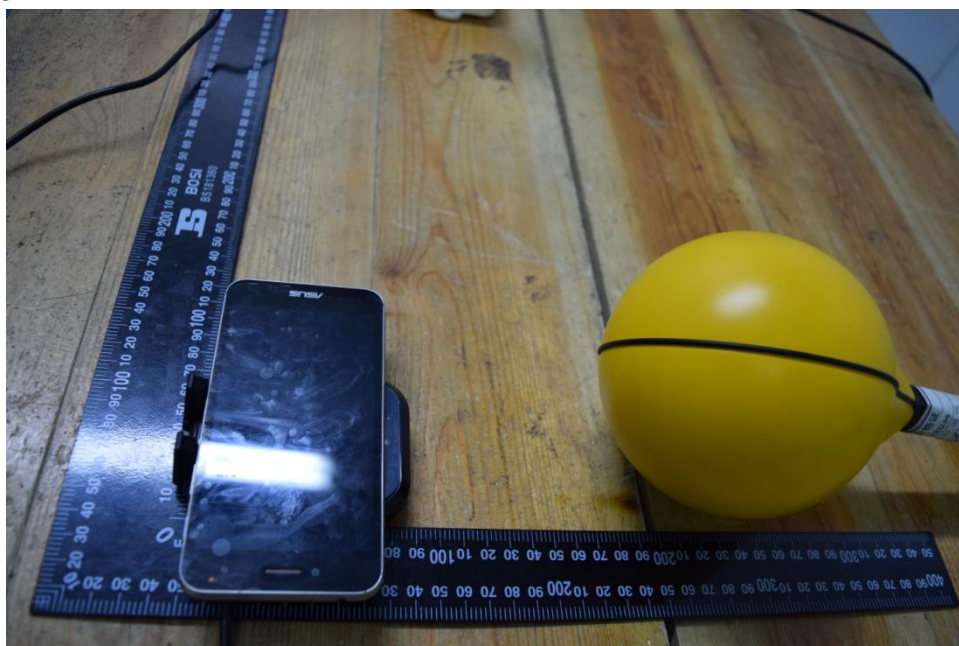

4. Bottom Edge

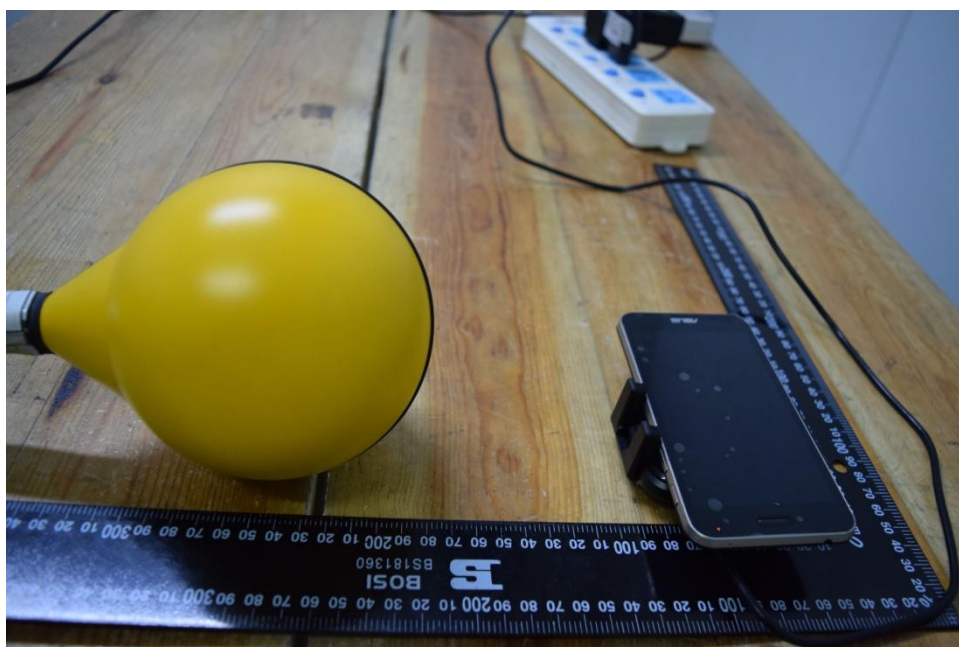

5. Left Edge

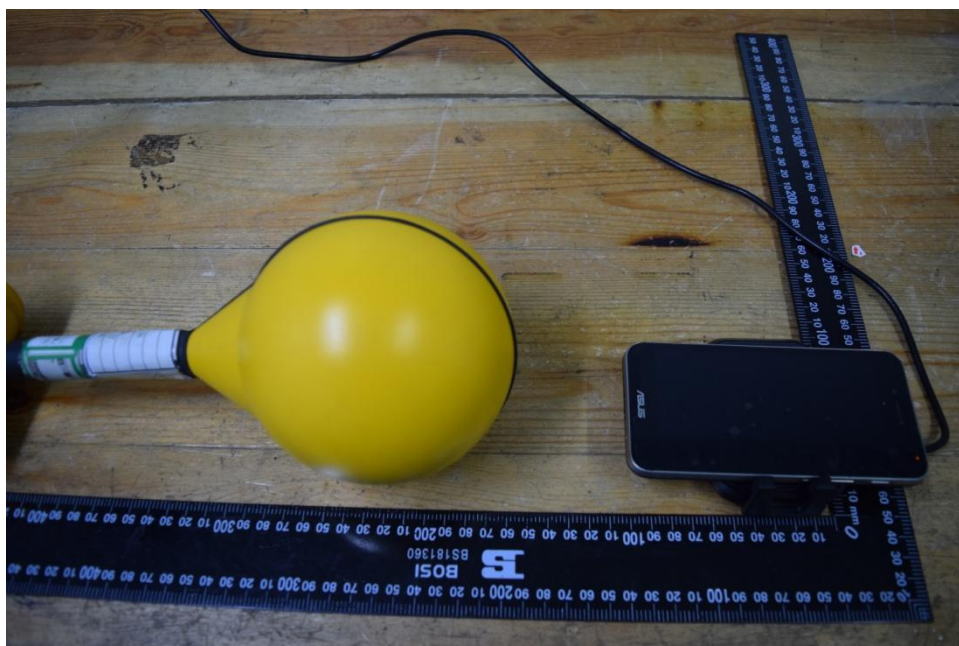

6. Right Edge

