

CUSTOMER

KFT-052

ROHS

SPECIFICATION FOR APPROVAL

MODEL NO. : G(43.5LI+19)

KEFEITE NO. : 52-G(43.5+19)-0.08X80PX10TS-6.7uH-13mm

CUSTOMER P/N: G(43.5+19)-6.7uH-13mm

DATE : 2022/11/29

REV : A1

※产品符合: ☒RoHS ☐PAHS ☐6P ☐REACH

PLEASE RETURN TO US COPY OF "SPECIFICATION FOR APPROVAL" WITH YOUR APPROVED SIGNATURES.

	"√"	CUSTOMER'S SIGNATURE	NOTE
FULL APPROVED			
CONDITIONAL APPROVED			
REJECTED			

SHENZHEN KEFEITE ELELECTRONICS CO., LTD

FactoryAddress:2/F, Guantiancommunity, Shenzhen. New era industrial area
C Building

TEL:86-755-27352660

FAX:86-755-27352742

HTTP:WWW.Kefeite.net



SHENZHEN KEFEITE ELECTRONICS CO., LTD

[illegible]




NOTES:



SHENZHEN KEFEITE ELECTRONICS CO., LTD

CUSTOMER:	KFT-052	VERSION:	A1
CUSTOMER NO:	G (43.5+19)-6.7uH-13mm	PAGE:	3/5
KFT P/N:	52-G (43.5LI+19)-0.08X80X10TS-6.7uH-13mm	Date:	2022/11/29

1. CONFIGURATION&DIMENSIONS:

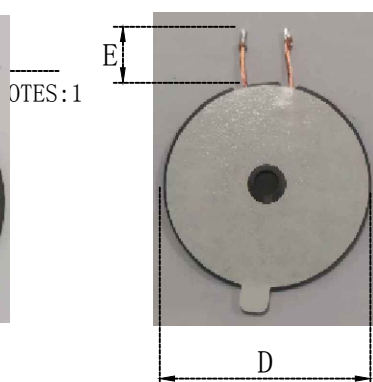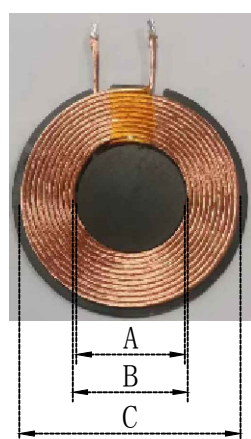


A	19.0±1.0mm
B	20.5±0.5mm
C	40.0±0.4mm
D	43.5±0.5mm
E	11±1.5mm
F	3.0±1.0mm
G	2.4mm MAX

1. Fixing tape (0.06X8mm), Adjustable.
2. Double sided adhesive tape on the back of the product
3. H dimension includes the thickness of release paper

2. ELECTRICAL CHARACTER:


PROJECT	SPECIFICATIONS	TEST CONDITIONS	TEST INSTRUMENT
(Ls)	6.7±10%uH	10KHZ/1.0V	CH1062
(RDC)	≤58mΩ	At:25℃	HG2512
(Q)	≥50	100KHZ/1.0V	CH1062

3. SCHEMATIC



4. PART NUMBERING:PRODUCT IDENTIFICATION

52 G (43.5+19) 0.08X80PX10TS 6.7uH 11mm

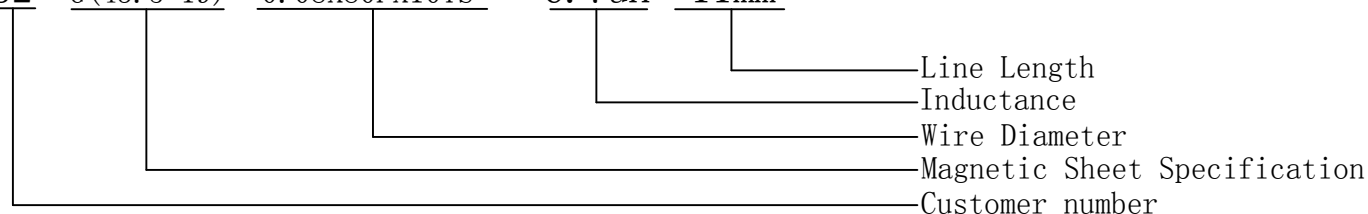

DRAWN BY:	CHECKED BY:	Q. C DEPT:	APPROVED BY:
FI GO	QIONJINFU		W. J. J





SHENZHEN KEFEITE ELECTRONICS CO., LTD

CUSTOMER:	KFT-052	VERSION:	A1
CUSTOMER NO:	G(43.5+19)-6.7uH-13mm	PAGE:	4/5
KFT P/N:	52-G(43.5LI+19)-0.08X80X10TS-6.7uH-13mm	Date:	2022/11/29

5. MATERIAL LIST:

NO	ITEM	DESCRIPTION	RATING	SUPPLIERS	UL NO.	REMARK
1	WIRE		155℃	SHANTOU SHENGANG ELECTRICAL INDUSTRIAL CO., LTD	E239508	
2	SOLDER	99.3/0.7		SHENZHEN Hong Xing Wei solder Limited		
3	CORE	43.5X5.0X0.72mm		Changxing B0 Cheng Electronics CO., LTD		
		19X1.0mm		Changxing B0 Cheng Electronics CO., LTD		
4	EPOXY	1603HFR-HS		DONGBU FINE CHEMICAL CO LTD		
5	TAPE	PI 260℃		SU ZHOU MAILADUONA ELECTRIC MATERIAL CO., LTD	E188295	

6. GENERAL SPECIFICATION:

- 1 Tested at 1.0KHZ/0.25Vrms, 0 Adc.
Average current for 40℃ temperature rise from 25℃.
- 2 Saturation current(Isat):
Inductance drop:10% typ at Isat.
- 3 Heat rating current(Irms):
 $L @ I_{rms} = \Delta T \leq 40^{\circ}\text{C}$.
- 4 Electrical specifications at 25℃
- 5 Storage Temp: -40℃....+85℃
- 6 Operating Temp: -40℃....+85℃

DRAWN BY:	CHECKED BY:	Q. C DEPT:	APPROVED BY:
FI GO	QIONJINFU		W. J. J 