



FCC RF Test Report

APPLICANT : Zhejiang Rexense IoT Technology Co., Ltd.
EQUIPMENT : 2.4G Zigbee Module
BRAND NAME : REXENSE
MODEL NAME : REX3DF26
FCC ID : 2AOE2REX3DF26
STANDARD : 47 CFR Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 23, 2023 ~ Apr. 24, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Peak Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Conducted Band Edges and Spurious Emission Measurement	22
3.5 Spurious Emission Measurement in the Restricted Band	27
3.6 AC Conducted Emission Measurement.....	31
3.7 Antenna Requirements.....	33
4 LIST OF MEASURING EQUIPMENT.....	34
5 UNCERTAINTY OF EVALUATION.....	35
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR330314	Rev. 01	Initial issue of report	Jul. 13, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 1.52 dB at 2388.910 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 7.23 dB at 0.510 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Zhejiang Rexense IoT Technology Co., Ltd.

6th Floor, Building 4, No.6, Longzhou Road, Yuhang District, Hangzhou, Zhejiang Province 310051
PRC

1.2 Manufacturer

Zhejiang Rexense IoT Technology Co., Ltd.

6th Floor, Building 4, No.6, Longzhou Road, Yuhang District, Hangzhou, Zhejiang Province 310051
PRC

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	2.4G Zigbee Module
Brand Name	REXENSE
Model Name	REX3DF26
FCC ID	2AOE2REX3DF26
HW Version	V2
SW Version	V1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2405 MHz ~ 2480 MHz
Number of Channels	16
Channel Spacing	5 MHz
Carrier Frequency of Each Channel	2405 MHz, 2410MHz, ..., 2480MHz
Maximum Output Power to Antenna	8.96 dBm (0.0079 W)
Antenna Type / Gain	PCB Antenna with gain 1.0 dBi
Type of Modulation	O-QPSK

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS TH01-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	11	2405	19	2445
	12	2410	20	2450
	13	2415	21	2455
	14	2420	22	2460
	15	2425	23	2465
	16	2430	24	2470
	17	2435	25	2475
	18	2440	26	2480

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). Pre-scanned tests, X, Y, Z in three orthogonal panels to determine the final configuration (X plane as worst plane) from all possible combinations.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	250kbps / Zigbee
Conducted TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH26_2480 MHz
Radiated TCs	Mode 1: Zigbee Tx CH11_2405 MHz Mode 2: Zigbee Tx CH19_2445 MHz Mode 3: Zigbee Tx CH26_2480 MHz
AC Conducted Emission	Mode 1: Zigbee Tx + Powered from Test Jig

2.3 Connection Diagram of Test System

Conducted Emission:

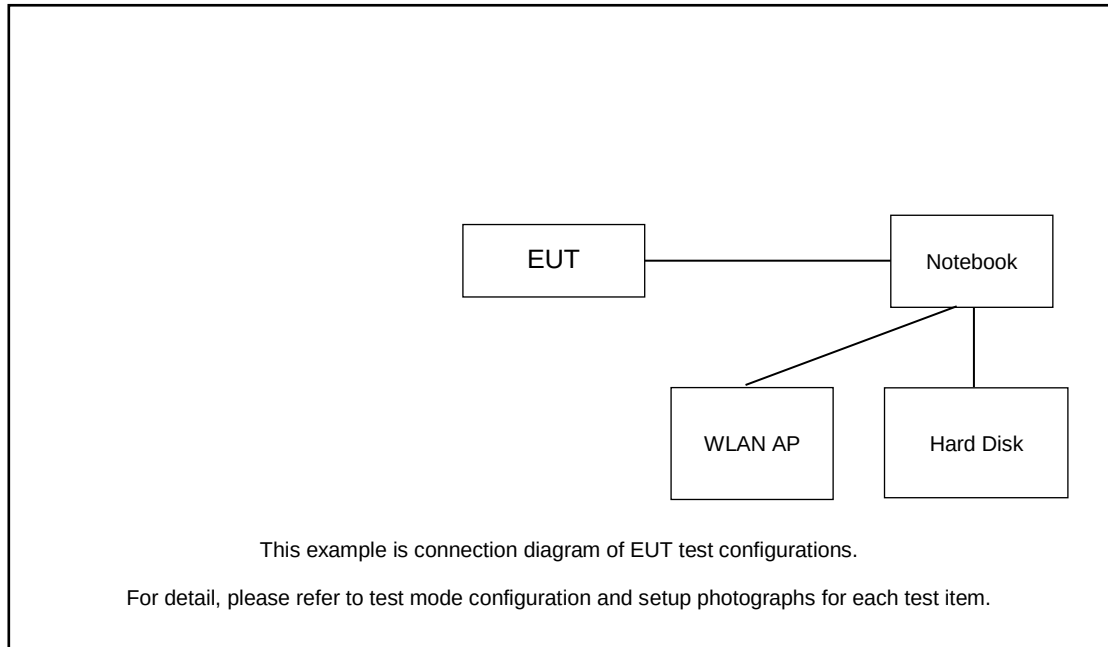

Radiated Emission:

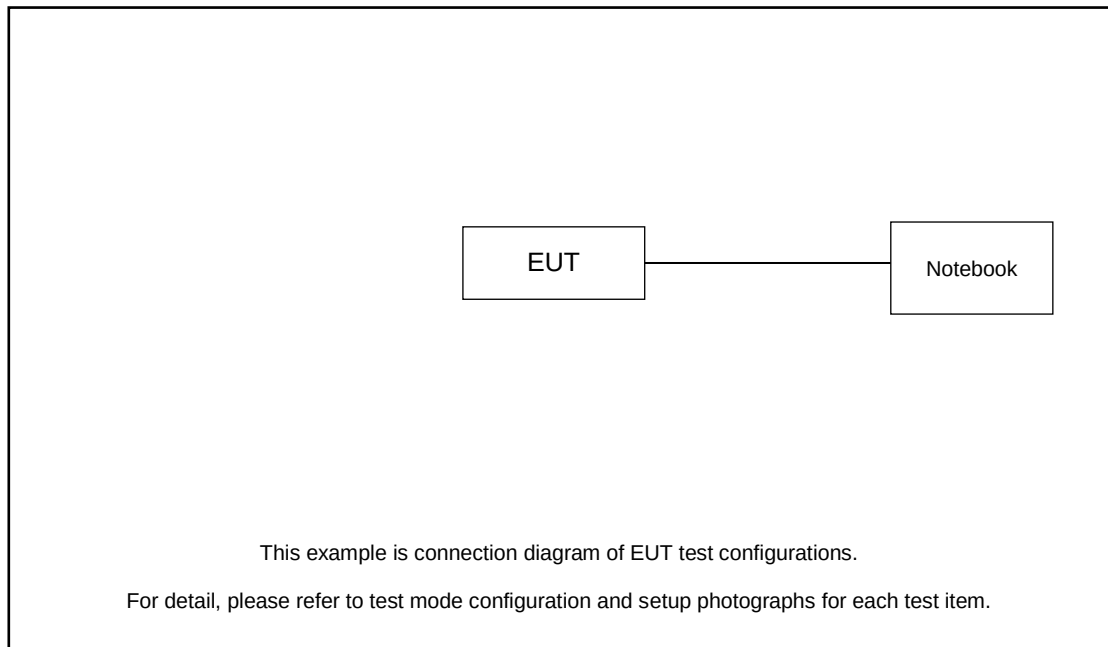

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m
2.	Notebook	Lenovo	V130-14IKB004	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
3.	Hard DISK	WD	C6B	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For Zigbee function, the engineering test program was provided and enabled to make EUT continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.5 dB.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\
 &= 5.5 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 30kHz and set the Video bandwidth (VBW) = 100kHz.
6. Measure and record the results in the test report.

3.1.4 Test Setup

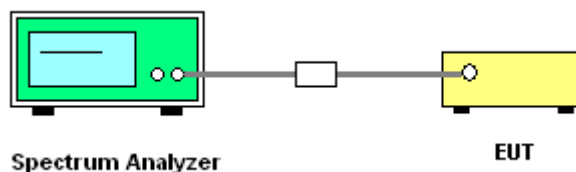




3.1.5 Test Result of 6dB Bandwidth


Test data refer to Appendix A.

6 dB Bandwidth Plot on Channel 11

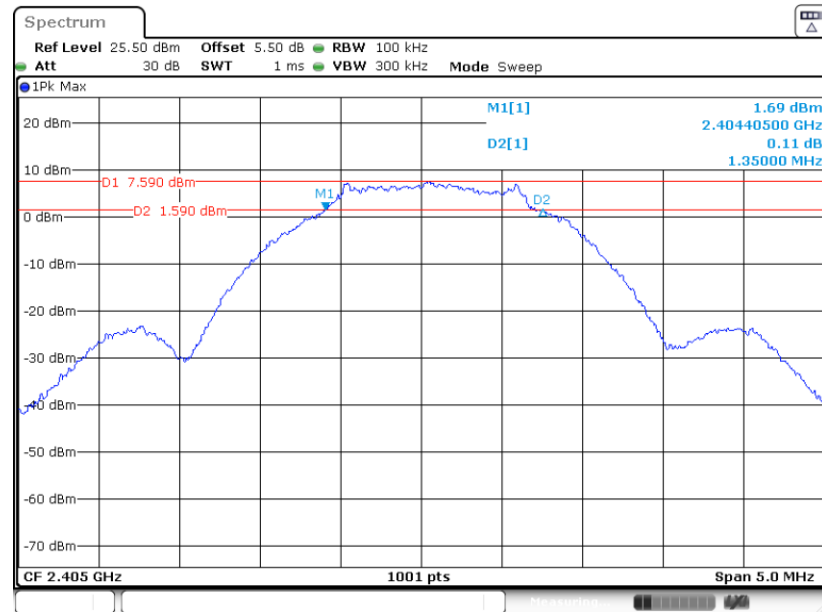

Date: 10.APR.2023 10:05:30


6 dB Bandwidth Plot on Channel 19

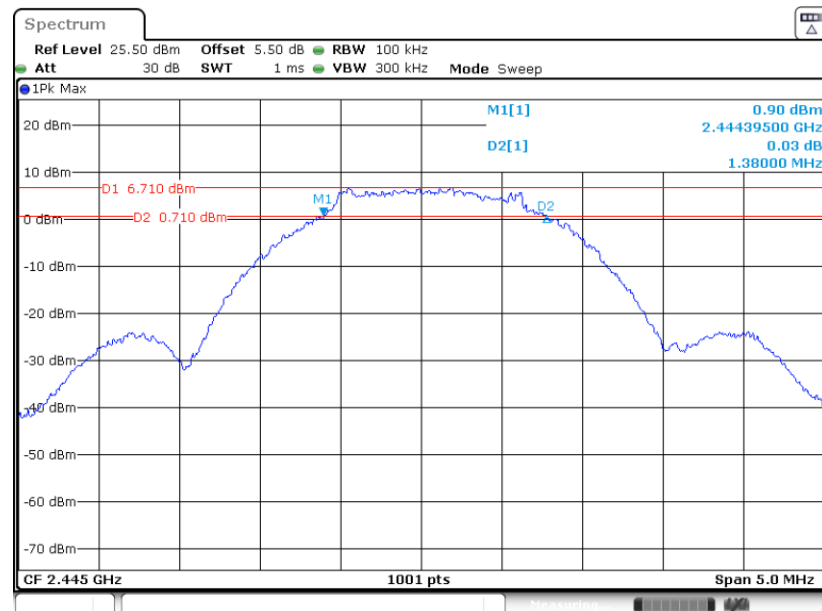

Date: 10.APR.2023 10:12:04



6 dB Bandwidth Plot on Channel 26

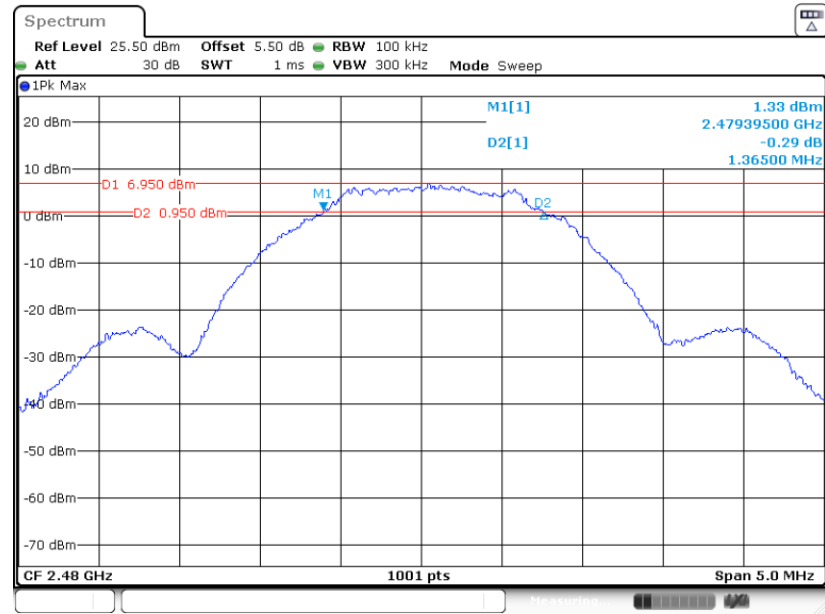


Date: 10.APR.2023 10:16:04

3.1.6 Test Result of 99% Occupied Bandwidth


Test data refer to Appendix A.

99% Occupied Bandwidth Plot on Channel 11

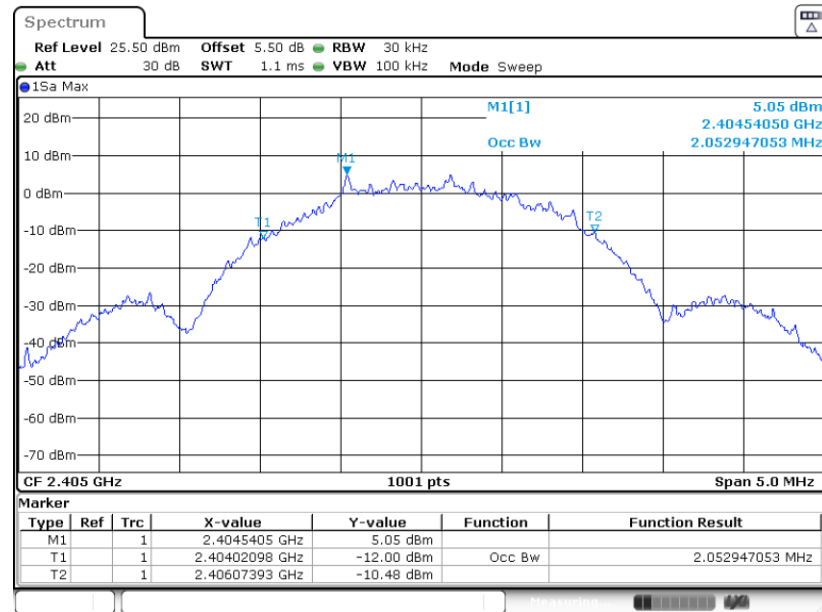

Date: 10.APR.2023 10:07:17


99% Occupied Bandwidth Plot on Channel 19

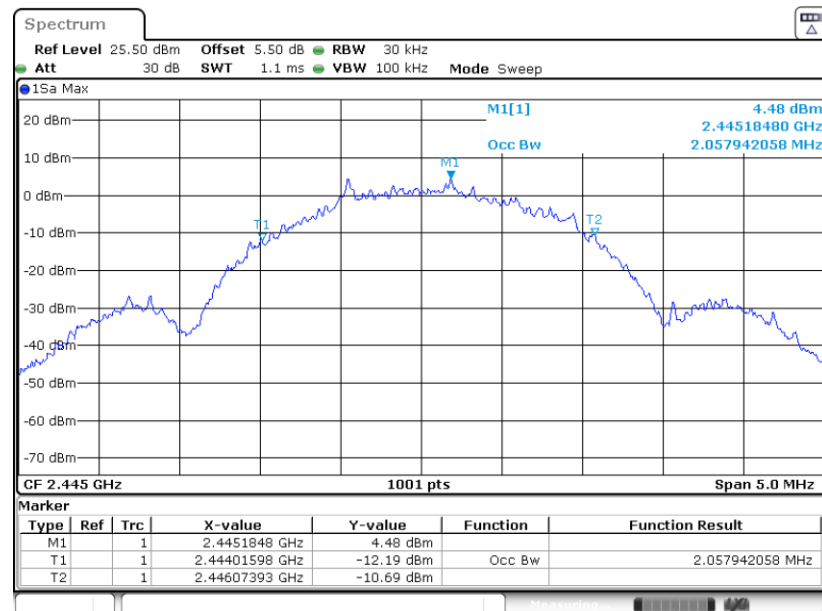

Date: 10.APR.2023 10:13:48



99% Occupied Bandwidth Plot on Channel 26

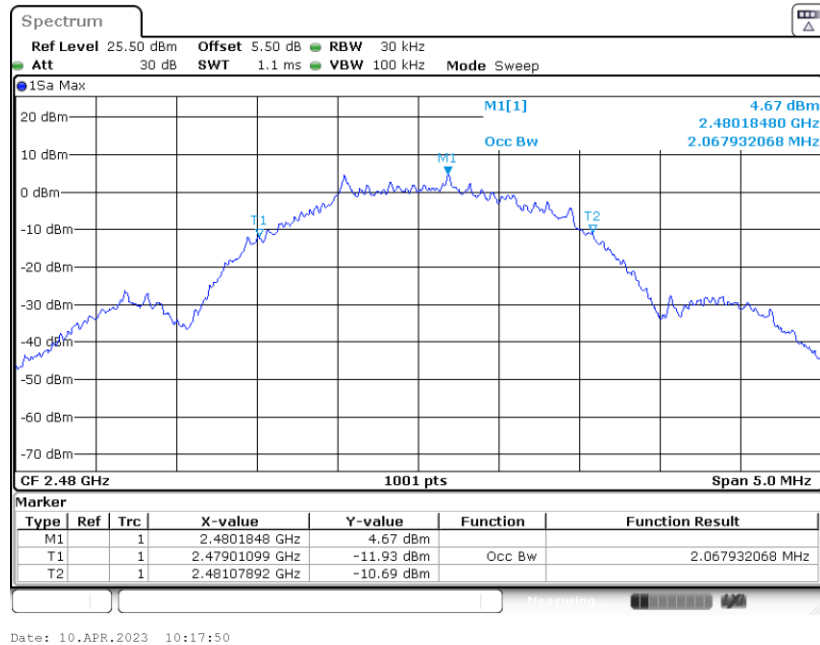

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Peak Output Power Measurement

3.2.1 Limit of Peak Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

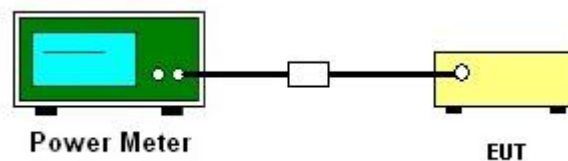

3.2.5 Test Result of Peak Output Power

Test data refers to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Test data refers to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

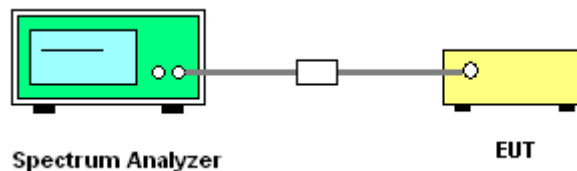


3.3.5 Test Result of Power Spectral Density

Test data refers to Appendix A.




3.3.6 Test Result of Power Spectral Density Plots (100kHz)

PSD 100kHz Plot on Channel 11

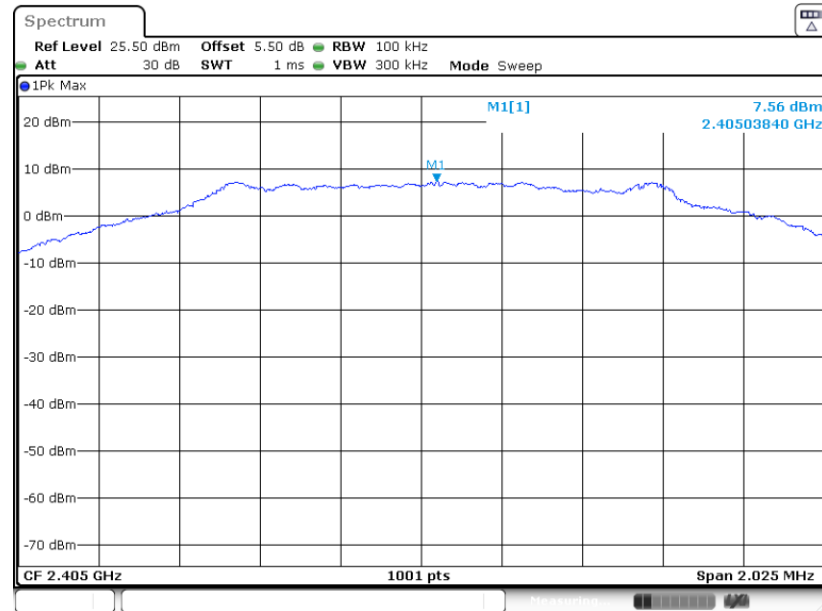

Date: 10.APR.2023 10:06:08


PSD 100kHz Plot on Channel 19

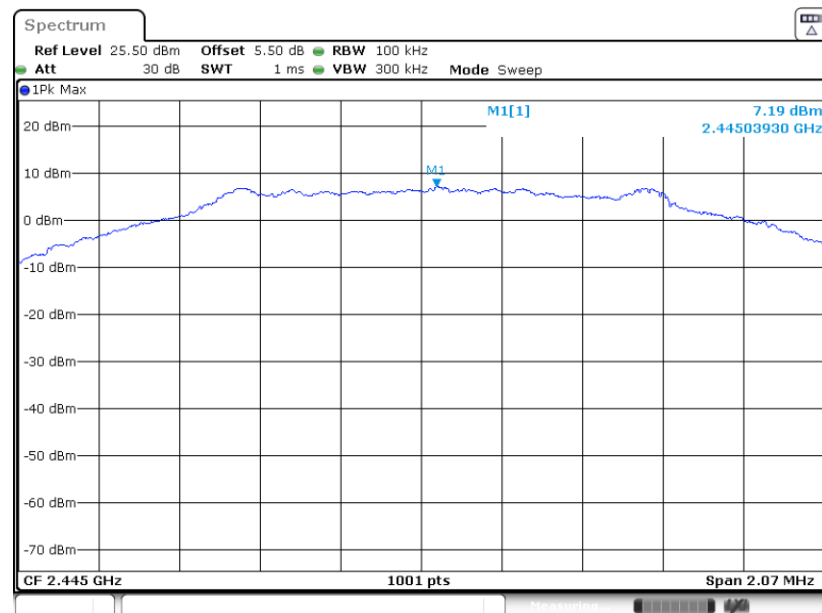

Date: 10.APR.2023 10:12:42



PSD 100kHz Plot on Channel 26

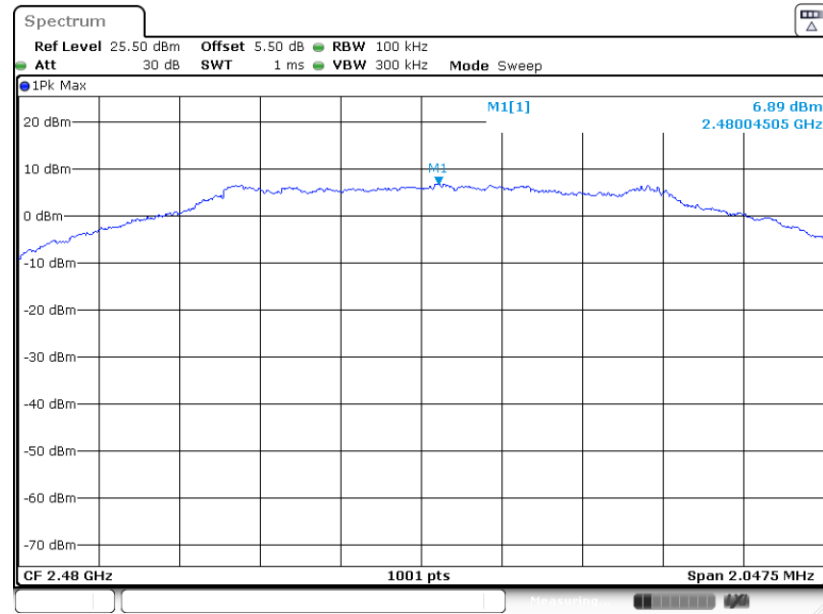


Date: 10.APR.2023 10:16:41




3.3.7 Test Result of Power Spectral Density Plots (3kHz)


PSD 3kHz Plot on Channel 11

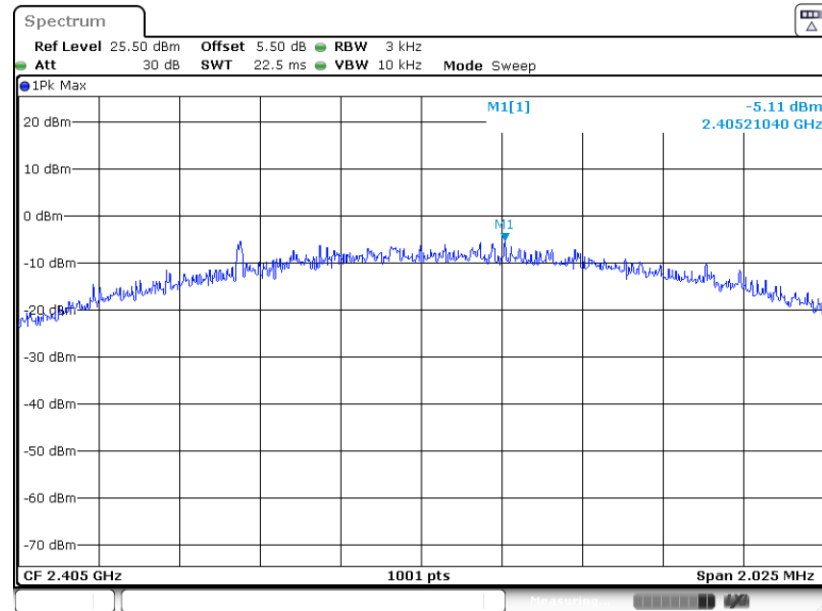

PSD 3kHz Plot on Channel 19

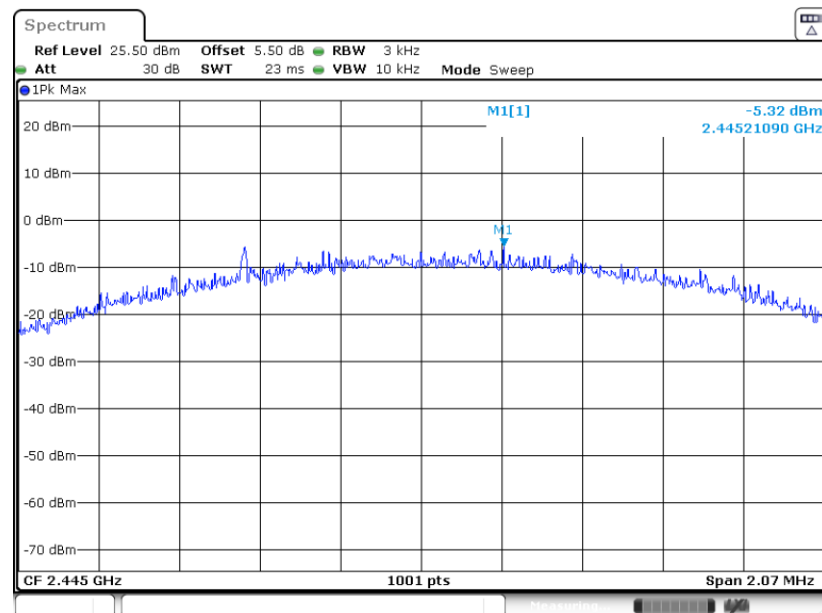

PSD 3kHz Plot on Channel 26

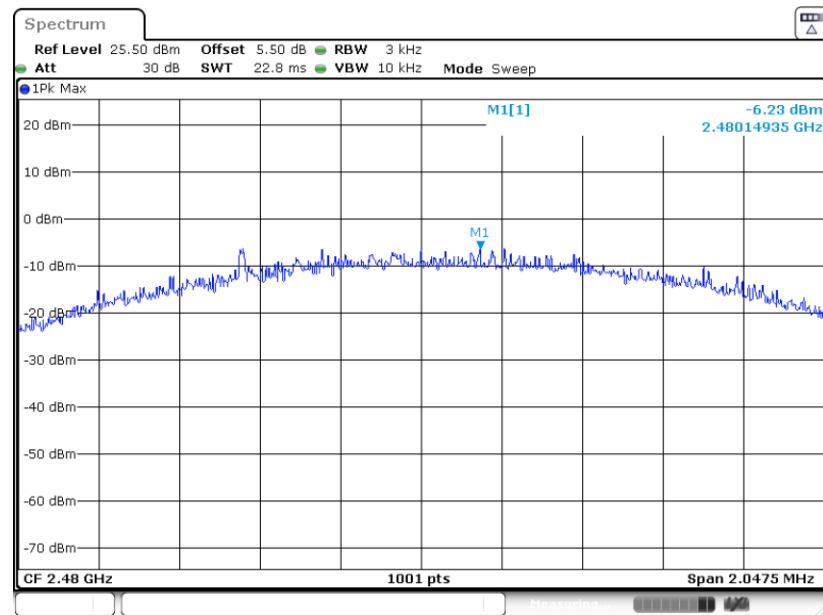

Date: 10.APR.2023 10:16:23

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure


1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

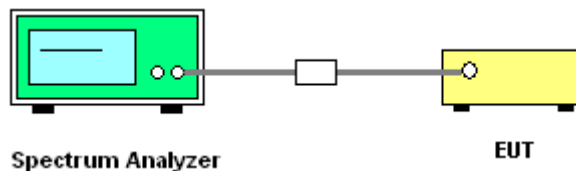


3.4.5 Test Result of Conducted Band Edges Plots



Low Band Edge Plot on Channel 11

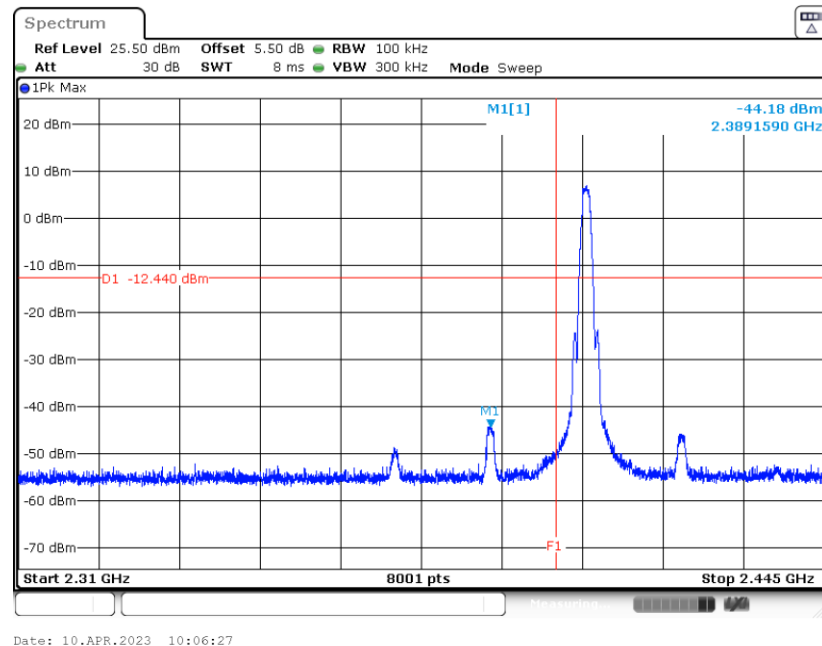

High Band Edge Plot on Channel 26

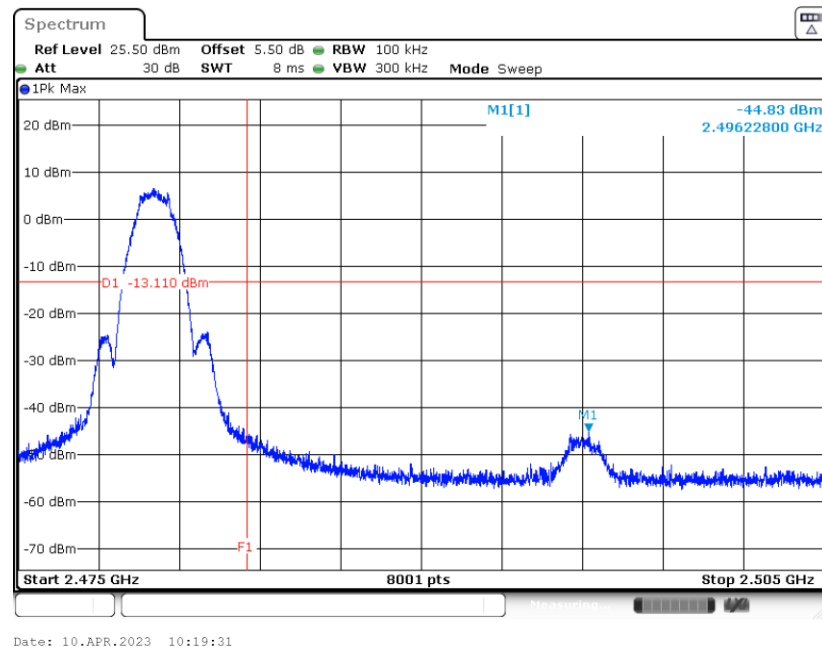


3.4.6 Test Result of Conducted Spurious Emission Plots

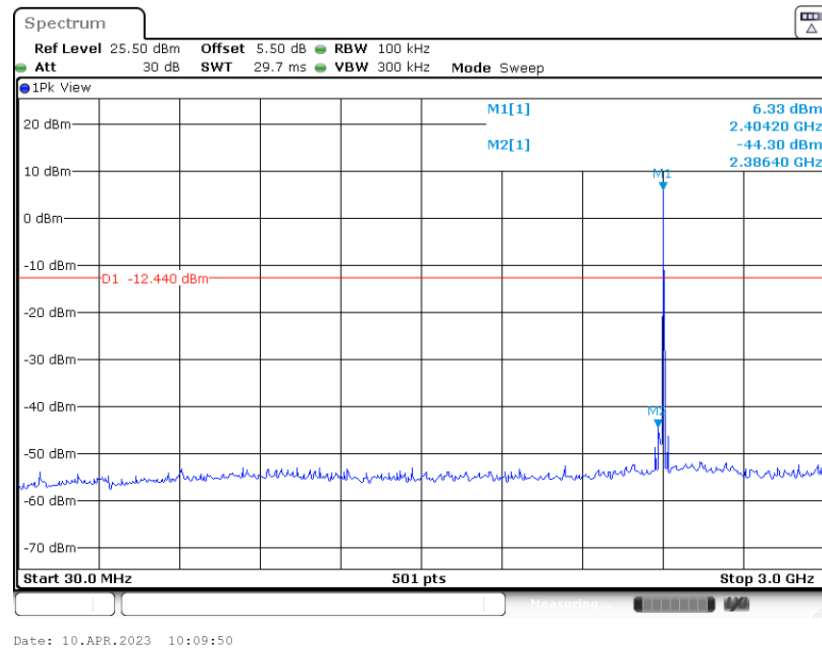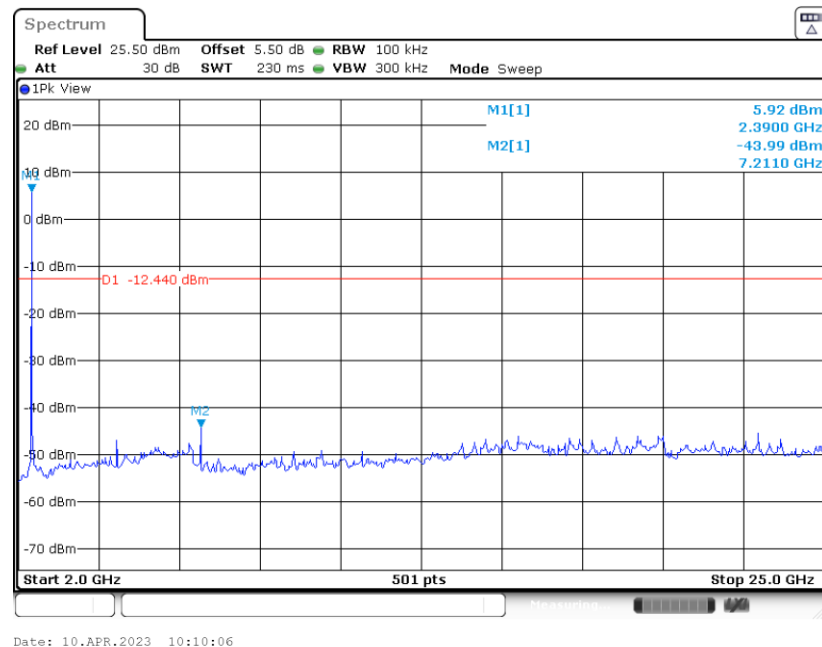
Conducted Spurious Emission Plot on Zigbee Channel 11

Conducted Spurious Emission Plot on Zigbee Channel 11

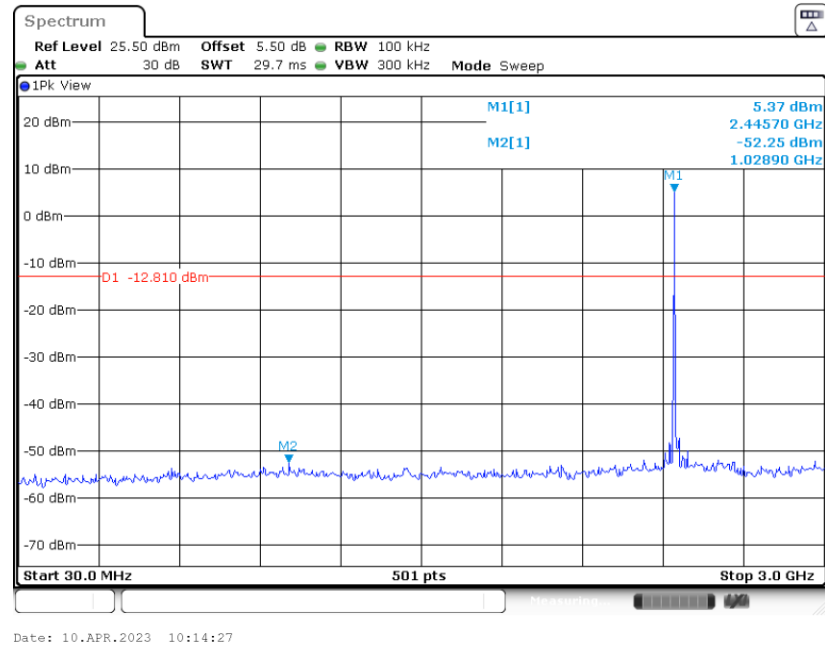


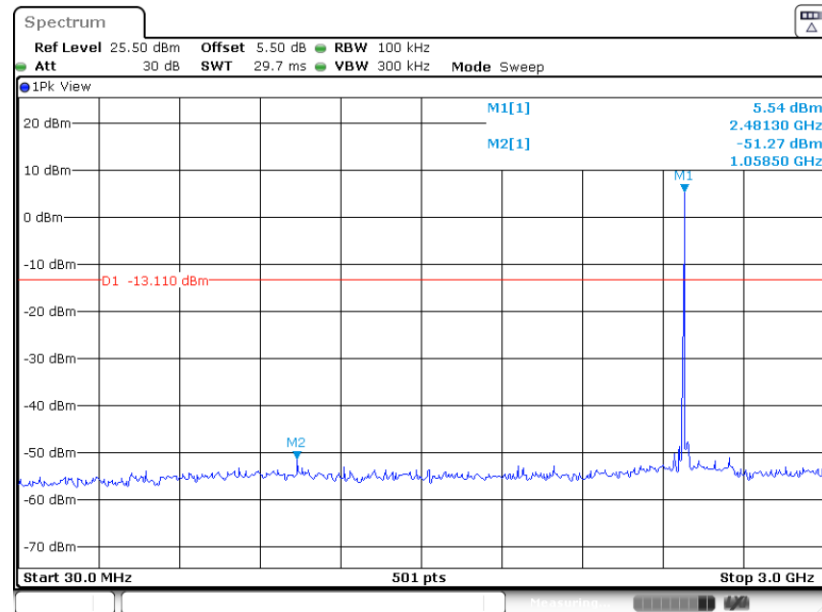
Conducted Spurious Emission Plot on Zigbee Channel 19

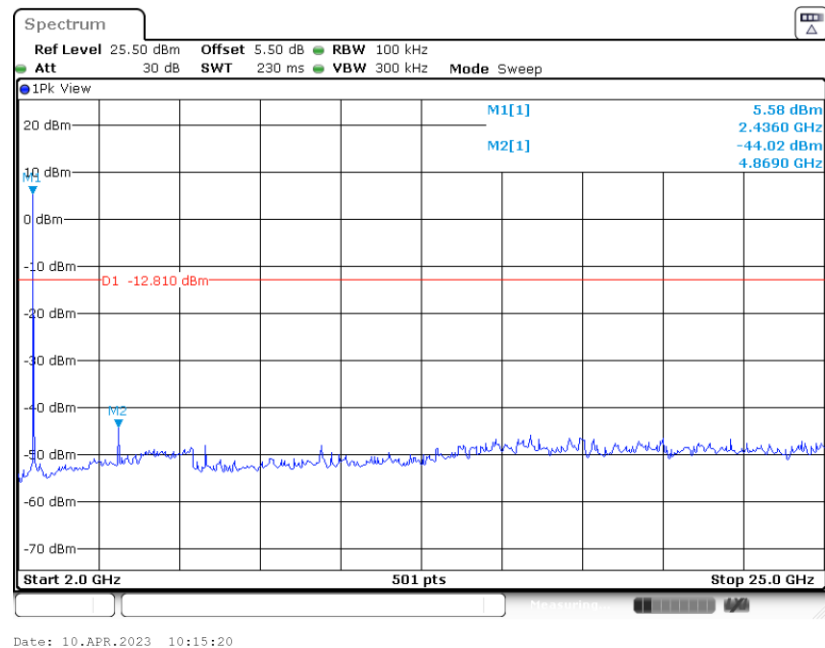

Conducted Spurious Emission Plot on Zigbee Channel 19




Conducted Spurious Emission Plot on Zigbee Channel 26



Date: 10.APR.2023 10:18:28

Conducted Spurious Emission Plot on Zigbee Channel 26

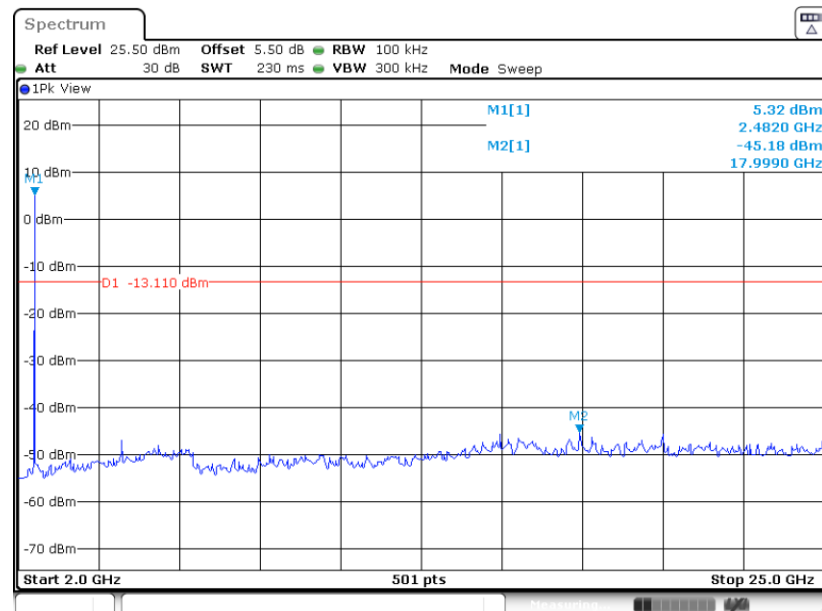

Date: 10.APR.2023 10:18:41



3.5 Spurious Emission Measurement in the Restricted Band

3.5.1 Limit of Spurious Emission Measurement in the Restricted Band

Emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For conducted spurious emission measurement in the restricted band, the RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
7. For measurement below 1GHz, if the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

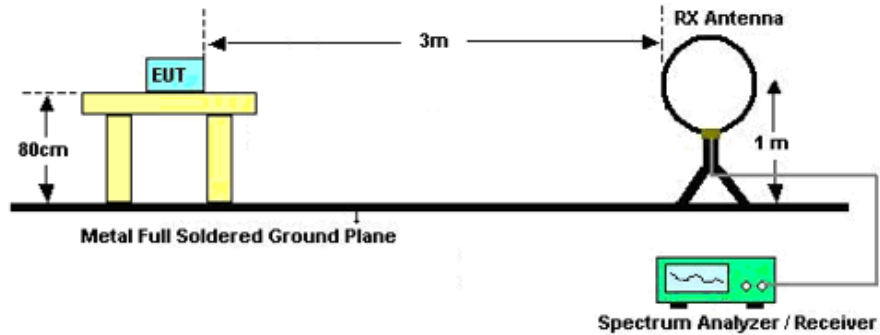

For radiated emissions from 30MHz to 1GHz

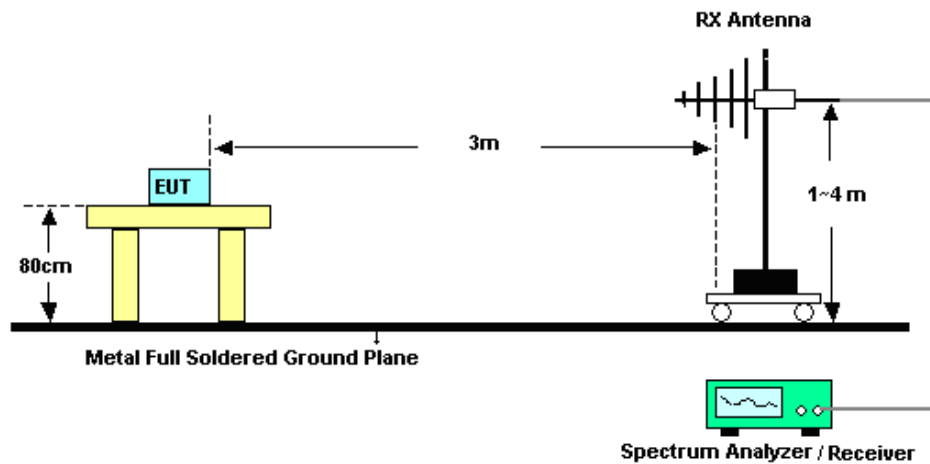

For radiated emissions above 1GHz

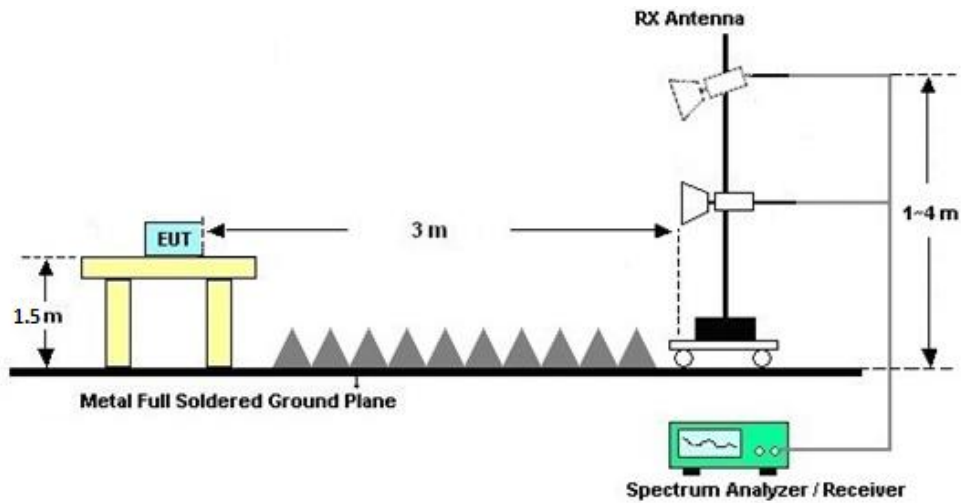

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

3.5.6 Test Results of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Test Result of Cabinet Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.5.8 Duty Cycle

Please refer to Appendix D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

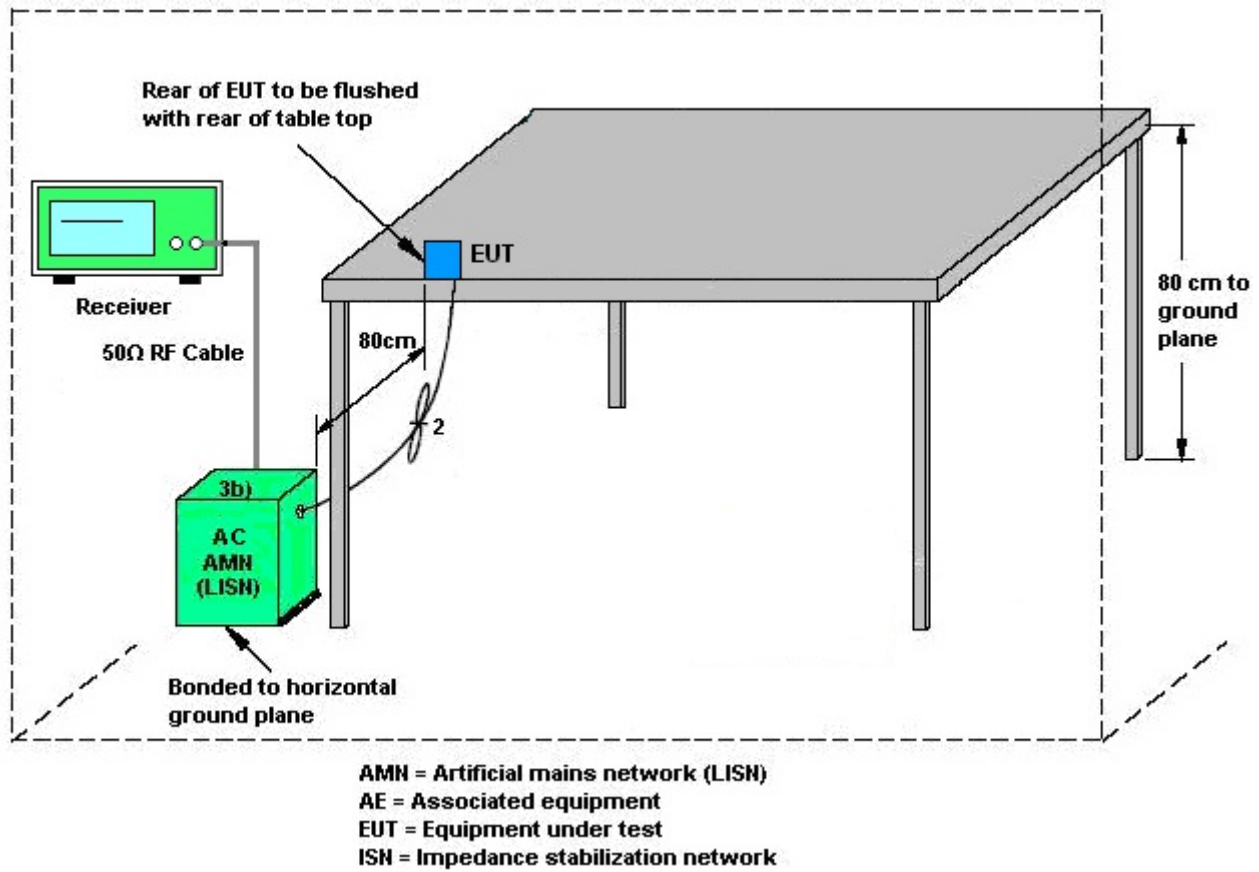

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

Non-standard antenna connector is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 10, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 04, 2023	Apr. 10, 2023	Jan. 03, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 04, 2023	Apr. 10, 2023	Jan. 03, 2024	Conducted (TH01-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz; Max 30dBm	Oct. 13, 2022	Mar. 23, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz~44GHz	Oct. 13, 2022	Mar. 23, 2023	Oct. 12, 2023	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 23, 2023	Oct. 15, 2023	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	May 24, 2022	Mar. 23, 2023	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 06, 2022	Mar. 23, 2023	Apr. 05, 2023	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 08, 2023	Mar. 23, 2023	Jan. 07, 2024	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9kHz ~1GHz	Jul. 11, 2022	Mar. 23, 2023	Jul. 10, 2023	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 04, 2023	Mar. 23, 2023	Jan. 03, 2024	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2082395	1GHz-18GHz	Jan. 04, 2023	Mar. 23, 2023	Jan. 03, 2024	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 12, 2022	Mar. 23, 2023	Oct. 11, 2023	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 23, 2023	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 23, 2023	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 23, 2023	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2022	Apr. 24, 2023	Oct. 12, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 24, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP000000811	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 24, 2023	Oct. 11, 2023	Conduction (CO01-KS)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.1 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.26dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.02dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.26dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Bluetooth Low Energy

Test Engineer:	Long Wu	Temperature:	20~26	°C
Test Date:	2023/4/10	Relative Humidity:	40~51	%

Zigbee
TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
Zigbee	250Kbps	1	11	2405	2.053	1.350	0.50	Pass
Zigbee	250Kbps	1	19	2445	2.058	1.380	0.50	Pass
Zigbee	250Kbps	1	26	2480	2.068	1.365	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
Zigbee	250Kbps	1	11	2405	8.96	30.00	1.00	9.96	36.00	Pass
Zigbee	250Kbps	1	19	2445	8.75	30.00	1.00	9.75	36.00	Pass
Zigbee	250Kbps	1	26	2480	8.52	30.00	1.00	9.52	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
Zigbee	250Kbps	1	11	2405	0.00	8.88
Zigbee	250Kbps	1	19	2445	0.00	8.66
Zigbee	250Kbps	1	26	2480	0.00	8.43


TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
Zigbee	250Kbps	1	11	2405	7.56	-5.11	1.00	8.00	Pass
Zigbee	250Kbps	1	19	2445	7.19	-5.32	1.00	8.00	Pass
Zigbee	250Kbps	1	26	2480	6.89	-6.23	1.00	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.




Appendix B. AC Conducted Emission Test Results

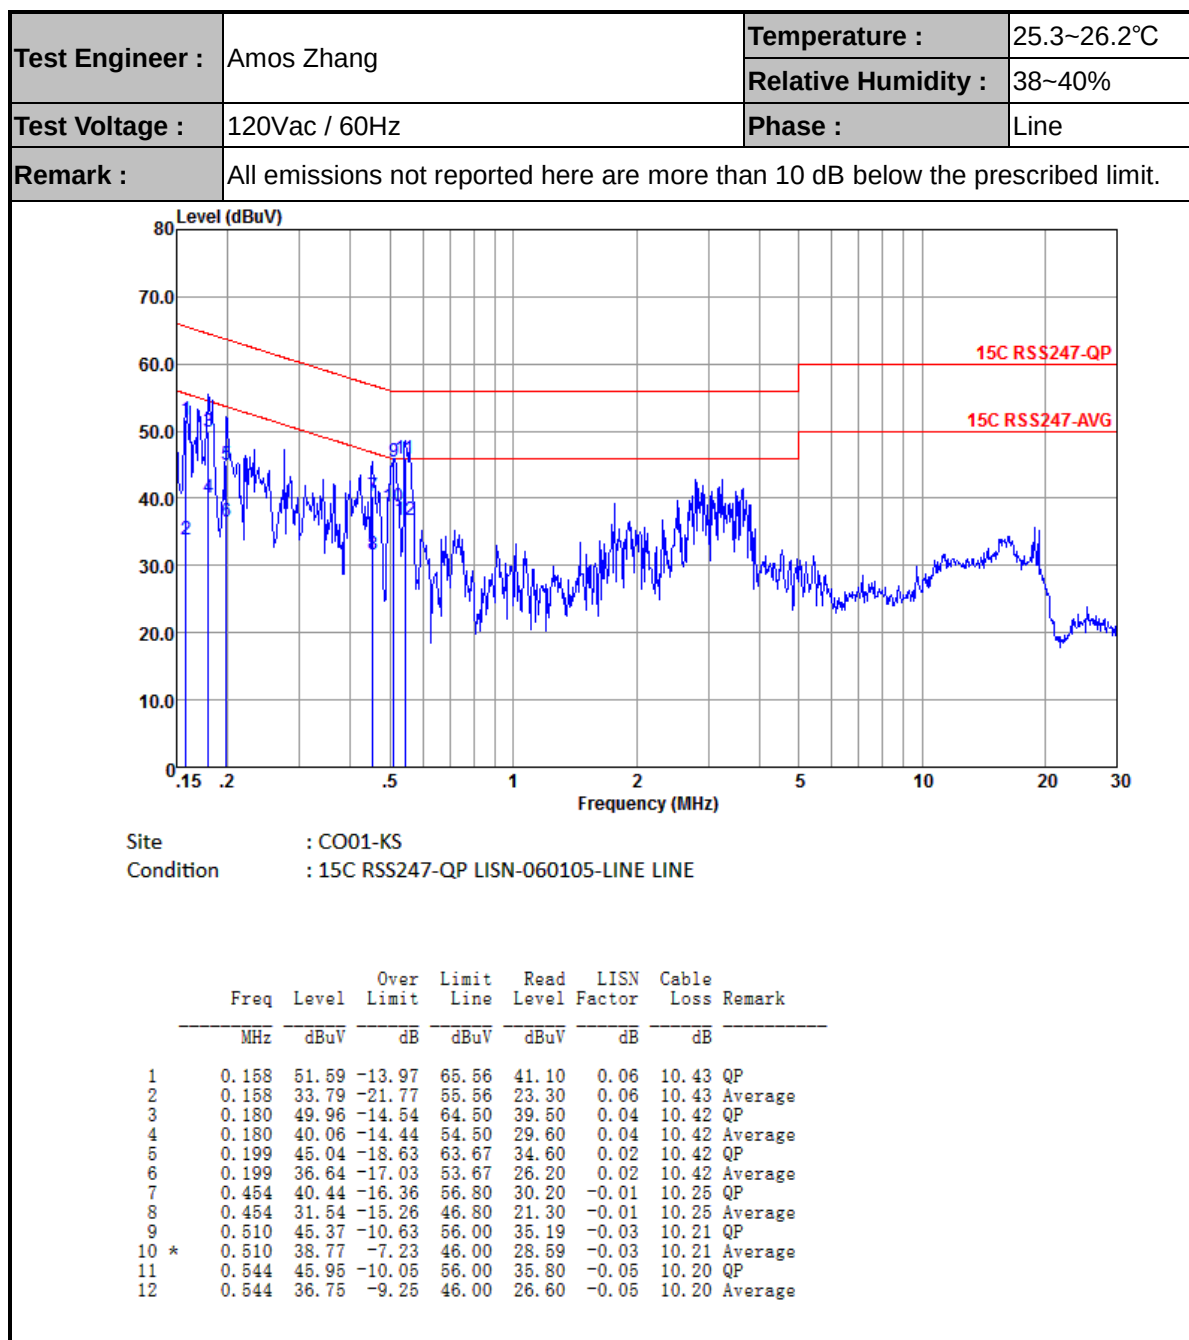



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

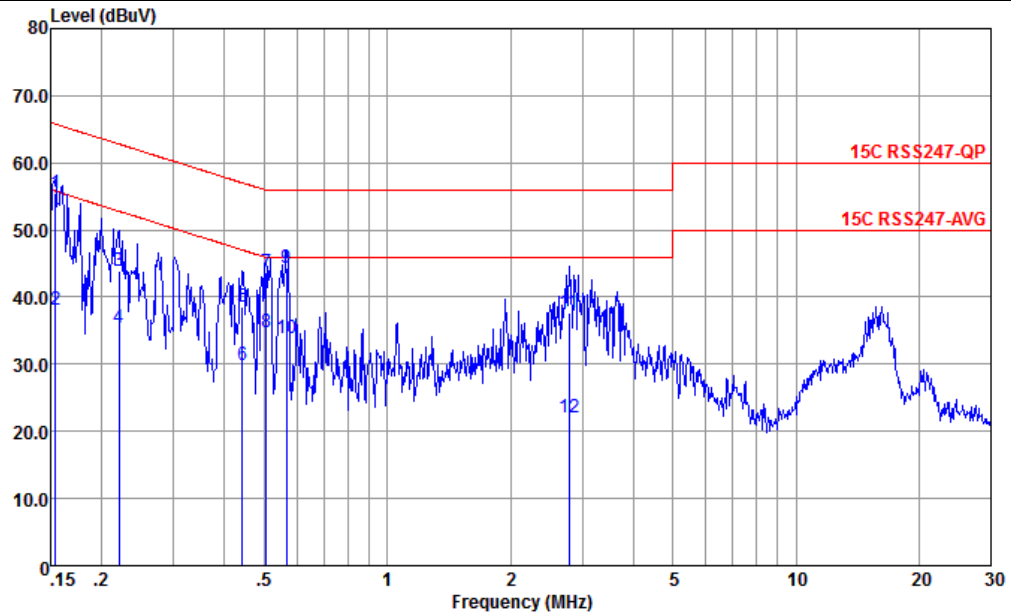

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.154	55.59	-10.19	65.78	45.13	0.03	10.43	QP
2	0.154	38.09	-17.69	55.78	27.63	0.03	10.43	Average
3	0.221	43.93	-18.86	62.79	33.51	0.02	10.40	QP
4	0.221	35.33	-17.46	52.79	24.91	0.02	10.40	Average
5	0.442	38.45	-18.57	57.02	28.26	-0.07	10.26	QP
6	0.442	29.85	-17.17	47.02	19.66	-0.07	10.26	Average
7	0.505	43.68	-12.32	56.00	33.55	-0.08	10.21	QP
8	0.505	34.78	-11.22	46.00	24.65	-0.08	10.21	Average
9	0.567	44.24	-11.76	56.00	34.13	-0.08	10.19	QP
10	0.567	33.84	-12.16	46.00	23.73	-0.08	10.19	Average
11	2.779	37.55	-18.45	56.00	27.62	-0.13	10.06	QP
12	2.779	22.15	-23.85	46.00	12.22	-0.13	10.06	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Relative Humidity :	22~23℃
		Temperature :	41~42%

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	Zigbee	11	2405	O-QPSK(250Kbps)	-	-
Mode 2	2400-2483.5	Zigbee	19	2445	O-QPSK(250Kbps)	-	-
Mode 3	2400-2483.5	Zigbee	26	2480	O-QPSK(250Kbps)	-	-
Mode 4	2400-2483.5	Zigbee	11	2405	O-QPSK(250Kbps)	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Zigbee	11	2388.91	52.48	54.00	-1.52	H	AVERAGE	Pass	Band Edge
	Zigbee	11	4810.00	49.64	54.00	-4.36	H	AVERAGE	Pass	Harmonic
2	Zigbee	19	-	-	-	-	-	-	-	Band Edge
	Zigbee	19	4890.00	48.95	54.00	-5.05	V	AVERAGE	Pass	Harmonic
3	Zigbee	26	2483.50	50.92	54.00	-3.08	H	AVERAGE	Pass	Band Edge
	Zigbee	26	4960.00	46.07	54.00	-7.93	H	AVERAGE	Pass	Harmonic
4	Zigbee	11	432.55	39.56	46	-6.44	H	Peak	Pass	LF



		1																																																				
Mode	Band Edge																																																					
	2400-2483.5_Zigbee_CH11_2405MHz																																																					
Pol.	Horizontal					Fundamental																																																
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.13</td><td>59.85</td><td>74.00</td><td>-14.15</td><td>47.83</td><td>32.28</td><td>6.60</td><td>32.86</td><td>6.00</td><td>100 287 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.13	59.85	74.00	-14.15	47.83	32.28	6.60	32.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2388.13	59.85	74.00	-14.15	47.83	32.28	6.60	32.86	6.00	100 287 PEAK																																												
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>104.78</td><td>-----</td><td>-----</td><td>92.68</td><td>32.30</td><td>6.63</td><td>32.83</td><td>6.00</td><td>100 287 PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	104.78	-----	-----	92.68	32.30	6.63	32.83	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2405.00	104.78	-----	-----	92.68	32.30	6.63	32.83	6.00	100 287 PEAK																																												
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>52.48</td><td>54.00</td><td>-1.52</td><td>40.46</td><td>32.28</td><td>6.60</td><td>32.86</td><td>6.00</td><td>100 287 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	52.48	54.00	-1.52	40.46	32.28	6.60	32.86	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2388.91	52.48	54.00	-1.52	40.46	32.28	6.60	32.86	6.00	100 287 AVERAGE																																												
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>102.50</td><td>-----</td><td>-----</td><td>90.40</td><td>32.30</td><td>6.63</td><td>32.83</td><td>6.00</td><td>100 287 AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	102.50	-----	-----	90.40	32.30	6.63	32.83	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2405.00	102.50	-----	-----	90.40	32.30	6.63	32.83	6.00	100 287 AVERAGE																																												



Mode	1																																																					
	Band Edge																																																					
	2400-2483.5 Zigbee_CH11_2405MHz																																																					
Pol.	Vertical						Fundamental																																															
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.52</td><td>58.84</td><td>74.00</td><td>-15.16</td><td>46.82</td><td>32.28</td><td>6.60</td><td>32.86</td><td>6.00</td><td>251</td><td>272 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.52	58.84	74.00	-15.16	46.82	32.28	6.60	32.86	6.00	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2388.52	58.84	74.00	-15.16	46.82	32.28	6.60	32.86	6.00	251	272 PEAK																																											
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>105.26</td><td>-----</td><td>-----</td><td>93.16</td><td>32.30</td><td>6.63</td><td>32.83</td><td>6.00</td><td>251</td><td>272 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	105.26	-----	-----	93.16	32.30	6.63	32.83	6.00	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2405.00	105.26	-----	-----	93.16	32.30	6.63	32.83	6.00	251	272 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>52.42</td><td>54.00</td><td>-1.58</td><td>40.40</td><td>32.28</td><td>6.60</td><td>32.86</td><td>6.00</td><td>251</td><td>272 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	52.42	54.00	-1.58	40.40	32.28	6.60	32.86	6.00	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2388.91	52.42	54.00	-1.58	40.40	32.28	6.60	32.86	6.00	251	272 AVERAGE																																											
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2405.00</td><td>102.95</td><td>-----</td><td>-----</td><td>90.85</td><td>32.30</td><td>6.63</td><td>32.83</td><td>6.00</td><td>251</td><td>272 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2405.00	102.95	-----	-----	90.85	32.30	6.63	32.83	6.00	251
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2405.00	102.95	-----	-----	90.85	32.30	6.63	32.83	6.00	251	272 AVERAGE																																											







Mode	1																																																																																																								
	Harmonic																																																																																																								
	2400-2483.5_Zigbee_CH11_2405MHz																																																																																																								
Pol.	Horizontal	Vertical																																																																																																							
Peak																																																																																																									
	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>72.57</td><td>34.30</td><td>9.45</td><td>61.82</td><td>0.00</td><td>109</td><td>130</td><td>PEAK</td></tr><tr><td>2</td><td>4810.00</td><td>49.64</td><td>54.00</td><td>-4.36</td><td>67.71</td><td>34.30</td><td>9.45</td><td>61.82</td><td>0.00</td><td>109</td><td>130</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	54.50	74.00	-19.50	72.57	34.30	9.45	61.82	0.00	109	130	PEAK	2	4810.00	49.64	54.00	-4.36	67.71	34.30	9.45	61.82	0.00	109	130	AVERAGE	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4810.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>71.36</td><td>34.30</td><td>9.45</td><td>61.82</td><td>0.00</td><td>319</td><td>17</td><td>PEAK</td></tr><tr><td>2</td><td>4810.00</td><td>48.36</td><td>54.00</td><td>-5.64</td><td>66.43</td><td>34.30</td><td>9.45</td><td>61.82</td><td>0.00</td><td>319</td><td>17</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4810.00	53.29	74.00	-20.71	71.36	34.30	9.45	61.82	0.00	319	17	PEAK	2	4810.00	48.36	54.00	-5.64	66.43	34.30	9.45	61.82	0.00	319	17
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4810.00	54.50	74.00	-19.50	72.57	34.30	9.45	61.82	0.00	109	130	PEAK																																																																																													
2	4810.00	49.64	54.00	-4.36	67.71	34.30	9.45	61.82	0.00	109	130	AVERAGE																																																																																													
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4810.00	53.29	74.00	-20.71	71.36	34.30	9.45	61.82	0.00	319	17	PEAK																																																																																													
2	4810.00	48.36	54.00	-5.64	66.43	34.30	9.45	61.82	0.00	319	17	AVERAGE																																																																																													
Avg																																																																																																									







Mode	2																																																																																						
	Harmonic																																																																																						
	2400-2483.5_Zigbee_CH19_2445MHz																																																																																						
Pol.	Horizontal																																																																																						
Peak Avg	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4890.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>70.27</td><td>34.11</td><td>9.54</td><td>61.76</td><td>0.00</td><td>174</td><td>18</td><td>PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>47.53</td><td>54.00</td><td>-6.47</td><td>65.64</td><td>34.11</td><td>9.54</td><td>61.76</td><td>0.00</td><td>174</td><td>18</td><td>AVERAGE</td></tr><tr><td>3</td><td>7335.00</td><td>41.94</td><td>74.00</td><td>-32.06</td><td>56.60</td><td>35.70</td><td>11.70</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4890.00	52.16	74.00	-21.84	70.27	34.11	9.54	61.76	0.00	174	18	PEAK	2	4890.00	47.53	54.00	-6.47	65.64	34.11	9.54	61.76	0.00	174	18	AVERAGE	3	7335.00	41.94	74.00	-32.06	56.60	35.70	11.70	62.06	0.00	---	---	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																											
1	4890.00	52.16	74.00	-21.84	70.27	34.11	9.54	61.76	0.00	174	18	PEAK																																																																											
2	4890.00	47.53	54.00	-6.47	65.64	34.11	9.54	61.76	0.00	174	18	AVERAGE																																																																											
3	7335.00	41.94	74.00	-32.06	56.60	35.70	11.70	62.06	0.00	---	---	PEAK																																																																											
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4890.00</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>71.45</td><td>34.11</td><td>9.54</td><td>61.76</td><td>0.00</td><td>384</td><td>108</td><td>PEAK</td></tr><tr><td>2</td><td>4890.00</td><td>48.95</td><td>54.00</td><td>-5.05</td><td>67.06</td><td>34.11</td><td>9.54</td><td>61.76</td><td>0.00</td><td>384</td><td>108</td><td>AVERAGE</td></tr><tr><td>3</td><td>7335.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>56.17</td><td>35.70</td><td>11.70</td><td>62.06</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	4890.00	53.34	74.00	-20.66	71.45	34.11	9.54	61.76	0.00	384	108	PEAK	2	4890.00	48.95	54.00	-5.05	67.06	34.11	9.54	61.76	0.00	384	108	AVERAGE	3	7335.00	41.51	74.00	-32.49	56.17	35.70	11.70	62.06	0.00	---	---	PEAK
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																												
1	4890.00	53.34	74.00	-20.66	71.45	34.11	9.54	61.76	0.00	384	108	PEAK																																																																											
2	4890.00	48.95	54.00	-5.05	67.06	34.11	9.54	61.76	0.00	384	108	AVERAGE																																																																											
3	7335.00	41.51	74.00	-32.49	56.17	35.70	11.70	62.06	0.00	---	---	PEAK																																																																											

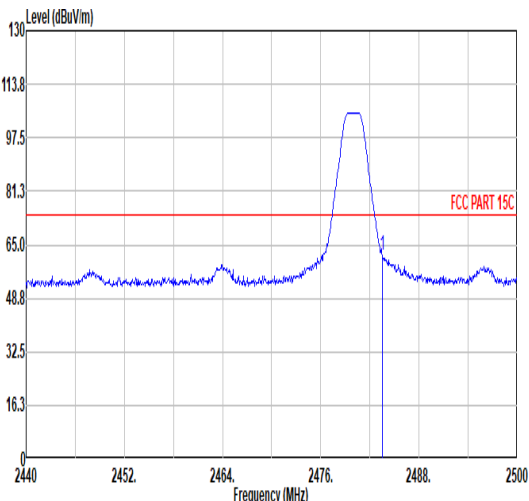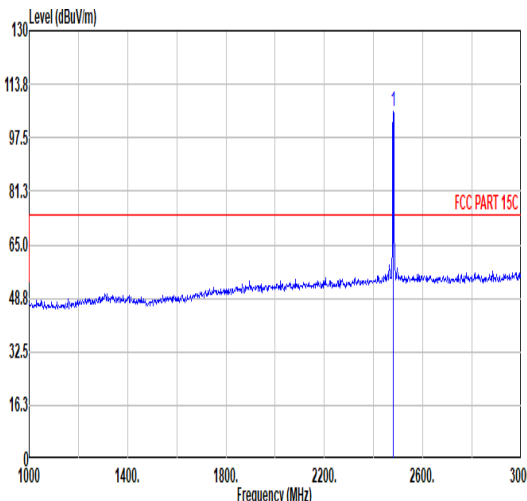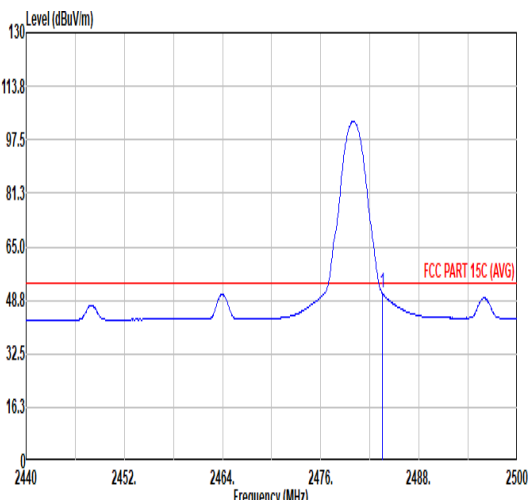
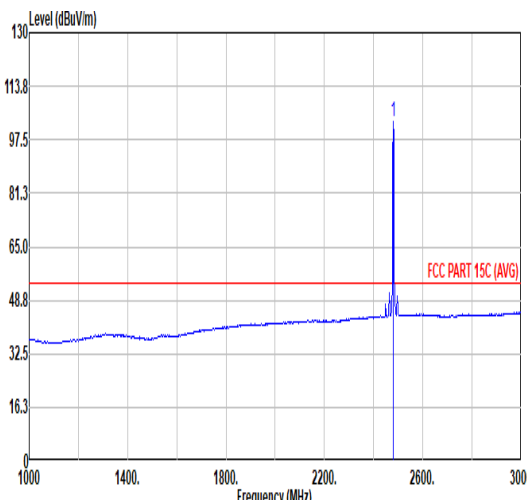


		3																																																					
Mode	Band Edge																																																						
	2400-2483.5_Zigbee_CH26_2480MHz																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>62.04</td><td>74.00</td><td>-11.96</td><td>49.49</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100</td><td>280</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	62.04	74.00	-11.96	49.49	32.45	6.73	32.63	6.00	100	280
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	62.04	74.00	-11.96	49.49	32.45	6.73	32.63	6.00	100	280	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>105.46</td><td>-----</td><td>-----</td><td>92.92</td><td>32.44</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100</td><td>280</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	105.46	-----	-----	92.92	32.44	6.73	32.63	6.00	100	280
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	105.46	-----	-----	92.92	32.44	6.73	32.63	6.00	100	280	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.92</td><td>54.00</td><td>-3.08</td><td>38.37</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100</td><td>280</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.92	54.00	-3.08	38.37	32.45	6.73	32.63	6.00	100	280
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	50.92	54.00	-3.08	38.37	32.45	6.73	32.63	6.00	100	280	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>103.22</td><td>-----</td><td>-----</td><td>90.68</td><td>32.44</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100</td><td>280</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	103.22	-----	-----	90.68	32.44	6.73	32.63	6.00	100	280
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2480.00	103.22	-----	-----	90.68	32.44	6.73	32.63	6.00	100	280	AVERAGE																																											

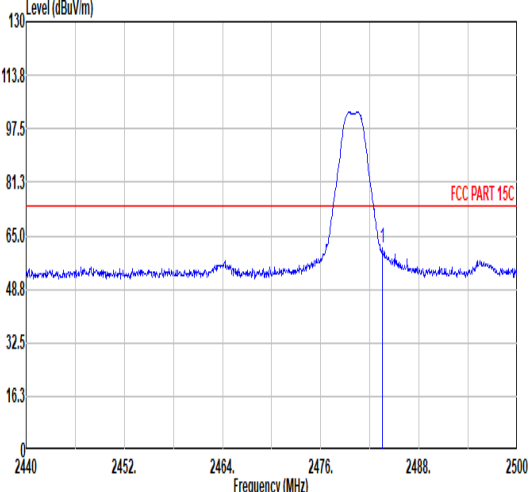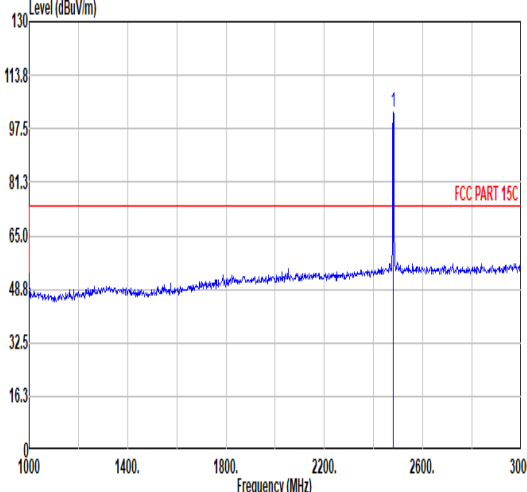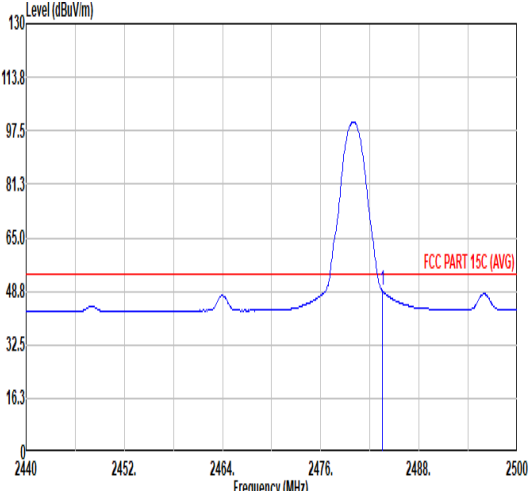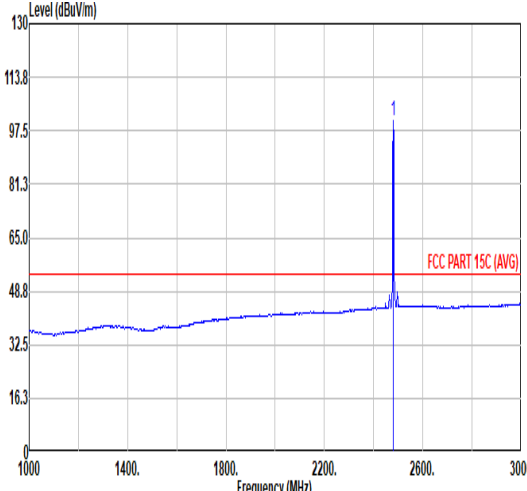

Mode	3																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>61.20</td><td>74.00</td><td>-12.80</td><td>48.65</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100 248 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	61.20	74.00	-12.80	48.65	32.45	6.73	32.63	6.00	100 248 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>102.65</td><td>-----</td><td>-----</td><td>90.11</td><td>32.44</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100 248 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.65	-----	-----	90.11	32.44	6.73	32.63	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.50	61.20	74.00	-12.80	48.65	32.45	6.73	32.63	6.00	100 248 PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2480.00	102.65	-----	-----	90.11	32.44	6.73	32.63	6.00	100 248 PEAK																																																																																																			
Avg																																																																																																													
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>48.87</td><td>54.00</td><td>-5.13</td><td>36.32</td><td>32.45</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100 248 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.87	54.00	-5.13	36.32	32.45	6.73	32.63	6.00	100 248 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>100.38</td><td>-----</td><td>-----</td><td>87.84</td><td>32.44</td><td>6.73</td><td>32.63</td><td>6.00</td><td>100 248 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	100.38	-----	-----	87.84	32.44	6.73	32.63	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.50	48.87	54.00	-5.13	36.32	32.45	6.73	32.63	6.00	100 248 AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2480.00	100.38	-----	-----	87.84	32.44	6.73	32.63	6.00	100 248 AVERAGE																																																																																																			

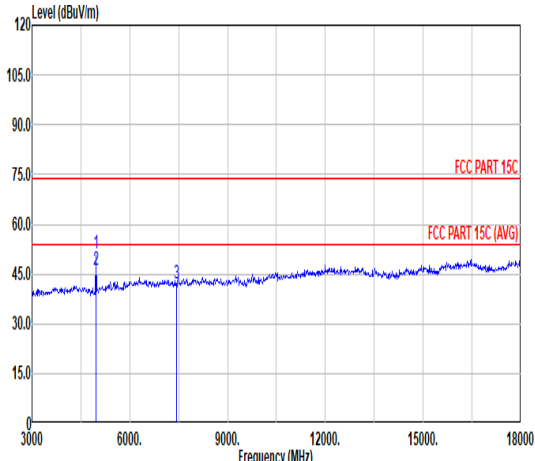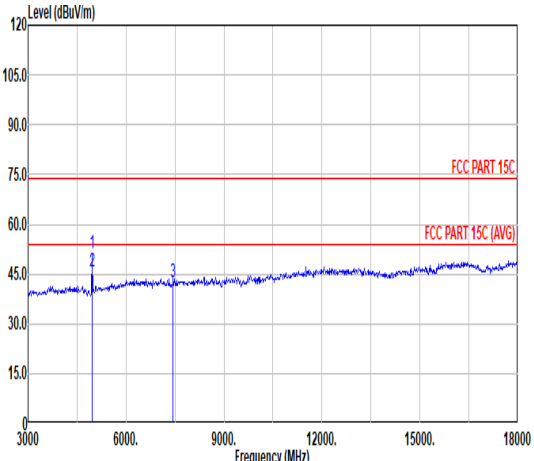

Mode	3																																																																																																																																																																																
	Harmonic																																																																																																																																																																																
	2400-2483.5_Zigbee_CH26_2480MHz																																																																																																																																																																																
Pol.	Horizontal											Vertical																																																																																																																																																																					
Peak Avg																																																																																																																																																																																	
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>51.39</td><td>74.00</td><td>-22.61</td><td>69.39</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>102</td><td>344</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>46.07</td><td>54.00</td><td>-7.93</td><td>64.07</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>102</td><td>344</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>42.14</td><td>74.00</td><td>-31.86</td><td>56.74</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4960.00	51.39	74.00	-22.61	69.39	34.10	9.61	61.71	0.00	102	344	PEAK	2	4960.00	46.07	54.00	-7.93	64.07	34.10	9.61	61.71	0.00	102	344	AVERAGE	3	7440.00	42.14	74.00	-31.86	56.74	35.70	11.77	62.07	0.00	---	---	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>51.07</td><td>74.00</td><td>-22.93</td><td>69.07</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>101</td><td>113</td><td>PEAK</td></tr><tr><td>2</td><td>4960.00</td><td>45.65</td><td>54.00</td><td>-8.35</td><td>63.65</td><td>34.10</td><td>9.61</td><td>61.71</td><td>0.00</td><td>101</td><td>113</td><td>AVERAGE</td></tr><tr><td>3</td><td>7440.00</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>57.06</td><td>35.70</td><td>11.77</td><td>62.07</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	4960.00	51.07	74.00	-22.93	69.07	34.10	9.61	61.71	0.00	101	113	PEAK	2	4960.00	45.65	54.00	-8.35	63.65	34.10	9.61	61.71	0.00	101	113	AVERAGE	3	7440.00	42.46	74.00	-31.54	57.06	35.70	11.77	62.07	0.00	---	---
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4960.00	51.39	74.00	-22.61	69.39	34.10	9.61	61.71	0.00	102	344	PEAK																																																																																																																																																																					
2	4960.00	46.07	54.00	-7.93	64.07	34.10	9.61	61.71	0.00	102	344	AVERAGE																																																																																																																																																																					
3	7440.00	42.14	74.00	-31.86	56.74	35.70	11.77	62.07	0.00	---	---	PEAK																																																																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	4960.00	51.07	74.00	-22.93	69.07	34.10	9.61	61.71	0.00	101	113	PEAK																																																																																																																																																																					
2	4960.00	45.65	54.00	-8.35	63.65	34.10	9.61	61.71	0.00	101	113	AVERAGE																																																																																																																																																																					
3	7440.00	42.46	74.00	-31.54	57.06	35.70	11.77	62.07	0.00	---	---	PEAK																																																																																																																																																																					



Mode	4																																																																																																																																																																																													
	LF																																																																																																																																																																																													
	2400-2483.5_Zigbee_CH11																																																																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																																																																												
Peak QP	Data: 6 Level (dBuV/m) Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>93.05</td><td>20.36</td><td>-23.14</td><td>43.50</td><td>36.30</td><td>15.02</td><td>1.26</td><td>32.22</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>2</td><td>256.01</td><td>26.78</td><td>-19.22</td><td>46.00</td><td>37.53</td><td>19.27</td><td>2.15</td><td>32.17</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>3</td><td>384.05</td><td>38.51</td><td>-7.49</td><td>46.00</td><td>47.00</td><td>21.11</td><td>2.64</td><td>32.24</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>4</td><td>432.55</td><td>39.56</td><td>-6.44</td><td>46.00</td><td>46.69</td><td>22.47</td><td>2.81</td><td>32.41</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>5</td><td>830.25</td><td>32.02</td><td>-13.98</td><td>46.00</td><td>31.55</td><td>28.48</td><td>3.89</td><td>31.90</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr><tr><td>6</td><td>888.45</td><td>31.89</td><td>-14.11</td><td>46.00</td><td>30.15</td><td>29.31</td><td>4.01</td><td>31.58</td><td>---</td><td>Peak</td><td>HORIZONTAL</td></tr></table>	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	93.05	20.36	-23.14	43.50	36.30	15.02	1.26	32.22	---	Peak	HORIZONTAL	2	256.01	26.78	-19.22	46.00	37.53	19.27	2.15	32.17	---	Peak	HORIZONTAL	3	384.05	38.51	-7.49	46.00	47.00	21.11	2.64	32.24	---	Peak	HORIZONTAL	4	432.55	39.56	-6.44	46.00	46.69	22.47	2.81	32.41	---	Peak	HORIZONTAL	5	830.25	32.02	-13.98	46.00	31.55	28.48	3.89	31.90	---	Peak	HORIZONTAL	6	888.45	31.89	-14.11	46.00	30.15	29.31	4.01	31.58	---	Peak	HORIZONTAL	Data: 1 Level (dBuV/m) Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th><th>Pol/Phas</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>48.43</td><td>28.86</td><td>-11.14</td><td>40.00</td><td>45.36</td><td>15.45</td><td>0.98</td><td>32.93</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>2</td><td>432.55</td><td>29.25</td><td>-16.75</td><td>46.00</td><td>36.77</td><td>22.58</td><td>3.09</td><td>33.19</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>3</td><td>480.08</td><td>30.09</td><td>-15.91</td><td>46.00</td><td>36.62</td><td>23.60</td><td>3.14</td><td>33.27</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>4</td><td>560.59</td><td>34.90</td><td>-11.10</td><td>46.00</td><td>39.84</td><td>25.33</td><td>3.29</td><td>33.56</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>5</td><td>828.31</td><td>36.62</td><td>-9.38</td><td>46.00</td><td>36.93</td><td>28.45</td><td>4.24</td><td>33.00</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr><tr><td>6</td><td>982.54</td><td>31.72</td><td>-22.28</td><td>54.00</td><td>28.25</td><td>30.33</td><td>4.65</td><td>31.51</td><td>---</td><td>Peak</td><td>VERTICAL</td></tr></table>	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	48.43	28.86	-11.14	40.00	45.36	15.45	0.98	32.93	---	Peak	VERTICAL	2	432.55	29.25	-16.75	46.00	36.77	22.58	3.09	33.19	---	Peak	VERTICAL	3	480.08	30.09	-15.91	46.00	36.62	23.60	3.14	33.27	---	Peak	VERTICAL	4	560.59	34.90	-11.10	46.00	39.84	25.33	3.29	33.56	---	Peak	VERTICAL	5	828.31	36.62	-9.38	46.00	36.93	28.45	4.24	33.00	---	Peak	VERTICAL	6	982.54	31.72	-22.28	54.00	28.25	30.33	4.65	31.51	---	Peak	VERTICAL
	Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																					
1	93.05	20.36	-23.14	43.50	36.30	15.02	1.26	32.22	---	Peak	HORIZONTAL																																																																																																																																																																																			
2	256.01	26.78	-19.22	46.00	37.53	19.27	2.15	32.17	---	Peak	HORIZONTAL																																																																																																																																																																																			
3	384.05	38.51	-7.49	46.00	47.00	21.11	2.64	32.24	---	Peak	HORIZONTAL																																																																																																																																																																																			
4	432.55	39.56	-6.44	46.00	46.69	22.47	2.81	32.41	---	Peak	HORIZONTAL																																																																																																																																																																																			
5	830.25	32.02	-13.98	46.00	31.55	28.48	3.89	31.90	---	Peak	HORIZONTAL																																																																																																																																																																																			
6	888.45	31.89	-14.11	46.00	30.15	29.31	4.01	31.58	---	Peak	HORIZONTAL																																																																																																																																																																																			
Freq	Level	Over Limit	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																																																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																					
1	48.43	28.86	-11.14	40.00	45.36	15.45	0.98	32.93	---	Peak	VERTICAL																																																																																																																																																																																			
2	432.55	29.25	-16.75	46.00	36.77	22.58	3.09	33.19	---	Peak	VERTICAL																																																																																																																																																																																			
3	480.08	30.09	-15.91	46.00	36.62	23.60	3.14	33.27	---	Peak	VERTICAL																																																																																																																																																																																			
4	560.59	34.90	-11.10	46.00	39.84	25.33	3.29	33.56	---	Peak	VERTICAL																																																																																																																																																																																			
5	828.31	36.62	-9.38	46.00	36.93	28.45	4.24	33.00	---	Peak	VERTICAL																																																																																																																																																																																			
6	982.54	31.72	-22.28	54.00	28.25	30.33	4.65	31.51	---	Peak	VERTICAL																																																																																																																																																																																			

Appendix D. Duty Cycle Plots

Mode	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Zigbee	100	-	-	10Hz

Zigbee 250kbps

