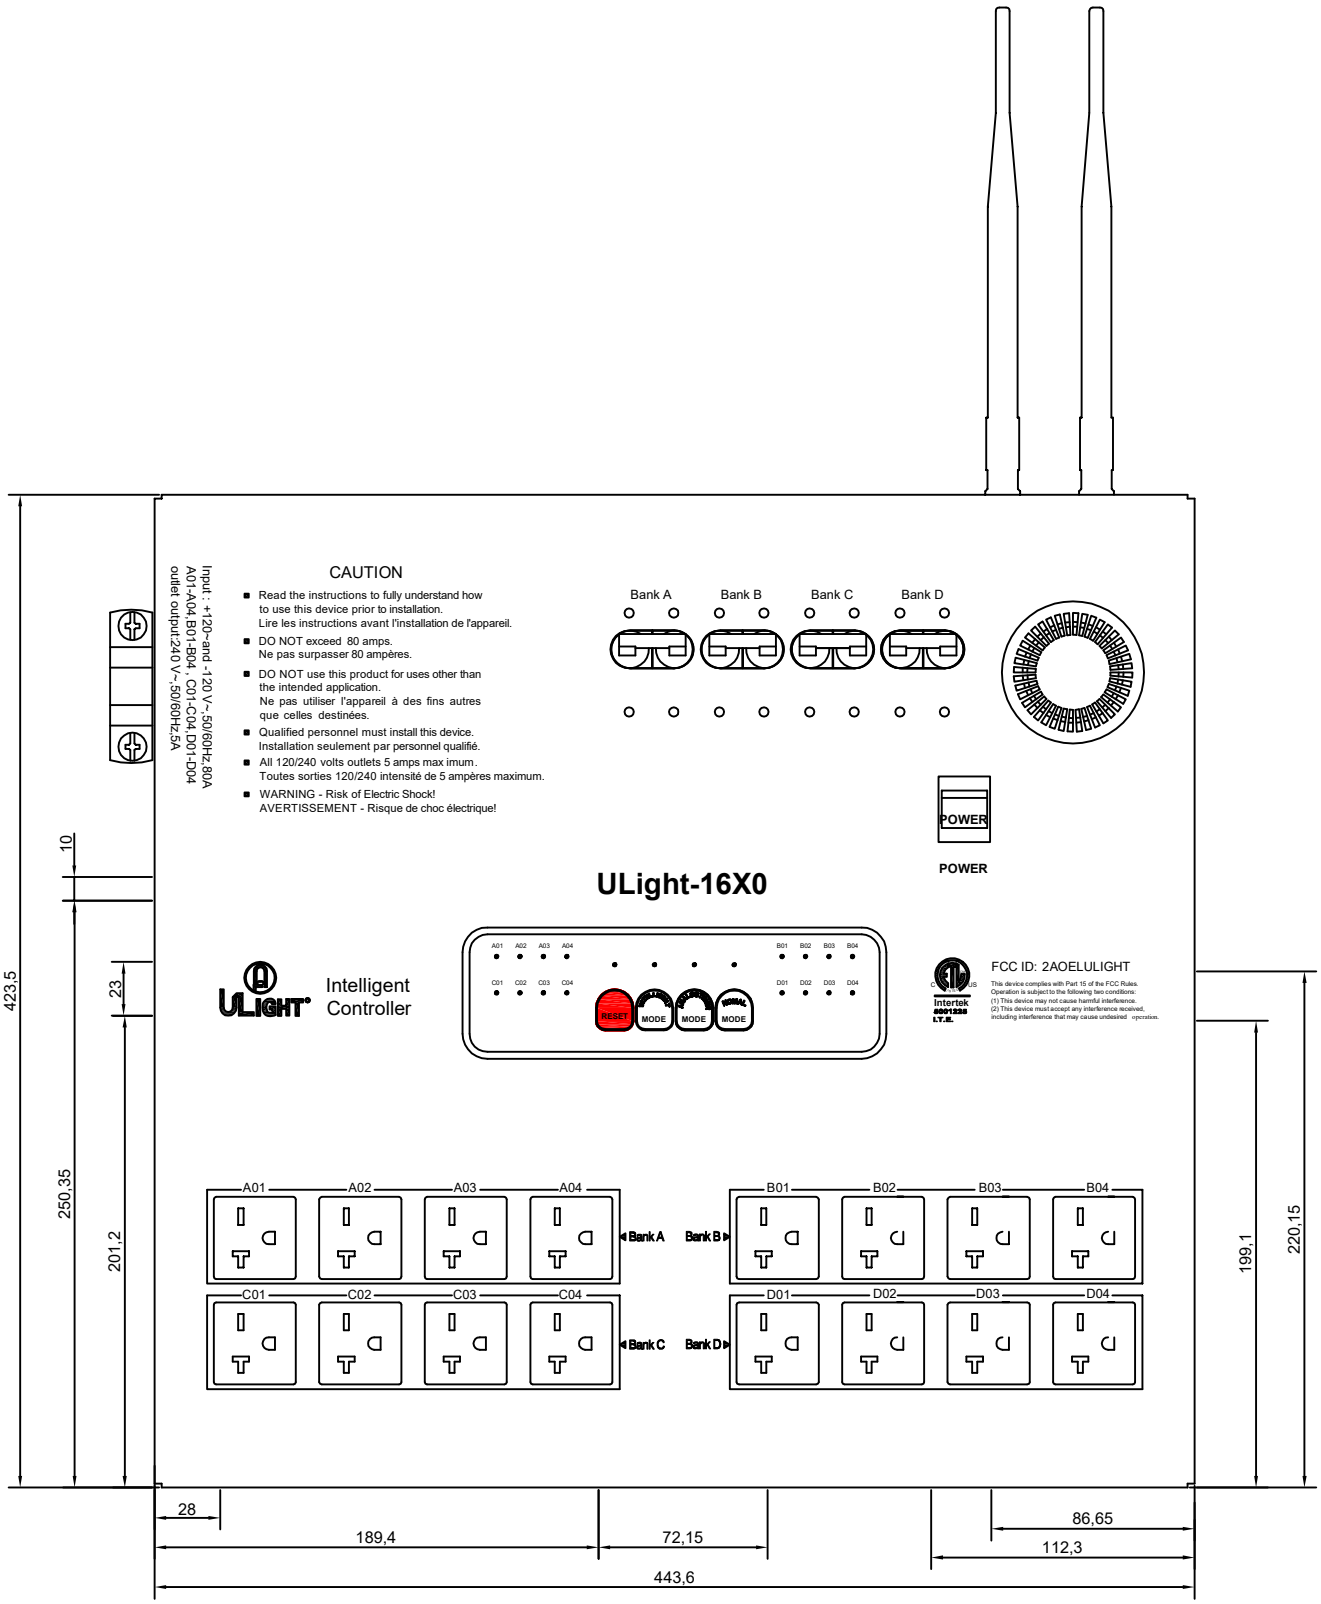
Input : +120~and -120 V~,50/60Hz,80A
A01-A04,B01-B04 , C01-C04,D01-D04
outlet output:240 V~,50/60Hz,5A
CAUTION
Read the instructions to fully understand how to use this device prior to installation.
Lire les instructions avant l'installation de l'appareil.
DO NOT exceed 80 amps.
Ne pas surpasser 80 ampères.
DO NOT use this product for uses other than the intended application.
Ne pas utiliser l'appareil à des fins autres que celles destinées.
Qualified personnel must install this device.
Installation seulement par personnel qualifié.
All 120/240 volts outlets 5 amps max imum.
Toutes sorties 120/240 intensité de 5 ampères maximum.
WARNING - Risk of Electric Shock!
AVERTISSEMENT - Risque de choc électrique!
Bank A
Bank B
Bank C
Bank D
POWER
POWER
ULight-16X0
Intelligent Controller
RESET
MODE
MODE
MODE
FCC ID: 2AOELULIGHT
This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference.
(2) This device must accept any interference received, including interference that may cause undesired operation.
A01 A02 A03 A04
B01 B02 B03 B04
C01 C02 C03 C04
D01 D02 D03 D04
Bank A
Bank B
Bank C
Bank D
423,5
250,35
201,2
10
23
199,1
220,15
28
189,4
72,15
86,65
112,3
443,6