



REPORT No.: SZ26020032W01

TEST REPORT

APPLICANT : Zhejiang Lierda Internet of Things
Technology Co., Ltd.

PRODUCT NAME : YB86 Series IoT Wi-Fi Module

MODEL NAME : L-WFIYB86-G5PP4, L-WFIYB86-G5PN4,
L-WFIYB86-G5PI4

BRAND NAME : N/A

FCC ID : 2AOFD-YB86

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2026-03-05

TEST DATE : 2026-03-14 to 2026-04-27

ISSUE DATE : 2026-05-26



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	10
2.4. Test Configuration of EUT	11
2.5. Test Conditions	11
2.6. Test Setup Layout Diagram	11
3. Test Results	14
3.1. Antenna Requirement	14
3.2. Duty Cycle of Test Signal	15
3.3. Maximum Peak Conducted Output Power	16
3.4. Maximum Average Conducted Output Power	17
3.5. 6 dB Bandwidth	18
3.6. Conducted Spurious Emissions and Band Edge	19
3.7. Power Spectral Density	20
3.8. Conducted Emission	21
3.9. Restricted Frequency Bands	22
3.10. Radiated Emission	23
Annex A Test Data and Result	25
Notes	90



REPORT No.: SZ26020032W01

Change History		
Version	Date	Reason for change
1.0	2026-05-26	First edition



1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	/
2	N/A	Duty Cycle of Test Signal	Mar. 31, 2026	Li Xinpeng	PASS	/
3	15.247(b)	Maximum Peak Conducted Output Power	Mar. 31, 2026	Li Xinpeng	PASS	/
4	15.247(b)	Maximum Average Conducted Output Power	Mar. 31, 2026	Li Xinpeng	PASS	/
5	15.247(a)	Bandwidth	Mar. 31, 2026	Li Xinpeng	PASS	/
6	15.247(d)	Conducted Spurious Emission and Band Edge	Mar. 31, 2026	Li Xinpeng	PASS	/
7	15.247(e)	Power Spectral Density	Mar. 31, 2026	Li Xinpeng	PASS	/
8	15.207	Conducted Emission	N/A	N/A ^{Note1}	N/A	/
9	15.247(d)	Restricted Frequency Bands	Mar. 14, 2026	Xiong Xianhong	PASS	/
10	15.209, 15.247(d)	Radiated Emission	Mar. 14, 2026	Xiong Xianhong	PASS	/

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2020 and KDB 558074 D01 v05r02.

Note 3: Any additions, deviation, or exclusions from the method shall be noted in the “Remark”.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipment

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2025.12.23	2026.12.22
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
JS32-RE	Tonscend	5.0.0

**1.2.3 Radiated Test Equipment**

Equipment	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Signal Analyzer	MY56060145	N9020A	Agilent	2025.05.13	2026.05.12
Test Antenna - Bi-Log	9163-274	VULB 9163	Schwarzbeck	2025.06.28	2026.06.27
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2025.05.16	2026.05.15
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2025.06.20	2026.06.19
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2025.06.20	2026.06.19
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025.05.13	2026.05.12
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025.05.13	2026.05.12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-KK-0.5	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-KKF-2	Qualwave	2025.09.03	2026.09.02
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-NN-5	Qualwave	2025.09.03	2026.09.02
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	N/A	N/A
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.06.21	2028.06.20
Anechoic Chamber	N/A	9m*6m*6m	CRT	2025.04.19	2028.04.18



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
FCC Designation Number:	CN1192
FCC Test Firm Registration Number:	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant:	Zhejiang Lierda Internet of Things Technology Co., Ltd.
Applicant Address:	Room 1402, Building 1, No.1326, Wenyi West Road, Cangqian street, Yuhang District, Hangzhou, Zhejiang Prov. China
Manufacturer:	Zhejiang Lierda Internet of Things Technology Co., Ltd.
Manufacturer Address:	Room 1402, Building 1, No.1326, Wenyi West Road, Cangqian street, Yuhang District, Hangzhou, Zhejiang Prov. China

2.2. Information of EUT

Product Name:	YB86 Series IoT Wi-Fi Module
Sample No.:	7#, 10#
Hardware Version:	V01
Software Version:	V01
Equipment Type:	Bluetooth LE
Bluetooth Version:	5.0
Modulation Type:	GFSK
Data Rate:	1Mbps, 2Mbps
Operating Frequency Range:	2402MHz-2480MHz
Antenna Type:	ANT1: PCB Antenna ANT2: Rod-shaped Antenna
Antenna Gain:	ANT1: 2.81dBi ANT2: 1.96dBi

Note 1: The EUT description presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

Note 2: According to the certificate holder, they declared that the models L-WFIYB86-G5PP4, L-WFIYB86-G5PN4, L-WFIYB86-G5PI4 have the same hardware and software, only differ in the following content:

L-WFIYB86-G5PP4 without IPEX antenna terminal, module's pin1 is invalid;

L-WFIYB86-G5PI4 with IPEX antenna terminal, module's pin1 is invalid;

L-WFIYB86-G5PN4 without IPEX antenna terminal, module's pin1 is valid.

The main measuring model is L-WFIYB86-G5PP4, only the results for L-WFIYB86-G5PP4 were



recorded in this report.

Note 3: The EUT can be used with two kinds of antenna and it operates in single antenna. Both of the two antennas were evaluated separately, only the worst test result(ANT2) were recorded in the test report.

2.3.Channel List of EUT

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT


The EUT is controlled by dedicated software to transmit at the default maximum power level.

2.5. Test Conditions


Temperature (°C):	15-35
Relative Humidity (%):	30-60
Atmospheric Pressure (kPa):	86-106

2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement

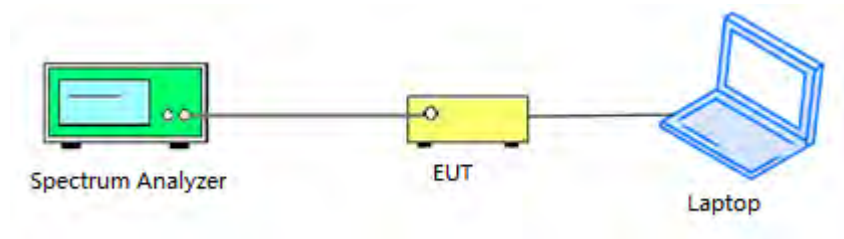


2.6.2. Conducted Emission Measurement

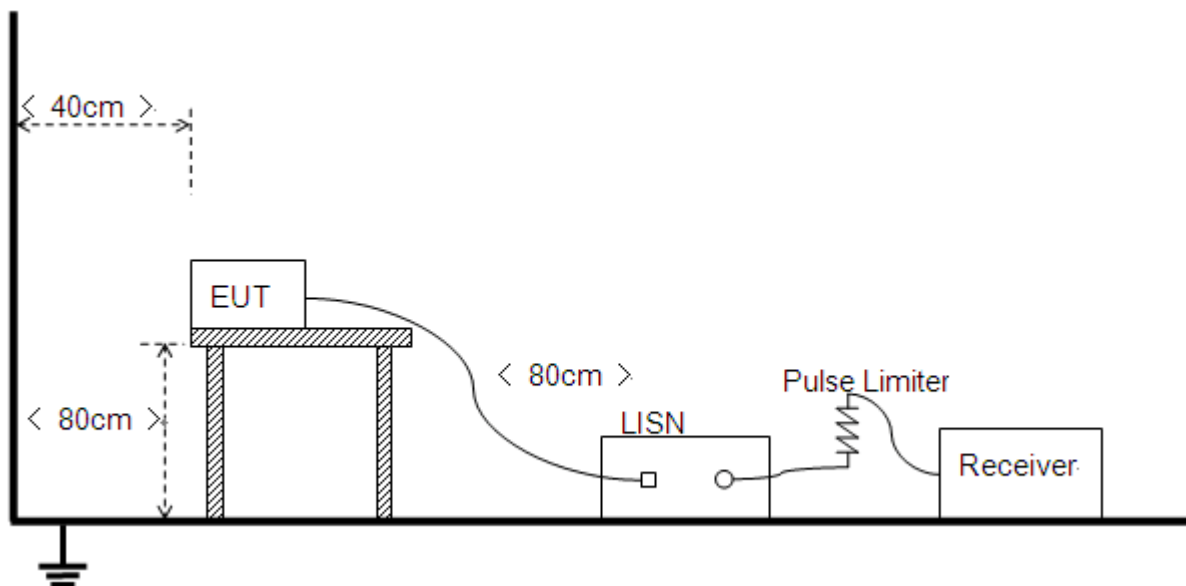


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

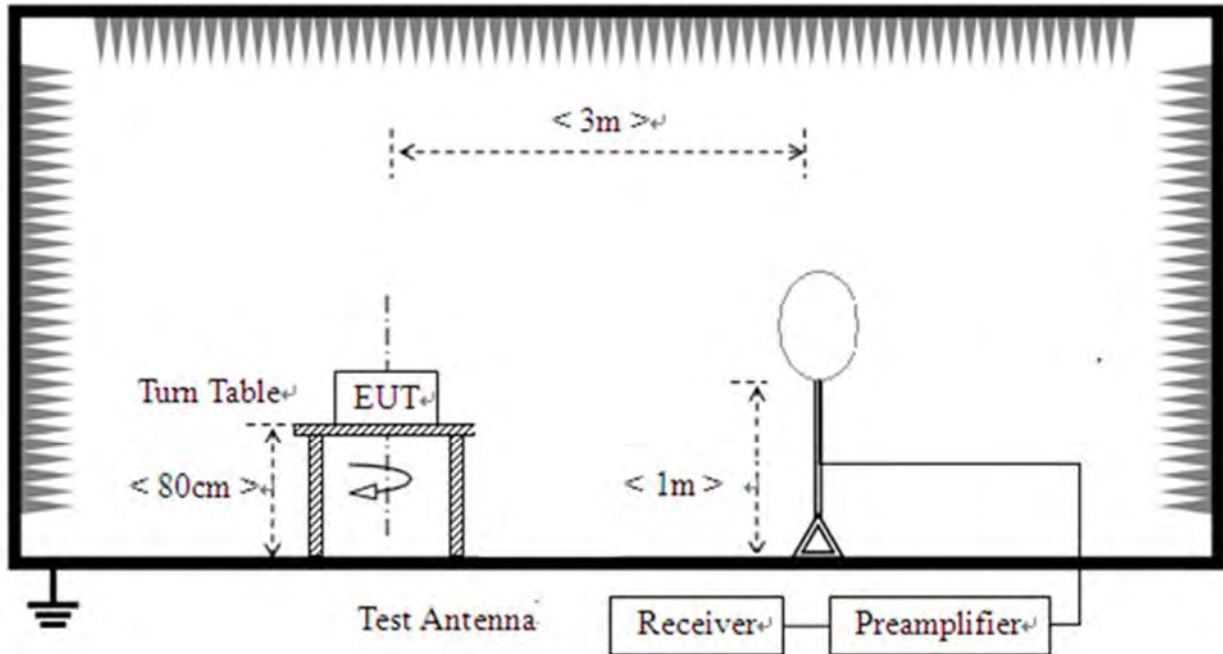

2) For radiated emissions from 30MHz to 1GHz

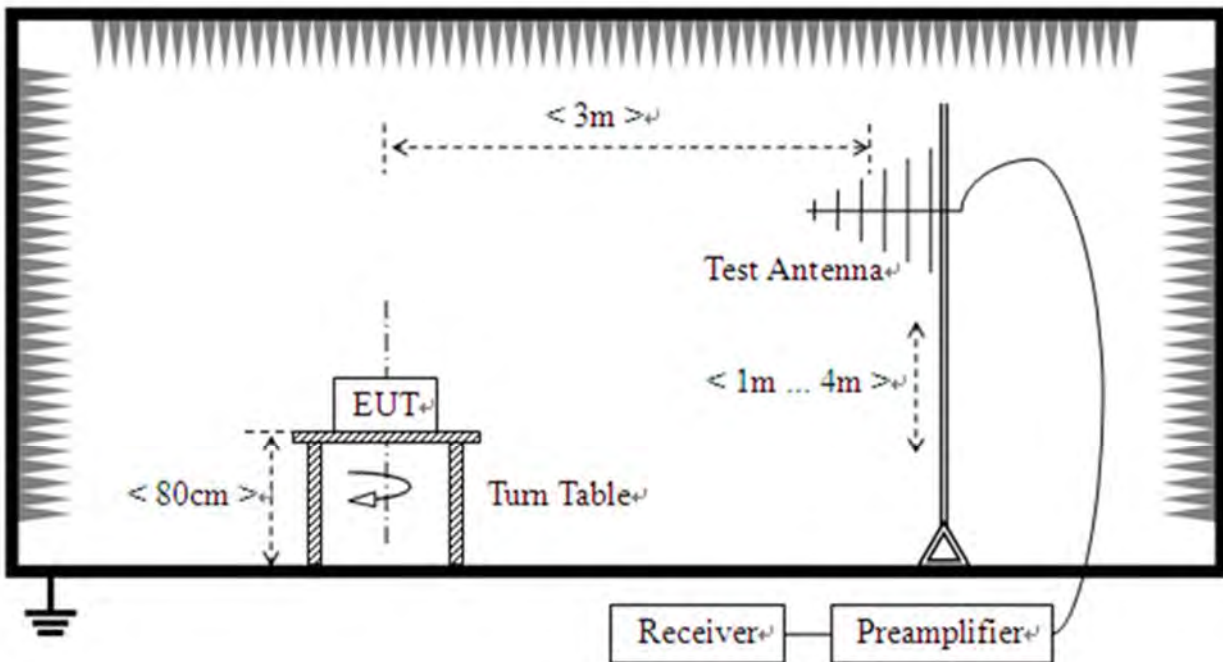

3) For radiated emissions above 1GHz

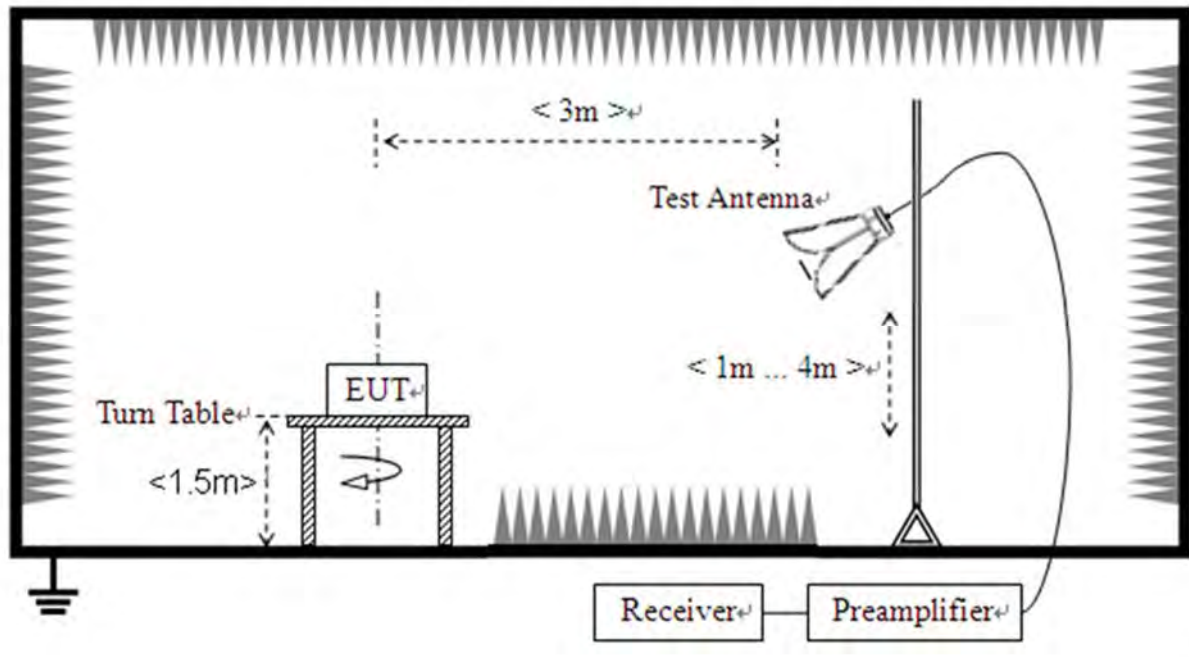



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

Model Name	Antenna location	Antenna Type	Coupling Method
L-WFIYB86-G5PP4	External	PCB Antenna	Layout
L-WFIYB86-G5PN4	External	PCB Antenna	I-PEX Connector
L-WFIYB86-G5PI4	External	Rod-shaped Antenna	RP-SMA Connector

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration(T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e.,no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

KDB 558074 Section 8.3.1 was used in order to prove compliance.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 in this report.



3.4. Maximum Average Conducted Output Power

3.4.1. Requirement

According to FCC section 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum average conducted output power of the intentional radiator shall not exceed 1 Watt.

3.4.2. Test Procedures

KDB 558074 Section 8.3.2 was used in order to prove compliance.

3.4.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.4. Test Result

Refer to Annex A.3 in this report.



3.5.6 dB Bandwidth

3.5.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.5.1.Test Procedures

The steps for the first option are as follows:

- a) Set analyzer center frequency to channel center frequency
- b) Set RBW to 100kHz
- c) Set VBW to 300kHz
- d) Detector = peak.
- e) Trace mode = max hold
- f) Sweep time = auto couple
- g) Allow the trace to fully stabilize
- h) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., $RBW = 100\text{ kHz}$, $VBW \geq 3 \times RBW$, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be $\geq 6\text{ dB}$.

3.5.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.3.Test Result

Refer to Annex A.4 in this report.



3.6. Conducted Spurious Emissions and Band Edge

3.6.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.6.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.5 and A.6 in this report.



3.7. Power Spectral Density

3.7.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.7.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 3kHz
- d) Set VBW to 10kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level within the RBW

3.7.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.7.4. Test Result

Refer to Annex A.7 in this report.

3.8. Conducted Emission

3.8.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.8.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10.

3.8.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.8.4. Test Result

This test case does not apply this kind of EUT.



3.9. Restricted Frequency Bands

3.9.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.9.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.9.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4. Test Result

Refer to Annex A.8 in this report.

3.10. Radiated Emission

3.10.1.Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2:For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK).In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.10.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.10.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.10.4.Test Result


Refer to Annex A.9 in this report.




Annex A Test Data and Result

A.1. Duty Cycle of Test Signal


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant2	60.64	2.17	2.64
NVNT	BLE 1M	2440	Ant2	60.64	2.17	2.64
NVNT	BLE 1M	2480	Ant2	60.64	2.17	2.64
NVNT	BLE 2M	2402	Ant2	31.04	5.08	5.15
NVNT	BLE 2M	2440	Ant2	31.04	5.08	5.15
NVNT	BLE 2M	2480	Ant2	31.04	5.08	5.15

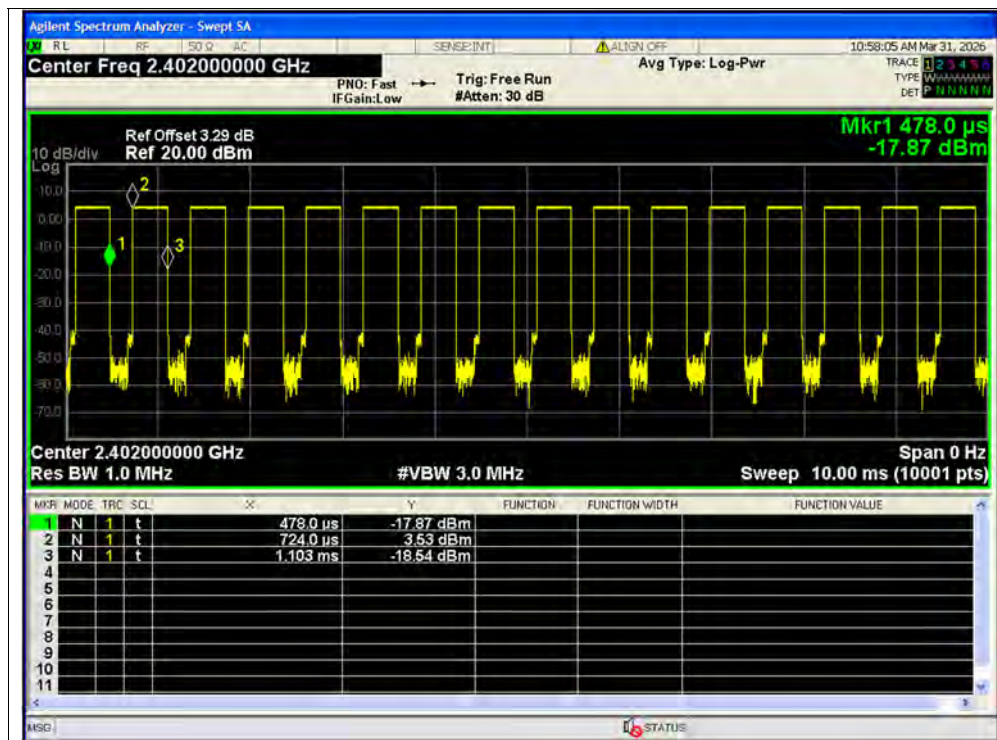


Duty Cycle NVNT BLE 1M 2402MHz Ant2

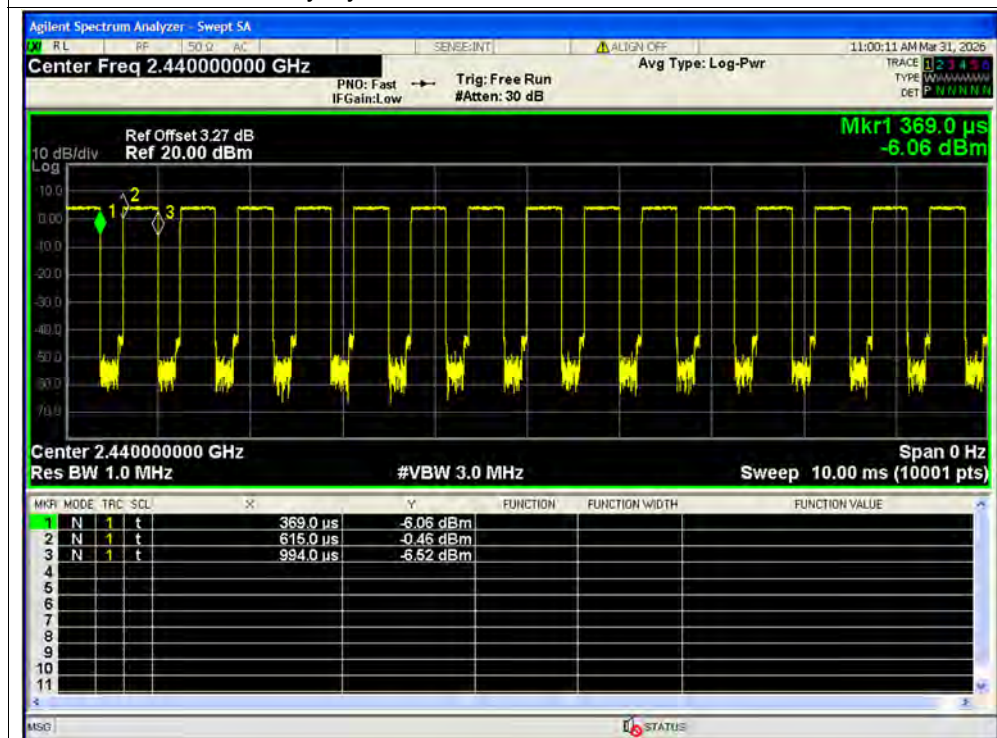


Duty Cycle NVNT BLE 1M 2440MHz Ant2

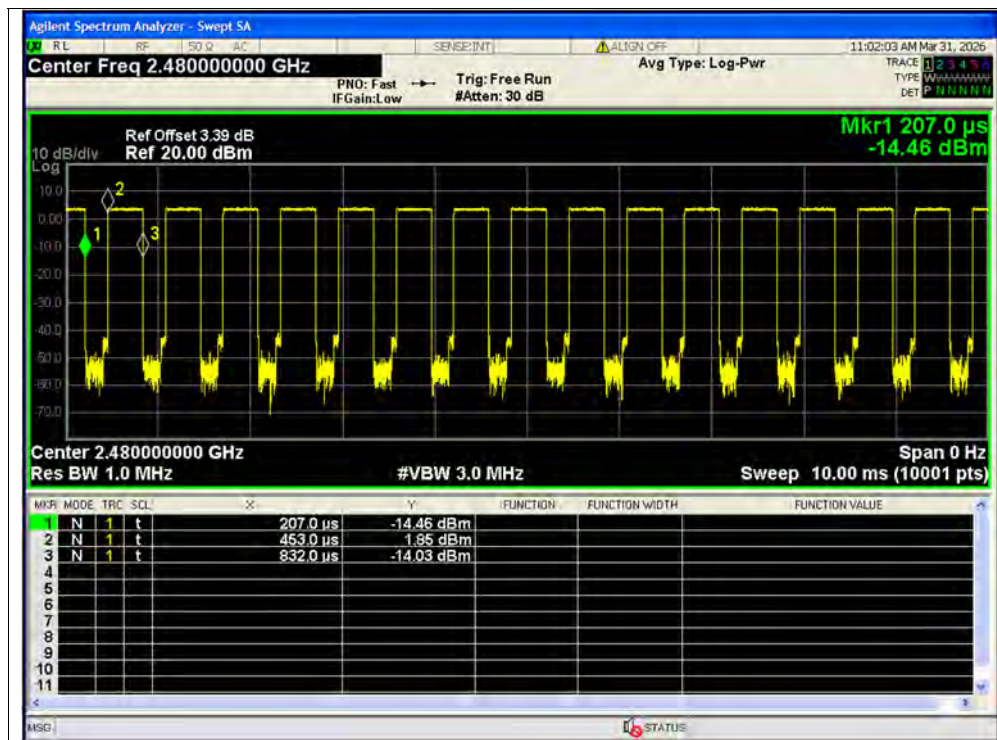


Duty Cycle NVNT BLE 1M 2480MHz Ant2

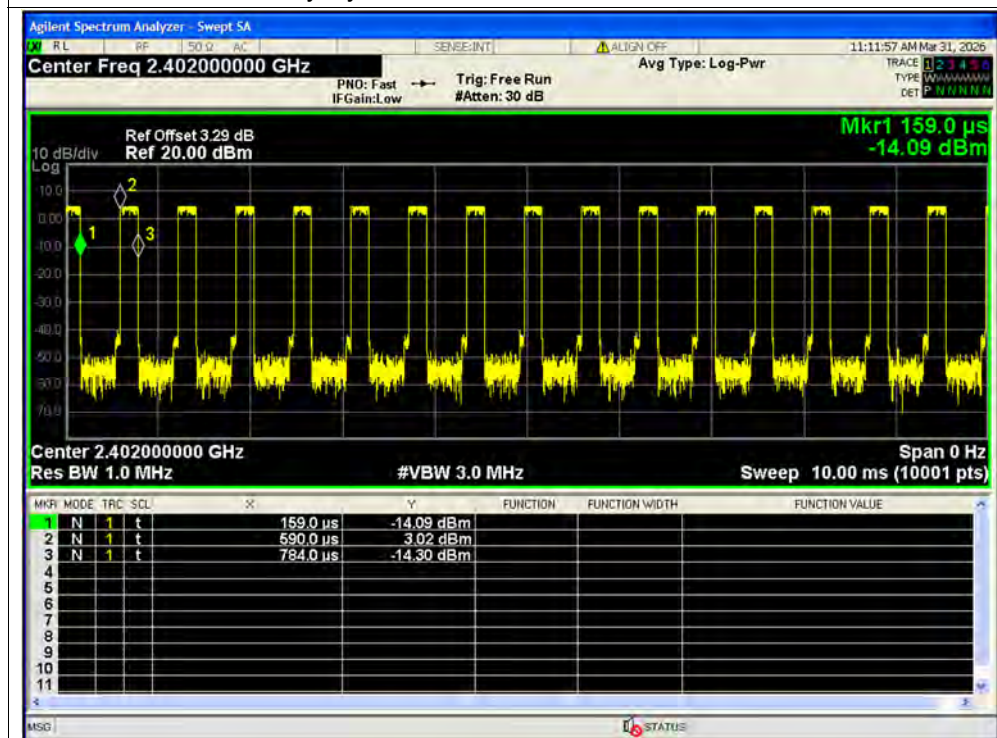

Duty Cycle NVNT BLE 2M 2402MHz Ant2

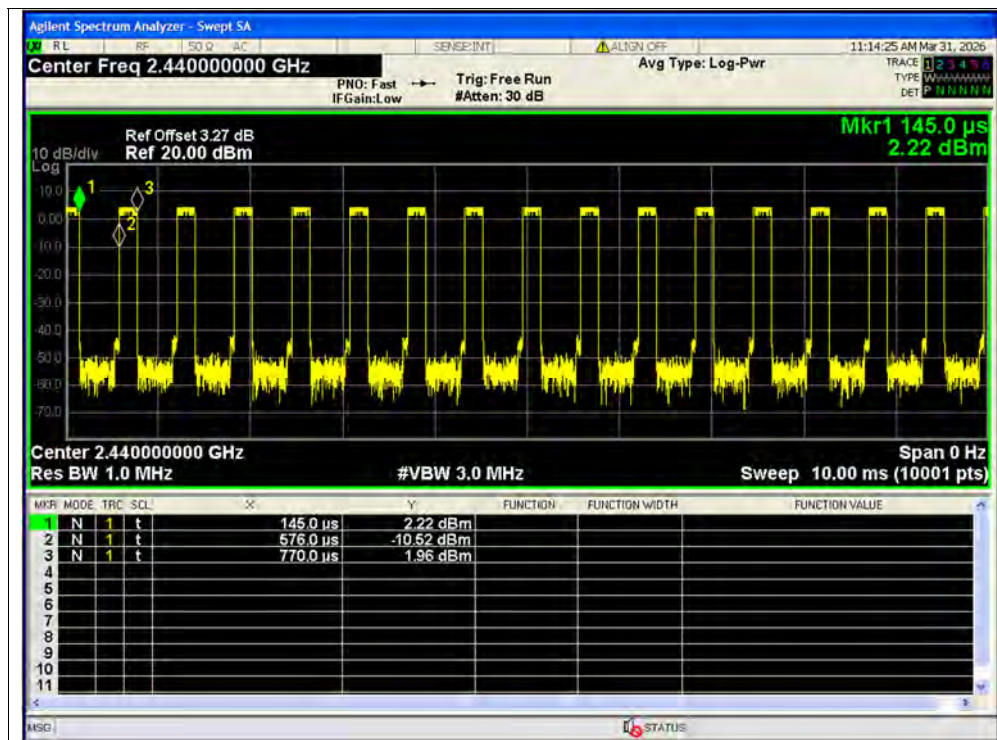

Duty Cycle NVNT BLE 2M 2440MHz Ant2

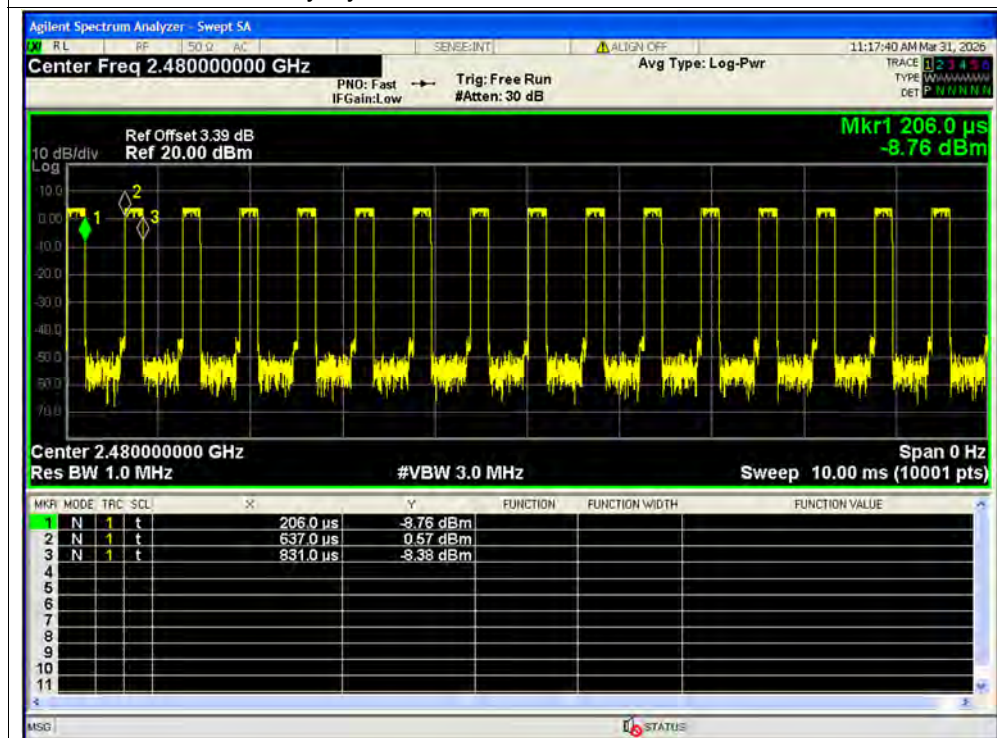


Duty Cycle NVNT BLE 2M 2480MHz Ant2

**A.2. Maximum Peak Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant2	4.87	0	4.87	0.00307	30	Pass
NVNT	BLE 1M	2440	Ant2	4.6	0	4.6	0.00288	30	Pass
NVNT	BLE 1M	2480	Ant2	4.47	0	4.47	0.0028	30	Pass
NVNT	BLE 2M	2402	Ant2	4.97	0	4.97	0.00314	30	Pass
NVNT	BLE 2M	2440	Ant2	4.68	0	4.68	0.00294	30	Pass
NVNT	BLE 2M	2480	Ant2	4.26	0	4.26	0.00267	30	Pass



Peak Power NVNT BLE 1M 2402MHz Ant2

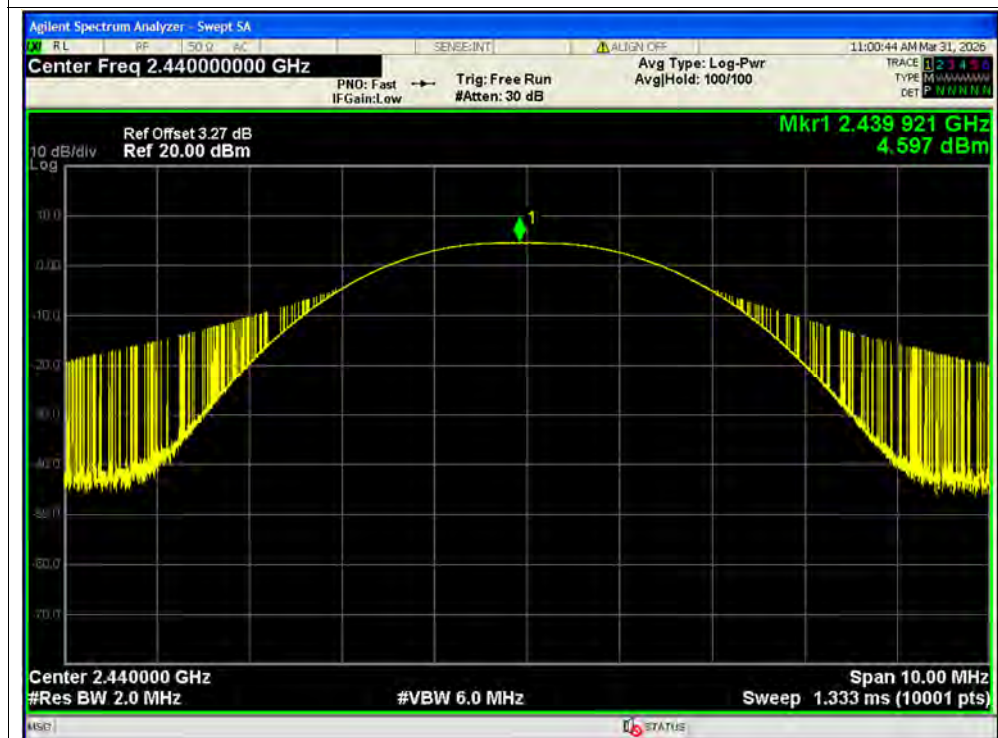


Peak Power NVNT BLE 1M 2440MHz Ant2

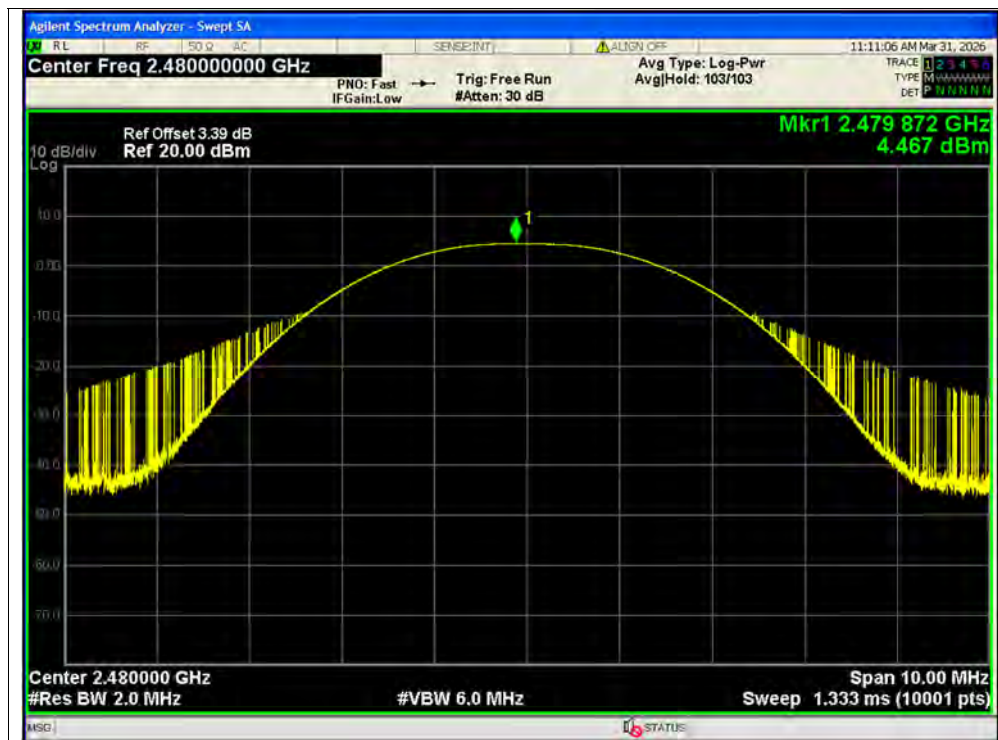

Peak Power NVNT BLE 1M 2480MHz Ant2



Peak Power NVNT BLE 2M 2402MHz Ant2

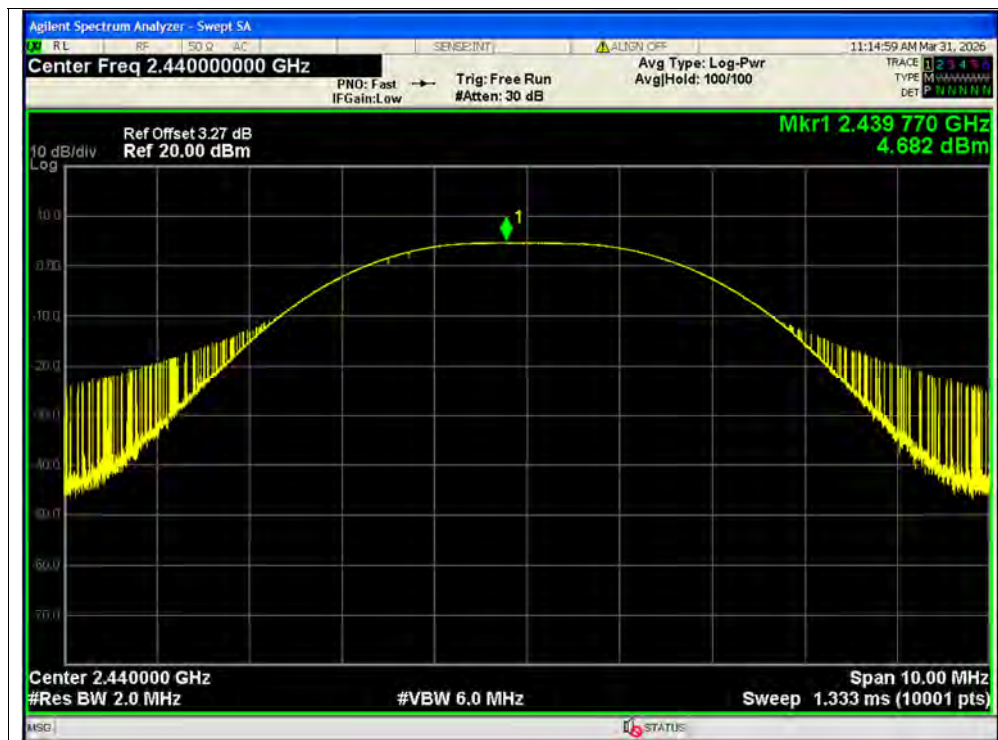

Peak Power NVNT BLE 2M 2440MHz Ant2




Peak Power NVNT BLE 2M 2480MHz Ant2

**A.3. Maximum Average Conducted Output Power**


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Conducted Power (dBm)	Total Conducted Power (W)	Limit Conducted (dBm)	Verdict
NVNT	BLE 1M	2402	Ant2	2.43	2.17	4.6	0.00288	30	Pass
NVNT	BLE 1M	2440	Ant2	2.18	2.17	4.35	0.00272	30	Pass
NVNT	BLE 1M	2480	Ant2	1.85	2.17	4.02	0.00252	30	Pass
NVNT	BLE 2M	2402	Ant2	-0.37	5.08	4.71	0.00296	30	Pass
NVNT	BLE 2M	2440	Ant2	-0.7	5.08	4.38	0.00274	30	Pass
NVNT	BLE 2M	2480	Ant2	-1.13	5.08	3.95	0.00248	30	Pass



Average Power NVNT BLE 1M 2402MHz Ant2

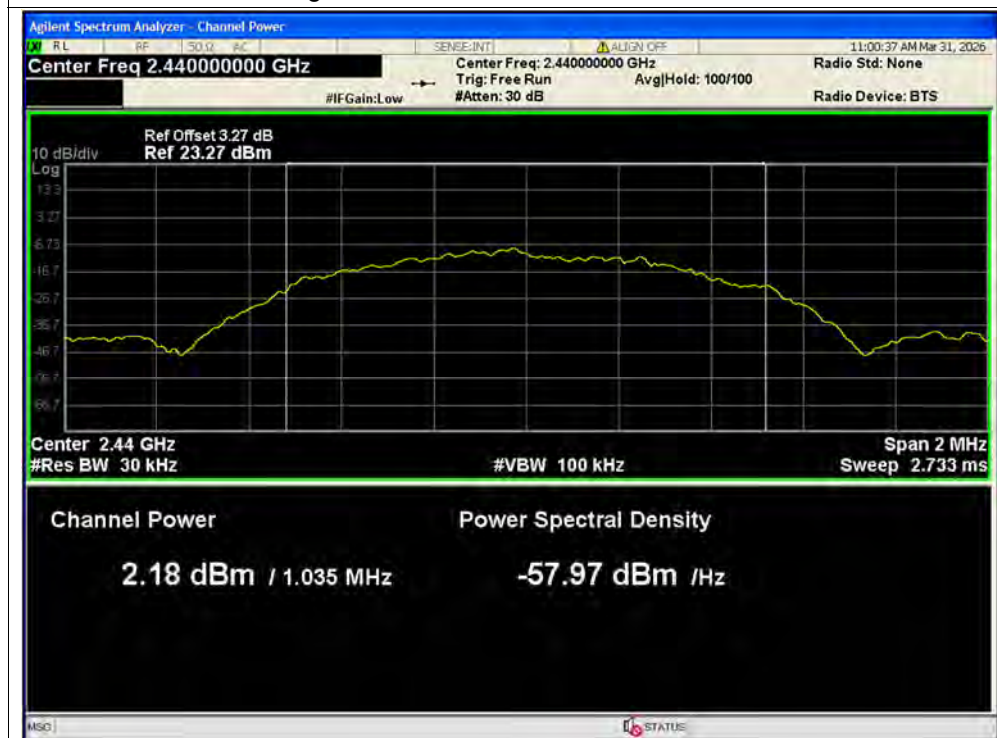

Average Power NVNT BLE 1M 2440MHz Ant2

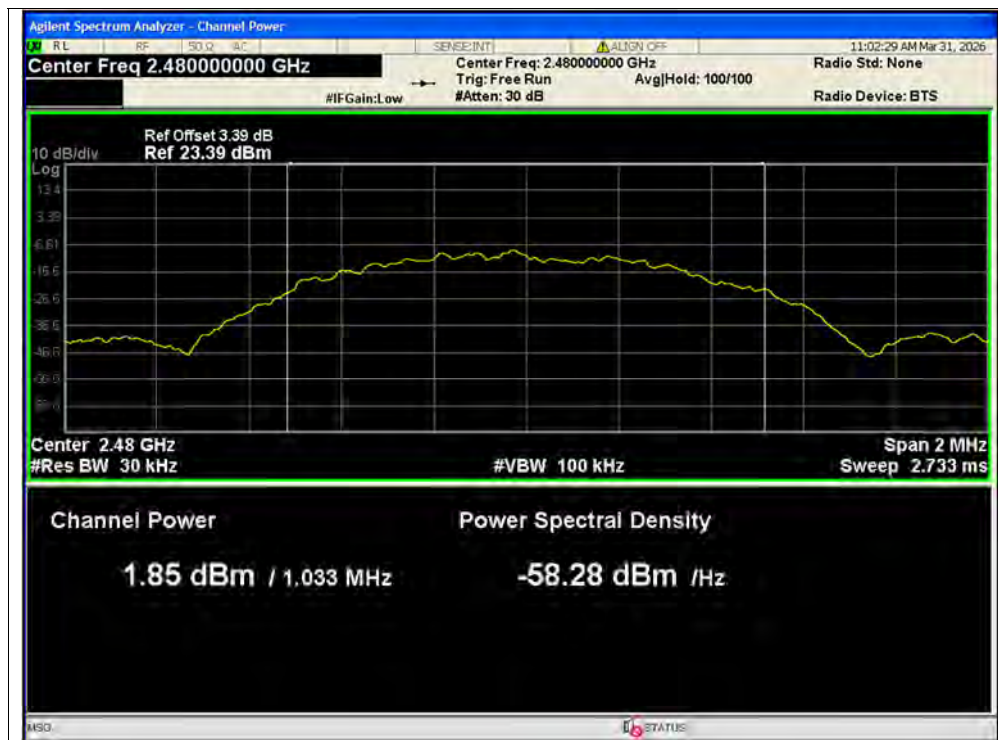

Average Power NVNT BLE 1M 2480MHz Ant2



Average Power NVNT BLE 2M 2402MHz Ant2



Average Power NVNT BLE 2M 2440MHz Ant2



Average Power NVNT BLE 2M 2480MHz Ant2

**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant2	0.6996	0.5	Pass
NVNT	BLE 1M	2440	Ant2	0.7036	0.5	Pass
NVNT	BLE 1M	2480	Ant2	0.6933	0.5	Pass
NVNT	BLE 2M	2402	Ant2	1.168	0.5	Pass
NVNT	BLE 2M	2440	Ant2	1.161	0.5	Pass
NVNT	BLE 2M	2480	Ant2	1.256	0.5	Pass




-6dB Bandwidth NVNT BLE 1M 2402MHz Ant2



-6dB Bandwidth NVNT BLE 1M 2440MHz Ant2



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant2

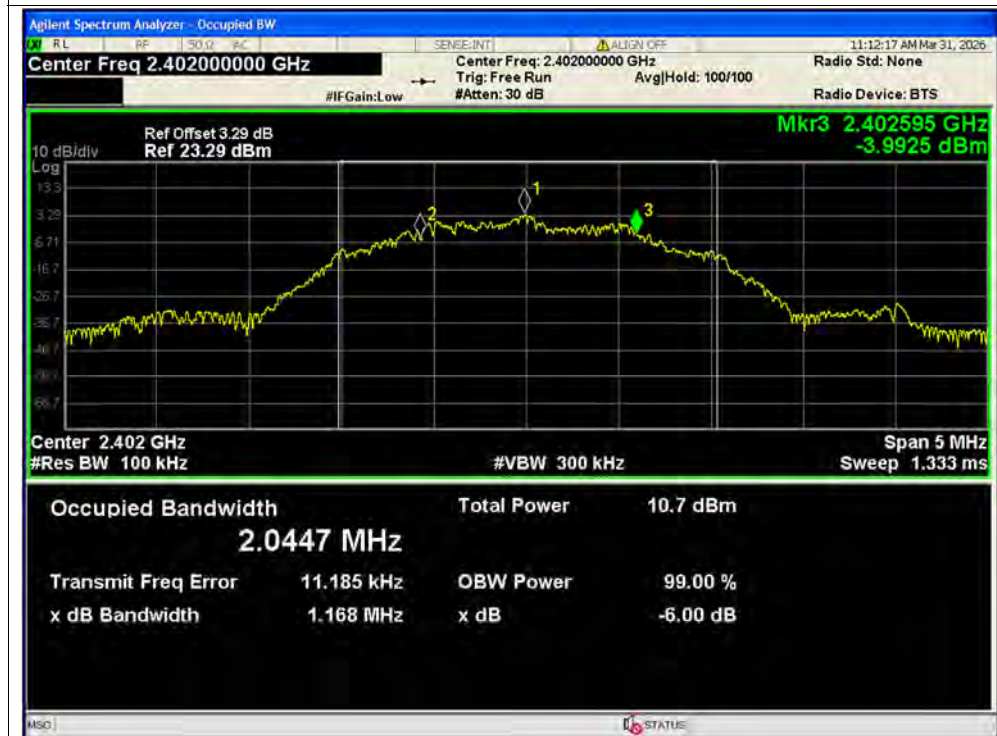

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant2



-6dB Bandwidth NVNT BLE 2M 2440MHz Ant2




-6dB Bandwidth NVNT BLE 2M 2480MHz Ant2

**A.5. Conducted Spurious Emissions**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant2	-43.04	-20	Pass
NVNT	BLE 1M	2440	Ant2	-41.94	-20	Pass
NVNT	BLE 1M	2480	Ant2	-41.02	-20	Pass
NVNT	BLE 2M	2402	Ant2	-41.91	-20	Pass
NVNT	BLE 2M	2440	Ant2	-41.82	-20	Pass
NVNT	BLE 2M	2480	Ant2	-41.82	-20	Pass




Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Ref

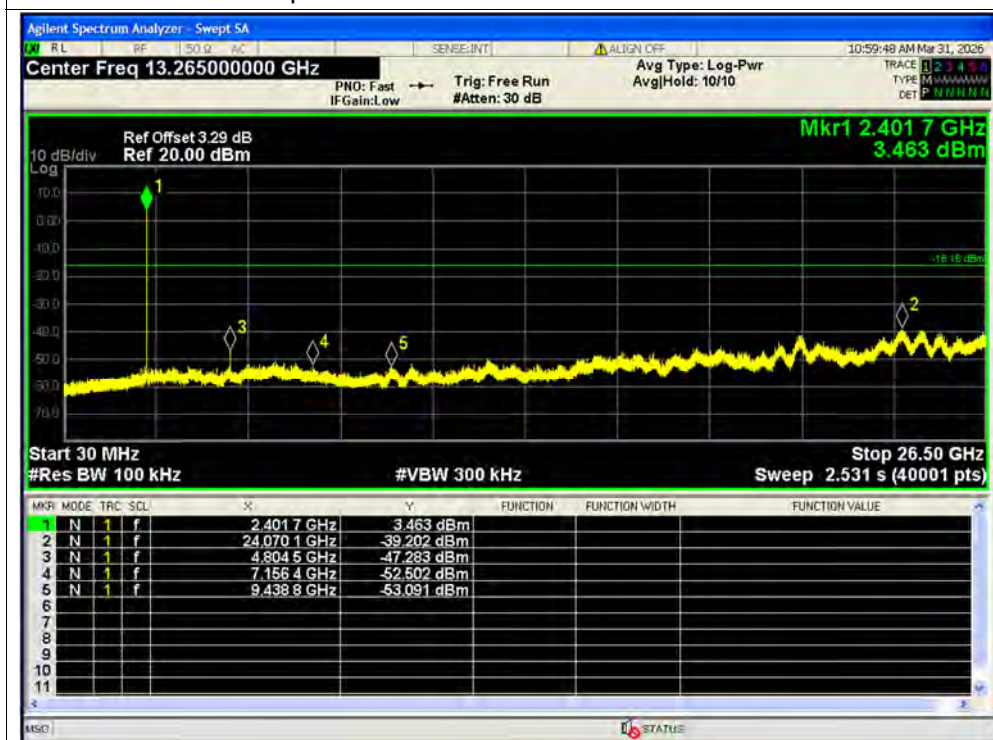

Tx. Spurious NVNT BLE 1M 2402MHz Ant2 Emission




Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Ref

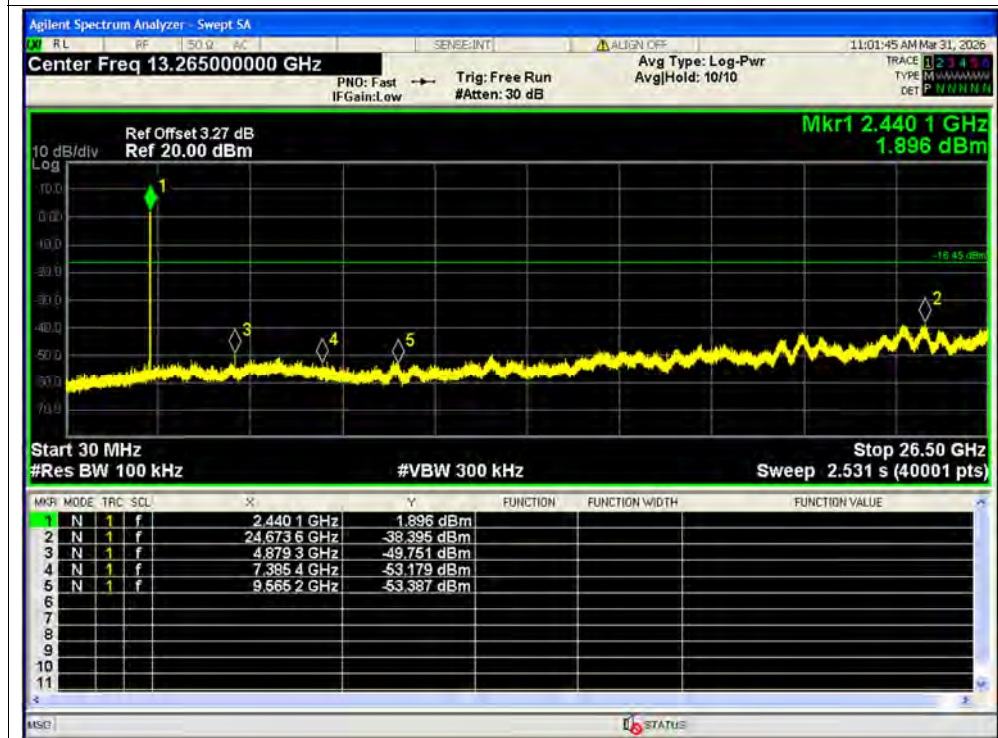

Tx. Spurious NVNT BLE 1M 2440MHz Ant2 Emission




Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Ref

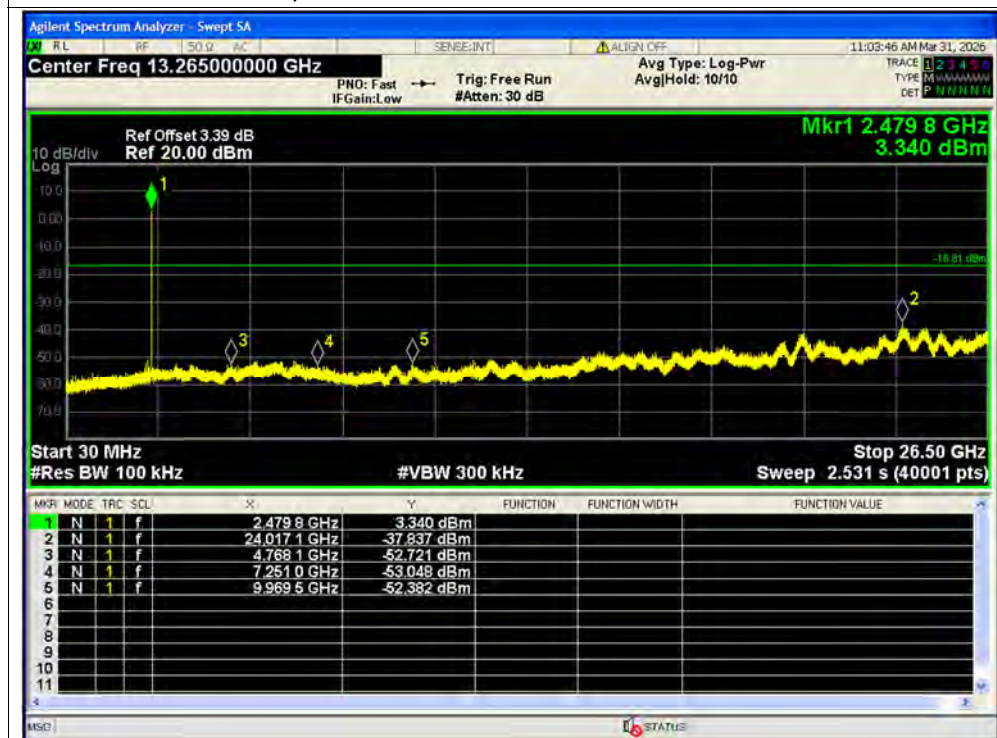

Tx. Spurious NVNT BLE 1M 2480MHz Ant2 Emission




Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Ref

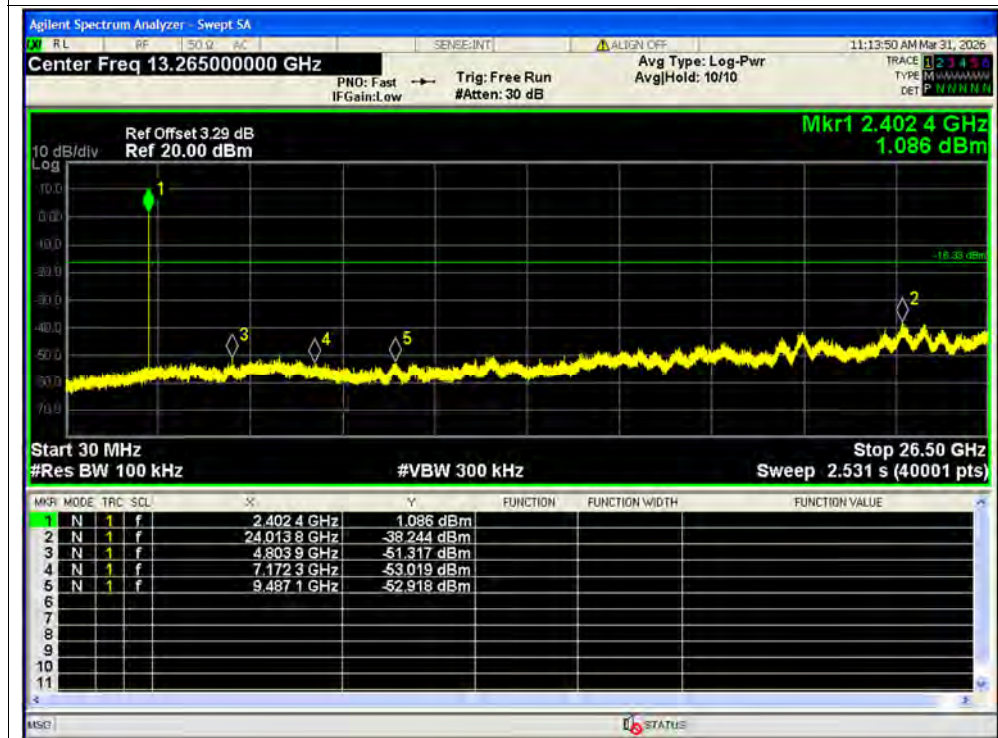

Tx. Spurious NVNT BLE 2M 2402MHz Ant2 Emission




Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Ref

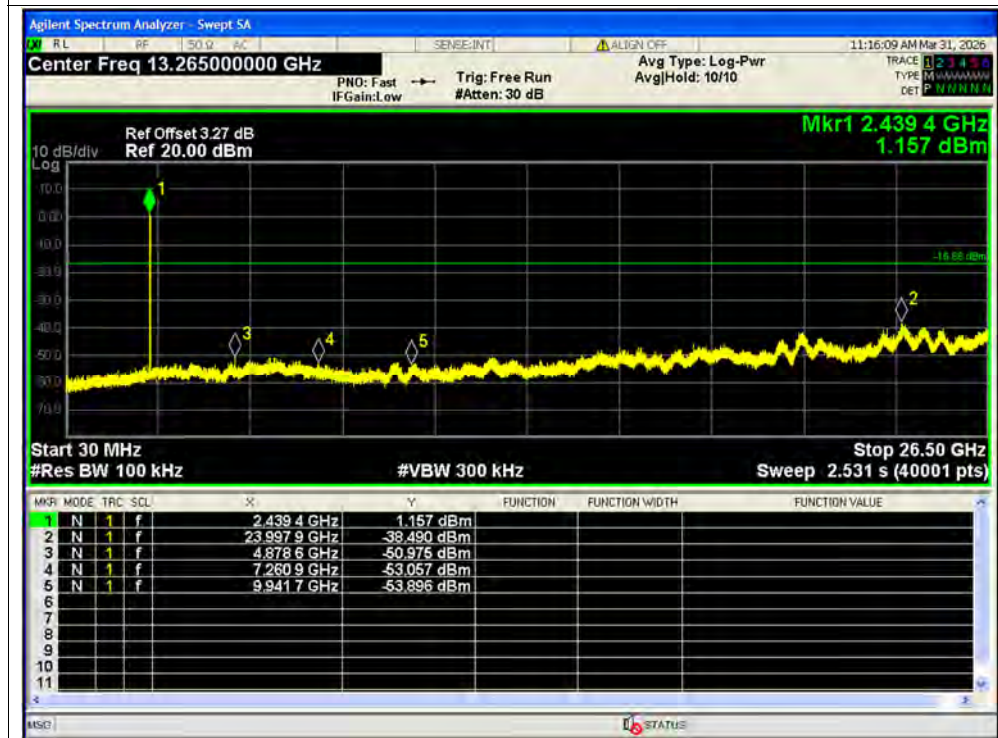

Tx. Spurious NVNT BLE 2M 2440MHz Ant2 Emission



Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Ref

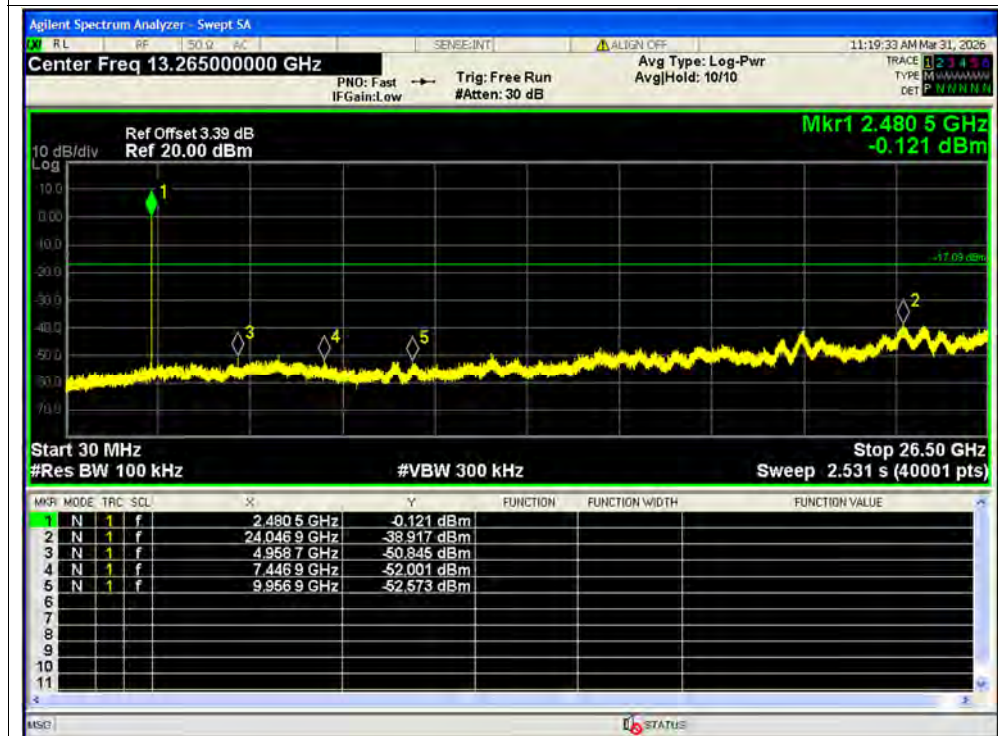

Tx. Spurious NVNT BLE 2M 2480MHz Ant2 Emission




REPORT No.: SZ26020032W01

A.6. Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant2	-37.09	-20	Pass
NVNT	BLE 1M	2480	Ant2	-43.9	-20	Pass
NVNT	BLE 2M	2402	Ant2	-35.67	-20	Pass
NVNT	BLE 2M	2480	Ant2	-49.18	-20	Pass




Band Edge NVNT BLE 1M 2402MHz Ant2 Ref

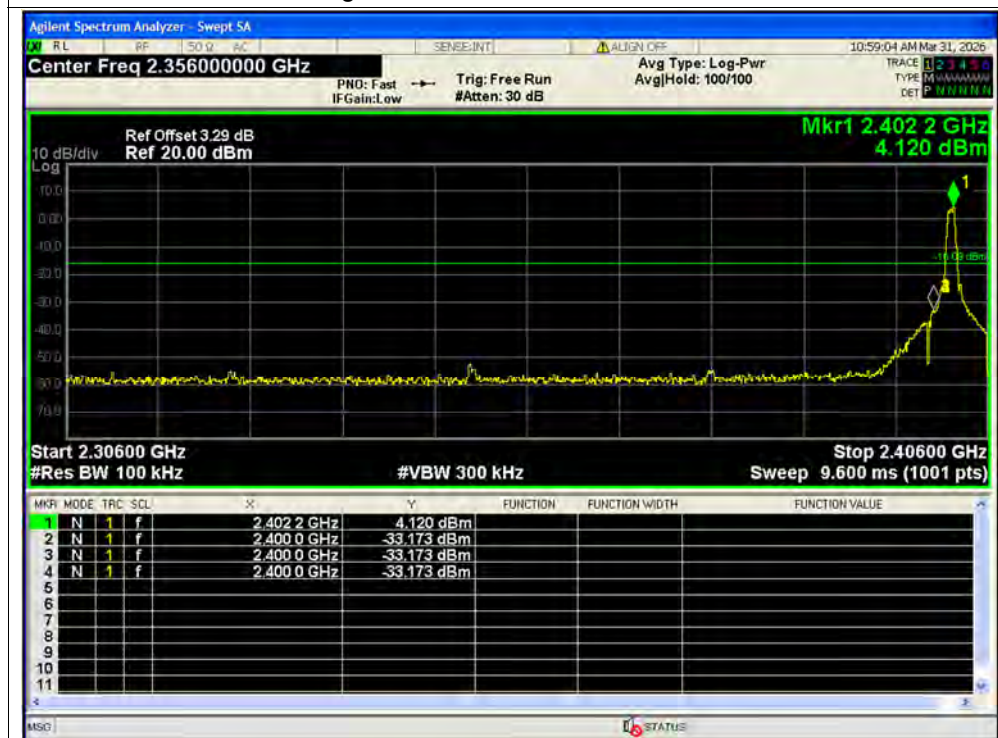

Band Edge NVNT BLE 1M 2402MHz Ant2 Emission




Band Edge NVNT BLE 1M 2480MHz Ant2 Ref

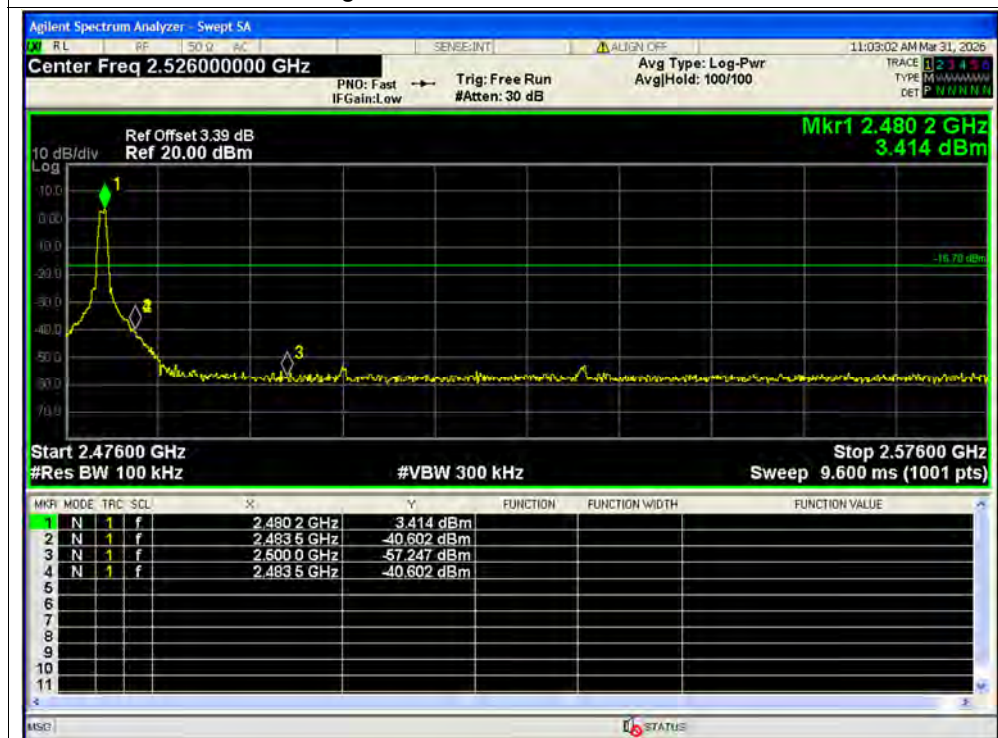

Band Edge NVNT BLE 1M 2480MHz Ant2 Emission




Band Edge NVNT BLE 2M 2402MHz Ant2 Ref

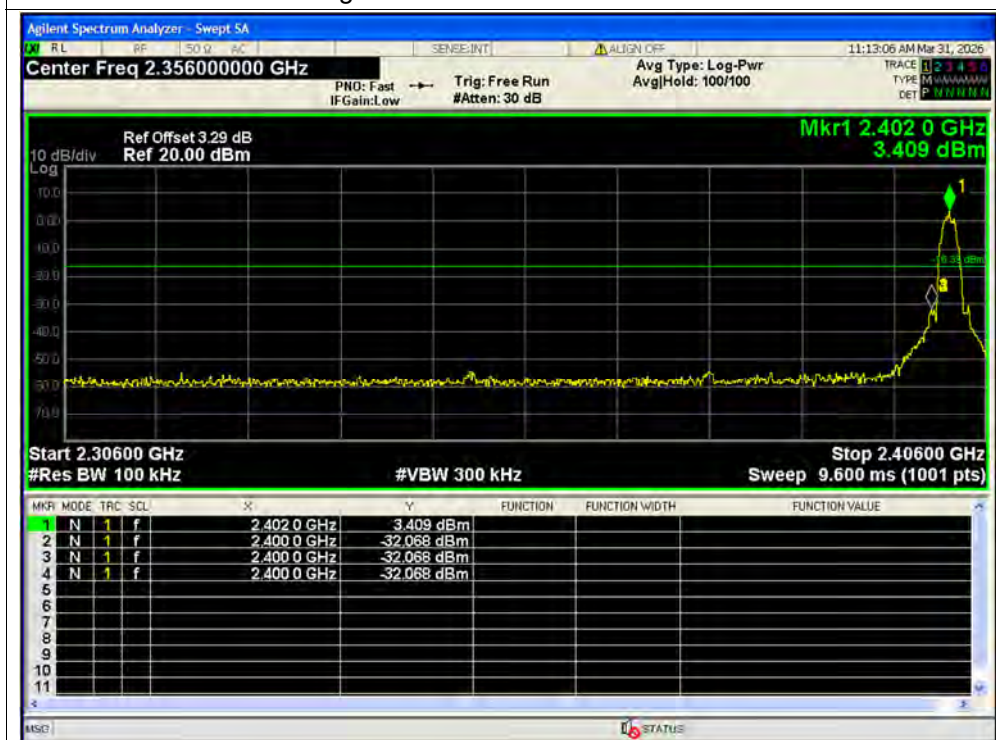

Band Edge NVNT BLE 2M 2402MHz Ant2 Emission





Band Edge NVNT BLE 2M 2480MHz Ant2 Ref

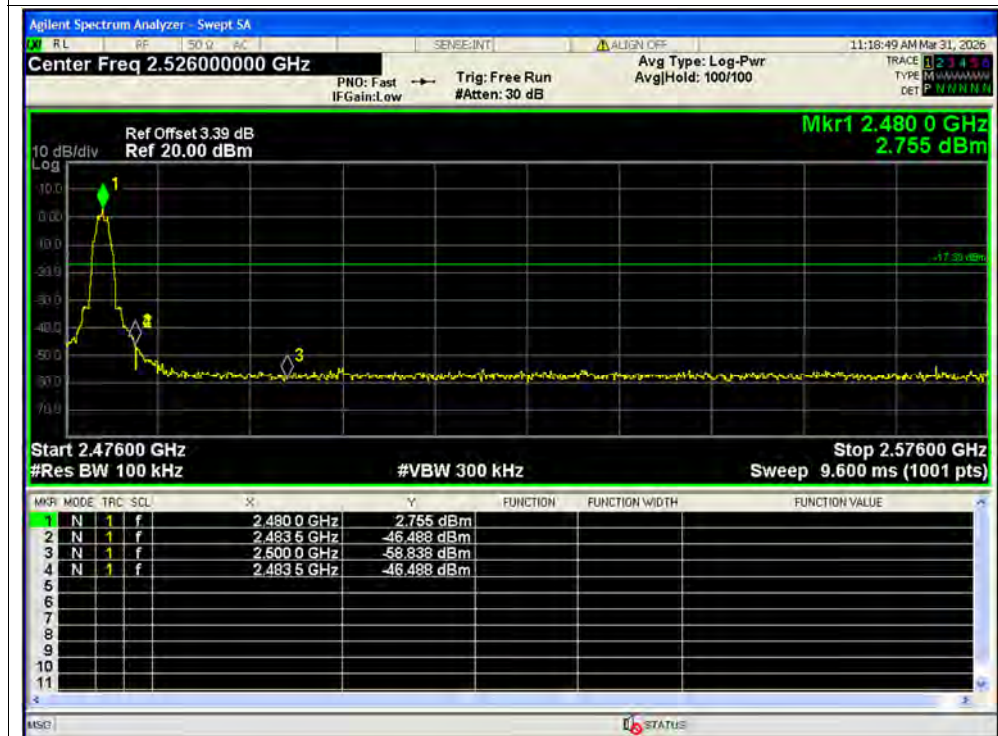


Band Edge NVNT BLE 2M 2480MHz Ant2 Emission

**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant2	-10.53	0	-10.53	8	Pass
NVNT	BLE 1M	2440	Ant2	-10.85	0	-10.85	8	Pass
NVNT	BLE 1M	2480	Ant2	-11.2	0	-11.2	8	Pass
NVNT	BLE 2M	2402	Ant2	-12.43	0	-12.43	8	Pass
NVNT	BLE 2M	2440	Ant2	-12.79	0	-12.79	8	Pass
NVNT	BLE 2M	2480	Ant2	-13.16	0	-13.16	8	Pass

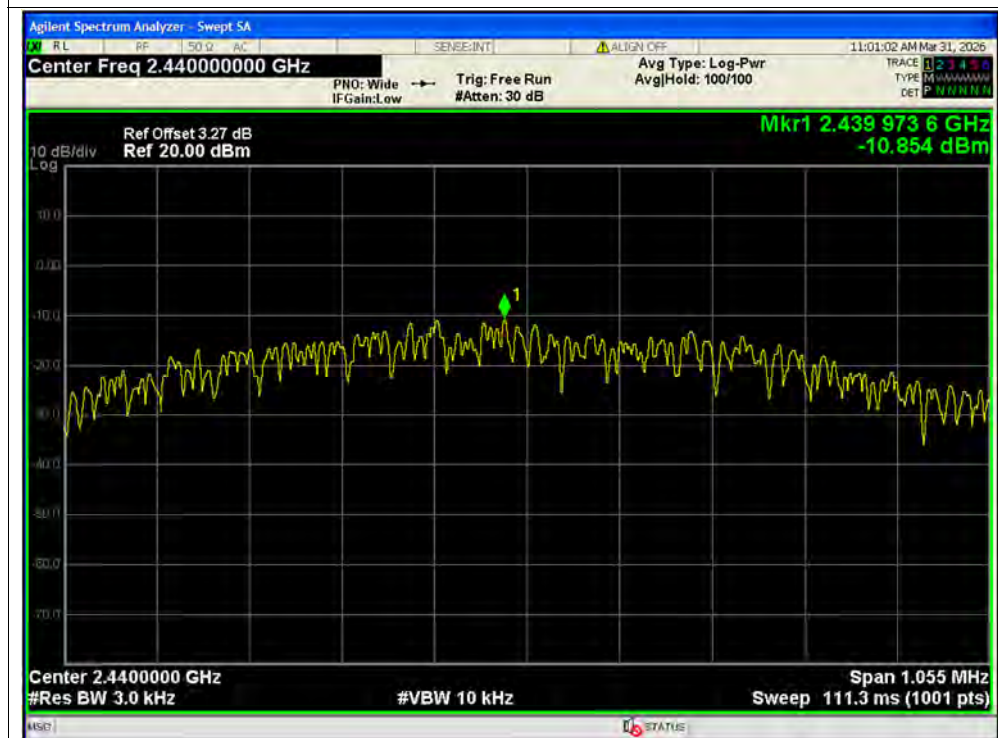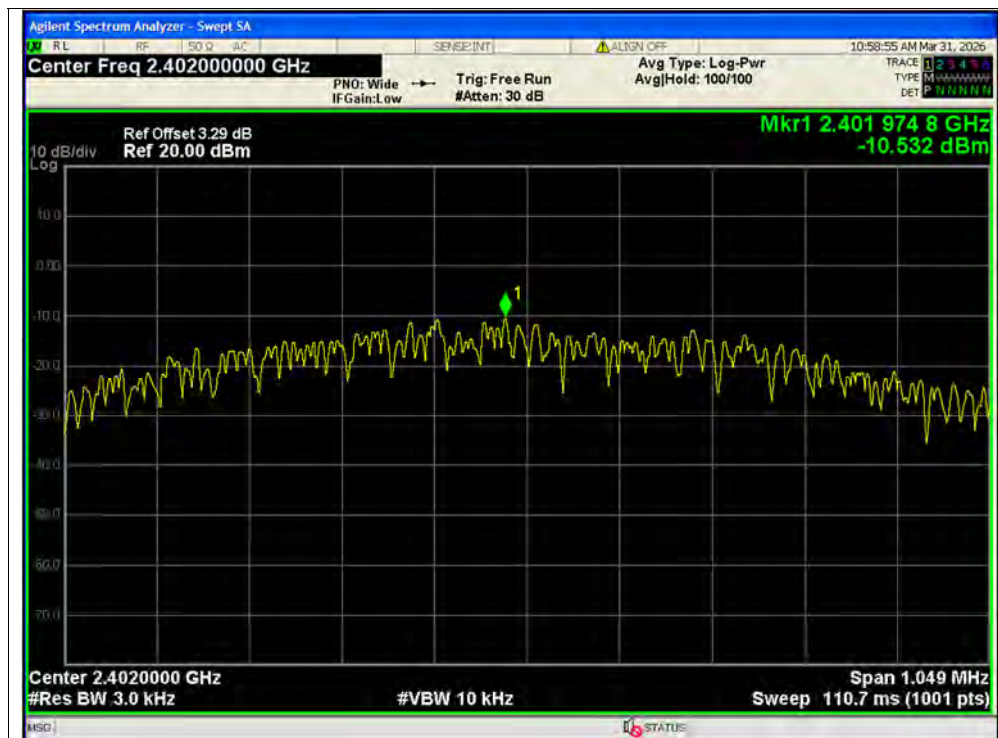

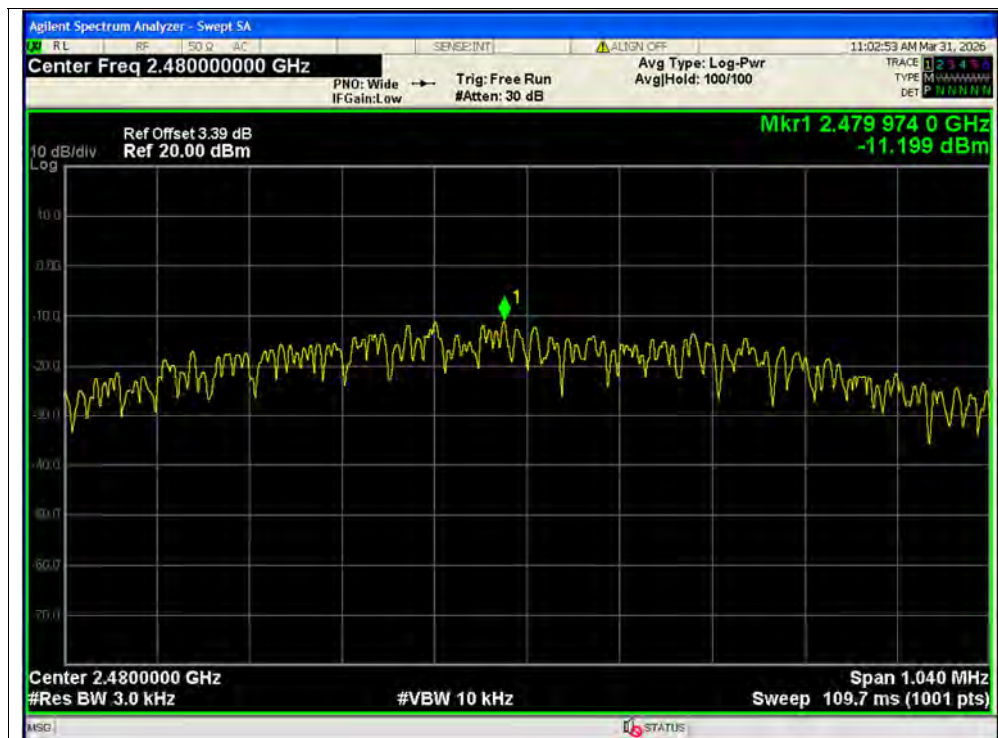

PSD NVNT BLE 1M 2480MHz Ant2



PSD NVNT BLE 2M 2402MHz Ant2



PSD NVNT BLE 2M 2440MHz Ant2



PSD NVNT BLE 2M 2480MHz Ant2

A.8. Restricted Frequency Bands

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition was recorded in this test report.

ANT1


1Mbps

Plot for Channel 0



Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2380.87	-0.1	32.38	32.510	54.00	21.62	165	26	AV	PASS
2385.22	-0.3	32.19	32.530	54.00	21.81	165	19	AV	PASS
2386.09	11.9	44.38	32.530	74.00	29.62	165	118	PK	PASS
2388.26	-0.1	32.43	32.540	54.00	21.57	165	54	AV	PASS
2388.26	12.4	44.92	32.540	74.00	29.08	165	35	PK	PASS
2389.57	13.0	45.54	32.540	74.00	28.46	165	148	PK	PASS

Plot for Channel 39

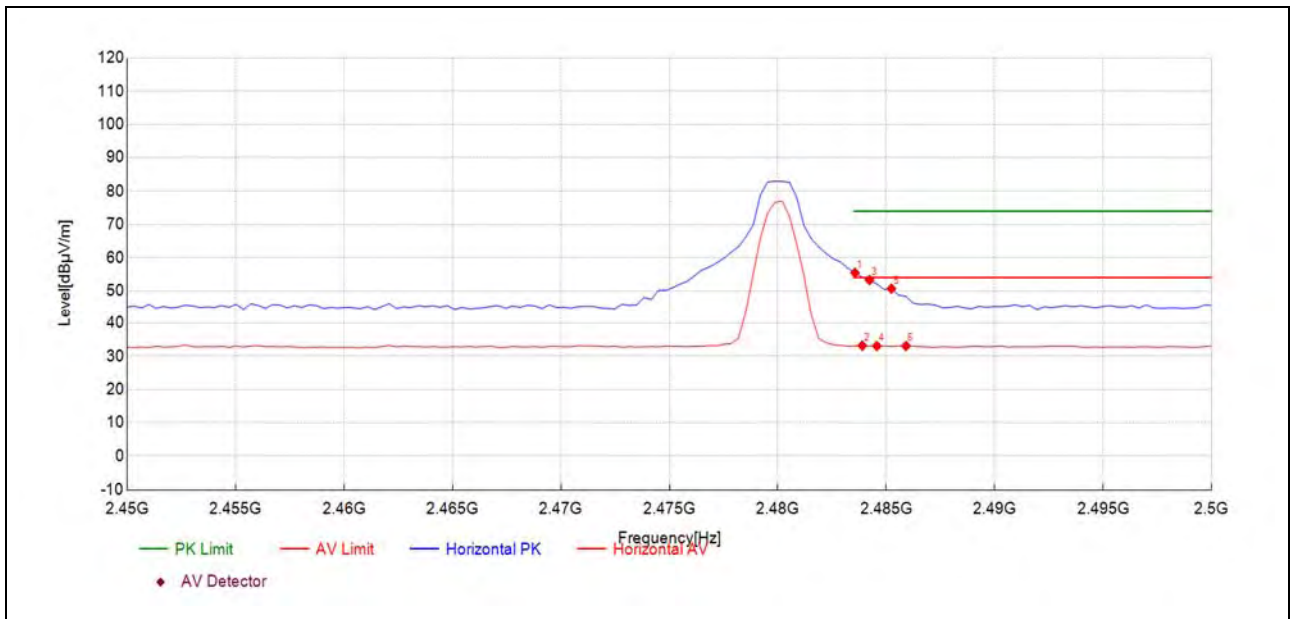


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.56	22.4	55.42	33.030	74.00	18.58	165	49	PK	PASS
2483.89	0.1	33.15	33.030	54.00	20.85	165	358	AV	PASS
2484.23	20.2	53.24	33.030	74.00	20.76	165	39	PK	PASS
2484.56	0.1	33.09	33.030	54.00	20.91	165	358	AV	PASS
2485.23	17.6	50.64	33.030	74.00	23.36	165	39	PK	PASS
2485.91	0.1	33.09	33.030	54.00	20.91	165	358	AV	PASS



2Mbps


Plot for Channel 0

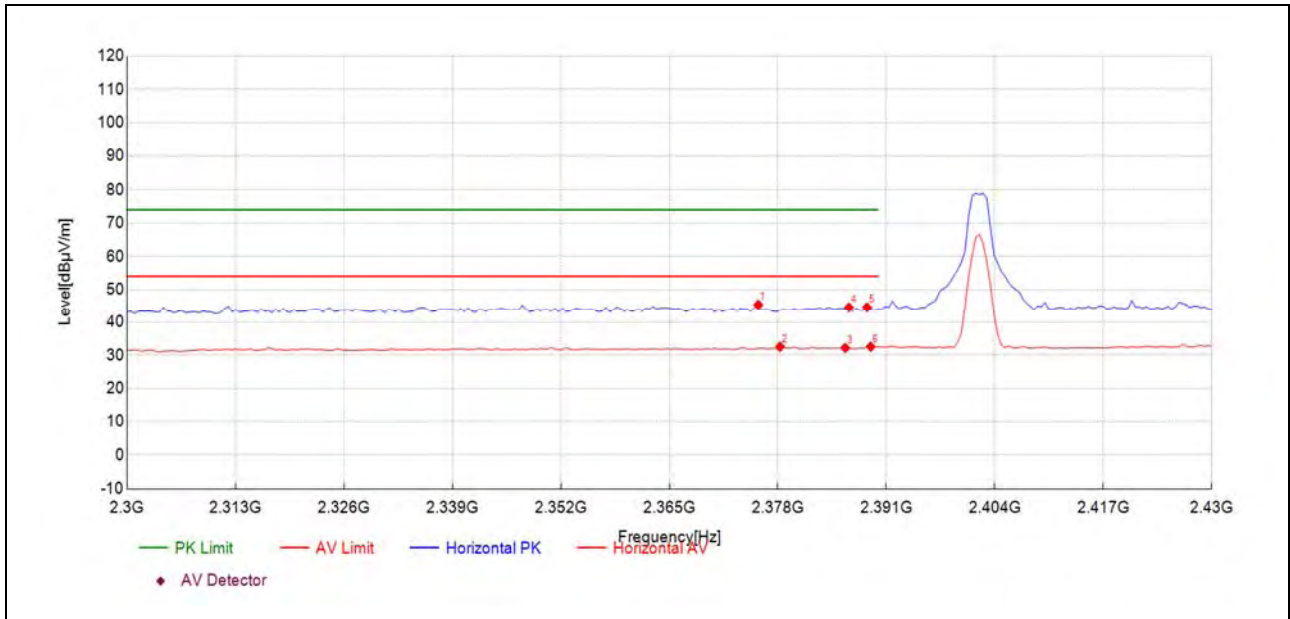

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2375.65	12.9	45.38	32.490	74.00	28.62	165	359	PK	PASS
2378.26	0.0	32.53	32.510	54.00	21.47	165	30	AV	PASS
2386.09	-0.3	32.19	32.530	54.00	21.81	165	48	AV	PASS
2386.52	12.0	44.56	32.530	74.00	29.44	165	11	PK	PASS
2388.70	12.0	44.58	32.540	74.00	29.42	165	48	PK	PASS
2389.13	0.0	32.55	32.540	54.00	21.45	165	11	AV	PASS




Plot for Channel 39

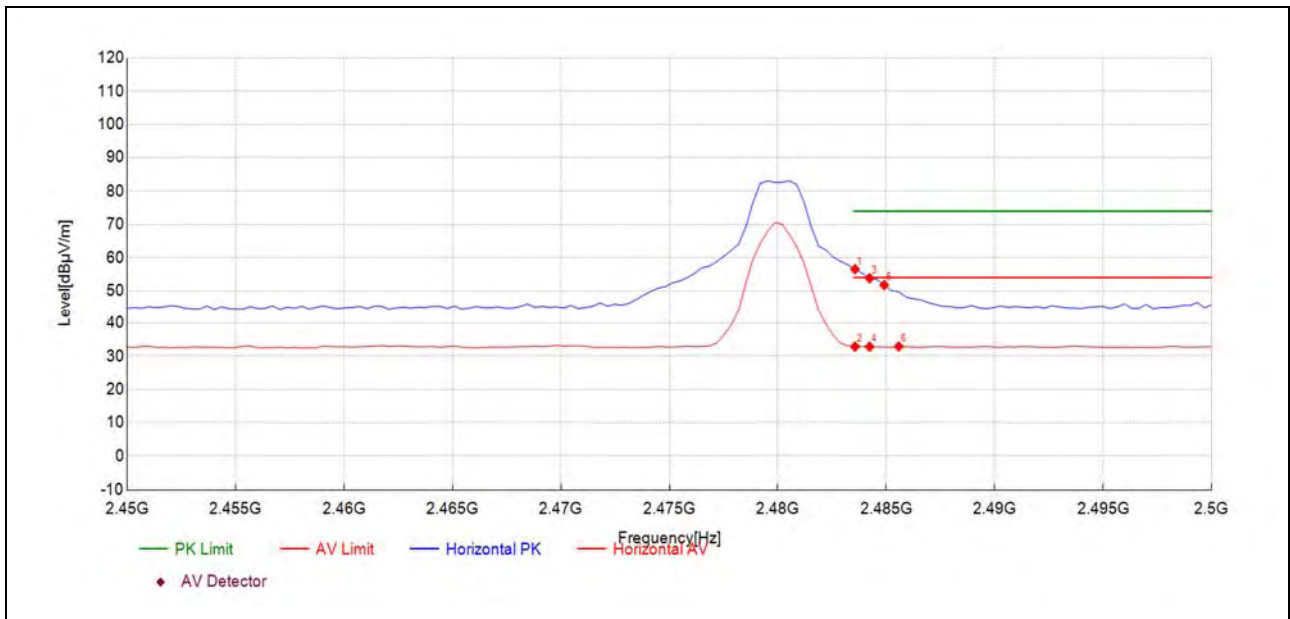

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.56	23.5	56.50	33.030	74.00	17.50	165	37	PK	PASS
2483.56	-0.2	32.88	33.030	54.00	21.12	165	54	AV	PASS
2484.23	20.8	53.79	33.030	74.00	20.21	165	37	PK	PASS
2484.23	-0.2	32.86	33.030	54.00	21.14	165	350	AV	PASS
2484.90	18.7	51.75	33.030	74.00	22.25	165	37	PK	PASS
2485.57	-0.1	32.93	33.030	54.00	21.07	165	350	AV	PASS

**ANT2****1Mbps**


Plot for Channel 0

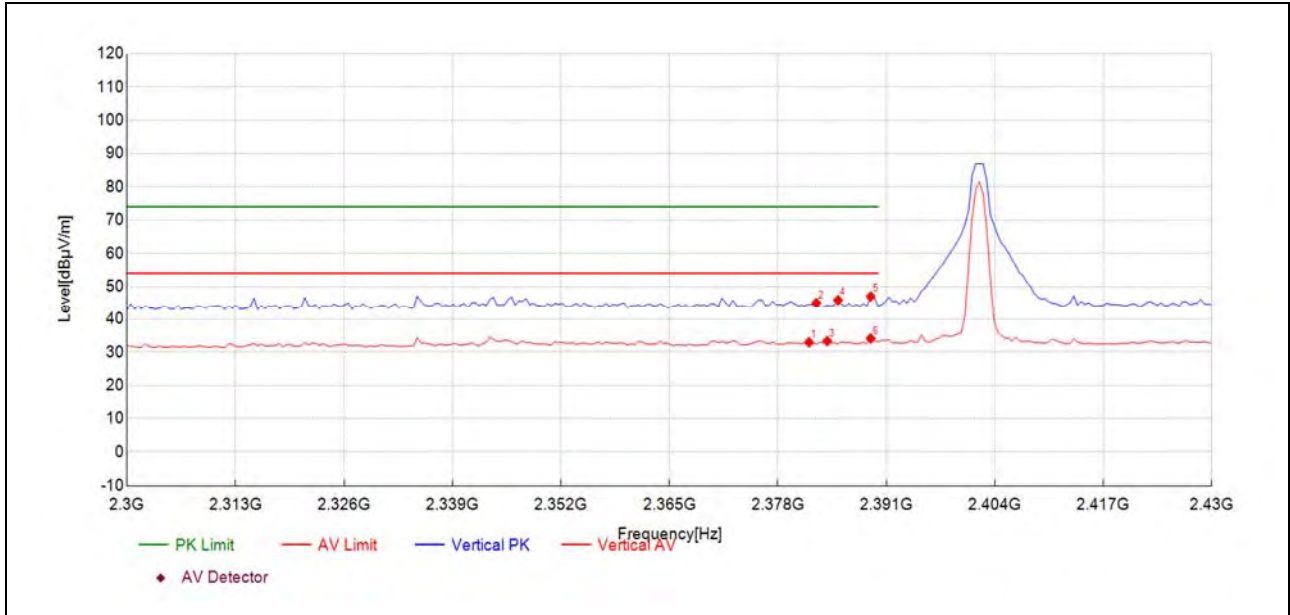

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2381.74	0.5	32.97	32.510	54.00	21.03	165	86	AV	PASS
2382.61	12.5	45.02	32.520	74.00	28.98	165	351	PK	PASS
2383.91	0.8	33.32	32.520	54.00	20.68	165	357	AV	PASS
2385.22	13.3	45.87	32.530	74.00	28.13	165	86	PK	PASS
2389.13	14.5	46.99	32.540	74.00	27.01	165	114	PK	PASS
2389.13	1.6	34.11	32.540	54.00	19.89	165	114	AV	PASS



Plot for Channel 39

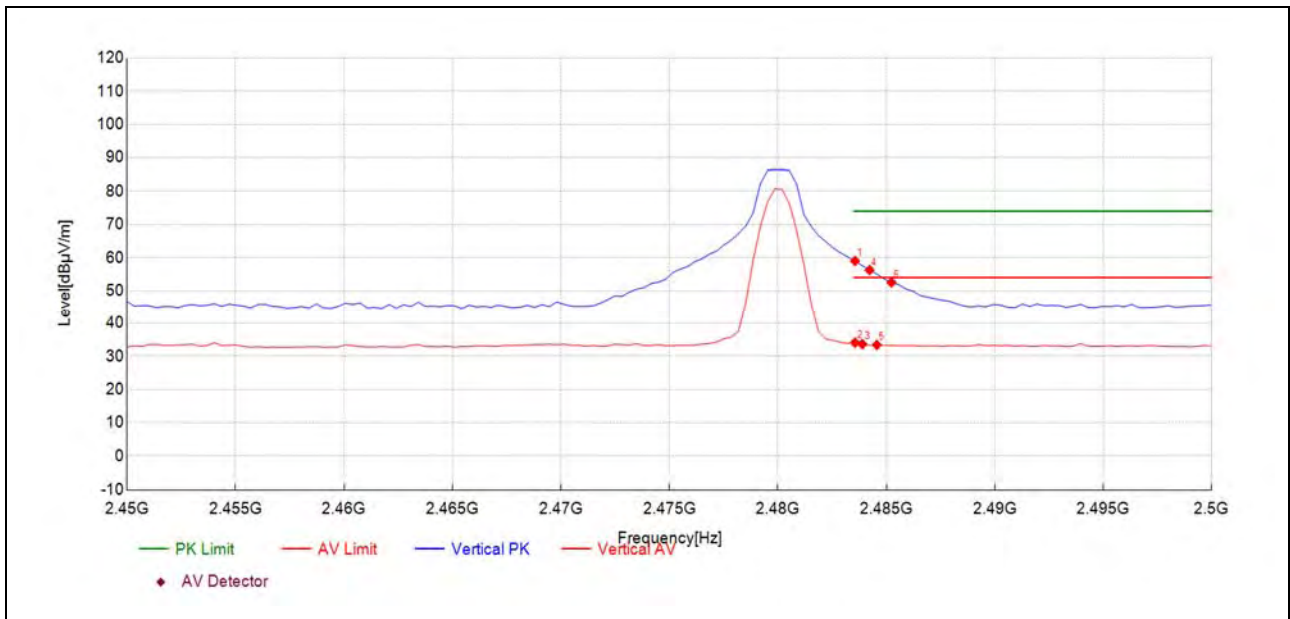


Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.56	26.0	59.00	33.030	74.00	15.00	165	62	PK	PASS
2483.56	1.0	34.07	33.030	54.00	19.93	165	81	AV	PASS
2483.89	0.6	33.63	33.030	54.00	20.37	165	81	AV	PASS
2484.23	23.2	56.25	33.030	74.00	17.75	165	3	PK	PASS
2484.56	0.4	33.39	33.030	54.00	20.61	165	136	AV	PASS
2485.23	19.5	52.51	33.030	74.00	21.49	165	0	PK	PASS



2Mbps


Plot for Channel 0

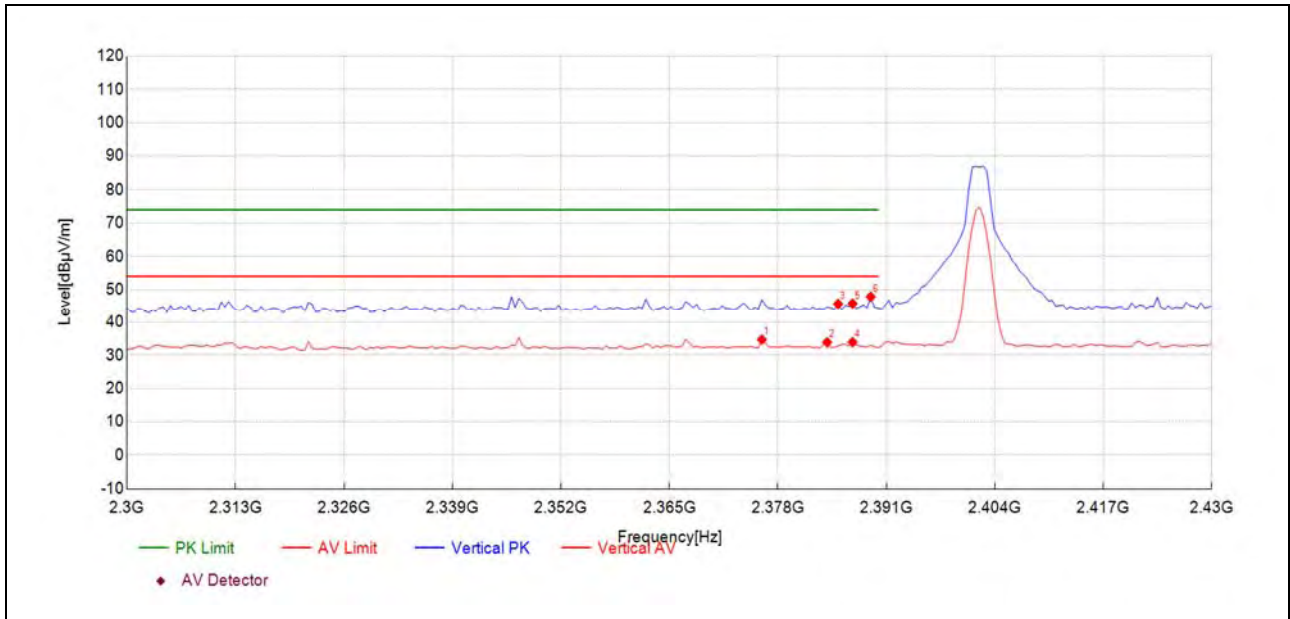

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2376.09	2.2	34.69	32.490	54.00	19.31	165	105	AV	PASS
2383.91	1.4	33.87	32.520	54.00	20.13	165	105	AV	PASS
2385.22	13.1	45.64	32.530	74.00	28.36	165	115	PK	PASS
2386.96	1.4	33.92	32.530	54.00	20.08	165	350	AV	PASS
2386.96	13.3	45.78	32.530	74.00	28.22	165	350	PK	PASS
2389.13	15.3	47.83	32.540	74.00	26.17	165	341	PK	PASS



Plot for Channel 39

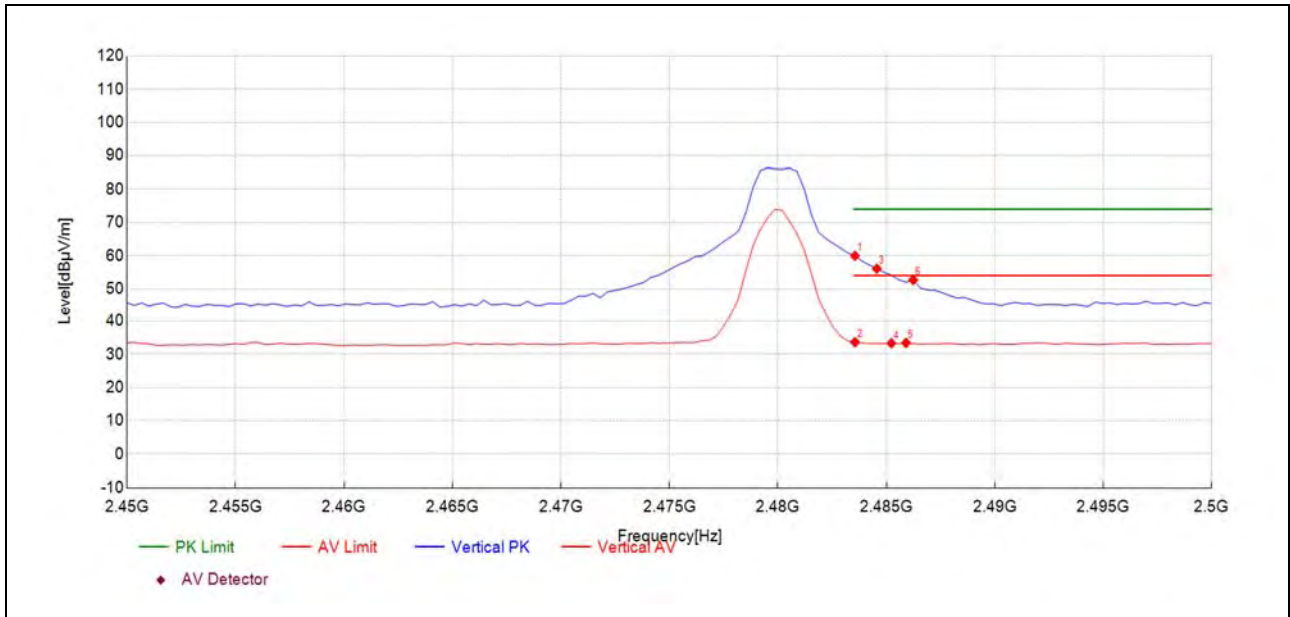

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2483.56	26.9	59.94	33.030	74.00	14.06	165	11	PK	PASS
2483.56	0.6	33.62	33.030	54.00	20.38	165	360	AV	PASS
2484.56	23.0	56.06	33.030	74.00	17.94	165	360	PK	PASS
2485.23	0.3	33.30	33.030	54.00	20.70	165	122	AV	PASS
2485.91	0.4	33.41	33.030	54.00	20.59	165	114	AV	PASS
2486.24	19.6	52.65	33.030	74.00	21.35	165	360	PK	PASS



A.9. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note 4: All test modes were considered and evaluated respectively by performing full test, only the worst data were recorded.


**ANT1****1Mbps**

Plot for Channel 0

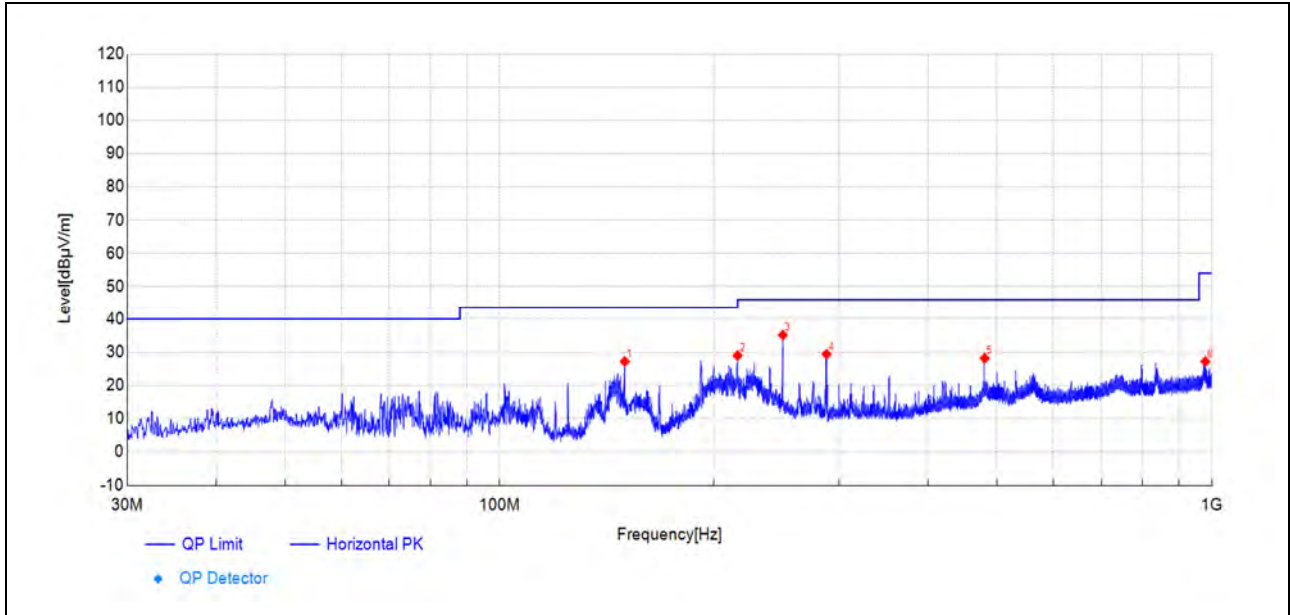


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
149.99	17.4	27.18	9.830	43.50	16.32	165	60	PK	PASS
215.96	15.4	28.99	13.560	43.50	14.51	165	60	PK	PASS
250.00	20.4	35.12	14.700	46.00	10.88	165	261	PK	PASS
287.98	13.8	29.35	15.520	46.00	16.65	165	1	PK	PASS
479.99	8.3	28.16	19.900	46.00	17.84	165	135	PK	PASS
979.66	0.6	27.17	26.570	54.00	26.83	165	110	PK	PASS

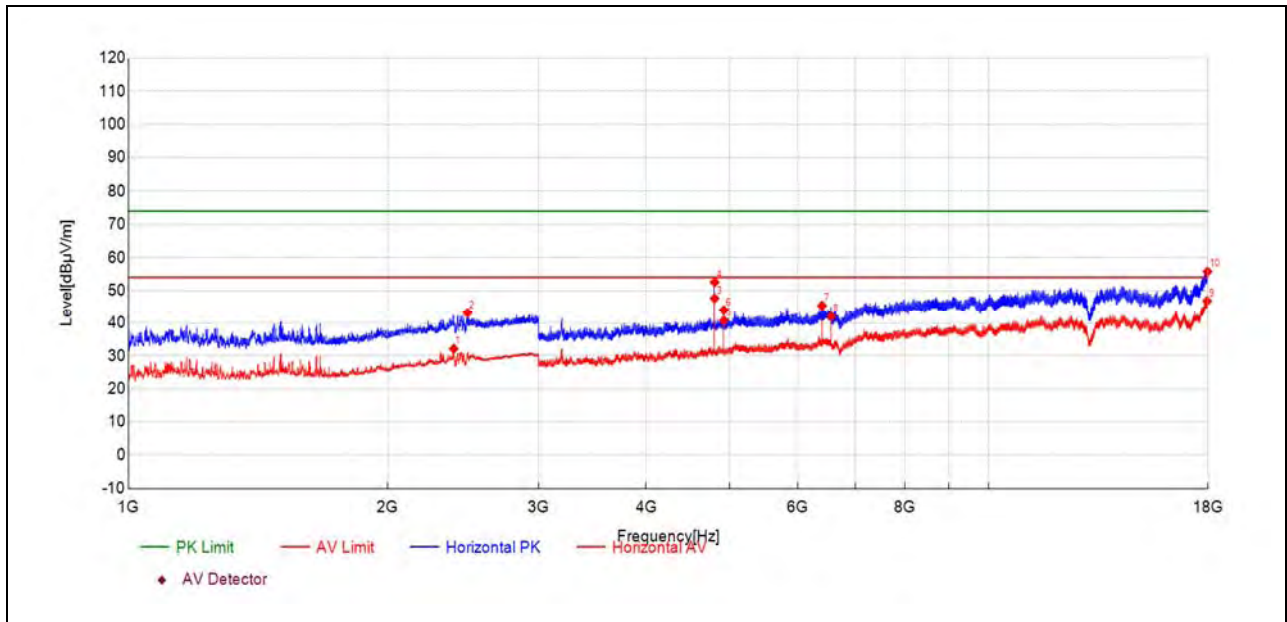


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2389.50	31.4	32.14	0.740	54.00	21.86	165	11	AV	PASS
2479.37	42.2	43.15	0.920	74.00	30.85	165	128	PK	PASS
4803.79	58.4	47.63	-10.720	54.00	6.37	165	334	AV	PASS
4804.29	63.3	52.56	-10.720	74.00	21.44	165	352	PK	PASS
4923.91	50.7	40.74	-9.970	54.00	13.26	165	334	AV	PASS
4923.91	53.9	43.97	-9.970	74.00	30.03	165	334	PK	PASS
6405.22	50.5	45.39	-5.130	74.00	28.61	165	287	PK	PASS
6565.21	46.6	42.05	-4.500	54.00	11.95	165	264	AV	PASS
17956.64	34.9	46.83	11.890	54.00	7.17	165	359	AV	PASS
17977.07	43.7	55.78	12.120	74.00	18.22	165	240	PK	PASS

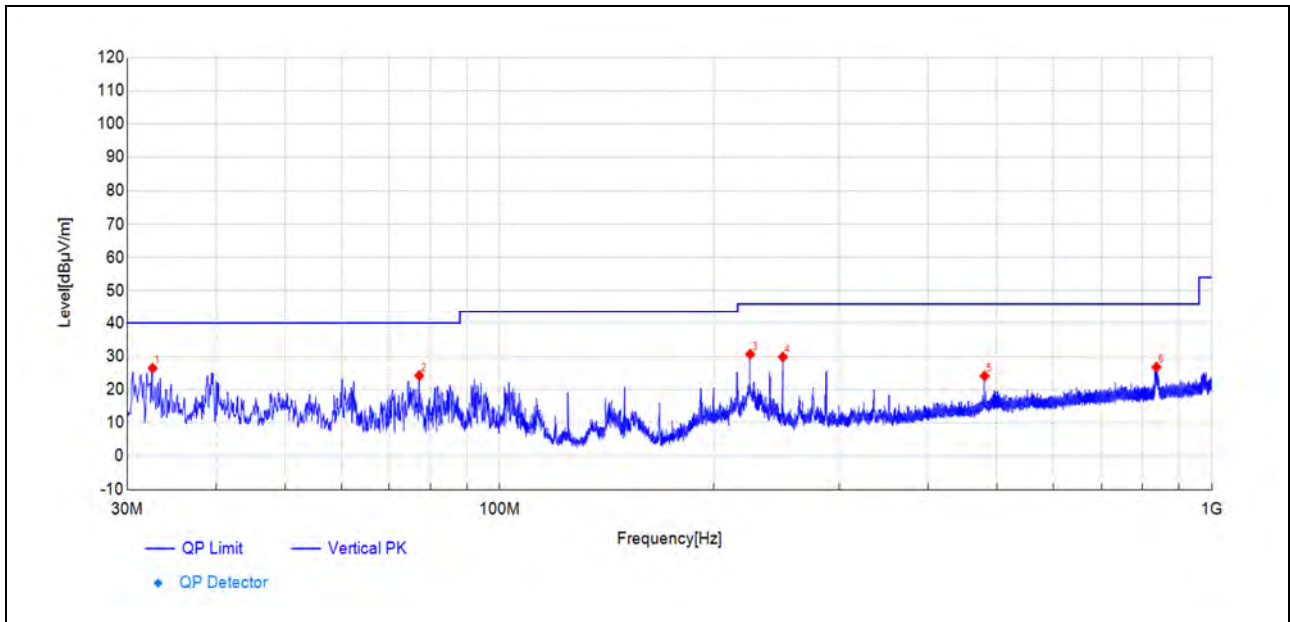

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.59	14.9	26.44	11.520	40.00	13.56	165	186	PK	PASS
77.15	15.9	24.21	8.320	40.00	15.79	165	150	PK	PASS
224.95	16.6	30.61	14.050	46.00	15.39	165	150	PK	PASS
250.00	15.1	29.81	14.700	46.00	16.19	165	23	PK	PASS
479.93	4.2	24.09	19.900	46.00	21.91	165	36	PK	PASS
836.21	1.7	26.76	25.060	46.00	19.24	165	86	PK	PASS

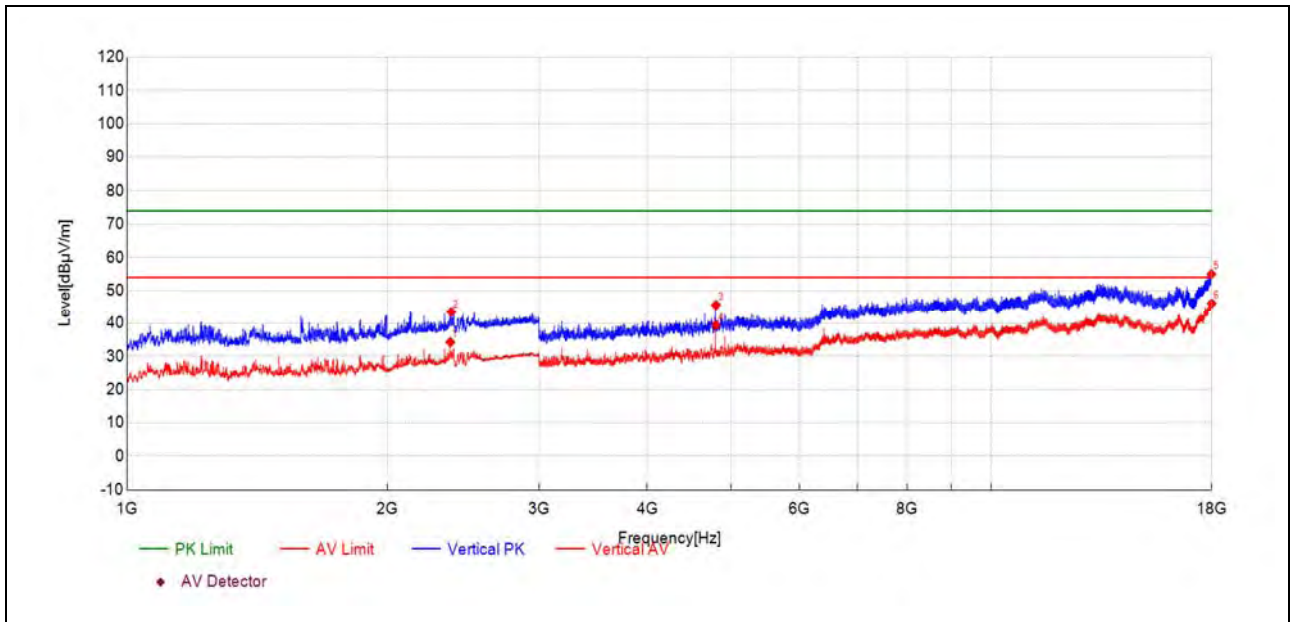


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2366.54	33.9	34.26	0.390	54.00	19.74	165	93	AV	PASS
2372.89	43.0	43.50	0.500	74.00	30.50	165	93	PK	PASS
4803.29	56.3	45.61	-10.720	74.00	28.39	165	311	PK	PASS
4803.79	50.2	39.48	-10.720	54.00	14.52	165	286	AV	PASS
17985.05	42.8	54.99	12.220	74.00	19.01	165	34	PK	PASS
17997.51	33.8	46.12	12.350	54.00	7.88	165	102	AV	PASS




Plot for Channel 19

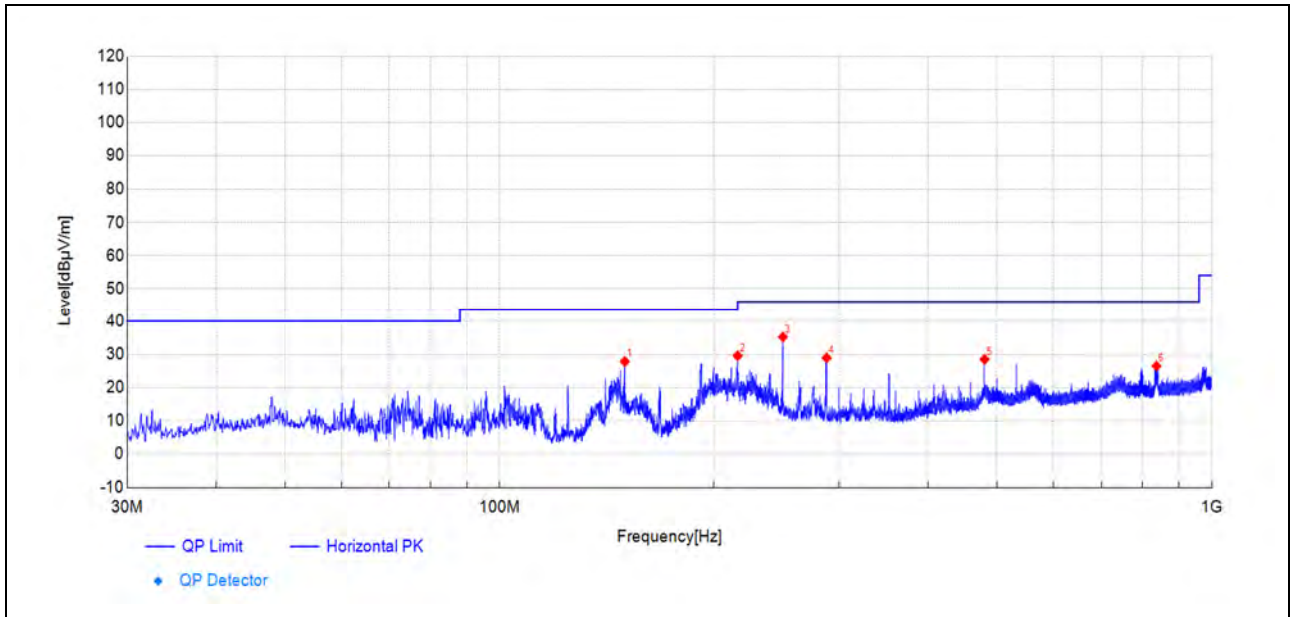


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
149.99	18.0	27.81	9.830	43.50	15.69	165	64	PK	PASS
216.02	16.0	29.55	13.560	46.00	16.45	165	141	PK	PASS
250.00	20.5	35.22	14.700	46.00	10.78	165	285	PK	PASS
288.04	13.4	28.93	15.520	46.00	17.07	165	206	PK	PASS
479.99	8.6	28.49	19.900	46.00	17.51	165	141	PK	PASS
836.56	1.4	26.47	25.060	46.00	19.53	165	141	PK	PASS

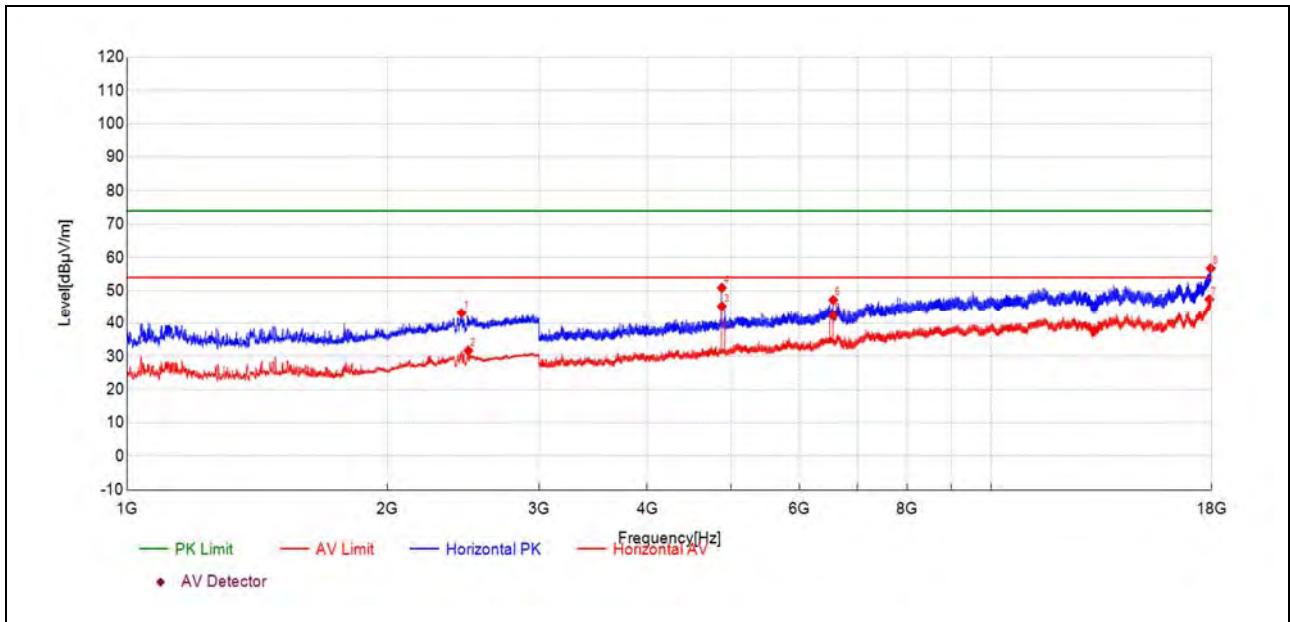


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2439.32	42.2	43.16	1.000	-	-	165	181	PK	NA
2482.78	30.8	31.66	0.900	54.00	22.34	165	303	AV	PASS
4879.55	55.3	45.24	-10.010	54.00	8.76	165	342	AV	PASS
4880.05	60.9	50.86	-10.010	74.00	23.14	165	319	PK	PASS
6565.21	46.8	42.25	-4.500	54.00	11.75	165	251	AV	PASS
6565.21	51.7	47.16	-4.500	74.00	26.84	165	251	PK	PASS
17884.86	36.4	47.40	11.040	54.00	6.60	165	271	AV	PASS
17953.15	44.9	56.74	11.850	74.00	17.26	165	148	PK	PASS

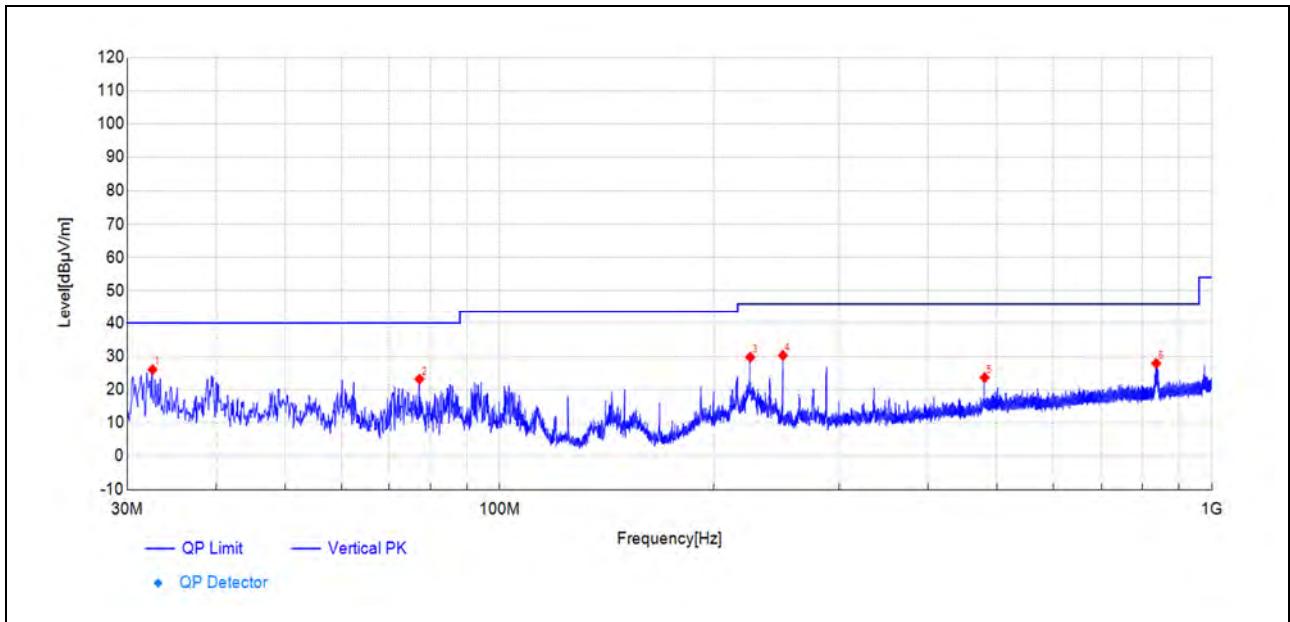

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
32.59	14.5	26.00	11.520	40.00	14.00	165	97	PK	PASS
77.21	14.8	23.14	8.320	40.00	16.86	165	160	PK	PASS
224.95	15.7	29.74	14.050	46.00	16.26	165	136	PK	PASS
250.00	15.6	30.25	14.700	46.00	15.75	165	23	PK	PASS
479.99	3.7	23.61	19.900	46.00	22.39	165	35	PK	PASS
835.74	2.8	27.86	25.060	46.00	18.14	165	122	PK	PASS

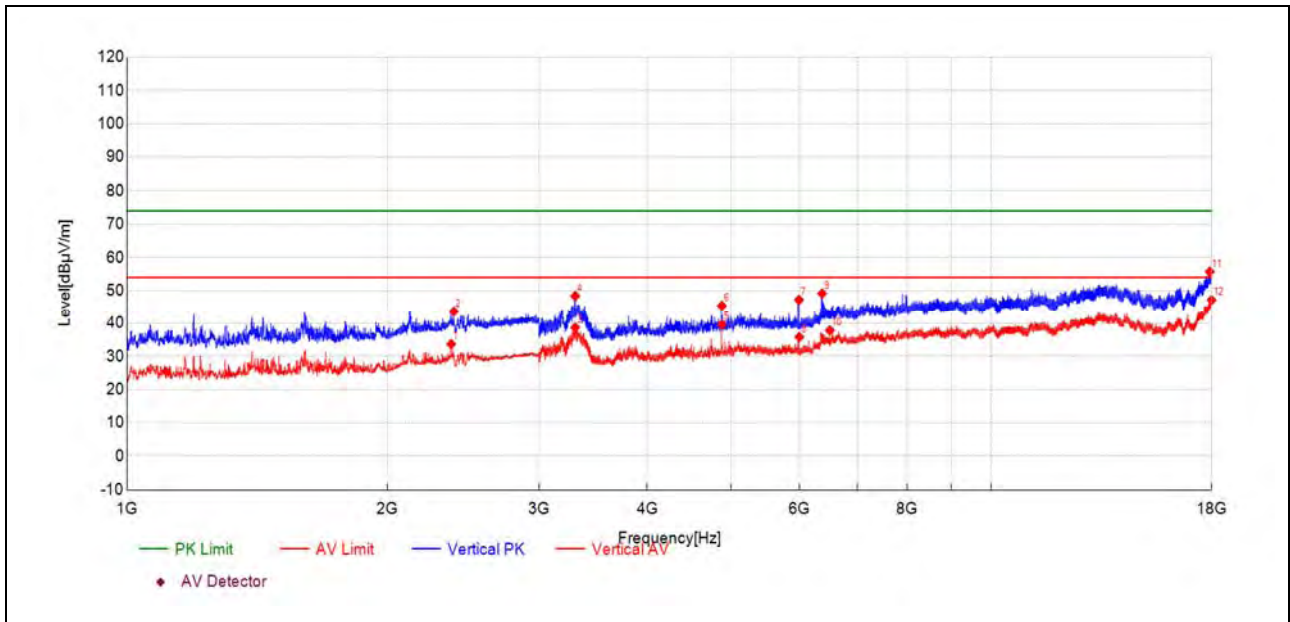


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2372.41	33.2	33.68	0.480	54.00	20.32	165	76	AV	PASS
2389.01	42.9	43.64	0.740	74.00	30.36	165	76	PK	PASS
3301.05	54.2	38.65	-15.520	54.00	15.35	165	360	AV	PASS
3301.05	63.9	48.39	-15.520	74.00	25.61	165	360	PK	PASS
4879.55	49.6	39.60	-10.010	54.00	14.40	165	102	AV	PASS
4880.05	55.4	45.39	-10.010	74.00	28.61	165	265	PK	PASS
5993.02	54.4	47.21	-7.200	74.00	26.79	165	360	PK	PASS
5998.50	43.1	35.79	-7.260	54.00	18.21	165	360	AV	PASS
6373.82	54.6	49.15	-5.470	74.00	24.85	165	148	PK	PASS
6506.40	42.3	37.80	-4.520	54.00	16.20	165	220	AV	PASS
17908.29	44.4	55.72	11.340	74.00	18.28	165	148	PK	PASS
17993.02	34.9	47.16	12.300	54.00	6.84	165	35	AV	PASS




Plot for Channel 39

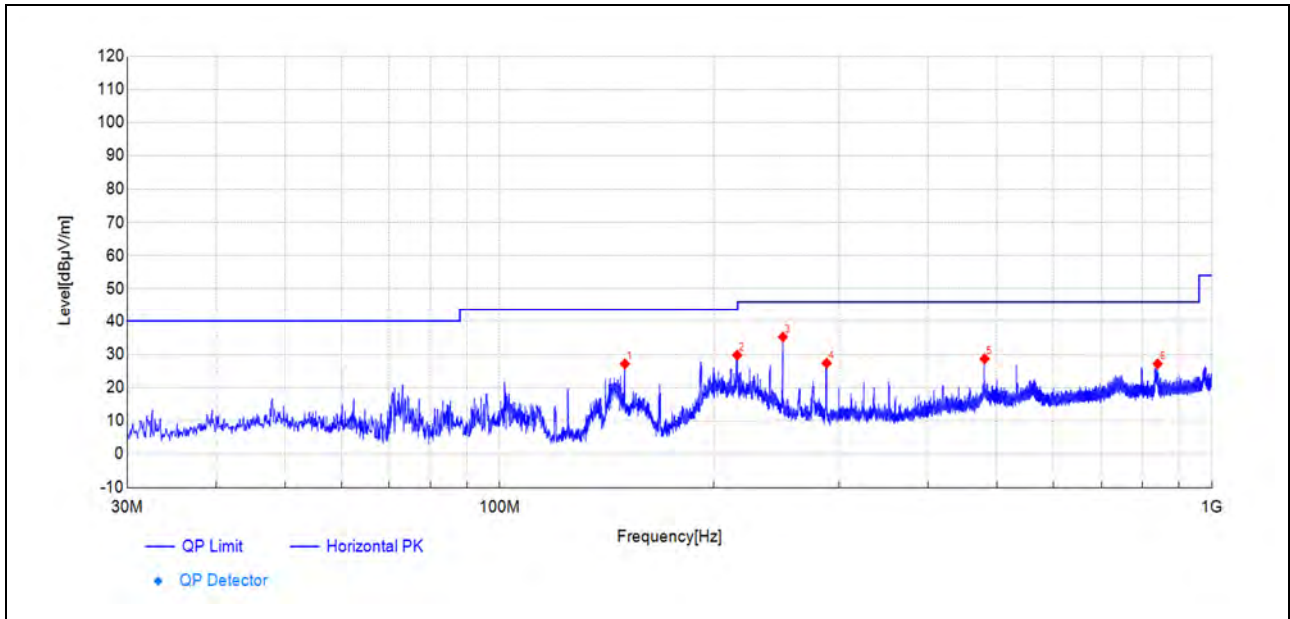


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
149.99	17.3	27.10	9.830	43.50	16.40	165	59	PK	PASS
215.66	16.2	29.72	13.540	43.50	13.78	165	47	PK	PASS
250.00	20.5	35.22	14.700	46.00	10.78	165	274	PK	PASS
288.04	11.8	27.33	15.520	46.00	18.67	165	174	PK	PASS
479.99	8.7	28.62	19.900	46.00	17.38	165	147	PK	PASS
839.73	2.0	27.11	25.090	46.00	18.89	165	159	PK	PASS

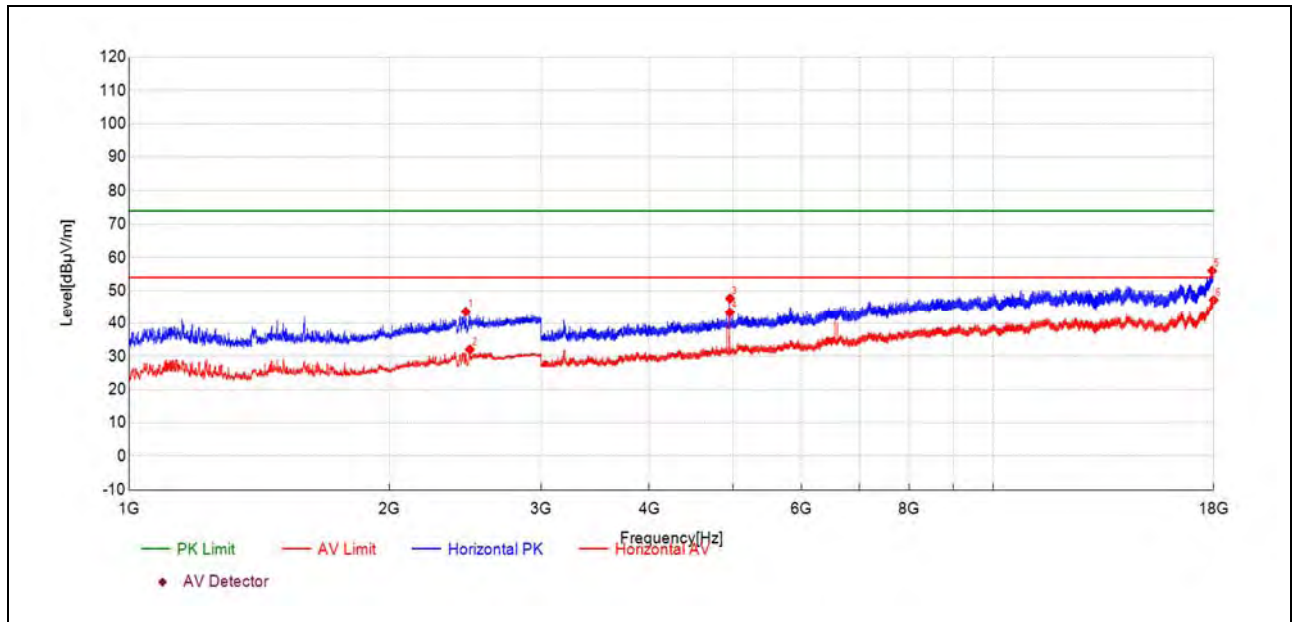


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2453.48	42.5	43.57	1.050	74.00	30.43	165	349	PK	PASS
2479.85	31.1	32.01	0.920	-	-	165	38	AV	PASS
4959.79	57.8	47.64	-10.130	74.00	26.36	165	331	PK	PASS
4959.79	53.5	43.35	-10.130	54.00	10.65	165	350	AV	PASS
17928.23	44.4	55.99	11.560	74.00	18.01	165	236	PK	PASS
17995.02	34.8	47.14	12.330	54.00	6.86	165	350	AV	PASS

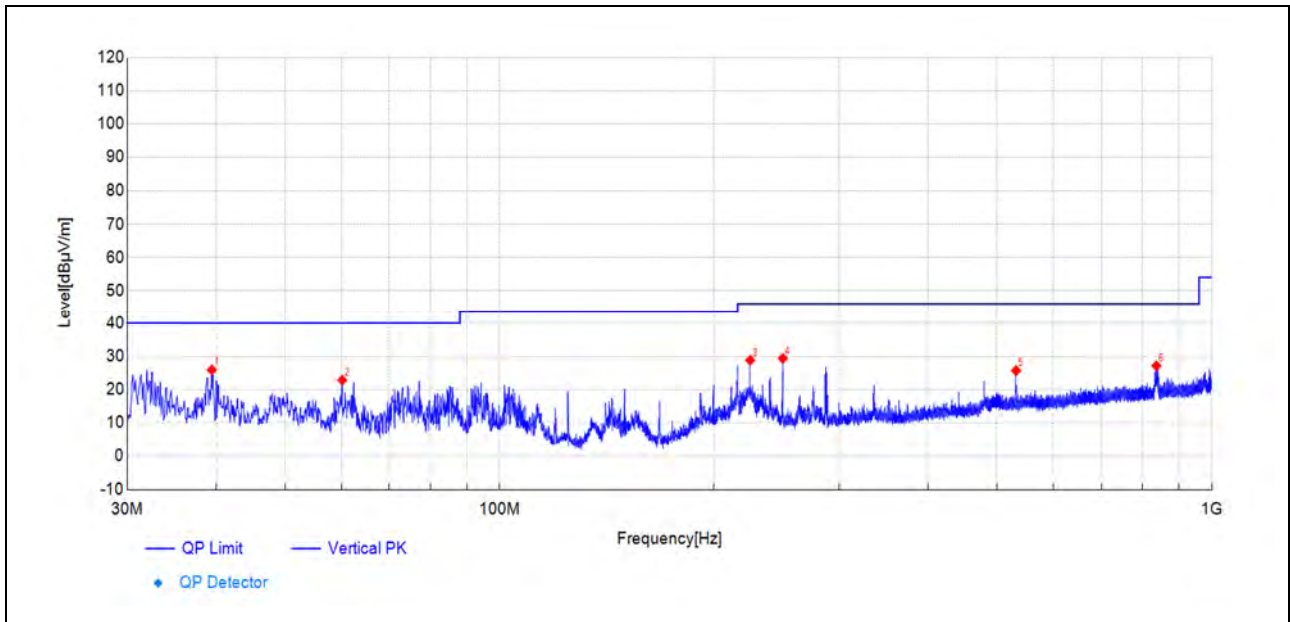

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
39.47	11.5	25.91	14.420	40.00	14.09	165	236	PK	PASS
60.16	10.2	22.82	12.670	40.00	17.18	165	324	PK	PASS
224.95	14.8	28.85	14.050	46.00	17.15	165	160	PK	PASS
250.00	14.7	29.38	14.700	46.00	16.62	165	11	PK	PASS
531.31	5.0	25.70	20.730	46.00	20.30	165	136	PK	PASS
836.21	2.1	27.12	25.060	46.00	18.88	165	86	PK	PASS

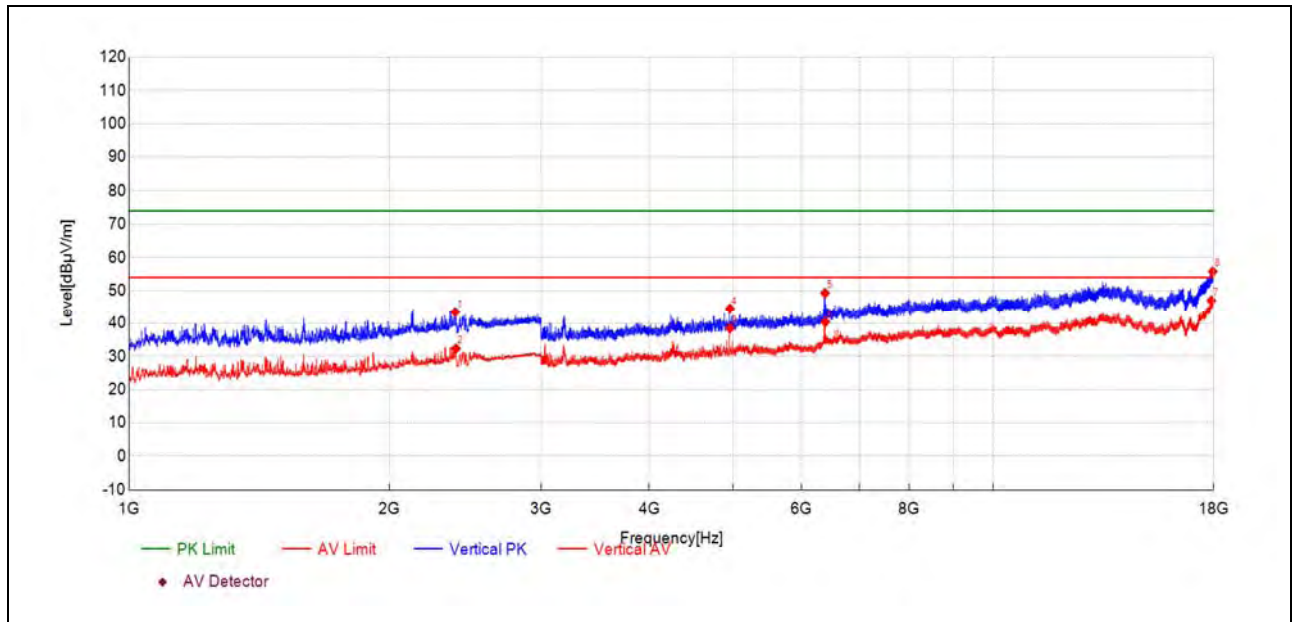


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2384.62	42.8	43.45	0.670	74.00	30.55	165	83	PK	PASS
2389.50	31.6	32.32	0.740	54.00	21.68	165	83	AV	NA
4959.79	48.6	38.48	-10.130	54.00	15.52	165	275	AV	PASS
4959.79	54.6	44.50	-10.130	74.00	29.50	165	275	PK	PASS
6389.27	54.6	49.27	-5.300	74.00	24.73	165	10	PK	PASS
6394.75	45.6	40.33	-5.240	54.00	13.67	165	10	AV	PASS
17889.85	35.9	46.99	11.110	54.00	7.01	165	299	AV	PASS
17956.14	43.9	55.77	11.890	74.00	18.23	165	162	PK	PASS


**ANT2****1Mbps**

Plot for Channel 0

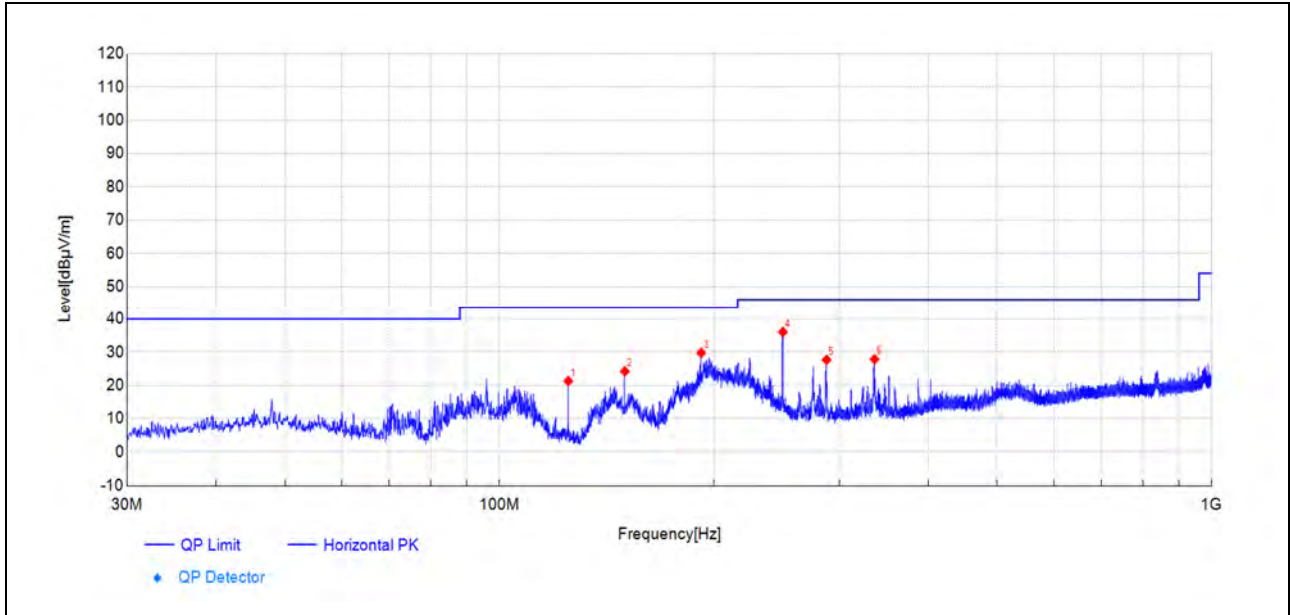


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
124.95	10.8	21.29	10.460	43.50	22.21	165	68	PK	PASS
149.99	14.4	24.24	9.830	43.50	19.26	165	68	PK	PASS
191.97	16.3	29.80	13.480	43.50	13.70	165	93	PK	PASS
250.00	21.3	36.04	14.700	46.00	9.96	165	273	PK	PASS
287.92	12.2	27.69	15.520	46.00	18.31	165	82	PK	PASS
336.30	10.4	27.87	17.440	46.00	18.13	165	82	PK	PASS

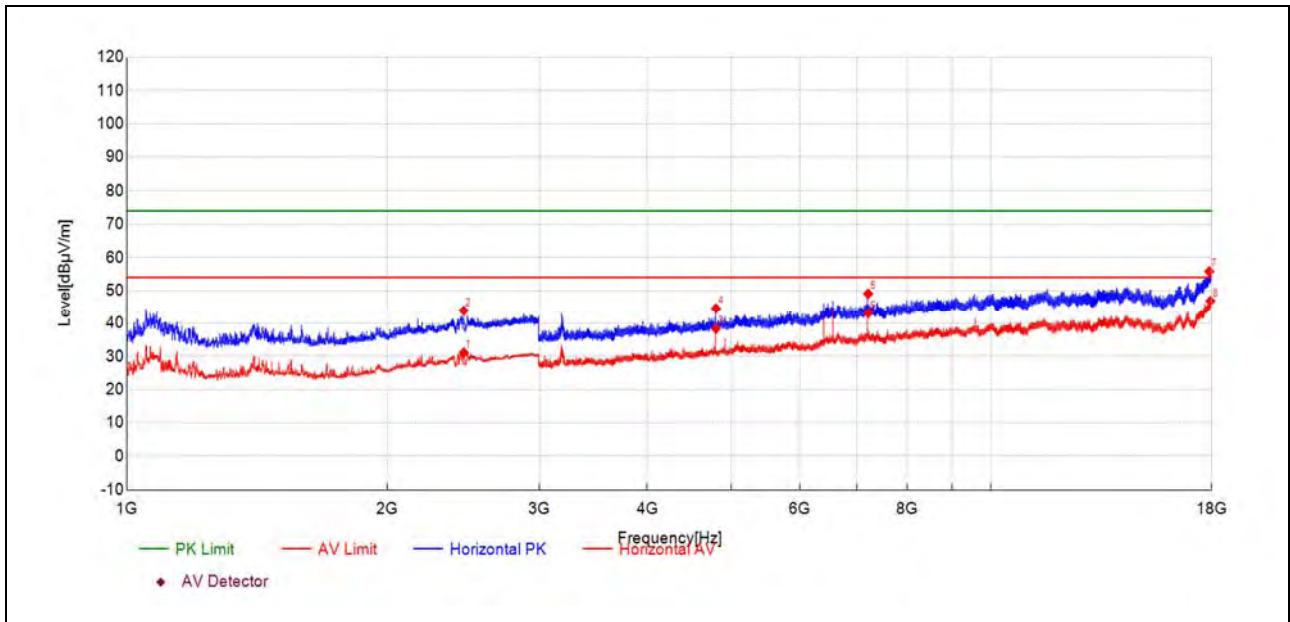


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2452.99	30.0	31.10	1.060	54.00	22.90	165	210	AV	PASS
2452.99	42.8	43.87	1.060	74.00	30.13	165	210	PK	PASS
4803.79	49.1	38.33	-10.720	54.00	15.67	165	91	AV	PASS
4804.29	55.3	44.57	-10.720	74.00	29.43	165	0	PK	PASS
7206.18	52.7	49.05	-3.660	74.00	24.95	165	163	PK	PASS
7206.68	46.8	43.08	-3.670	54.00	10.92	165	163	AV	PASS
17885.36	44.7	55.79	11.050	74.00	18.21	165	0	PK	PASS
17937.70	35.2	46.88	11.670	54.00	7.12	165	324	AV	PASS

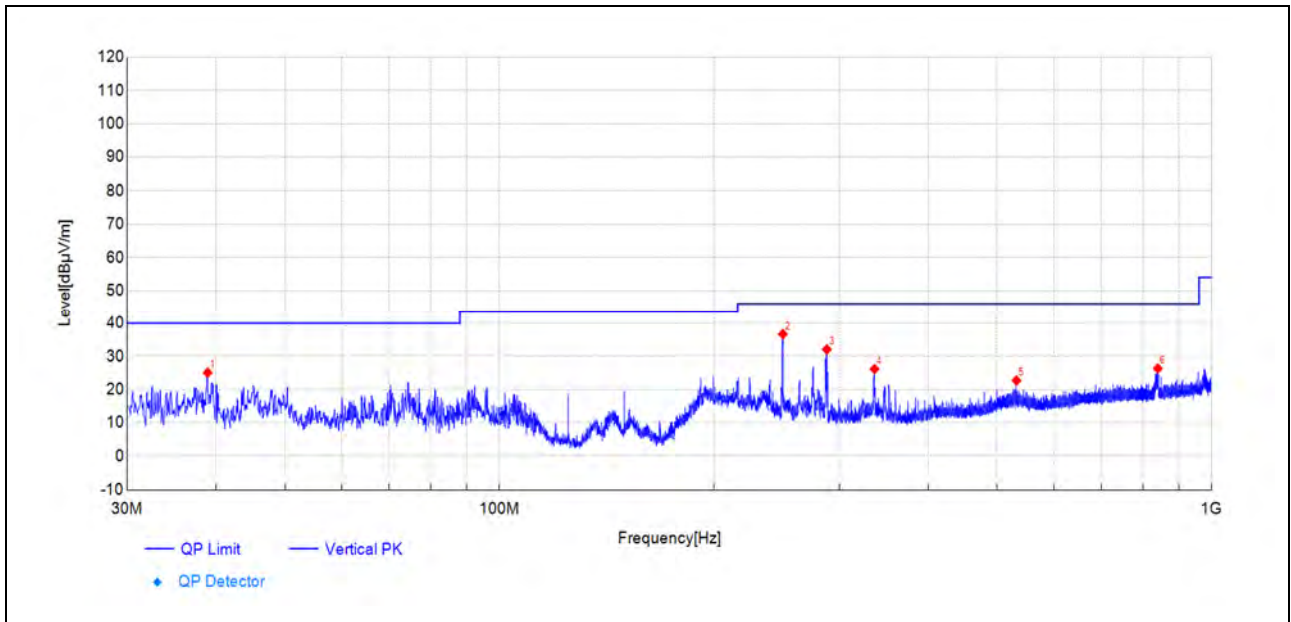

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
38.94	10.8	25.07	14.250	40.00	14.93	165	138	PK	PASS
250.00	22.0	36.68	14.700	46.00	9.32	165	152	PK	PASS
288.21	16.6	32.10	15.520	46.00	13.90	165	87	PK	PASS
336.19	8.7	26.16	17.440	46.00	19.84	165	240	PK	PASS
531.96	2.0	22.74	20.730	46.00	23.26	165	267	PK	PASS
840.15	1.3	26.34	25.090	46.00	19.66	165	100	PK	PASS

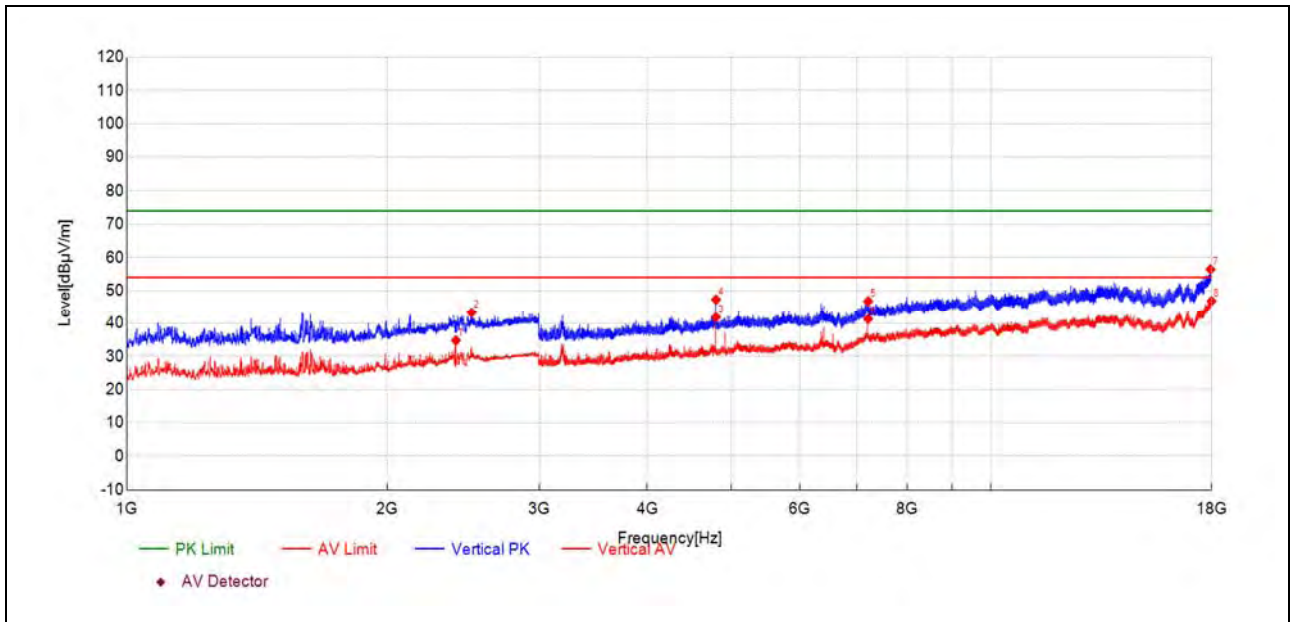


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2402.20	34.0	34.79	0.750	-	-	165	360	AV	NA
2505.25	42.5	43.27	0.820	74.00	30.73	165	90	PK	PASS
4803.29	52.5	41.80	-10.720	54.00	12.20	165	8	AV	PASS
4804.29	58.0	47.28	-10.720	74.00	26.72	165	302	PK	PASS
7205.18	50.4	46.79	-3.650	74.00	27.21	165	91	PK	PASS
7205.18	45.0	41.31	-3.650	54.00	12.69	165	120	AV	PASS
17943.18	44.7	56.41	11.740	74.00	17.59	165	2	PK	PASS
17993.02	34.6	46.85	12.300	54.00	7.15	165	185	AV	PASS




Plot for Channel 19

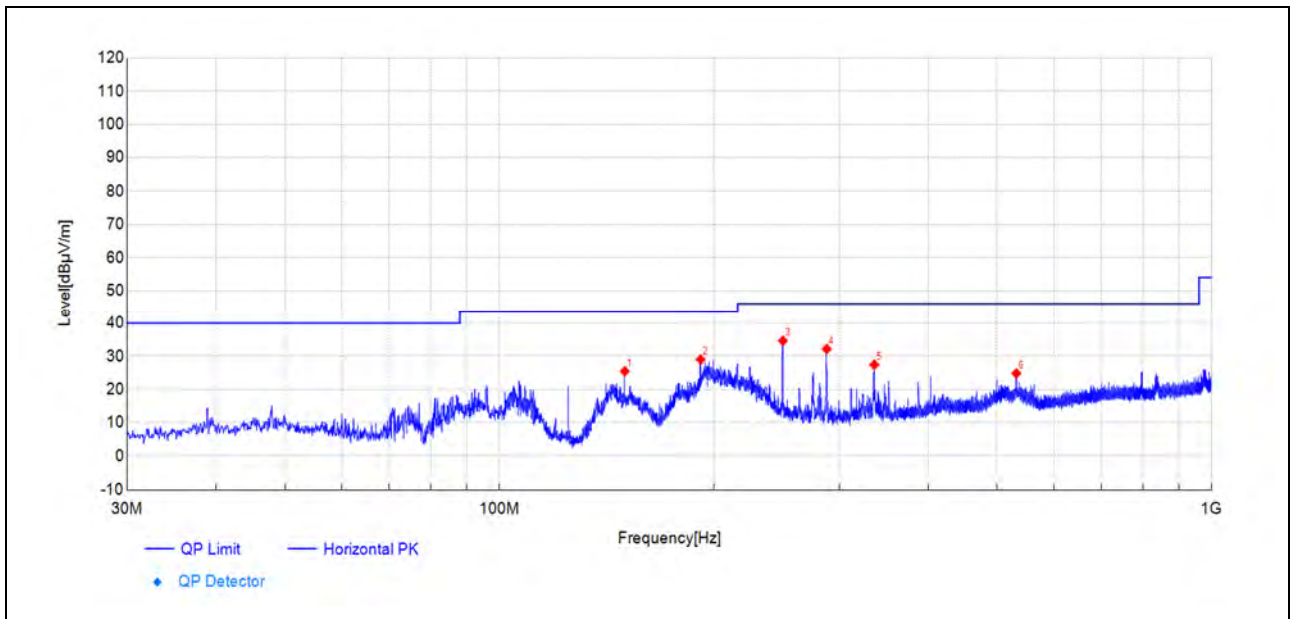


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
149.99	15.7	25.49	9.830	43.50	18.01	165	72	PK	PASS
191.62	15.6	29.03	13.440	43.50	14.47	165	97	PK	PASS
250.00	20.0	34.65	14.700	46.00	11.35	165	300	PK	PASS
287.98	16.7	32.19	15.520	46.00	13.81	165	72	PK	PASS
336.01	10.0	27.46	17.430	46.00	18.54	165	85	PK	PASS
531.73	4.1	24.84	20.730	46.00	21.16	165	160	PK	PASS

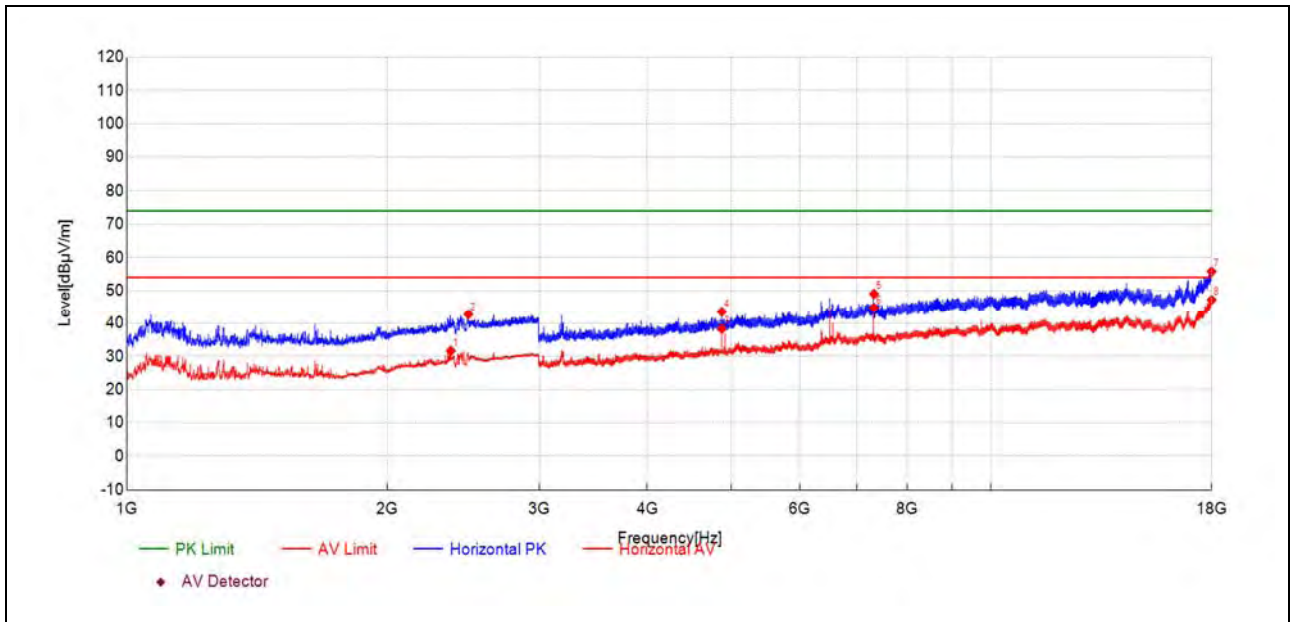


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2369.96	31.2	31.64	0.450	54.00	22.36	165	126	AV	PASS
2483.27	41.8	42.71	0.900	74.00	31.29	165	248	PK	PASS
4879.55	48.3	38.31	-10.010	54.00	15.69	165	156	AV	PASS
4879.55	53.5	43.52	-10.010	74.00	30.48	165	156	PK	PASS
7319.32	52.7	48.98	-3.670	74.00	25.02	165	177	PK	PASS
7319.32	48.4	44.77	-3.670	54.00	9.23	165	177	AV	PASS
17994.02	43.5	55.77	12.310	74.00	18.23	165	274	PK	PASS
17998.01	34.8	47.18	12.350	54.00	6.82	165	1	AV	PASS

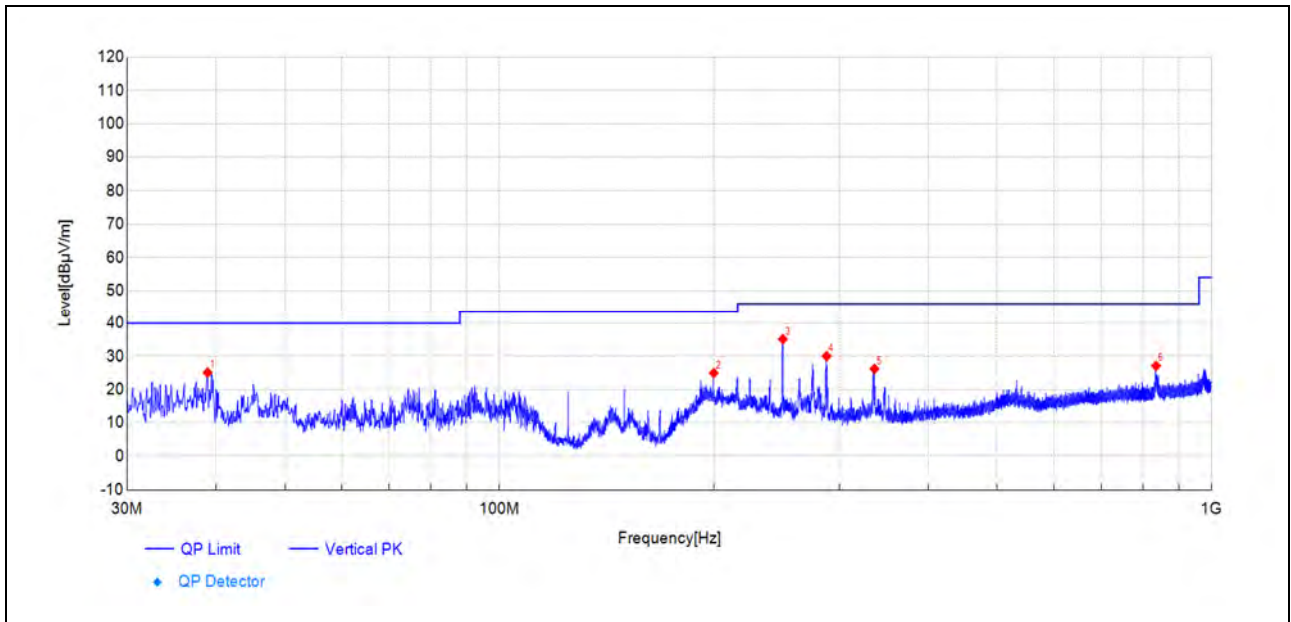

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
38.94	10.9	25.10	14.250	40.00	14.90	165	138	PK	PASS
199.97	12.0	24.96	12.930	43.50	18.54	165	161	PK	PASS
250.00	20.5	35.15	14.700	46.00	10.85	165	138	PK	PASS
288.04	14.5	30.05	15.520	46.00	15.95	165	138	PK	PASS
336.13	8.8	26.22	17.440	46.00	19.78	165	251	PK	PASS
835.33	2.1	27.11	25.050	46.00	18.89	165	73	PK	PASS

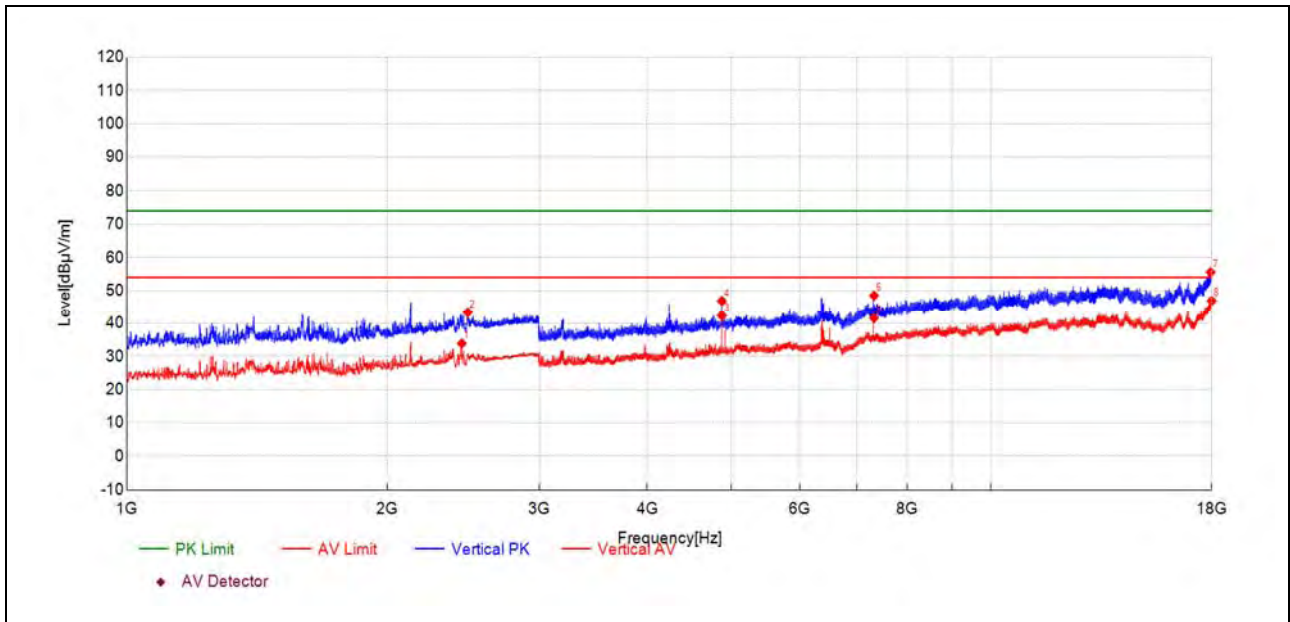


(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2440.29	32.9	33.87	1.010	-	-	165	23	AV	NA
2479.37	42.4	43.36	0.920	74.00	30.64	165	233	PK	PASS
4879.55	52.4	42.34	-10.010	54.00	11.66	165	9	AV	PASS
4880.05	56.9	46.87	-10.010	74.00	27.13	165	9	PK	PASS
7319.32	45.2	41.54	-3.670	54.00	12.46	165	326	AV	PASS
7320.32	52.2	48.48	-3.670	74.00	25.52	165	326	PK	PASS
17950.66	43.7	55.55	11.820	74.00	18.45	165	120	PK	PASS
17998.01	34.6	46.90	12.350	54.00	7.10	165	29	AV	PASS




Plot for Channel 39

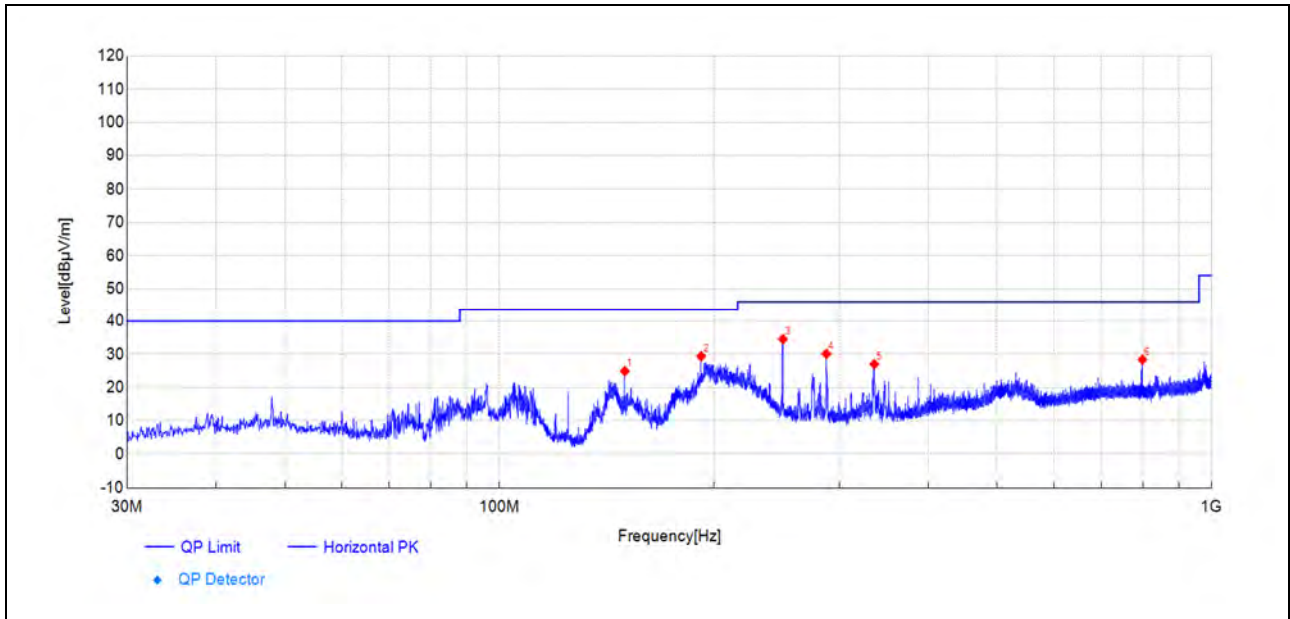


(Antenna Horizontal, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
149.99	15.1	24.92	9.830	43.50	18.58	165	56	PK	PASS
191.97	15.9	29.40	13.480	43.50	14.10	165	96	PK	PASS
250.00	19.8	34.54	14.700	46.00	11.46	165	299	PK	PASS
287.74	14.6	30.13	15.510	46.00	15.87	165	70	PK	PASS
335.95	9.6	27.04	17.430	46.00	18.96	165	96	PK	PASS
799.46	3.7	28.36	24.630	46.00	17.64	165	349	PK	PASS

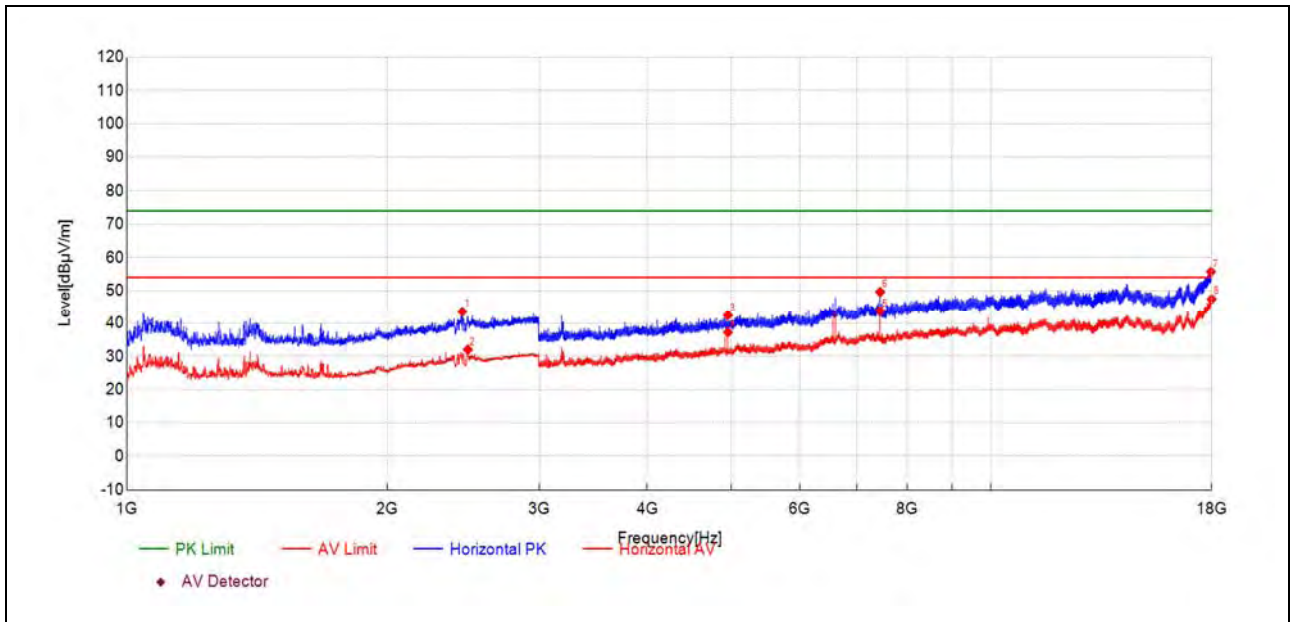


(Antenna Horizontal, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2443.71	42.5	43.56	1.040	74.00	30.44	165	220	PK	PASS
2479.85	31.1	32.01	0.920	-	-	165	127	AV	NA
4959.79	52.6	42.43	-10.130	74.00	31.57	165	157	PK	PASS
4959.79	47.4	37.25	-10.130	54.00	16.75	165	157	AV	PASS
7440.44	48.2	43.76	-4.470	54.00	10.24	165	180	AV	PASS
7440.44	54.1	49.58	-4.470	74.00	24.42	165	157	PK	PASS
17967.60	43.7	55.69	12.010	74.00	18.31	165	17	PK	PASS
18000.00	35.0	47.42	12.380	54.00	6.58	165	6	AV	PASS

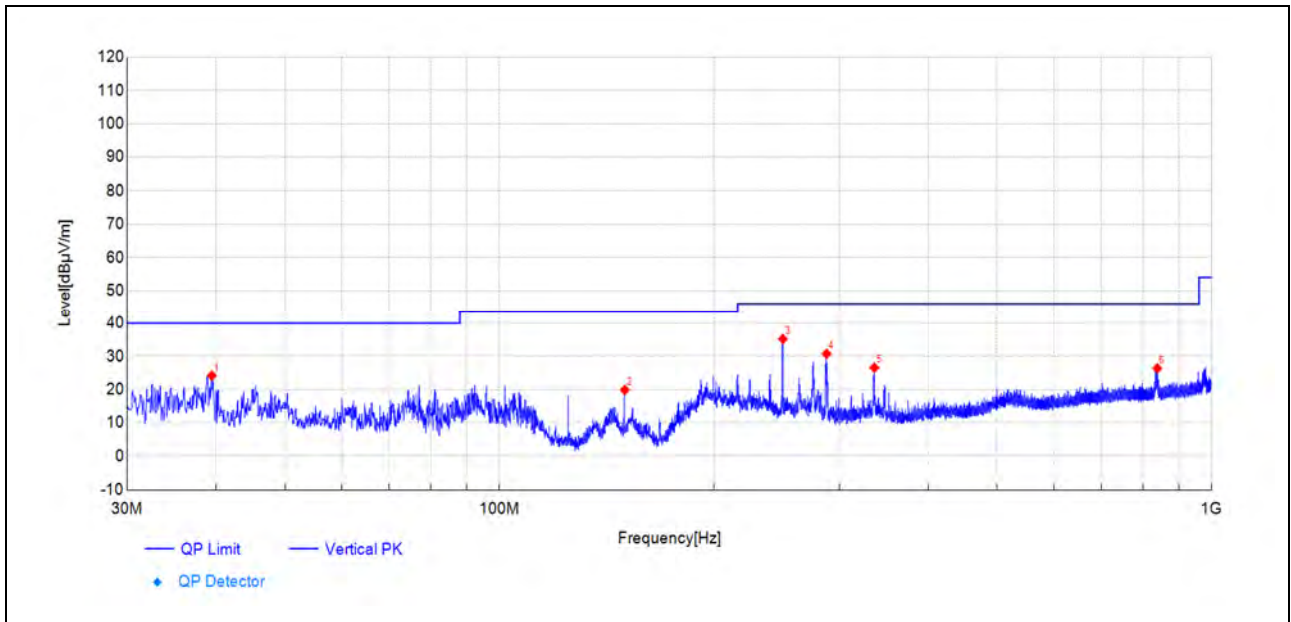

(Antenna Vertical, 30MHz to 1GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
39.47	9.8	24.20	14.420	40.00	15.80	165	124	PK	PASS
149.99	10.1	19.90	9.830	43.50	23.60	165	23	PK	PASS
250.00	20.5	35.22	14.700	46.00	10.78	165	124	PK	PASS
287.98	15.2	30.76	15.520	46.00	15.24	165	60	PK	PASS
336.01	9.2	26.58	17.430	46.00	19.42	165	276	PK	PASS
838.56	1.3	26.39	25.080	46.00	19.61	165	98	PK	PASS

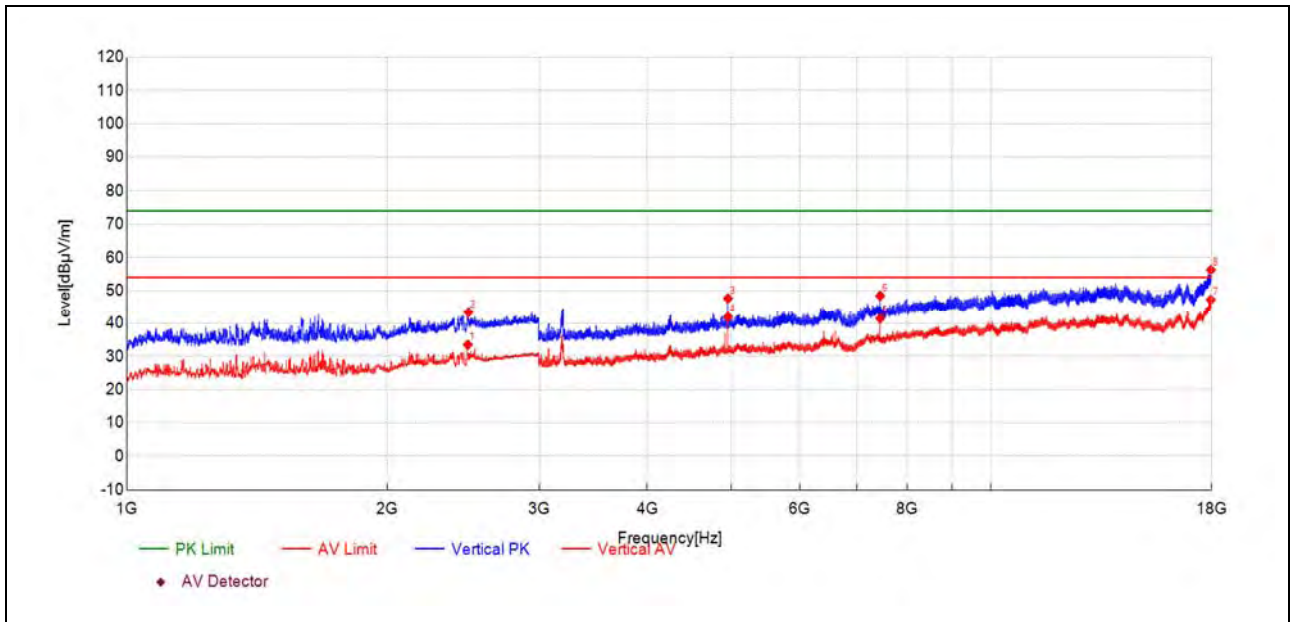

(Antenna Vertical, 1GHz to 18GHz)

Fre. (MHz)	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Detector	Verdict
2479.85	32.6	33.48	0.920	-	-	165	360	AV	NA
2483.76	42.5	43.35	0.900	74.00	30.65	165	220	PK	PASS
4959.79	57.8	47.64	-10.130	74.00	26.36	165	8	PK	PASS
4959.79	52.1	41.94	-10.130	54.00	12.06	165	0	AV	PASS
7438.94	45.9	41.44	-4.440	54.00	12.56	165	141	AV	PASS
7440.94	52.9	48.43	-4.470	74.00	25.57	165	120	PK	PASS
17953.15	35.4	47.23	11.850	54.00	6.77	165	25	AV	PASS
17964.11	44.3	56.23	11.970	74.00	17.77	165	47	PK	PASS



Notes

1. The report shall have report stamp or our company stamp.
2. The report shall be invalid without all the signatures of the editor and approver.
3. The report shall not be changed.
4. Any objections must be raised to Morlab within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.
5. Conformity declaration:
 - ☒ Morlab issues a statement of conformity based on the corresponding standards (default)
 - ☐ Morlab issues a statement of conformity based on the applicant requirement
6. Use of uncertainty of measurement for decisions on conformity (decision rule):

No decision rule is specified by the testing standard, when comparing the measurement result with the applicable limit according to the specification in that standard. The decisions on conformity are made without applying the measurement uncertainty ("simple acceptance" decision rule).

————— END OF REPORT —————