TEST REPORT

Part 15 Subpart C 15.247

Equipment under test	Wireless Barcode Scanner
Model name	TSK-4500Plus
Derivative model	TSK-5500Plus
FCC ID	2AOHVTSK-4500PLUS
Applicant	Techscan Korea Co.,Ltd.
Manufacturer	Techscan Korea Co.,Ltd.
Date of test(s)	2017.12.14 ~ 2017.12.20
Date of issue	2017.12.21

Issued to
Techscan Korea Co.,Ltd.
Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil,
Guro-gu, Seoul, Korea
Tel: + 82-2-890-5440 / Fax: + 82-2-890-5443

Issued by
KES Co., Ltd.
C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si,
Gyeonggi-do, Korea
473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Tel: +82-31-425-6200 / Fax: +82-31-424-0450

Test and report completed by :	**Report approval by :**
Hyeon-su, Jang Test engineer	Jeff Do Technical manager

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Revision history

Revision	Date of issue	Test report No.	Description
-	2017.12.21	KES-RF-17T0132	Initial

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

TABLE OF CONTENTS

1. General information 4
1.1. EUT description 4
1.2. Test configuration 5
1.3. Device modifications 5
1.4. Information about derivative model 5
1.5. Frequency/channel operations 5
1.6. Accessory information 5
2. Summary of tests 6
3. Test results 7
3.1. 20 dB bandwidth 7
3.2. Output power 9
3.3. Carrier frequency separation 11
3.4. Number of hopping frequency 13
3.5. Time of occupancy 15
3.6. Radiated restricted band and emissions 17
3.7. Conducted band edge and out of band emissions 31
Appendix A. Measurement equipment 34
Appendix B. Test setup photo 35

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

1. General information

Applicant:	Techscan Korea Co.,Ltd.
Applicant address:	Guro-Dong-410, Woorim e-biz Center II, 12, Digital-ro 33-gil, Guro-gu, Seoul, Korea
Test site:	KES Co., Ltd.
Test site address:	C-3701, 40, Simin-daero 365beon-gil, Dongan-gu, Anyang-si, Gyeonggi-do, Korea 473-21, Gayeo-ro, Yeoju-si, Gyeonggi-do, Korea
Test Facility	FCC Accreditation Designation No.: KR0100, Registration No.: 444148
FCC rule part(s):	15.247
FCC ID:	2AOHVTSK-4500PLUS
Test device serial No.:	☒ Production ☐ Pre-production ☐ Engineering

1.1. EUT description

Equipment under test	Wireless Barcode Scanner
Frequency range	BT : 2402 ㎒ ~ 2480 ㎒ (BDR)
Model	TSK-4500Plus
Derivative model	TSK-5500Plus
Modulation technique	BT : FHSS, GFSK
Number of channels	BT : 79ch (Hopping mode), 20ch(AFH mode)
Antenna specification	Type : PCB Antenna, Peak gain : 2.12 ㏈i
Power source	DC 2.4 V (Rechargeable Battery)

15.247(a)(1) that the rx input bandwidths shift frequencies in synchronization with the transmitted signals.

15.247(g): In accordance with the Bluetooth Industry Standard, the system is designed to comply with all of the regulations in Section 15.247 when the transmitter is presented with a continuous data (or information) system.

15.247(h): In accordance with the Bluetooth Industry Standard, the system does not coordinate it channels selection/ hopping sequence with other frequency hopping systems for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Pseudorandom frequency hopping sequence

The channel is represented by a pseudo-random hopping sequence hopping through the 79 RF channels. The hopping sequence is unique for the piconet and is determined by the Bluetooth device address of the master; the phase in the hopping sequence is determined by the Bluetooth clock of the master. The channel is divided into time slots where each slot corresponds to an RF hop frequency. Consecutive hops correspond to different RF hop frequencies. The nominal hop rate is 1 600 hops/s.

Equal hopping frequency use

The channels of this system will be used equally over the long-term distribution of the hopsets.

System receiver input bandwidth

Each channel bandwidth is 1 ㎒.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

1.2. Test configuration

The **Techscan Korea Co.,Ltd. Wireless Barcode Scanner FCC ID: 2AOHVTSK-4500PLUS** was tested per the guidance of ANSI C63.10-2013 and DA 00-705. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

1.3. Device modifications

N/A

1.4. Information about derivative model

The derivative model different from the basic model in engine and Engine's board to scan. The RF module's circuit diagram and hardware are fundamentally same. It is for model management purpose.

1.5. Frequency/channel operations

Ch.	Frequency (㎒)	Rate(Mbps)
00	2402	1
⋮	⋮	⋮
39	2441	1
⋮	⋮	⋮
78	2480	1

1.6. Accessory information

Applicant	Equipment	Manufacturer	Model	Power source
-	-	-	-	-

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

2. Summary of tests

Reference	Test description	Test results
15.247(a)(1)(iii)	20 dB bandwidth	Pass
15.247(b)(1)	Output power	Pass
15.247(a)(1)	Channel separation	Pass
15.247(a)(1)(iii)	Number of channels	Pass
15.247(a)(1)(iii)	Time of occupancy	Pass
15.205, 15.209	Radiated restricted band and emission	Pass
15.207(d)	Conducted band edge and out of band emissions	Pass
15.207(a)	AC conducted emissions	N/A[Note.1]

Note.

1. This device doesn't required AC conducted emission test because only battery is used in actual use condition.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3. Test results

3.1. 20 dB bandwidth

Test setup

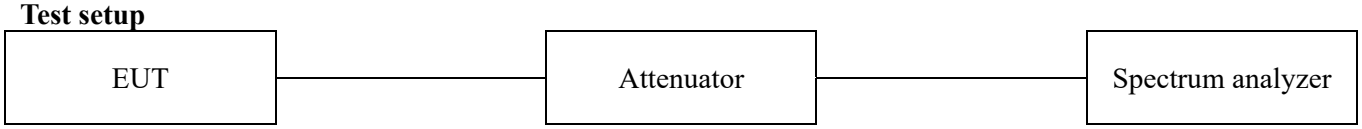

Test procedure
DA 00-705

Test setting
1. Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
2. RBW ≥ 1% of the 20 dB bandwidth
3. VBW ≥ RBW
4. Sweep = auto
5. Detector function = peak
6. Sweep = auto couple
7. Trace mode = max hold

Limit
Not applicable

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results

Frequency(㎒)	Channel no.	Data rate(Mbps)	Measured bandwidth(㎒)
2 402	00	1	0.808
2 441	39		0.808
2 480	78		0.821

BDR(1Mbps)

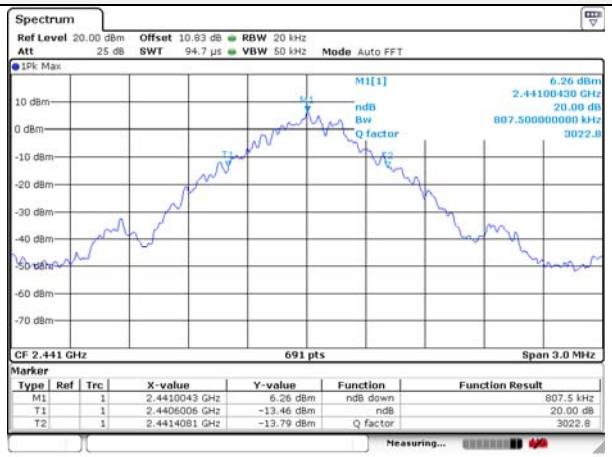

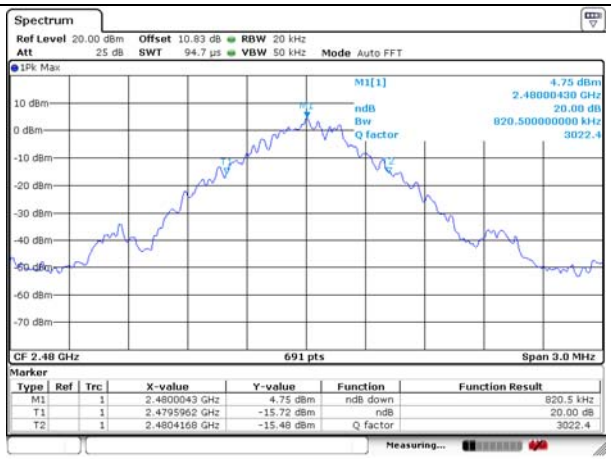

Blank

3.2. Output power

Test setup



Test procedure
DA 00-705

Test setting
1. Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
2. RBW > the 20 dB bandwidth of the emission being measured
3. VBW ≥ RBW
4. Sweep = Auto
5. Detector function = Peak
6. Trace = Max hold

Limit
According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 ㎑ or the 20 ㏈ bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 ㎽.

According to §15.247(b)(1), For frequency hopping systems operating in the 2 400 ~ 2 483.5 ㎒ employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 ~ 5 805 ㎒ band: 1 Watt.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results

Frequency(㎒)	Channel no.	Data rate(Mbps)	Measured power (dBm)	Peak Power Limit (dBm)
2 402	00	1	9.12	20.97
2 441	39		8.21	20.97
2 480	78		6.95	20.97

BDR(1Mbps)

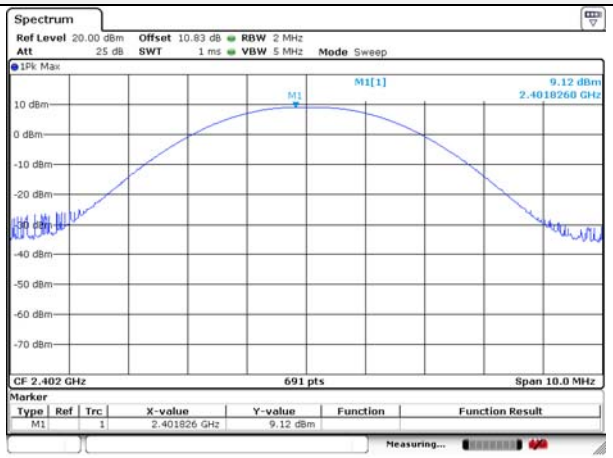

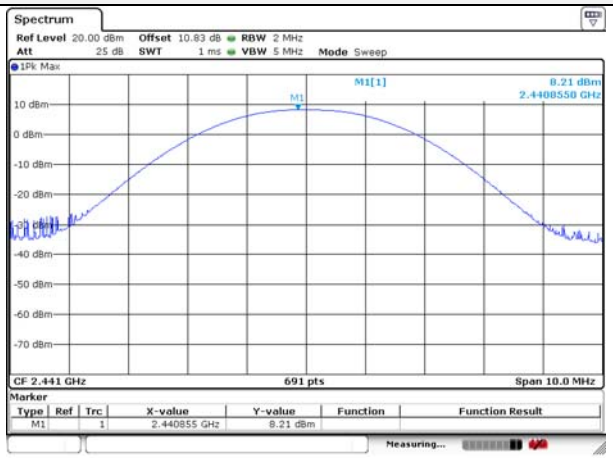

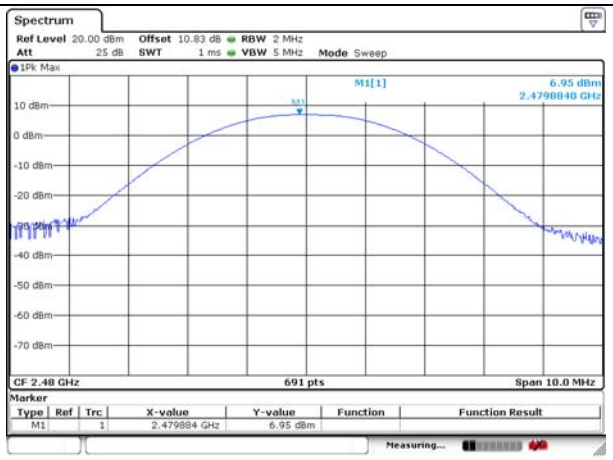

Blank

3.3. Carrier frequency separation

Test setup

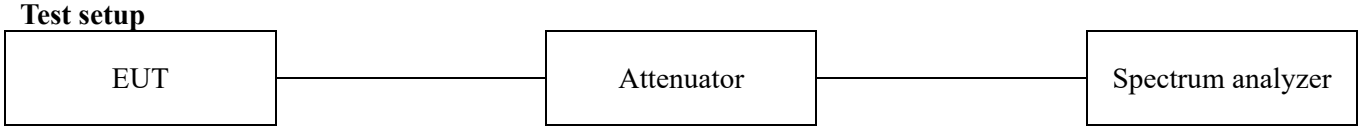

Test procedure
DA 00-705

Test setting
1. The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:
2. Span = wide enough to capture the peaks of two adjacent channels
3. Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span
4. Video (or Average) Bandwidth (VBW) ≥ RBW

5. Sweep = auto
6. Detector function = peak
7. Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

Limit
According to 15.247(a)(1), frequency hopping system operating in 2 400 ~ 2 483.5 ㎒. Band may have hopping channel carrier frequencies that are separated by 25 ㎑ or two-third of 20 ㏈ bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 ㎽.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results

Frequency(㎒)	Channel no.	Data rate(Mbps)	Channel Separation (㎒)
2 441	39	1	1 003

Note:
Measurement is made with EUT operating in hopping mode between 79 channels providing a worse case scenario as compared to AFH mode hopping between 20 channels.

Hopping mode_BDR(1Mbps)

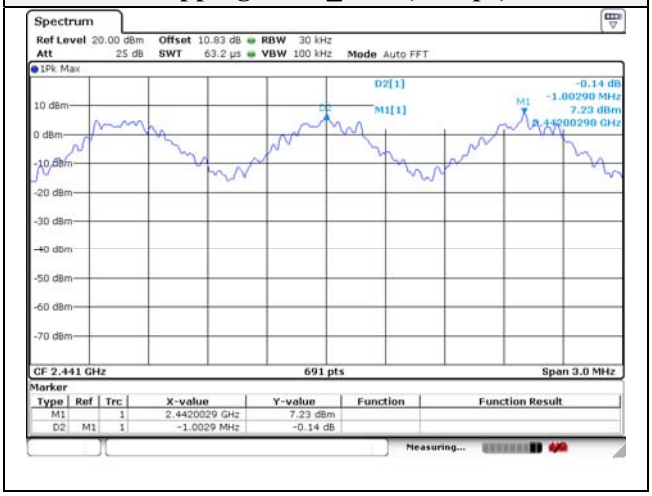

3.4. Number of hopping frequency

Test setup

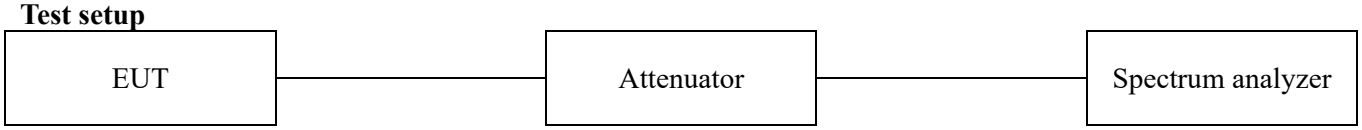

Test procedure
DA 00-705

Test setting
1. The EUT must have its hopping function enabled.
2. Frequency range: 2 400 ㎒ ~ 2 441.5 ㎒, 2 441.5 ㎒ ~ 2 483.5 ㎒
3. Span = the frequency band of operation
4. RBW = 300 ㎑ (≥ 1% of the span)
5. VBW = 1 ㎒ (≥ RBW)
6. Sweep = auto
7. Detector function = peak
8. Trace = max hold

All the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Limit
According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 ㎒ bands shall use at least 15 hopping frequencies.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results

Hopping mode_BDR(1Mbps)	
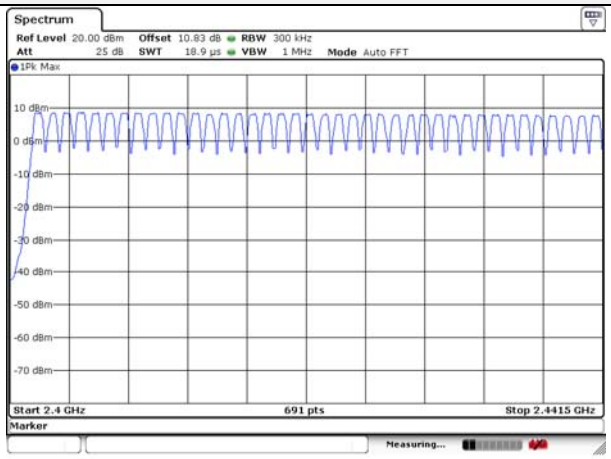	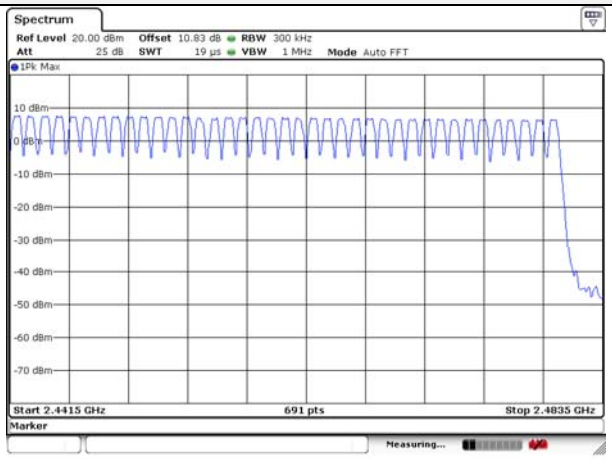

Note:
In case of AFH mode, minimum number of hopping channels is 20.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.5. Time of occupancy

Test setup

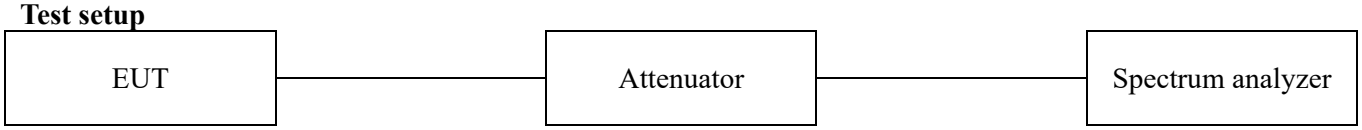

Test procedure
DA 00-705

Test setting
1. The EUT must have its hopping function enabled.
2. Span = zero span, centered on a hopping channel
4. RBW = 1 ㎒
5. VBW = 1 ㎒ (≥ RBW)
6. Sweep = as necessary to capture the entire dwell time per hopping channel
7. Detector function = peak
8. Trace = max hold

Limit
According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2 400 ~ 2 483.5 ㎒ band, the average time of occupancy on any frequency shall not be greater than 0.4 second within a 31.6 second period.

A period time = 0.4(s) × 79 = 31.6(s)

Time of occupancy on the TX channel in 31.6 sec
= time domain slot length × (hop rate ÷ number of hop per channel) × 31.6

• Adaptive Frequency Hopping

A period time = 0.4(s) × 20 = 8.0(s)

Time of occupancy on the TX channel in 8.0 sec
= time domain slot length × (hop rate ÷ number of hop per channel) × 8.0

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results
Operation mode: GFSK

Packet type	Frequency (MHz)	Dwell time (ms)	Time of occupancy on the Tx channel in 31.6 sec (ms)	Limit for time of occupancy on the Tx channel in 31.6 sec (ms)
DH1	2 441	0.506	164.48	400
DH3	2 441	1.756	282.88	400
DH5	2 441	2.951	322.13	400

Note:
Normal Mode
DH1: Dwell time (ms) × [(1 600 ÷ 2) ÷ 79] × 31.6(s) = 164.48 (ms)
DH3: Dwell time (ms) × [(1 600 ÷ 4) ÷ 79] × 31.6(s) = 282.88 (ms)
DH5: Dwell time (ms) × [(1 600 ÷ 6) ÷ 79] × 31.6(s) = 322.13 (ms)

BDR(1Mbps)

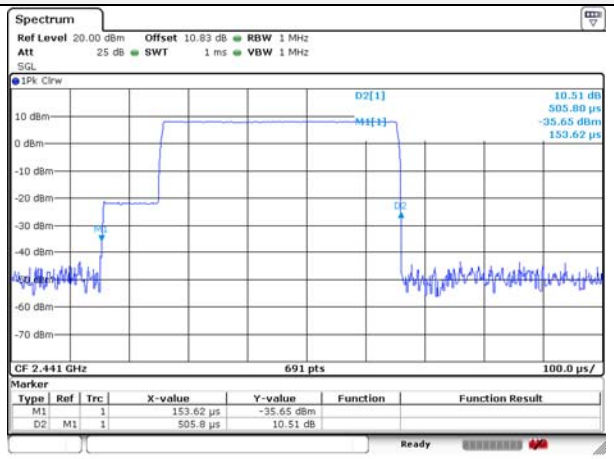

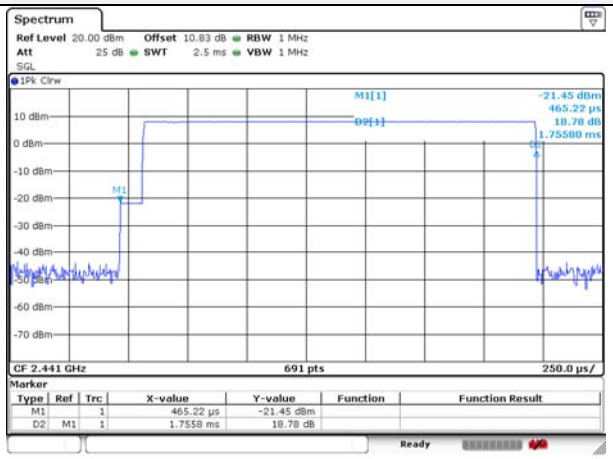

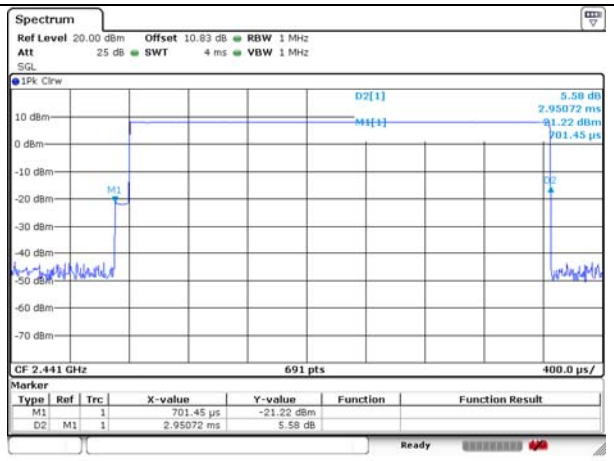

Blank

3.6. Radiated restricted band and emissions

Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 ㎑ to 30 ㎒ Emissions.

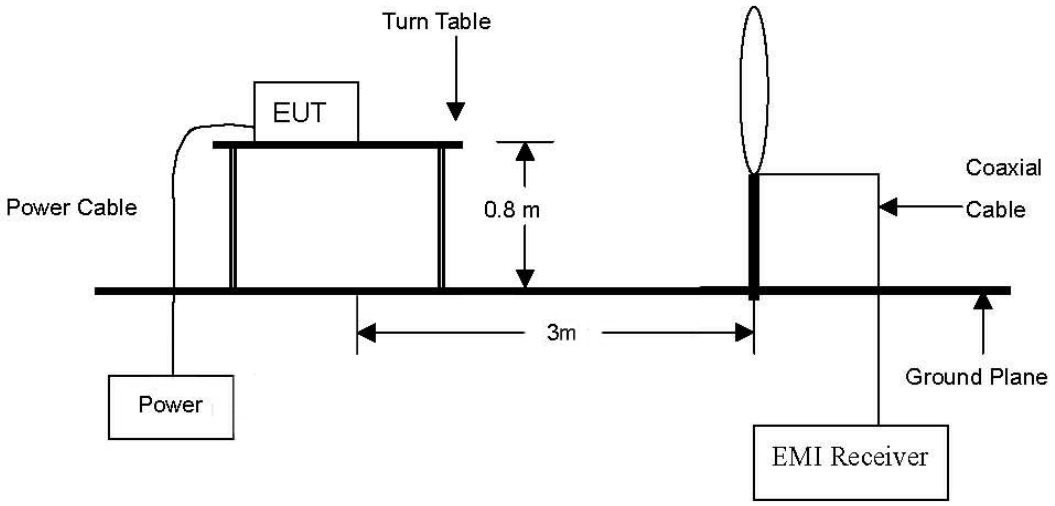

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 ㎒ to 1 ㎓ emissions.

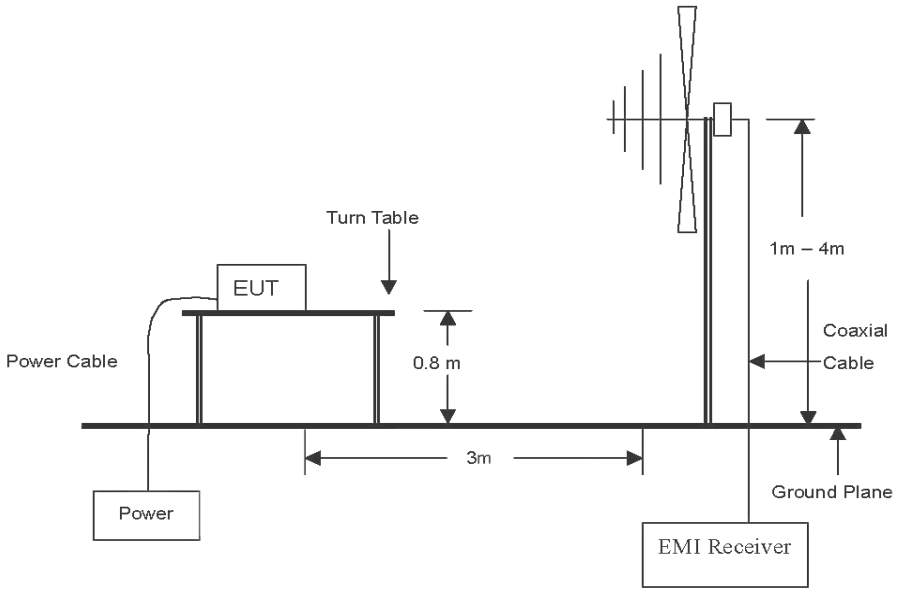

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 ㎓ to the tenth harmonic of the highest fundamental frequency or to 40 ㎓ emissions, whichever is lower.

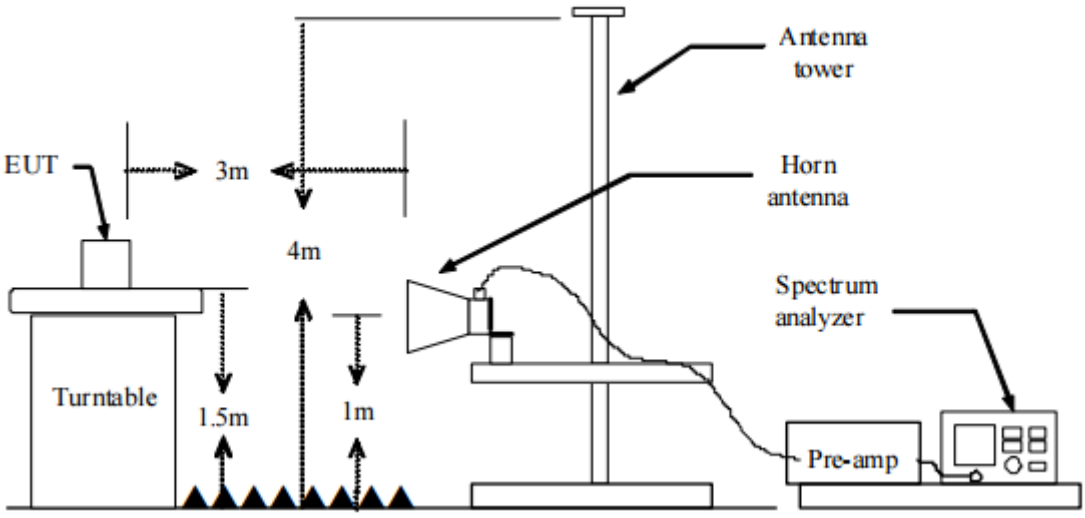

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test procedure

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. Spectrum analyzer settings for $f < 1$ ㎓:
   Span = wide enough to fully capture the emission being measured
   RBW = 100 ㎑
   VBW ≥ RBW
   Sweep = auto
   Detector function = quasi peak
   Trace = max hold
8. Spectrum analyzer settings for $f \geq 1$ ㎓: Peak
   Span = wide enough to fully capture the emission being measured
   RBW = 1 ㎒
   VBW ≥ RBW
   Sweep = auto
   Detector function = peak
   Trace = max hold
9. Spectrum analyzer settings for $f \geq 1$ ㎓: Average
   Span = wide enough to fully capture the emission being measured
   RBW = 1 ㎒
   VBW ≥ 1/T ㎐, where T= pulse width in seconds
   Sweep = auto
   Detector function = peak
   Trace = max hold
10. Duty Cycle Correction Factor (79 channel hopping)
    a. Time to cycle through all channels = Δt=τ[㎳] × 79 channels = 233.129 ㎳, where τ = pulse width
    b. 100 ㎳/ Δt[㎳] = H → Round up to next highest integer, H '=1
    c. Worst Case Dwell Time = τ[㎳] × H' = 2.951 ㎳
    d. Duty Cycle Correction = 20log (Worst Case Dwell Time/ 100㎳) ㏈ = -30.60 ㏈

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Note:

1. The spectrum is measured from 9 ㎑ to the 10th harmonic of the fundamental frequency of the transmitter using CISPR quasi peak detector below 1 ㎓. Above 1 ㎓, average and peak measurements were taken using linearly polarized horn antennas. The worst-case emissions are reported however emissions whose levels were not within 20 ㏈ of the respective limits were not reported.
2. When Average result is different from peak result over 20 ㏈ (over-averaging), according to 15.35 (c), as a "duty cycle correction factor", pulse averaging with 20 log(duty cycle) has to be used.
   Duty cycle correction factor = 20log(dwell time/100 ㎳)
3. Emissions below 18 ㎓ were measured at a 3 meter test distance while emissions above 18 ㎓ were measured at a 1 meter test distance with the application of a distance correction factor.
4. Average test would be performed if the peak result were greater than the average limit.
5. Field strength(㏈㎶/m) = Level(㏈㎶) + Correction factors(㏈/m) + Cable loss(㏈) + or F_d(㏈)
6. Correction factors(㏈/m) = Antenna factor(㏈/m) + Cable loss(㏈) + or Amp. gain(㏈)
7. Margin(㏈) = Limit(㏈㎶/m) - Field strength(㏈㎶/m)
8. The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.
9. The worst-case emissions are reported however emissions whose levels were not within 20 ㏈ of respective limits were not reported.
10. According to exploratory test no any obvious emission were detected from 9 ㎑ to 30 ㎒. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.
11. f < 30 ㎒, extrapolation factor of 40 ㏈/decade of distance. $F_d = 40\log(D_m / Ds)$
    $f \geq$ 30 ㎒, extrapolation factor of 20 ㏈/decade of distance. $F_d = 20\log(D_m / Ds)$

Where:

F_d = Distance factor in ㏈
D_m = Measurement distance in meters
D_s = Specification distance in meters

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Limit

According to 15.209(a), for an intentional radiator devices, the general required of field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values：

Frequency (㎒)	Distance (Meters)	Radiated (㎶/m)
0.009 ~ 0.490	300	2 400 / F(㎑)
0.490 ~ 1.705	30	24 000 / F(㎑)
1.705 ~ 30.0	30	30
30 ~ 88	3	100**
88 ~ 216	3	150**
216 ~ 960	3	200**
Above 960	3	500

**Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 ~ 72 ㎒, 76 ~ 88 ㎒, 174 ~ 216 ㎒ or 470 ~ 806 ㎒. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results (Below 30 ㎒)

Mode:	BDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	00(Worst case)

Frequency (㎒)	Level (dBμV)	Ant. Pol. (H/V)	CF (dB)	F_d (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
No spurious emissions were detected within 20㏈ of the limit							

Horizontal	Vertical
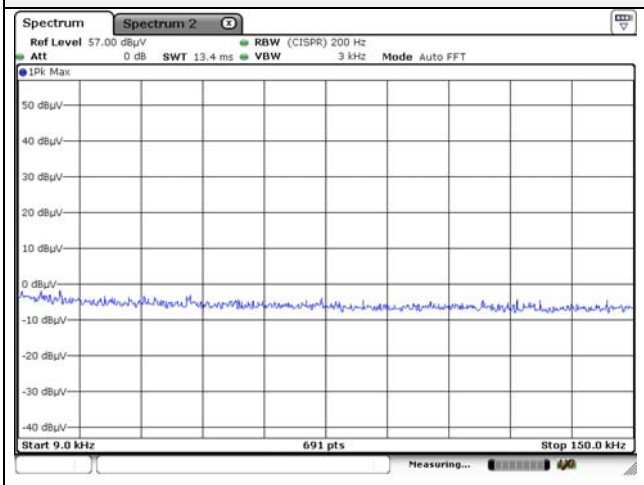	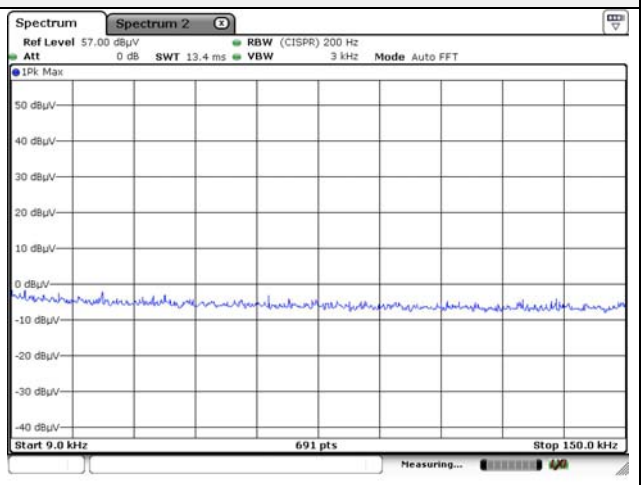
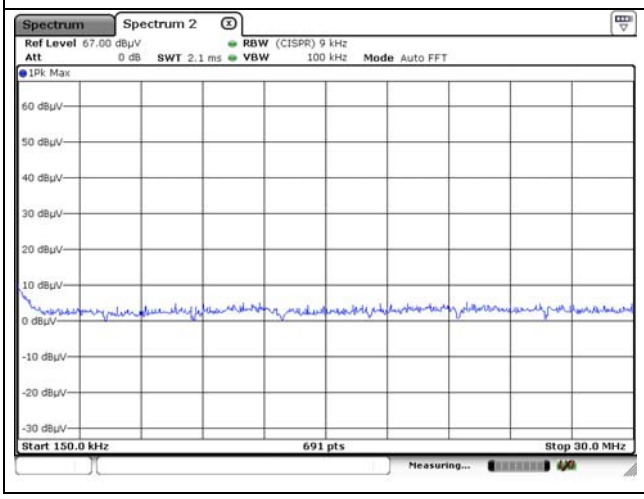	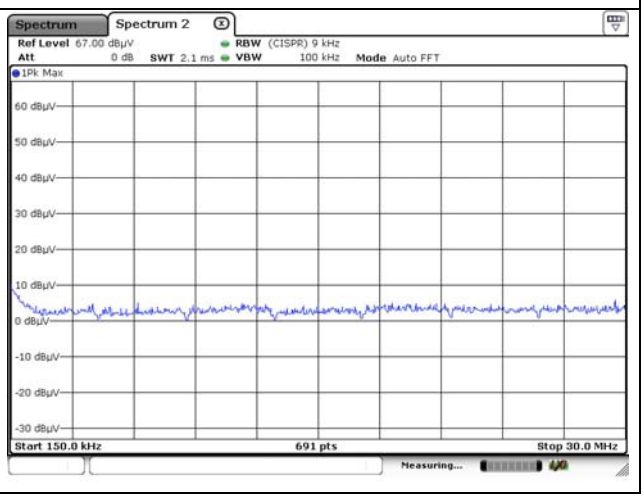

Test results (Below 1 000 ㎒) – Worst case

Mode:	BDR
Transfer rate:	3 Mbps
Distance of measurement:	3 meter
Channel:	00(Worst case)

Horizontal // Vertical

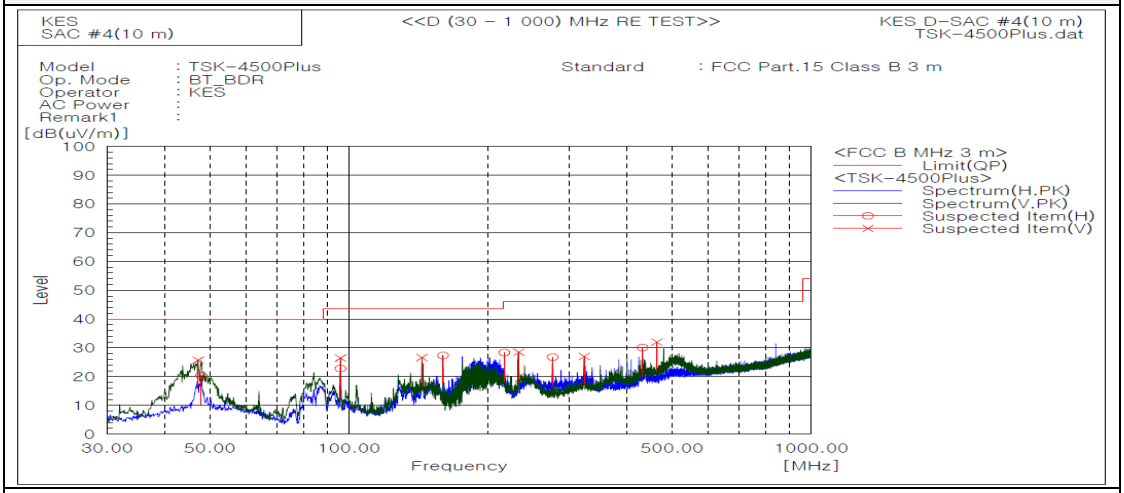

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Remark
1	47.945	H	48.5	-28.2	20.3	40.0	19.7	
2	95.960	H	52.6	-29.8	22.8	43.5	20.7	
3	159.980	H	58.9	-31.6	27.3	43.5	16.2	
4	217.089	H	55.8	-27.5	28.3	46.0	17.7	
5	276.138	H	52.0	-25.2	26.8	46.0	19.2	
6	431.944	H	50.1	-20.0	30.1	46.0	15.9	
7	47.218	V	53.9	-28.2	25.7	40.0	14.3	
8	95.960	V	56.2	-29.8	26.4	43.5	17.1	
9	143.975	V	59.1	-32.5	26.6	43.5	16.9	
10	233.215	V	55.4	-26.9	28.5	46.0	17.5	
11	323.061	V	50.8	-23.8	27.0	46.0	19.0	
12	463.954	V	51.1	-19.1	32.0	46.0	14.0	

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results (Above 1 000 ㎒)

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 00

- **Spurious**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1600.60	51.98	Peak	H	-4.98	-	47.00	74.00	27.00
1730.80	48.28	Peak	H	-3.74	-	44.54	74.00	29.46
4814.00	52.56	Peak	H	7.67	-	60.23	74.00	13.77
4814.00	52.56	Average	H	7.67	-30.06	30.17	54.00	23.83
1600.60	52.18	Peak	V	-4.98	-	47.20	74.00	26.80
1840.80	48.27	Peak	V	-2.65	-	45.62	74.00	28.38
4813.00	50.36	Peak	V	7.66	-	58.02	74.00	15.98
4813.00	50.36	Average	V	7.66	-30.06	27.96	54.00	26.04

- **Band edge**

Frequency (㎒)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2386.08	51.56	Peak	H	-0.23	-	51.33	74.00	22.67
2341.41	50.36	Peak	V	-0.31	-	50.05	74.00	23.95

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Restricted band // Horizontal // Peak

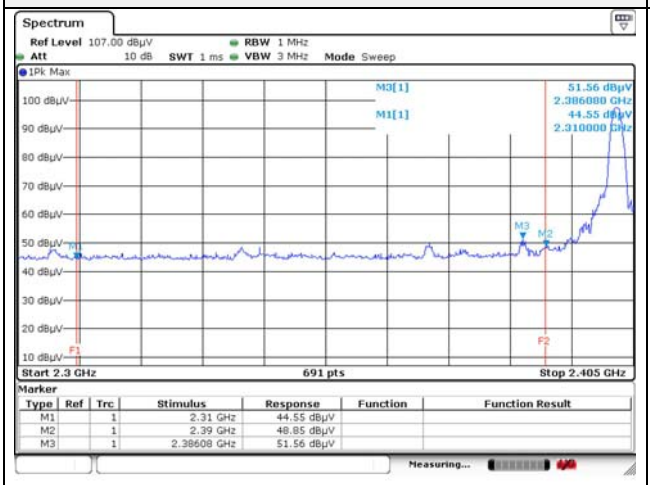

Restricted band // Vertical // Peak

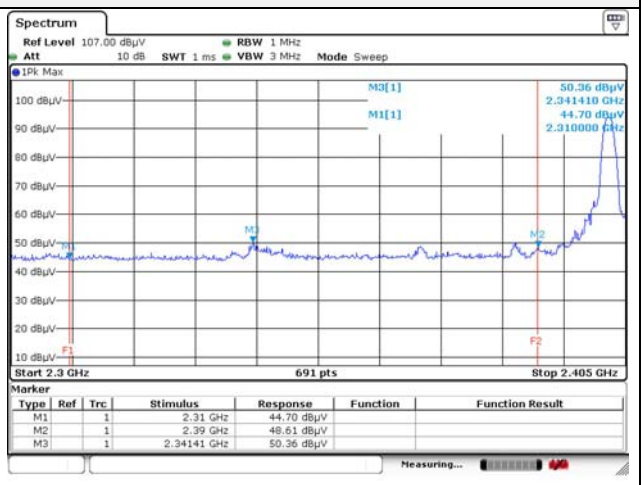

Horizontal // Peak for 1 ㎓ to 3 ㎓

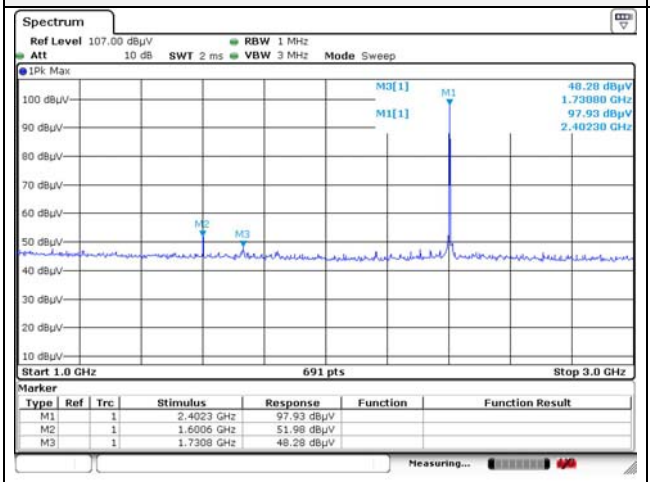

Vertical // Peak for 1 ㎓ to 3 ㎓

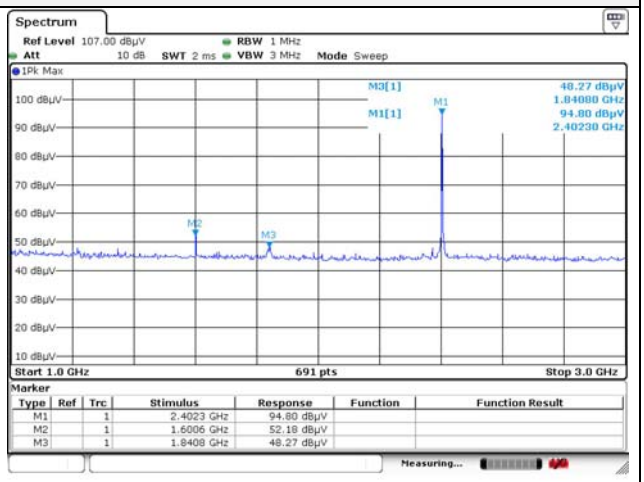

Horizontal // Peak for 3 ㎓ to 18 ㎓

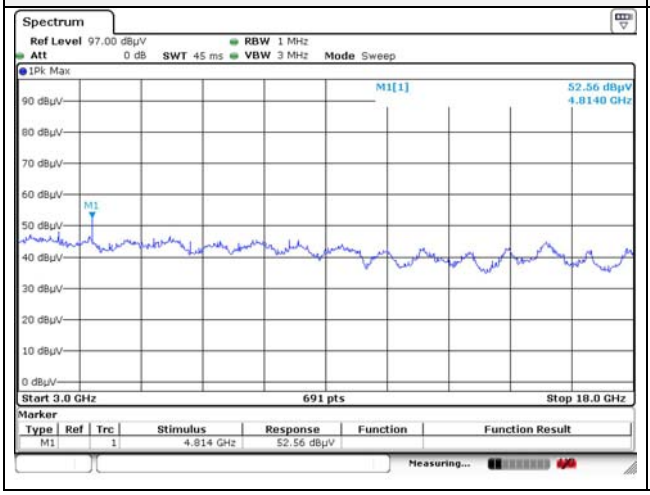

Vertical // Peak for 3 ㎓ to 18 ㎓

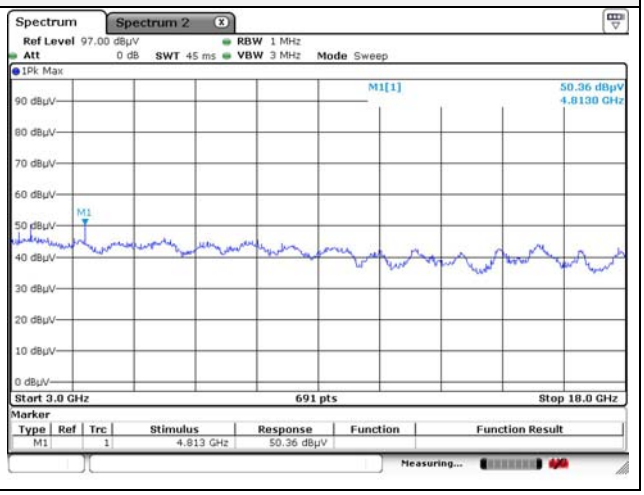

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 39

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1629.50	54.03	Peak	H	-4.70	-	49.33	74.00	24.67
2162.10	47.29	Peak	H	-0.65	-	46.64	74.00	27.36
4878.00	48.44	Peak	H	8.17	-	56.61	74.00	17.39
4878.00	48.44	Average	H	8.17	-30.06	26.55	54.00	27.45
1629.50	54.50	Peak	V	-4.70	-	49.80	74.00	24.20
1843.70	48.11	Peak	V	-2.62	-	45.49	74.00	28.51
4878.00	50.06	Peak	V	8.17	-	58.23	74.00	15.77
4878.00	50.06	Average	V	8.17	-30.06	28.17	54.00	25.83

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Horizontal // Peak for 1 ㎓ to 3 ㎓

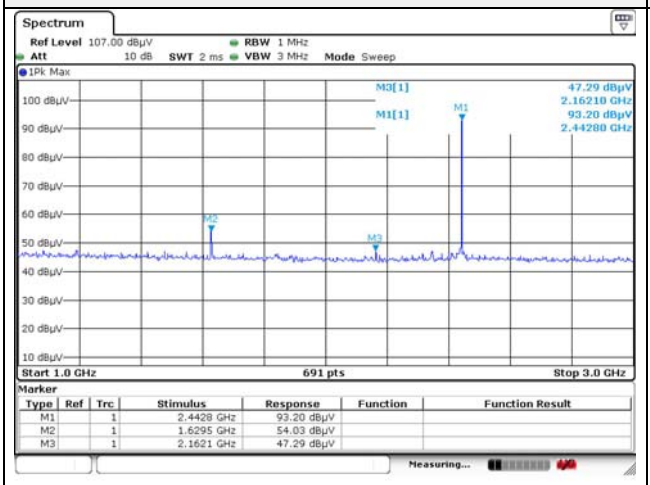

Vertical // Peak for 1 ㎓ to 3 ㎓

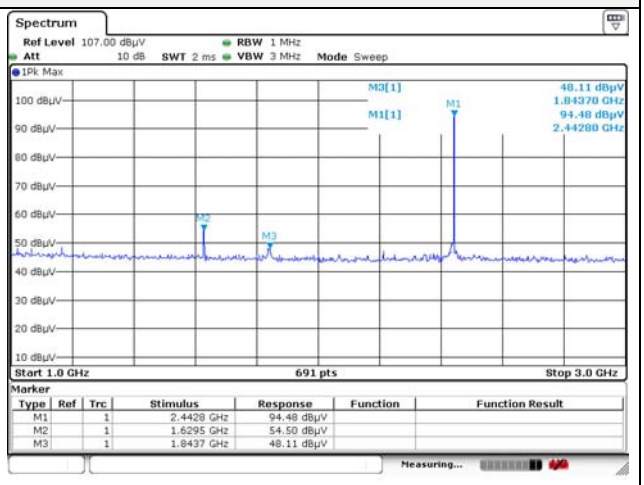

Horizontal // Peak for 3 ㎓ to 18 ㎓

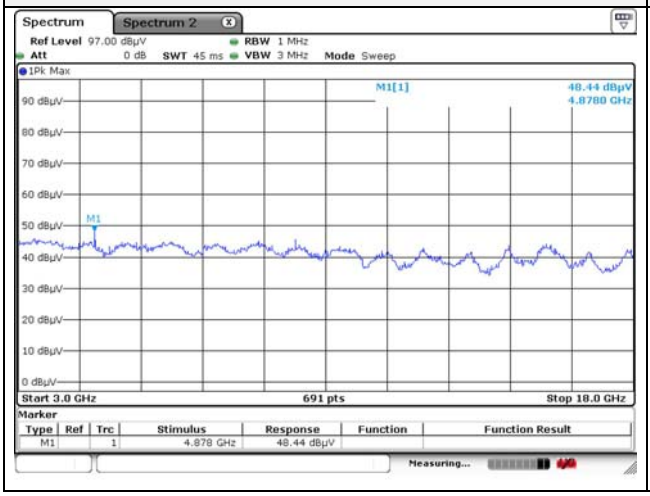

Vertical // Peak for 3 ㎓ to 18 ㎓

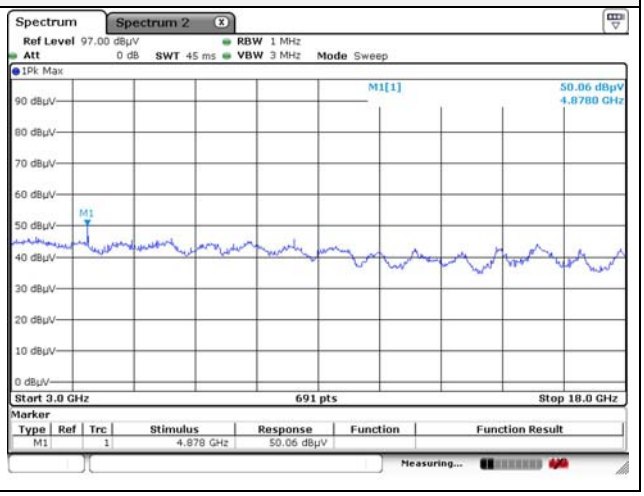

Note.
1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Mode: BDR

Transfer rate: 1 Mbps

Distance of measurement: 3 meter

Channel: 78

- **Spurious**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1652.70	54.65	Peak	H	-4.48	-	50.17	74.00	23.83
2162.10	46.73	Peak	H	-0.65	-	46.08	74.00	27.92
4965.00	47.09	Peak	H	8.85	-	55.94	74.00	18.06
4965.00	47.09	Average	H	8.85	-30.06	25.88	54.00	28.12
9913.90	48.59	Peak	H	15.27	-	63.86	74.00	10.14
9913.90	48.59	Average	H	15.27	-30.06	33.80	54.00	20.20
1652.70	55.36	Peak	V	-4.48	-	50.88	74.00	23.12
1843.70	48.28	Peak	V	-2.62	-	45.66	74.00	28.34
4965.00	49.41	Peak	V	8.85	-	58.26	74.00	15.74
4965.00	49.41	Average	V	8.85	-30.06	28.20	54.00	25.80

- **Band edge**

Frequency (MHz)	Level (dBμV)	Detect mode	Ant. Pol. (H/V)	CF (dB)	DCF (dB)	Field strength (dBμV/m)	Limit (dBμV/m)	Margin (dB)
2486.41	49.85	Peak	H	-0.04	-	49.81	74.00	24.19
2488.03	49.46	Peak	V	-0.04	-	49.42	74.00	24.58

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Restricted band // Horizontal // Peak

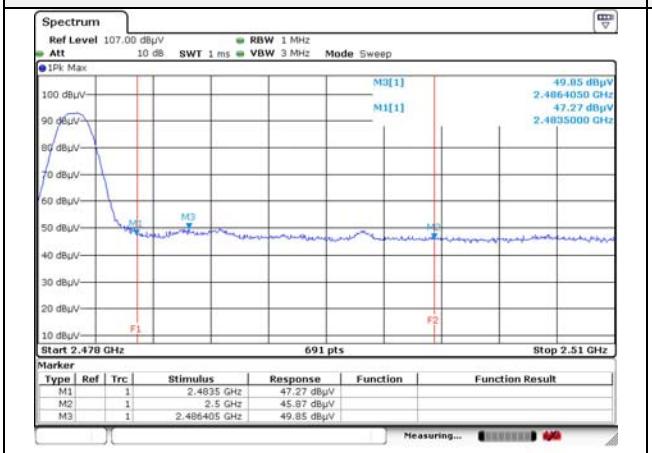

Restricted band // Vertical // Peak

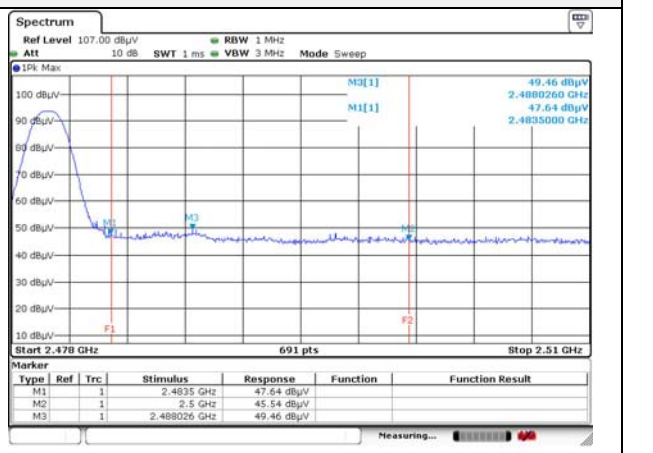

Horizontal // Peak for 1 ㎓ to 3 ㎓

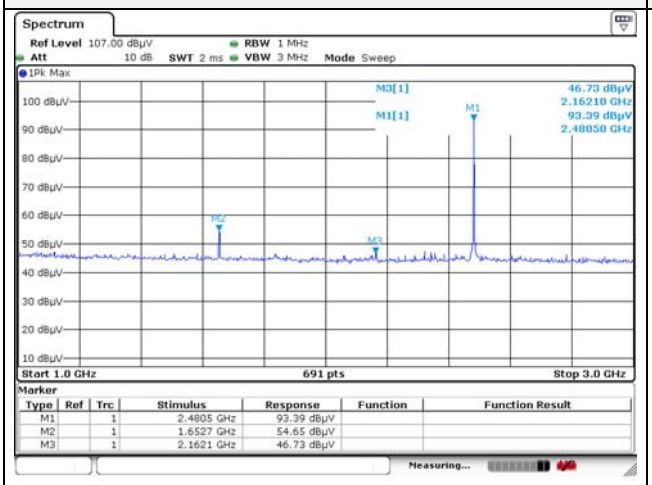

Vertical // Peak for 1 ㎓ to 3 ㎓

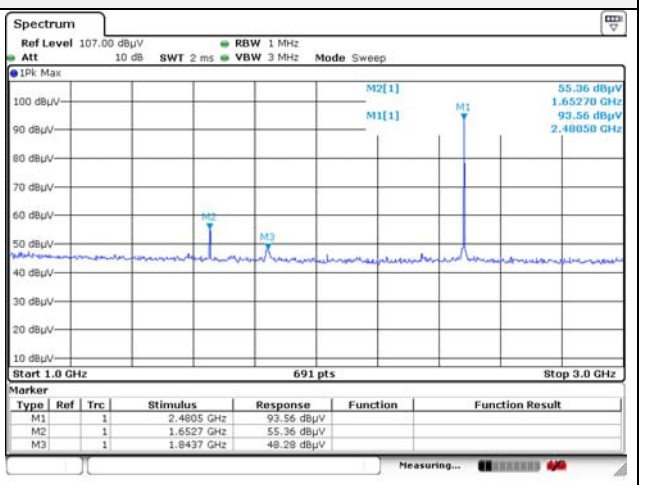

Horizontal // Peak for 3 ㎓ to 18 ㎓

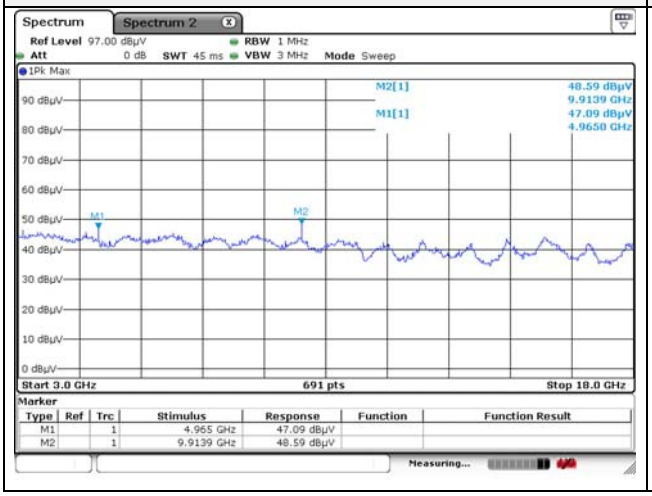

Vertical // Peak for 3 ㎓ to 18 ㎓

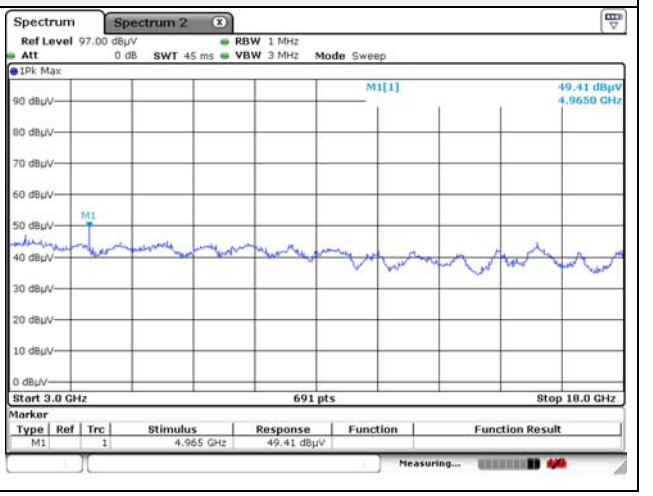

Note.

1. Average test would be performed if the peak result were greater than the average limit.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results (18 ㎓ to 30 ㎓) – Worst case

Mode:	BDR
Transfer rate:	1 Mbps
Distance of measurement:	3 meter
Channel:	00(Worst case)

Horizontal	Vertical
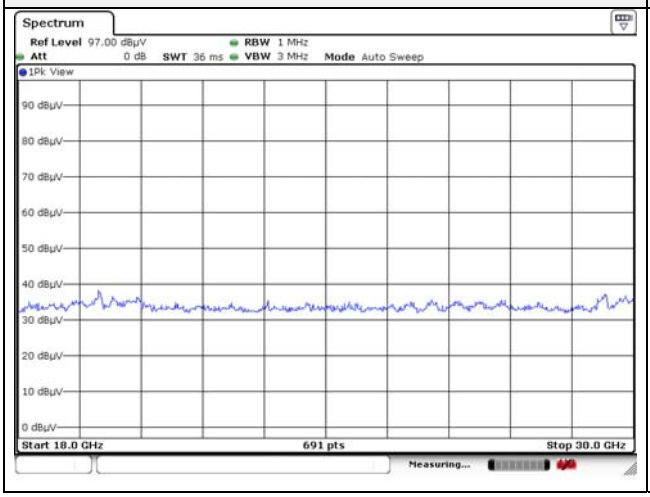	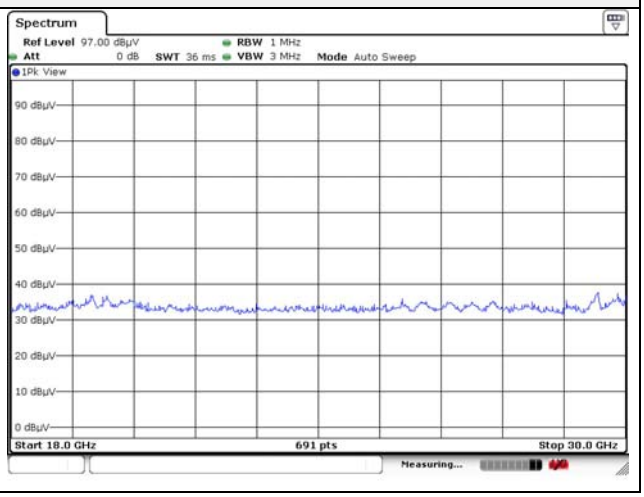

Note.
1. No spurious emission were detected above 18 ㎓.

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

3.7. Conducted band edge and out of band emissions

Test setup

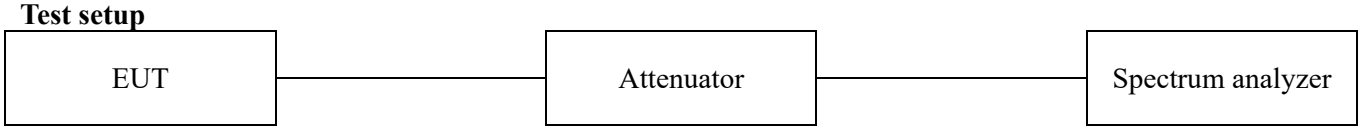

Test procedure

DA 00-705

Test setting

1. Span = wide enough to capture the peak level of the in-band emission and all spurious emissions(e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.
2. RBW = 100 ㎑
3. VBW ≥ 300 ㎑
4. Detector = Peak
5. Number of sweep points ≥ 2 × Span/RBW
7. Trace mode = max hold
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Limit

According to 15.247(d), in any 100 ㎑ bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 ㏈ below that in the 100 ㎑ bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval , as permitted under paragraph(b)(3) of this section , the attenuation required under this paragraph shall be 30 ㏈ instead of 20 ㏈. Attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emission which in the restricted band, as define in section 15.205(a), must also comply the radiated emission limits specified in section 15.209(a) (see section 15.205(c))

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Test results

BDR(1Mbps)

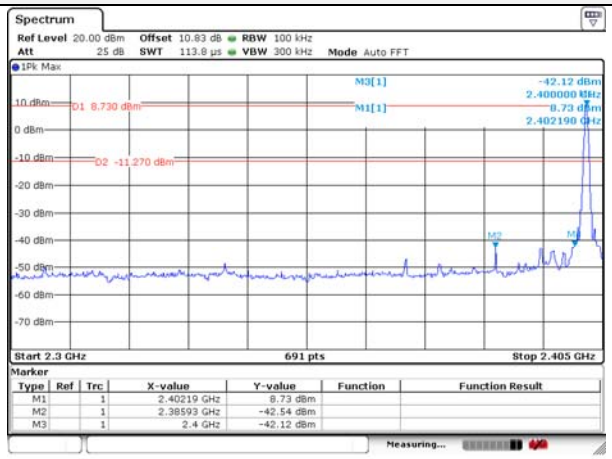

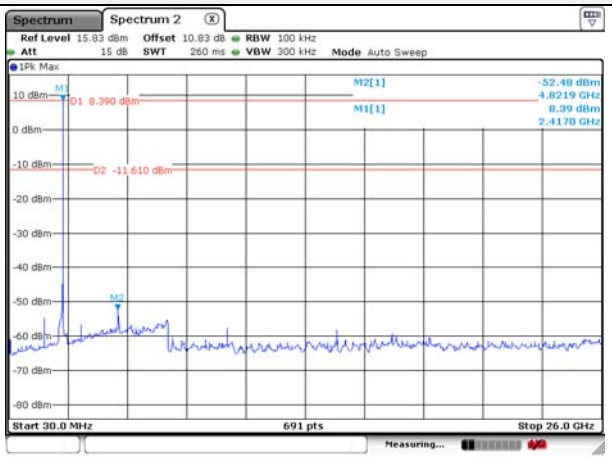

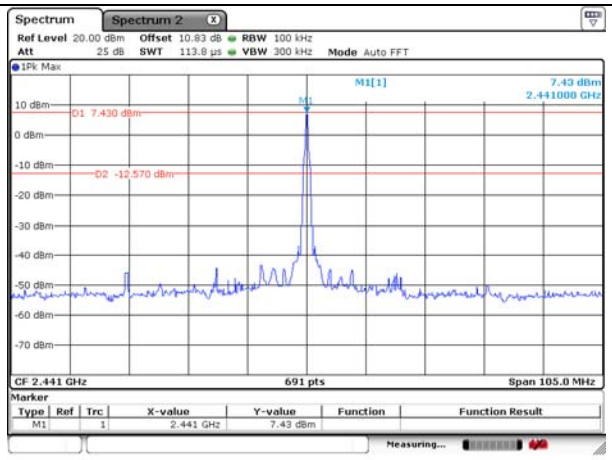

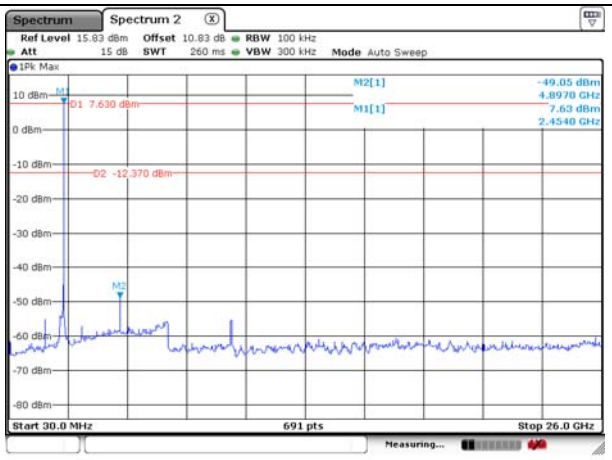

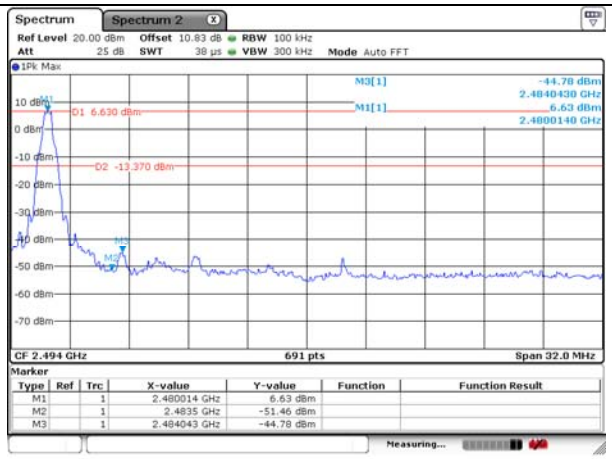

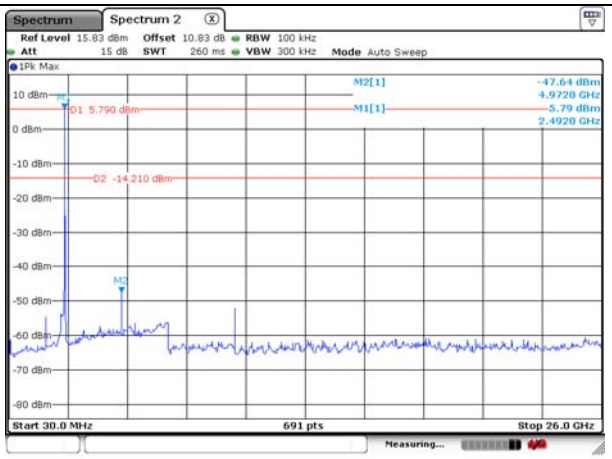

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.

Hopping mode_BDR(1Mbps)

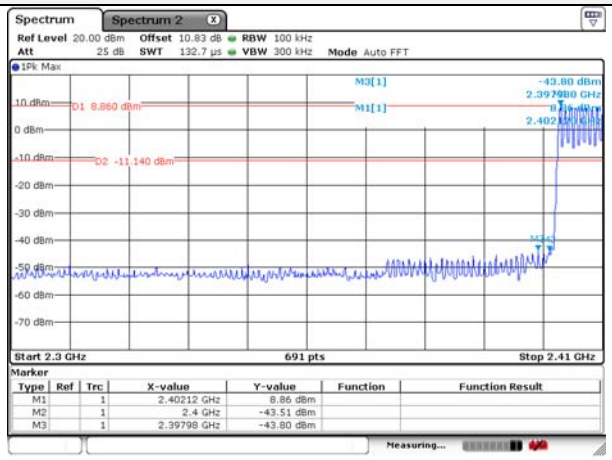

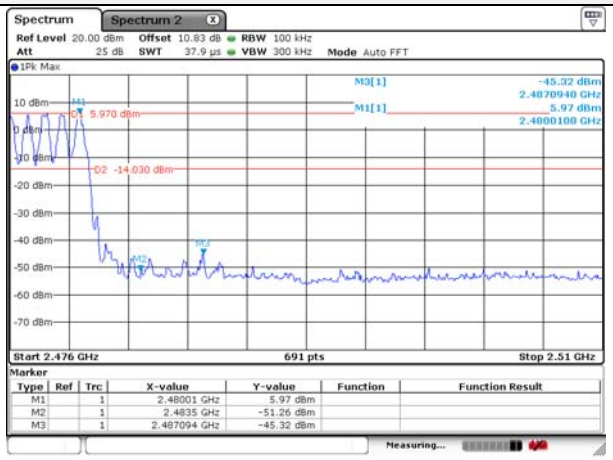

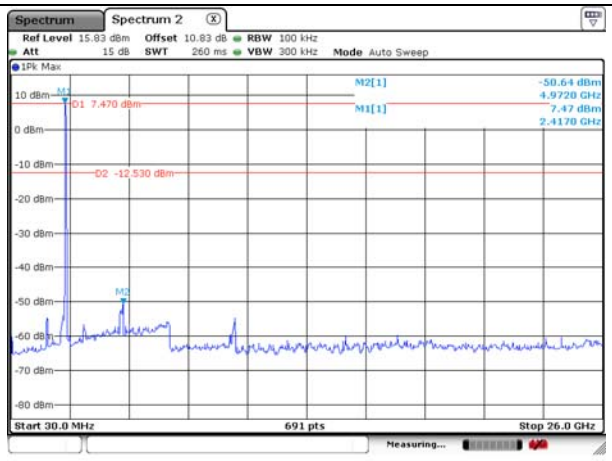

Blank

Appendix A. Measurement equipment

Equipment	Manufacturer	Model	Serial No.	Calibration interval	Calibration due.
Spectrum Analyzer	R&S	FSV40	101002	1 year	2018.07.04
Spectrum Analyzer	R&S	FSV30	101389	1 year	2018.01.23
8360B Series Swept Signal Generator	HP	83630B	3844A00786	1 year	2018.01.23
Power Meter	Anritsu	ML2495A	1438001	1 year	2018.01.23
Pulse Power Sensor	Anritsu	MA2411B	1339205	1 year	2018.01.23
Attenuator	Agilent	8493C	51401	1 year	2018.07.04
Loop Antenna	Schwarzbeck	FMZB1513	225	2 years	2019.05.10
Trilog-broadband antenna	SCHWARZBECK	VULB 9163	9168-714	2 years	2018.11.28
Horn Antenna	A.H	SAS-571	414	2 years	2019.02.15
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170550	2 years	2019.02.15
High Pass Filter	Wainwright Instrument Gmbh	WHJS3000-10TT	1	1 year	2018.07.03
Low Pass Filter	Wainwright Instrument Gmbh	WLK1.0/18G-10TT	1	1 year	2018.07.03
Preamplifier	HP	8449B	3008A00538	1 year	2018.01.19
Preamplifier	AGILENT	8449B	3008A01729	1 year	2018.05.31
EMI Test Receiver	R&S	ESR3	101781	1 year	2018.04.27
EMI Test Receiver	R&S	ESU26	100552	1 year	2018.04.19
Pulse Limiter	R&S	ESH3-Z2	101915	1 year	2018.11.27

Peripheral devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	LG Electronics Inc.,	LG15N53	311QCFT567147
Test Board	N/A	N/A	N/A

This report shall not be reproduced except in full, without the written approval of KES Co., Ltd.
The results shown in this test report refer only to the sample(s) tested unless otherwise stated.