

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_15.24.59

EUT Name: Dash Cam

Temp.(°C): 21.5

Model Number: F800-RC44H

Humidity (%RH): 57

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

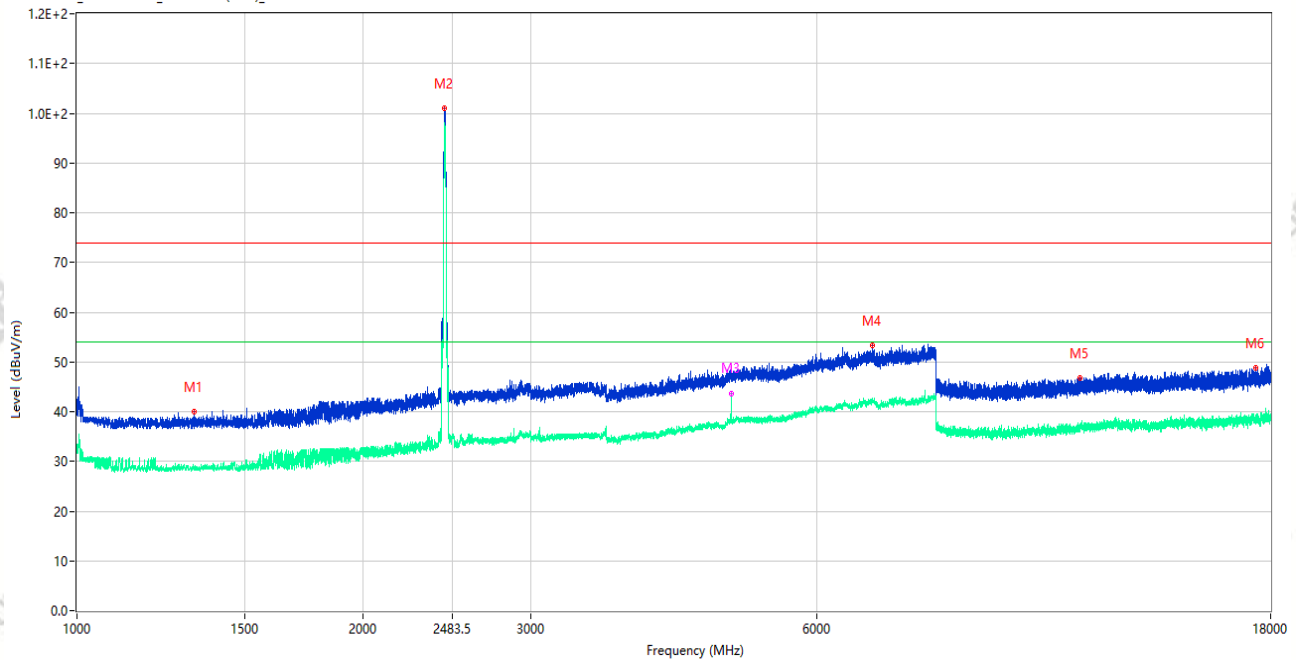

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1327.250	39.95	-15.91	74.0	34.05	Peak	301.00	150	Vertical	Pass
1**	1327.250	28.41	-15.91	54.0	25.59	AV	301.00	150	Vertical	Pass
2	2435.750	101.01	-12.32	74.0	-27.01	Peak	154.00	150	Vertical	N/A
2**	2435.750	98.04	-12.32	54.0	-44.04	AV	154.00	150	Vertical	N/A
3	4874.500	48.43	-2.25	74.0	25.57	Peak	153.00	150	Vertical	Pass
3**	4874.500	43.55	-2.25	54.0	10.45	AV	153.00	150	Vertical	Pass
4	6856.500	53.35	0.89	74.0	20.65	Peak	130.00	150	Vertical	Pass
4**	6856.500	42.10	0.89	54.0	11.90	AV	130.00	150	Vertical	Pass
5	11344.500	46.78	-3.99	74.0	27.22	Peak	0.00	150	Vertical	Pass
5**	11344.500	36.90	-3.99	54.0	17.10	AV	0.00	150	Vertical	Pass
6	17362.000	48.71	0.07	74.0	25.29	Peak	113.00	150	Vertical	Pass
6**	17362.000	38.22	0.07	54.0	15.78	AV	113.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_15.32.29

EUT Name: Dash Cam

Temp.(°C): 21.5

Model Number: F800-RC44H

Humidity (%RH): 57

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11b CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

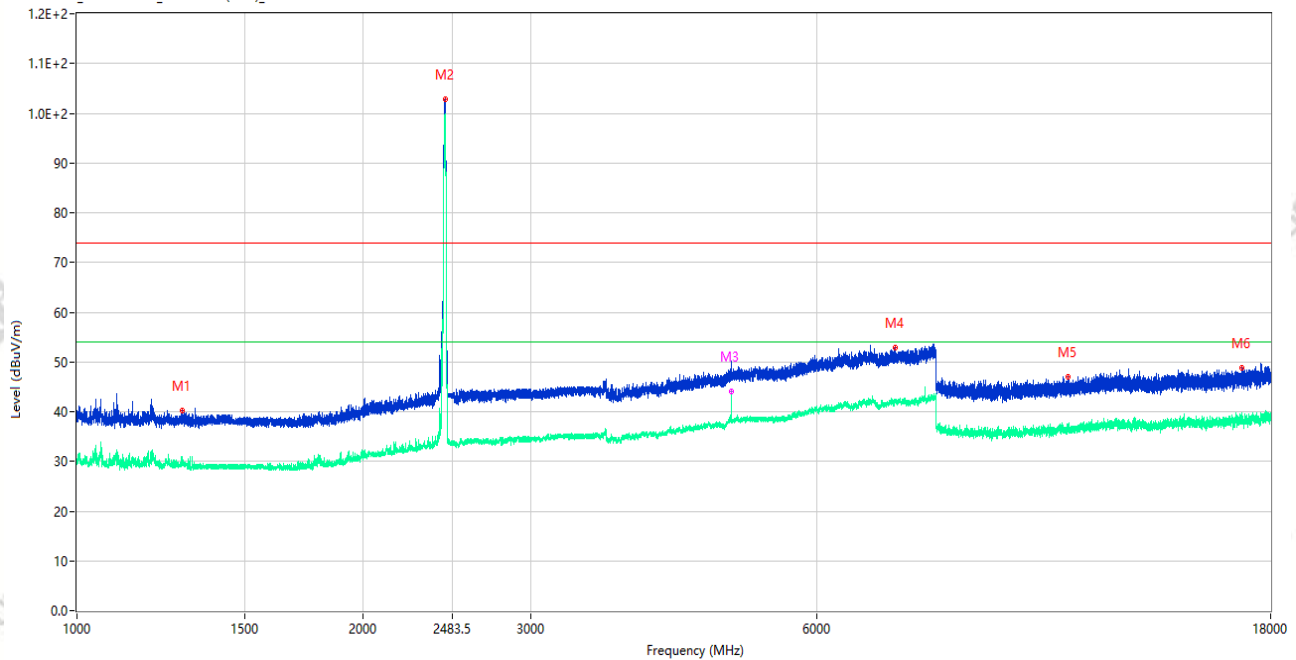

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1289.250	40.20	-15.89	74.0	33.80	Peak	171.00	150	Horizontal	Pass
1**	1289.250	30.95	-15.89	54.0	23.05	AV	171.00	150	Horizontal	Pass
2	2438.000	102.78	-12.38	74.0	-28.78	Peak	160.00	150	Horizontal	N/A
2**	2438.000	99.68	-12.38	54.0	-45.68	AV	160.00	150	Horizontal	N/A
3	4874.500	48.43	-2.25	74.0	25.57	Peak	297.00	150	Horizontal	Pass
3**	4874.500	44.16	-2.25	54.0	9.84	AV	297.00	150	Horizontal	Pass
4	7252.500	52.82	0.88	74.0	21.18	Peak	360.00	150	Horizontal	Pass
4**	7252.500	42.35	0.88	54.0	11.65	AV	360.00	150	Horizontal	Pass
5	11015.500	46.92	-3.19	74.0	27.08	Peak	248.00	150	Horizontal	Pass
5**	11015.500	36.20	-3.19	54.0	17.80	AV	248.00	150	Horizontal	Pass
6	16774.500	48.73	-1.42	74.0	25.27	Peak	139.00	150	Horizontal	Pass
6**	16774.500	38.81	-1.42	54.0	15.19	AV	139.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_15.49.15

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

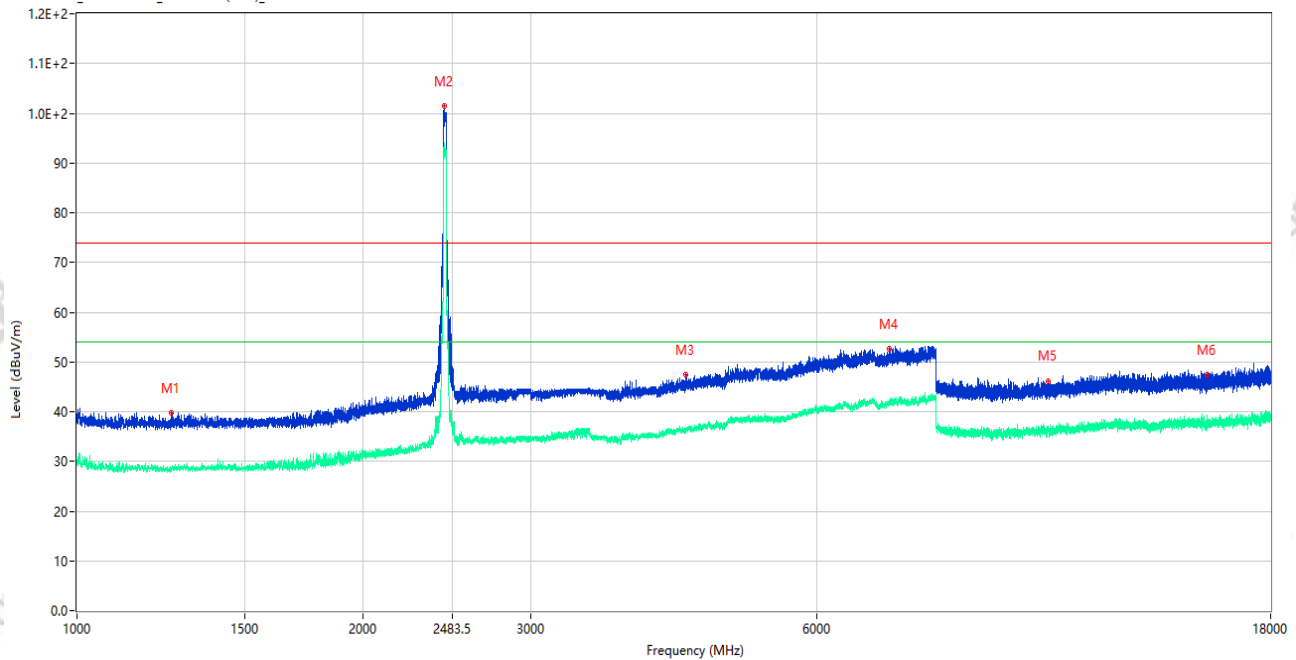

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1258.000	39.81	-16.05	74.0	34.19	Peak	360.00	150	Vertical	Pass
1**	1258.000	28.78	-16.05	54.0	25.22	AV	360.00	150	Vertical	Pass
2	2432.250	101.46	-12.29	74.0	-27.46	Peak	185.00	150	Vertical	N/A
2**	2432.250	93.54	-12.29	54.0	-39.54	AV	185.00	150	Vertical	N/A
3	4368.000	47.35	-3.26	74.0	26.65	Peak	315.00	150	Vertical	Pass
3**	4368.000	36.14	-3.26	54.0	17.86	AV	315.00	150	Vertical	Pass
4	7145.000	52.74	-0.09	74.0	21.26	Peak	10.00	150	Vertical	Pass
4**	7145.000	41.75	-0.09	54.0	12.25	AV	10.00	150	Vertical	Pass
5	10494.000	46.20	-3.18	74.0	27.80	Peak	360.00	150	Vertical	Pass
5**	10494.000	36.80	-3.18	54.0	17.20	AV	360.00	150	Vertical	Pass
6	15451.000	47.42	-1.99	74.0	26.58	Peak	350.00	150	Vertical	Pass
6**	15451.000	37.70	-1.99	54.0	16.30	AV	350.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_15.53.02

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11g CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

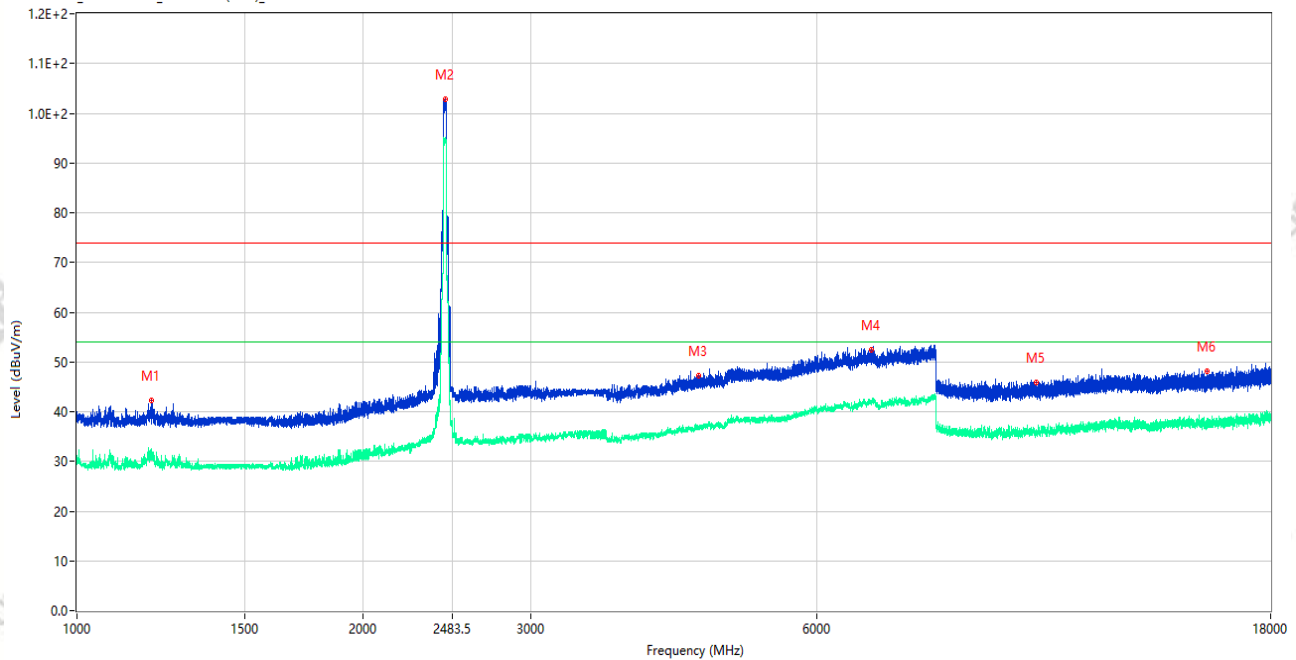

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1197.500	42.34	-15.72	74.0	31.66	Peak	110.00	150	Horizontal	Pass
1**	1197.500	32.60	-15.72	54.0	21.40	AV	110.00	150	Horizontal	Pass
2	2442.000	102.81	-12.43	74.0	-28.81	Peak	157.00	150	Horizontal	N/A
2**	2442.000	94.88	-12.43	54.0	-40.88	AV	157.00	150	Horizontal	N/A
3	4505.000	47.28	-3.31	74.0	26.72	Peak	231.00	150	Horizontal	Pass
3**	4505.000	36.47	-3.31	54.0	17.53	AV	231.00	150	Horizontal	Pass
4	6852.000	52.52	0.82	74.0	21.48	Peak	298.00	150	Horizontal	Pass
4**	6852.000	41.59	0.82	54.0	12.41	AV	298.00	150	Horizontal	Pass
5	10212.000	45.79	-3.11	74.0	28.21	Peak	54.00	150	Horizontal	Pass
5**	10212.000	35.48	-3.11	54.0	18.52	AV	54.00	150	Horizontal	Pass
6	15431.500	48.19	-1.70	74.0	25.81	Peak	0.00	150	Horizontal	Pass
6**	15431.500	37.88	-1.70	54.0	16.12	AV	0.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.07.31

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

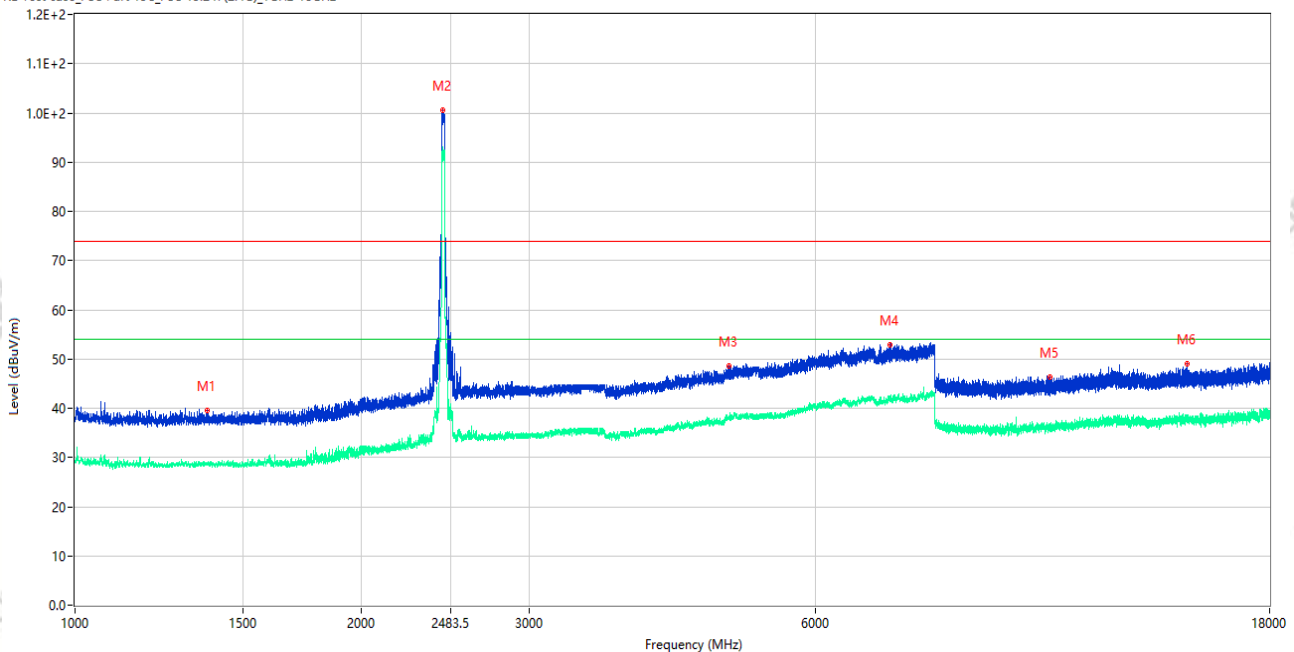

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1377.750	39.45	-16.00	74.0	34.55	Peak	245.00	150	Vertical	Pass
1**	1377.750	28.70	-16.00	54.0	25.30	AV	245.00	150	Vertical	Pass
2	2433.750	100.58	-12.32	74.0	-26.58	Peak	152.00	150	Vertical	N/A
2**	2433.750	92.98	-12.32	54.0	-38.98	AV	152.00	150	Vertical	N/A
3	4864.000	48.53	-2.09	74.0	25.47	Peak	360.00	150	Vertical	Pass
3**	4864.000	38.38	-2.09	54.0	15.62	AV	360.00	150	Vertical	Pass
4	7175.500	52.81	0.18	74.0	21.19	Peak	360.00	150	Vertical	Pass
4**	7175.500	42.34	0.18	54.0	11.66	AV	360.00	150	Vertical	Pass
5	10574.000	46.26	-3.22	74.0	27.74	Peak	0.00	150	Vertical	Pass
5**	10574.000	35.82	-3.22	54.0	18.18	AV	0.00	150	Vertical	Pass
6	14736.500	48.94	-1.96	74.0	25.06	Peak	0.00	150	Vertical	Pass
6**	14736.500	37.93	-1.96	54.0	16.07	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.03.38

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

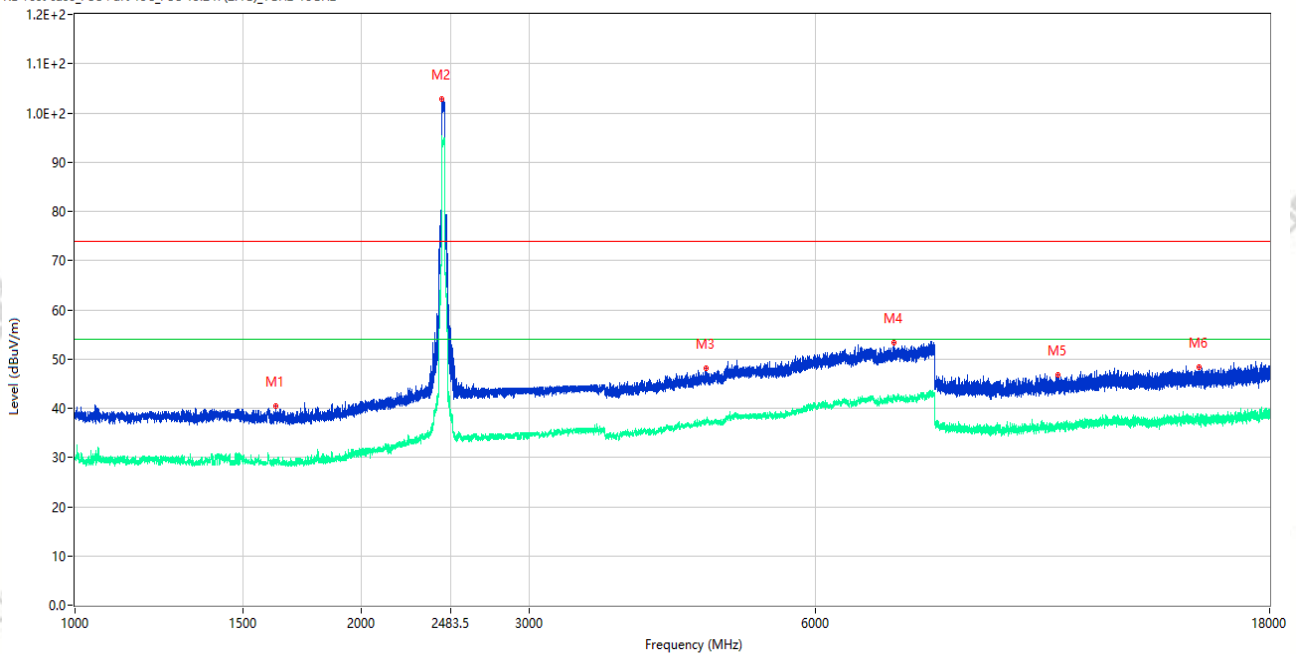

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1625.000	40.47	-15.99	74.0	33.53	Peak	66.00	150	Horizontal	Pass
1**	1625.000	29.42	-15.99	54.0	24.58	AV	66.00	150	Horizontal	Pass
2	2429.000	102.80	-12.25	74.0	-28.80	Peak	160.00	150	Horizontal	N/A
2**	2429.000	95.20	-12.25	54.0	-41.20	AV	160.00	150	Horizontal	N/A
3	4607.000	48.07	-3.59	74.0	25.93	Peak	263.00	150	Horizontal	Pass
3**	4607.000	37.28	-3.59	54.0	16.72	AV	263.00	150	Horizontal	Pass
4	7248.000	53.38	0.91	74.0	20.62	Peak	160.00	150	Horizontal	Pass
4**	7248.000	41.87	0.91	54.0	12.13	AV	160.00	150	Horizontal	Pass
5	10783.000	46.85	-3.03	74.0	27.15	Peak	219.00	150	Horizontal	Pass
5**	10783.000	36.53	-3.03	54.0	17.47	AV	219.00	150	Horizontal	Pass
6	15176.500	48.29	-2.76	74.0	25.71	Peak	240.00	150	Horizontal	Pass
6**	15176.500	37.80	-2.76	54.0	16.20	AV	240.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.17.27

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n40 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

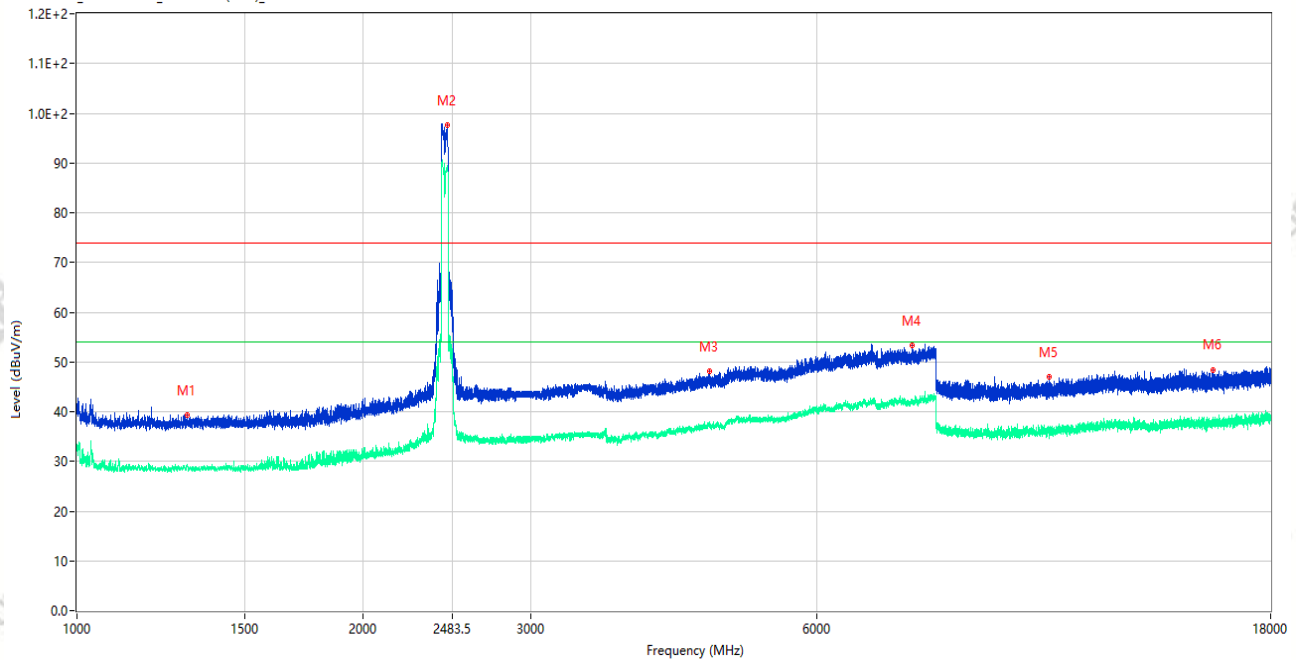

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1306.250	39.27	-15.62	74.0	34.73	Peak	256.00	150	Vertical	Pass
1**	1306.250	28.97	-15.62	54.0	25.03	AV	256.00	150	Vertical	Pass
2	2453.250	97.64	-12.46	74.0	-23.64	Peak	179.00	150	Vertical	N/A
2**	2453.250	88.60	-12.46	54.0	-34.60	AV	179.00	150	Vertical	N/A
3	4621.500	48.12	-2.77	74.0	25.88	Peak	86.00	150	Vertical	Pass
3**	4621.500	37.69	-2.77	54.0	16.31	AV	86.00	150	Vertical	Pass
4	7551.000	53.24	0.70	74.0	20.76	Peak	0.00	150	Vertical	Pass
4**	7551.000	42.17	0.70	54.0	11.83	AV	0.00	150	Vertical	Pass
5	10537.500	46.91	-3.22	74.0	27.09	Peak	198.00	150	Vertical	Pass
5**	10537.500	35.51	-3.22	54.0	18.49	AV	198.00	150	Vertical	Pass
6	15673.000	48.46	-1.57	74.0	25.54	Peak	306.00	150	Vertical	Pass
6**	15673.000	37.33	-1.57	54.0	16.67	AV	306.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.21.04

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11n40 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

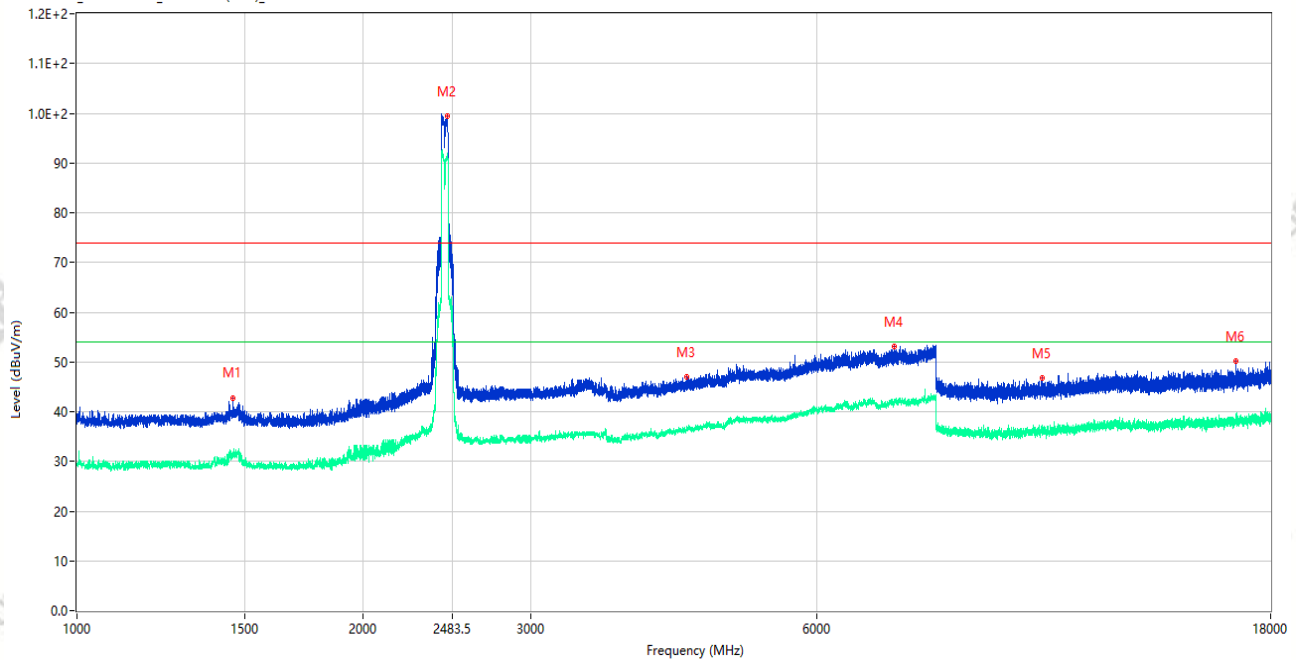

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1457.250	42.71	-16.13	74.0	31.29	Peak	0.00	150	Horizontal	Pass
1**	1457.250	30.67	-16.13	54.0	23.33	AV	0.00	150	Horizontal	Pass
2	2453.250	99.43	-12.46	74.0	-25.43	Peak	143.00	150	Horizontal	N/A
2**	2453.250	91.12	-12.46	54.0	-37.12	AV	143.00	150	Horizontal	N/A
3	4373.000	46.92	-3.33	74.0	27.08	Peak	214.00	150	Horizontal	Pass
3**	4373.000	36.58	-3.33	54.0	17.42	AV	214.00	150	Horizontal	Pass
4	7241.500	53.06	0.95	74.0	20.94	Peak	221.00	150	Horizontal	Pass
4**	7241.500	42.14	0.95	54.0	11.86	AV	221.00	150	Horizontal	Pass
5	10361.500	46.72	-3.11	74.0	27.28	Peak	0.00	150	Horizontal	Pass
5**	10361.500	36.22	-3.11	54.0	17.78	AV	0.00	150	Horizontal	Pass
6	16565.500	50.06	-1.08	74.0	23.94	Peak	10.00	150	Horizontal	Pass
6**	16565.500	38.23	-1.08	54.0	15.77	AV	10.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.37.10

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

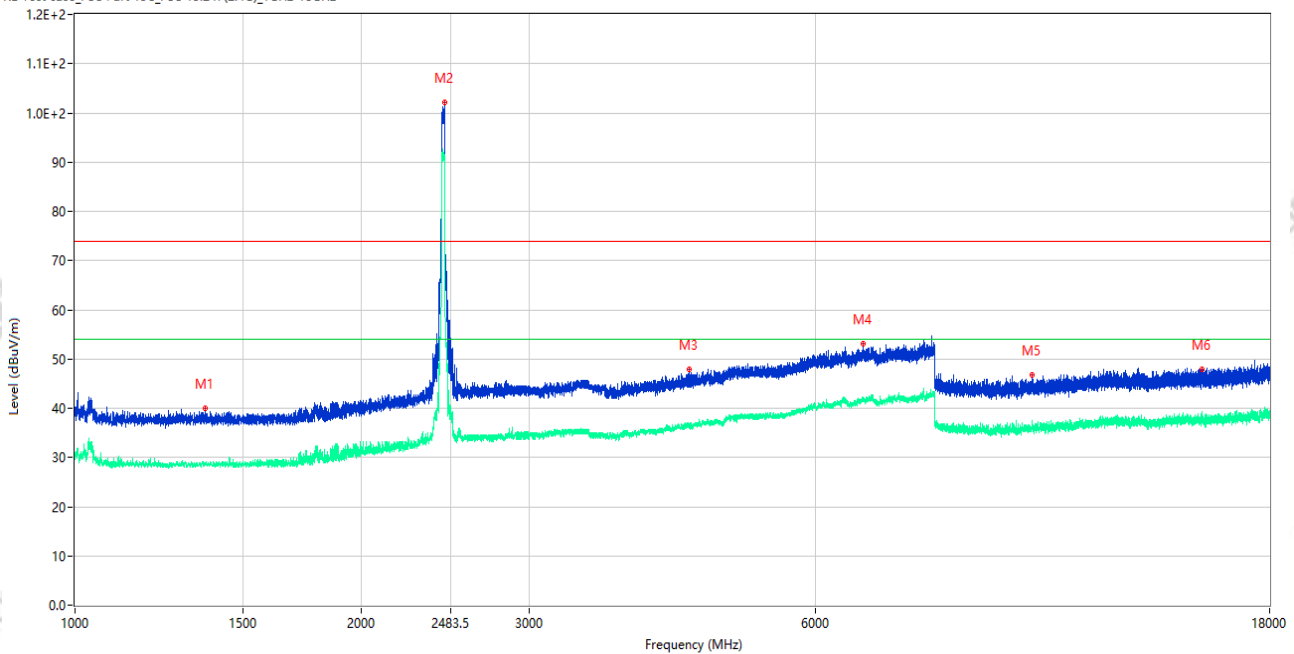

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1370.000	40.08	-15.92	74.0	33.92	Peak	298.00	150	Vertical	Pass
1**	1370.000	28.74	-15.92	54.0	25.26	AV	298.00	150	Vertical	Pass
2	2443.500	102.15	-12.47	74.0	-28.15	Peak	182.00	150	Vertical	N/A
2**	2443.500	91.39	-12.47	54.0	-37.39	AV	182.00	150	Vertical	N/A
3	4420.000	47.80	-2.86	74.0	26.20	Peak	348.00	150	Vertical	Pass
3**	4420.000	36.00	-2.86	54.0	18.00	AV	348.00	150	Vertical	Pass
4	6734.000	53.04	0.71	74.0	20.96	Peak	156.00	150	Vertical	Pass
4**	6734.000	41.66	0.71	54.0	12.34	AV	156.00	150	Vertical	Pass
5	10134.000	46.83	-3.92	74.0	27.17	Peak	360.00	150	Vertical	Pass
5**	10134.000	36.17	-3.92	54.0	17.83	AV	360.00	150	Vertical	Pass
6	15268.000	47.96	-1.09	74.0	26.04	Peak	286.00	150	Vertical	Pass
6**	15268.000	39.32	-1.09	54.0	14.68	AV	286.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.33.32

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax20 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

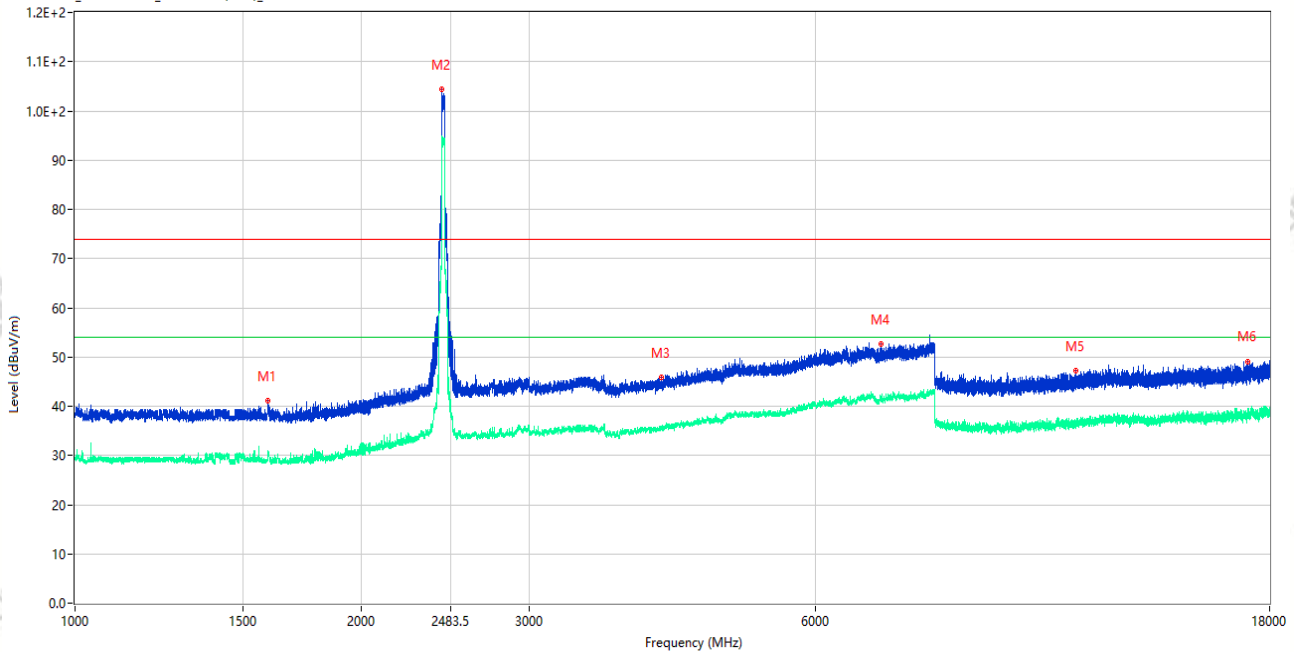

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1594.000	41.13	-16.21	74.0	32.87	Peak	259.00	150	Horizontal	Pass
1**	1594.000	30.34	-16.21	54.0	23.66	AV	259.00	150	Horizontal	Pass
2	2429.250	104.32	-12.25	74.0	-30.32	Peak	144.00	150	Horizontal	N/A
2**	2429.250	94.59	-12.25	54.0	-40.59	AV	144.00	150	Horizontal	N/A
3	4136.000	45.99	-4.48	74.0	28.01	Peak	360.00	150	Horizontal	Pass
3**	4136.000	35.66	-4.48	54.0	18.34	AV	360.00	150	Horizontal	Pass
4	7037.500	52.63	-0.22	74.0	21.37	Peak	350.00	150	Horizontal	Pass
4**	7037.500	41.02	-0.22	54.0	12.98	AV	350.00	150	Horizontal	Pass
5	11275.500	47.12	-4.13	74.0	26.88	Peak	117.00	150	Horizontal	Pass
5**	11275.500	36.21	-4.13	54.0	17.79	AV	117.00	150	Horizontal	Pass
6	17090.000	49.14	-0.70	74.0	24.86	Peak	204.00	150	Horizontal	Pass
6**	17090.000	38.52	-0.70	54.0	15.48	AV	204.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.47.18

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax40 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

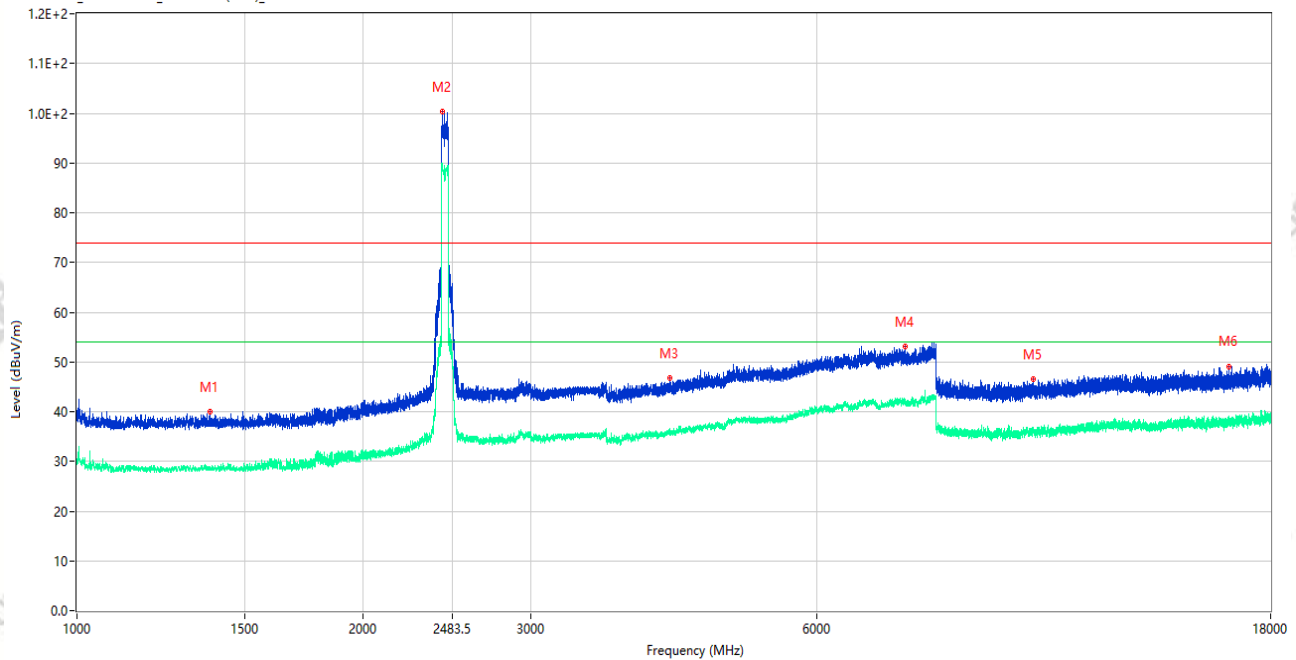

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1378.750	40.00	-16.00	74.0	34.00	Peak	0.00	150	Vertical	Pass
1**	1378.750	28.85	-16.00	54.0	25.15	AV	0.00	150	Vertical	Pass
2	2425.000	100.34	-12.26	74.0	-26.34	Peak	149.00	150	Vertical	N/A
2**	2425.000	88.96	-12.26	54.0	-34.96	AV	149.00	150	Vertical	N/A
3	4200.500	46.73	-3.44	74.0	27.27	Peak	210.00	150	Vertical	Pass
3**	4200.500	35.97	-3.44	54.0	18.03	AV	210.00	150	Vertical	Pass
4	7422.000	53.02	1.03	74.0	20.98	Peak	127.00	150	Vertical	Pass
4**	7422.000	41.85	1.03	54.0	12.15	AV	127.00	150	Vertical	Pass
5	10129.000	46.51	-3.95	74.0	27.49	Peak	96.00	150	Vertical	Pass
5**	10129.000	36.06	-3.95	54.0	17.94	AV	96.00	150	Vertical	Pass
6	16281.000	49.13	-1.67	74.0	24.87	Peak	0.00	150	Vertical	Pass
6**	16281.000	38.11	-1.67	54.0	15.89	AV	0.00	150	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17_16.50.54

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: 2.4G WIFI 11ax40 CH6 P=44


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

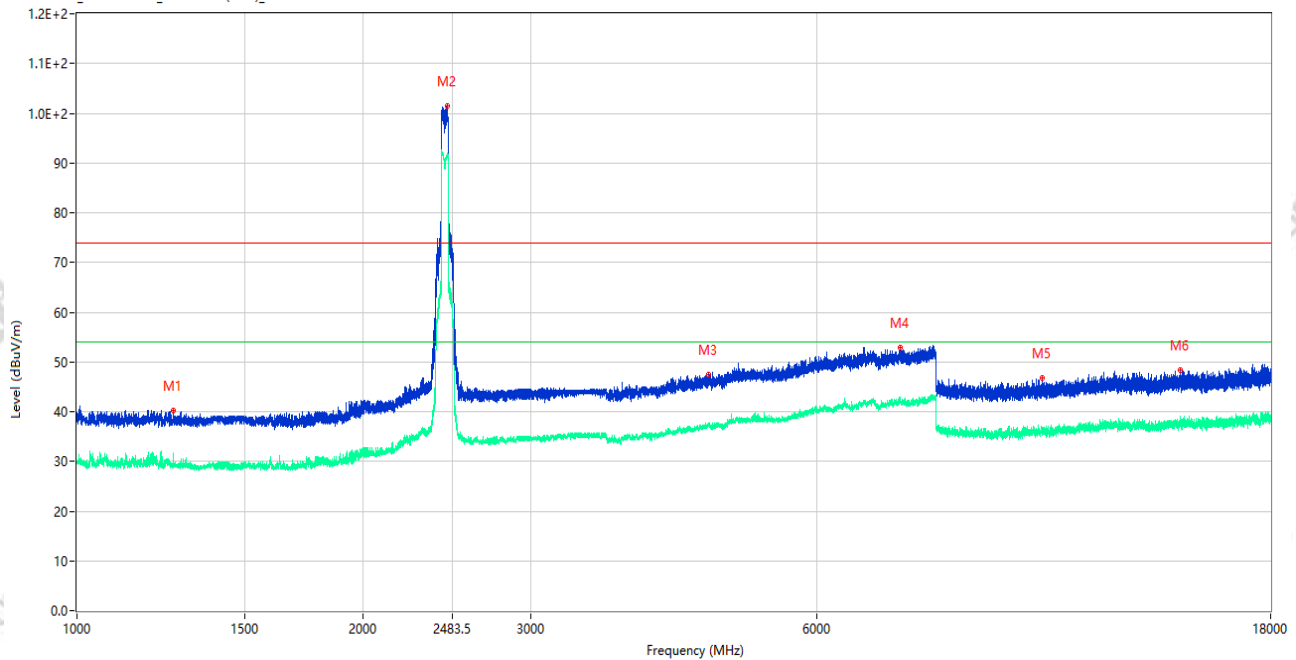

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1262.250	40.23	-15.99	74.0	33.77	Peak	224.00	150	Horizontal	Pass
1**	1262.250	31.56	-15.99	54.0	22.44	AV	224.00	150	Horizontal	Pass
2	2454.500	101.36	-12.42	74.0	-27.36	Peak	143.00	150	Horizontal	N/A
2**	2454.500	91.52	-12.42	54.0	-37.52	AV	143.00	150	Horizontal	N/A
3	4620.000	47.54	-2.87	74.0	26.46	Peak	225.00	150	Horizontal	Pass
3**	4620.000	37.42	-2.87	54.0	16.58	AV	225.00	150	Horizontal	Pass
4	7346.500	52.89	1.10	74.0	21.11	Peak	137.00	150	Horizontal	Pass
4**	7346.500	42.11	1.10	54.0	11.89	AV	137.00	150	Horizontal	Pass
5	10359.500	46.74	-3.18	74.0	27.26	Peak	242.00	150	Horizontal	Pass
5**	10359.500	36.13	-3.18	54.0	17.87	AV	242.00	150	Horizontal	Pass
6	14459.500	48.34	-2.60	74.0	25.66	Peak	177.00	150	Horizontal	Pass
6**	14459.500	38.08	-2.60	54.0	15.92	AV	177.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-18_09.52.40

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal Linking(2.4G WIFI)


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

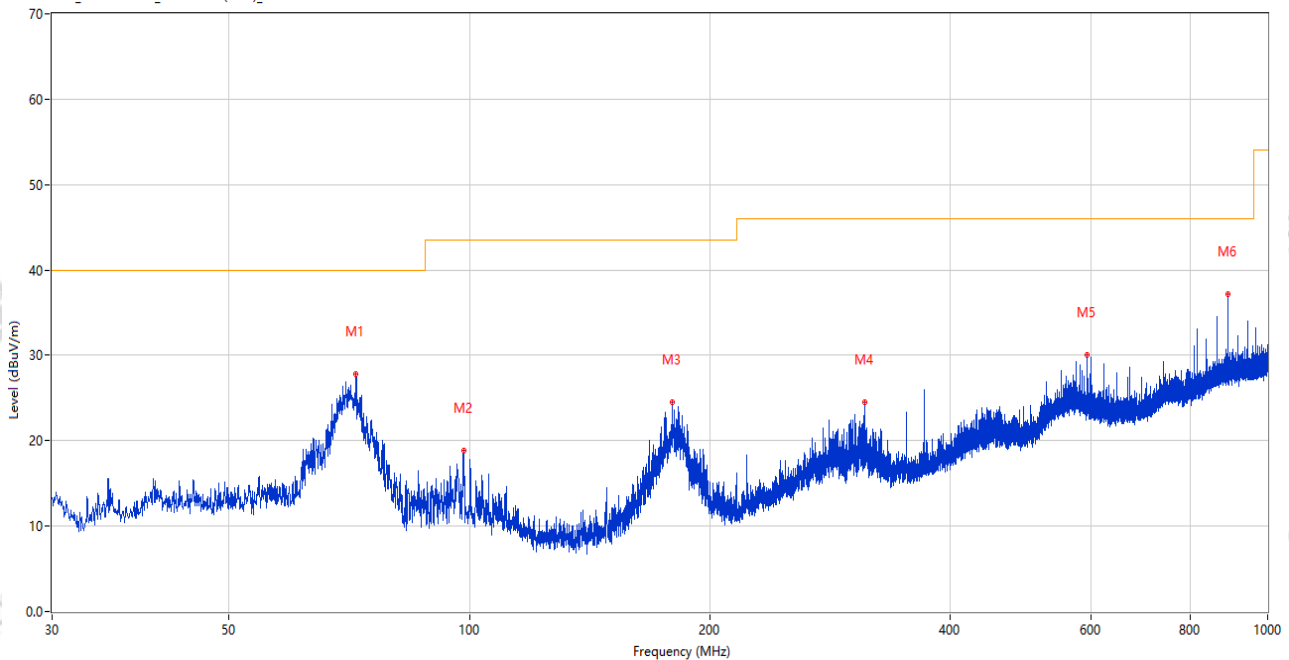

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	72.098	27.77	-29.69	40.0	12.23	Peak	294.00	100	Vertical	Pass
2	98.288	18.80	-26.23	43.5	24.70	Peak	32.00	100	Vertical	Pass
3	179.622	24.56	-27.85	43.5	18.94	Peak	260.00	200	Vertical	Pass
4	312.415	24.54	-23.08	46.0	21.46	Peak	158.00	100	Vertical	Pass
5	594.006	30.06	-15.19	46.0	15.94	Peak	122.00	200	Vertical	Pass
6	890.972	37.12	-9.70	46.0	8.88	Peak	325.00	100	Vertical	Pass

Test Result

Project Number: P-EE26090066

Test Time: 2026-09-18_09.49.14

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15C

Work Mode: Normal Linking(2.4G WIFI)


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_30MHz-1GHz

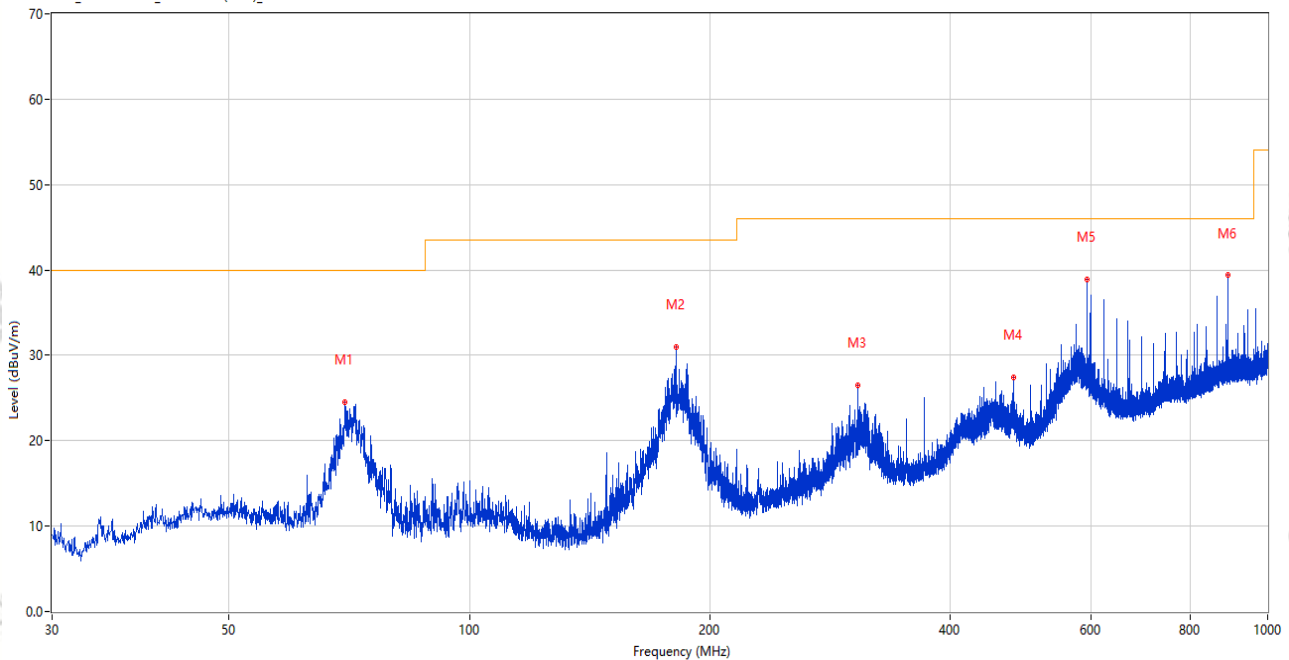

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	69.867	24.48	-28.93	40.0	15.52	Peak	198.00	200	Horizontal	Pass
2	181.368	30.94	-27.66	43.5	12.56	Peak	65.00	100	Horizontal	Pass
3	306.838	26.52	-23.26	46.0	19.48	Peak	213.00	100	Horizontal	Pass
4	479.983	27.36	-18.70	46.0	18.64	Peak	117.00	200	Horizontal	Pass
5	594.006	38.95	-15.19	46.0	7.05	Peak	156.00	100	Horizontal	Pass
6	890.972	39.36	-9.70	46.0	6.64	Peak	30.00	200	Horizontal	Pass