

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_17.52.30

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

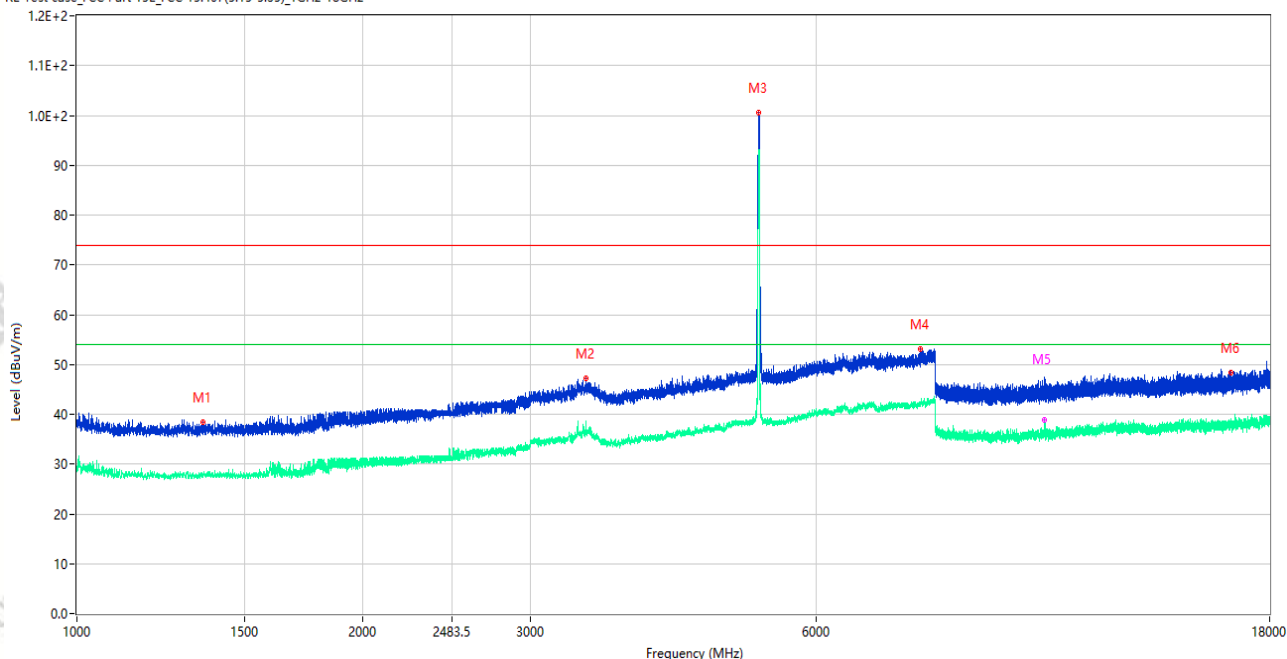

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1358.000        | 38.31            | -15.84      | 74.0           | 35.69       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 1** | 1358.000        | 27.53            | -15.84      | 54.0           | 26.47       | AV       | 360.00         | 150         | Vertical | Pass    |
| 2   | 3434.500        | 47.17            | -5.18       | 74.0           | 26.83       | Peak     | 18.00          | 150         | Vertical | Pass    |
| 2** | 3434.500        | 36.76            | -5.18       | 54.0           | 17.24       | AV       | 18.00          | 150         | Vertical | Pass    |
| 3   | 5214.500        | 100.65           | -2.34       | 74.0           | -26.65      | Peak     | 329.00         | 150         | Vertical | N/A     |
| 3** | 5214.500        | 92.61            | -2.34       | 54.0           | -38.61      | AV       | 329.00         | 150         | Vertical | N/A     |
| 4   | 7713.000        | 53.02            | 1.13        | 74.0           | 20.98       | Peak     | 84.00          | 150         | Vertical | Pass    |
| 4** | 7713.000        | 41.45            | 1.13        | 54.0           | 12.55       | AV       | 84.00          | 150         | Vertical | Pass    |
| 5   | 10439.599       | 45.82            | -3.45       | 74.0           | 28.18       | Peak     | 354.00         | 150         | Vertical | Pass    |
| 5** | 10439.599       | 38.77            | -3.45       | 54.0           | 15.23       | AV       | 354.00         | 150         | Vertical | Pass    |
| 6   | 16383.263       | 48.34            | -1.37       | 74.0           | 25.66       | Peak     | 13.00          | 150         | Vertical | Pass    |
| 6** | 16383.263       | 37.79            | -1.37       | 54.0           | 16.21       | AV       | 13.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_17.47.52

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

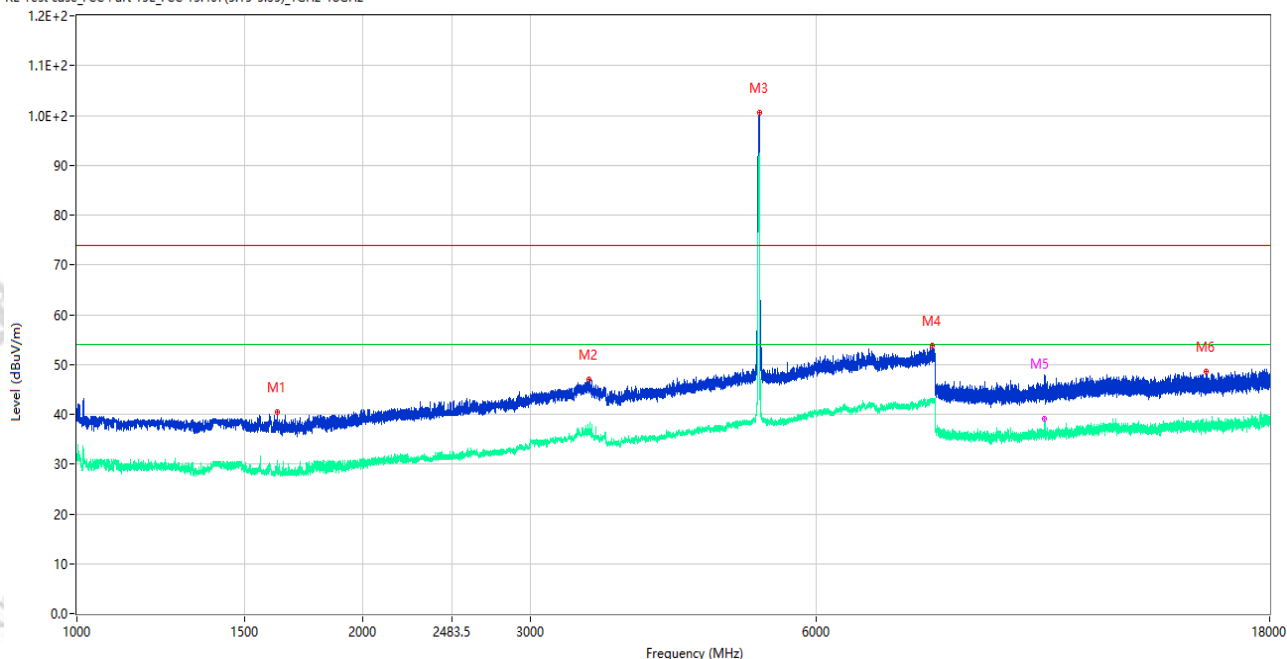

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1625.500        | 40.55            | -15.99      | 74.0           | 33.45       | Peak     | 210.00         | 150         | Horizontal | Pass    |
| 1** | 1625.500        | 28.96            | -15.99      | 54.0           | 25.04       | AV       | 210.00         | 150         | Horizontal | Pass    |
| 2   | 3461.500        | 47.07            | -5.00       | 74.0           | 26.93       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 3461.500        | 36.87            | -5.00       | 54.0           | 17.13       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 5224.000        | 100.47           | -2.34       | 74.0           | -26.47      | Peak     | 0.00           | 150         | Horizontal | N/A     |
| 3** | 5224.000        | 91.97            | -2.34       | 54.0           | -37.97      | AV       | 0.00           | 150         | Horizontal | N/A     |
| 4   | 7952.500        | 53.89            | 2.21        | 74.0           | 20.11       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 4** | 7952.500        | 42.97            | 2.21        | 54.0           | 11.03       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 5   | 10437.224       | 45.36            | -3.31       | 74.0           | 28.64       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 5** | 10437.224       | 39.16            | -3.31       | 54.0           | 14.84       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 6   | 15445.349       | 48.53            | -1.74       | 74.0           | 25.47       | Peak     | 40.00          | 150         | Horizontal | Pass    |
| 6** | 15445.349       | 37.61            | -1.74       | 54.0           | 16.39       | AV       | 40.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_18.11.48

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

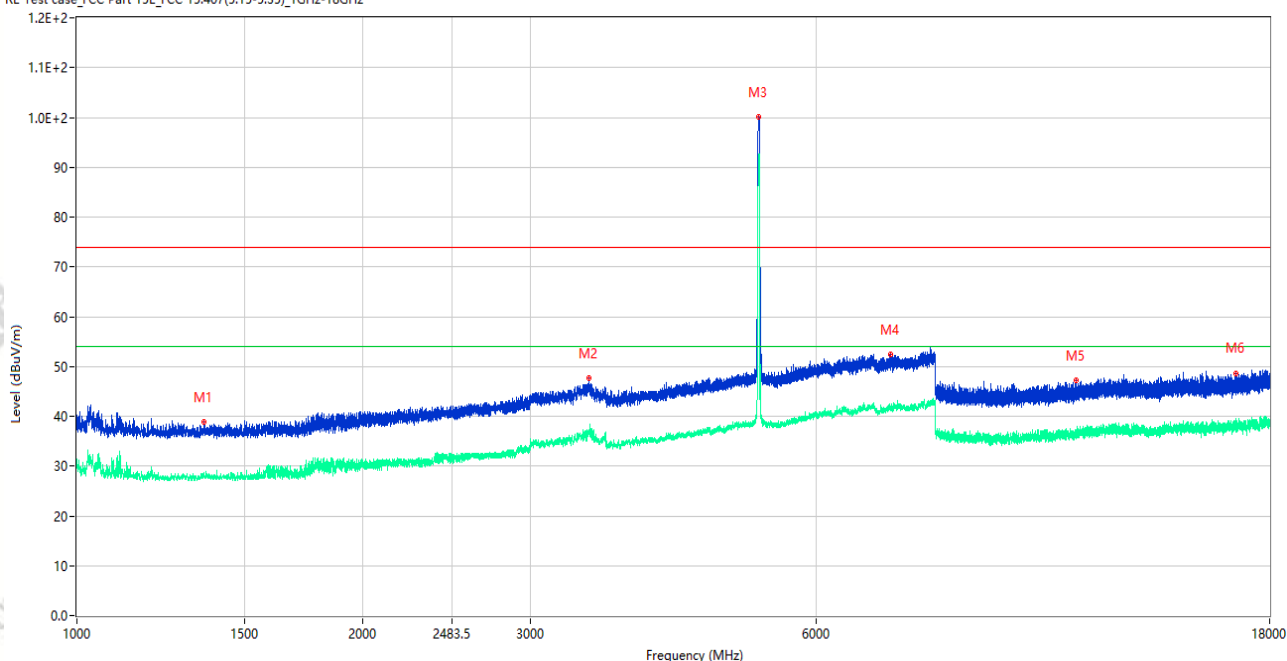

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1360.000        | 38.93            | -15.87      | 74.0           | 35.07       | Peak     | 308.00         | 150         | Vertical | Pass    |
| 1** | 1360.000        | 27.70            | -15.87      | 54.0           | 26.30       | AV       | 308.00         | 150         | Vertical | Pass    |
| 2   | 3456.500        | 47.60            | -4.90       | 74.0           | 26.40       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 2** | 3456.500        | 36.66            | -4.90       | 54.0           | 17.34       | AV       | 0.00           | 150         | Vertical | Pass    |
| 3   | 5223.500        | 100.13           | -2.34       | 74.0           | -26.13      | Peak     | 327.00         | 150         | Vertical | N/A     |
| 3** | 5223.500        | 92.52            | -2.34       | 54.0           | -38.52      | AV       | 327.00         | 150         | Vertical | N/A     |
| 4   | 7177.500        | 52.33            | 0.11        | 74.0           | 21.67       | Peak     | 223.00         | 150         | Vertical | Pass    |
| 4** | 7177.500        | 41.53            | 0.11        | 54.0           | 12.47       | AV       | 223.00         | 150         | Vertical | Pass    |
| 5   | 11270.850       | 47.26            | -4.28       | 74.0           | 26.74       | Peak     | 196.00         | 150         | Vertical | Pass    |
| 5** | 11270.850       | 36.57            | -4.28       | 54.0           | 17.43       | AV       | 196.00         | 150         | Vertical | Pass    |
| 6   | 16573.312       | 48.68            | -0.71       | 74.0           | 25.32       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 16573.312       | 38.35            | -0.71       | 54.0           | 15.65       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_18.16.24

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n20 CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

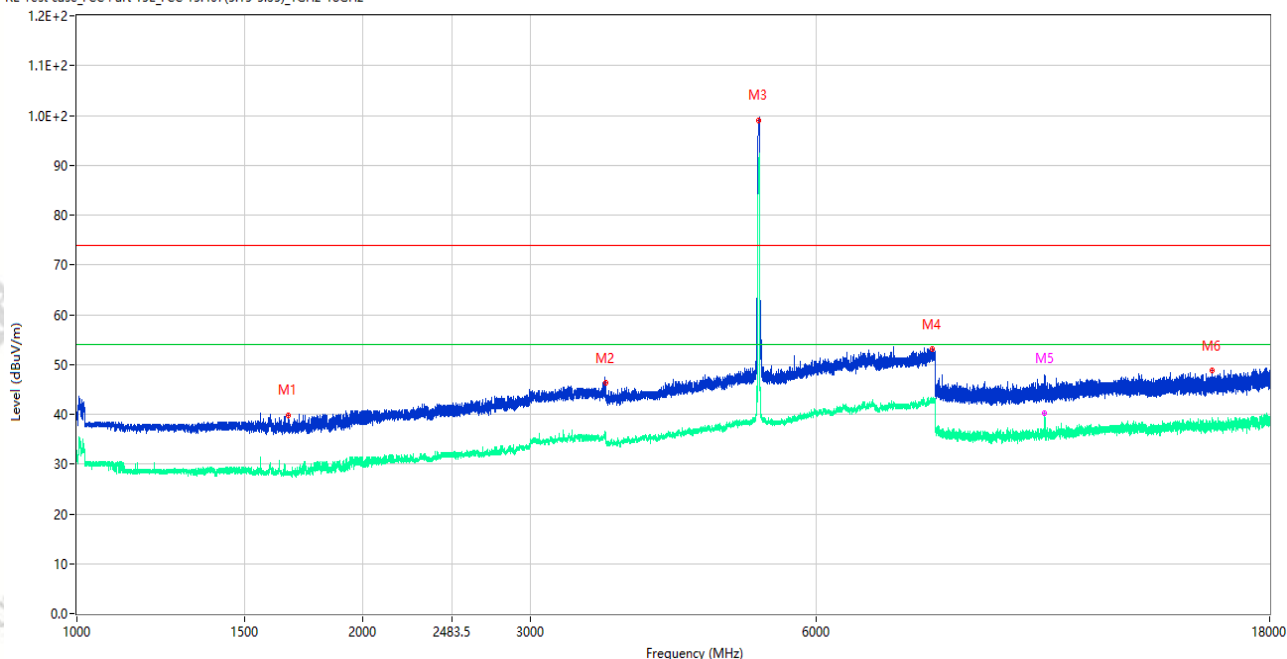

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1669.250        | 39.86            | -16.33      | 74.0           | 34.14       | Peak     | 106.00         | 150         | Horizontal | Pass    |
| 1** | 1669.250        | 28.05            | -16.33      | 54.0           | 25.95       | AV       | 106.00         | 150         | Horizontal | Pass    |
| 2   | 3598.500        | 46.28            | -5.07       | 74.0           | 27.72       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 3598.500        | 36.34            | -5.07       | 54.0           | 17.66       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 5223.000        | 99.01            | -2.35       | 74.0           | -25.01      | Peak     | 0.00           | 150         | Horizontal | N/A     |
| 3** | 5223.000        | 91.19            | -2.35       | 54.0           | -37.19      | AV       | 0.00           | 150         | Horizontal | N/A     |
| 4   | 7946.500        | 53.05            | 1.97        | 74.0           | 20.95       | Peak     | 165.00         | 150         | Horizontal | Pass    |
| 4** | 7946.500        | 42.60            | 1.97        | 54.0           | 11.40       | AV       | 165.00         | 150         | Horizontal | Pass    |
| 5   | 10438.887       | 46.57            | -3.44       | 74.0           | 27.43       | Peak     | 285.00         | 150         | Horizontal | Pass    |
| 5** | 10438.887       | 40.21            | -3.44       | 54.0           | 13.79       | AV       | 285.00         | 150         | Horizontal | Pass    |
| 6   | 15651.937       | 48.79            | -1.70       | 74.0           | 25.21       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 6** | 15651.937       | 38.06            | -1.70       | 54.0           | 15.94       | AV       | 0.00           | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_18.30.30

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

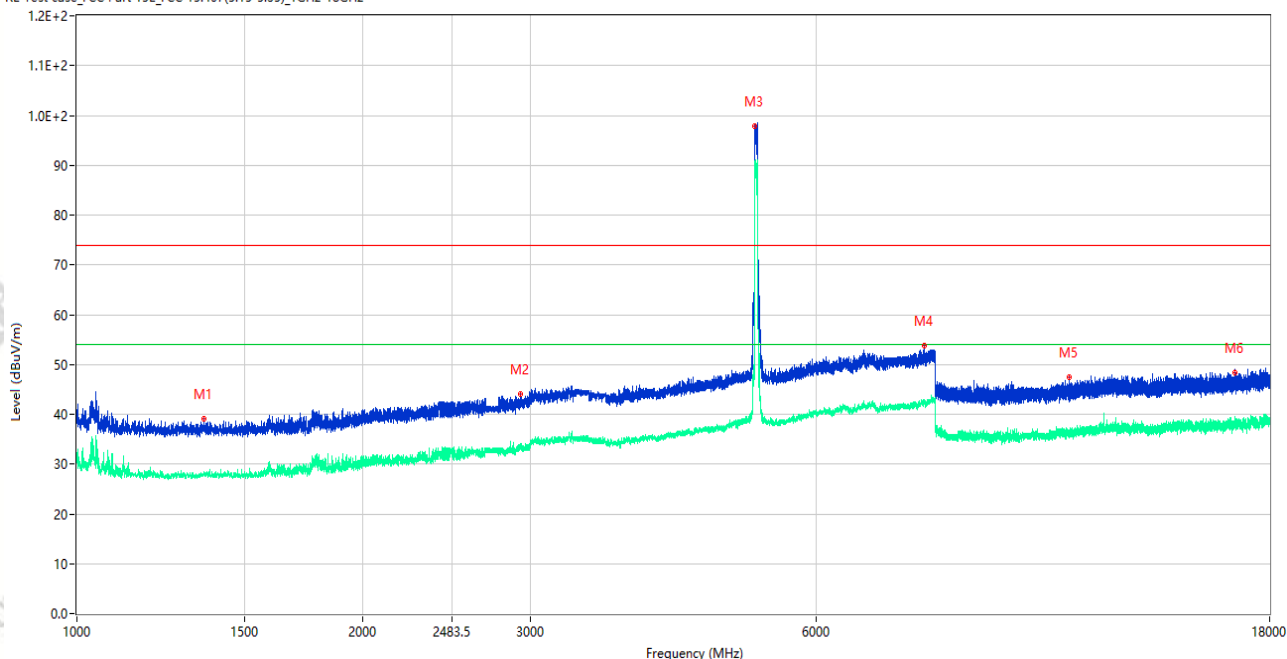

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1362.000        | 39.00            | -15.82      | 74.0           | 35.00       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 1** | 1362.000        | 28.55            | -15.82      | 54.0           | 25.45       | AV       | 360.00         | 150         | Vertical | Pass    |
| 2   | 2931.000        | 43.99            | -7.95       | 74.0           | 30.01       | Peak     | 344.00         | 150         | Vertical | Pass    |
| 2** | 2931.000        | 33.08            | -7.95       | 54.0           | 20.92       | AV       | 344.00         | 150         | Vertical | Pass    |
| 3   | 5173.000        | 96.32            | -2.33       | 74.0           | -22.32      | Peak     | 157.00         | 150         | Vertical | N/A     |
| 3** | 5173.000        | 88.41            | -2.33       | 54.0           | -34.41      | AV       | 157.00         | 150         | Vertical | N/A     |
| 4   | 7802.000        | 53.72            | 1.52        | 74.0           | 20.28       | Peak     | 40.00          | 150         | Vertical | Pass    |
| 4** | 7802.000        | 42.46            | 1.52        | 54.0           | 11.54       | AV       | 40.00          | 150         | Vertical | Pass    |
| 5   | 11084.650       | 47.51            | -3.82       | 74.0           | 26.49       | Peak     | 338.00         | 150         | Vertical | Pass    |
| 5** | 11084.650       | 35.64            | -3.82       | 54.0           | 18.36       | AV       | 338.00         | 150         | Vertical | Pass    |
| 6   | 16561.238       | 48.31            | -0.99       | 74.0           | 25.69       | Peak     | 38.00          | 150         | Vertical | Pass    |
| 6** | 16561.238       | 37.97            | -0.99       | 54.0           | 16.03       | AV       | 38.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_18.35.16

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH38 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

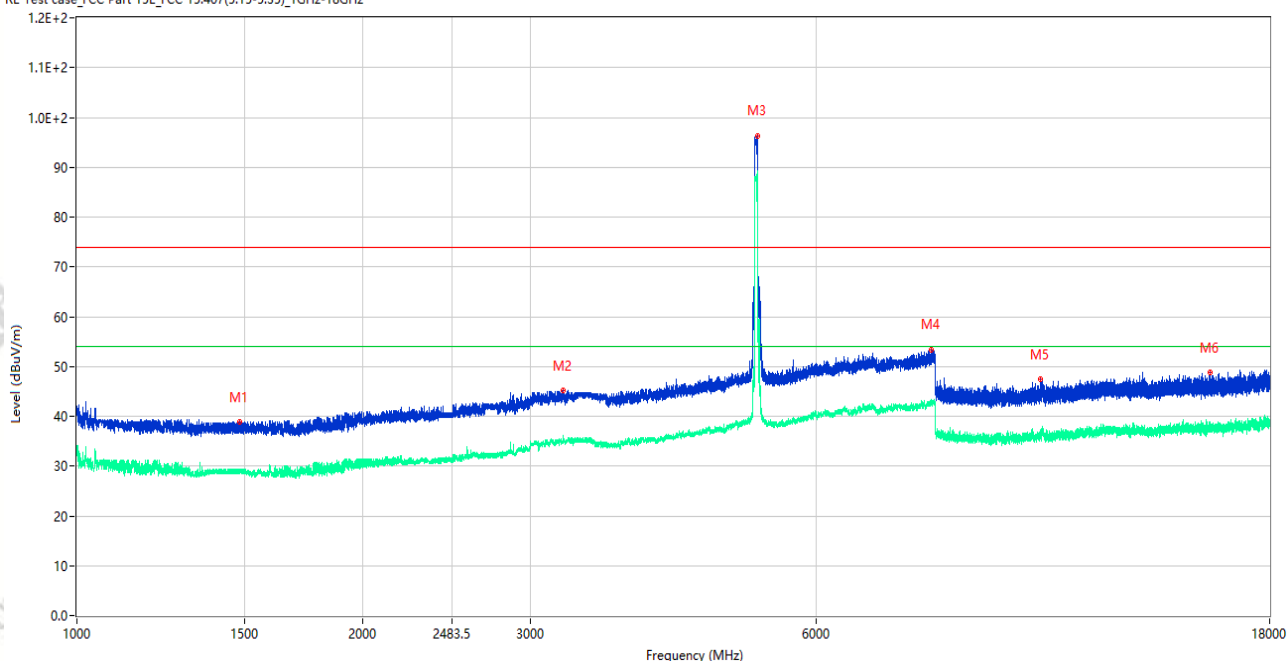

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1482.000        | 38.76            | -16.32      | 74.0           | 35.24       | Peak     | 357.00         | 150         | Horizontal | Pass    |
| 1** | 1482.000        | 29.66            | -16.32      | 54.0           | 24.34       | AV       | 357.00         | 150         | Horizontal | Pass    |
| 2   | 3250.000        | 45.25            | -7.43       | 74.0           | 28.75       | Peak     | 277.00         | 150         | Horizontal | Pass    |
| 2** | 3250.000        | 35.69            | -7.43       | 54.0           | 18.31       | AV       | 277.00         | 150         | Horizontal | Pass    |
| 3   | 5206.000        | 96.38            | -2.34       | 74.0           | -22.38      | Peak     | 298.00         | 150         | Horizontal | N/A     |
| 3** | 5206.000        | 88.10            | -2.34       | 54.0           | -34.10      | AV       | 298.00         | 150         | Horizontal | N/A     |
| 4   | 7920.500        | 53.44            | 1.94        | 74.0           | 20.56       | Peak     | 181.00         | 150         | Horizontal | Pass    |
| 4** | 7920.500        | 43.00            | 1.94        | 54.0           | 11.00       | AV       | 181.00         | 150         | Horizontal | Pass    |
| 5   | 10333.200       | 47.39            | -3.23       | 74.0           | 26.61       | Peak     | 161.00         | 150         | Horizontal | Pass    |
| 5** | 10333.200       | 35.84            | -3.23       | 54.0           | 18.16       | AV       | 161.00         | 150         | Horizontal | Pass    |
| 6   | 15584.737       | 48.89            | -2.52       | 74.0           | 25.11       | Peak     | 139.00         | 150         | Horizontal | Pass    |
| 6** | 15584.737       | 37.62            | -2.52       | 54.0           | 16.38       | AV       | 139.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_19.47.15

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax20 CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

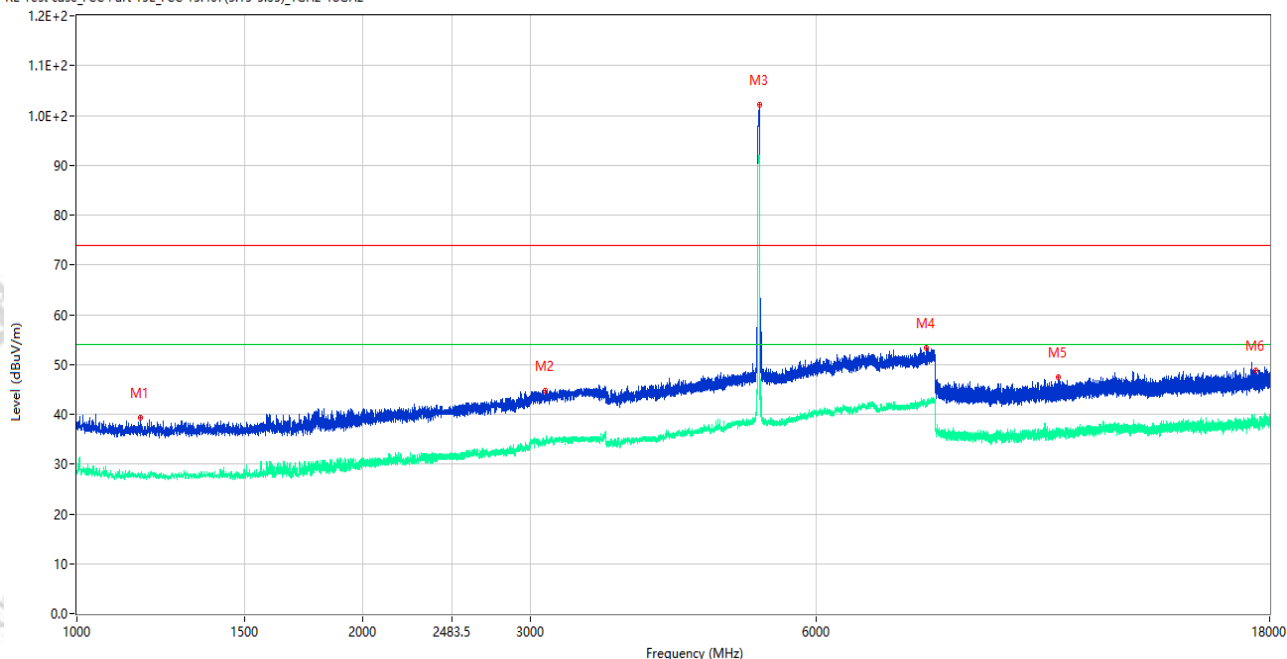

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1166.000        | 39.27            | -15.45      | 74.0           | 34.73       | Peak     | 303.00         | 150         | Vertical | Pass    |
| 1** | 1166.000        | 27.44            | -15.45      | 54.0           | 26.56       | AV       | 303.00         | 150         | Vertical | Pass    |
| 2   | 3113.500        | 44.69            | -8.06       | 74.0           | 29.31       | Peak     | 254.00         | 150         | Vertical | Pass    |
| 2** | 3113.500        | 34.05            | -8.06       | 54.0           | 19.95       | AV       | 254.00         | 150         | Vertical | Pass    |
| 3   | 5224.000        | 102.14           | -2.34       | 74.0           | -28.14      | Peak     | 329.00         | 150         | Vertical | N/A     |
| 3** | 5224.000        | 91.66            | -2.34       | 54.0           | -37.66      | AV       | 329.00         | 150         | Vertical | N/A     |
| 4   | 7839.000        | 53.34            | 1.37        | 74.0           | 20.66       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 4** | 7839.000        | 41.97            | 1.37        | 54.0           | 12.03       | AV       | 0.00           | 150         | Vertical | Pass    |
| 5   | 10791.099       | 47.43            | -3.10       | 74.0           | 26.57       | Peak     | 284.00         | 150         | Vertical | Pass    |
| 5** | 10791.099       | 36.62            | -3.10       | 54.0           | 17.38       | AV       | 284.00         | 150         | Vertical | Pass    |
| 6   | 17412.786       | 48.75            | 0.24        | 74.0           | 25.25       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 17412.786       | 37.89            | 0.24        | 54.0           | 16.11       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_19.42.25

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax20 CH44 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

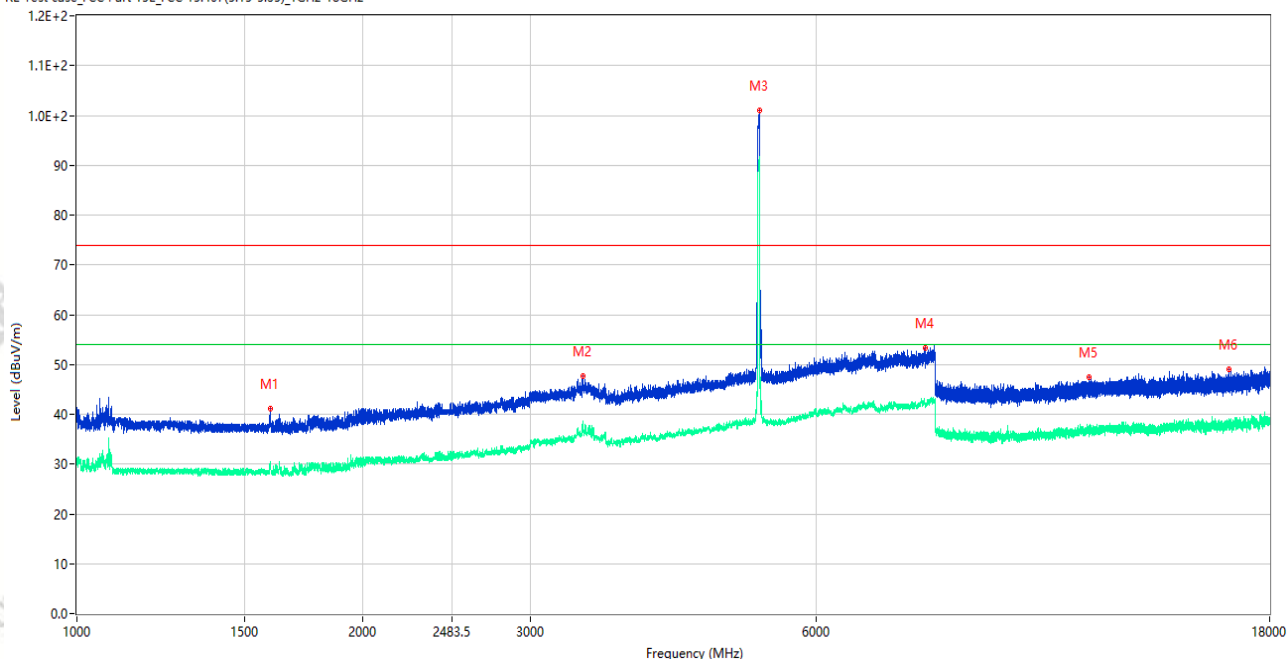

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1598.500        | 41.06            | -16.22      | 74.0           | 32.94       | Peak     | 156.00         | 150         | Horizontal | Pass    |
| 1** | 1598.500        | 29.54            | -16.22      | 54.0           | 24.46       | AV       | 156.00         | 150         | Horizontal | Pass    |
| 2   | 3407.500        | 47.58            | -5.33       | 74.0           | 26.42       | Peak     | 194.00         | 150         | Horizontal | Pass    |
| 2** | 3407.500        | 36.66            | -5.33       | 54.0           | 17.34       | AV       | 194.00         | 150         | Horizontal | Pass    |
| 3   | 5224.500        | 100.97           | -2.35       | 74.0           | -26.97      | Peak     | 0.00           | 150         | Horizontal | N/A     |
| 3** | 5224.500        | 91.01            | -2.35       | 54.0           | -37.01      | AV       | 0.00           | 150         | Horizontal | N/A     |
| 4   | 7806.500        | 53.43            | 1.23        | 74.0           | 20.57       | Peak     | 70.00          | 150         | Horizontal | Pass    |
| 4** | 7806.500        | 42.27            | 1.23        | 54.0           | 11.73       | AV       | 70.00          | 150         | Horizontal | Pass    |
| 5   | 11611.662       | 47.41            | -2.22       | 74.0           | 26.59       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 5** | 11611.662       | 36.46            | -2.22       | 54.0           | 17.54       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 6   | 16328.925       | 49.03            | -1.65       | 74.0           | 24.97       | Peak     | 268.00         | 150         | Horizontal | Pass    |
| 6** | 16328.925       | 37.68            | -1.65       | 54.0           | 16.32       | AV       | 268.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_19.58.57

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH38 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

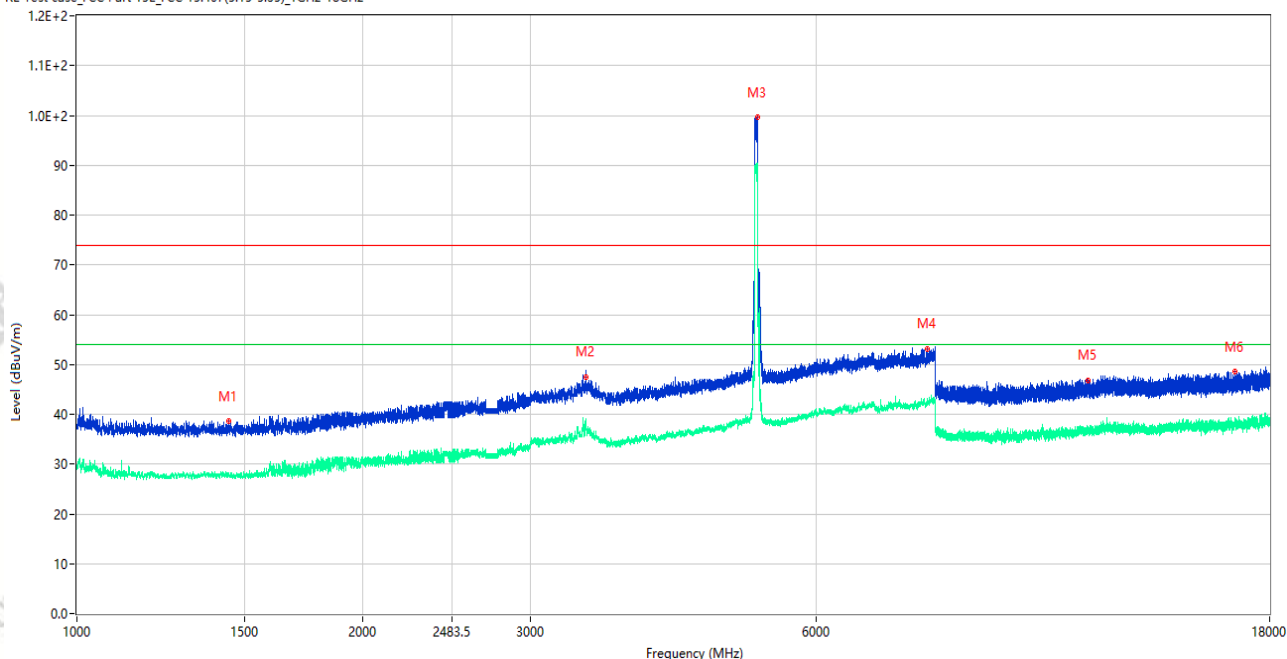

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1446.000        | 38.55            | -15.94      | 74.0           | 35.45       | Peak     | 321.00         | 150         | Vertical | Pass    |
| 1** | 1446.000        | 28.31            | -15.94      | 54.0           | 25.69       | AV       | 321.00         | 150         | Vertical | Pass    |
| 2   | 3429.500        | 47.55            | -5.02       | 74.0           | 26.45       | Peak     | 34.00          | 150         | Vertical | Pass    |
| 2** | 3429.500        | 36.96            | -5.02       | 54.0           | 17.04       | AV       | 34.00          | 150         | Vertical | Pass    |
| 3   | 5208.000        | 99.76            | -2.34       | 74.0           | -25.76      | Peak     | 322.00         | 150         | Vertical | N/A     |
| 3** | 5208.000        | 90.31            | -2.34       | 54.0           | -36.31      | AV       | 322.00         | 150         | Vertical | N/A     |
| 4   | 7856.500        | 53.13            | 1.63        | 74.0           | 20.87       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 4** | 7856.500        | 42.72            | 1.63        | 54.0           | 11.28       | AV       | 0.00           | 150         | Vertical | Pass    |
| 5   | 11591.238       | 46.88            | -2.24       | 74.0           | 27.12       | Peak     | 301.00         | 150         | Vertical | Pass    |
| 5** | 11591.238       | 36.68            | -2.24       | 54.0           | 17.32       | AV       | 301.00         | 150         | Vertical | Pass    |
| 6   | 16552.574       | 48.50            | -0.93       | 74.0           | 25.50       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 16552.574       | 38.59            | -0.93       | 54.0           | 15.41       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.04.49

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH38 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.15-5.35)\_1GHz-18GHz

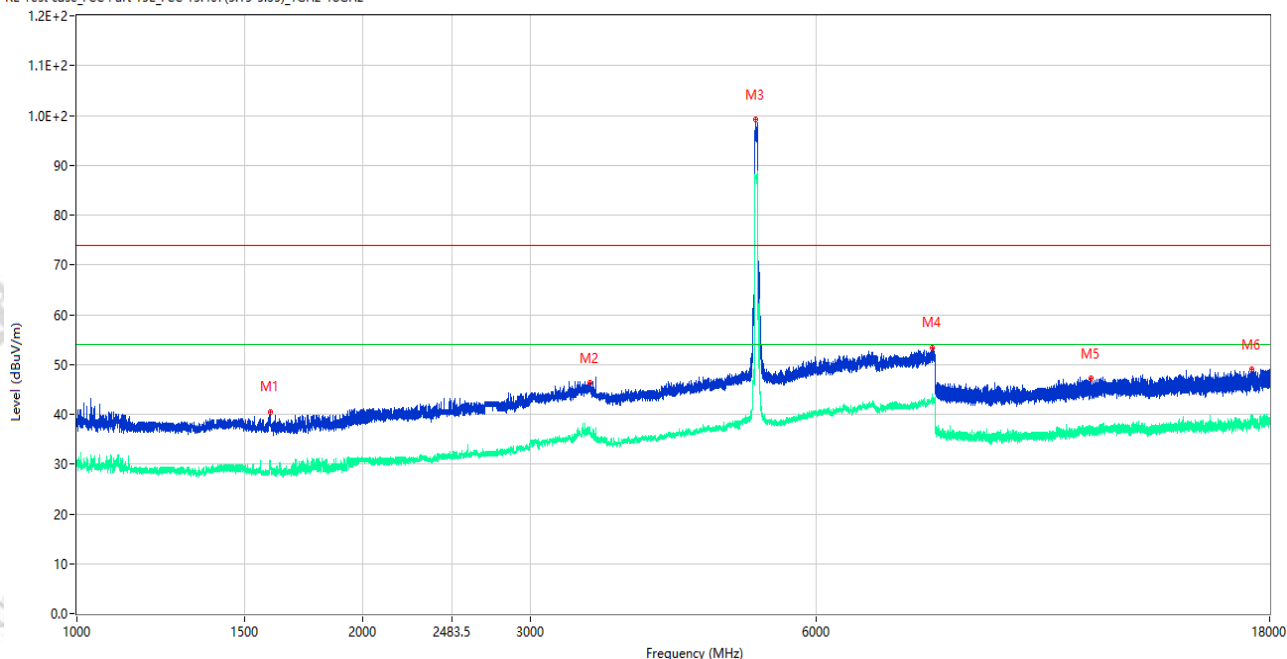

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1599.000        | 40.36            | -16.23      | 74.0           | 33.64       | Peak     | 139.00         | 150         | Horizontal | Pass    |
| 1** | 1599.000        | 29.73            | -16.23      | 54.0           | 24.27       | AV       | 139.00         | 150         | Horizontal | Pass    |
| 2   | 3467.500        | 46.43            | -5.28       | 74.0           | 27.57       | Peak     | 68.00          | 150         | Horizontal | Pass    |
| 2** | 3467.500        | 36.39            | -5.28       | 54.0           | 17.61       | AV       | 68.00          | 150         | Horizontal | Pass    |
| 3   | 5186.000        | 99.23            | -2.32       | 74.0           | -25.23      | Peak     | 0.00           | 150         | Horizontal | N/A     |
| 3** | 5186.000        | 87.69            | -2.32       | 54.0           | -33.69      | AV       | 0.00           | 150         | Horizontal | N/A     |
| 4   | 7952.500        | 53.23            | 2.21        | 74.0           | 20.77       | Peak     | 194.00         | 150         | Horizontal | Pass    |
| 4** | 7952.500        | 42.56            | 2.21        | 54.0           | 11.44       | AV       | 194.00         | 150         | Horizontal | Pass    |
| 5   | 11663.912       | 47.21            | -2.88       | 74.0           | 26.79       | Peak     | 360.00         | 150         | Horizontal | Pass    |
| 5** | 11663.912       | 36.37            | -2.88       | 54.0           | 17.63       | AV       | 360.00         | 150         | Horizontal | Pass    |
| 6   | 17250.300       | 49.12            | -0.58       | 74.0           | 24.88       | Peak     | 39.00          | 150         | Horizontal | Pass    |
| 6** | 17250.300       | 38.83            | -0.58       | 54.0           | 15.17       | AV       | 39.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-18\_09.56.22

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal Linking

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

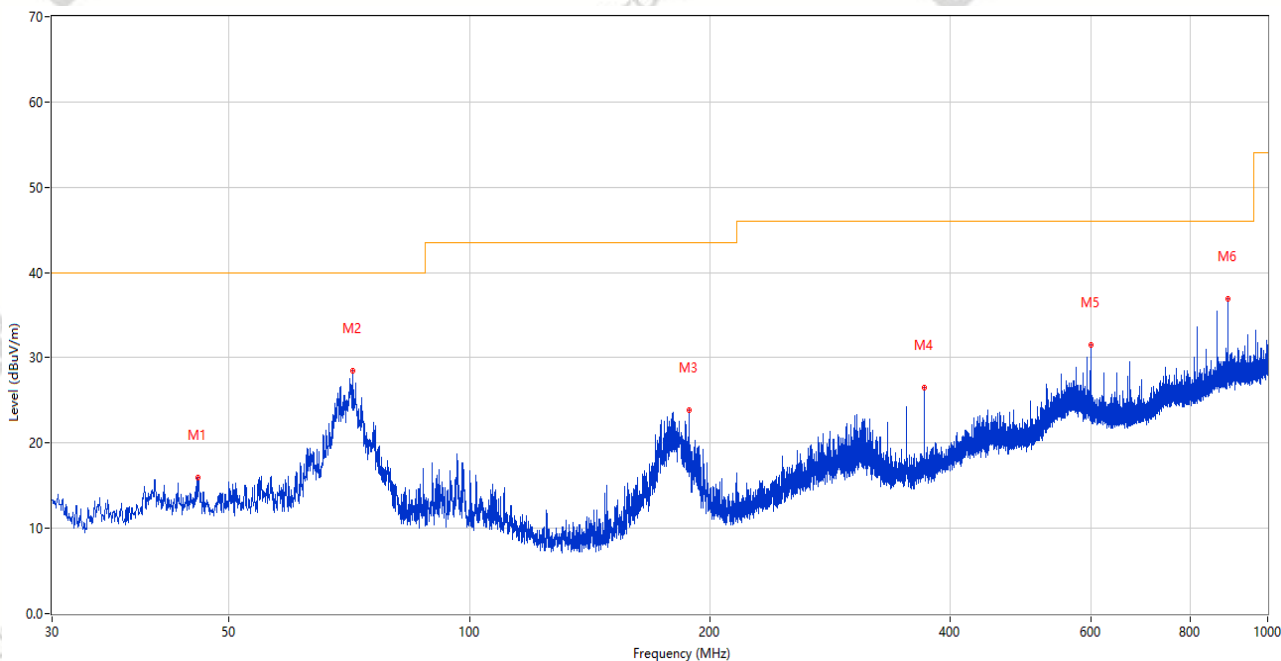

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 45.714          | 16.00            | -24.65      | 40.0           | 24.00       | Peak     | 212.00         | 100         | Vertical | Pass    |
| 2   | 71.370          | 28.46            | -29.41      | 40.0           | 11.54       | Peak     | 109.00         | 200         | Vertical | Pass    |
| 3   | 188.643         | 23.85            | -26.57      | 43.5           | 19.65       | Peak     | 202.00         | 200         | Vertical | Pass    |
| 4   | 371.246         | 25.39            | -21.35      | 46.0           | 20.61       | Peak     | 0.00           | 200         | Vertical | Pass    |
| 5   | 599.972         | 31.48            | -14.91      | 46.0           | 14.52       | Peak     | 39.00          | 200         | Vertical | Pass    |
| 6   | 890.972         | 36.96            | -9.70       | 46.0           | 9.04        | Peak     | 339.00         | 100         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-18\_09.59.34

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal Linking

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 实验室数据线

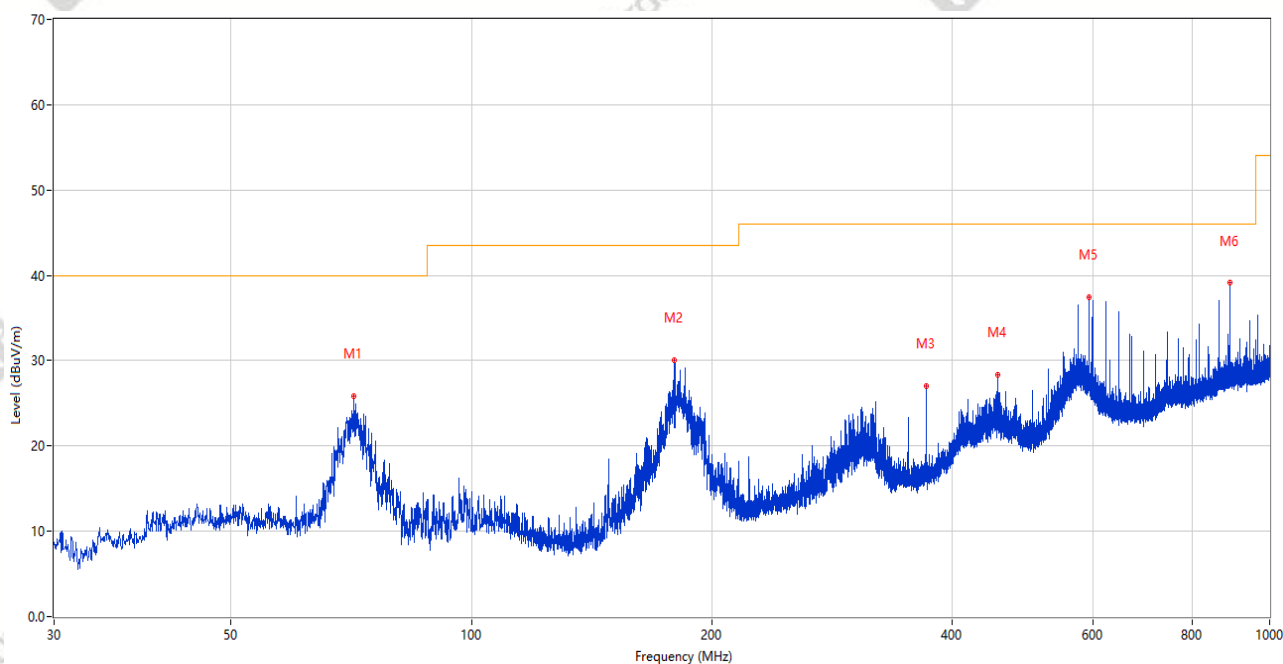

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 71.128          | 25.83            | -29.34      | 40.0           | 14.17       | Peak     | 162.00         | 200         | Horizontal | Pass    |
| 2   | 179.768         | 30.03            | -27.83      | 43.5           | 13.47       | Peak     | 97.00          | 100         | Horizontal | Pass    |
| 3   | 371.198         | 27.01            | -21.35      | 46.0           | 18.99       | Peak     | 186.00         | 100         | Horizontal | Pass    |
| 4   | 455.975         | 28.33            | -19.37      | 46.0           | 17.67       | Peak     | 97.00          | 200         | Horizontal | Pass    |
| 5   | 594.006         | 37.44            | -15.19      | 46.0           | 8.56        | Peak     | 163.00         | 100         | Horizontal | Pass    |
| 6   | 890.972         | 39.09            | -9.70       | 46.0           | 6.91        | Peak     | 43.00          | 200         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.21.43

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

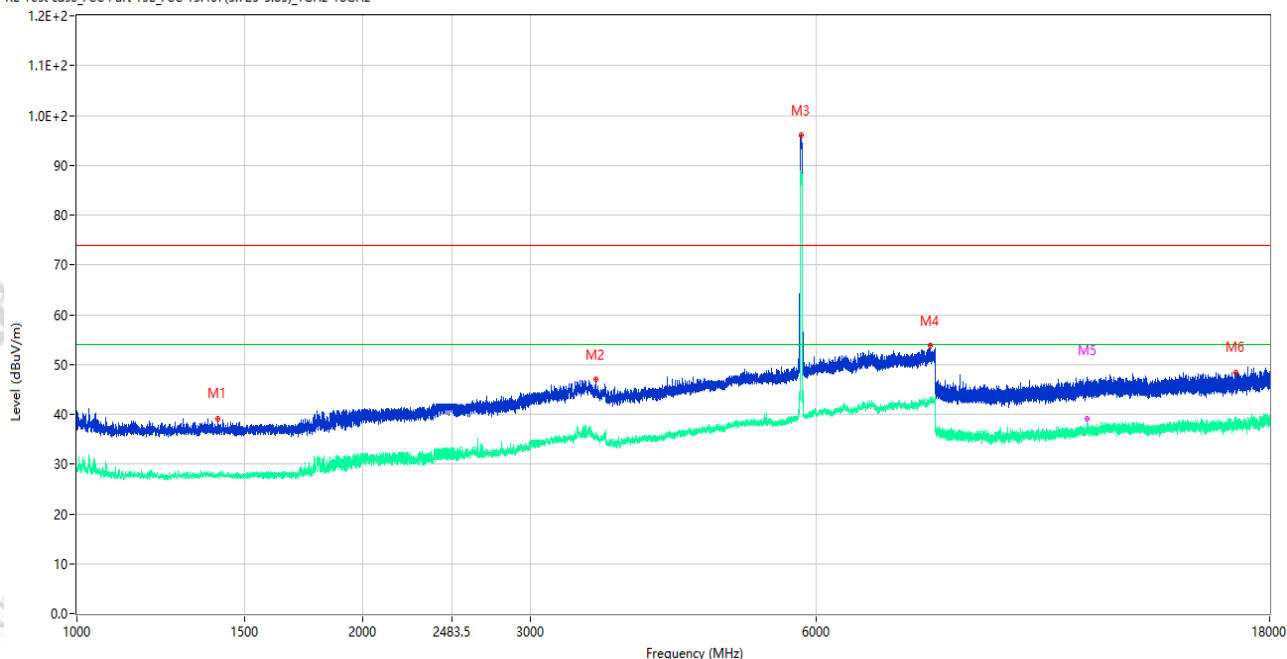

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1408.500        | 39.19            | -15.99      | 74.0           | 34.81       | Peak     | 36.00          | 150         | Vertical | Pass    |
| 1** | 1408.500        | 27.67            | -15.99      | 54.0           | 26.33       | AV       | 36.00          | 150         | Vertical | Pass    |
| 2   | 3520.000        | 46.97            | -6.01       | 74.0           | 27.03       | Peak     | 328.00         | 150         | Vertical | Pass    |
| 2** | 3520.000        | 35.51            | -6.01       | 54.0           | 18.49       | AV       | 328.00         | 150         | Vertical | Pass    |
| 3   | 5779.500        | 96.10            | -1.51       | 74.0           | -22.10      | Peak     | 357.00         | 150         | Vertical | N/A     |
| 3** | 5779.500        | 88.29            | -1.51       | 54.0           | -34.29      | AV       | 357.00         | 150         | Vertical | N/A     |
| 4   | 7916.500        | 53.71            | 1.88        | 74.0           | 20.29       | Peak     | 24.00          | 150         | Vertical | Pass    |
| 4** | 7916.500        | 43.32            | 1.88        | 54.0           | 10.68       | AV       | 24.00          | 150         | Vertical | Pass    |
| 5   | 11571.049       | 45.51            | -2.39       | 74.0           | 28.49       | Peak     | 354.00         | 150         | Vertical | Pass    |
| 5** | 11571.049       | 39.16            | -2.39       | 54.0           | 14.84       | AV       | 354.00         | 150         | Vertical | Pass    |
| 6   | 16568.588       | 48.44            | -0.93       | 74.0           | 25.56       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 16568.588       | 38.20            | -0.93       | 54.0           | 15.80       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.17.06

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

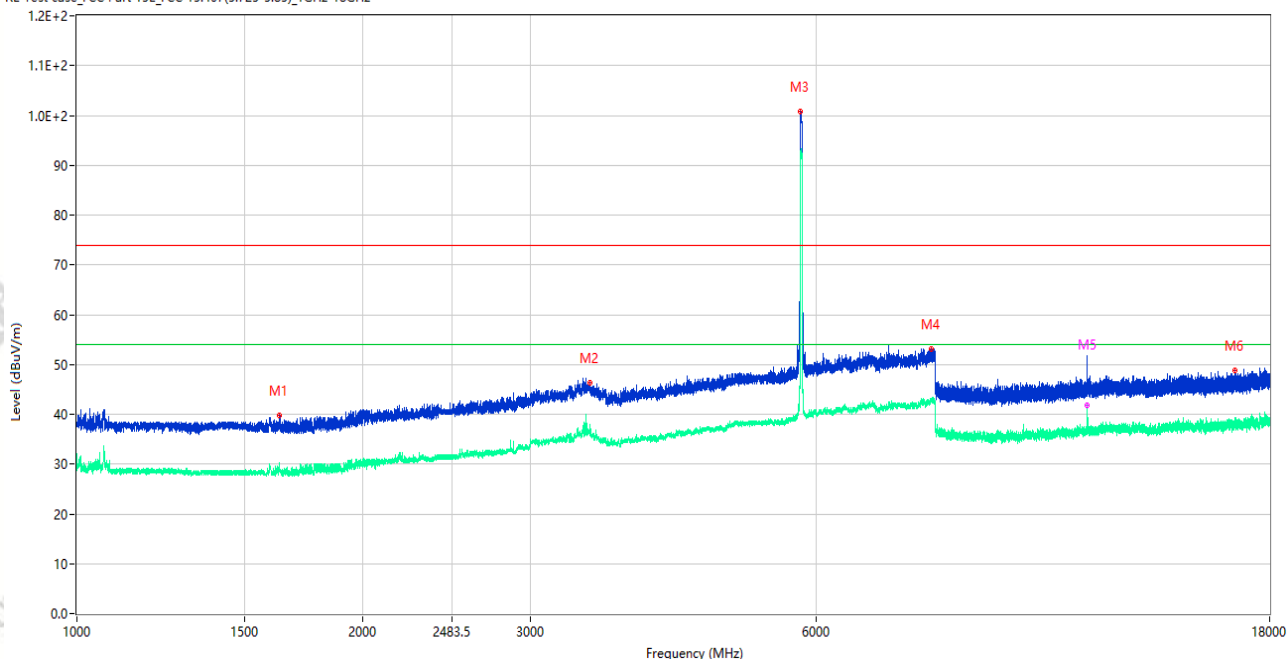

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1632.500        | 39.78            | -16.10      | 74.0           | 34.22       | Peak     | 189.00         | 150         | Horizontal | Pass    |
| 1** | 1632.500        | 29.84            | -16.10      | 54.0           | 24.16       | AV       | 189.00         | 150         | Horizontal | Pass    |
| 2   | 3464.500        | 46.06            | -5.08       | 74.0           | 27.94       | Peak     | 25.00          | 150         | Horizontal | Pass    |
| 2** | 3464.500        | 36.32            | -5.08       | 54.0           | 17.68       | AV       | 25.00          | 150         | Horizontal | Pass    |
| 3   | 5777.500        | 100.86           | -1.52       | 74.0           | -26.86      | Peak     | 93.00          | 150         | Horizontal | N/A     |
| 3** | 5777.500        | 92.36            | -1.52       | 54.0           | -38.36      | AV       | 93.00          | 150         | Horizontal | N/A     |
| 4   | 7923.000        | 53.14            | 1.93        | 74.0           | 20.86       | Peak     | 182.00         | 150         | Horizontal | Pass    |
| 4** | 7923.000        | 42.65            | 1.93        | 54.0           | 11.35       | AV       | 182.00         | 150         | Horizontal | Pass    |
| 5   | 11570.575       | 49.03            | -2.35       | 74.0           | 24.97       | Peak     | 22.00          | 150         | Horizontal | Pass    |
| 5** | 11570.575       | 41.72            | -2.35       | 54.0           | 12.28       | AV       | 22.00          | 150         | Horizontal | Pass    |
| 6   | 16544.437       | 48.78            | -1.36       | 74.0           | 25.22       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 6** | 16544.437       | 38.58            | -1.36       | 54.0           | 15.42       | AV       | 0.00           | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.32.33

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

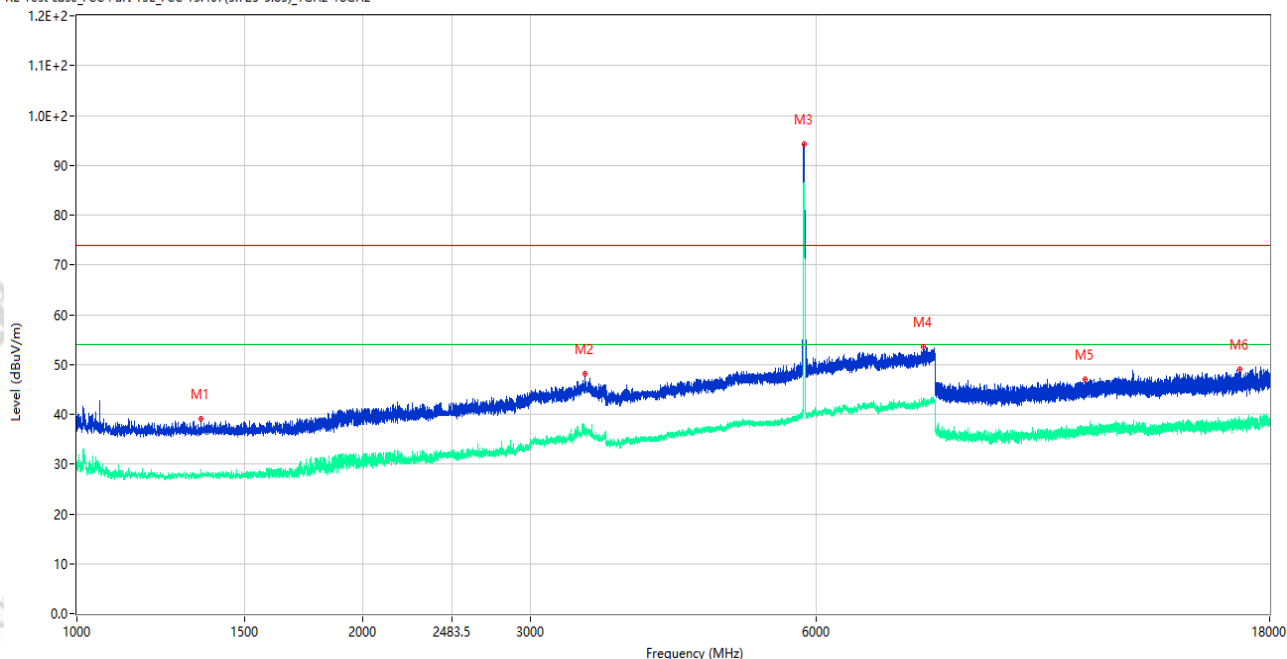

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1351.000        | 38.99            | -15.92      | 74.0           | 35.01       | Peak     | 74.00          | 150         | Vertical | Pass    |
| 1** | 1351.000        | 28.32            | -15.92      | 54.0           | 25.68       | AV       | 74.00          | 150         | Vertical | Pass    |
| 2   | 3425.500        | 48.16            | -4.90       | 74.0           | 25.84       | Peak     | 69.00          | 150         | Vertical | Pass    |
| 2** | 3425.500        | 36.37            | -4.90       | 54.0           | 17.63       | AV       | 69.00          | 150         | Vertical | Pass    |
| 3   | 5821.000        | 94.21            | -1.30       | 74.0           | -20.21      | Peak     | 10.00          | 150         | Vertical | N/A     |
| 3** | 5821.000        | 86.22            | -1.30       | 54.0           | -32.22      | AV       | 10.00          | 150         | Vertical | N/A     |
| 4   | 7786.000        | 53.49            | 1.56        | 74.0           | 20.51       | Peak     | 10.00          | 150         | Vertical | Pass    |
| 4** | 7786.000        | 42.64            | 1.56        | 54.0           | 11.36       | AV       | 10.00          | 150         | Vertical | Pass    |
| 5   | 11520.463       | 47.07            | -2.73       | 74.0           | 26.93       | Peak     | 249.00         | 150         | Vertical | Pass    |
| 5** | 11520.463       | 37.01            | -2.73       | 54.0           | 16.99       | AV       | 249.00         | 150         | Vertical | Pass    |
| 6   | 16739.213       | 49.09            | -1.59       | 74.0           | 24.91       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 6** | 16739.213       | 37.83            | -1.59       | 54.0           | 16.17       | AV       | 0.00           | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.37.10

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n20 CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

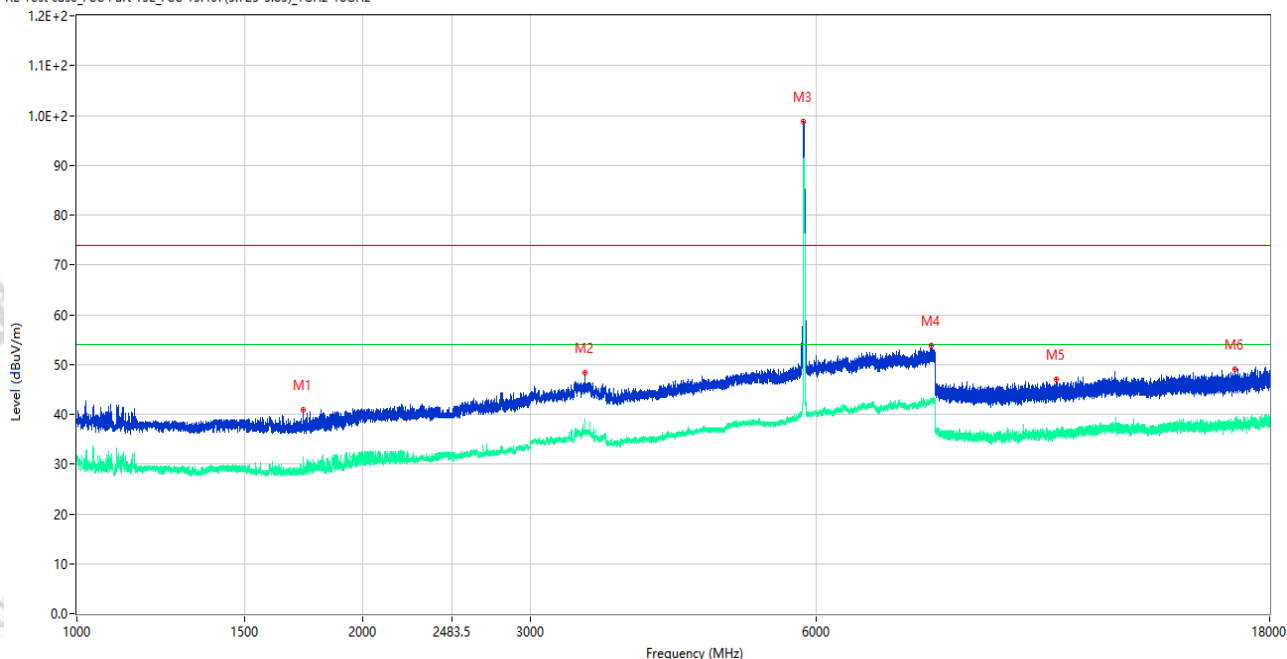

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1729.500        | 40.91            | -16.18      | 74.0           | 33.09       | Peak     | 157.00         | 150         | Horizontal | Pass    |
| 1** | 1729.500        | 30.08            | -16.18      | 54.0           | 23.92       | AV       | 157.00         | 150         | Horizontal | Pass    |
| 2   | 3428.000        | 48.41            | -4.91       | 74.0           | 25.59       | Peak     | 326.00         | 150         | Horizontal | Pass    |
| 2** | 3428.000        | 36.57            | -4.91       | 54.0           | 17.43       | AV       | 326.00         | 150         | Horizontal | Pass    |
| 3   | 5820.000        | 98.66            | -1.33       | 74.0           | -24.66      | Peak     | 113.00         | 150         | Horizontal | N/A     |
| 3** | 5820.000        | 90.99            | -1.33       | 54.0           | -36.99      | AV       | 113.00         | 150         | Horizontal | N/A     |
| 4   | 7929.500        | 53.70            | 2.01        | 74.0           | 20.30       | Peak     | 134.00         | 150         | Horizontal | Pass    |
| 4** | 7929.500        | 42.54            | 2.01        | 54.0           | 11.46       | AV       | 134.00         | 150         | Horizontal | Pass    |
| 5   | 10737.424       | 46.92            | -3.87       | 74.0           | 27.08       | Peak     | 90.00          | 150         | Horizontal | Pass    |
| 5** | 10737.424       | 35.78            | -3.87       | 54.0           | 18.22       | AV       | 90.00          | 150         | Horizontal | Pass    |
| 6   | 16553.363       | 48.94            | -0.87       | 74.0           | 25.06       | Peak     | 190.00         | 150         | Horizontal | Pass    |
| 6** | 16553.363       | 38.56            | -0.87       | 54.0           | 15.44       | AV       | 190.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.52.49

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n40 CH151 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case FCC Part 15E FCC 15.407(5.725-5.85)\_1GHz-18GHz

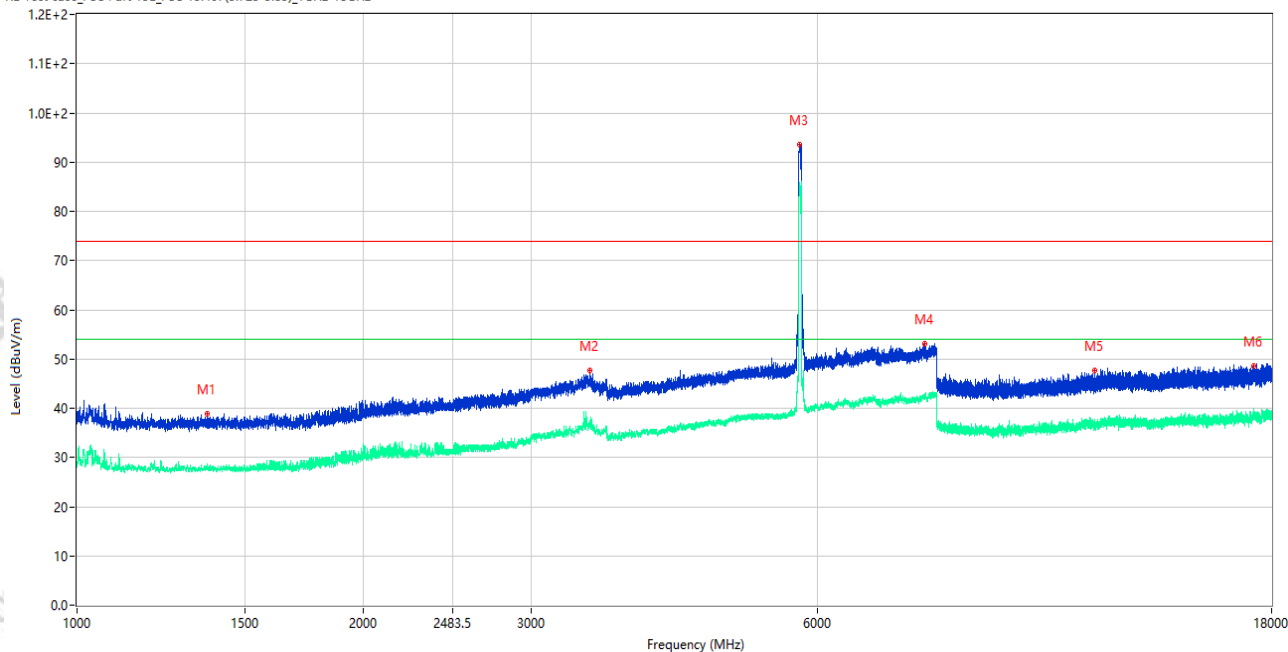

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1368.750        | 38.93            | -15.92      | 74.0           | 35.07       | Peak     | 199.00         | 150         | Vertical | Pass    |
| 1** | 1368.750        | 27.66            | -15.92      | 54.0           | 26.34       | AV       | 199.00         | 150         | Vertical | Pass    |
| 2   | 3455.500        | 47.76            | -4.89       | 74.0           | 26.24       | Peak     | 26.00          | 150         | Vertical | Pass    |
| 2** | 3455.500        | 36.78            | -4.89       | 54.0           | 17.22       | AV       | 26.00          | 150         | Vertical | Pass    |
| 3   | 5738.000        | 93.64            | -2.26       | 74.0           | -19.64      | Peak     | 359.00         | 150         | Vertical | N/A     |
| 3** | 5738.000        | 85.76            | -2.26       | 54.0           | -31.76      | AV       | 359.00         | 150         | Vertical | N/A     |
| 4   | 7786.000        | 53.03            | 1.56        | 74.0           | 20.97       | Peak     | 33.00          | 150         | Vertical | Pass    |
| 4** | 7786.000        | 42.63            | 1.56        | 54.0           | 11.37       | AV       | 33.00          | 150         | Vertical | Pass    |
| 5   | 11723.288       | 47.71            | -3.01       | 74.0           | 26.29       | Peak     | 360.00         | 150         | Vertical | Pass    |
| 5** | 11723.288       | 36.05            | -3.01       | 54.0           | 17.95       | AV       | 360.00         | 150         | Vertical | Pass    |
| 6   | 17250.038       | 48.56            | -0.57       | 74.0           | 25.44       | Peak     | 115.00         | 150         | Vertical | Pass    |
| 6** | 17250.038       | 38.77            | -0.57       | 54.0           | 15.23       | AV       | 115.00         | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_20.48.07

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11n40 CH151 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

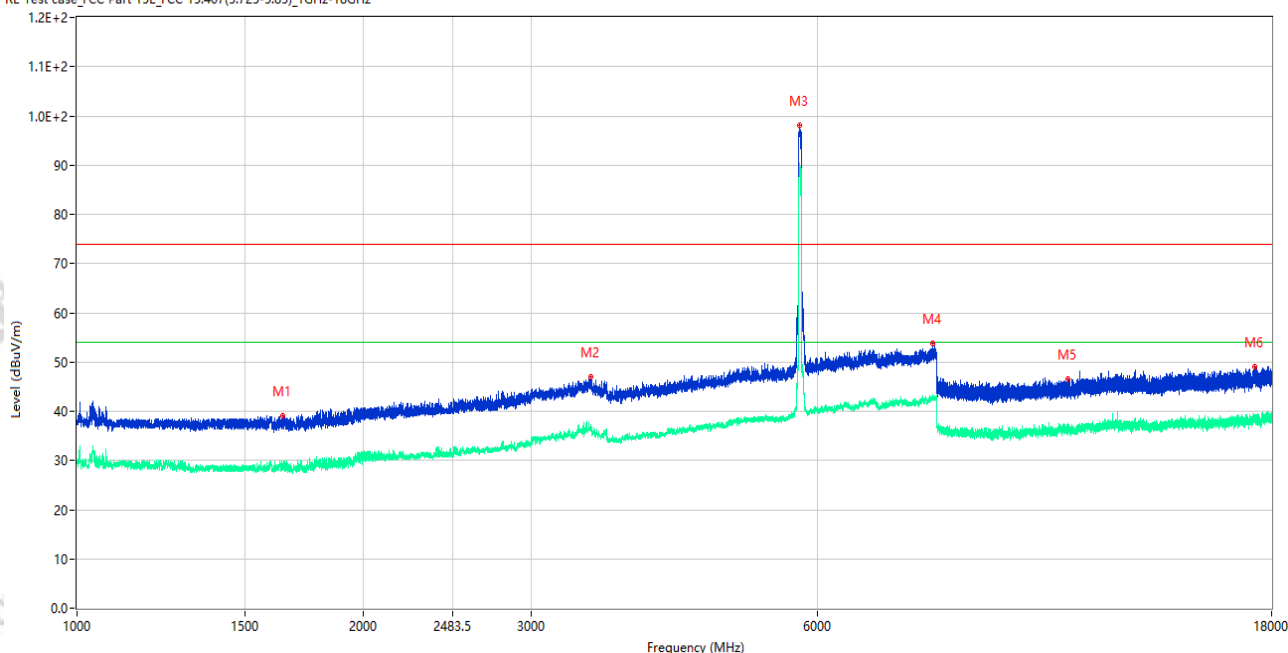

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1645.250        | 39.04            | -16.28      | 74.0           | 34.96       | Peak     | 161.00         | 150         | Horizontal | Pass    |
| 1** | 1645.250        | 28.35            | -16.28      | 54.0           | 25.65       | AV       | 161.00         | 150         | Horizontal | Pass    |
| 2   | 3470.500        | 46.94            | -5.60       | 74.0           | 27.06       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 3470.500        | 36.17            | -5.60       | 54.0           | 17.83       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 5738.500        | 98.00            | -2.25       | 74.0           | -24.00      | Peak     | 180.00         | 150         | Horizontal | N/A     |
| 3** | 5738.500        | 90.40            | -2.25       | 54.0           | -36.40      | AV       | 180.00         | 150         | Horizontal | N/A     |
| 4   | 7920.000        | 53.68            | 1.96        | 74.0           | 20.32       | Peak     | 267.00         | 150         | Horizontal | Pass    |
| 4** | 7920.000        | 42.80            | 1.96        | 54.0           | 11.20       | AV       | 267.00         | 150         | Horizontal | Pass    |
| 5   | 11004.137       | 46.65            | -2.93       | 74.0           | 27.35       | Peak     | 267.00         | 150         | Horizontal | Pass    |
| 5** | 11004.137       | 36.45            | -2.93       | 54.0           | 17.55       | AV       | 267.00         | 150         | Horizontal | Pass    |
| 6   | 17277.600       | 49.07            | -1.00       | 74.0           | 24.93       | Peak     | 140.00         | 150         | Horizontal | Pass    |
| 6** | 17277.600       | 39.04            | -1.00       | 54.0           | 14.96       | AV       | 140.00         | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_21.03.03

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

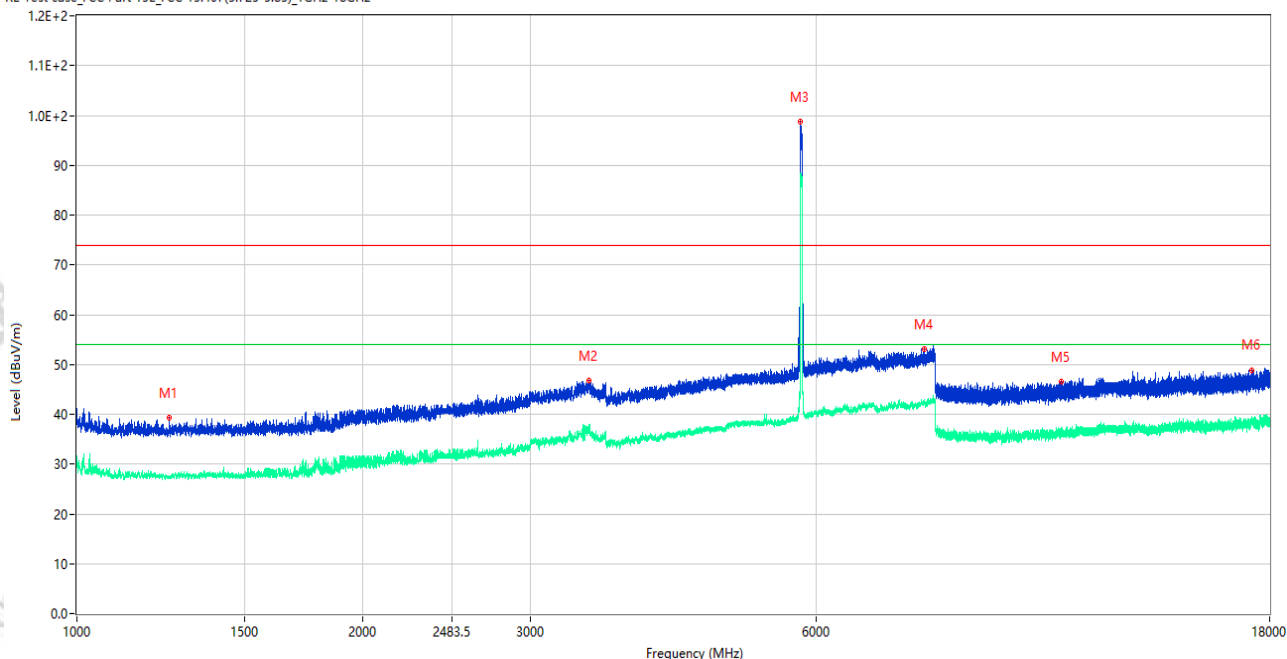

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1250.000        | 39.25            | -16.17      | 74.0           | 34.75       | Peak     | 183.00         | 150         | Vertical | Pass    |
| 1** | 1250.000        | 27.26            | -16.17      | 54.0           | 26.74       | AV       | 183.00         | 150         | Vertical | Pass    |
| 2   | 3457.500        | 46.68            | -4.92       | 74.0           | 27.32       | Peak     | 0.00           | 150         | Vertical | Pass    |
| 2** | 3457.500        | 36.53            | -4.92       | 54.0           | 17.47       | AV       | 0.00           | 150         | Vertical | Pass    |
| 3   | 5778.500        | 98.73            | -1.53       | 74.0           | -24.73      | Peak     | 0.00           | 150         | Vertical | N/A     |
| 3** | 5778.500        | 88.24            | -1.53       | 54.0           | -34.24      | AV       | 0.00           | 150         | Vertical | N/A     |
| 4   | 7789.500        | 53.04            | 1.61        | 74.0           | 20.96       | Peak     | 62.00          | 150         | Vertical | Pass    |
| 4** | 7789.500        | 42.75            | 1.61        | 54.0           | 11.25       | AV       | 62.00          | 150         | Vertical | Pass    |
| 5   | 10866.388       | 46.52            | -3.21       | 74.0           | 27.48       | Peak     | 214.00         | 150         | Vertical | Pass    |
| 5** | 10866.388       | 35.81            | -3.21       | 54.0           | 18.19       | AV       | 214.00         | 150         | Vertical | Pass    |
| 6   | 17228.775       | 48.91            | -0.40       | 74.0           | 25.09       | Peak     | 13.00          | 150         | Vertical | Pass    |
| 6** | 17228.775       | 38.38            | -0.40       | 54.0           | 15.62       | AV       | 13.00          | 150         | Vertical | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_21.07.44

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax20 CH157 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

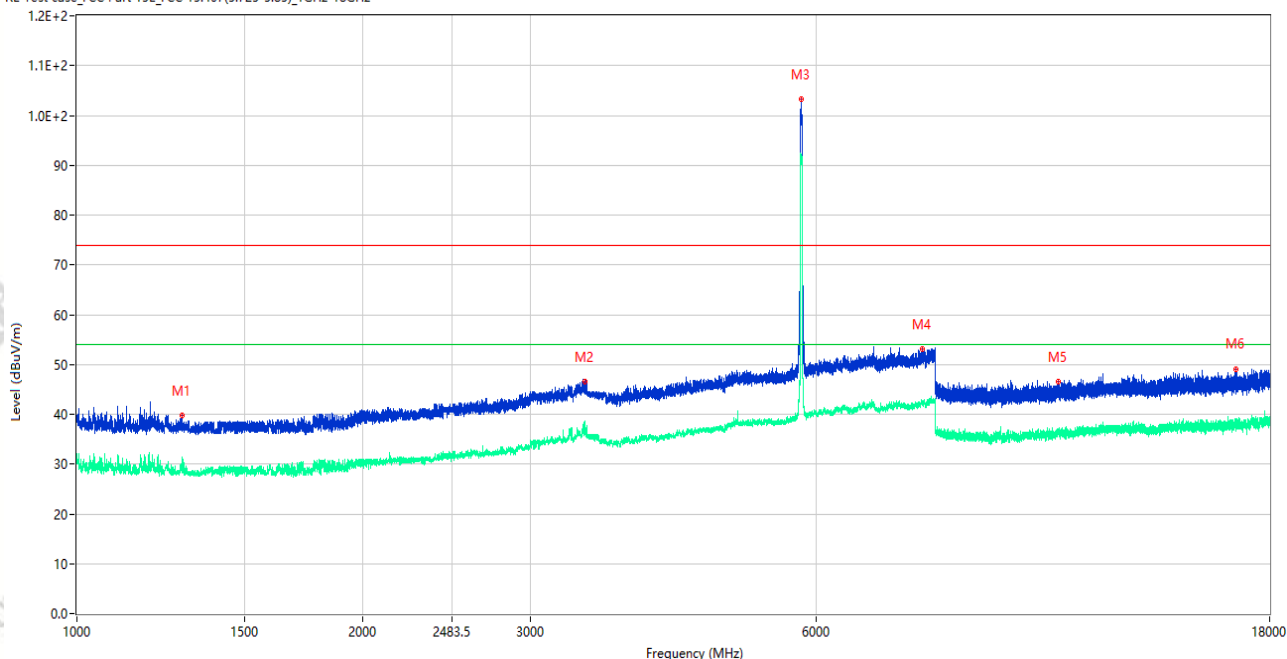

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1290.250        | 39.69            | -15.82      | 74.0           | 34.31       | Peak     | 95.00          | 150         | Horizontal | Pass    |
| 1** | 1290.250        | 31.42            | -15.82      | 54.0           | 22.58       | AV       | 95.00          | 150         | Horizontal | Pass    |
| 2   | 3427.500        | 46.62            | -4.93       | 74.0           | 27.38       | Peak     | 52.00          | 150         | Horizontal | Pass    |
| 2** | 3427.500        | 36.22            | -4.93       | 54.0           | 17.78       | AV       | 52.00          | 150         | Horizontal | Pass    |
| 3   | 5781.500        | 103.35           | -1.53       | 74.0           | -29.35      | Peak     | 10.00          | 150         | Horizontal | N/A     |
| 3** | 5781.500        | 91.61            | -1.53       | 54.0           | -37.61      | AV       | 10.00          | 150         | Horizontal | N/A     |
| 4   | 7754.000        | 53.07            | 1.50        | 74.0           | 20.93       | Peak     | 77.00          | 150         | Horizontal | Pass    |
| 4** | 7754.000        | 42.02            | 1.50        | 54.0           | 11.98       | AV       | 77.00          | 150         | Horizontal | Pass    |
| 5   | 10789.437       | 46.66            | -2.98       | 74.0           | 27.34       | Peak     | 354.00         | 150         | Horizontal | Pass    |
| 5** | 10789.437       | 36.30            | -2.98       | 54.0           | 17.70       | AV       | 354.00         | 150         | Horizontal | Pass    |
| 6   | 16568.588       | 49.13            | -0.93       | 74.0           | 24.87       | Peak     | 13.00          | 150         | Horizontal | Pass    |
| 6** | 16568.588       | 38.26            | -0.93       | 54.0           | 15.74       | AV       | 13.00          | 150         | Horizontal | Pass    |

## Test Result

Project Number: P-EE26090066

Test Time: 2026-09-17\_21.23.28

EUT Name: Dash Cam

Temp.(°C): 22.8

Model Number: F800-RC44H

Humidity (%RH): 51

Sample Number: EE26090009-001-S02

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH151 P=40


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case\_FCC Part 15E\_FCC 15.407(5.725-5.85)\_1GHz-18GHz

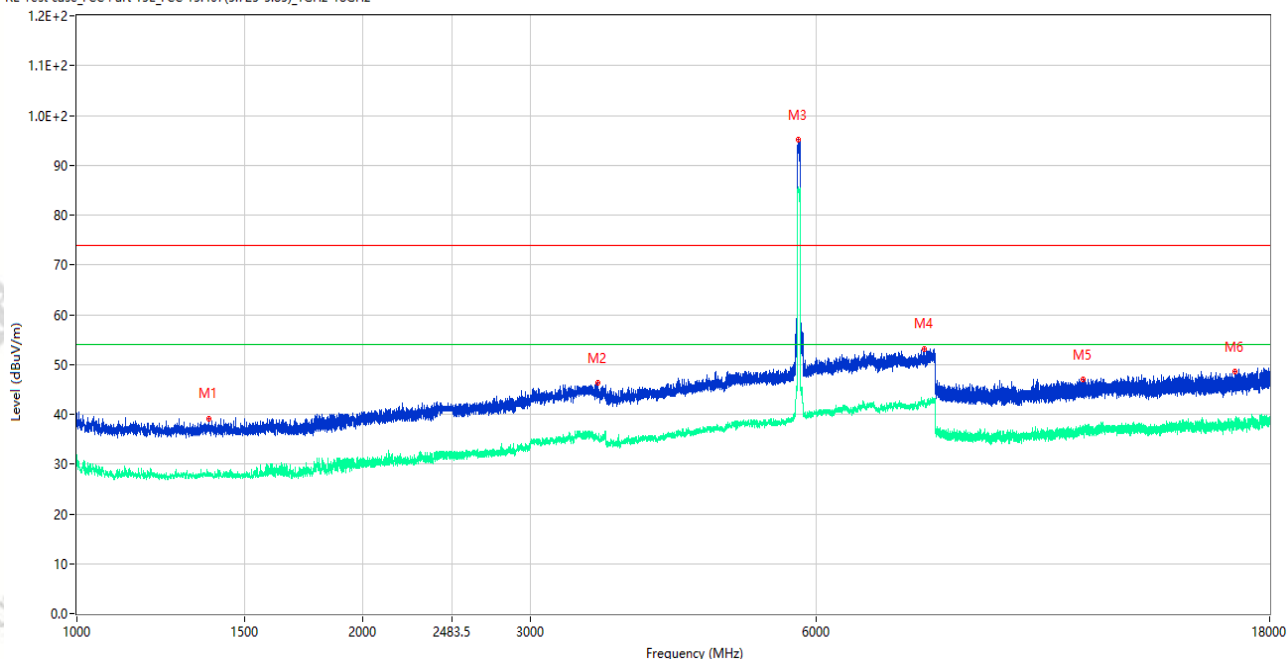


| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna  | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|----------|---------|
| 1   | 1377.750        | 38.99            | -16.00      | 74.0           | 35.01       | Peak     | 134.00         | 150         | Vertical | Pass    |
| 1** | 1377.750        | 27.76            | -16.00      | 54.0           | 26.24       | AV       | 134.00         | 150         | Vertical | Pass    |
| 2   | 3533.500        | 46.23            | -6.13       | 74.0           | 27.77       | Peak     | 4.00           | 150         | Vertical | Pass    |
| 2** | 3533.500        | 35.40            | -6.13       | 54.0           | 18.60       | AV       | 4.00           | 150         | Vertical | Pass    |
| 3   | 5741.000        | 95.19            | -2.20       | 74.0           | -21.19      | Peak     | 10.00          | 150         | Vertical | N/A     |
| 3** | 5741.000        | 84.81            | -2.20       | 54.0           | -30.81      | AV       | 10.00          | 150         | Vertical | N/A     |
| 4   | 7802.000        | 53.15            | 1.52        | 74.0           | 20.85       | Peak     | 332.00         | 150         | Vertical | Pass    |
| 4** | 7802.000        | 42.33            | 1.52        | 54.0           | 11.67       | AV       | 332.00         | 150         | Vertical | Pass    |
| 5   | 11444.700       | 47.07            | -3.15       | 74.0           | 26.93       | Peak     | 303.00         | 150         | Vertical | Pass    |
| 5** | 11444.700       | 36.10            | -3.15       | 54.0           | 17.90       | AV       | 303.00         | 150         | Vertical | Pass    |
| 6   | 16545.488       | 48.50            | -1.29       | 74.0           | 25.50       | Peak     | 88.00          | 150         | Vertical | Pass    |
| 6** | 16545.488       | 37.99            | -1.29       | 54.0           | 16.01       | AV       | 88.00          | 150         | Vertical | Pass    |

Test Result

Project Number: P-EE26090066  
Test Time: 2026-09-17\_21.18.43

|                |                    |                 |                             |
|----------------|--------------------|-----------------|-----------------------------|
| EUT Name:      | Dash Cam           | Temp.(°C):      | 22.8                        |
| Model Number:  | F800-RC44H         | Humidity (%RH): | 51                          |
| Sample Number: | EE26090009-001-S02 | Pressure(kPa):  | 101                         |
| Test Standard: | 47 CFR Part 15E    | Work Mode:      | 5.8G WIFI 11ax40 CH151 P=40 |
| Test Site:     | 966#2              | Test Voltage:   | DC 5V From PC               |
| Test Engineer: | Zhang Mingyue      | Remark:         | 实验室数据线                      |

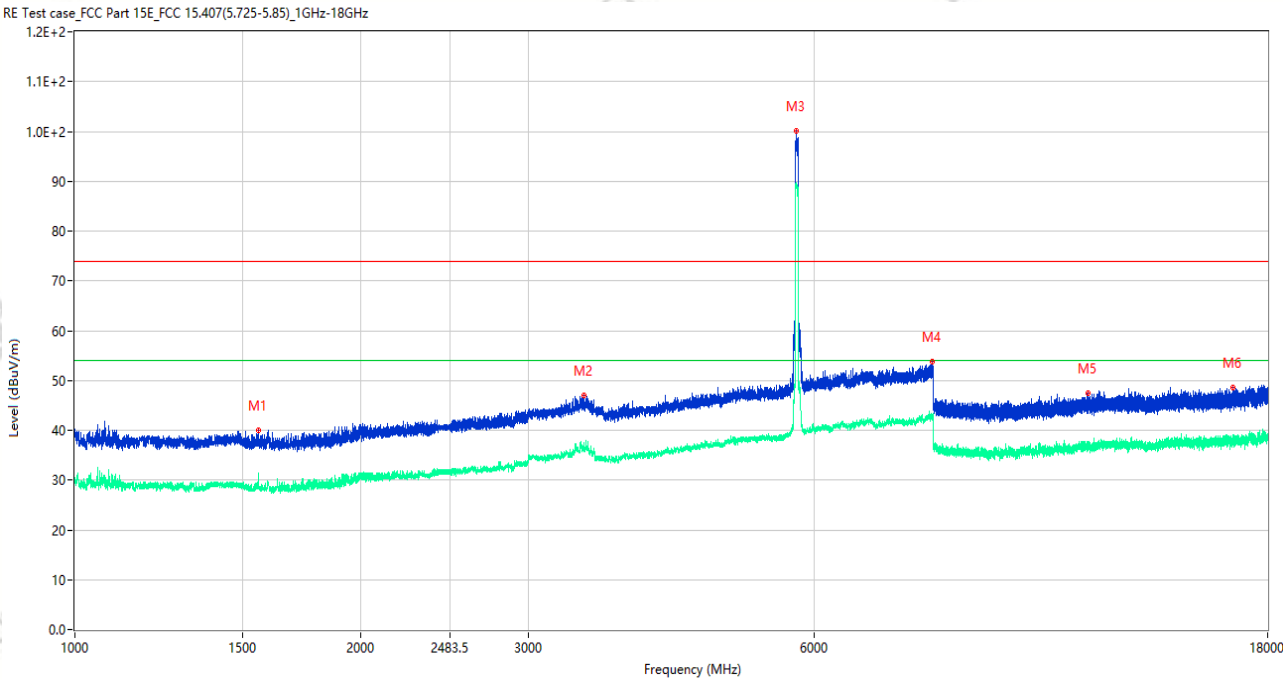

| No. | Frequency (MHz) | Results (dBuV/m) | Factor (dB) | Limit (dBuV/m) | Margin (dB) | Detector | Table (Degree) | Height (cm) | Antenna    | Verdict |
|-----|-----------------|------------------|-------------|----------------|-------------|----------|----------------|-------------|------------|---------|
| 1   | 1560.000        | 39.93            | -16.05      | 74.0           | 34.07       | Peak     | 188.00         | 150         | Horizontal | Pass    |
| 1** | 1560.000        | 31.13            | -16.05      | 54.0           | 22.87       | AV       | 188.00         | 150         | Horizontal | Pass    |
| 2   | 3431.000        | 46.99            | -5.03       | 74.0           | 27.01       | Peak     | 0.00           | 150         | Horizontal | Pass    |
| 2** | 3431.000        | 36.83            | -5.03       | 54.0           | 17.17       | AV       | 0.00           | 150         | Horizontal | Pass    |
| 3   | 5748.500        | 100.06           | -2.11       | 74.0           | -26.06      | Peak     | 105.00         | 150         | Horizontal | N/A     |
| 3** | 5748.500        | 88.99            | -2.11       | 54.0           | -34.99      | AV       | 105.00         | 150         | Horizontal | N/A     |
| 4   | 7986.000        | 53.78            | 1.89        | 74.0           | 20.22       | Peak     | 232.00         | 150         | Horizontal | Pass    |
| 4** | 7986.000        | 42.34            | 1.89        | 54.0           | 11.66       | AV       | 232.00         | 150         | Horizontal | Pass    |
| 5   | 11652.037       | 47.48            | -2.55       | 74.0           | 26.52       | Peak     | 354.00         | 150         | Horizontal | Pass    |
| 5** | 11652.037       | 36.74            | -2.55       | 54.0           | 17.26       | AV       | 354.00         | 150         | Horizontal | Pass    |
| 6   | 16560.187       | 48.53            | -0.99       | 74.0           | 25.47       | Peak     | 115.00         | 150         | Horizontal | Pass    |
| 6** | 16560.187       | 37.98            | -0.99       | 54.0           | 16.02       | AV       | 115.00         | 150         | Horizontal | Pass    |