


Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_17.45.08

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11a CH44 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

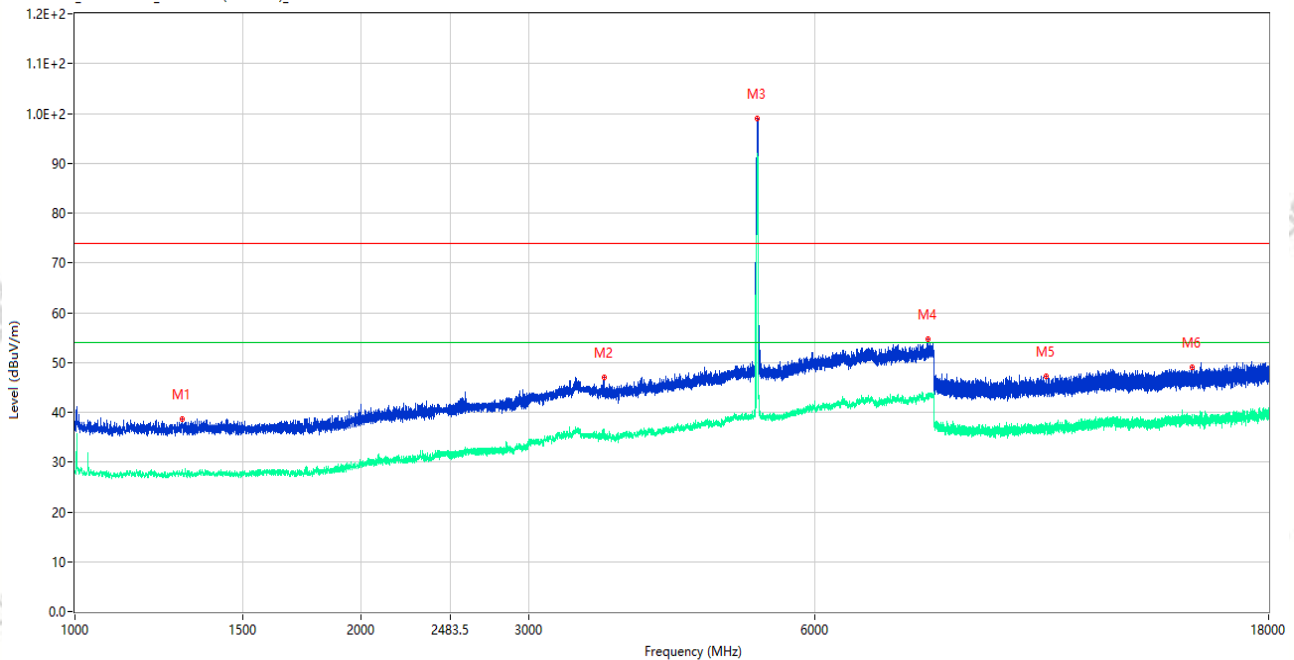

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1295.000	38.57	-15.73	74.0	35.43	Peak	354.00	150	Vertical	Pass
1**	1295.000	28.32	-15.73	54.0	25.68	AV	354.00	150	Vertical	Pass
2	3599.000	46.92	-5.03	74.0	27.08	Peak	280.00	150	Vertical	Pass
2**	3599.000	36.59	-5.03	54.0	17.41	AV	280.00	150	Vertical	Pass
3	5222.500	98.92	-2.36	74.0	-24.92	Peak	21.00	150	Vertical	N/A
3**	5222.500	90.83	-2.36	54.0	-36.83	AV	21.00	150	Vertical	N/A
4	7894.000	54.58	1.47	74.0	19.42	Peak	5.00	150	Vertical	Pass
4**	7894.000	43.78	1.47	54.0	10.22	AV	5.00	150	Vertical	Pass
5	10503.012	47.24	-3.31	74.0	26.76	Peak	51.00	150	Vertical	Pass
5**	10503.012	36.75	-3.31	54.0	17.25	AV	51.00	150	Vertical	Pass
6	14949.488	49.00	-1.41	74.0	25.00	Peak	243.00	150	Vertical	Pass
6**	14949.488	38.49	-1.41	54.0	15.51	AV	243.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_17.41.00

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11a CH44 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

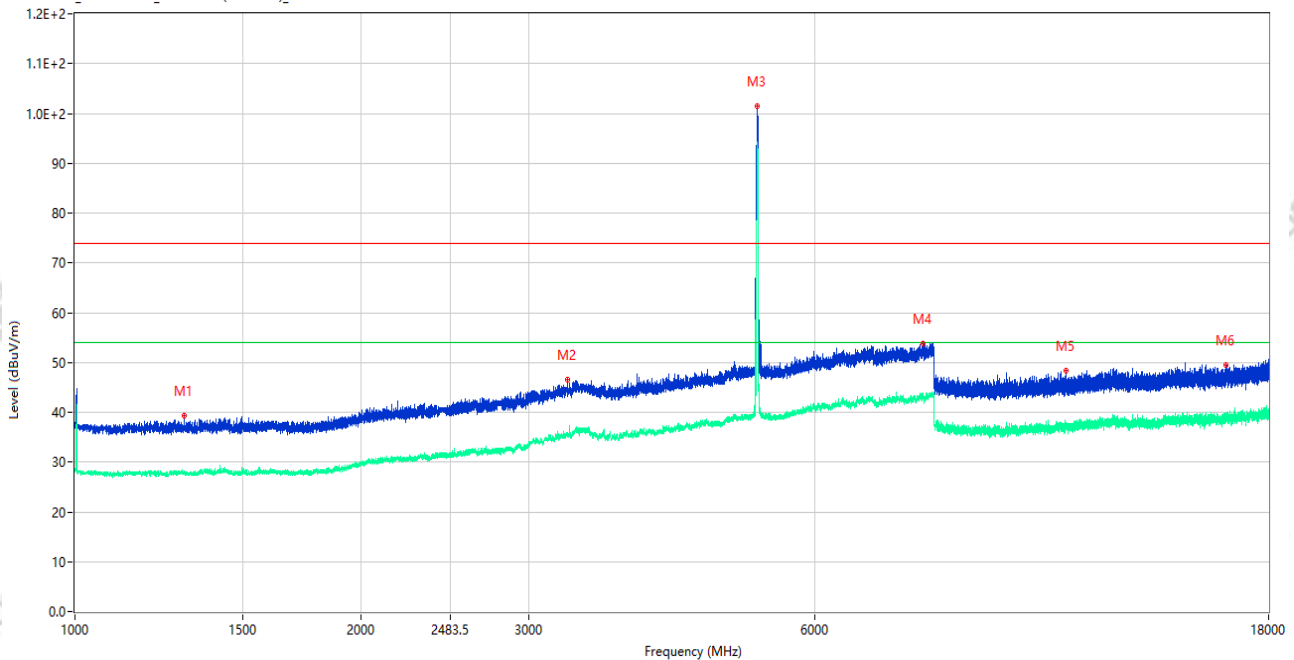


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1301.750	39.22	-15.59	74.0	34.78	Peak	52.00	150	Horizontal	Pass
1**	1301.750	27.97	-15.59	54.0	26.03	AV	52.00	150	Horizontal	Pass
2	3295.000	46.46	-6.80	74.0	27.54	Peak	360.00	150	Horizontal	Pass
2**	3295.000	35.10	-6.80	54.0	18.90	AV	360.00	150	Horizontal	Pass
3	5216.000	101.47	-2.32	74.0	-27.47	Peak	42.00	150	Horizontal	N/A
3**	5216.000	94.01	-2.32	54.0	-40.01	AV	42.00	150	Horizontal	N/A
4	7793.000	53.84	1.66	74.0	20.16	Peak	81.00	150	Horizontal	Pass
4**	7793.000	43.34	1.66	54.0	10.66	AV	81.00	150	Horizontal	Pass
5	11029.787	48.28	-3.00	74.0	25.72	Peak	50.00	150	Horizontal	Pass
5**	11029.787	36.74	-3.00	54.0	17.26	AV	50.00	150	Horizontal	Pass
6	16240.463	49.42	-1.33	74.0	24.58	Peak	314.00	150	Horizontal	Pass
6**	16240.463	38.64	-1.33	54.0	15.36	AV	314.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-09-01_19.28.17

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

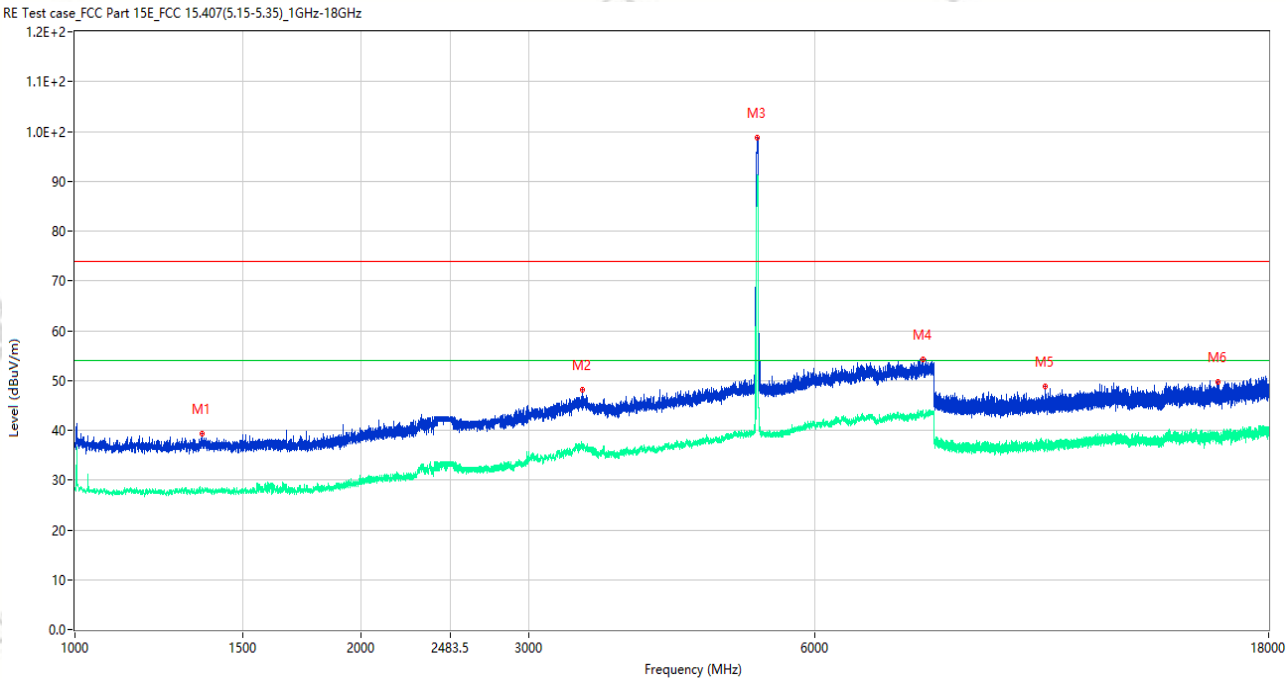


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.750	39.39	-15.83	74.0	34.61	Peak	140.00	150	Vertical	Pass
1**	1361.750	28.31	-15.83	54.0	25.69	AV	140.00	150	Vertical	Pass
2	3418.500	48.22	-5.08	74.0	25.78	Peak	303.00	150	Vertical	Pass
2**	3418.500	36.58	-5.08	54.0	17.42	AV	303.00	150	Vertical	Pass
3	5216.000	98.80	-2.32	74.0	-24.80	Peak	14.00	150	Vertical	N/A
3**	5216.000	91.41	-2.32	54.0	-37.41	AV	14.00	150	Vertical	N/A
4	7788.000	54.21	1.59	74.0	19.79	Peak	360.00	150	Vertical	Pass
4**	7788.000	43.37	1.59	54.0	10.63	AV	360.00	150	Vertical	Pass
5	10480.925	48.76	-3.44	74.0	25.24	Peak	120.00	150	Vertical	Pass
5**	10480.925	36.81	-3.44	54.0	17.19	AV	120.00	150	Vertical	Pass
6	15931.237	49.75	-2.33	74.0	24.25	Peak	312.00	150	Vertical	Pass
6**	15931.237	38.26	-2.33	54.0	15.74	AV	312.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-09-01_19.32.10

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n20 CH44 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

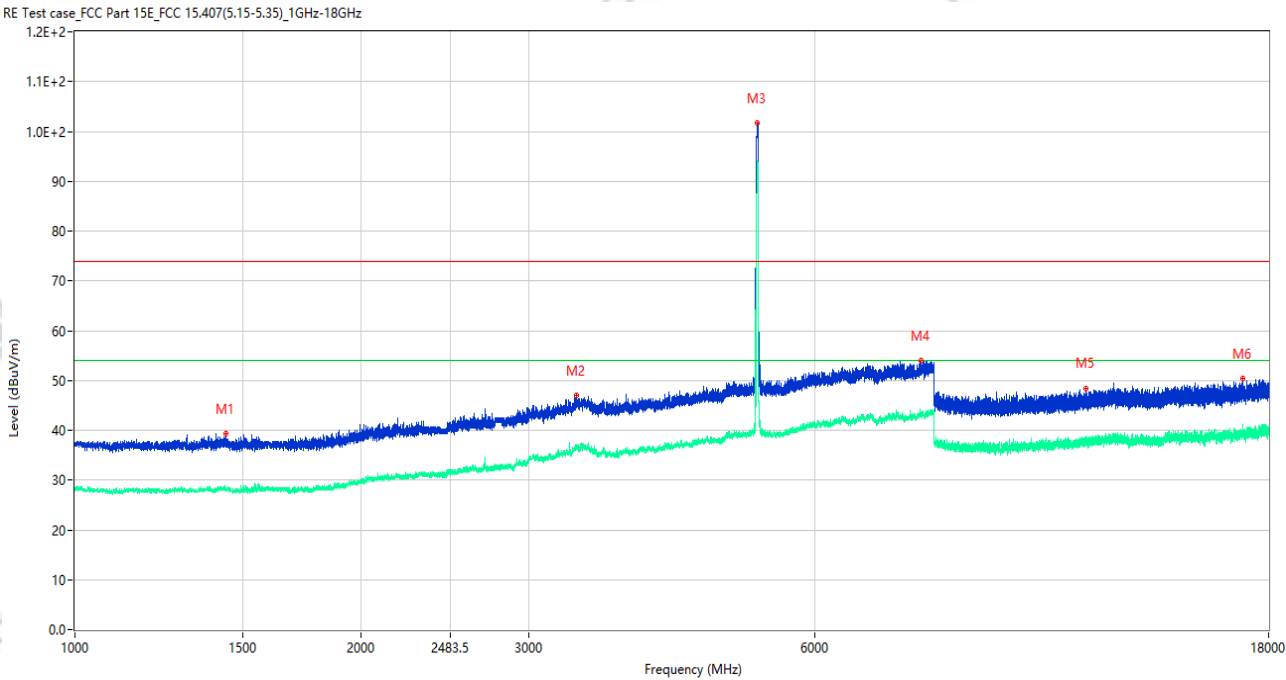

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1440.000	39.36	-15.95	74.0	34.64	Peak	95.00	150	Horizontal	Pass
1**	1440.000	28.51	-15.95	54.0	25.49	AV	95.00	150	Horizontal	Pass
2	3365.000	47.06	-5.19	74.0	26.94	Peak	214.00	150	Horizontal	Pass
2**	3365.000	37.17	-5.19	54.0	16.83	AV	214.00	150	Horizontal	Pass
3	5216.500	101.68	-2.33	74.0	-27.68	Peak	45.00	150	Horizontal	N/A
3**	5216.500	94.02	-2.33	54.0	-40.02	AV	45.00	150	Horizontal	N/A
4	7762.000	54.03	1.35	74.0	19.97	Peak	16.00	150	Horizontal	Pass
4**	7762.000	42.94	1.35	54.0	11.06	AV	16.00	150	Horizontal	Pass
5	11563.688	48.46	-2.25	74.0	25.54	Peak	0.00	150	Horizontal	Pass
5**	11563.688	37.86	-2.25	54.0	16.14	AV	0.00	150	Horizontal	Pass
6	16892.511	50.28	-0.46	74.0	23.72	Peak	178.00	150	Horizontal	Pass
6**	16892.511	39.67	-0.46	54.0	14.33	AV	178.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_19.44.15

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11n40 CH46 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

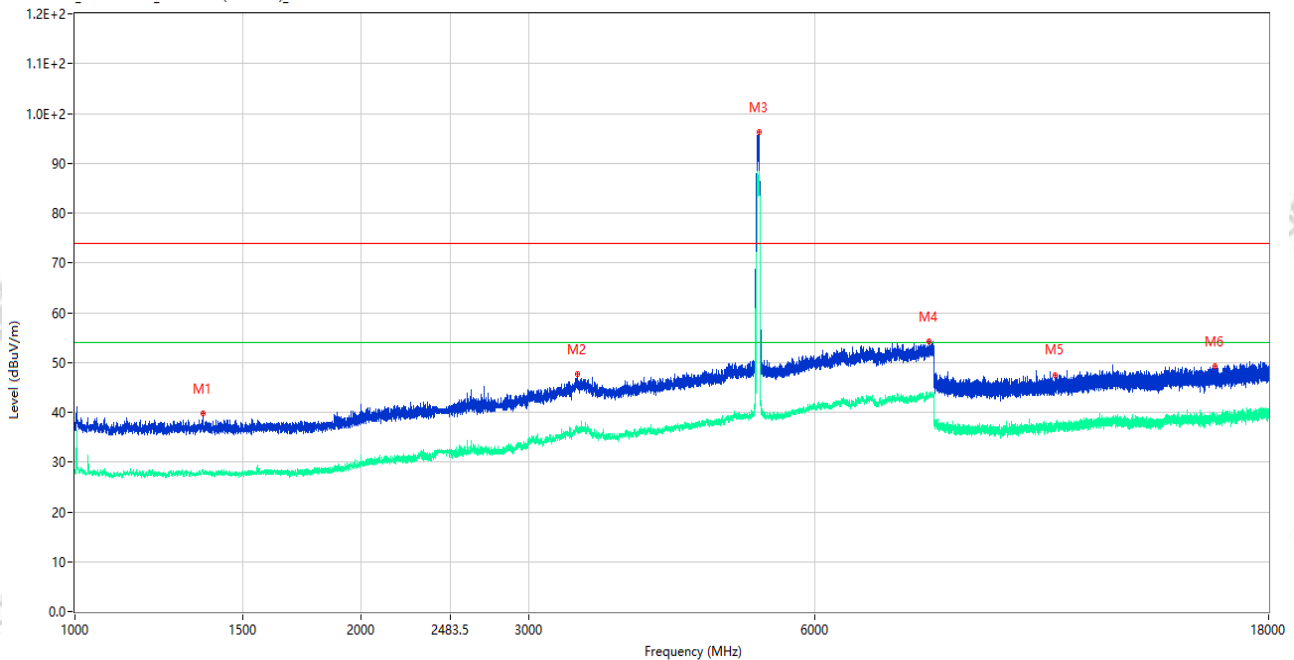

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1362.250	39.73	-15.82	74.0	34.27	Peak	273.00	150	Vertical	Pass
1**	1362.250	28.43	-15.82	54.0	25.57	AV	273.00	150	Vertical	Pass
2	3373.500	47.65	-4.79	74.0	26.35	Peak	349.00	150	Vertical	Pass
2**	3373.500	36.94	-4.79	54.0	17.06	AV	349.00	150	Vertical	Pass
3	5240.000	96.17	-2.20	74.0	-22.17	Peak	22.00	150	Vertical	N/A
3**	5240.000	88.13	-2.20	54.0	-34.13	AV	22.00	150	Vertical	N/A
4	7908.000	54.30	1.56	74.0	19.70	Peak	141.00	150	Vertical	Pass
4**	7908.000	43.22	1.56	54.0	10.78	AV	141.00	150	Vertical	Pass
5	10745.737	47.55	-3.45	74.0	26.45	Peak	0.00	150	Vertical	Pass
5**	10745.737	36.25	-3.45	54.0	17.75	AV	0.00	150	Vertical	Pass
6	15811.276	49.26	-1.71	74.0	24.74	Peak	279.00	150	Vertical	Pass
6**	15811.276	38.80	-1.71	54.0	15.20	AV	279.00	150	Vertical	Pass


Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_19.48.12

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11n40 CH46 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

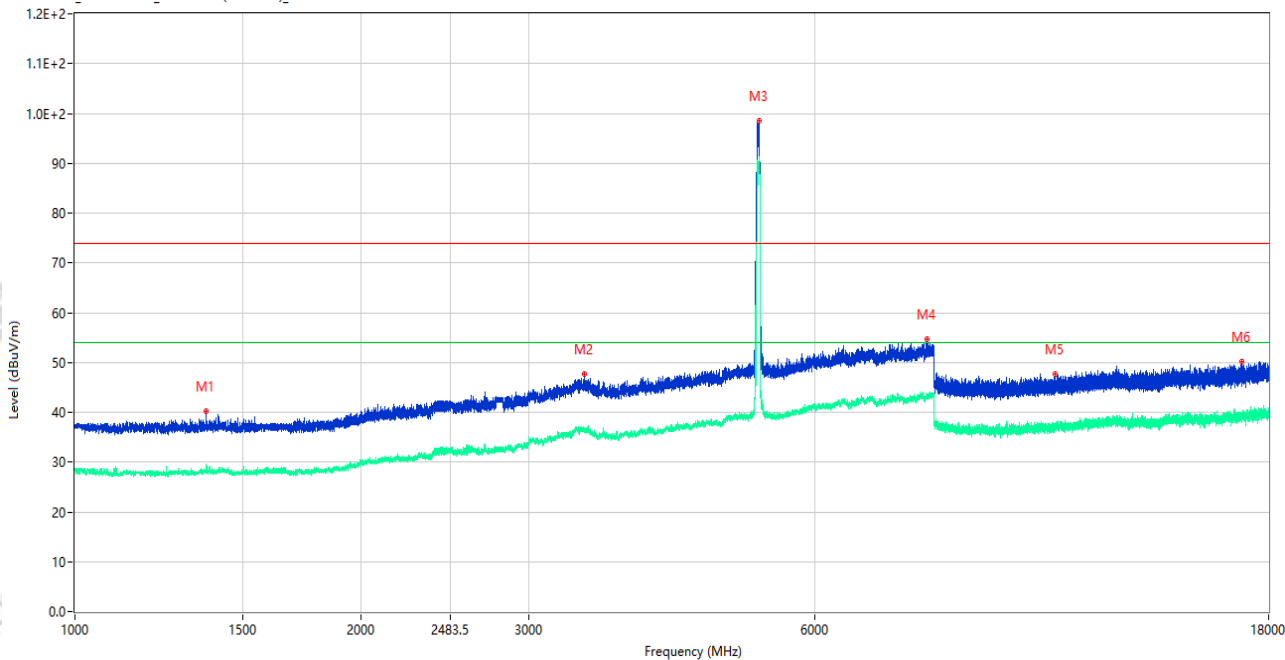


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.000	40.30	-16.01	74.0	33.70	Peak	35.00	150	Horizontal	Pass
1**	1375.000	29.71	-16.01	54.0	24.29	AV	35.00	150	Horizontal	Pass
2	3437.500	47.58	-5.29	74.0	26.42	Peak	360.00	150	Horizontal	Pass
2**	3437.500	36.18	-5.29	54.0	17.82	AV	360.00	150	Horizontal	Pass
3	5239.000	98.47	-2.22	74.0	-24.47	Peak	44.00	150	Horizontal	N/A
3**	5239.000	90.62	-2.22	54.0	-36.62	AV	44.00	150	Horizontal	N/A
4	7875.000	54.75	1.69	74.0	19.25	Peak	35.00	150	Horizontal	Pass
4**	7875.000	43.36	1.69	54.0	10.64	AV	35.00	150	Horizontal	Pass
5	10723.174	47.66	-3.81	74.0	26.34	Peak	123.00	150	Horizontal	Pass
5**	10723.174	37.08	-3.81	54.0	16.92	AV	123.00	150	Horizontal	Pass
6	16849.989	50.25	-1.15	74.0	23.75	Peak	360.00	150	Horizontal	Pass
6**	16849.989	39.26	-1.15	54.0	14.74	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-09-01_19.55.59

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax20 CH44 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

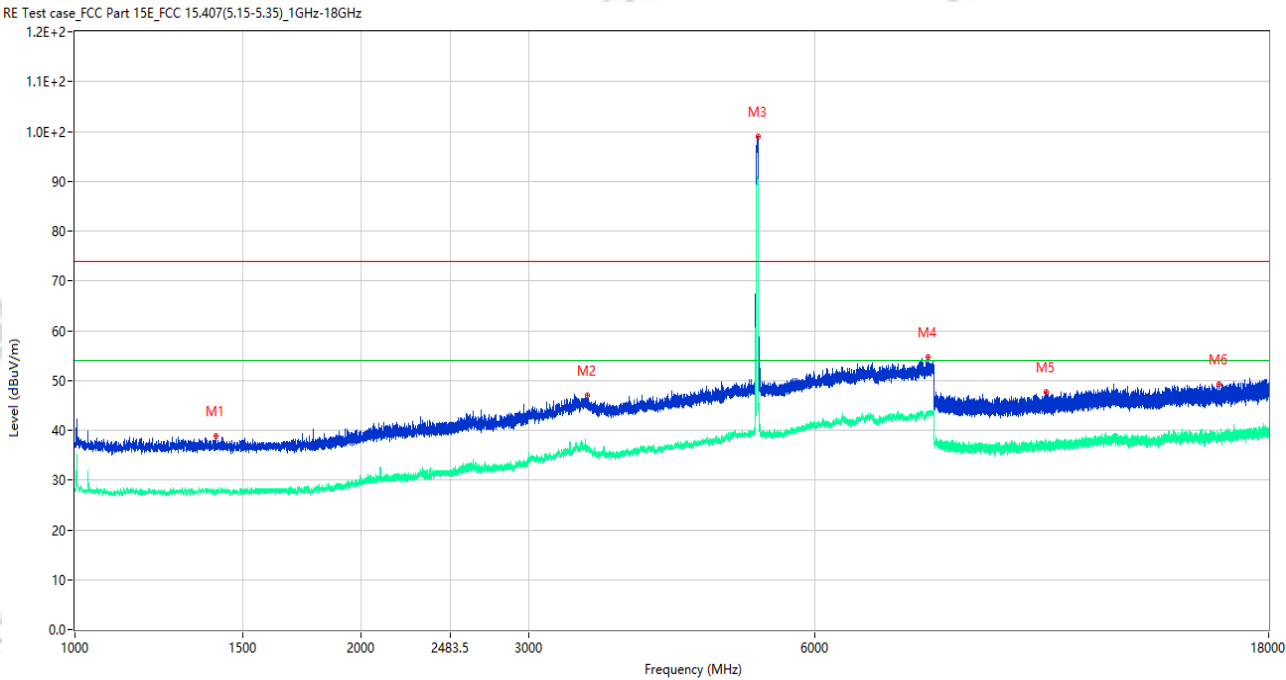

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1407.000	38.94	-15.97	74.0	35.06	Peak	262.00	150	Vertical	Pass
1**	1407.000	27.88	-15.97	54.0	26.12	AV	262.00	150	Vertical	Pass
2	3458.000	46.99	-4.93	74.0	27.01	Peak	211.00	150	Vertical	Pass
2**	3458.000	36.53	-4.93	54.0	17.47	AV	211.00	150	Vertical	Pass
3	5226.000	98.97	-2.32	74.0	-24.97	Peak	23.00	150	Vertical	N/A
3**	5226.000	89.92	-2.32	54.0	-35.92	AV	23.00	150	Vertical	N/A
4	7891.500	54.59	1.45	74.0	19.41	Peak	64.00	150	Vertical	Pass
4**	7891.500	42.90	1.45	54.0	11.10	AV	64.00	150	Vertical	Pass
5	10502.300	47.71	-3.27	74.0	26.29	Peak	75.00	150	Vertical	Pass
5**	10502.300	36.67	-3.27	54.0	17.33	AV	75.00	150	Vertical	Pass
6	15979.800	49.35	-2.62	74.0	24.65	Peak	360.00	150	Vertical	Pass
6**	15979.800	39.04	-2.62	54.0	14.96	AV	360.00	150	Vertical	Pass


Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_20.00.21

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.2G WIFI 11ax20 CH44 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

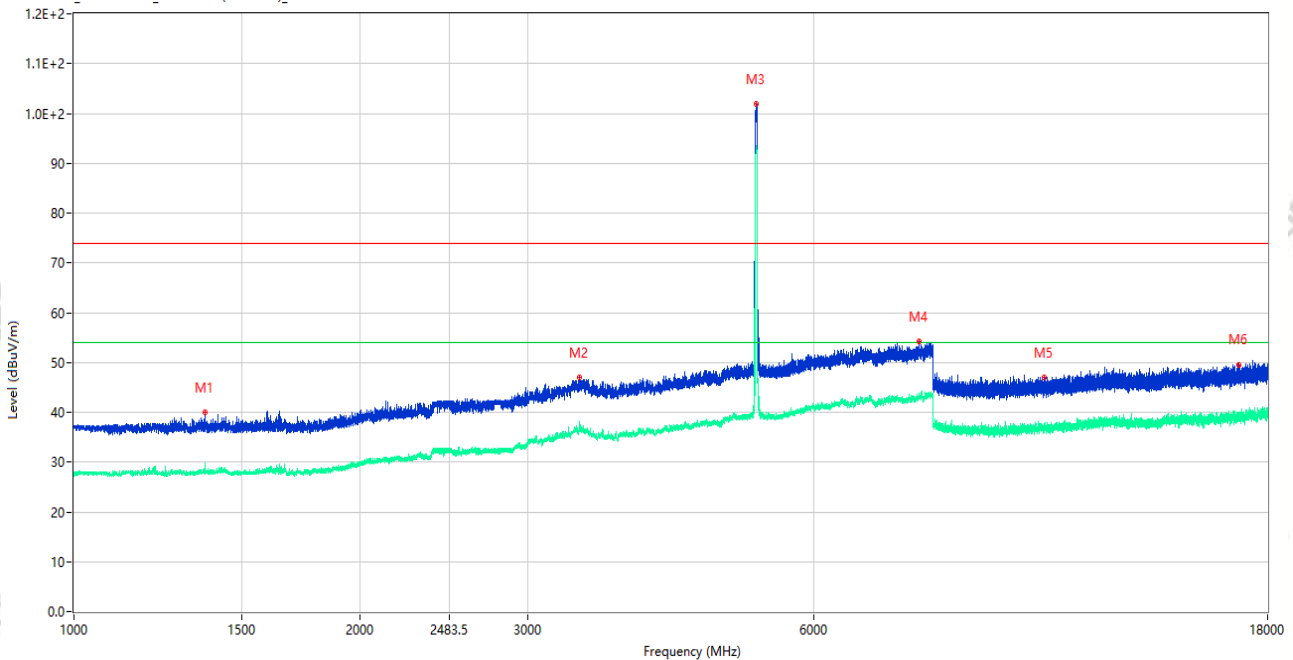

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.250	40.01	-15.98	74.0	33.99	Peak	26.00	150	Horizontal	Pass
1**	1373.250	27.89	-15.98	54.0	26.11	AV	26.00	150	Horizontal	Pass
2	3401.000	46.94	-5.63	74.0	27.06	Peak	63.00	150	Horizontal	Pass
2**	3401.000	36.68	-5.63	54.0	17.32	AV	63.00	150	Horizontal	Pass
3	5213.500	101.84	-2.34	74.0	-27.84	Peak	41.00	150	Horizontal	N/A
3**	5213.500	93.11	-2.34	54.0	-39.11	AV	41.00	150	Horizontal	N/A
4	7736.500	54.32	1.24	74.0	19.68	Peak	360.00	150	Horizontal	Pass
4**	7736.500	43.13	1.24	54.0	10.87	AV	360.00	150	Horizontal	Pass
5	10471.900	46.91	-3.57	74.0	27.09	Peak	74.00	150	Horizontal	Pass
5**	10471.900	35.82	-3.57	54.0	18.18	AV	74.00	150	Horizontal	Pass
6	16803.261	49.58	-1.20	74.0	24.42	Peak	360.00	150	Horizontal	Pass
6**	16803.261	39.97	-1.20	54.0	14.03	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_20.12.28

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH46 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

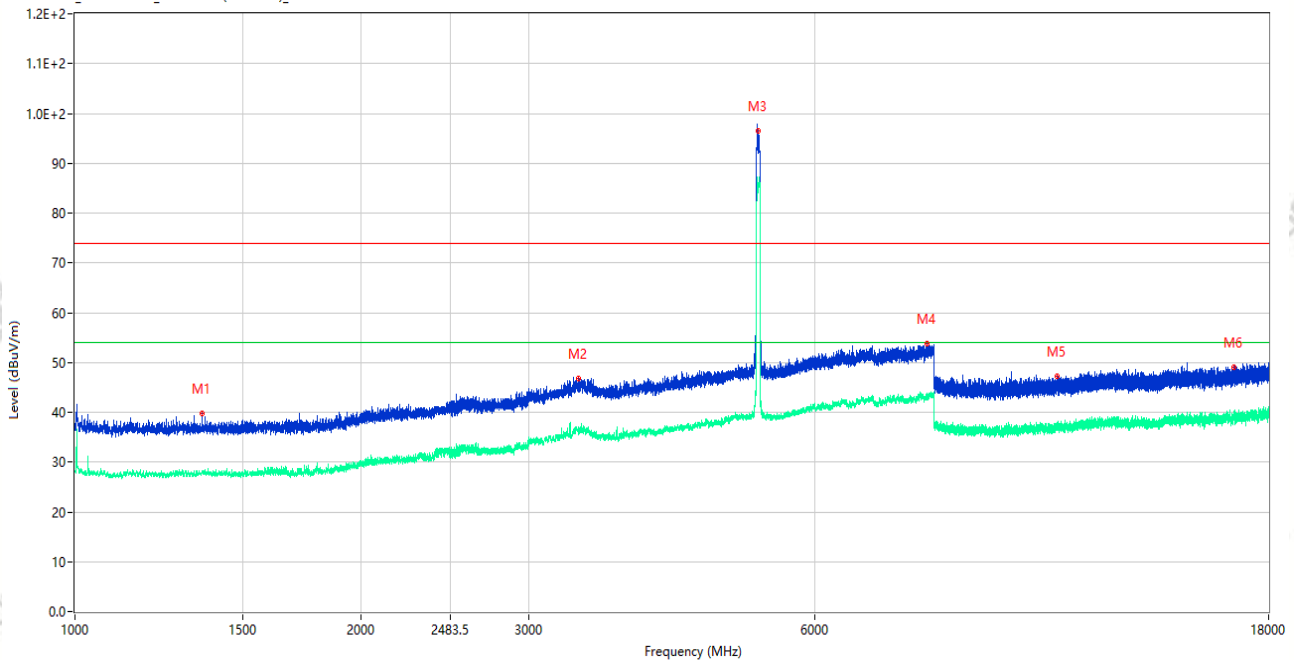

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1359.250	39.76	-15.86	74.0	34.24	Peak	118.00	150	Vertical	Pass
1**	1359.250	27.85	-15.86	54.0	26.15	AV	118.00	150	Vertical	Pass
2	3381.000	46.87	-5.16	74.0	27.13	Peak	360.00	150	Vertical	Pass
2**	3381.000	36.99	-5.16	54.0	17.01	AV	360.00	150	Vertical	Pass
3	5227.500	96.44	-2.32	74.0	-22.44	Peak	360.00	150	Vertical	N/A
3**	5227.500	85.00	-2.32	54.0	-31.00	AV	360.00	150	Vertical	N/A
4	7878.000	53.79	1.49	74.0	20.21	Peak	360.00	150	Vertical	Pass
4**	7878.000	42.94	1.49	54.0	11.06	AV	360.00	150	Vertical	Pass
5	10772.813	47.19	-3.11	74.0	26.81	Peak	0.00	150	Vertical	Pass
5**	10772.813	36.75	-3.11	54.0	17.25	AV	0.00	150	Vertical	Pass
6	16560.187	48.95	-0.99	74.0	25.05	Peak	345.00	150	Vertical	Pass
6**	16560.187	38.63	-0.99	54.0	15.37	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_20.16.20

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.2G WIFI 11ax40 CH46 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.15-5.35)_1GHz-18GHz

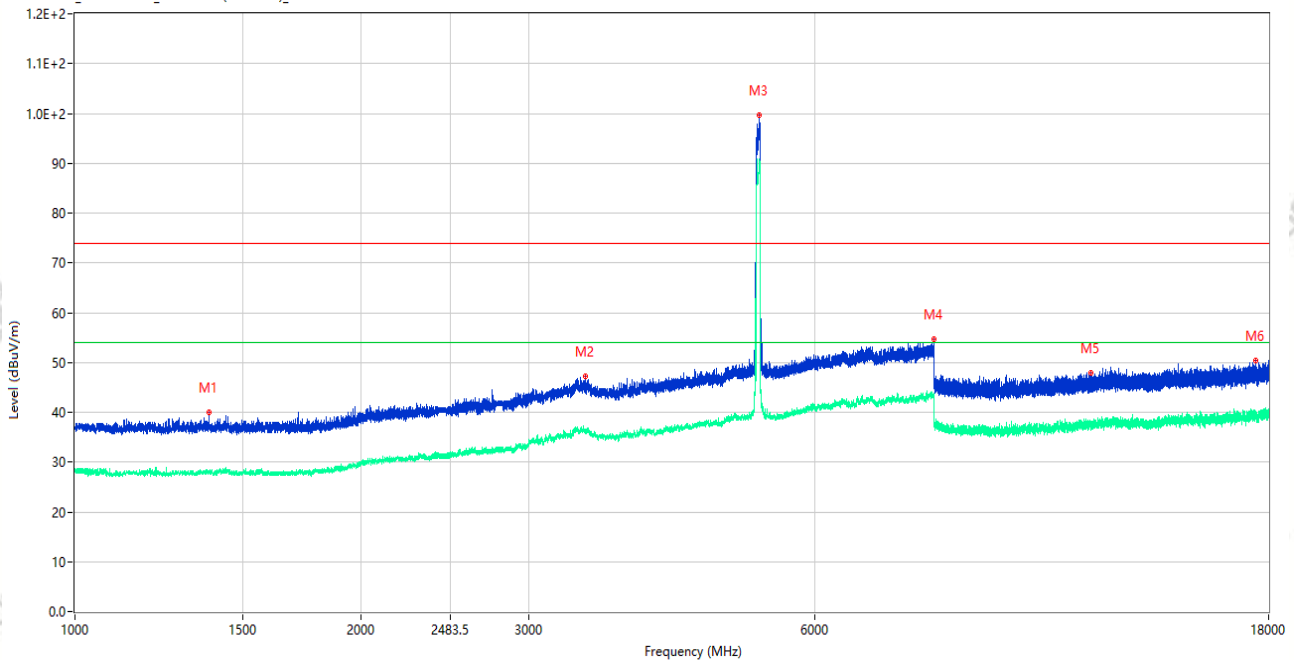


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1383.750	39.98	-15.97	74.0	34.02	Peak	45.00	150	Horizontal	Pass
1**	1383.750	27.95	-15.97	54.0	26.05	AV	45.00	150	Horizontal	Pass
2	3444.500	47.27	-5.26	74.0	26.73	Peak	223.00	150	Horizontal	Pass
2**	3444.500	36.15	-5.26	54.0	17.85	AV	223.00	150	Horizontal	Pass
3	5248.500	99.58	-2.10	74.0	-25.58	Peak	47.00	150	Horizontal	N/A
3**	5248.500	90.63	-2.10	54.0	-36.63	AV	47.00	150	Horizontal	N/A
4	7999.500	54.69	1.92	74.0	19.31	Peak	349.00	150	Horizontal	Pass
4**	7999.500	43.28	1.92	54.0	10.72	AV	349.00	150	Horizontal	Pass
5	11697.401	47.90	-2.84	74.0	26.10	Peak	6.00	150	Horizontal	Pass
5**	11697.401	36.98	-2.84	54.0	17.02	AV	6.00	150	Horizontal	Pass
6	17453.738	50.30	0.19	74.0	23.70	Peak	360.00	150	Horizontal	Pass
6**	17453.738	38.91	0.19	54.0	15.09	AV	360.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-08-26_16.02.58

EUT Name:	Dash Cam	Temp.(°C):	23.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	57
Sample Number:	EE26080325-001-S20	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	Normal Linking(5.2G WIFI)
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhou Xu	Remark:	数据线:A22

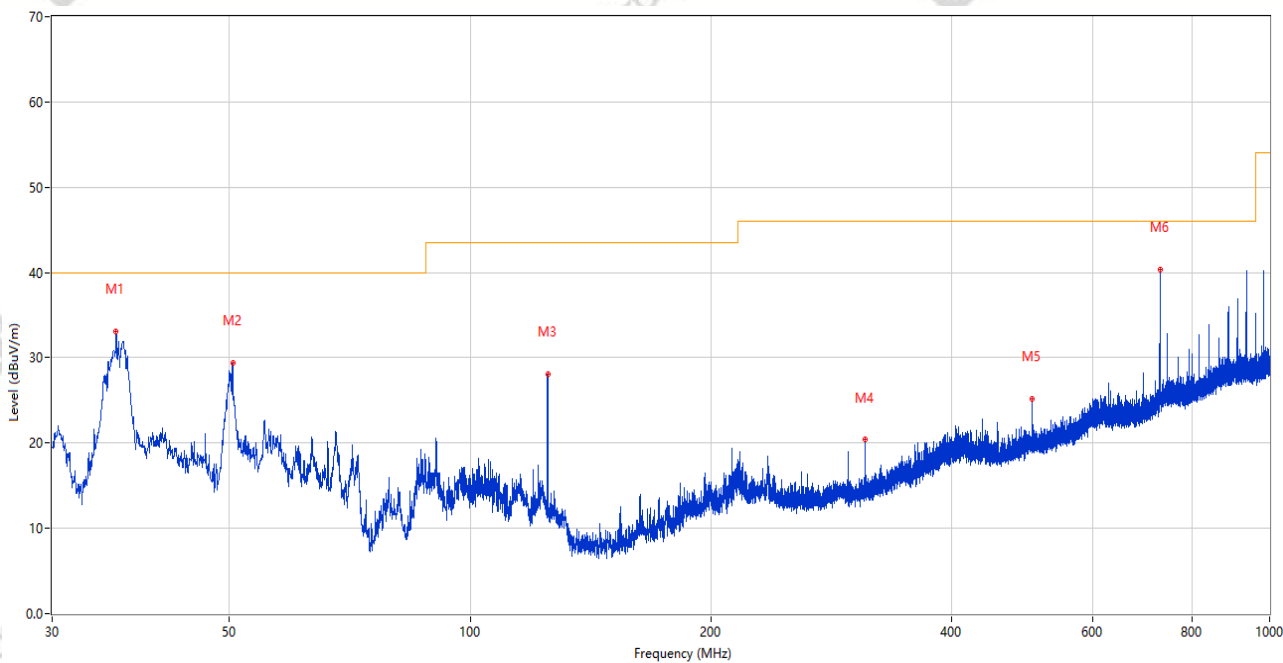

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.062	33.12	-27.39	40.0	6.88	Peak	140.00	100	Vertical	Pass
2	50.467	29.37	-24.54	40.0	10.63	Peak	208.00	100	Vertical	Pass
3	125.011	28.12	-28.74	43.5	15.38	Peak	293.00	200	Vertical	Pass
4	312.027	20.37	-23.11	46.0	25.63	Peak	157.00	100	Vertical	Pass
5	504.039	25.16	-17.89	46.0	20.84	Peak	226.00	100	Vertical	Pass
6	729.031	40.38	-12.77	46.0	5.62	Peak	212.00	100	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-08-26_16.06.13

EUT Name: Dash Cam

Temp.(°C): 23.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 57

Sample Number: EE26080325-001-S20

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E


Work Mode: Normal Linking(5.2G WIFI)

Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhou Xu

Remark: 数据线:A22

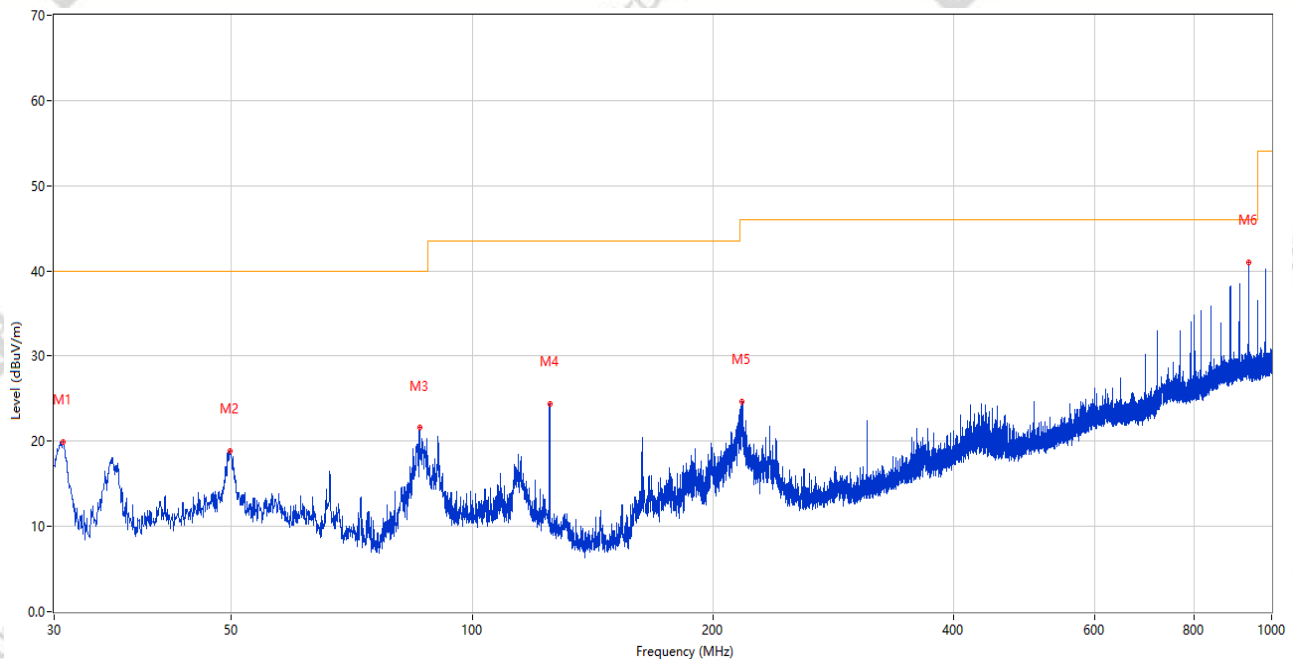

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	30.776	19.94	-29.05	40.0	20.06	Peak	305.00	200	Horizontal	Pass
2	49.739	18.81	-24.52	40.0	21.19	Peak	159.00	200	Horizontal	Pass
3	85.969	21.56	-29.41	40.0	18.44	Peak	190.00	200	Horizontal	Pass
4	125.011	24.39	-28.74	43.5	19.11	Peak	302.00	100	Horizontal	Pass
5	217.452	24.64	-26.04	46.0	21.36	Peak	60.00	100	Horizontal	Pass
6	936.028	40.60	-8.93	46.0	5.40	Peak	32.00	100	Horizontal	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_20.42.10

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

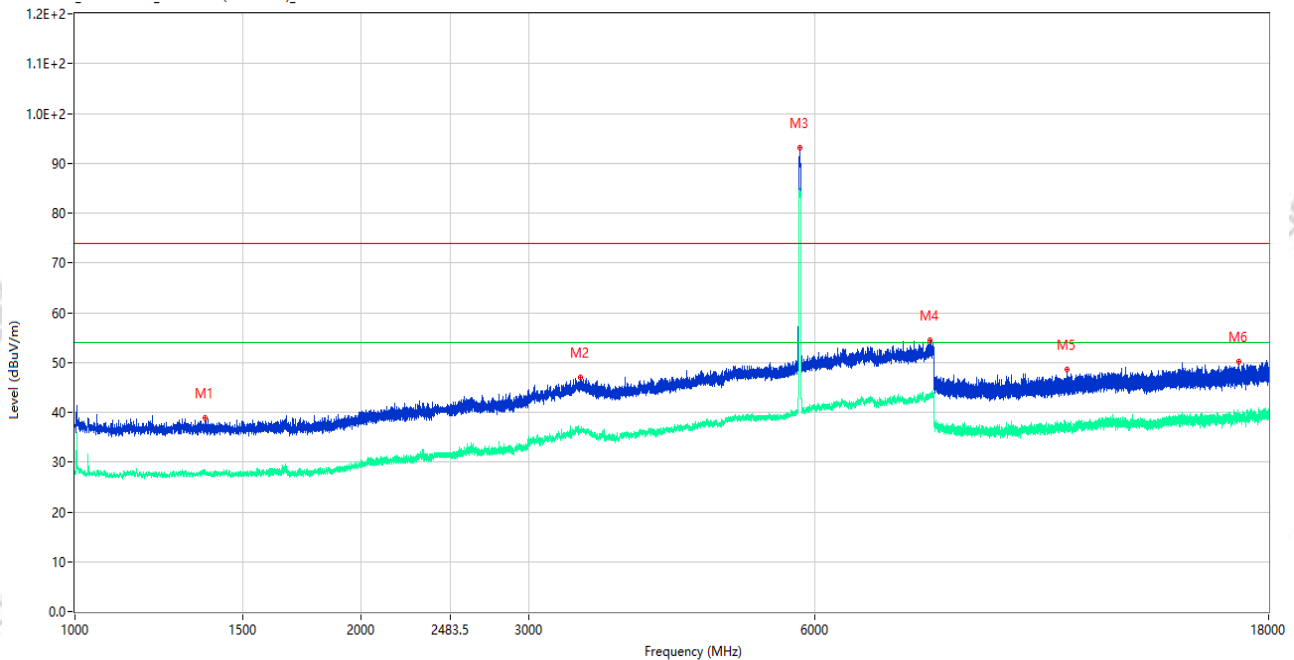

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1371.750	38.92	-15.96	74.0	35.08	Peak	149.00	150	Vertical	Pass
1**	1371.750	27.91	-15.96	54.0	26.09	AV	149.00	150	Vertical	Pass
2	3402.000	47.05	-5.58	74.0	26.95	Peak	111.00	150	Vertical	Pass
2**	3402.000	36.70	-5.58	54.0	17.30	AV	111.00	150	Vertical	Pass
3	5781.000	93.04	-1.51	74.0	-19.04	Peak	63.00	150	Vertical	N/A
3**	5781.000	84.72	-1.51	54.0	-30.72	AV	63.00	150	Vertical	N/A
4	7920.000	54.40	1.96	74.0	19.60	Peak	1.00	150	Vertical	Pass
4**	7920.000	43.22	1.96	54.0	10.78	AV	1.00	150	Vertical	Pass
5	11035.487	48.60	-3.29	74.0	25.40	Peak	351.00	150	Vertical	Pass
5**	11035.487	36.96	-3.29	54.0	17.04	AV	351.00	150	Vertical	Pass
6	16736.325	50.08	-1.54	74.0	23.92	Peak	246.00	150	Vertical	Pass
6**	16736.325	39.61	-1.54	54.0	14.39	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_20.46.06

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11a CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

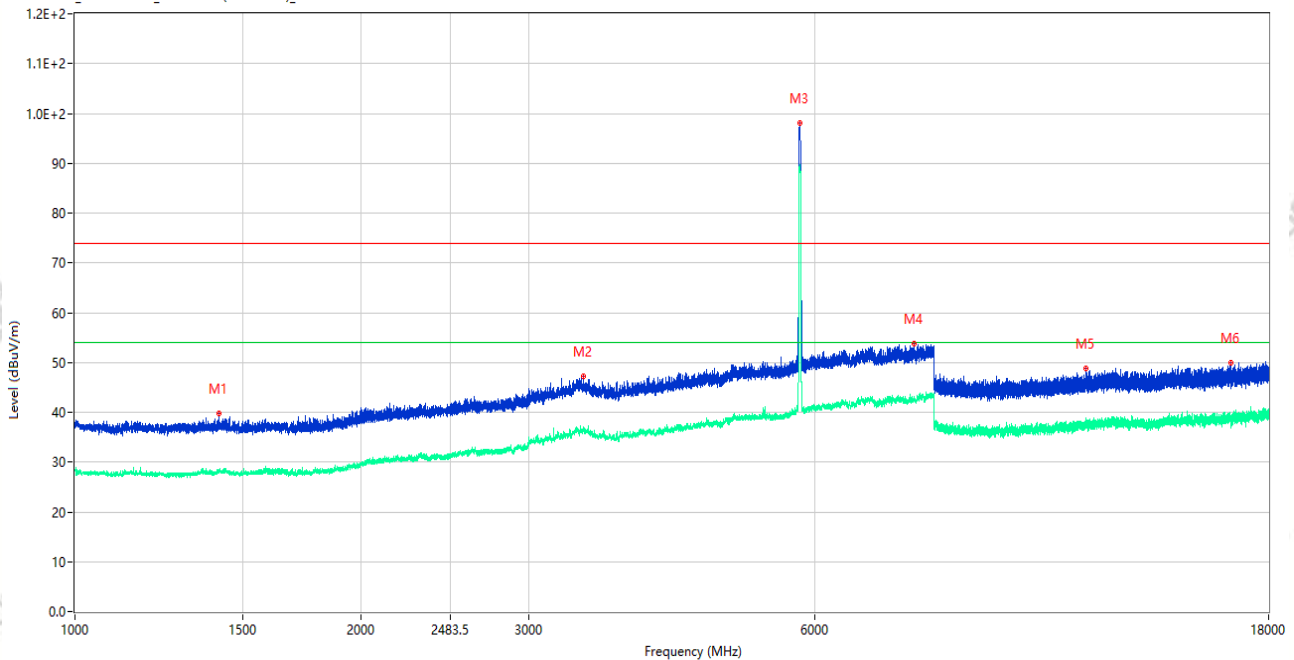

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1415.500	39.84	-15.95	74.0	34.16	Peak	167.00	150	Horizontal	Pass
1**	1415.500	27.87	-15.95	54.0	26.13	AV	167.00	150	Horizontal	Pass
2	3427.000	47.17	-4.94	74.0	26.83	Peak	235.00	150	Horizontal	Pass
2**	3427.000	36.99	-4.94	54.0	17.01	AV	235.00	150	Horizontal	Pass
3	5790.000	98.06	-1.52	74.0	-24.06	Peak	35.00	150	Horizontal	N/A
3**	5790.000	89.01	-1.52	54.0	-35.01	AV	35.00	150	Horizontal	N/A
4	7628.000	53.68	0.69	74.0	20.32	Peak	357.00	150	Horizontal	Pass
4**	7628.000	42.66	0.69	54.0	11.34	AV	357.00	150	Horizontal	Pass
5	11574.138	48.85	-2.57	74.0	25.15	Peak	5.00	150	Horizontal	Pass
5**	11574.138	37.80	-2.57	54.0	16.20	AV	5.00	150	Horizontal	Pass
6	16444.687	49.89	-1.88	74.0	24.11	Peak	278.00	150	Horizontal	Pass
6**	16444.687	38.22	-1.88	54.0	15.78	AV	278.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.00.34

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac20 CH157 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

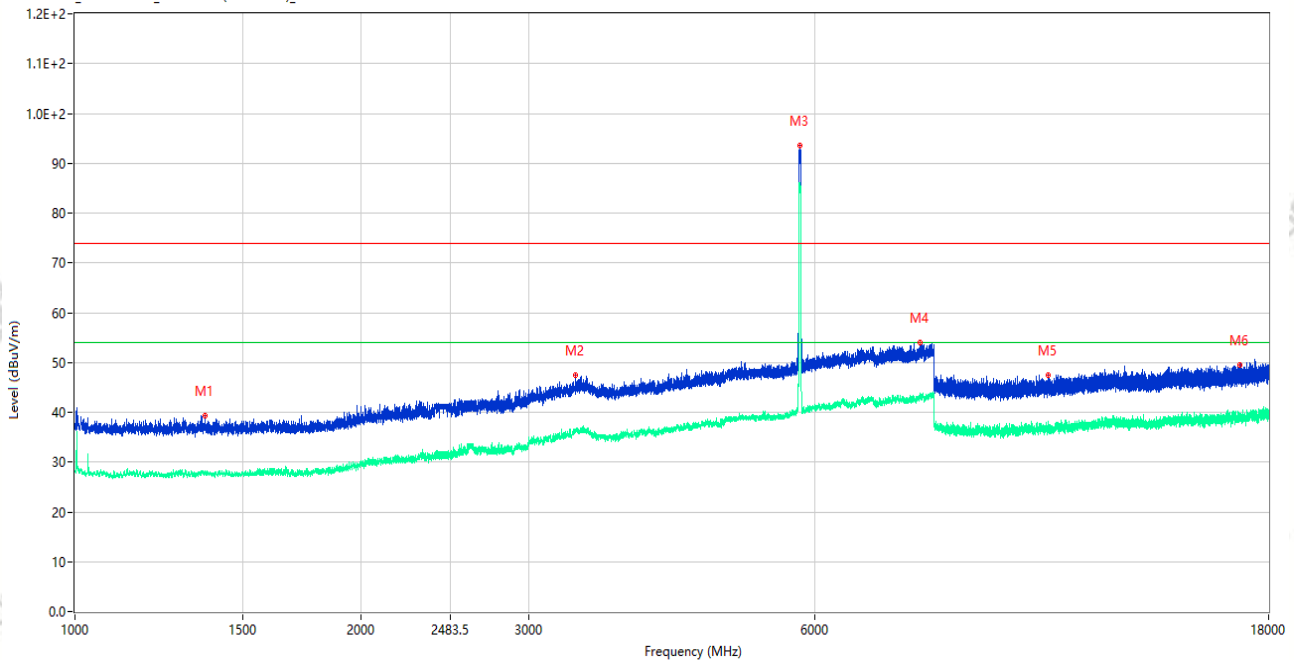


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1369.500	39.25	-15.93	74.0	34.75	Peak	41.00	150	Vertical	Pass
1**	1369.500	27.95	-15.93	54.0	26.05	AV	41.00	150	Vertical	Pass
2	3363.000	47.46	-5.43	74.0	26.54	Peak	282.00	150	Vertical	Pass
2**	3363.000	36.47	-5.43	54.0	17.53	AV	282.00	150	Vertical	Pass
3	5779.500	93.60	-1.51	74.0	-19.60	Peak	65.00	150	Vertical	N/A
3**	5779.500	85.63	-1.51	54.0	-31.63	AV	65.00	150	Vertical	N/A
4	7737.500	54.08	1.29	74.0	19.92	Peak	6.00	150	Vertical	Pass
4**	7737.500	43.71	1.29	54.0	10.29	AV	6.00	150	Vertical	Pass
5	10551.463	47.38	-3.19	74.0	26.62	Peak	28.00	150	Vertical	Pass
5**	10551.463	36.76	-3.19	54.0	17.24	AV	28.00	150	Vertical	Pass
6	16804.312	49.46	-1.19	74.0	24.54	Peak	313.00	150	Vertical	Pass
6**	16804.312	39.29	-1.19	54.0	14.71	AV	313.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-09-01_20.56.35

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac20 CH157 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

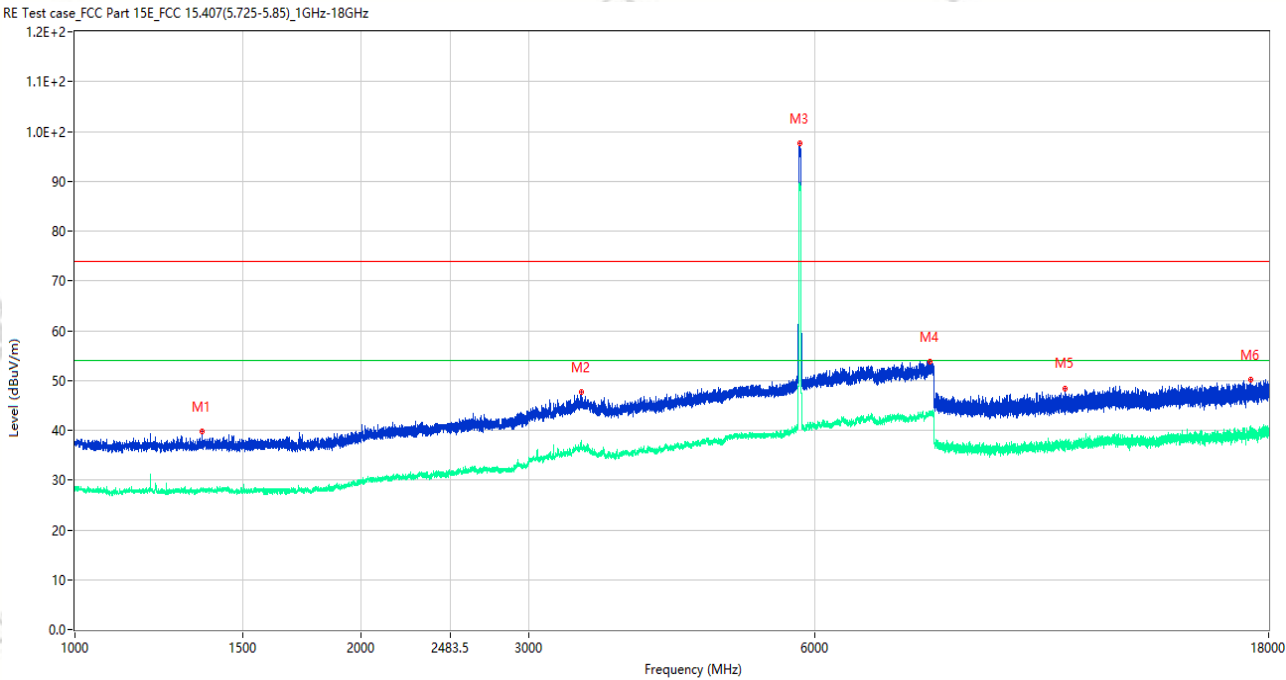

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1361.750	39.71	-15.83	74.0	34.29	Peak	0.00	150	Horizontal	Pass
1**	1361.750	28.03	-15.83	54.0	25.97	AV	0.00	150	Horizontal	Pass
2	3411.500	47.64	-5.30	74.0	26.36	Peak	53.00	150	Horizontal	Pass
2**	3411.500	36.07	-5.30	54.0	17.93	AV	53.00	150	Horizontal	Pass
3	5781.000	97.61	-1.51	74.0	-23.61	Peak	34.00	150	Horizontal	N/A
3**	5781.000	89.63	-1.51	54.0	-35.63	AV	34.00	150	Horizontal	N/A
4	7924.500	53.80	1.96	74.0	20.20	Peak	360.00	150	Horizontal	Pass
4**	7924.500	43.49	1.96	54.0	10.51	AV	360.00	150	Horizontal	Pass
5	10998.438	48.47	-2.76	74.0	25.53	Peak	167.00	150	Horizontal	Pass
5**	10998.438	37.39	-2.76	54.0	16.61	AV	167.00	150	Horizontal	Pass
6	17233.500	50.20	-0.47	74.0	23.80	Peak	41.00	150	Horizontal	Pass
6**	17233.500	39.61	-0.47	54.0	14.39	AV	41.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.13.55

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ac40 CH151 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

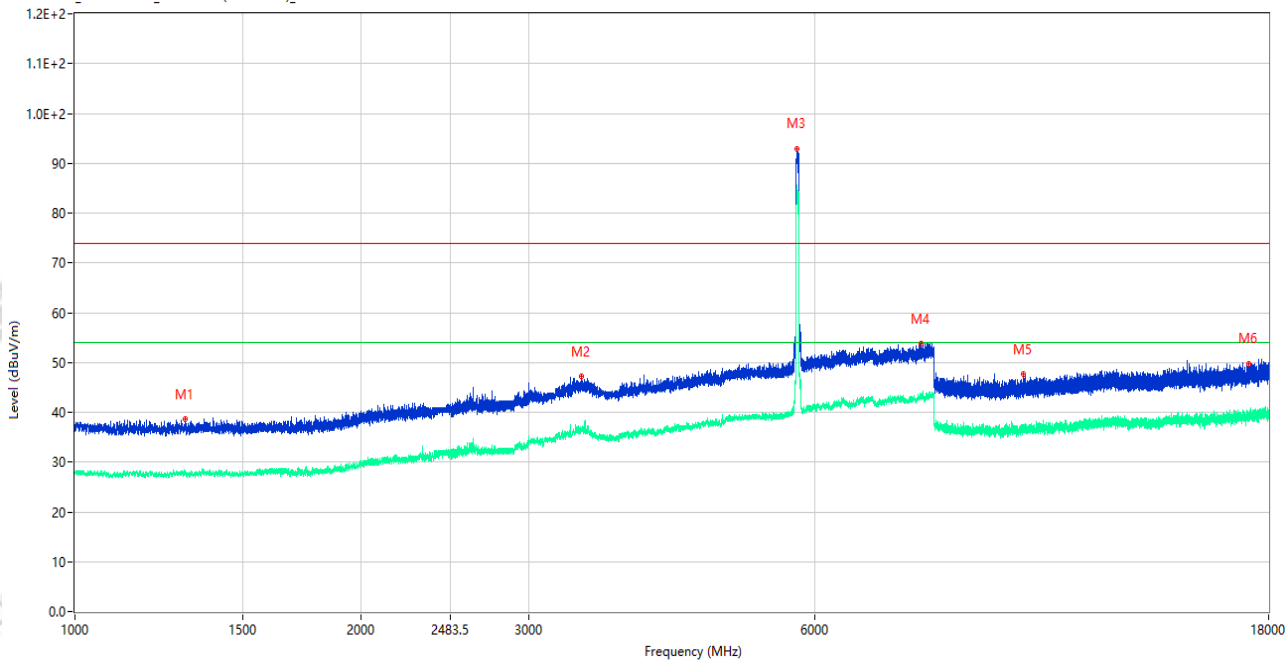

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1305.500	38.68	-15.60	74.0	35.32	Peak	8.00	150	Vertical	Pass
1**	1305.500	27.84	-15.60	54.0	26.16	AV	8.00	150	Vertical	Pass
2	3410.000	47.14	-5.33	74.0	26.86	Peak	101.00	150	Vertical	Pass
2**	3410.000	36.37	-5.33	54.0	17.63	AV	101.00	150	Vertical	Pass
3	5747.500	92.98	-2.14	74.0	-18.98	Peak	63.00	150	Vertical	N/A
3**	5747.500	85.00	-2.14	54.0	-31.00	AV	63.00	150	Vertical	N/A
4	7750.500	53.75	1.51	74.0	20.25	Peak	360.00	150	Vertical	Pass
4**	7750.500	43.04	1.51	54.0	10.96	AV	360.00	150	Vertical	Pass
5	9948.687	47.61	-4.00	74.0	26.39	Peak	99.00	150	Vertical	Pass
5**	9948.687	36.21	-4.00	54.0	17.79	AV	99.00	150	Vertical	Pass
6	17135.849	49.82	-0.19	74.0	24.18	Peak	345.00	150	Vertical	Pass
6**	17135.849	38.88	-0.19	54.0	15.12	AV	345.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.17.46

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ac40 CH151 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

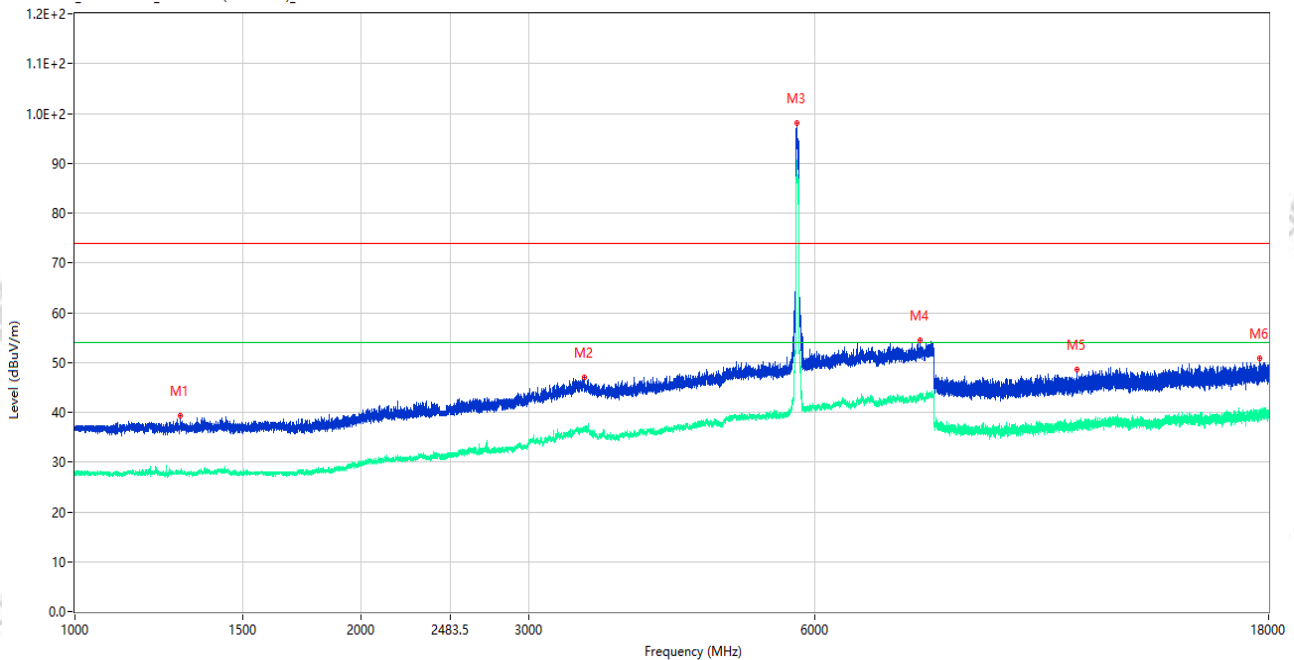

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1290.750	39.22	-15.82	74.0	34.78	Peak	310.00	150	Horizontal	Pass
1**	1290.750	27.74	-15.82	54.0	26.26	AV	310.00	150	Horizontal	Pass
2	3429.500	47.00	-5.02	74.0	27.00	Peak	254.00	150	Horizontal	Pass
2**	3429.500	36.45	-5.02	54.0	17.55	AV	254.00	150	Horizontal	Pass
3	5737.500	98.10	-2.28	74.0	-24.10	Peak	37.00	150	Horizontal	N/A
3**	5737.500	88.99	-2.28	54.0	-34.99	AV	37.00	150	Horizontal	N/A
4	7738.000	54.45	1.32	74.0	19.55	Peak	126.00	150	Horizontal	Pass
4**	7738.000	43.72	1.32	54.0	10.28	AV	126.00	150	Horizontal	Pass
5	11322.387	48.57	-4.01	74.0	25.43	Peak	360.00	150	Horizontal	Pass
5**	11322.387	37.37	-4.01	54.0	16.63	AV	360.00	150	Horizontal	Pass
6	17611.762	50.79	0.25	74.0	23.21	Peak	1.00	150	Horizontal	Pass
6**	17611.762	39.52	0.25	54.0	14.48	AV	1.00	150	Horizontal	Pass


Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.32.11

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ax20 CH157 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

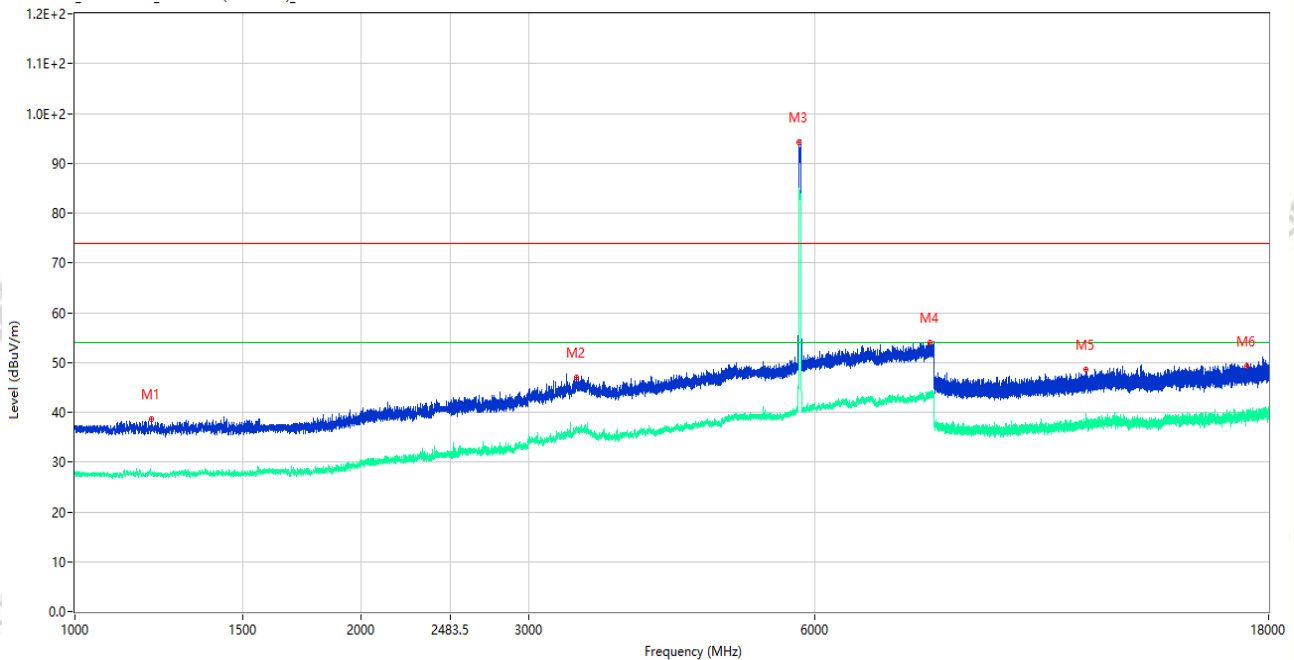


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1202.500	38.67	-15.74	74.0	35.33	Peak	41.00	150	Vertical	Pass
1**	1202.500	27.32	-15.74	54.0	26.68	AV	41.00	150	Vertical	Pass
2	3372.000	46.96	-4.82	74.0	27.04	Peak	114.00	150	Vertical	Pass
2**	3372.000	36.76	-4.82	54.0	17.24	AV	114.00	150	Vertical	Pass
3	5776.500	94.25	-1.54	74.0	-20.25	Peak	66.00	150	Vertical	N/A
3**	5776.500	84.61	-1.54	54.0	-30.61	AV	66.00	150	Vertical	N/A
4	7930.500	54.03	2.05	74.0	19.97	Peak	254.00	150	Vertical	Pass
4**	7930.500	43.35	2.05	54.0	10.65	AV	254.00	150	Vertical	Pass
5	11571.049	48.57	-2.39	74.0	25.43	Peak	6.00	150	Vertical	Pass
5**	11571.049	39.09	-2.39	54.0	14.91	AV	6.00	150	Vertical	Pass
6	17073.636	49.17	-0.69	74.0	24.83	Peak	360.00	150	Vertical	Pass
6**	17073.636	39.14	-0.69	54.0	14.86	AV	360.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.27.52

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ax20 CH157 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

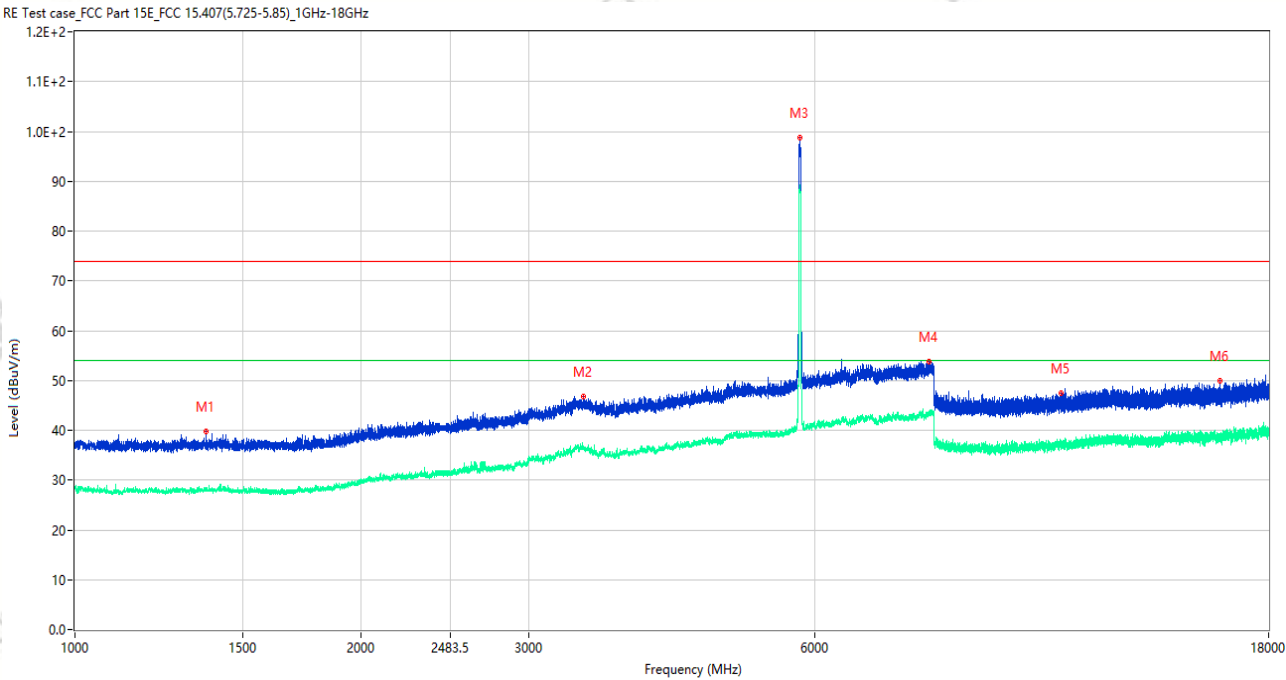

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1375.000	39.75	-16.01	74.0	34.25	Peak	0.00	150	Horizontal	Pass
1**	1375.000	28.02	-16.01	54.0	25.98	AV	0.00	150	Horizontal	Pass
2	3426.500	46.80	-4.93	74.0	27.20	Peak	360.00	150	Horizontal	Pass
2**	3426.500	36.55	-4.93	54.0	17.45	AV	360.00	150	Horizontal	Pass
3	5779.500	98.77	-1.51	74.0	-24.77	Peak	34.00	150	Horizontal	N/A
3**	5779.500	88.61	-1.51	54.0	-34.61	AV	34.00	150	Horizontal	N/A
4	7913.500	53.81	1.76	74.0	20.19	Peak	222.00	150	Horizontal	Pass
4**	7913.500	43.30	1.76	54.0	10.70	AV	222.00	150	Horizontal	Pass
5	10880.400	47.43	-3.24	74.0	26.57	Peak	52.00	150	Horizontal	Pass
5**	10880.400	37.27	-3.24	54.0	16.73	AV	52.00	150	Horizontal	Pass
6	15991.349	49.87	-2.70	74.0	24.13	Peak	277.00	150	Horizontal	Pass
6**	15991.349	37.72	-2.70	54.0	16.28	AV	277.00	150	Horizontal	Pass

Test Result

Project Number: P-EE26080534

Test Time: 2026-09-01_21.43.16

EUT Name: Dash Cam

Temp.(°C): 22.9

Model Number: A810LITESPEEDEYE-RC21

Humidity (%RH): 52

Sample Number: EE26080325-001-S05

Pressure(kPa): 101

Test Standard: 47 CFR Part 15E

Work Mode: 5.8G WIFI 11ax40 CH151 P=45


Test Site: 966#2

Test Voltage: DC 5V From PC

Test Engineer: Zhang Mingyue

Remark: 实验室数据线

RE Test case_FCC Part 15E_FCC 15.407(5.725-5.85)_1GHz-18GHz

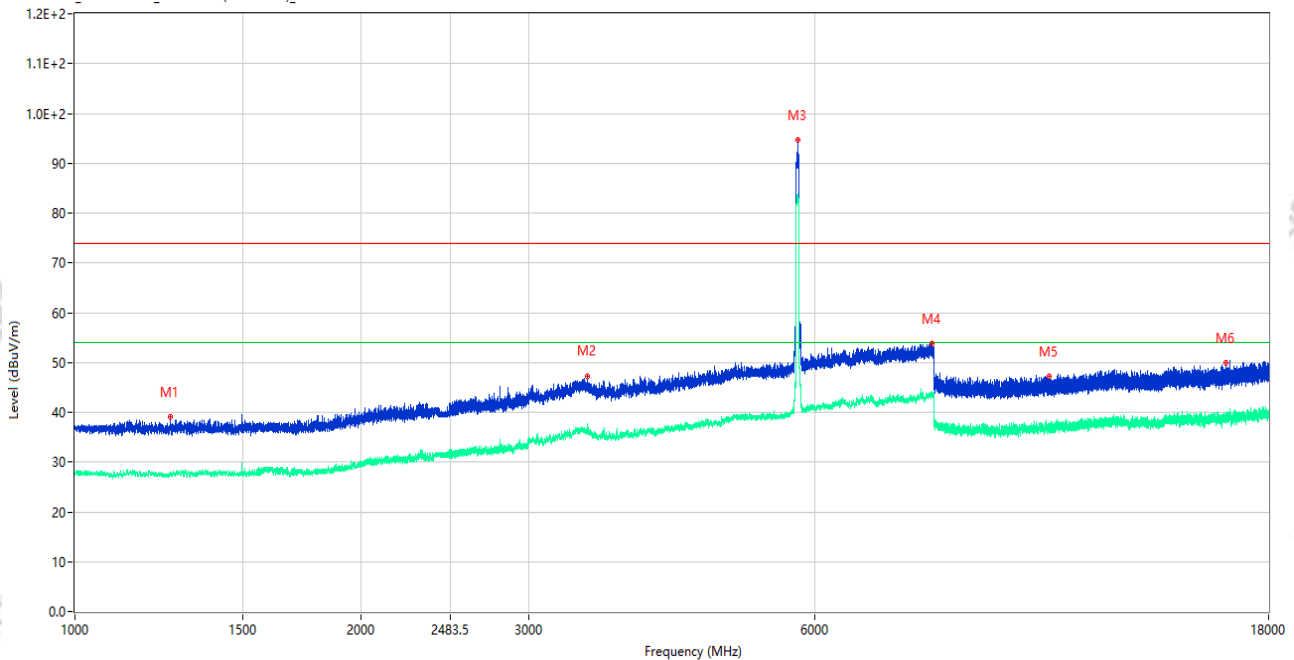


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1259.000	39.05	-16.04	74.0	34.95	Peak	174.00	150	Vertical	Pass
1**	1259.000	27.67	-16.04	54.0	26.33	AV	174.00	150	Vertical	Pass
2	3456.000	47.34	-4.89	74.0	26.66	Peak	355.00	150	Vertical	Pass
2**	3456.000	36.47	-4.89	54.0	17.53	AV	355.00	150	Vertical	Pass
3	5758.500	94.69	-1.97	74.0	-20.69	Peak	52.00	150	Vertical	N/A
3**	5758.500	83.93	-1.97	54.0	-29.93	AV	52.00	150	Vertical	N/A
4	7961.000	53.70	2.35	74.0	20.30	Peak	172.00	150	Vertical	Pass
4**	7961.000	43.79	2.35	54.0	10.21	AV	172.00	150	Vertical	Pass
5	10572.363	47.16	-3.23	74.0	26.84	Peak	51.00	150	Vertical	Pass
5**	10572.363	36.08	-3.23	54.0	17.92	AV	51.00	150	Vertical	Pass
6	16226.288	50.02	-1.36	74.0	23.98	Peak	246.00	150	Vertical	Pass
6**	16226.288	38.74	-1.36	54.0	15.26	AV	246.00	150	Vertical	Pass

Test Result

Project Number: P-EE26080534
Test Time: 2026-09-01_21.50.29

EUT Name:	Dash Cam	Temp.(°C):	22.9
Model Number:	A810LITESPEEDEYE-RC21	Humidity (%RH):	52
Sample Number:	EE26080325-001-S05	Pressure(kPa):	101
Test Standard:	47 CFR Part 15E	Work Mode:	5.8G WIFI 11ax40 CH151 P=45
Test Site:	966#2	Test Voltage:	DC 5V From PC
Test Engineer:	Zhang Mingyue	Remark:	实验室数据线

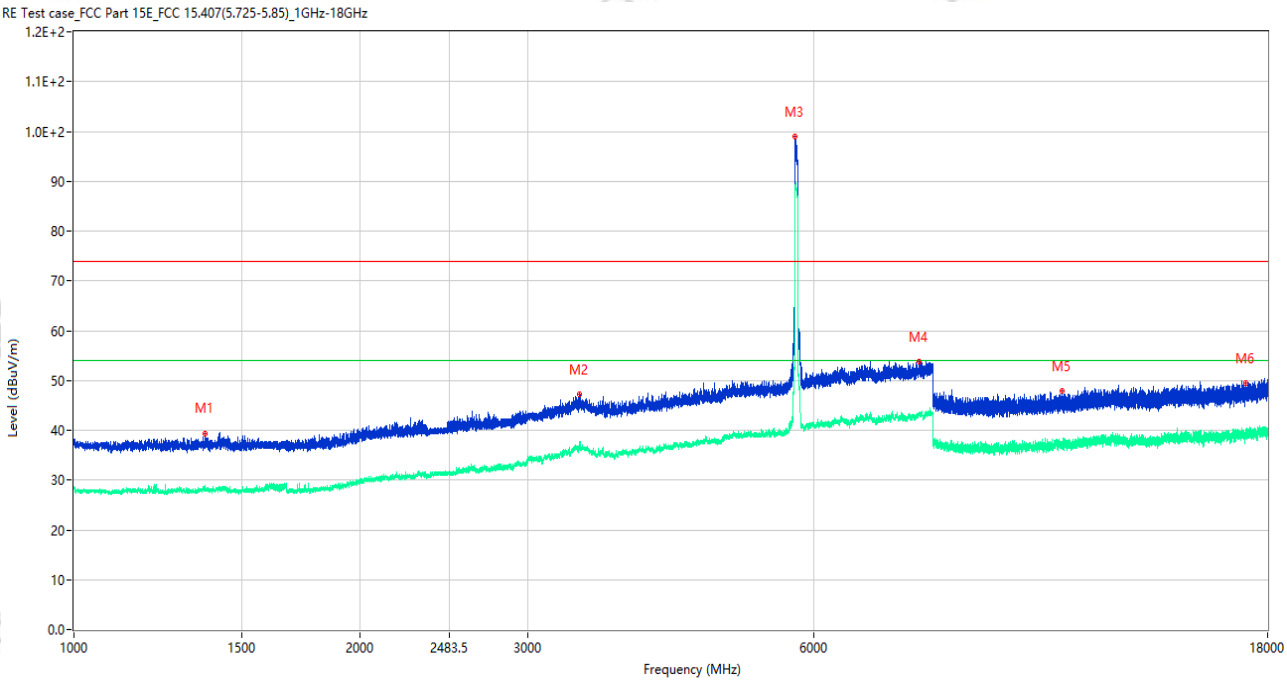

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1373.500	39.42	-15.98	74.0	34.58	Peak	23.00	150	Horizontal	Pass
1**	1373.500	28.94	-15.98	54.0	25.06	AV	23.00	150	Horizontal	Pass
2	3398.500	47.16	-5.72	74.0	26.84	Peak	23.00	150	Horizontal	Pass
2**	3398.500	36.19	-5.72	54.0	17.81	AV	23.00	150	Horizontal	Pass
3	5736.500	99.06	-2.32	74.0	-25.06	Peak	54.00	150	Horizontal	N/A
3**	5736.500	87.19	-2.32	54.0	-33.19	AV	54.00	150	Horizontal	N/A
4	7736.500	53.83	1.24	74.0	20.17	Peak	223.00	150	Horizontal	Pass
4**	7736.500	43.70	1.24	54.0	10.30	AV	223.00	150	Horizontal	Pass
5	10951.175	47.88	-3.19	74.0	26.12	Peak	97.00	150	Horizontal	Pass
5**	10951.175	36.46	-3.19	54.0	17.54	AV	97.00	150	Horizontal	Pass
6	17092.537	49.49	-0.65	74.0	24.51	Peak	313.00	150	Horizontal	Pass
6**	17092.537	39.63	-0.65	54.0	14.37	AV	313.00	150	Horizontal	Pass