

EUROFINS ELECTRICAL TESTING SERVICE (SHENZHEN) CO., LTD.

RADIO TEST - REPORT

FCC Compliance Test Report for

Product name: Anker Prime Wireless Charging Station (3-in-1, MagGo, AirCool, Foldable)

Model name: A25N1

FCC ID: 2AOKB-A25N1

Test Report Number: EFGX25090522-IE-01-E01-A1

1	General Information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Details of manufacturer	4
1.5	Application details	5
1.6	Test item	5
1.7	Test standards	5
2	Technical test	6
2.1	Summary of test results	6
2.2	Test environment	6
2.3	Measurement uncertainty	6
2.4	Test mode	7
2.5	Test equipment utilized	8
2.6	Auxiliary Equipment Used during Test:	8
2.7	Test setup	9
2.8	Test results	10
3	Technical Requirement	11
3.1	Conducted emission AC power port	11
3.2	Radiated emissions	14

1 General Information

1.1 Notes

The results of this test report relate exclusively to the item tested as specified in chapter "Description of test item" and are not transferable to any other test items.

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd. is not responsible for any generalisations and conclusions drawn from this report. Any modification of the test item can lead to invalidity of test results and this test report may therefore be not applicable to the modified test item.

The test report may only be reproduced or published in full. Reproducing or publishing extracts of the report requires the prior written approval of the Eurofins Electrical Testing Service (Shenzhen) Co., Ltd. This document is subject to the General Terms and Conditions and the Testing and Certification System of Eurofins Electrical Testing Service (Shenzhen) Co., Ltd., available on request or accessible at www.eurofins.com.

Operator:

2026-03-30

Bruce Zheng / Project Engineer



Date	Eurofins-Lab.	Name / Title	Signature
------	---------------	--------------	-----------

Technical responsibility for area of testing:

2026-03-30

Albert Xu / Lab Manager



Date	Eurofins	Name / Title	Signature
------	----------	--------------	-----------

1.2 Testing laboratory

Eurofins Electrical Testing Service (Shenzhen) Co., Ltd.

Room 20 of 2/F., 1/F., Building 2, Spring Block & Room 102, Building 8, Autumn Block, Meishenghuigu Innovation Park, No.83, Dabao Road, Bao'an District, Shenzhen, Guangdong, China

Telephone : +86-755-82911867

Fax : +86-755-82910749

The Laboratory has passed the Accreditation by the American Association for Laboratory Accreditation (A2LA). The Accreditation number is 5376.01

The Laboratory has been listed by industry Canada to perform electromagnetic emission measurements, The CAB identifier is CN0088

1.3 Details of applicant

Name	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Telephone	:	./.
Fax	:	./.

1.4 Details of manufacturer

Name	:	Anker Innovations Limited
Address	:	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong
Telephone	:	./.
Fax	:	./.

1.5 Application details

Date of receipt of application	:	2026-02-28
Date of receipt of test item	:	2026-02-28
Date of test	:	2026-02-28 to 2026-03-30
Date of issue	:	2026-03-30

1.6 Test item

Product type	: Anker Prime Wireless Charging Station (3-in-1, MagGo, AirCool, Foldable)
Model name	: A25N1
Sample ID	: 250927-19-001
Brand	: ANKER
Serial number	: N/A
Ratings	: Input: 9.0V, 3A; 12V, 3A; 15V, 3A Output: Phone:25W; Apple watch: 5W; TWS: 5W
Test voltage	: 120V
Additional information	: ./.

RadioTechnical data

Operating Frequency	:	Phone:115-148kHz & 360kHz TWS:115-148kHz Apple watch:326.5kHz &:1.778MHz
Modulation	:	ASK

This report is prepared for FCC class II permissive change.

This report is issued as a supplementary report to original report no. EFGX25090522-IE-01-E01(FCC ID: 2AOKB-A25N1, Model: A25N1). The modification is only concerned with following item:

1. Add the adapter (Model: A2692)

In this report, conducted emission and radiated emission tests of A25N1 had been re-tested and only its data was recorded in the following sections.

The above sample(s) and sample information was/were submitted and identified on behalf of the applicant. Eurofins assures objectivity and impartiality of the test, and fulfills the obligation of confidentiality for applicant's commercial information and technical documents.

1.7 Test standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

Test Method

1: ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

2: ANSI C63.10-2020, American National Standard for Testing Unlicensed Wireless Devices.

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



or

The deviations as specified were ascertained in the course of the tests performed.



2.2 Test environment

Ac line conducted

Enviroment Parameter	Temperature	Relative Humidity
101.2 kPa	24.2℃	57.3%

Radiated

Enviroment Parameter	Temperature	Relative Humidity
101.2 kPa	24.3℃	52.7%

2.3 Measurement uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

System Measurement Uncertainty	
Test Items	Extended Uncertainty
Uncertainty in conducted measurements	1.96dB
Uncertainty for Radiated Emission 9KHz-30MHz	4.56dB
Uncertainty for Radiated Emission 30MHz-3000MHz	Horizontal: 4.46dB; Vertical: 4.54dB;

2.4 Test mode

No.	Operating Mode
Mode 1	Wireless Output (Phone:5W)
Mode 2	Wireless Output (Phone:7.5W)
Mode 3	Wireless Output (Phone:25W)
Mode 4	Wireless Output (Apple watch:3W)
Mode 5	Wireless Output (Apple watch:5W)
Mode 6	Wireless Output (TWS:5W)
Mode 7	Wireless Output (Phone:5W + TWS:5W)
Mode 8	Wireless Output (Phone:7.5W + TWS:5W)
Mode 9	Wireless Output (Phone:25W + TWS:5W)
Mode 10	Wireless Output (Phone:5W + Apple watch:3W)
Mode 11	Wireless Output (Phone:7.5W + Apple watch:3W)
Mode 12	Wireless Output (Phone:25W + Apple watch:3W)
Mode 13	Wireless Output (Phone:5W + Apple watch:5W)
Mode 14	Wireless Output (Phone:7.5W + Apple watch:5W)
Mode 15	Wireless Output (Phone:25W + Apple watch:5W)
Mode 16	Wireless Output (Apple watch:3W + TWS:5W)
Mode 17	Wireless Output (Apple watch:5W + TWS:5W)
Mode 18	Wireless Output (Phone:5W + Apple watch:3W + TWS:5W)
Mode 19	Wireless Output (Phone:7.5W + Apple watch:3W + TWS:5W)
Mode 20	Wireless Output (Phone:25W + Apple watch:3W + TWS:5W)
Mode 21	Wireless Output (Phone:5W + Apple watch:5W + TWS:5W)
Mode 22	Wireless Output (Phone:7.5W + Apple watch:5W + TWS:5W)
Mode 23	Wireless Output (Phone:25W + Apple watch:5W + TWS:5W)
Mode 24	Standby

Note:

Phone 5W: 115-148kHz

Phone 7.5W: 115-148kHz

Phone 25W: 360kHz

TWS 5W: 115-148kHz

Apple watch 3W: 326.5kHz

Apple watch 5W: 1.778MHz

2.5 Test equipment utilized

EQUIPMENT ID	EQUIPMENT NAME	MODEL NO.	CAL. DUE DATE
23-2-10-63	Temperature & Humidity Meter	COS-03	2027-03-21
23-2-10-65	Barometer	Baro	2027-03-21
23-2-13-12	Signal Analyzer	N9010B-544	2027-03-21
23-2-10-43	Switch and Control Unit	ERIT-E-JS0806-2	2027-03-21
23-2-10-44	DC power supply	E3642A	2027-03-21
23-2-10-45	Temperature test chamber	SG-80-CC-2	2027-03-21
23-2-10-50	Temperature & Humidity Meter	COS-03	2027-03-21
23-2-10-66	Barometer	Baro	2027-03-21
23-2-13-01	EMI Test Receiver	ESR7	2027-03-21
23-2-13-02	Signal Analyzer	N9020B-544	2027-03-21
23-2-12-01	Active Loop Antenna	FMZB 1519B	2026-05-29
23-2-12-02	TRILOG Broadband Antenna	VULB9168	2026-05-29

2.6 Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.	S/N
Wireless charging load	YBZ	YBZ1.1	---
Wireless charging load	YBZ	YBZ3.0	---
Wireless charging load	YBZ	YBZ1.2	---
iWatch	Apple	iWatch S7	---

2.8 Test results

☒ 1st test

☐ test after modification

☐ production test

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Test Result	Verdict	Test Site
§15.207	Conducted emission AC power port	See Page 11	Pass	Site 1
§15.209	Radiated Emission	See page 17	Pass	Site 1

3 Technical Requirement

3.1 Conducted emission AC power port

Test Method:

The test method was referred to the subclause 6.2 of ANSI C63.10-2020.

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both Neutral and Live lines.

Limit:


FCC §15.207 (a)

Frequency	QP Limit	AV Limit
MHz	dB μ V	dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50


Decreasing linear.

Test Result:

All of the listed pre-test mode were tested, only the data of the worst mode(Mode23) is recorded in the report

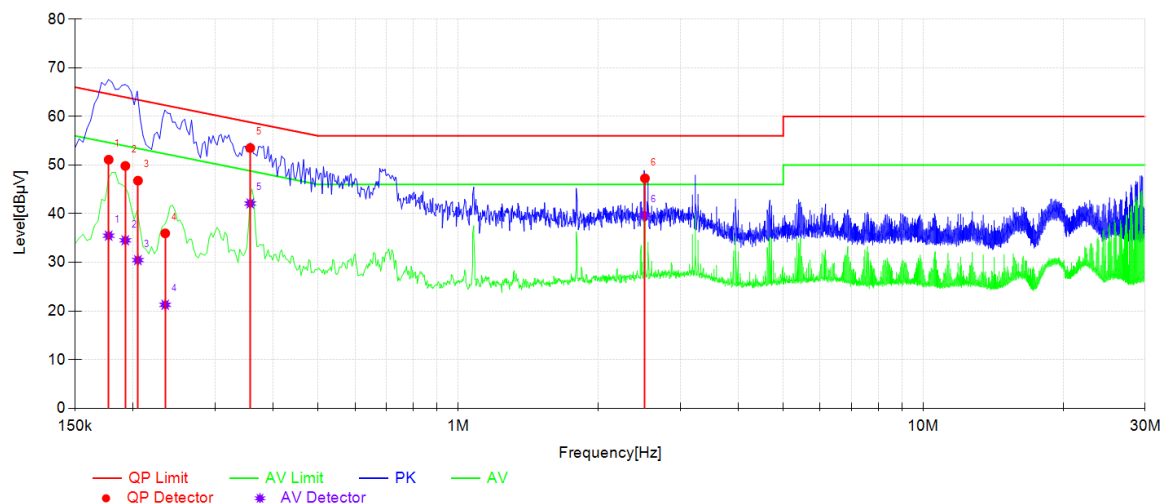

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.1771	10.30	51.11	64.62	13.51	35.48	54.62	19.14	L1	PASS
2	0.1923	10.33	49.83	63.94	14.11	34.53	53.94	19.41	L1	PASS
3	0.2047	10.35	46.80	63.42	16.62	30.46	53.42	22.96	L1	PASS
4	0.2343	10.34	35.97	62.30	26.33	21.28	52.30	31.02	L1	PASS
5	0.357	10.30	53.52	58.80	5.28	42.10	48.80	6.70	L1	PASS
6	2.52	10.29	47.27	56.00	8.73	39.73	46.00	6.27	L1	PASS

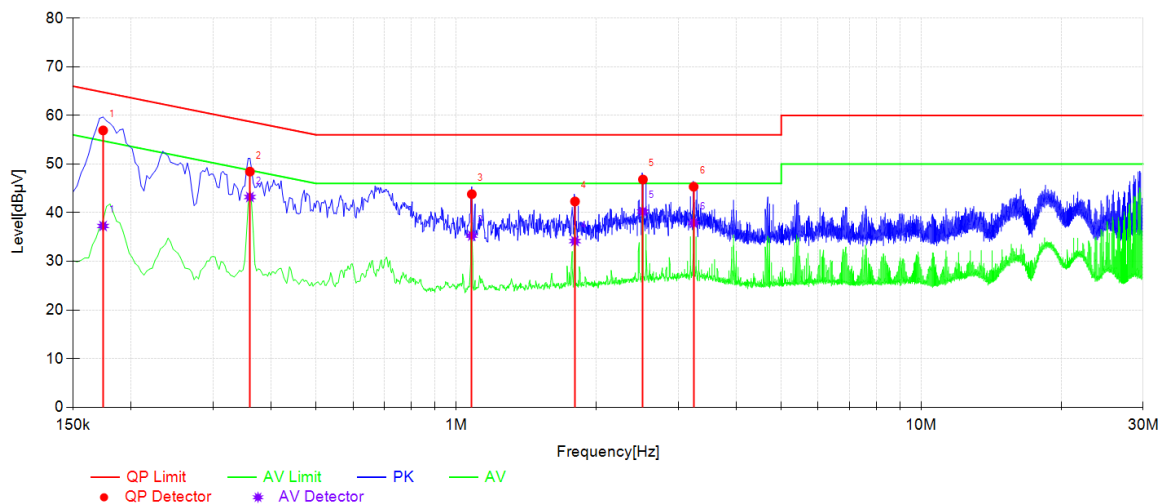

Final Data List										
NO.	Freq. [MHz]	Factor [dB]	QP Value [dBμV]	QP Limit [dBμV]	QP Margin [dB]	AV Value [dBμV]	AV Limit [dBμV]	AV Margin [dB]	Type	Verdict
1	0.174	10.35	56.92	64.77	7.85	37.27	54.77	17.50	N	PASS
2	0.36	10.30	48.45	58.73	10.28	43.23	48.73	5.50	N	PASS
3	1.08	10.27	43.82	56.00	12.18	35.29	46.00	10.71	N	PASS
4	1.8	10.36	42.32	56.00	13.68	34.17	46.00	11.83	N	PASS
5	2.52	10.39	46.83	56.00	9.17	40.25	46.00	5.75	N	PASS
6	3.24	10.39	45.35	56.00	10.65	37.89	46.00	8.11	N	PASS

3.2 Radiated emissions

Test Method:

Radiated Spurious Emissions Below 30MHz: ANSI C63.10-2020 Section 6.4

Radiated Spurious Emissions 30-1000MHz: ANSI C63.10-2020 Section 6.3 and 6.5

[For 9 kHz ~ 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 30MHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

[For above 30 MHz]

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Note:

- a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- b. All modes of operation were investigated and the worst-case emissions are reported.

Limit:


FCC §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
0.009-0.490	2400/F(kHz) @ 300 m	-
0.490-1.705	24000/F(kHz) @ 30 m	-
1.705 - 30	30 @ 30m	-
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Test Result:

After pre-scan, the worst emission data was recorded.


Mode 20

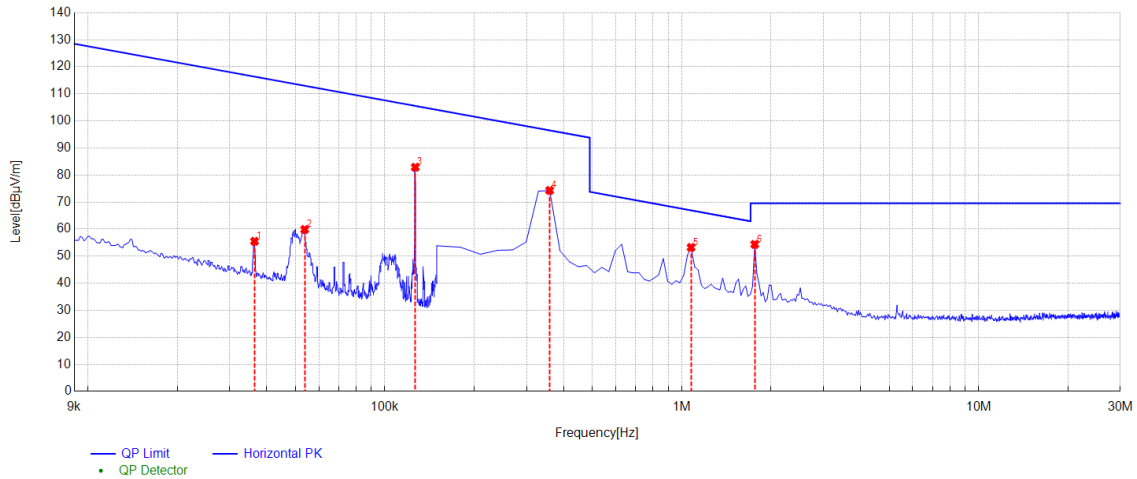

NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	68.41	-12.91	55.50	116.38	60.88	100	130	X	PASS
2	0.0537	73.56	-13.69	59.87	112.99	53.12	100	62	X	PASS
3	0.1266	95.90	-13.03	82.87	105.55	22.68	100	153	X	PASS
4	0.3590	85.30	-10.99	74.31	96.50	22.19	100	14	X	PASS
5	1.0754	63.78	-10.54	53.24	66.93	13.69	100	14	X	PASS
6	1.7619	64.81	-10.46	54.35	69.50	15.15	100	89	X	PASS

Remarks:


1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.

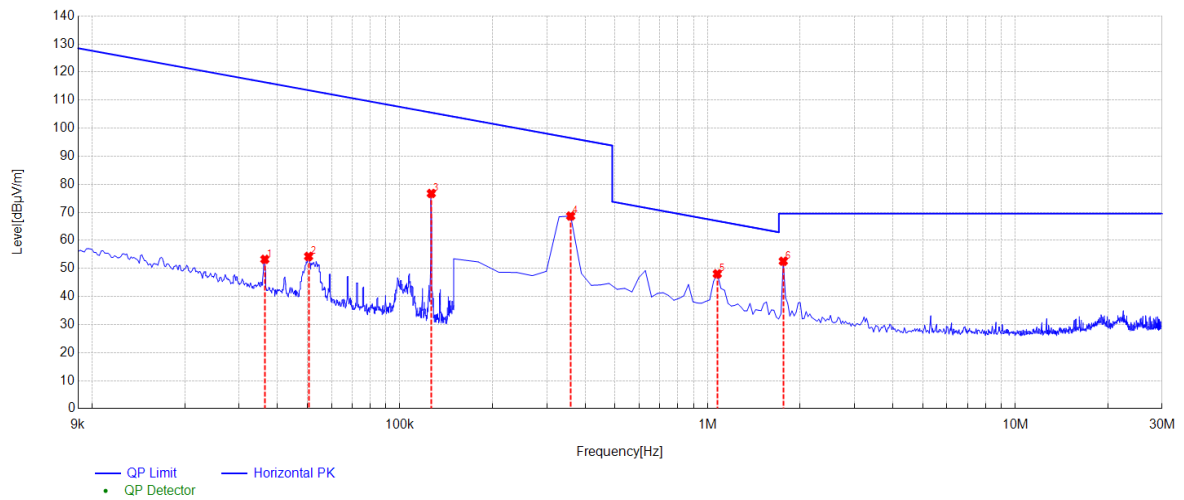

NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	66.16	-12.91	53.25	116.38	63.13	100	67	Y	PASS
2	0.0505	67.97	-13.68	54.29	113.54	59.25	100	129	Y	PASS
3	0.1265	89.77	-13.04	76.73	105.56	28.83	100	64	Y	PASS
4	0.3590	79.68	-10.99	68.69	96.50	27.81	100	308	Y	PASS
5	1.0754	58.61	-10.54	48.07	66.93	18.86	100	118	Y	PASS
6	1.7619	63.03	-10.46	52.57	69.50	16.93	100	14	Y	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.

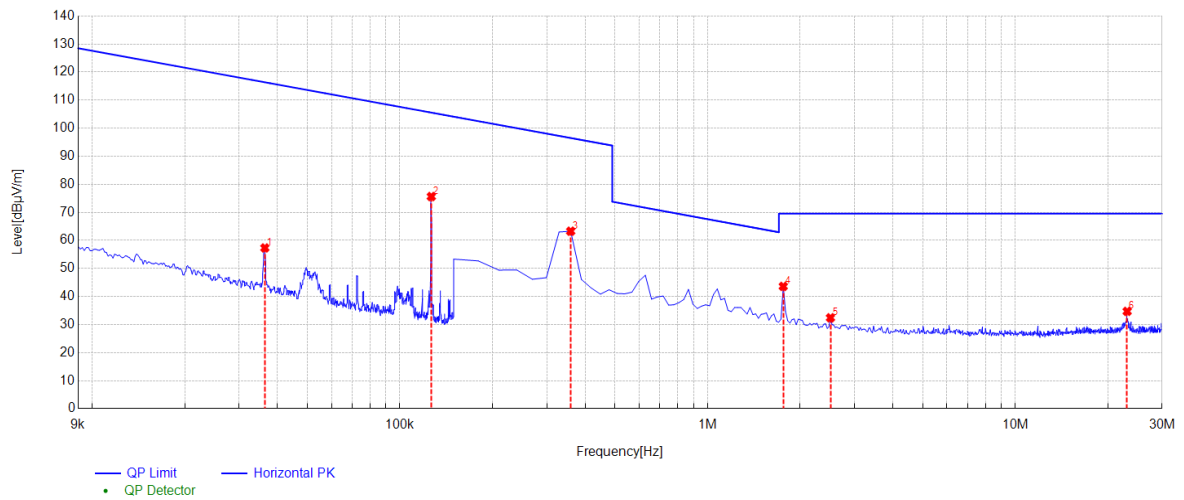


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	70.23	-12.91	57.32	116.38	59.06	100	34	Z	PASS
2	0.1265	88.67	-13.04	75.63	105.56	29.93	100	151	Z	PASS
3	0.3590	74.26	-10.99	63.27	96.50	33.23	100	40	Z	PASS
4	1.7619	54.07	-10.46	43.61	69.50	25.89	100	70	Z	PASS
5	2.5082	42.78	-10.38	32.40	69.50	37.10	100	322	Z	PASS
6	23.1046	43.84	-9.14	34.70	69.50	34.80	100	214	Z	PASS

Remarks:

1. Result value (dBμV/m) = Reading value (dBμV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBμV/m) - Limit value (dBμV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBμV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.


Mode 21

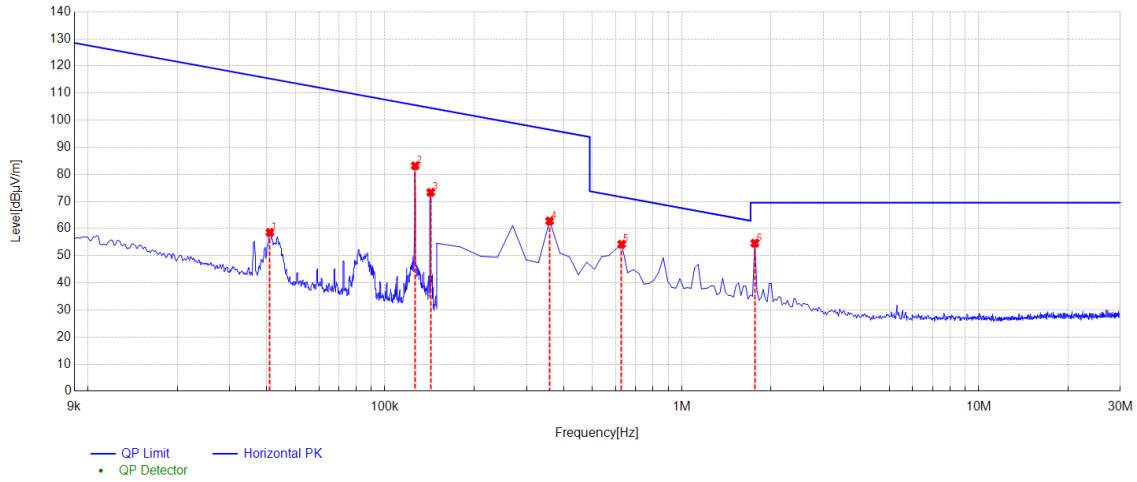

NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0410	71.78	-13.17	58.61	115.33	56.72	100	58	X	PASS
2	0.1265	96.20	-13.04	83.16	105.56	22.40	100	160	X	PASS
3	0.1427	86.19	-12.82	73.37	104.51	31.14	100	16	X	PASS
4	0.3590	73.82	-10.99	62.83	96.50	33.67	100	161	X	PASS
5	0.6276	64.62	-10.36	54.26	71.64	17.38	100	154	X	PASS
6	1.7619	65.09	-10.46	54.63	69.50	14.87	100	92	X	PASS

Remarks:


1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.

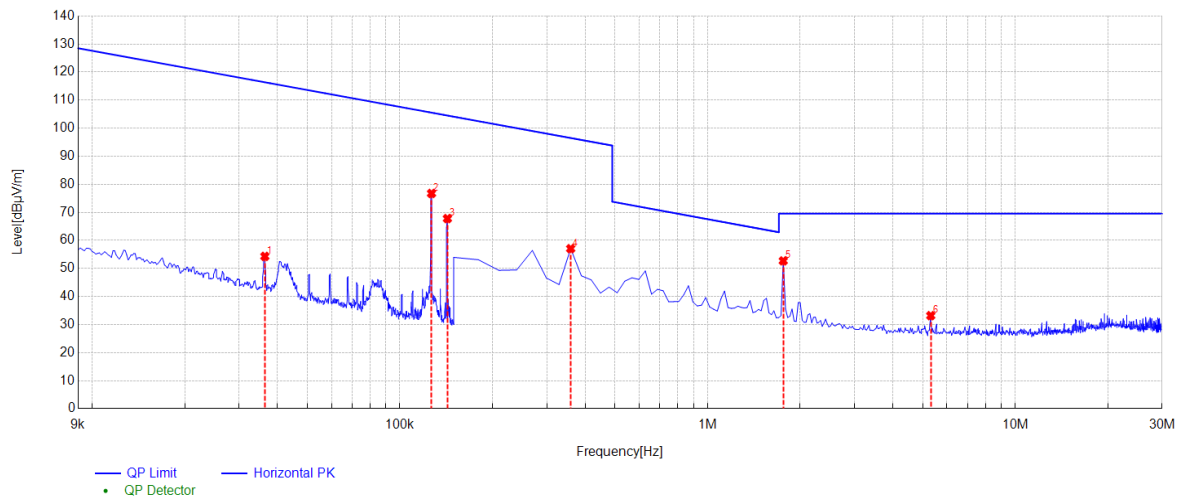

NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	67.22	-12.91	54.31	116.38	62.07	100	307	Y	PASS
2	0.1267	89.77	-13.03	76.74	105.54	28.80	100	68	Y	PASS
3	0.1427	80.60	-12.82	67.78	104.51	36.73	100	300	Y	PASS
4	0.3590	68.05	-10.99	57.06	96.50	39.44	100	76	Y	PASS
5	1.7619	63.17	-10.46	52.71	69.50	16.79	100	17	Y	PASS
6	5.3140	43.25	-10.07	33.18	69.50	36.32	100	213	Y	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.

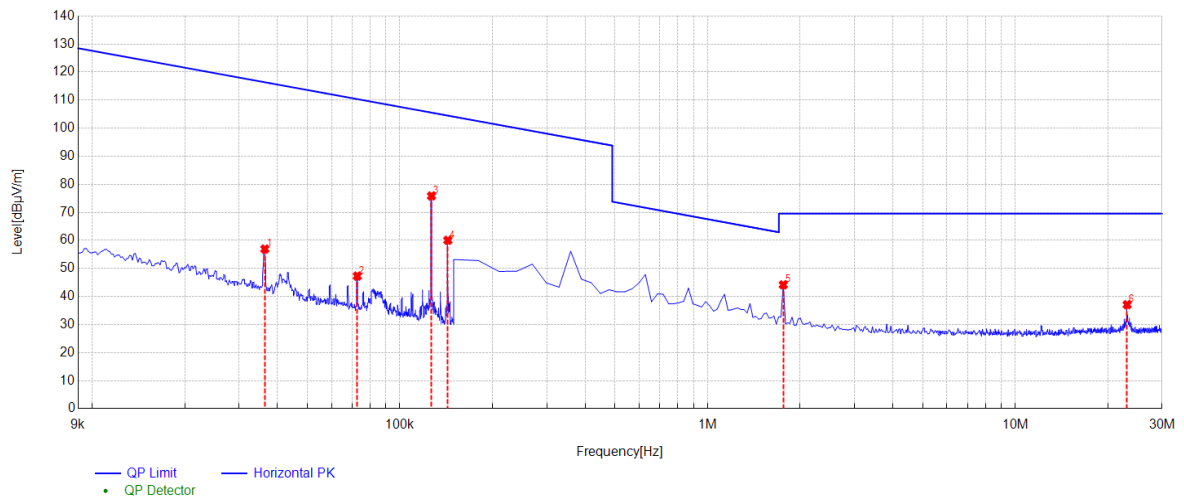


NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	69.83	-12.91	56.92	116.38	59.46	100	267	Z	PASS
2	0.0727	61.04	-13.75	47.29	110.36	63.07	100	162	Z	PASS
3	0.1267	88.87	-13.03	75.84	105.54	29.70	100	156	Z	PASS
4	0.1432	72.86	-12.82	60.04	104.48	44.44	100	15	Z	PASS
5	1.7619	54.62	-10.46	44.16	69.50	25.34	100	116	Z	PASS
6	23.1046	46.22	-9.14	37.08	69.50	32.42	100	313	Z	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.


Mode 23

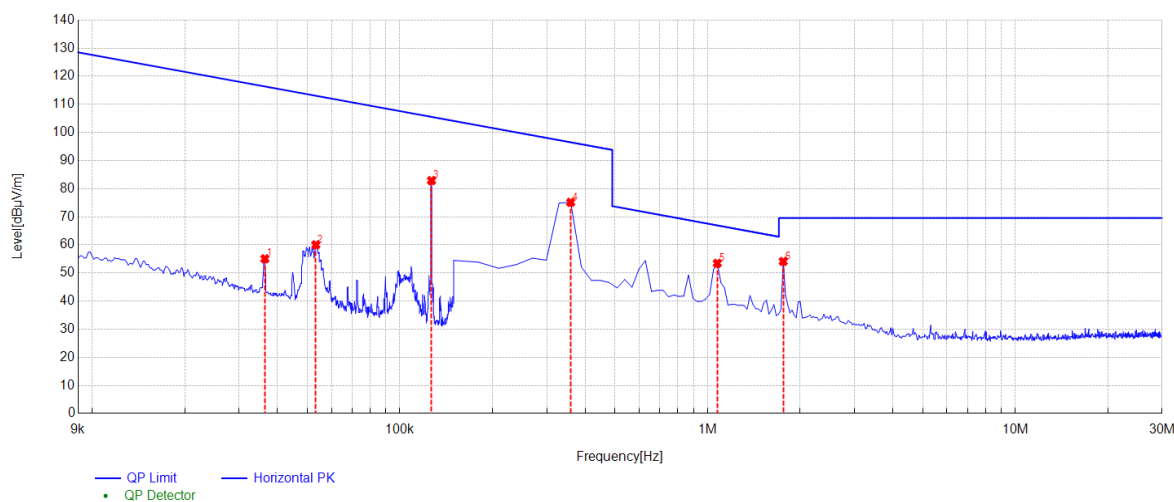

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	67.96	-12.91	55.05	116.38	61.33	100	346	X	PASS
2	0.0533	73.71	-13.69	60.02	113.06	53.04	100	64	X	PASS
3	0.1267	95.90	-13.03	82.87	105.54	22.67	100	159	X	PASS
4	0.3590	86.12	-10.99	75.13	96.50	21.37	100	34	X	PASS
5	1.0754	63.98	-10.54	53.44	66.93	13.49	100	34	X	PASS
6	1.7619	64.57	-10.46	54.11	69.50	15.39	100	102	X	PASS

Remarks:


1. Result value (dBμV/m) = Reading value (dBμV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBμV/m) - Limit value (dBμV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBμV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. "*" : Fundamental Frequency.

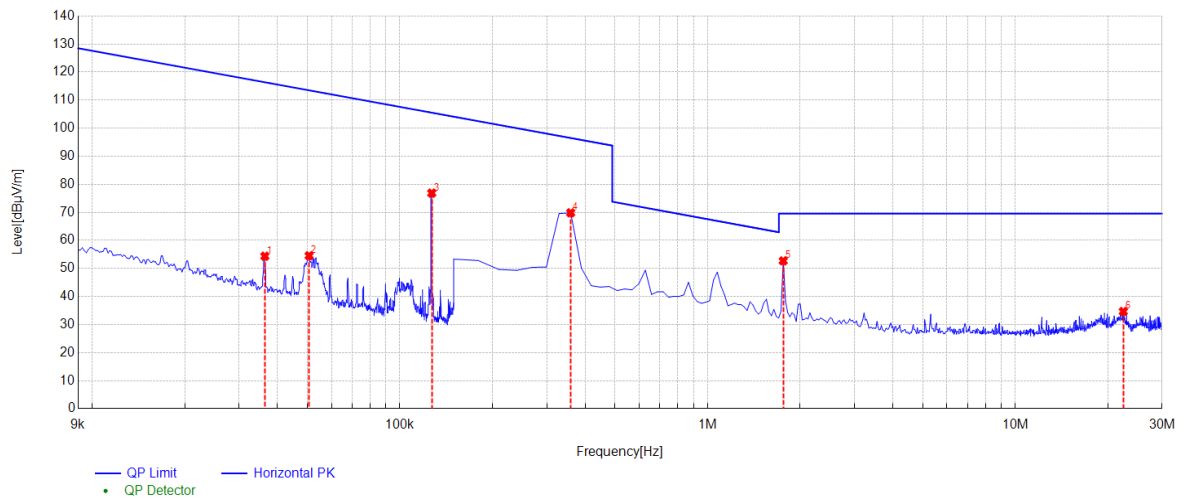

NO.	Freq. [MHz]	Reading [dBμV/m]	Factor [dB/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	67.28	-12.91	54.37	116.38	62.01	100	51	Y	PASS
2	0.0507	68.21	-13.68	54.53	113.49	58.96	100	139	Y	PASS
3	0.1269	89.87	-13.02	76.85	105.53	28.68	100	71	Y	PASS
4	0.3590	80.83	-10.99	69.84	96.50	26.66	100	315	Y	PASS
5	1.7619	63.17	-10.46	52.71	69.50	16.79	100	14	Y	PASS
6	22.4480	43.89	-9.23	34.66	69.50	34.84	100	60	Y	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamp Factor (dB).
4. The other emission levels were very low against the limit.
5. “*” : Fundamental Frequency.

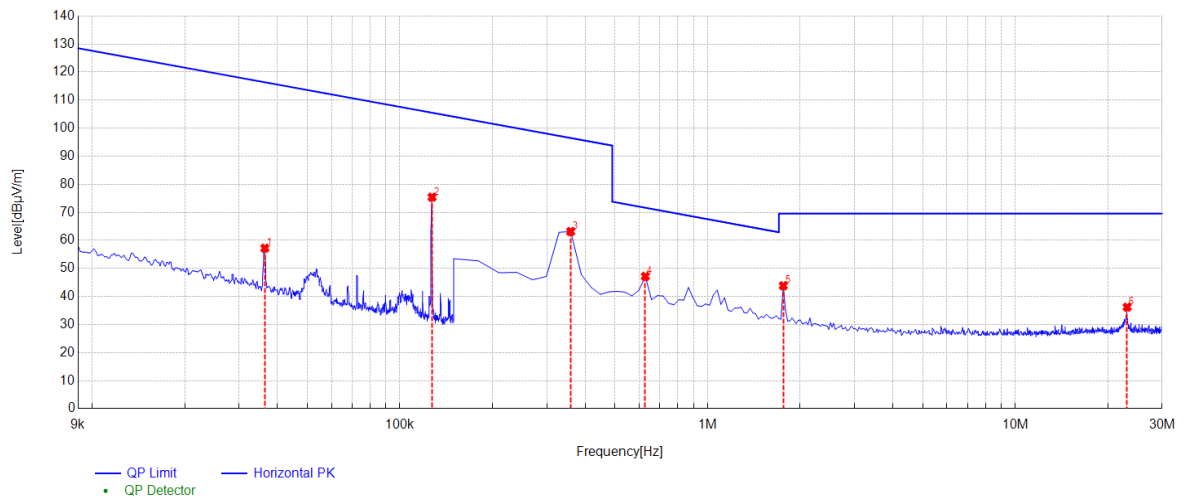


NO.	Freq. [MHz]	Reading [dBuV/m]	Factor [dB/m]	Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	0.0364	70.13	-12.91	57.22	116.38	59.16	100	172	Z	PASS
2	0.1272	88.44	-13.02	75.42	105.51	30.09	100	152	Z	PASS
3	0.3590	74.15	-10.99	63.16	96.50	33.34	100	14	Z	PASS
4	0.6276	57.53	-10.36	47.17	71.64	24.47	100	116	Z	PASS
5	1.7619	54.29	-10.46	43.83	69.50	25.67	100	89	Z	PASS
6	23.1046	45.34	-9.14	36.20	69.50	33.30	100	319	Z	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamplifier Factor (dB).
4. The other emission levels were very low against the limit.
5. “*” : Fundamental Frequency.


30-1000MHz
Mode 23

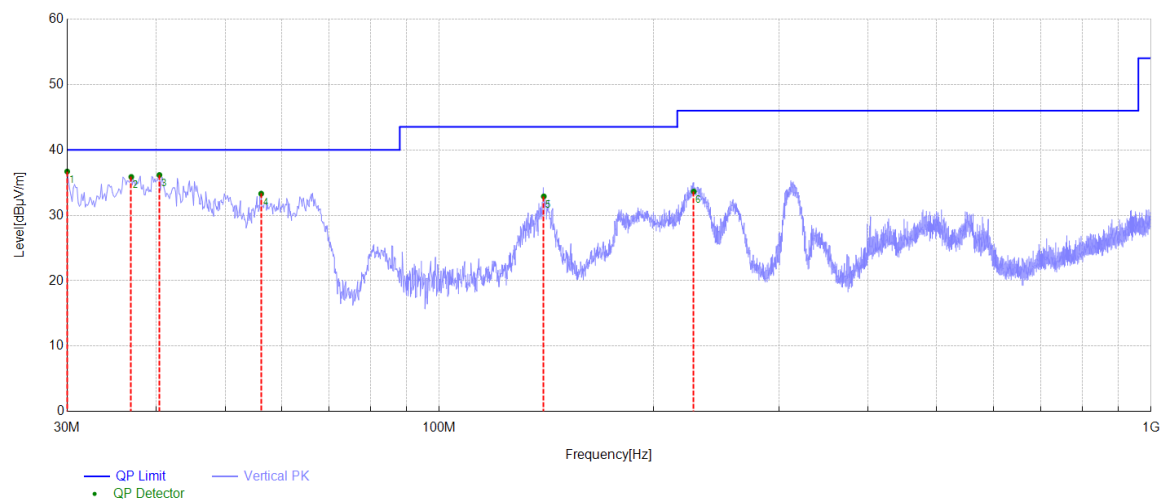

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBuV/m]	QP Limit [dBuV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	30.0000	-16.41	36.70	40.00	3.30	100	360	Vertical	PASS
2	36.9112	-16.09	35.87	40.00	4.13	100	252	Vertical	PASS
3	40.4275	-15.87	36.16	40.00	3.84	100	350	Vertical	PASS
4	56.1900	-16.56	33.31	40.00	6.69	100	82	Vertical	PASS
5	140.2162	-16.44	32.89	43.50	10.61	100	313	Vertical	PASS
6	227.7588	-19.07	33.64	46.00	12.36	100	12	Vertical	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamplifier Factor (dB).

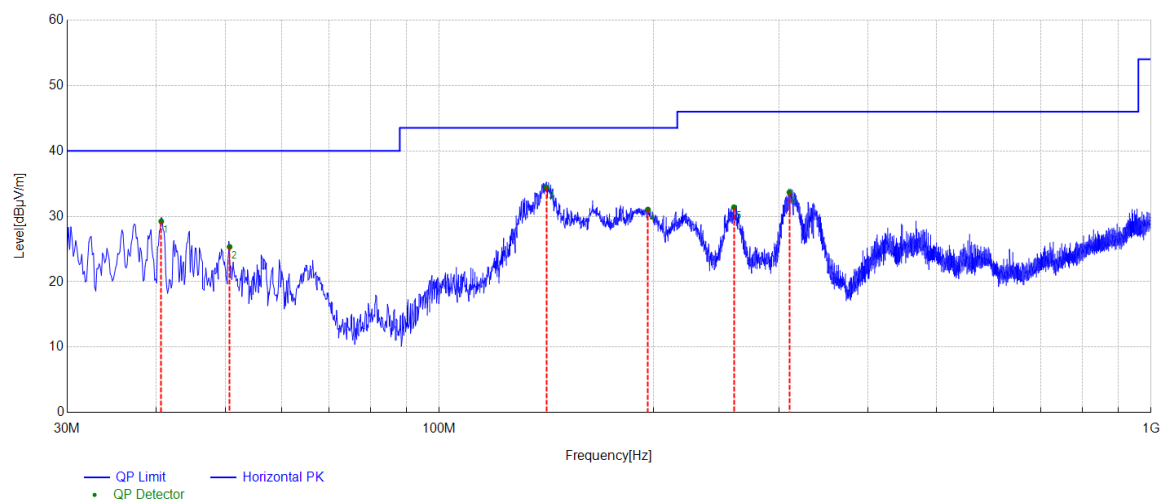

QP Final Data List									
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBuV/m]	QP Limit [dBuV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity	Verdict
1	40.6700	-15.87	29.23	40.00	10.77	200	12	Horizontal	PASS
2	50.7338	-16.22	25.34	40.00	14.66	200	12	Horizontal	PASS
3	141.4288	-16.45	34.40	43.50	9.10	200	39	Horizontal	PASS
4	196.3550	-18.92	31.04	43.50	12.46	200	57	Horizontal	PASS
5	259.4050	-17.35	31.39	46.00	14.61	100	81	Horizontal	PASS
6	310.3300	-15.32	33.66	46.00	12.34	100	75	Horizontal	PASS

Remarks:

1. Result value (dBuV/m) = Reading value (dBuV/m) + Correction Factor (dB/m).
2. Margin(dB) = Result value (dBuV/m) - Limit value (dBuV/m).
3. Correction Factor (dB/m) = Antenna Factor (dBuV/m) + Cable Loss (dB) - Preamplifier Factor (dB).

-End of report-