

TEST REPORT

Applicant: Anker Innovations Limited
Address: Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18
Harcourt Road, Hong Kong
Equipment Type: Anker SOLIX S5000 Portable Power Station
Model Name: AS510
Brand Name: ANKER, ANKER SOLIX
FCC ID: 2AOKB-AS510
ISED Number: 23451-AS510
Test Standard: 47 CFR Part 15 Subpart C
RSS-Gen Issue 5
RSS-247 Issue 4
(refer to section 3.1)
Sample Arrival Date: Aug. 26, 2026
Test Date: Aug. 26, 2026 - Sep. 02, 2026
Date of Issue: Sep. 10, 2026

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Li Renyu**Checked by:** Li Ganming**Approved by:** Tolan Tu

(Testing Director)



Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 10, 2026</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
2.5	Additional Instructions	8
3	SUMMARY OF TEST RESULTS	10
3.1	Test Standards	10
3.2	Test Verdict	11
4	GENERAL TEST CONFIGURATIONS	12
4.1	Test Environments	12
4.2	Test Equipment List	12
4.3	Test Software List	13
4.4	Measurement Uncertainty	13
4.5	Description of Test Setup	14
4.6	Measurement Results Explanation Example	17
5	TEST ITEMS	18
5.1	Antenna Requirements	18
5.2	Output Power	19
5.3	Occupied Bandwidth	21
5.4	Conducted Spurious Emission	23

5.5	Band Edge (Authorized-band band-edge).....	25
5.6	Conducted Emission.....	27
5.7	Radiated Spurious Emission.....	28
5.8	Band Edge (Restricted-band band-edge).....	33
5.9	Power Spectral density (PSD)	36
ANNEX A	TEST RESULT	37
A.1	Output Power, E.I.R.P	37
A.2	Occupied Bandwidth.....	40
A.3	Conducted Spurious Emissions	44
A.4	Band Edge (Authorized-band band-edge).....	49
A.5	Conducted Emissions	52
A.6	Radiated Spurious Emission.....	54
A.7	Band Edge (Restricted-band band-edge).....	63
A.8	Power Spectral Density (PSD).....	66
ANNEX B	TEST SETUP PHOTOS	69

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	601, Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Building 2, Intelligent Connected Vehicle Industrial Park, No.55, Xiangshan Road, Luotian Community, Yanluo Sub-district, Bao'an District, Shenzhen, Guangdong
	☐ 1/F., Building B, Ganghongji High-Tech Intelligent Industrial Park, No.1008, Songbai Road, Yangguang Community, Xili Subdistrict, Nanshan District, Shenzhen, Guangdong
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196. The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The CAB identifier number is CN0030.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

2.2 Manufacturer Information

Manufacturer	Anker Innovations Limited
Address	Unit 56, 8th Floor, Tower 2, Admiralty Centre, 18 Harcourt Road, Hong Kong

2.3 General Description for Equipment under Test (EUT)

EUT Name	Anker SOLIX S5000 Portable Power Station
Model Name Under Test	AS510
Series Model Name	N/A
Description of Model name differentiation	N/A
Serial Number	APCDQZQ0G29400005
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BLE) WIFI 802.11b, 802.11g and 802.11n
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	DTS
Modulation Type	GFSK
Product Type	☒ Mobile ☐ Portable ☐ Fix Location
Transfer Rate	1 Mbps, 2 Mbps
Frequency Range	The frequency range used is 2400 MHz to 2483.5 MHz.
Number of Channel	40 (at intervals of 2 MHz) ^{Note 1}
Tested Channel	1 Mbps: 0 (2402 MHz), 19 (2440 MHz), 39 (2480 MHz) 2 Mbps: 1 (2404 MHz), 19 (2440 MHz), 38 (2478 MHz)
Antenna Type	FPC Antenna
Antenna Gain	2.95 dBi
Antenna Impedance	50Ω
Antenna System (MIMO Smart Antenna)	N/A
Note 1: 2 Mbps does not support Channel 0, Channel 12, and Channel 39.	

All channel was listed on the following table:

BLE 1M:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

BLE 2M:

Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)	Channel Number	Freq. (MHz)
\	\	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	\	\	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	\	\

2.5 Additional Instructions


EUT Software Settings:

Mode	☒ Special software is used. The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.
------	--

During testing. Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power level setup in software			
Test Software Version	EspRFTTestTool		
Mode	Channel	Frequency (MHz)	Soft Set
GFSK (BLE 1Mbps)	0	2402	9
	19	2440	9
	39	2480	9
GFSK (BLE 2Mbps)	1	2404	9
	19	2440	9
	38	2478	9

Run Software:

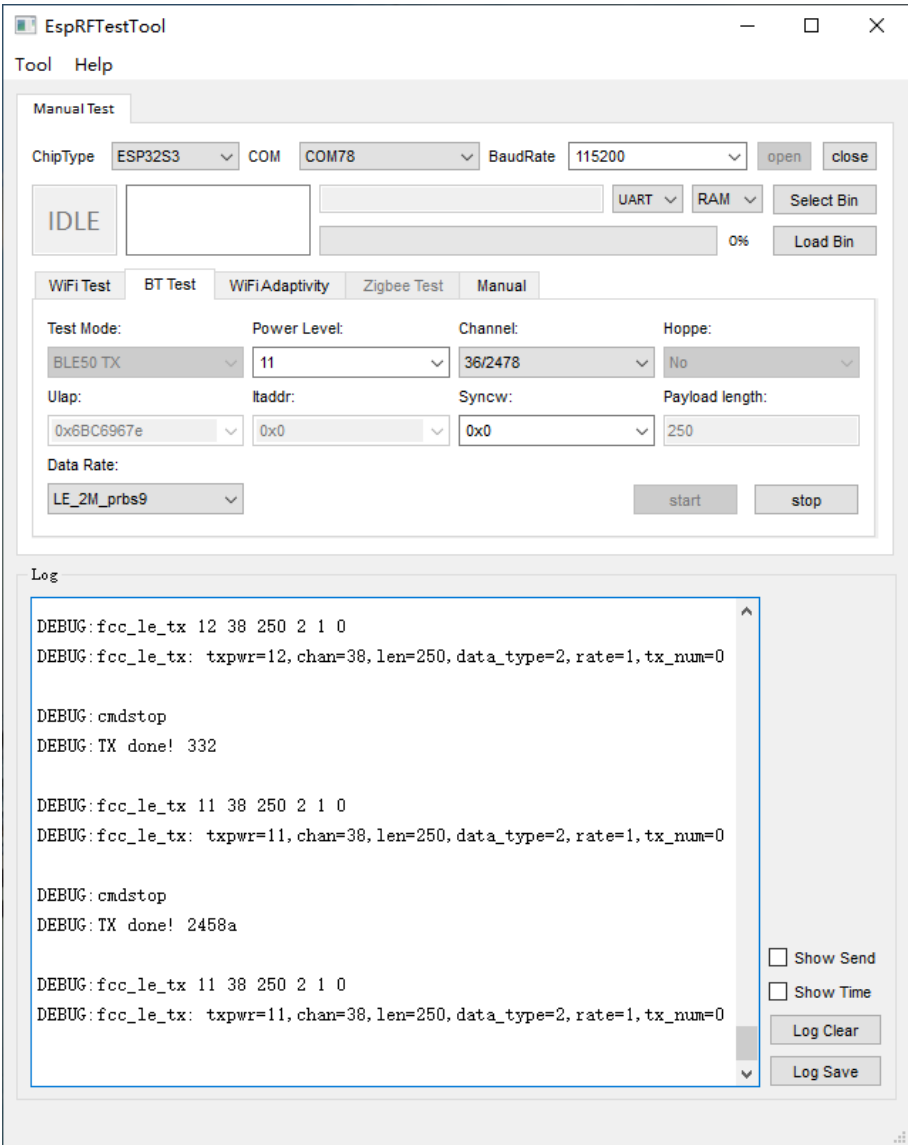

Manual Test

ChipType: ESP32S3 COM: COM78 BaudRate: 115200 open close

IDLE

UART RAM Select Bin

0% Load Bin

WiFi Test BT Test WiFiAdaptivity Zigbee Test Manual

Test Mode: BLE50 TX Power Level: 11 Channel: 36/2478 Hoppe: No

Ulap: 0x6BC6967e ltaddr: 0x0 Syncw: 0x0 Payload length: 250

Data Rate: LE_2M_prbs9 start stop

Log

```
DEBUG:fcc_le_tx 12 38 250 2 1 0
DEBUG:fcc_le_tx: txpwr=12, chan=38, len=250, data_type=2, rate=1, tx_num=0

DEBUG:cmdstop
DEBUG:TX done! 332

DEBUG:fcc_le_tx 11 38 250 2 1 0
DEBUG:fcc_le_tx: txpwr=11, chan=38, len=250, data_type=2, rate=1, tx_num=0

DEBUG:cmdstop
DEBUG:TX done! 2458a

DEBUG:fcc_le_tx 11 38 250 2 1 0
DEBUG:fcc_le_tx: txpwr=11, chan=38, len=250, data_type=2, rate=1, tx_num=0
```

Show Send Show Time Log Clear Log Save

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
3	RSS-247 Issue 4	Digital Transmission Systems, Frequency Hopping Systems and Licence Exempt Local Area Network Devices in 902-928 MHz, 2400-2483.5 MHz, 5150-5350 MHz, and 5470-5895 MHz bands
4	ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024	American National Standard for Procedures for Compliance Testing of Unlicensed Wireless Devices
5	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Test Verdict

No.	Description	FCC Part No.	ISED Part No.	Channel	Test Result	Verdict
1	Antenna Requirement	15.203	RSS-Gen, 6.8	N/A	--	Pass ^{Note1}
2	Output Power	15.247(b)	RSS-247, 6.3.2	Low/Middle/High	ANNEX A.1	Pass
3	Occupied Bandwidth	15.247(a)	RSS-GEN, 6.7; RSS-247, 6.3.1(a)	Low/Middle/High	ANNEX A.2	Pass
4	Conducted Spurious Emission	15.247(d)	RSS-247, 6.6	Low/Middle/High	ANNEX A.3	Pass
5	Band Edge(Authorized-band band-edge)	15.247(d)	RSS-247, 6.6	Low/High	ANNEX A.4	Pass
6	Conducted Emission	15.207	RSS-GEN, 8.8	Low/Middle/High	ANNEX A.5	Pass
7	Radiated Spurious Emission	15.209 15.247(d)	RSS-247, 6.6	Low/Middle/High	ANNEX A.6	Pass
8	Band Edge(Restricted-band band-edge)	15.209 15.247(d)	RSS-247, 6.6	Low/High	ANNEX A.7	Pass
9	Power spectral density (PSD)	15.247(e)	RSS-247, 6.3.1(b)	Low/Middle/High	ANNEX A.8	Pass
10	Receiver Spurious Emissions	--	RSS-Gen, 7.3	--	N/A	N/A ^{Note2}

Note ¹: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

Note ²: Only radio communication receivers operating in stand-alone mode within the band 30-960 MHz, as well as scanner receivers, are subject to Industry Canada requirements, so this test is not applicable.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	42% to 65%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+19.8℃ to +28.7℃
Working Voltage of the EUT	NV (Normal Voltage)	220 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-30	103118	2026.08.04	2027.08.03
Spectrum Analyzer	KEYSIGHT	N9020A	MY54432240	2026.03.24	2027.03.23
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	00884	2025.03.01	2028.02.29
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2025.02.22	2028.02.21
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2024.06.15	2027.06.14
Anechoic Chamber	EMC Electronic Co, Ltd	9m*6m*6m	213	2026.03.03	2028.03.02
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2026.05.20	2027.05.19
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2026.05.20	2027.05.19
Amplifier	COM-MV	KA LNA18 40G-01	10248150	2025.12.04	2026.12.03
EMI Receiver	ROHDE&SCHWARZ	ESR7	103027	2025.10.30	2026.10.29
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2024.01.23	2027.01.22
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2018054558	2025.11.26	2026.11.25
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	883	2025.03.23	2028.03.22
Anechoic Chamber (10m#2)	YiHeng	21m*11m*8m	101-1	2025.10.16	2028.10.15
EMI Receiver	KEYSIGHT	N9038A	MY55330120	2026.06.02	2027.06.01
Amplifier (30MHz-1GHz)	COM-MV	ZT30-1000M	B2017119081	2025.11.26	2026.11.25
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2025.03.23	2028.03.22
Anechoic Chamber	YiHeng	9m*6m*6m	106-1	2026.01.20	2029.01.19
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2025.09.25	2026.09.24
LISN	SCHWARZBECK	NSLK 8127	8127-687	2026.03.25	2027.03.24
ISN	TESEQ	ISN T800	34449	2025.10.20	2026.10.19
ISN	TESEQ	ISN T8-Cat6	53561	2026.05.29	2027.05.28
Shielded Room	Chang Chuang	4m*4m*3m	662	2025.10.12	2028.10.11

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%


4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)


For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm

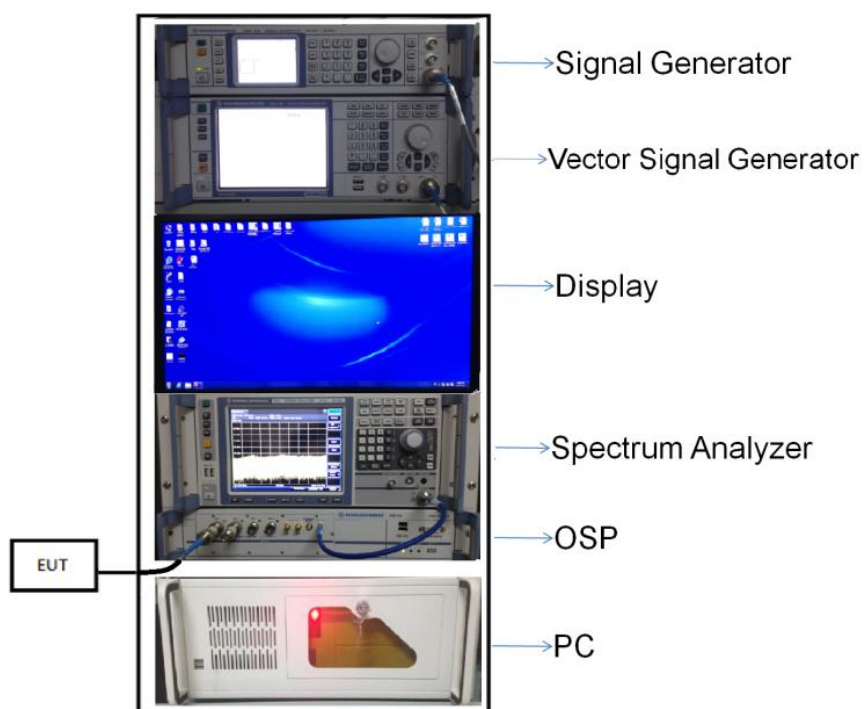


(Diagram 1)

4.5.2 For AC Power Supply Port Test

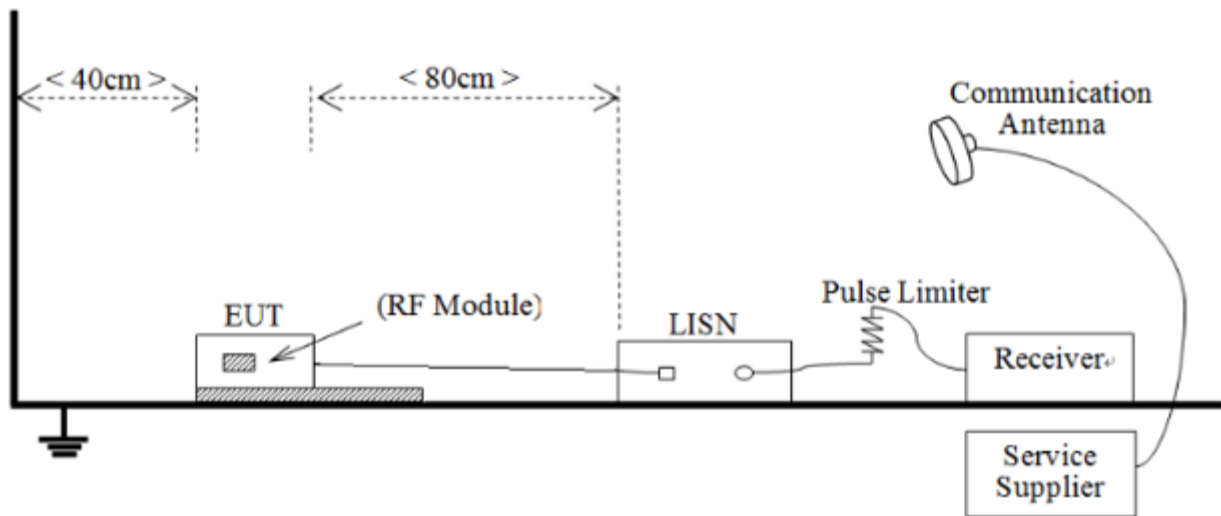


(Diagram 2)

4.5.3 For Radiated Test (Below 30 MHz)

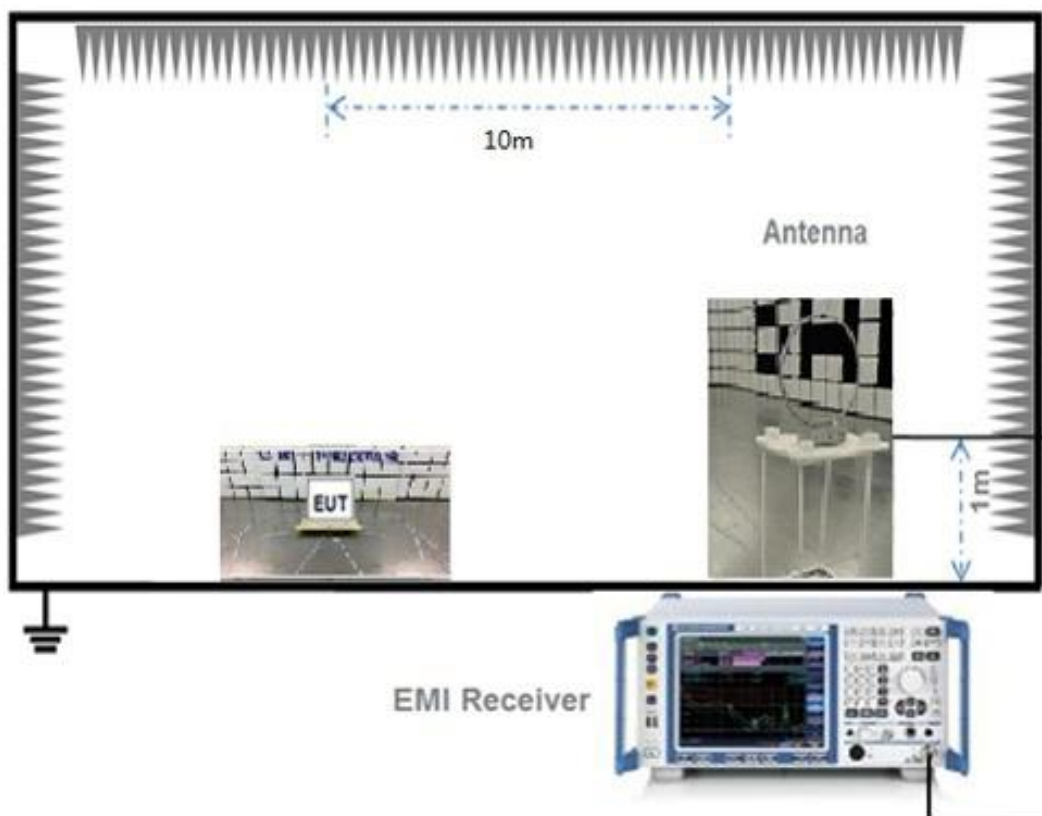


(Diagram 3)

4.5.4 For Radiated Test (30 MHz-1 GHz)

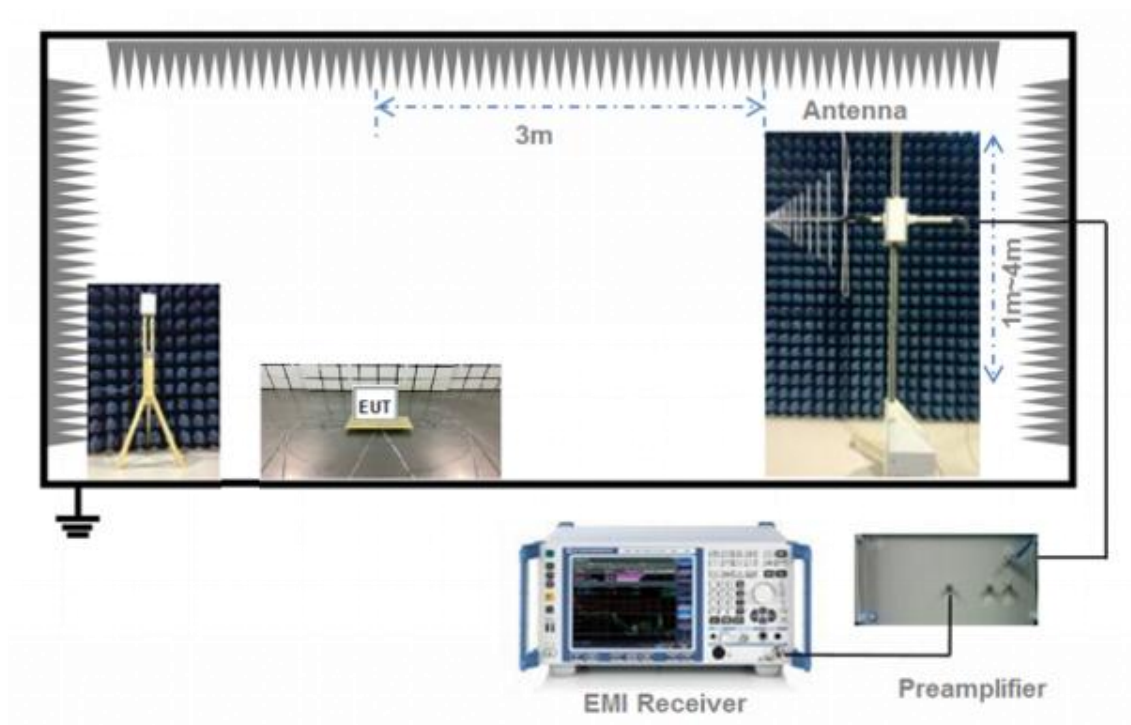

(Diagram 4)

4.5.5 For Radiated Test (Above 1 GHz)

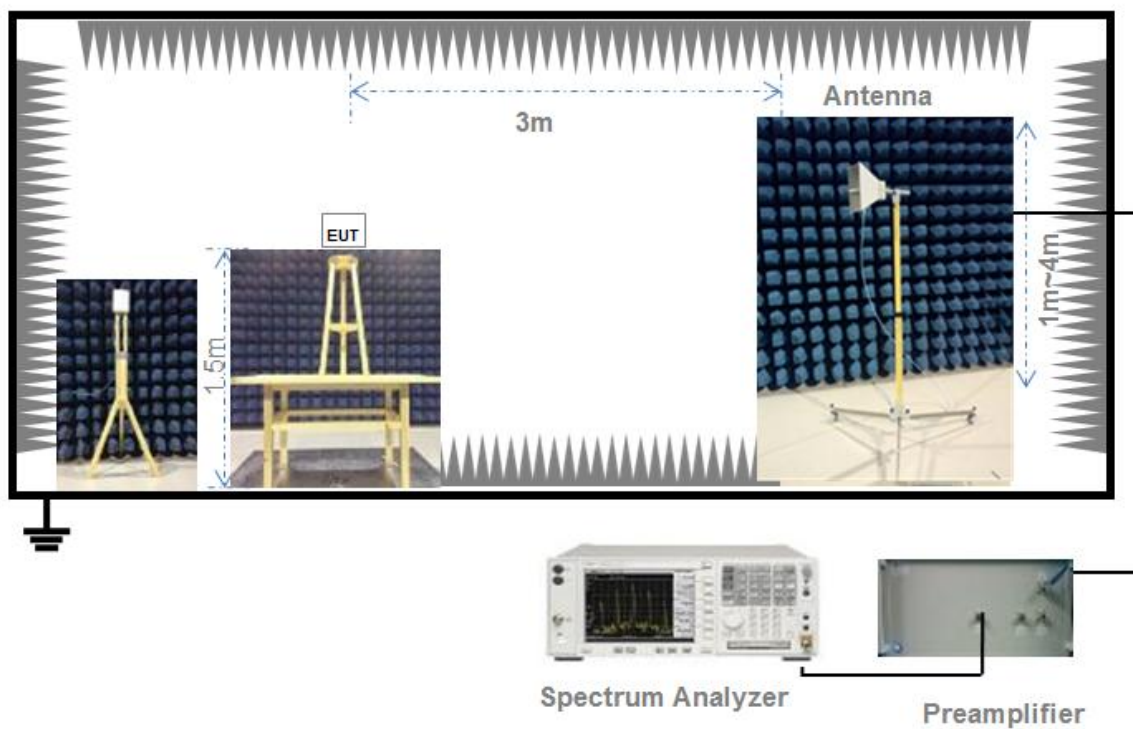

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

$$E = \text{EIRP} - 20\log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-Gen, 6.8

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	An embedded-in antenna design is used.

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Output Power

5.2.1 Test Limit

FCC § 15.247(b)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements.

RSS-247, 6.3.2

For DTS operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1W, and the e.i.r.p. shall not exceed 4 W, except as provided in section 6.5 a) and b).

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.2.3 Test Procedure

a) Maximum peak conducted output power

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

Set the RBW $\geq$ DTS bandwidth.

Set VBW $\geq 3 \times$ RBW.

Set span $\geq 3 \times$ RBW

Sweep time = auto couple.

Detector = peak.

Trace mode = max hold.

Allow trace to fully stabilize.

Use peak marker function to determine the peak amplitude level.

b) Measurements of duty cycle

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal.

Set the center frequency of the instrument to the center frequency of the transmission.

Set RBW $\geq$ OBW if possible; otherwise, set RBW to the largest available value.

Set VBW $\geq$ RBW. Set detector = peak or average.

The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

5.2.4 Test Result

Please refer to ANNEX A.1.

5.3 Occupied Bandwidth

5.3.1 Limit

FCC §15.247(a); RSS-247, 6.3.1(a); RSS-GEN, 6.7

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.3.3 Test Procedure

Option 1:

Use the following spectrum analyzer settings:

Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.

Set the video bandwidth (VBW) ≥ 3 RBW.

Detector = Peak.

Trace mode = max hold.

Sweep = No faster than coupled (auto) time.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times$ RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.

99% bandwidth:

Use the following spectrum analyzer settings:

Set RBW = shall be in the range of 1% to 5% of the OBW.

Set the video bandwidth (VBW) ≥ 3 RBW.

Set the Span to 1.5 to 5 times of OBW.

Detector = Peak.

Trace mode = max hold.

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

5.3.4 Test Result

Please refer to ANNEX A.2.

5.4 Conducted Spurious Emission

5.4.1 Limit

FCC §15.247(d); RSS-247, 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.4.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = No faster than coupled auto time.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = No faster than coupled auto time.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.4.4 Test Result

Please refer to ANNEX A.3.

5.5 Band Edge (Authorized-band band-edge)

5.5.1 Limit

FCC §15.247(d); RSS-247, 6.6

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.5.3 Test Procedure

The DTS rules specify that in any 100 kHz bandwidth outside of the authorized frequency band, the power shall be attenuated according to the following conditions:

- a) If the maximum peak conducted output power procedure was used to demonstrate compliance as described in 9.1, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).
- b) If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).
- c) In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

The following procedures shall be used to demonstrate compliance to these limits. Note that these procedures can be used in either an antenna-port conducted or radiated test set-up. Radiated tests must conform to the test site requirements and utilize maximization procedures defined herein.

Reference level measurement:

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = No faster than coupled auto time.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Emission level measurement:

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Detector = peak.

Sweep time = No faster than coupled auto time.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

5.5.4 Test Result

Please refer to ANNEX A.4.

5.6 Conducted Emission

5.6.1 Limit

FCC §15.207; RSS-GEN, 8.8

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.6.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX B.

5.6.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

5.6.4 Test Result

Please refer to ANNEX A.5.

5.7 Radiated Spurious Emission

5.7.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.9; RSS-247, 6.6

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/F(\text{kHz})$	300
0.490 - 1.705	$24000/F(\text{kHz})$	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength ($\text{dB}\mu\text{V/m}$) = $20 \times \log[\text{Field Strength } (\mu\text{V/m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: $54\text{dB}\mu\text{V/m}@3\text{m}$ (AV) and $74\text{dB}\mu\text{V/m}@3\text{m}$ (PK).

5.7.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.7.3 Test Procedure

Since the emission limits are specified in terms of radiated field strength levels, measurements performed to demonstrate compliance have traditionally relied on a radiated test configuration. Radiated measurements remain the principal method for demonstrating compliance to the specified limits; however antenna-port conducted measurements are also now acceptable to demonstrate compliance (see below for details). When radiated measurements are utilized, test site requirements and procedures for maximizing and measuring radiated emissions that are described in ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024 shall be followed.

Antenna-port conducted measurements may also be used as an alternative to radiated measurements for demonstrating compliance in the restricted frequency bands. If conducted measurements are performed, then proper impedance matching must be ensured and an additional radiated test for cabinet/case spurious emissions is required.

General Procedure for conducted measurements in restricted bands:

- a) Measure the conducted output power (in dBm) using the detector specified (see guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- b) Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see guidance on determining the applicable antenna gain)
- c) Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies > 1000 MHz).
- d) For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).
- e) Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log D + 104.8$$

where:

E = electric field strength in dB μ V/m,

EIRP = equivalent isotropic radiated power in dBm

D = specified measurement distance in meters.

- f) Compare the resultant electric field strength level to the applicable limit.
- g) Perform radiated spurious emission test.

Quasi-Peak measurement procedure

The specifications for measurements using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Frequency Interference (CISPR) of the International Electrotechnical Commission.

As an alternative to CISPR quasi-peak measurement, compliance can be demonstrated to the applicable emission limits using a peak detector.

Peak power measurement procedure:

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 1.

- b) VBW $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Table 1—RBW as a function of frequency

Frequency	RBW
9-150 kHz	200-300 Hz
0.15-30 MHz	9-10 kHz
30-1000 MHz	100-120 kHz
> 1000 MHz	1 MHz

If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Trace averaging across on and off times of the EUT transmissions followed by duty cycle correction:

If continuous transmission of the EUT (i.e., duty cycle ≥ 98 percent) cannot be achieved and the duty cycle is constant (i.e., duty cycle variations are less than ± 2 percent), then the following procedure shall be used:

- a) The EUT shall be configured to operate at the maximum achievable duty cycle.
- b) Measure the duty cycle, x , of the transmitter output signal as described in section 6.0.
- c) RBW = 1 MHz (unless otherwise specified).
- d) VBW $\geq 3 \times$ RBW.
- e) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.
- f) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- g) Sweep time = auto.
- h) Perform a trace average of at least 100 traces.
- i) A correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at

100 percent duty cycle. The correction factor is computed as follows:

- 1) If power averaging (RMS) mode was used in step f), then the applicable correction factor is $10 \log(1/x)$, where x is the duty cycle.
- 2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $20 \log(1/x)$, where x is the duty cycle.
- 3) If a specific emission is demonstrated to be continuous (≥ 98 percent duty cycle) rather than turning on and off with the transmit cycle, then no duty cycle correction is required for that emission.

NOTE: Reduction of the measured emission amplitude levels to account for operational duty factor is not permitted. Compliance is based on emission levels occurring during transmission - not on an average across on and off times of the transmitter.

Determining the applicable transmit antenna gain:

A conducted power measurement will determine the maximum output power associated with a restricted band emission; however, in order to determine the associated EIRP level, the gain of the transmitting antenna (in dBi) must be added to the measured output power (in dBm).

Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.

See KDB 662911 for guidance on calculating the additional array gain term when determining the effective antenna gain for a EUT with multiple outputs occupying the same or overlapping frequency ranges in the same band.

Radiated spurious emission test:

An additional consideration when performing conducted measurements of restricted band emissions is that unwanted emissions radiating from the EUT cabinet, control circuits, power leads, or intermediate circuit elements will likely go undetected in a conducted measurement configuration. To address this concern, a radiated test shall be performed to ensure that emissions emanating from the EUT cabinet (rather than the antenna port) also comply with the applicable limits.

For these cabinet radiated spurious emission measurements the EUT transmit antenna may be replaced with a termination matching the nominal impedance of the antenna. Procedures for performing radiated measurements are specified in ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024. All detected emissions shall comply with the applicable limits.

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency.

The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

5.7.4 Test Result

Please refer to ANNEX A.6.

5.8 Band Edge (Restricted-band band-edge)

5.8.1 Limit

FCC §15.209&15.247(d); RSS-GEN, 8.10; RSS-247, 6.6

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.8.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.8.3 Test Procedure

The following procedures may be used to determine the average field strength or power of an unwanted emission that is within 2 MHz of the authorized band-edge. Use the procedure described in 11.12.3.2.2 when using an average detector and the EUT can be configured to transmit continuously (i.e., $D \geq 98\%$). Use the procedure described in 11.12.3.2.3 when using an average detector and the EUT cannot be configured to transmit continuously but the duty cycle is constant (i.e., duty cycle variations are less than $\pm 2\%$). Use the procedure described in 11.12.3.2.4 when using an average detector for those cases where the EUT cannot be configured to transmit continuously and the duty cycle is not constant (duty cycle variations equal or exceed 2%).

If the EUT can be configured or modified to transmit continuously ($D \geq 98\%$), measured using the following method (with EUT transmitting continuously):

Use the following spectrum analyzer settings:

Set instrument center frequency to the frequency of the emission to be measured (must be within 2 MHz of the authorized band-edge).

RBW = 100 kHz.

VBW $\geq [3 \times \text{RBW}]$.

Detector = Power averaging (rms), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$.

Averaging type = power (i.e., rms):

As an alternative, the detector and averaging type may be set for linear voltage averaging.

Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.

Sweep time = auto.

Perform a trace average of at least 100 traces.

Compute the power by integrating the spectrum over 1 MHz using the analyzer's band-power

measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the instrument does not have a band-power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission) ± 0.5 MHz.

If continuous transmission of the EUT ($D \geq 98\%$) cannot be achieved and the duty cycle is constant (duty cycle variations are less $\pm 2\%$), then the following procedure may be used to measure the average power of unwanted emissions within 2 MHz of the authorized band-edge:

RBW = 100 kHz.

VBW $\geq [3 \times \text{RBW}]$.

Detector = Power averaging (rms), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$.

Averaging type = power (i.e., rms):

Detector = Power averaging (rms), if $[\text{span} / (\# \text{ of points in sweep})] \leq (\text{RBW} / 2)$. Satisfying this condition might require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak.

Averaging type = power (i.e., rms):

- 1) As an alternative, the detector and averaging type may be set for linear voltage averaging
- 2) Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.

Sweep time = auto.

Perform a trace average of at least 100 traces.

Compute the power by integrating the spectrum over 1 MHz using the instrument's band-power measurement function with band limits set equal to the emission frequency (femission) ± 0.5 MHz. If the spectrum analyzer does not have a band-power function, then sum the amplitude levels (in power units) at 100 kHz intervals extending across the 1 MHz spectrum defined by femission ± 0.5 MHz.

A correction factor shall be added to the measurement results prior to comparing with the emission limit to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in step f), then the applicable correction factor is $[10 \log (1 / D)]$, where D is the duty cycle.

2) If linear voltage averaging mode was used in step f), then the applicable correction factor is $[20 \log (1 / D)]$, where D is the duty cycle.

3) If a specific emission is demonstrated to be continuous ($D \geq 98\%$) rather than turning ON and

OFF with the transmit cycle, then no duty cycle correction is required for that emission.

Reduction of the measured emission amplitude levels to account for operational duty cycle is not permitted. Determining compliance is based on emission levels occurring during transmission—it is not based on an average across ON and OFF times of the transmitter.

5.8.4 Test Result

Please refer to ANNEX A.7.

5.9 Power Spectral density (PSD)

5.9.1 Limit

FCC §15.247(e); RSS-247, 6.3.1 (b)

The same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of Section 5.4(4), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

5.9.2 Test Setup

See section 4.5.1 (Diagram 1) for test setup description for the antenna port. The photo of test setup please refer to ANNEX B.

5.9.3 Test Procedure

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.

Set the VBW $\geq 3 \text{ RBW}$.

Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.9.4 Test Result

Please refer to ANNEX A.8.

ANNEX A TEST RESULT

A.1 Output Power, E.I.R.P

Duty Cycle

Test Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle	Duty Factor
GFSK (BLE 1Mbps)	2.087	2.4928	83.72%	0.77
GFSK (BLE 2Mbps)	1.058	1.8841	56.15%	2.51

Peak Power Test Data

Peak Power Test Data					
Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	3.53	2.25	30	1000	Pass
Middle Channel	3.69	2.34			Pass
High Channel	2.30	1.70			Pass

Channel	Measured Output Peak Power		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	2.64	1.84	30	1000	Pass
Middle Channel	3.91	2.46			Pass
High Channel	2.74	1.88			Pass


E.I.R.P Test Data (For ISSED)

Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 1Mbps)		dBm	mW	
	dBm	mW			
Low Channel	6.48	4.45	36	4000	Pass
Middle Channel	6.64	4.61			Pass
High Channel	5.25	3.35			Pass


Channel	E.I.R.P		Limit		Verdict
	GFSK (BLE 2Mbps)		dBm	mW	
	dBm	mW			
Low Channel	5.59	3.62	36	4000	Pass
Middle Channel	6.86	4.85			Pass
High Channel	5.69	3.71			Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL

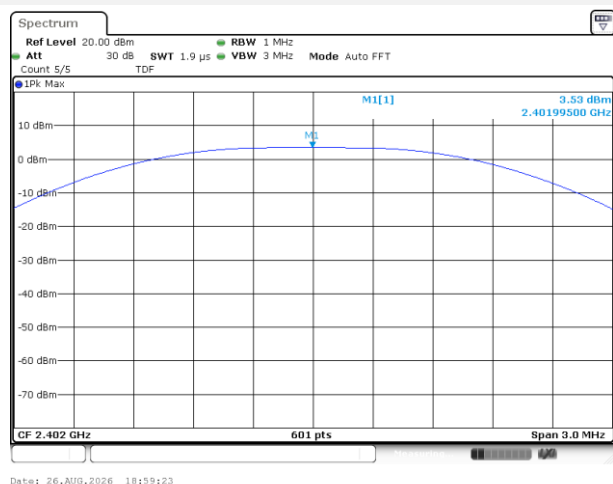


GFSK (BLE 1Mbps) MIDDLE CHANNEL

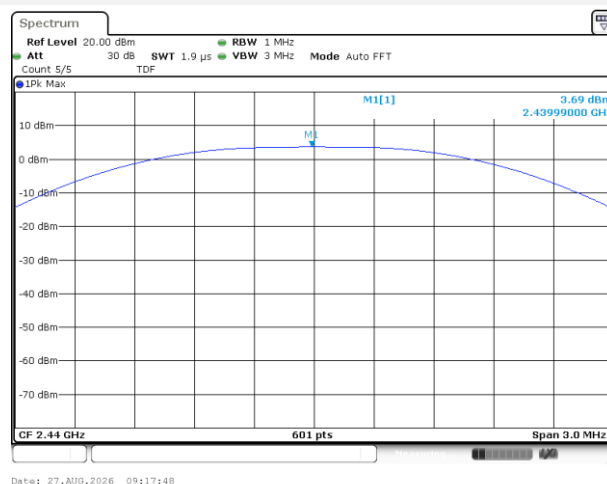


GFSK (BLE 1Mbps) HIGH CHANNEL

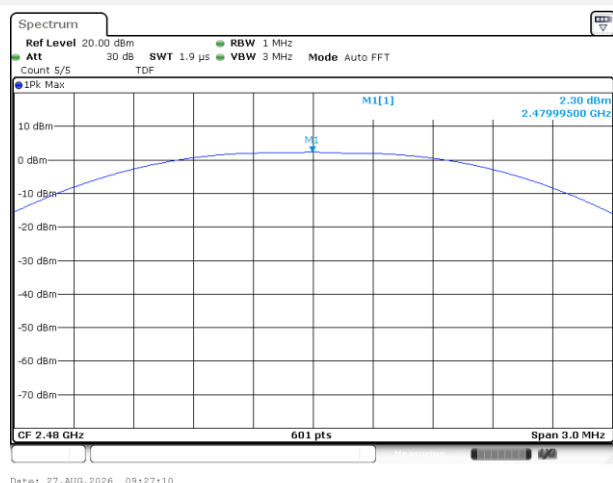


GFSK (BLE 2Mbps) LOW CHANNEL

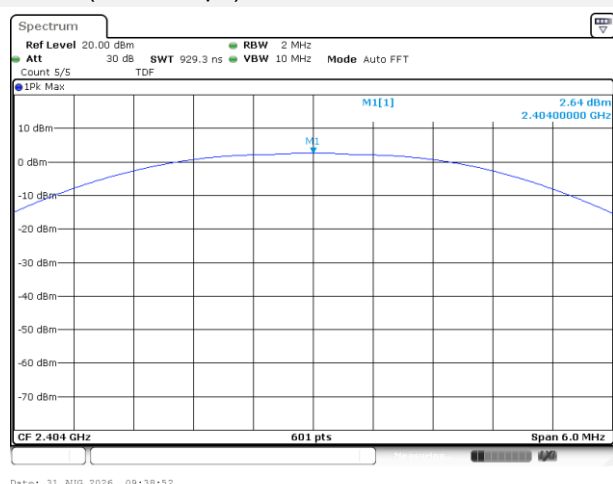

GFSK (BLE 2Mbps) MIDDLE CHANNEL

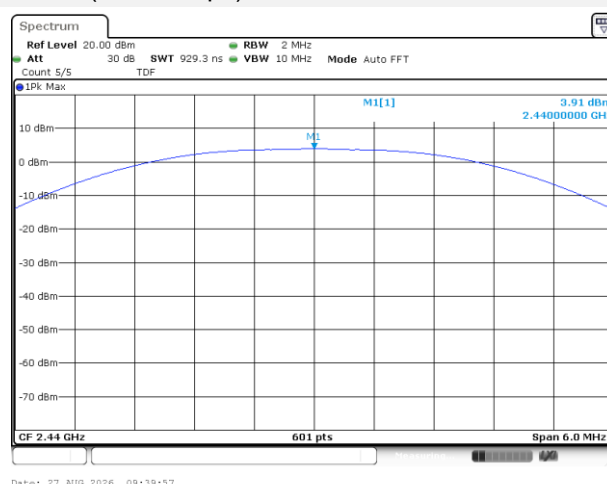

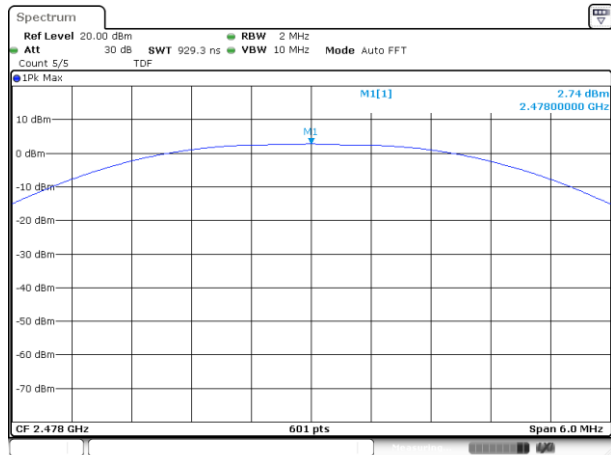GFSK (BLE 2Mbps) HIGH CHANNEL

Date: 27.AUG.2026 09:45:09

A.2 Occupied Bandwidth

Test Data


Test Mode	GFSK (BLE 1Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	646.240	1033.285	≥500
Middle Channel	643.310	1024.602	≥500
High Channel	640.380	1028.944	≥500

Test Mode	GFSK (BLE 2Mbps)		
Channel	6 dB Bandwidth (kHz)	99% Bandwidth (kHz)	6 dB Bandwidth Limits (kHz)
Low Channel	1118.900	1992.000	≥500
Middle Channel	1118.900	2016.000	≥500
High Channel	1118.900	2034.000	≥500

Test Plots


6 dB Bandwidth

GFSK (BLE 1Mbps) LOW CHANNEL

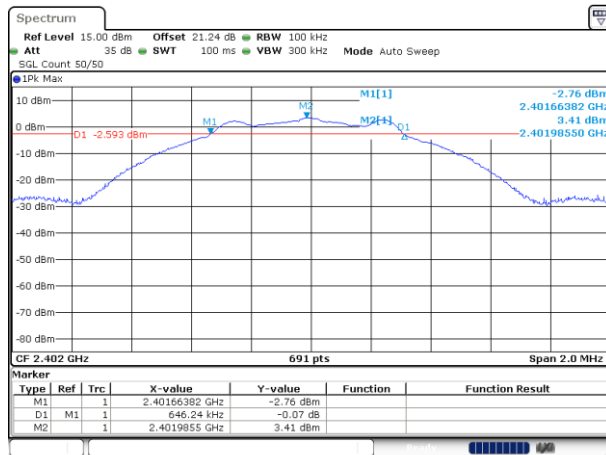


Date: 26.AUG.2026 19:00:13

GFSK (BLE 1Mbps) MIDDLE CHANNEL

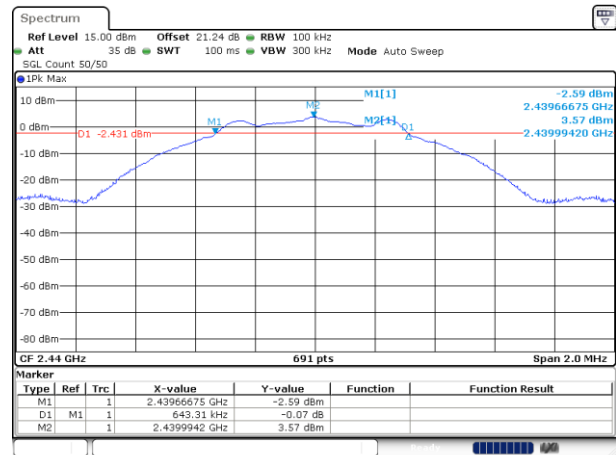


Date: 27.AUG.2026 09:18:12

GFSK (BLE 1Mbps) HIGH CHANNEL

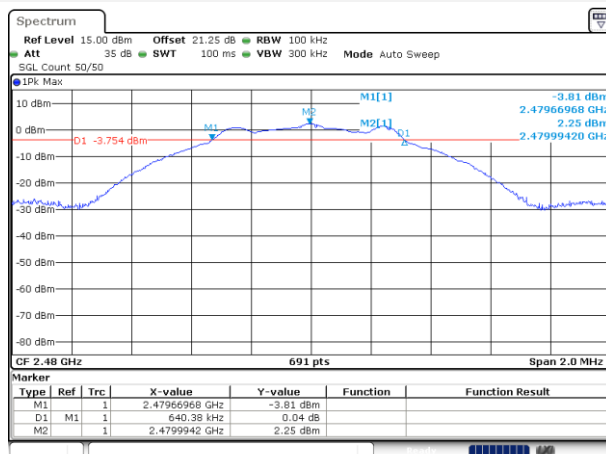


Date: 27.AUG.2026 09:26:09

GFSK (BLE 2Mbps) LOW CHANNEL




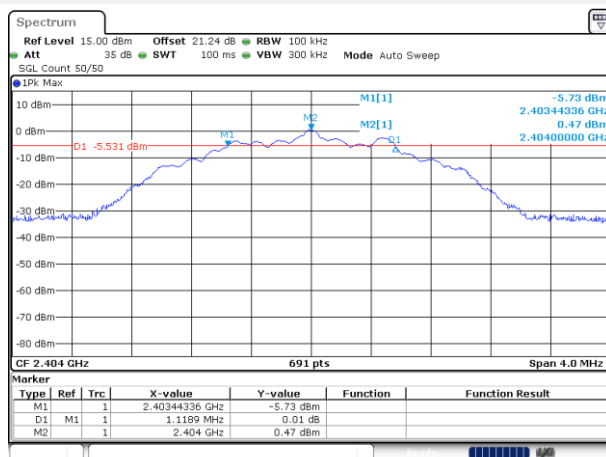


Date: 27.AUG.2026 09:35:28


GFSK (BLE 2Mbps) MIDDLE CHANNEL

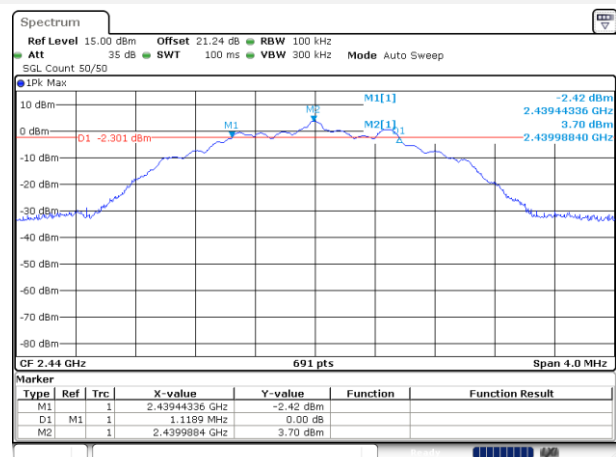

Date: 27.AUG.2026 09:40:21

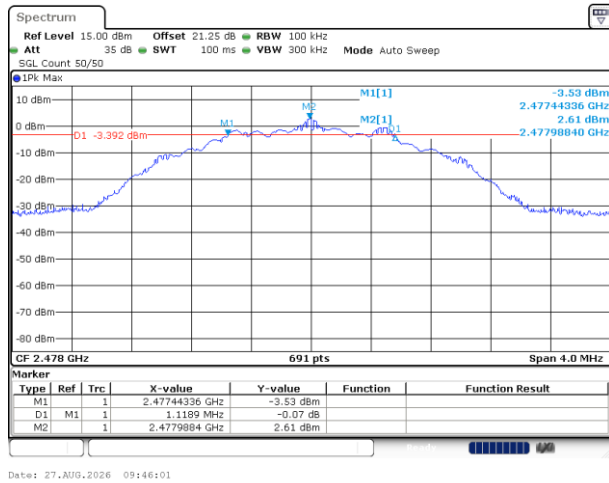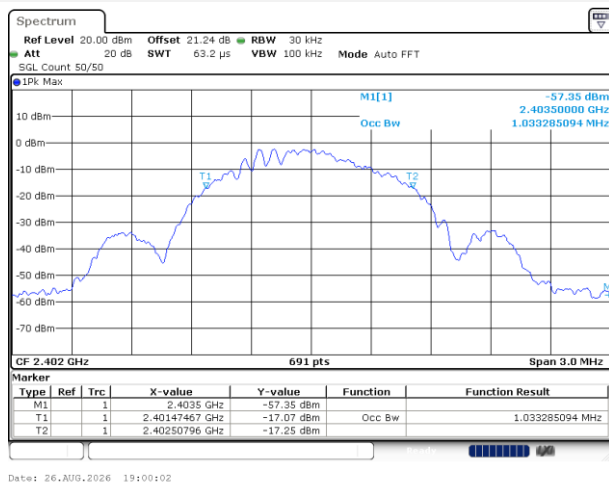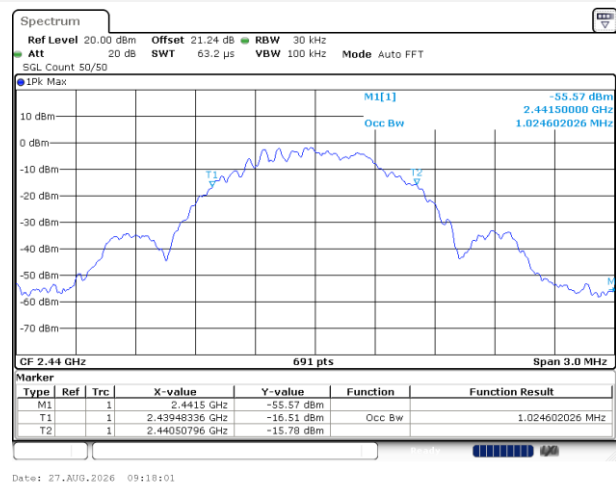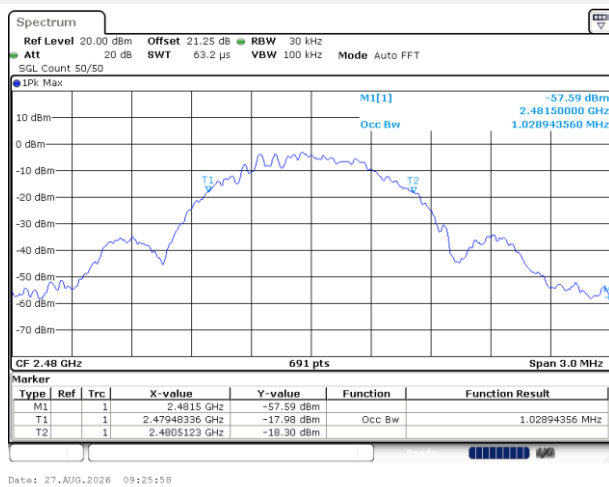
GFSK (BLE 2Mbps) HIGH CHANNEL**99% Bandwidth****GFSK (BLE 1Mbps) LOW CHANNEL****GFSK (BLE 1Mbps) MIDDLE CHANNEL****GFSK (BLE 1Mbps) HIGH CHANNEL**

GFSK (BLE 2Mbps) LOW CHANNEL

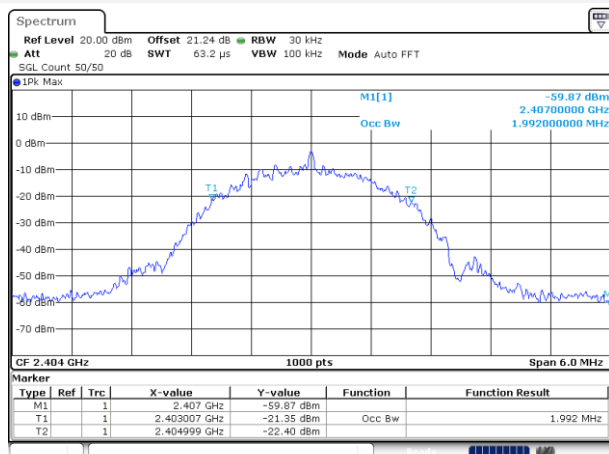


Date: 27.AUG.2026 09:35:17

GFSK (BLE 2Mbps) MIDDLE CHANNEL

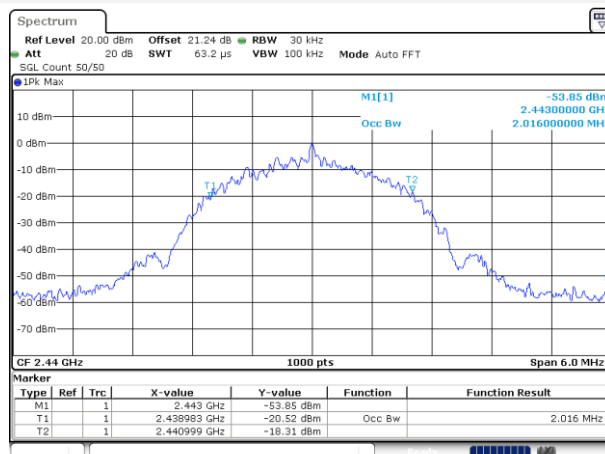

Date: 27.AUG.2026 09:40:10

GFSK (BLE 2Mbps) HIGH CHANNEL

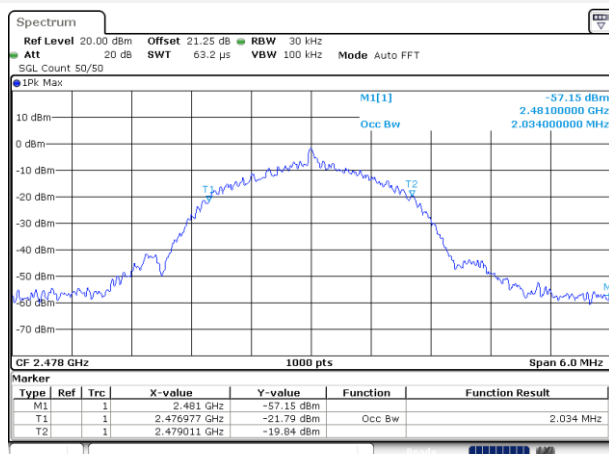

Date: 27.AUG.2026 09:45:50

A.3 Conducted Spurious Emissions


Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-30.21	3.07	-16.93	Pass
Middle Channel	-35.84	3.58	-16.42	Pass
High Channel	-28.45	2.05	-17.95	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-28.46	2.14	-17.86	Pass
Middle Channel	-29.44	3.58	-16.42	Pass
High Channel	-27.92	2.51	-17.49	Pass


Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL

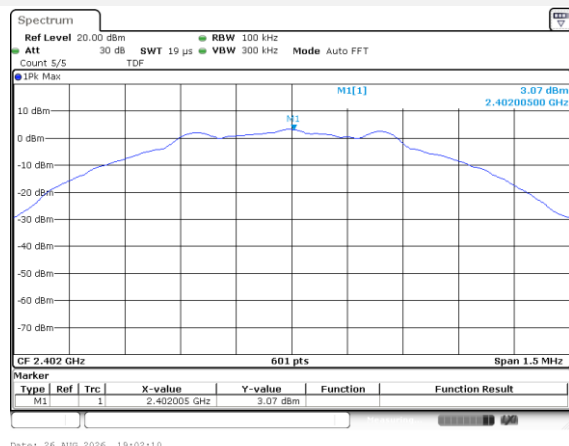


Date: 26.AUG.2026 19:02:10

GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

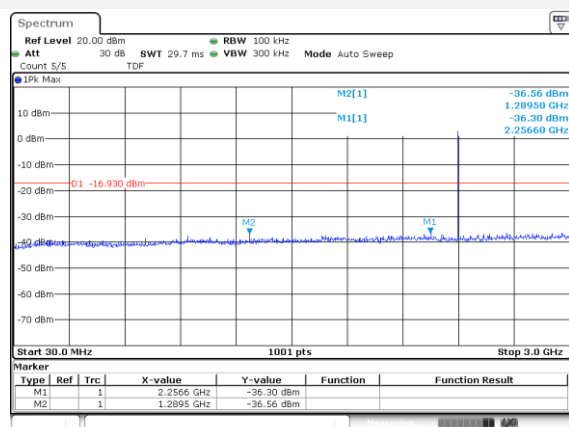


Date: 26.AUG.2026 19:02:53

GFSK (BLE 1Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

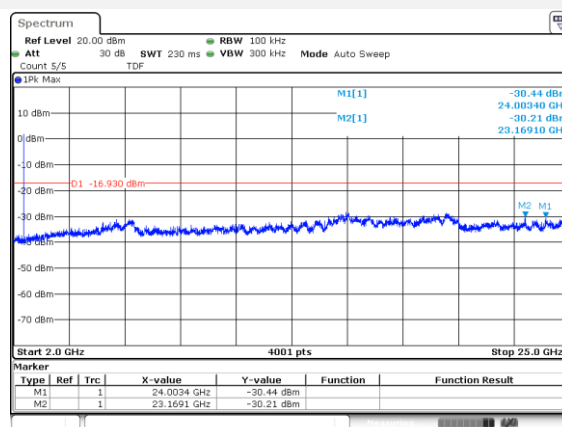


Date: 26.AUG.2026 19:03:24

GFSK (BLE 1Mbps) MIDDLE CHANNEL, CARRIER LEVEL

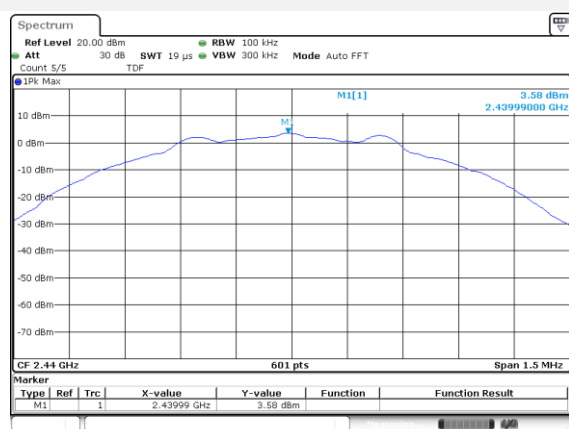


Date: 2.SEP.2026 11:10:56

GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

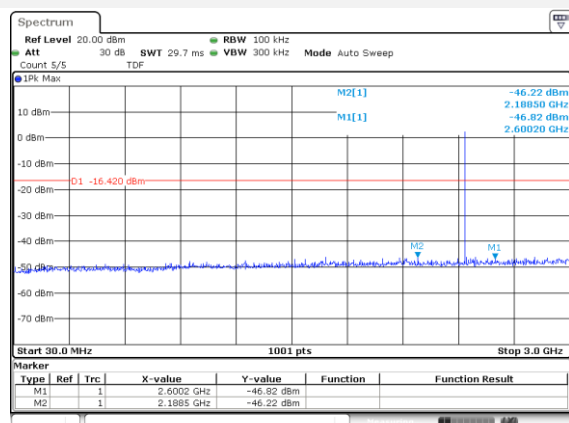


Date: 2.SEP.2026 11:11:40

GFSK (BLE 1Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

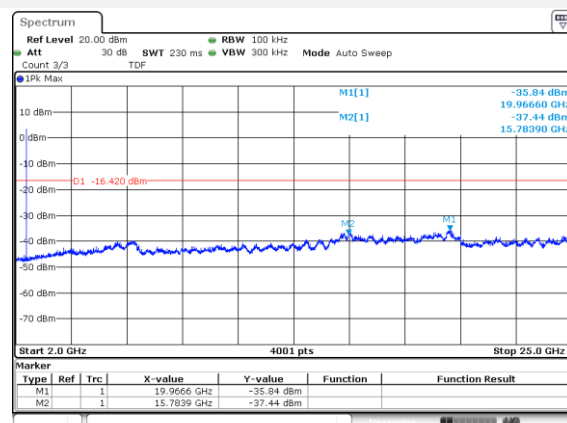


Date: 2.SEP.2026 11:42:39

GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL

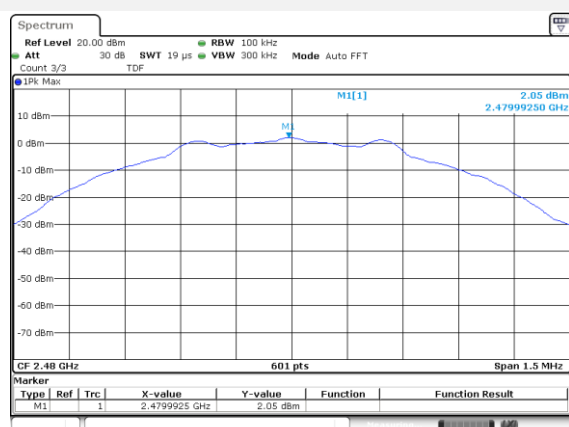


Date: 27.AUG.2026 09:27:30

GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

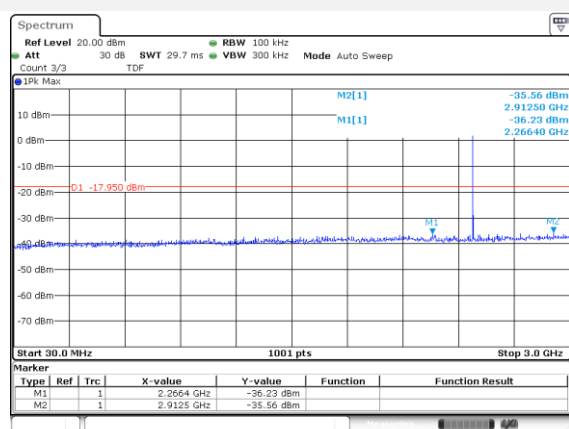


Date: 27.AUG.2026 09:28:35

GFSK (BLE 1Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

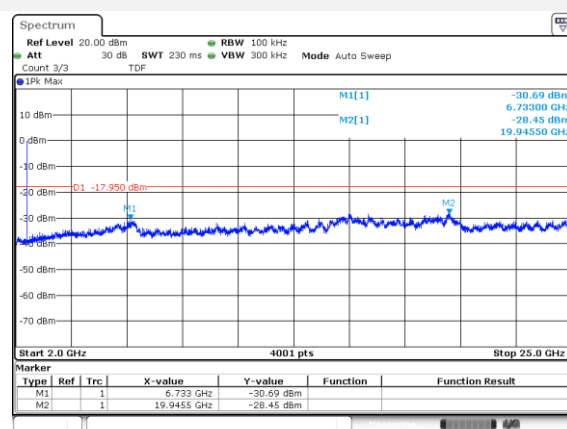


Date: 27.AUG.2026 09:29:16

GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

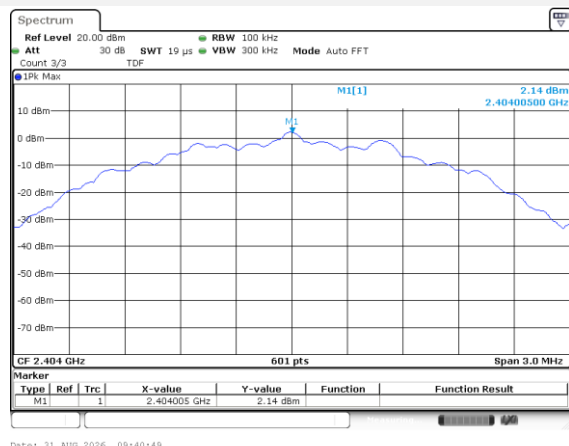


Date: 31.AUG.2026 09:40:49

GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

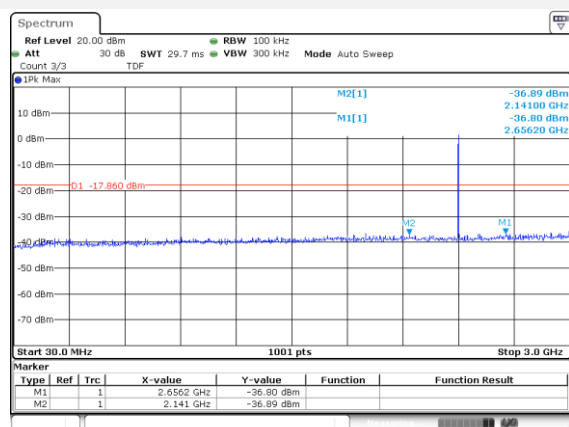


Date: 31.AUG.2026 09:42:20

GFSK (BLE 2Mbps) LOW CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

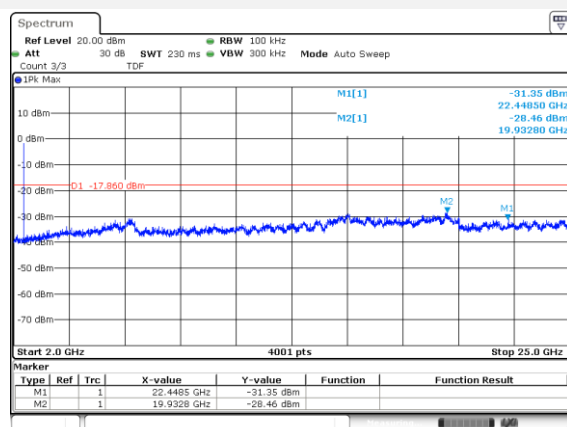


Date: 31.AUG.2026 09:42:58

GFSK (BLE 2Mbps) MIDDLE CHANNEL, CARRIER LEVEL

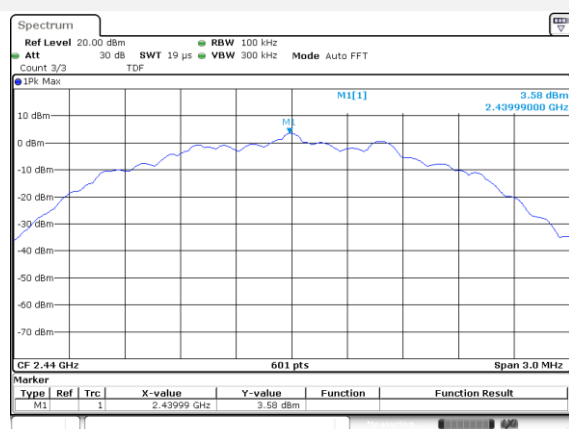


Date: 27.AUG.2026 09:40:34


GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

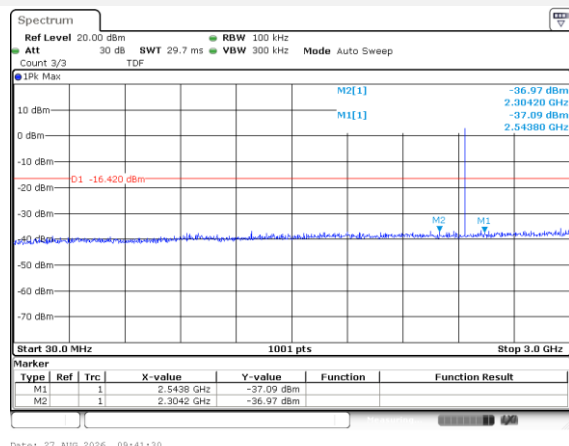


GFSK (BLE 2Mbps) MIDDLE CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

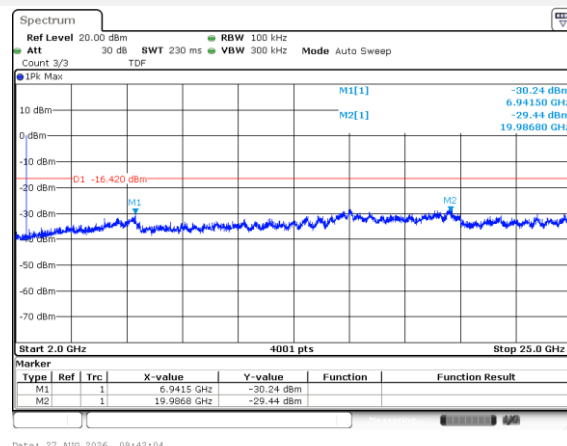


GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER LEVEL

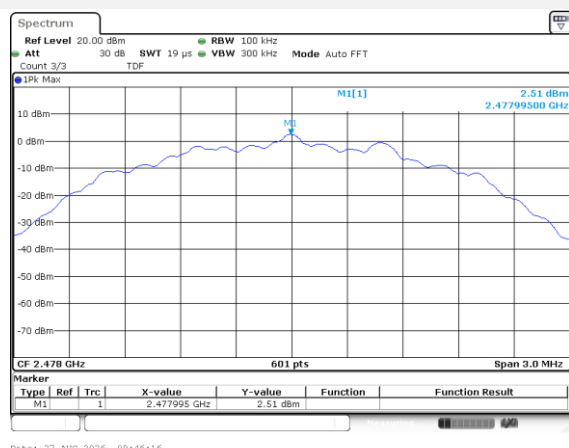

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

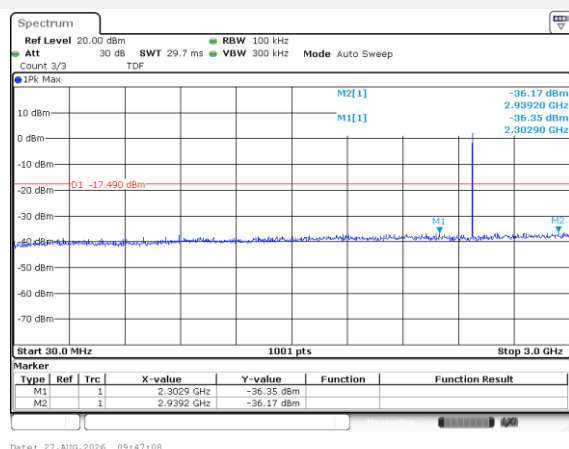

GFSK (BLE 2Mbps) HIGH CHANNEL, SPURIOUS 2 GHz ~ 25 GHz

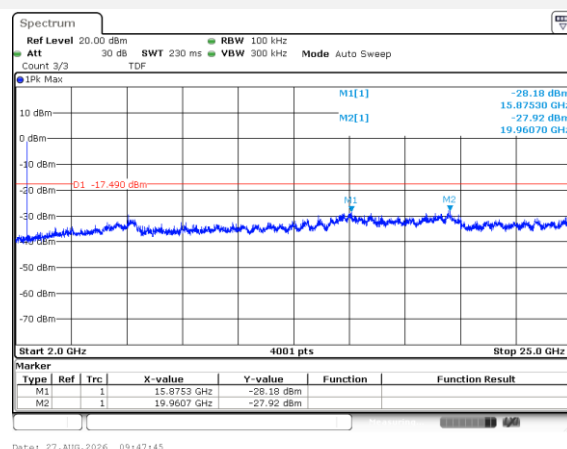

A.4 Band Edge (Authorized-band band-edge)

Note: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Test Data

GFSK (BLE 1Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.05	3.07	-16.93	Pass
High Channel	-38.16	2.05	-17.95	Pass

GFSK (BLE 2Mbps)				
Channel	Measured Max. Band Edge Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low Channel	-37.65	2.14	-17.86	Pass
High Channel	-38.36	2.51	-17.49	Pass


Test Plots

GFSK (BLE 1Mbps) LOW CHANNEL, CARRIER LEVEL

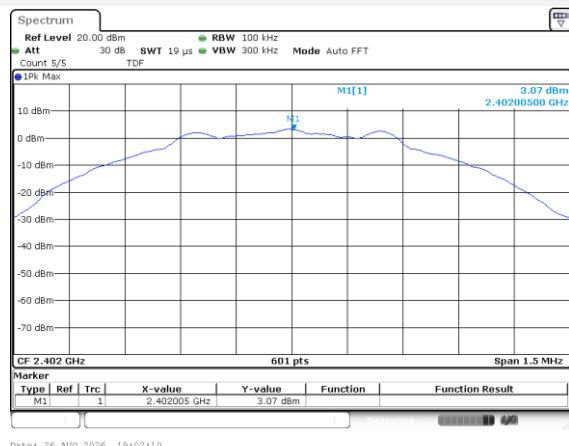


Date: 26.AUG.2026 19:02:10

GFSK (BLE 1Mbps) LOW CHANNEL, BAND EDGE

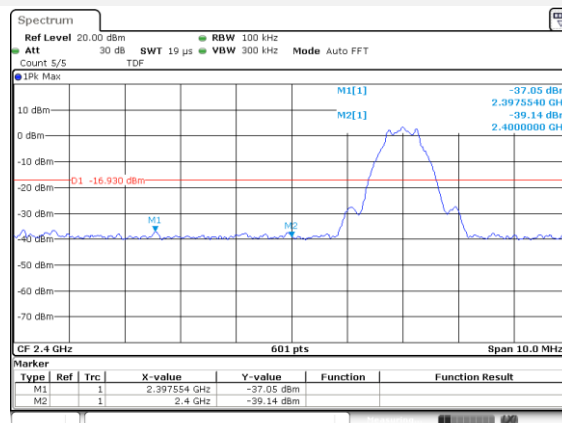


Date: 26.AUG.2026 19:03:40

GFSK (BLE 1Mbps) HIGH CHANNEL, CARRIER LEVEL

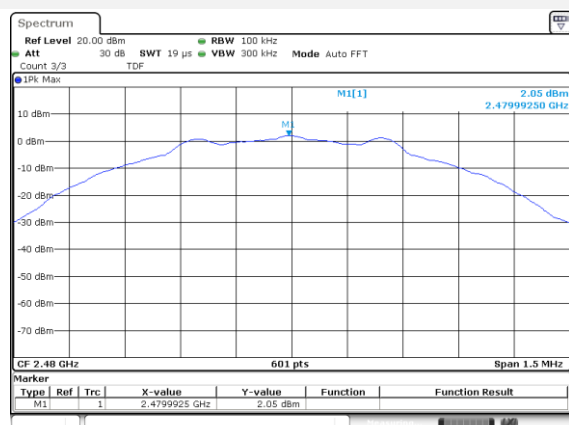


Date: 27.AUG.2026 09:27:30

GFSK (BLE 1Mbps) HIGH CHANNEL, BAND EDGE

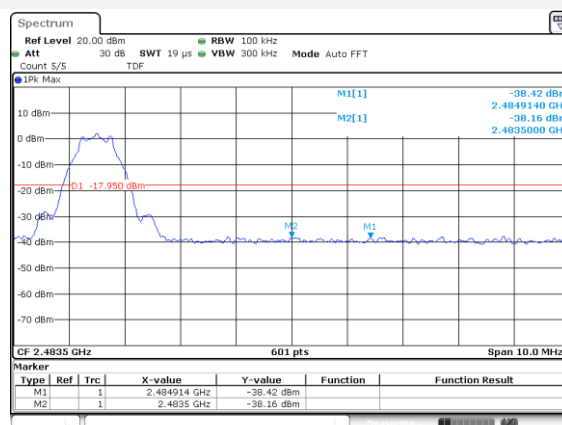


Date: 27.AUG.2026 09:29:30

GFSK (BLE 2Mbps) LOW CHANNEL, CARRIER LEVEL

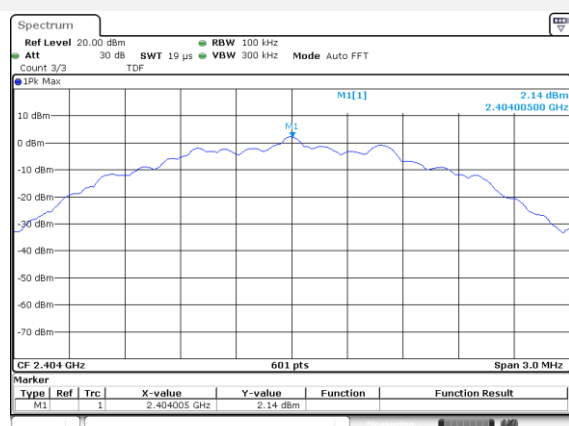


Date: 31.AUG.2026 09:40:49

GFSK (BLE 2Mbps) LOW CHANNEL, BAND EDGE

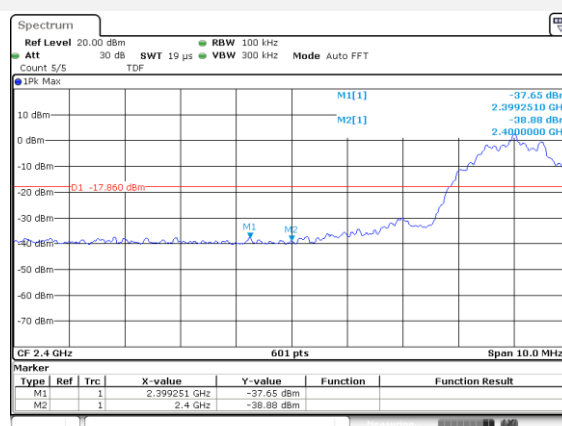


Date: 31.AUG.2026 09:43:10

GFSK (BLE 2Mbps) HIGH CHANNEL, CARRIER
LEVEL

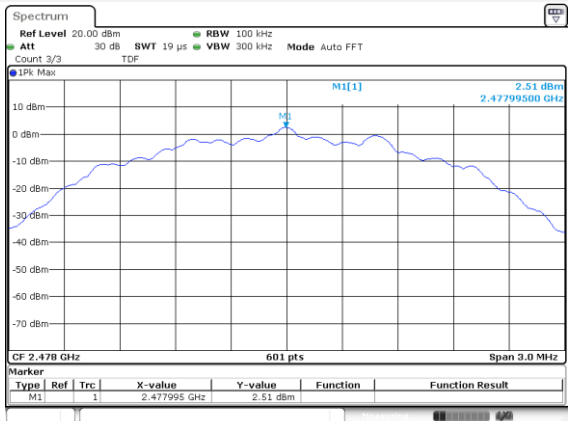

Date: 27.AUG.2026 09:46:16

GFSK (BLE 2Mbps) HIGH CHANNEL, BAND
EDGE

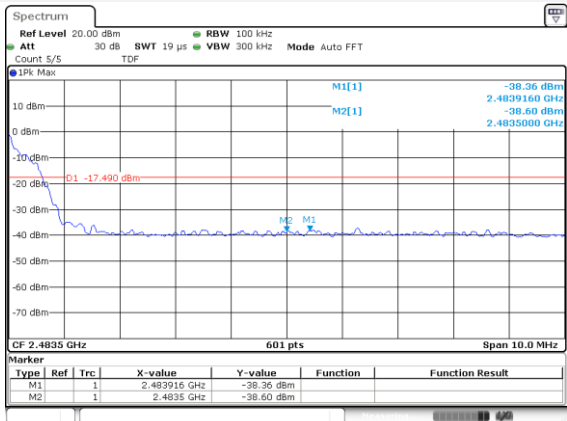

Date: 27.AUG.2026 09:47:57

A.5 Conducted Emissions

Note¹: The EUT is working in the Normal link mode. All modes have been tested and normal link mode is worst.


Note²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

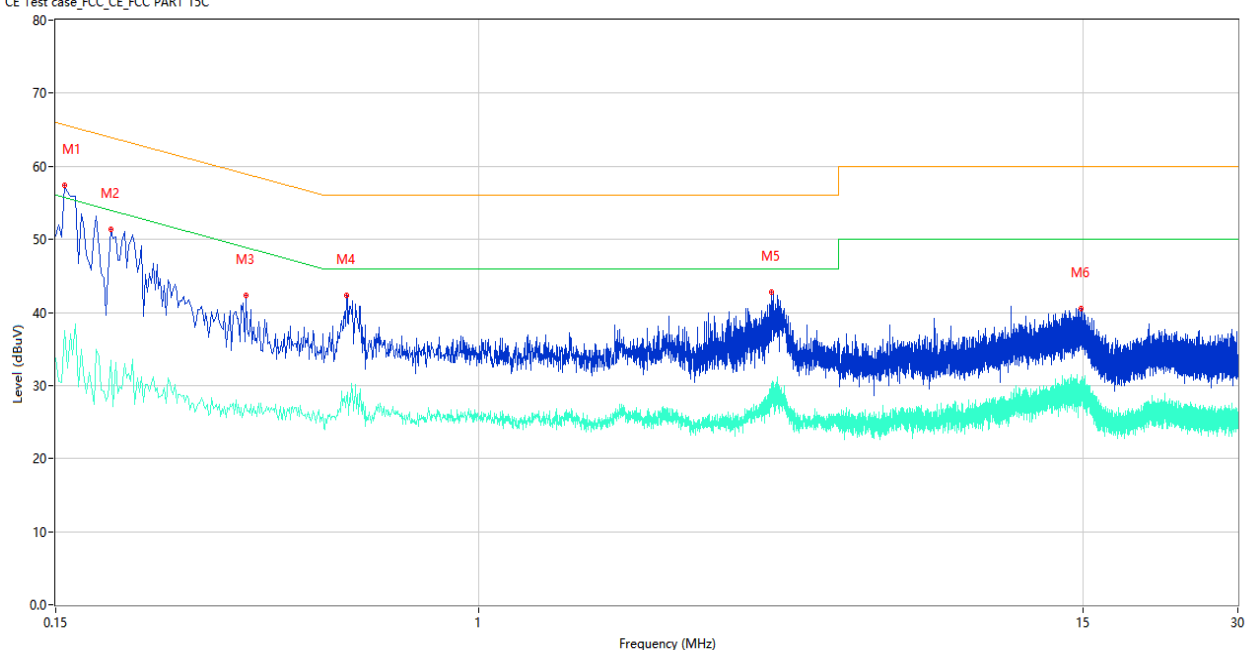

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.156	57.41	9.74	65.67	8.26	Peak	L	Pass
1**	0.156	37.58	9.74	55.67	18.09	AV	L	Pass
2	0.192	51.36	9.74	63.95	12.59	Peak	L	Pass
2**	0.192	33.46	9.74	53.95	20.49	AV	L	Pass
3	0.352	42.32	10.72	58.92	16.60	Peak	L	Pass
3**	0.352	27.45	10.72	48.92	21.47	AV	L	Pass
4	0.552	42.38	10.01	56.00	13.62	Peak	L	Pass
4**	0.552	28.60	10.01	46.00	17.40	AV	L	Pass
5	3.708	42.76	10.28	56.00	13.24	Peak	L	Pass
5**	3.708	29.58	10.28	46.00	16.42	AV	L	Pass
6	14.844	40.50	10.34	60.00	19.50	Peak	L	Pass
6**	14.844	30.71	10.34	50.00	19.29	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

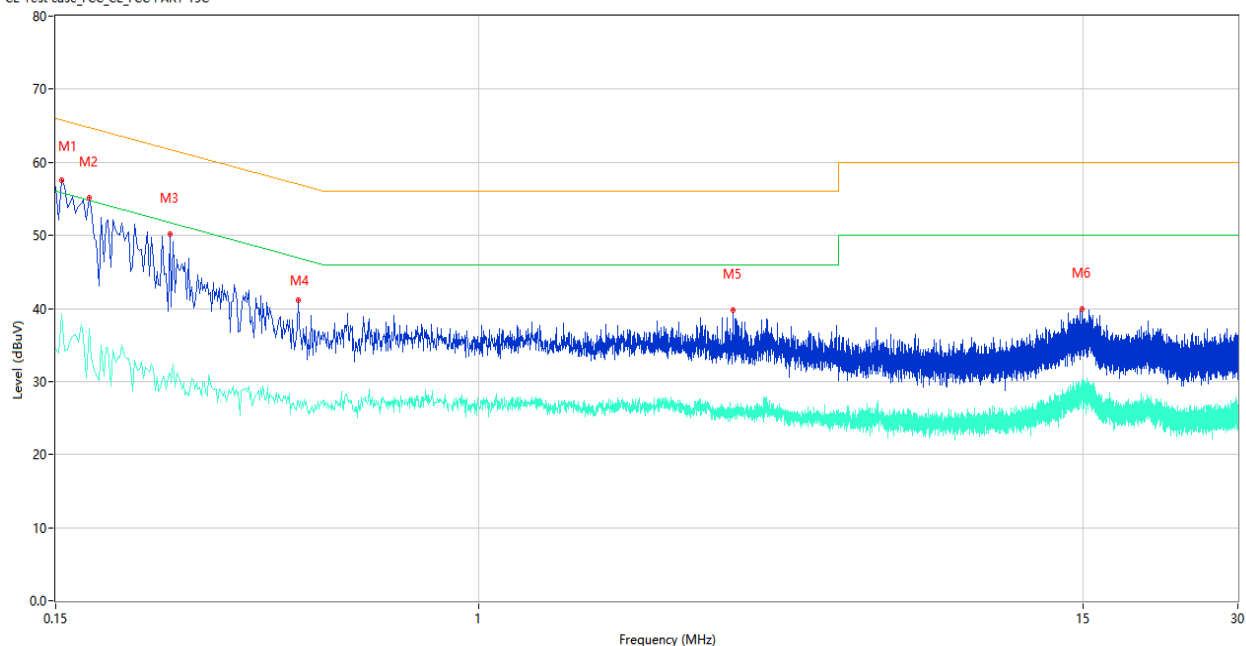

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	57.49	9.74	65.78	8.29	Peak	N	Pass
1**	0.154	39.11	9.74	55.78	16.67	AV	N	Pass
2	0.174	55.16	9.74	64.77	9.61	Peak	N	Pass
2**	0.174	37.14	9.74	54.77	17.63	AV	N	Pass
3	0.250	50.15	9.73	61.76	11.61	Peak	N	Pass
3**	0.250	31.21	9.73	51.76	20.55	AV	N	Pass
4	0.444	41.11	10.06	56.99	15.88	Peak	N	Pass
4**	0.444	27.44	10.06	46.99	19.55	AV	N	Pass
5	3.120	39.70	9.88	56.00	16.30	Peak	N	Pass
5**	3.120	25.30	9.88	46.00	20.70	AV	N	Pass
6	14.952	39.93	10.53	60.00	20.07	Peak	N	Pass
6**	14.952	28.72	10.53	50.00	21.28	AV	N	Pass

A.6 Radiated Spurious Emission

Note ¹: The symbol of “--” in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


Note ⁴: The EUT is working in the Normal link mode below 1 GHz. All modes have been tested and BLE 2M-Middle channel mode is the worst.

Note ⁵: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

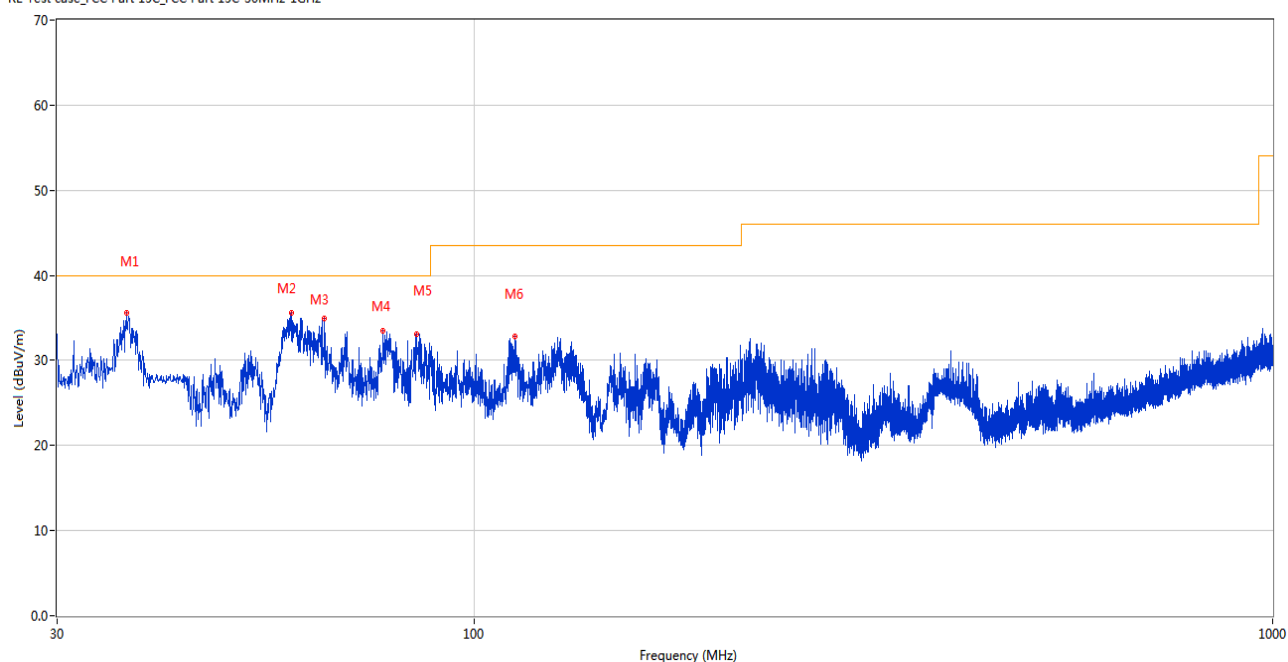

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	36.645	35.61	-26.05	40.0	4.39	Peak	0.00	200	Horizontal	Pass
2	59.003	35.55	-25.34	40.0	4.45	Peak	0.00	200	Horizontal	Pass
3	64.920	34.94	-26.31	40.0	5.06	Peak	0.00	200	Horizontal	Pass
4	76.802	33.42	-28.07	40.0	6.58	Peak	0.00	200	Horizontal	Pass
5	84.514	33.04	-29.68	40.0	6.96	Peak	0.00	200	Horizontal	Pass
6	112.498	32.79	-27.45	43.5	10.71	Peak	0.00	200	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

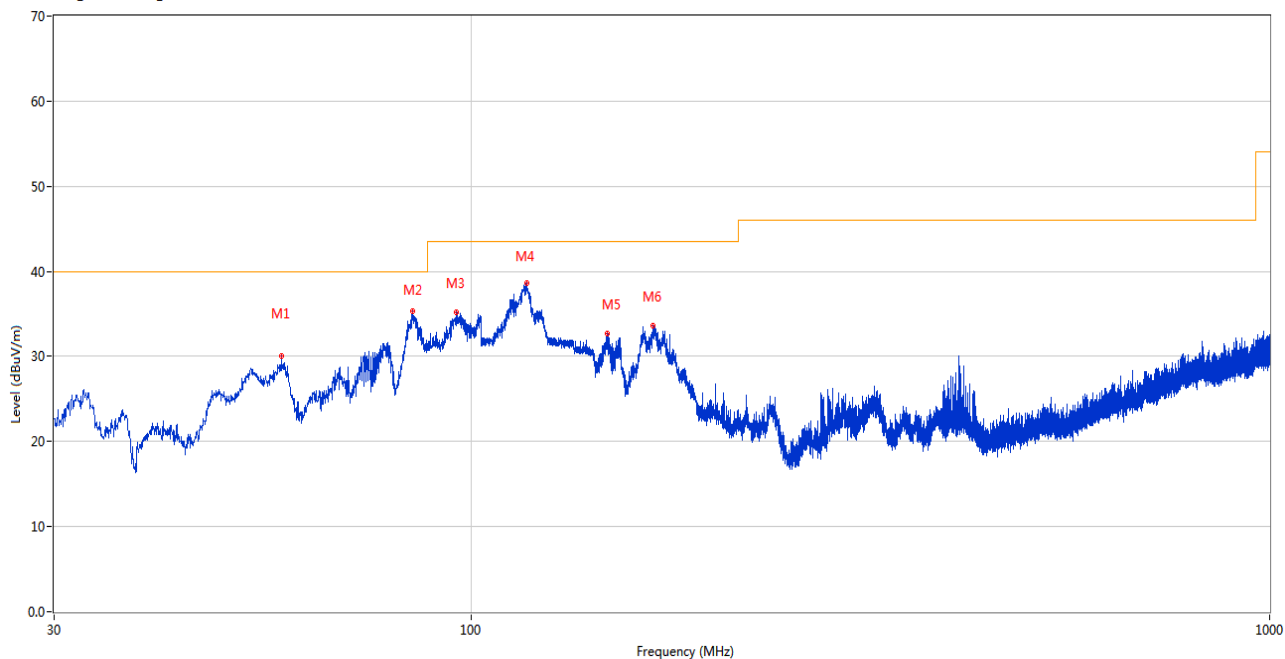

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	57.791	30.11	-25.21	40.0	9.89	Peak	360.00	100	Vertical	Pass
2	84.368	35.27	-29.65	40.0	4.73	Peak	336.00	100	Vertical	Pass
3	95.620	35.18	-29.64	43.5	8.32	Peak	275.00	100	Vertical	Pass
4	117.446	38.68	-26.87	43.5	4.82	Peak	309.00	100	Vertical	Pass
5	147.904	32.69	-23.74	43.5	10.81	Peak	360.00	100	Vertical	Pass
6	169.001	33.61	-24.21	43.5	9.89	Peak	360.00	100	Vertical	Pass


Note¹: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note²: The spurious from 18GHz-25GHz is noise only, do not show on the report.

Note³: The RSE Plot only shows the worst-case scenario, while all other data are presented in tabular form.

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H


3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

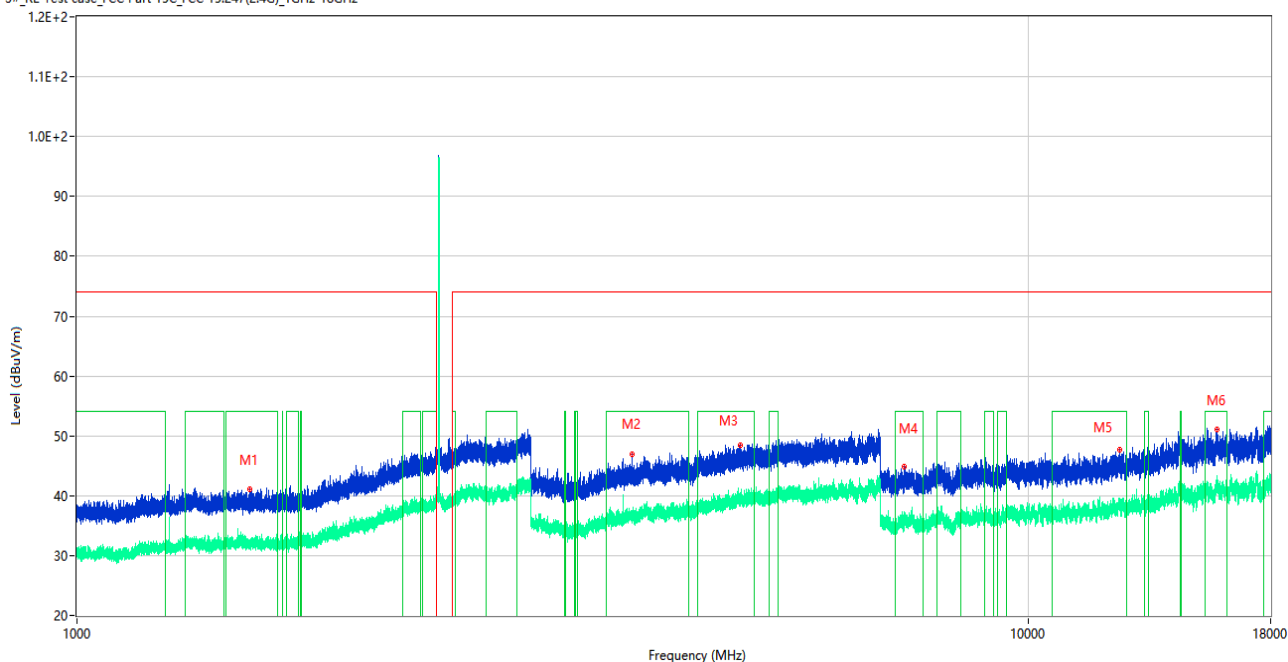

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1521.989	41.48	74.0	32.52	Peak	349.00	300	Horizontal	Pass
1**	1521.989	31.68	54.0	22.32	AV	349.00	300	Horizontal	Pass
2	3835.771	47.00	74.0	27.00	Peak	264.00	100	Horizontal	Pass
2**	3835.771	37.49	54.0	16.51	AV	264.00	100	Horizontal	Pass
3	4988.872	48.51	74.0	25.49	Peak	206.00	200	Horizontal	Pass
3**	4988.872	39.28	54.0	14.72	AV	206.00	200	Horizontal	Pass
4	7421.478	44.93	74.0	29.07	Peak	345.00	300	Horizontal	Pass
4**	7421.478	36.97	54.0	17.03	AV	345.00	300	Horizontal	Pass
5	12495.053	47.67	74.0	26.33	Peak	309.00	200	Horizontal	Pass
5**	12495.053	38.60	54.0	15.40	AV	309.00	200	Horizontal	Pass
6	15805.416	51.23	74.0	22.77	Peak	168.00	100	Horizontal	Pass
6**	15805.416	42.03	54.0	11.97	AV	168.00	100	Horizontal	Pass

GFSK (BLE 1Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

3#_RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

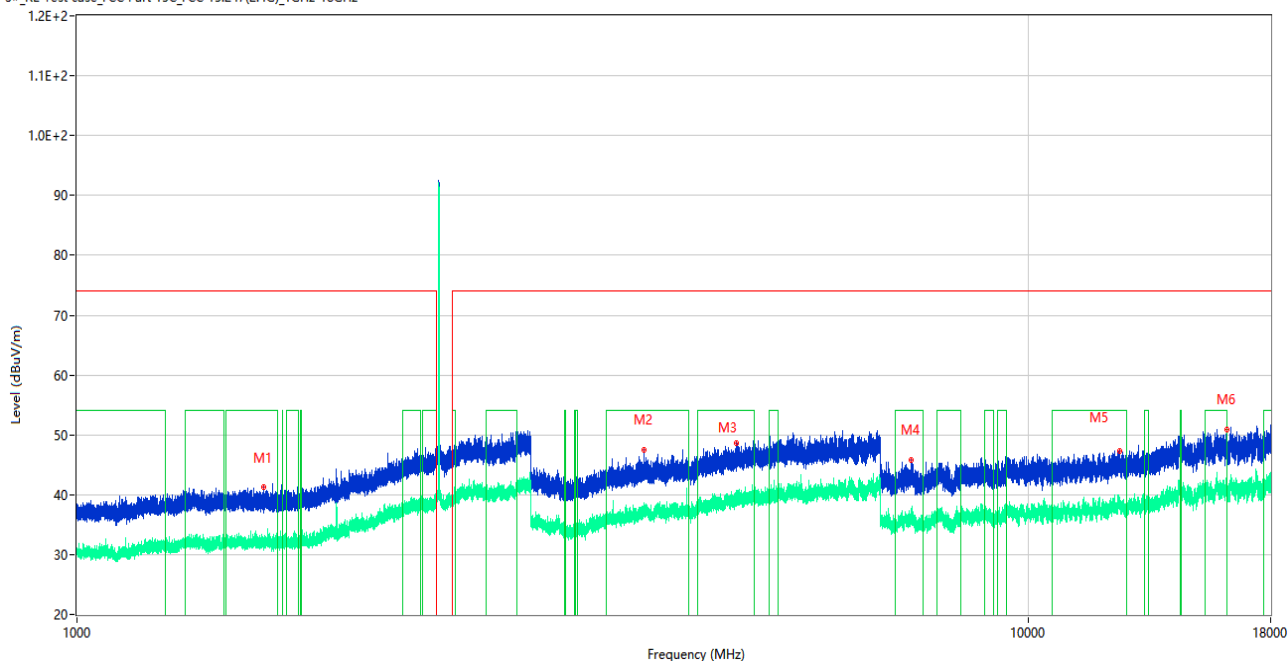

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1570.817	41.25	74.0	32.75	Peak	226.00	100	Vertical	Pass
1**	1570.817	31.86	54.0	22.14	AV	226.00	100	Vertical	Pass
2	3945.760	47.71	74.0	26.29	Peak	316.00	200	Vertical	Pass
2**	3945.760	37.79	54.0	16.21	AV	316.00	200	Vertical	Pass
3	4937.956	48.85	74.0	25.15	Peak	355.00	200	Vertical	Pass
3**	4937.956	39.05	54.0	14.95	AV	355.00	200	Vertical	Pass
4	7543.751	46.10	74.0	27.90	Peak	71.00	200	Vertical	Pass
4**	7543.751	37.08	54.0	16.92	AV	71.00	200	Vertical	Pass
5	12481.596	47.58	74.0	26.42	Peak	294.00	300	Vertical	Pass
5**	12481.596	38.77	54.0	15.23	AV	294.00	300	Vertical	Pass
6	16192.146	51.17	74.0	22.83	Peak	290.00	300	Vertical	Pass
6**	16192.146	41.20	54.0	12.80	AV	290.00	300	Vertical	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1517.180	41.09	74.0	32.91	Peak	109.00	100	Horizontal	Pass
1**	1517.180	31.80	54.0	22.21	AV	109.00	100	Horizontal	Pass
2	3839.698	46.37	74.0	27.63	Peak	279.00	100	Horizontal	Pass
2**	3839.698	37.00	54.0	17.00	AV	279.00	100	Horizontal	Pass
3	4985.682	47.73	74.0	26.27	Peak	92.00	200	Horizontal	Pass
3**	4985.682	39.20	54.0	14.80	AV	92.00	200	Horizontal	Pass
4	7421.545	44.27	74.0	29.73	Peak	194.00	200	Horizontal	Pass
4**	7421.545	36.83	54.0	17.17	AV	194.00	200	Horizontal	Pass
5	12496.363	46.76	74.0	27.24	Peak	285.00	100	Horizontal	Pass
5**	12496.363	38.51	54.0	15.49	AV	285.00	100	Horizontal	Pass
6	15808.069	50.49	74.0	23.52	Peak	97.00	300	Horizontal	Pass
6**	15808.069	38.20	54.0	15.80	AV	97.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1569.377	40.63	74.0	33.37	Peak	138.00	400	Vertical	Pass
1**	1569.377	31.44	54.0	22.56	AV	138.00	400	Vertical	Pass
2	3947.627	47.20	74.0	26.80	Peak	325.00	400	Vertical	Pass
2**	3947.627	37.35	54.0	16.65	AV	325.00	400	Vertical	Pass
3	4933.595	48.75	74.0	25.26	Peak	353.00	200	Vertical	Pass
3**	4933.595	39.20	54.0	14.80	AV	353.00	200	Vertical	Pass
4	7544.501	45.68	74.0	28.32	Peak	104.00	100	Vertical	Pass
4**	7544.501	36.52	54.0	17.48	AV	104.00	100	Vertical	Pass
5	12478.290	47.28	74.0	26.72	Peak	286.00	200	Vertical	Pass
5**	12478.290	38.00	54.0	16.00	AV	286.00	200	Vertical	Pass
6	16191.517	51.18	74.0	22.82	Peak	205.00	400	Vertical	Pass
6**	16191.517	37.64	54.0	16.36	AV	205.00	400	Vertical	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1516.804	40.36	74.0	33.64	Peak	34.00	100	Horizontal	Pass
1**	1516.804	31.27	54.0	22.74	AV	34.00	100	Horizontal	Pass
2	3841.460	46.69	74.0	27.31	Peak	315.00	300	Horizontal	Pass
2**	3841.460	36.35	54.0	17.65	AV	315.00	300	Horizontal	Pass
3	4991.763	48.10	74.0	25.90	Peak	117.00	200	Horizontal	Pass
3**	4991.763	38.50	54.0	15.50	AV	117.00	200	Horizontal	Pass
4	7422.802	44.59	74.0	29.41	Peak	149.00	300	Horizontal	Pass
4**	7422.802	36.16	54.0	17.84	AV	149.00	300	Horizontal	Pass
5	12497.832	46.73	74.0	27.27	Peak	295.00	100	Horizontal	Pass
5**	12497.832	38.27	54.0	15.73	AV	295.00	100	Horizontal	Pass
6	15806.937	50.53	74.0	23.48	Peak	283.00	300	Horizontal	Pass
6**	15806.937	38.43	54.0	15.57	AV	283.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1572.615	41.18	74.0	32.82	Peak	92.00	400	Vertical	Pass
1**	1572.615	31.74	54.0	22.26	AV	92.00	400	Vertical	Pass
2	3952.001	47.71	74.0	26.29	Peak	352.00	400	Vertical	Pass
2**	3952.001	37.71	54.0	16.29	AV	352.00	400	Vertical	Pass
3	4932.172	48.74	74.0	25.26	Peak	199.00	200	Vertical	Pass
3**	4932.172	39.32	54.0	14.68	AV	199.00	200	Vertical	Pass
4	7546.490	45.91	74.0	28.09	Peak	196.00	100	Vertical	Pass
4**	7546.490	36.94	54.0	17.06	AV	196.00	100	Vertical	Pass
5	12477.046	47.40	74.0	26.60	Peak	353.00	200	Vertical	Pass
5**	12477.046	38.54	54.0	15.46	AV	353.00	200	Vertical	Pass
6	16197.923	51.17	74.0	22.84	Peak	328.00	100	Vertical	Pass
6**	16197.923	38.26	54.0	15.74	AV	328.00	100	Vertical	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1283.548	41.20	74.0	32.80	Peak	102.00	300	Horizontal	Pass
1**	1283.548	31.64	54.0	22.37	AV	102.00	300	Horizontal	Pass
2	2767.279	46.46	74.0	27.54	Peak	237.00	200	Horizontal	Pass
2**	2767.279	36.57	54.0	17.43	AV	237.00	200	Horizontal	Pass
3	5167.976	47.62	74.0	26.38	Peak	345.00	200	Horizontal	Pass
3**	5167.976	38.98	54.0	15.02	AV	345.00	200	Horizontal	Pass
4	6804.664	44.06	74.0	29.94	Peak	278.00	200	Horizontal	Pass
4**	6804.664	36.95	54.0	17.05	AV	278.00	200	Horizontal	Pass
5	13470.273	46.80	74.0	27.20	Peak	171.00	400	Horizontal	Pass
5**	13470.273	38.08	54.0	15.92	AV	171.00	400	Horizontal	Pass
6	17464.029	50.16	74.0	23.85	Peak	176.00	400	Horizontal	Pass
6**	17464.029	38.81	54.0	15.19	AV	176.00	400	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1287.471	41.23	74.0	32.77	Peak	48.00	100	Vertical	Pass
1**	1287.471	31.65	54.0	22.35	AV	48.00	100	Vertical	Pass
2	2772.888	47.69	74.0	26.31	Peak	197.00	200	Vertical	Pass
2**	2772.888	37.64	54.0	16.36	AV	197.00	200	Vertical	Pass
3	5165.391	48.72	74.0	25.29	Peak	180.00	200	Vertical	Pass
3**	5165.391	39.24	54.0	14.76	AV	180.00	200	Vertical	Pass
4	6808.539	45.94	74.0	28.06	Peak	310.00	100	Vertical	Pass
4**	6808.539	36.89	54.0	17.11	AV	310.00	100	Vertical	Pass
5	13464.784	47.41	74.0	26.59	Peak	149.00	200	Vertical	Pass
5**	13464.784	38.55	54.0	15.45	AV	149.00	200	Vertical	Pass
6	17464.272	51.17	74.0	22.83	Peak	283.00	100	Vertical	Pass
6**	17464.272	38.19	54.0	15.81	AV	283.00	100	Vertical	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1282.667	40.45	74.0	33.55	Peak	184.00	400	Horizontal	Pass
1**	1282.667	31.18	54.0	22.83	AV	184.00	400	Horizontal	Pass
2	2767.194	46.56	74.0	27.44	Peak	166.00	100	Horizontal	Pass
2**	2767.194	37.01	54.0	16.99	AV	166.00	100	Horizontal	Pass
3	5168.532	48.25	74.0	25.75	Peak	171.00	200	Horizontal	Pass
3**	5168.532	38.63	54.0	15.37	AV	171.00	200	Horizontal	Pass
4	6806.715	44.92	74.0	29.08	Peak	39.00	100	Horizontal	Pass
4**	6806.715	36.11	54.0	17.89	AV	39.00	100	Horizontal	Pass
5	13465.609	46.80	74.0	27.20	Peak	222.00	400	Horizontal	Pass
5**	13465.609	37.88	54.0	16.12	AV	222.00	400	Horizontal	Pass
6	17464.895	50.67	74.0	23.34	Peak	181.00	100	Horizontal	Pass
6**	17464.895	38.17	54.0	15.83	AV	181.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1288.430	41.23	74.0	32.77	Peak	7.00	400	Vertical	Pass
1**	1288.430	31.68	54.0	22.33	AV	7.00	400	Vertical	Pass
2	2773.902	47.61	74.0	26.39	Peak	71.00	300	Vertical	Pass
2**	2773.902	37.71	54.0	16.29	AV	71.00	300	Vertical	Pass
3	5168.827	48.73	74.0	25.27	Peak	315.00	200	Vertical	Pass
3**	5168.827	39.25	54.0	14.75	AV	315.00	200	Vertical	Pass
4	6808.105	45.89	74.0	28.11	Peak	325.00	400	Vertical	Pass
4**	6808.105	36.94	54.0	17.06	AV	325.00	400	Vertical	Pass
5	13470.470	47.41	74.0	26.59	Peak	52.00	400	Vertical	Pass
5**	13470.470	38.52	54.0	15.48	AV	52.00	400	Vertical	Pass
6	17466.541	51.12	74.0	22.88	Peak	275.00	100	Vertical	Pass
6**	17466.541	38.18	54.0	15.82	AV	275.00	100	Vertical	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT H

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1281.858	40.99	74.0	33.01	Peak	292.00	100	Horizontal	Pass
1**	1281.858	31.77	54.0	22.24	AV	292.00	100	Horizontal	Pass
2	2770.235	46.31	74.0	27.69	Peak	56.00	400	Horizontal	Pass
2**	2770.235	36.82	54.0	17.18	AV	56.00	400	Horizontal	Pass
3	5392.303	48.36	74.0	25.64	Peak	263.00	200	Horizontal	Pass
3**	5392.303	39.29	54.0	14.71	AV	263.00	200	Horizontal	Pass
4	6519.236	44.58	74.0	29.42	Peak	248.00	100	Horizontal	Pass
4**	6519.236	36.95	54.0	17.05	AV	248.00	100	Horizontal	Pass
5	13355.711	47.24	74.0	26.76	Peak	49.00	200	Horizontal	Pass
5**	13355.711	38.05	54.0	15.95	AV	49.00	200	Horizontal	Pass
6	17437.948	50.20	74.0	23.81	Peak	87.00	300	Horizontal	Pass
6**	17437.948	38.30	54.0	15.70	AV	87.00	300	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL 1 GHz to 18 GHz, ANT V

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1283.106	41.20	74.0	32.80	Peak	41.00	200	Vertical	Pass
1**	1283.106	31.74	54.0	22.26	AV	41.00	200	Vertical	Pass
2	2768.371	47.62	74.0	26.38	Peak	94.00	200	Vertical	Pass
2**	2768.371	37.68	54.0	16.32	AV	94.00	200	Vertical	Pass
3	5288.336	48.80	74.0	25.20	Peak	23.00	200	Vertical	Pass
3**	5288.336	39.30	54.0	14.70	AV	23.00	200	Vertical	Pass
4	6654.548	45.95	74.0	28.06	Peak	225.00	300	Vertical	Pass
4**	6654.548	36.95	54.0	17.05	AV	225.00	300	Vertical	Pass
5	13304.483	47.42	74.0	26.59	Peak	102.00	100	Vertical	Pass
5**	13304.483	38.51	54.0	15.50	AV	102.00	100	Vertical	Pass
6	17417.418	51.13	74.0	22.87	Peak	202.00	100	Vertical	Pass
6**	17417.418	38.17	54.0	15.83	AV	202.00	100	Vertical	Pass

A.7 Band Edge (Restricted-band band-edge)

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.

Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2020 + Cor. 1-2023 + C63.10a-2024 + Errata to C63.10a-2024, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note ⁴: The Level (dBuV/m) has been corrected by factor.

Note ⁵: Both horizontal and vertical directions were pre tested, only the worst configuration has been reported in this report.

Note ⁶: The RSE Plot only shows the worst-case scenario, while all other data are presented in tabular form.


Test Data and Plots

GFSK (BLE 1Mbps) LOW CHANNEL

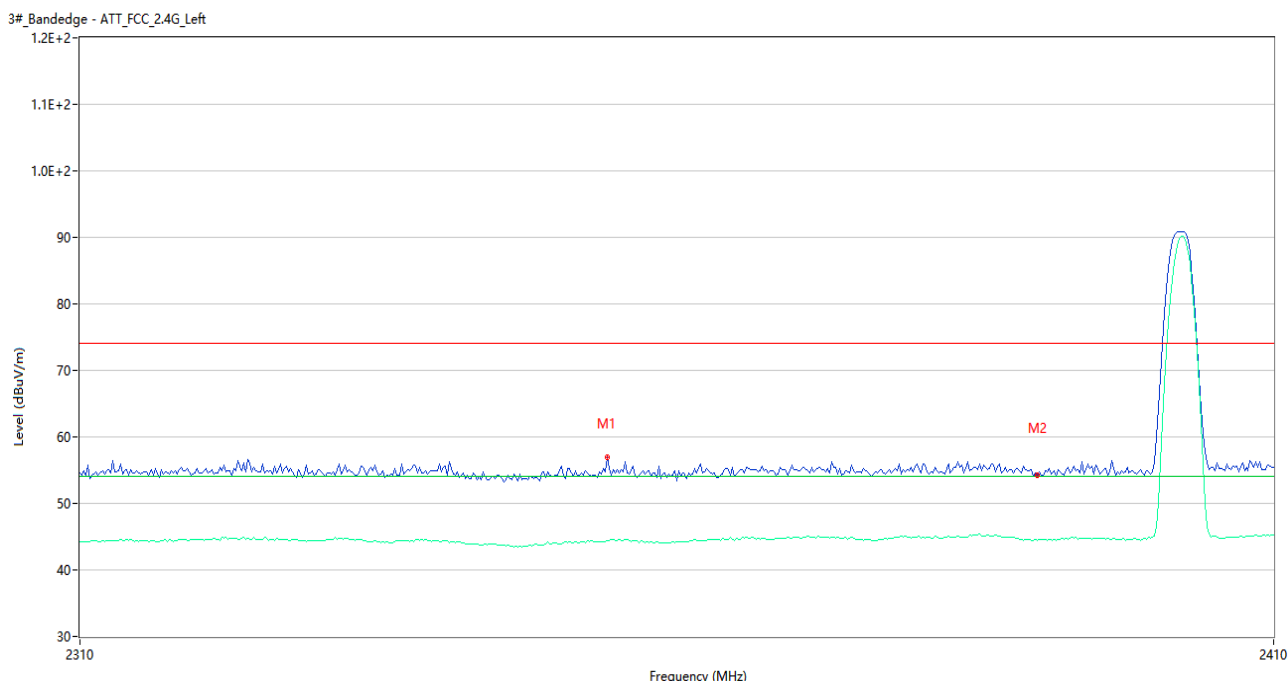

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2352.131	55.59	74.0	18.41	Peak	255.00	300	Horizontal	Pass
1**	2352.131	41.63	54.0	12.37	AV	255.00	300	Horizontal	Pass
2	2390.000	52.71	74.0	21.29	Peak	116.00	300	Horizontal	Pass
2**	2390.000	43.21	54.0	10.79	AV	116.00	300	Horizontal	Pass

GFSK (BLE 1Mbps) HIGH CHANNEL

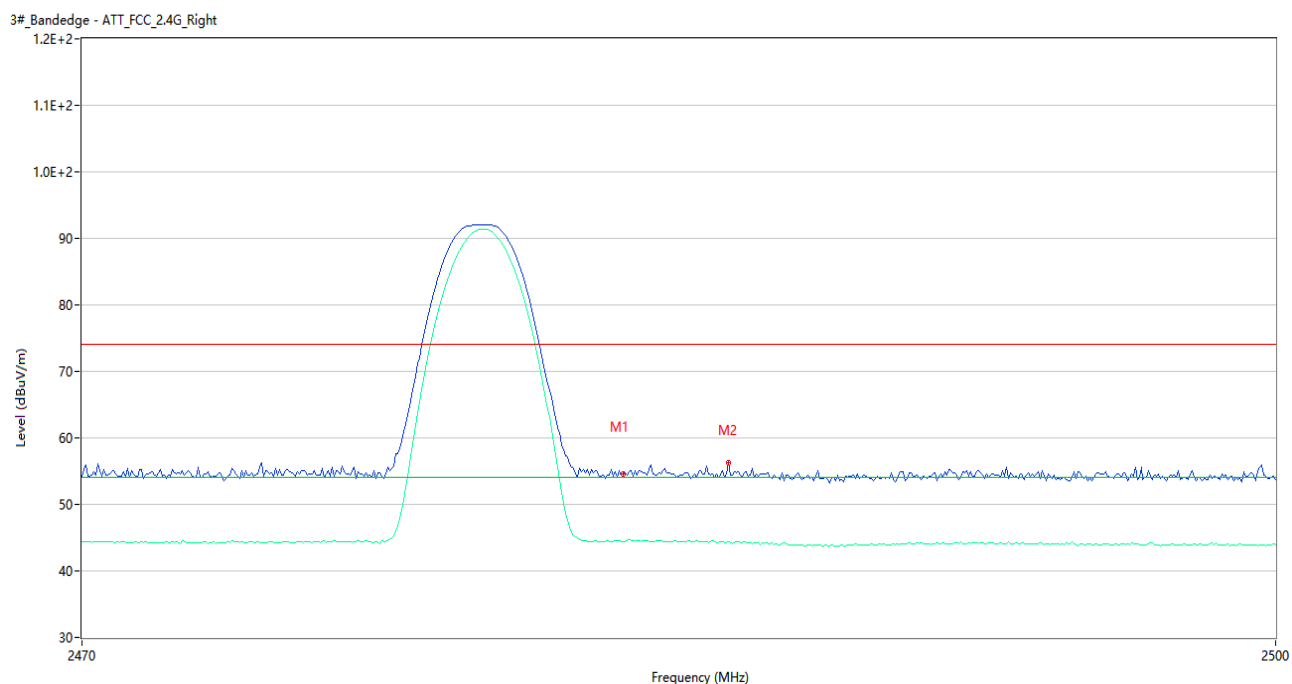

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.18	74.0	19.82	Peak	73.00	300	Horizontal	Pass
1**	2483.500	43.75	54.0	10.25	AV	73.00	300	Horizontal	Pass
2	2487.011	53.95	74.0	20.05	Peak	99.00	100	Horizontal	Pass
2**	2487.011	41.99	54.0	12.01	AV	99.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) LOW CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2350.124	53.45	74.0	20.55	Peak	280.00	100	Horizontal	Pass
1**	2350.124	42.24	54.0	11.76	AV	280.00	100	Horizontal	Pass
2	2390.000	50.81	74.0	23.19	Peak	275.00	100	Horizontal	Pass
2**	2390.000	42.66	54.0	11.34	AV	275.00	100	Horizontal	Pass

GFSK (BLE 2Mbps) HIGH CHANNEL

No.	Frequency (MHz)	Results (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.500	54.87	74.0	19.13	Peak	195.00	100	Horizontal	Pass
1**	2483.500	42.69	54.0	11.31	AV	195.00	100	Horizontal	Pass
2	2489.401	55.39	74.0	18.61	Peak	338.00	100	Horizontal	Pass
2**	2489.401	42.62	54.0	11.38	AV	338.00	100	Horizontal	Pass

A.8 Power Spectral Density (PSD)


Test Data

GFSK (BLE 1Mbps)			
Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-12.27	8	Pass
Middle Channel	-12.17	8	Pass
High Channel	-13.55	8	Pass


GFSK (BLE 2Mbps)			
Channel	Spectral Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
Low Channel	-15.64	8	Pass
Middle Channel	-13.90	8	Pass
High Channel	-14.94	8	Pass

Test Plots


GFSK (BLE 1Mbps) LOW CHANNEL

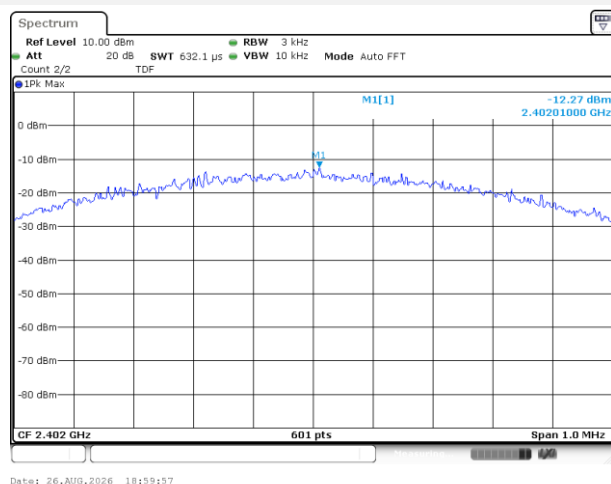


GFSK (BLE 1Mbps) MIDDLE CHANNEL

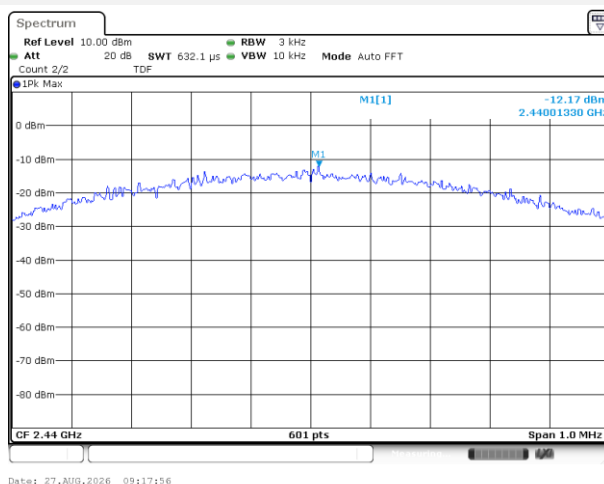


GFSK (BLE 1Mbps) HIGH CHANNEL

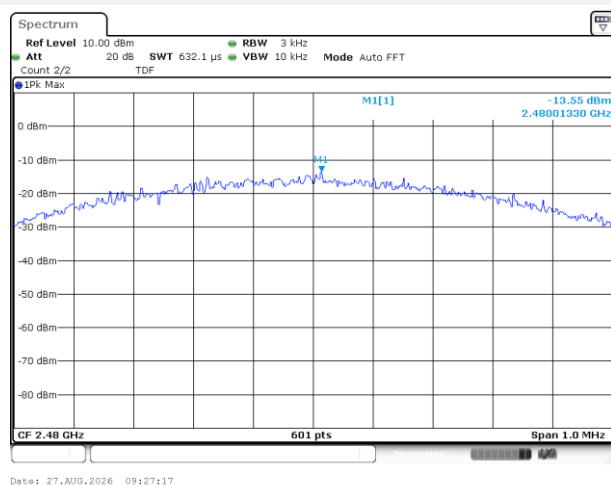


GFSK (BLE 2Mbps) LOW CHANNEL

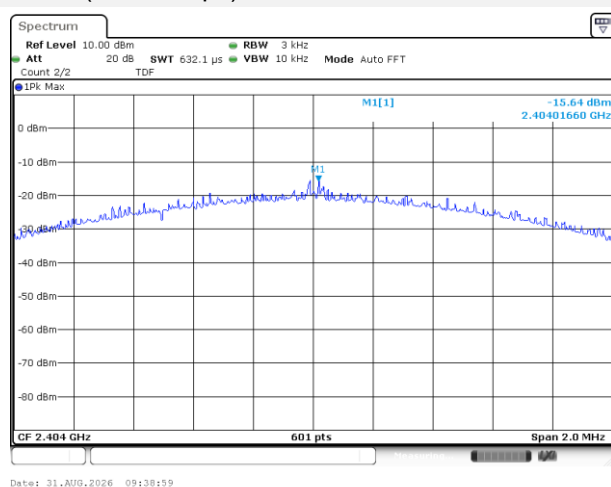

GFSK (BLE 2Mbps) MIDDLE CHANNEL

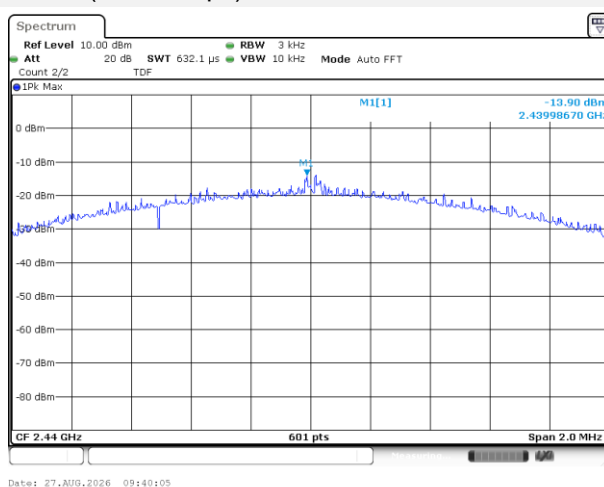

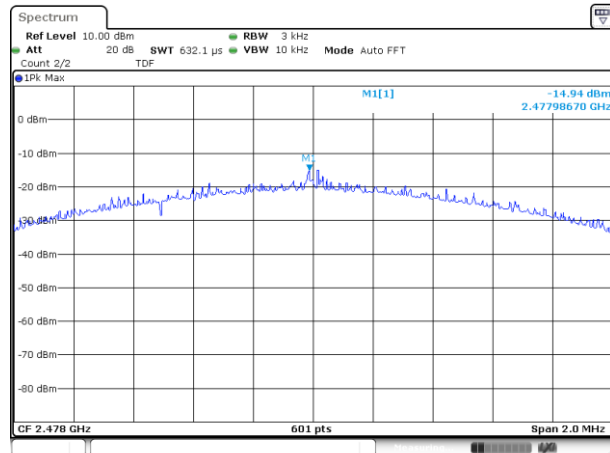GFSK (BLE 2Mbps) HIGH CHANNEL

Date: 27.NIG.2026 09:45:45

ANNEX B TEST SETUP PHOTOS

Please refer the document “Ti-EE26080809-AR.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--